

Report No.: KSCR220200021502

Page: 1 of 83

TEST REPORT

 Application No.:
 KSCR2202000215AT

 FCC ID:
 2ADTD-KD9633WBE6

 IC:
 20199-KD9633WBE6

Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Applicant: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Manufacturer: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Factory: 1.Hangzhou Hikvision Technology Co., Ltd. 2.Hangzhou Hikvision Electronics Co., Ltd.

3.Hangzhou Hikvision Digital Technology Co., Ltd. 4.Chongqing Hikvision technology Co., LTD.

Address of Factory: 1.No.700, Dongliu Road, Binjiang District, Hangzhou Zhejiang, 310052,

China

2.No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County,

Hangzhou, Zhejiang, 310052, China

3.No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China 4.No. 118, Haikang Road, Area C, Jingiao Industrial Park, Dadukou District,

Chongqing, 401325, ChinaDoor Station

Equipment Under Test (EUT):

EUT Name: Door Station

Model No.: DS-KD9633-WBE6, DS-KD9633-WBE6UHK, DS-KD9633-WBE6CKV, DS-

KD9633-WBE6UVS, DS-KD9633-WBE6KVO, DS-KD9633-WBE6HUN&

For IC Model No.: DS-KD9633-WBE6

Please refer to section 2 of this report which indicates which model was

actually tested and which were electrically identical.

Trade Mark: HIKVISION

Standard(s): 47 CFR Part 15, Subpart C 15.247

RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 Amendment 2 (February 2021)

Date of Receipt: 2022-02-24

Date of Test: 2022-03-14 to 2022-03-30

Date of Issue: 2022-03-31

Test Result: Pass*

Eric Lin EMC Laboratory Manager

Ina fin



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: KSCR220200021502

Page: 2 of 83

	Revision Record						
Version	Chapter	Date	Modifier	Remark			
01		2022-03-31		Original			

Authorized for issue by:		
	milo Li	
	Milo Li/Project Engineer	
	Essa Li	
	Eric Lin/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 3 of 83

2 Test Summary

Radio Spectrum Technical Requirement							
Item	FCC Requirement	IC Requirement	Method	Result			
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration			

Radio Spectrum Matter Part						
Item	FCC Requirement	IC Requirement	Method	Result		
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass		
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass		
Conducted Average Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.2	Pass		
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.3	Pass		
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass		
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass		
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass		
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass		
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass		

There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model DS-KD9633-WBE6 was tested since their differences were the model name.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮編 215300



Report No.: KSCR220200021502

Page: 4 of 83

3 Contents

			rage
1	COV	ER PAGE	1
2	TES	T SUMMARY	3
3	CON	TENTS	4
4	GEN	ERAL INFORMATION	6
	4.1	DETAILS OF E.U.T.	6
	4.2	POWER LEVEL SETTING USING IN TEST	6
	4.3	DESCRIPTION OF SUPPORT UNITS	7
	4.4	MEASUREMENT UNCERTAINTY	7
	4.5	TEST LOCATION	8
	4.6	TEST FACILITY	8
	4.7	DEVIATION FROM STANDARDS	8
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
5	EQU	IPMENT LIST	9
6	RAD	IO SPECTRUM TECHNICAL REQUIREMENT	
	6.1	Antenna Requirement	
	6.1.1		
	6.1.2	? Conclusion	11
7	RAD	IO SPECTRUM MATTER TEST RESULTS	12
	7.1	CONDUCTED AVERAGE OUTPUT POWER	
	7.1.1	•	
	7.1.2	· · · · · · · · · · · · · · · · · · ·	
	7.1.3		
	7.1.4		
	7.2	MINIMUM 6dB Bandwidth	
	7.2.1	•	
	7.2.2	Description	14
	7.2.3	· · · · · · · · · · · · · · · · · · ·	
		B Test Setup Diagram	14
	7.2.4	Test Setup Diagram Measurement Procedure and Data	14 14
	7.2.4 7.3	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY	14 14 15
	7.2.4 7.3 7.3.1	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation	14 14 15
	7.2.4 7.3 7.3.1 7.3.2	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Post Mode Description	14 15 15
	7.2.4 7.3 7.3.1 7.3.2 7.3.3	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram	14 15 15 15
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram Measurement Procedure and Data	14 15 15 15 15
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT	14 15 15 15 15
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT E.U.T. Operation	14 15 15 15 15
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT E.U.T. Operation	14 15 15 15 15 16
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2 7.4.3	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Test Setup Diagram Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT E.U.T. Operation Test Mode Description Test Mode Description	
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2 7.4.3 7.4.4	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT E.U.T. Operation Test Mode Description Test Mode Description Test Setup Diagram Measurement Procedure and Data	
	7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2 7.4.3	Test Setup Diagram Measurement Procedure and Data POWER SPECTRUM DENSITY E.U.T. Operation Test Mode Description Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT E.U.T. Operation Test Mode Description Test Mode Description Test Setup Diagram Measurement Procedure and Data CONDUCTED SPURIOUS EMISSIONS	14151515151616161616



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 5 of 83

7.5.2	Test Mode Description	17
7.5.3		
7.5.4	Measurement Procedure and Data	17
7.6	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	18
7.6.1	E.U.T. Operation	18
7.6.2	est Mode Description	18
7.6.3	Test Setup Diagram	19
7.6.4	Measurement Procedure and Data	19
7.7	RADIATED SPURIOUS EMISSIONS BELOW 1GHz	48
7.7.1	E.U.T. Operation	48
7.7.2	Test Mode Description	48
7.7.3	est Setup Diagram	48
7.7.4		
7.8	RADIATED SPURIOUS EMISSIONS ABOVE 1GHz	52
7.8.1	E.U.T. Operation	52
7.8.2	Test Mode Description	52
7.8.3	Test Setup Diagram	52
7.8.4	Measurement Procedure and Data	53
7.9	99% BANDWIDTH	78
7.9.1	E.U.T. Operation	78
7.9.2	Test Mode Description	78
7.9.3	Test Setup Diagram	78
7.9.4	Measurement Procedure and Data	78
8 EMIS	SION TEST RESULTS	79
8.1	CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	79
8.1.1	E.U.T. Operation	79
8.1.2		
8.1.3	•	
8.1.4	· · ·	
9 TEST	SETUP PHOTOGRAPHS	83
10 EUT	CONSTRUCTIONAL DETAILS	0.2
IU EUI	CONSTRUCTIONAL DETAILS	oJ



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 

Report No.: KSCR220200021502

Page: 6 of 83

4 General Information

4.1 Details of E.U.T.

Power supply:	DC12V
Test Voltage:	AC 120V/60Hz
Operation Fraguency	802.11b/g/n(HT20): 2412MHz to 2462MHz,
Operation Frequency:	802.11n(HT40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK),
Modulation Type:	802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Number of Channels:	802.11b/g/n(HT20):11,
Number of Charmers.	802.11n(HT40):7
Channel Spacing:	5MHz
	802.11b: 1/2/5.5/11Mbps
Data Rate:	802.11g: 6/9/12/18/24/36/48/54Mbps
Data Rate.	802.11n(HT20): MCS0~MCS7
	802.11n(HT40): MCS0~MCS7
Antenna Type:	PCB Antenna
Antenna Gain:	0.7dBi (Provided by the manufacturer)
Firmware Version:	V2.3.4
Serial Number:	G75903827

4.2 Power level setting using in test

	<u> </u>		
Channel	802.11b	802.11g	802.11n(HT20)
Channel	Ant 1	Ant 1	Ant 1
1	40	48	48
6	40	48	48
11	40	48	48
Channal	802.11n(HT40)		
Channel	Ant 1		
3	48		
6	48		
9	48		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10、Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 7 of 83

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645
Adapter	HONOTO	ADS-12AM-12 12012EPCU	/

4.4 Measurement Uncertainty

	44 Modernment Choortainty					
No.	Item	Measurement Uncertainty				
1	Radio Frequency	8.4 x 10 ⁻⁸				
2	Timeout	2s				
3	Duty Cycle	0.37%				
4	Occupied Bandwidth	3%				
5	RF Conducted Power	0.6dB				
6	RF Power Density	2.9dB				
7	Conducted Spurious Emissions	0.75dB				
8	RF Radiated Power	5.2dB (Below 1GHz)				
0	RF Radiated Power	5.9dB (Above 1GHz)				
		4.2dB (Below 30MHz)				
	Dedicted Chamieus Emission Test	4.5dB (30MHz-1GHz)				
9	Radiated Spurious Emission Test	5.1dB (1GHz-18GHz)				
		5.4dB (Above 18GHz)				
10	Temperature Test	1°C				
11	Humidity Test	3%				
12	Supply Voltages	1.5%				
13	Time	3%				

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 8 of 83

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888

Fax: +86 512 5737 0818

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC (Designation Number: CN1172)

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 9 of 83

5 Equipment List

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date		
Con	Conducted Emission at Mains Terminals (150kHz-30MHz)							
1	EMI Test Receive	R&S	ESCI	100781	01/22/2022	01/21/2023		
2	LISN	R&S	ENV216	101604	10/12/2021	10/11/2022		
3	LISN	Schwarzbeck	NNLK 8129	8129-143	10/12/2021	10/11/2022		
4	Pulse Limiter	R&S	ESH3-Z2	100609	01/22/2022	01/21/2023		
5	CE test Cable	Thermax	1	14	10/16/2021	10/15/2022		
6	Test Software	Faratronic	EZ-EMC	CCS-03A1	N.C.R	N.C.R		
RF (Conducted Test							
1	Spectrum Analyzer	Agilent	E4446A	MY44020154	04/16/2021	04/15/2022		
2	Spectrum Analyzer	Keysight	N9020A	MY55370209	10/11/2021	10/10/2022		
4	Signal Generator	Agilent	N5182A	MY50142015	08/27/2021	08/26/2022		
5	Spectrum Analyzer	Keysight	N9030B	MY61330164	01/22/2022	01/21/2023		
6	Vector Signal Generator	R&S	SMW200A	110074	10/12/2021	10/11/2022		
7	Radio Communication Test Station	Anritsu	MT8000A	6262012849	09/23/2021	09/22/2022		
8	Radio Communication Analyzer	Anritsu	MT8821C	6201692222	09/23/2021	09/22/2022		
9	Universal Radio Communication Tester	R&S	CMW500	159275	10/12/2021	10/11/2022		
10	Universal Radio Communication Tester	R&S	CMW500	167239	04/16/2021	04/15/2022		
11	Power Meter	Anritsu	ML2495A	1445010	04/15/2021	04/14/2022		
12	Switcher	CCSRF	FY562	KUS2001M001-3	10/12/2021	10/11/2022		
13	AC Power Source	EXTECH	6605	1570106	N.C.R	N.C.R		
14	DC Power Supply	Aglient	E3632A	MY50340053	N.C.R	N.C.R		
15	6dB Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R	N.C.R		
16	Power Divider	AISI	IOWOPE2068	PE2068	N.C.R	N.C.R		
17	Filter	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R		
18	Conducted Test Cable	1	RF01-RF04	1	04/15/2021	04/14/2022		
19	Software	BST	TST-PASS	N/A	N/A	N/A		
20	Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	04/15/2021	04/14/2022		
21	Thermometer	Anymetre	TH603	CCS007	10/14/2021	10/13/2022		
RF R	adiated Test							
1	Spectrum Analyzer	R&S	FSV40	101493	10/11/2021	10/10/2022		
2	Signal Generator	Agilent	E8257C	MY43321570	10/18/2021	10/17/2022		
3	Loop Antenna	Com-Power	AL-130R	10160008	04/13/2021	04/12/2023		
4	Bilog Antenna	TESEQ	CBL 6112D	35403	06/21/2021	06/20/2023		
5	Bilog Antenna	SCHWARZBECK	VULB9160	9160-3342	04/13/2021	04/12/2023		
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	267	10/26/2020	10/25/2022		
7	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	00143290	02/22/2021	02/21/2023		
8	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	BBHA9170171	02/20/2022	02/19/2023		
9	Pre-Amplifier(30MHz~18GHz)	LNA	/	/	04/15/2021	04/14/2022		
10	Amplifier(18~40GHz)	COM-POWER	PAM-840A	461332	10/18/2021	10/17/2022		
11	Low Pass Filter	MICRO-TRONICS	VLFX-950	RV142900829	N.C.R	N.C.R		
12	High Pass Filter	Mini-Circuits	VHF-1200	15542	N.C.R	N.C.R		
13	Filter (5450MHz~5770 MHz)	MICRO-TRONICS	BRC50704-01	2	N.C.R	N.C.R		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 10 of 83

14	Filter (5690 MHz~5930 MHz)	MICRO-TRONICS	BRC50705-01	4	N.C.R	N.C.R
15	Filter (5150 MHz~5350 MHz)	MICRO-TRONICS	BRC50703-01	2	N.C.R	N.C.R
16	Filter (885 MHz~915 MHz)	MICRO-TRONICS	BRM14698	1	N.C.R	N.C.R
17	Filter (815 MHz~860 MHz)	MICRO-TRONICS	BRM14697	1	N.C.R	N.C.R
18	Filter (1745 MHz \sim 1910 MHz)	MICRO-TRONICS	BRM14700	1	N.C.R	N.C.R
19	Filter (1922 MHz \sim 1977 MHz)	MICRO-TRONICS	BRM50715	1	N.C.R	N.C.R
20	Filter (2550 MHz)	MICRO-TRONICS	HPM13362	5	N.C.R	N.C.R
21	Filter (1532 MHz \sim 1845 MHz)	MICRO-TRONICS	BRM50713	1	N.C.R	N.C.R
22	Filter (2.4GHz)	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
23	RE test cable	1	RE01-RE04	1	04/15/2021	04/14/2022
24	Software	Faratronic	EZ_EMC	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 11 of 83

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.7dBi.

Antenna location: Refer to internal photo.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 12 of 83

7 Radio Spectrum Matter Test Results

7.1 Conducted Average Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1 for ≥50 hopping channels
902-928	0.25 for 25≤ hopping channels <50
	1 for digital modulation
	1 for ≥75 non-overlapping hopping channels
2400-2483.5	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 21.3 °C Humidity: 38.9 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

7.1.2 Test mode besorption								
Pre-scan / Final test	Mode Code	Description						
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.						



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 83071443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300


Member of the SGS Group (SGS SA)



Report No.: KSCR220200021502

Page: 13 of 83

7.1.3 Test Setup Diagram

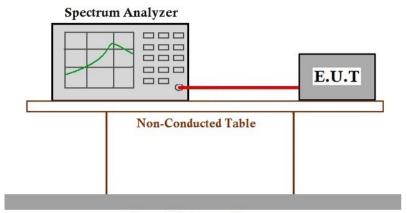

Ground Reference Plane

7.1.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 14 of 83

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 21.2 °C Humidity: 38.8 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

	Tiziz Took ilload Boodilption									
Pre-scan / Final test	Mode Code	Description								
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.								

7.2.3 Test Setup Diagram

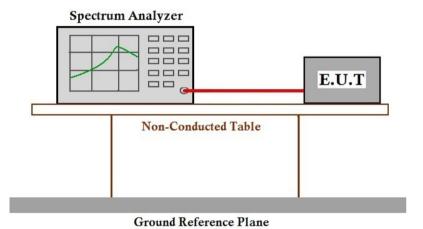

7.2.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 15 of 83

7.3 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

	7.0.2 Test mode bescription								
Pre-scan / Final test	Mode Code	Description							
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.							

7.3.3 Test Setup Diagram

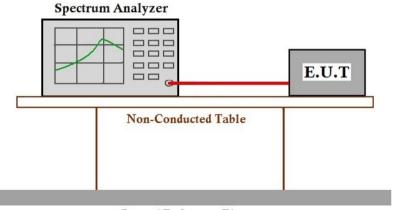

Ground Reference Plane

7.3.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 16 of 83

7.4 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 21.3 °C Humidity: 38.6 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

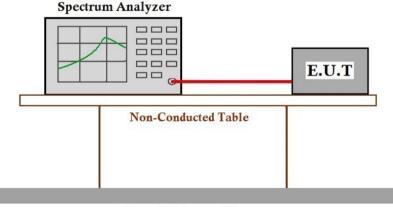

Ground Reference Plane

7.4.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

or email: <u>CN.Doccheck@sgs.com</u>
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57358888 f(86-512)57370818 sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.: KSCR220200021502

Page: 17 of 83

7.5 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d) Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.5.1 E.U.T. Operation


Operating Environment:

21.3 °C Temperature: 38.4 % RH Atmospheric Pressure: 1010 mbar Humidity:

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

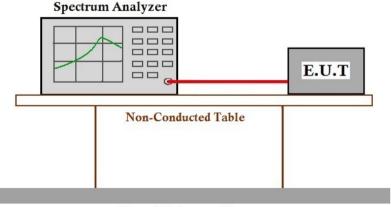

Ground Reference Plane

7.5.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220200021502

Page: 18 of 83

7.6 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C Humidity: 45.7 % RH Atmospheric Pressure: 1010 mbar

7.6.2 est Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300




Report No.: KSCR220200021502

Page: 19 of 83

7.6.3 Test Setup Diagram

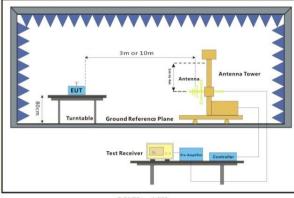

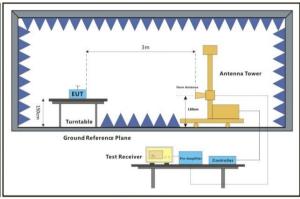

30MHz-1GHz

Above 1GHz

7.6.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 20 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel: Low

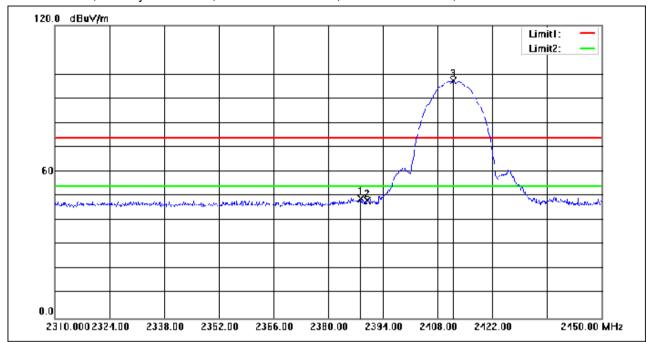

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.260	63.02	-14.01	49.01	74.00	-24.99	peak
2	2390.000	62.18	-14.01	48.17	74.00	-25.83	peak
3	2412.060	111.21	-13.94	97.27	74.00	23.27	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 21 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel: Low

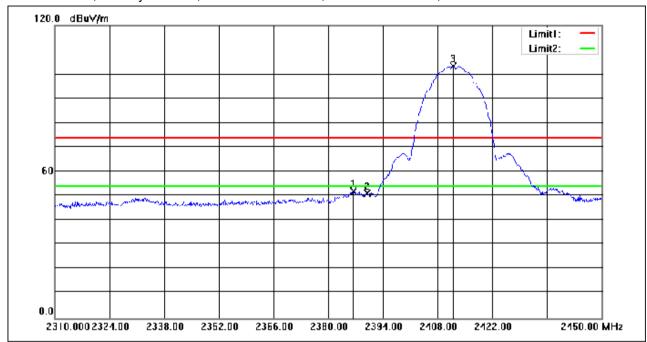

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.440	65.95	-14.02	51.93	74.00	-22.07	peak
2	2390.000	65.10	-14.01	51.09	74.00	-22.91	peak
3	2412.060	117.32	-13.94	103.38	74.00	29.38	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 22 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel: High

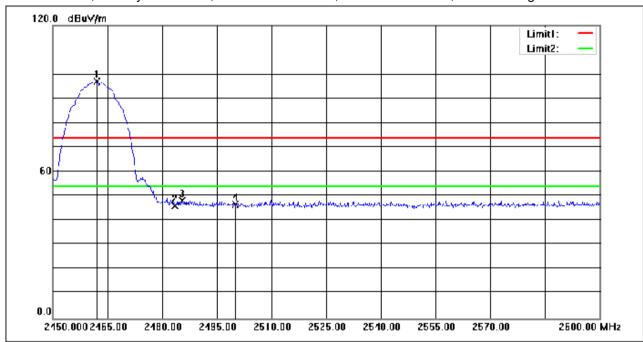

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.000	110.76	-13.78	96.98	74.00	22.98	peak
2	2483.500	59.83	-13.71	46.12	74.00	-27.88	peak
3	2485.400	61.87	-13.70	48.17	74.00	-25.83	peak
4	2500.000	60.34	-13.64	46.70	74.00	-27.30	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 23 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel: High

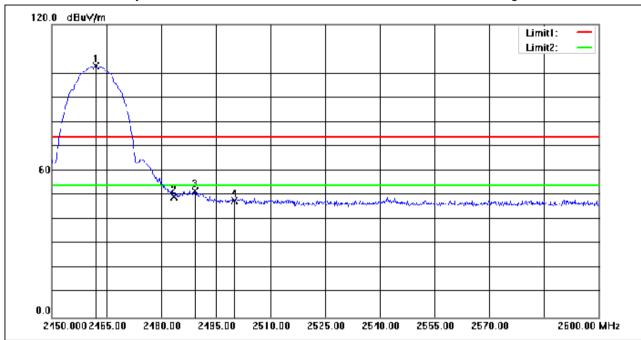

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2462.000	116.79	-13.78	103.01	74.00	29.01	peak
2	2483.500	63.03	-13.71	49.32	74.00	-24.68	peak
3	2489.300	65.40	-13.68	51.72	74.00	-22.28	peak
4	2500.000	61.43	-13.64	47.79	74.00	-26.21	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 24 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

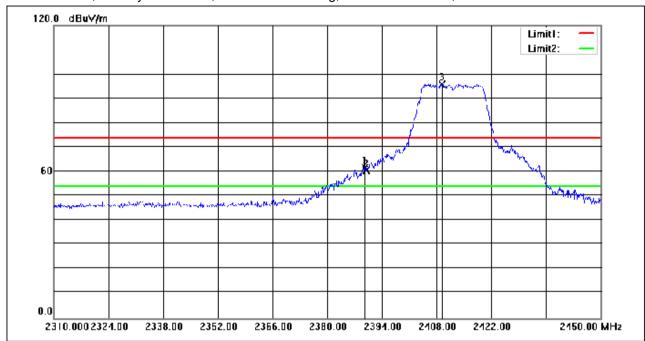

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.660	75.68	-14.01	61.67	74.00	-12.33	peak
2	2390.000	74.49	-14.01	60.48	74.00	-13.52	peak
3	2409.400	109.93	-13.95	95.98	74.00	21.98	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 25 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

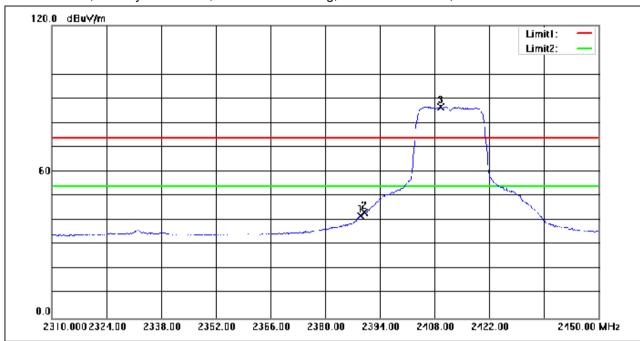

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.100	55.71	-14.01	41.70	54.00	-12.30	AVG
2	2390.000	57.34	-14.01	43.33	54.00	-10.67	AVG
3	2409.540	100.49	-13.95	86.54	54.00	32.54	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 26 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

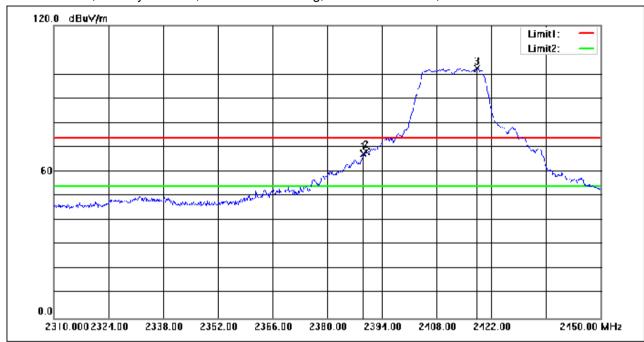

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.240	81.44	-14.01	67.43	74.00	-6.57	peak
2	2390.000	82.32	-14.01	68.31	74.00	-5.69	peak
3	2418.360	116.25	-13.92	102.33	74.00	28.33	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 27 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

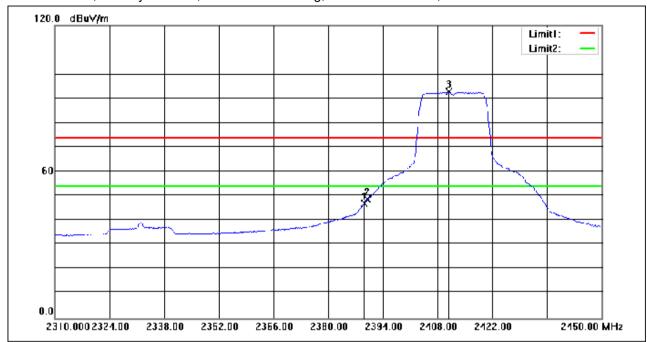

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.240	61.09	-14.01	47.08	54.00	-6.92	AVG
2	2390.000	62.90	-14.01	48.89	54.00	-5.11	AVG
3	2410.800	106.65	-13.94	92.71	54.00	38.71	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 28 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: High

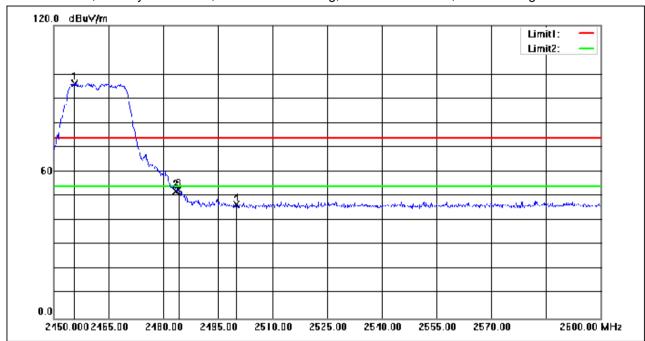

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2455.700	110.08	-13.79	96.29	74.00	22.29	peak
2	2483.500	65.85	-13.71	52.14	74.00	-21.86	peak
3	2484.350	66.43	-13.70	52.73	74.00	-21.27	peak
4	2500.000	60.36	-13.64	46.72	74.00	-27.28	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 29 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: High

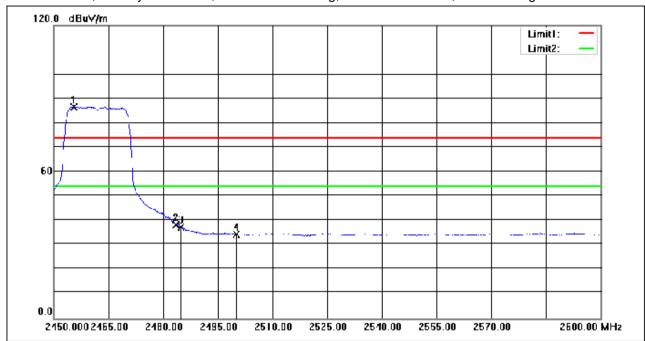

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2455.400	100.46	-13.79	86.67	54.00	32.67	AVG
2	2483.500	52.11	-13.71	38.40	54.00	-15.60	AVG
3	2484.800	51.16	-13.70	37.46	54.00	-16.54	AVG
4	2500.000	48.04	-13.64	34.40	54.00	-19.60	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 30 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: High

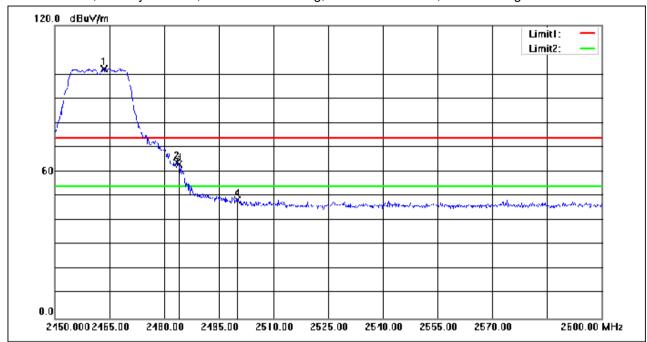

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2463.500	116.05	-13.77	102.28	74.00	28.28	peak
2	2483.500	77.60	-13.71	63.89	74.00	-10.11	peak
3	2484.050	76.95	-13.70	63.25	74.00	-10.75	peak
4	2500.000	62.13	-13.64	48.49	74.00	-25.51	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 31 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: High

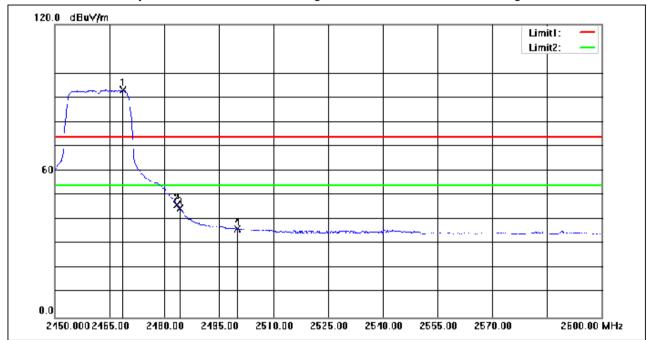

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2468.600	106.88	-13.75	93.13	54.00	39.13	AVG
2	2483.500	59.68	-13.71	45.97	54.00	-8.03	AVG
3	2484.350	58.25	-13.70	44.55	54.00	-9.45	AVG
4	2500.000	49.86	-13.64	36.22	54.00	-17.78	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 32 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

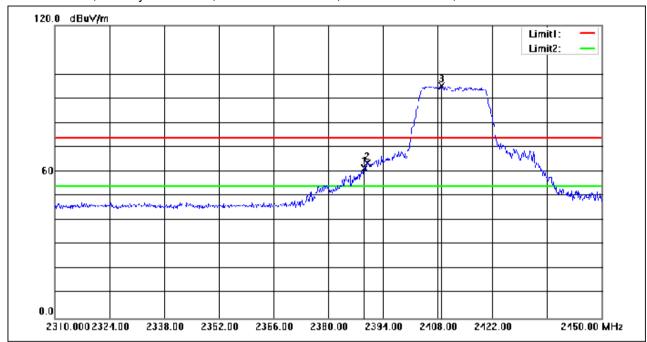

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.240	75.43	-14.01	61.42	74.00	-12.58	peak
2	2390.000	77.59	-14.01	63.58	74.00	-10.42	peak
3	2408.980	109.08	-13.95	95.13	74.00	21.13	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 33 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

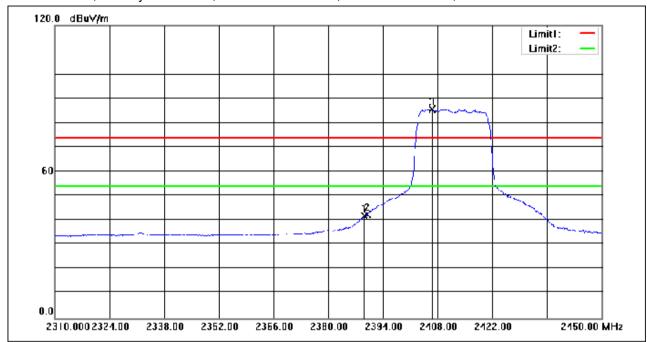

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.240	55.71	-14.01	41.70	54.00	-12.30	AVG
2	2390.000	56.61	-14.01	42.60	54.00	-11.40	AVG
3	2406.600	99.70	-13.95	85.75	54.00	31.75	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 34 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

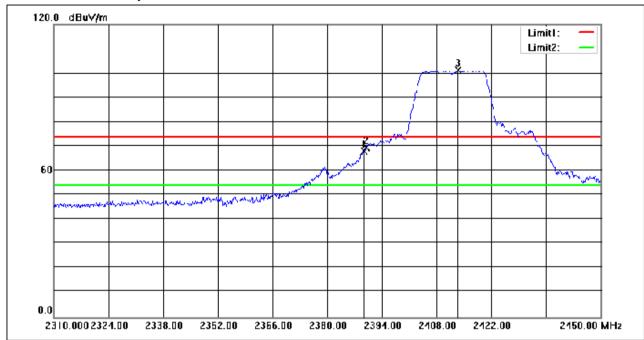

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.380	82.08	-14.01	68.07	74.00	-5.93	peak
2	2390.000	83.46	-14.01	69.45	74.00	-4.55	peak
3	2413.460	115.07	-13.94	101.13	74.00	27.13	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 35 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

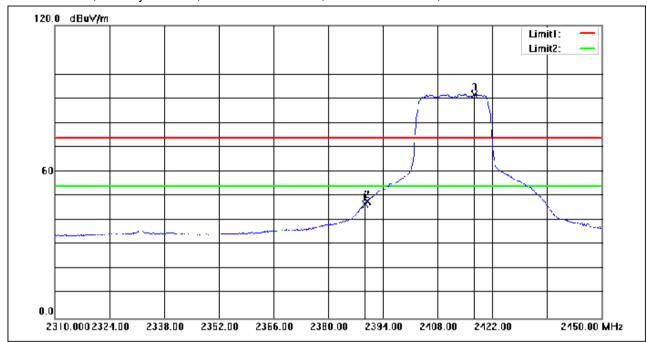

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.380	60.71	-14.01	46.70	54.00	-7.30	AVG
2	2390.000	61.84	-14.01	47.83	54.00	-6.17	AVG
3	2417.380	105.65	-13.93	91.72	54.00	37.72	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 36 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: High

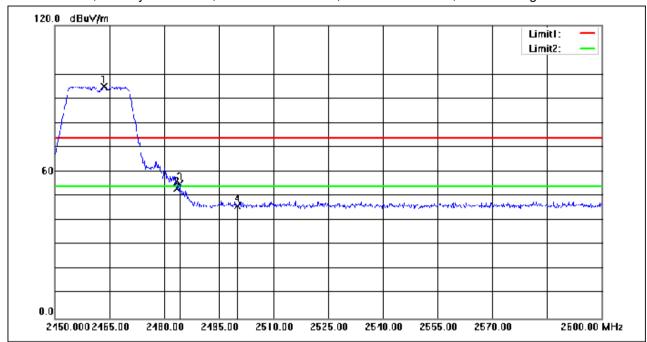

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2463.500	108.86	-13.77	95.09	74.00	21.09	peak
2	2483.500	66.99	-13.71	53.28	74.00	-20.72	peak
3	2484.350	68.75	-13.70	55.05	74.00	-18.95	peak
4	2500.000	59.69	-13.64	46.05	74.00	-27.95	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 37 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: High

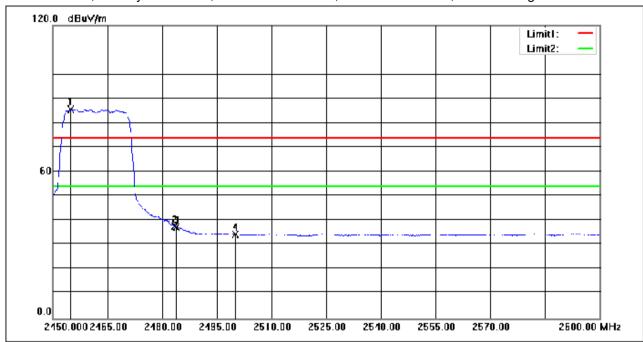

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2454.800	99.56	-13.80	85.76	54.00	31.76	AVG
2	2483.500	51.25	-13.71	37.54	54.00	-16.46	AVG
3	2483.900	51.19	-13.70	37.49	54.00	-16.51	AVG
4	2500.000	47.92	-13.64	34.28	54.00	-19.72	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 38 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

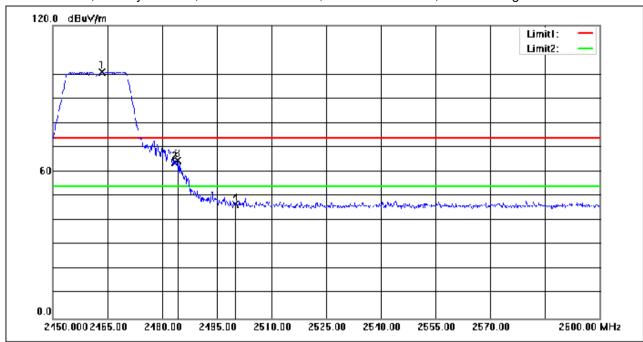

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2463.500	114.82	-13.77	101.05	74.00	27.05	peak
2	2483.500	77.60	-13.71	63.89	74.00	-10.11	peak
3	2484.200	78.22	-13.70	64.52	74.00	-9.48	peak
4	2500.000	60.29	-13.64	46.65	74.00	-27.35	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 39 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

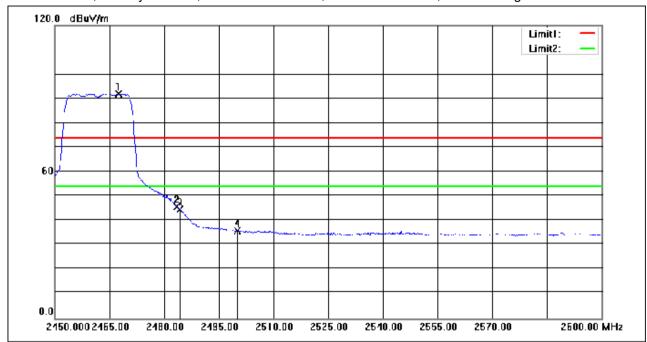

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2467.400	105.80	-13.75	92.05	54.00	38.05	AVG
2	2483.500	59.41	-13.71	45.70	54.00	-8.30	AVG
3	2484.350	58.37	-13.70	44.67	54.00	-9.33	AVG
4	2500.000	49.41	-13.64	35.77	54.00	-18.23	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 40 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

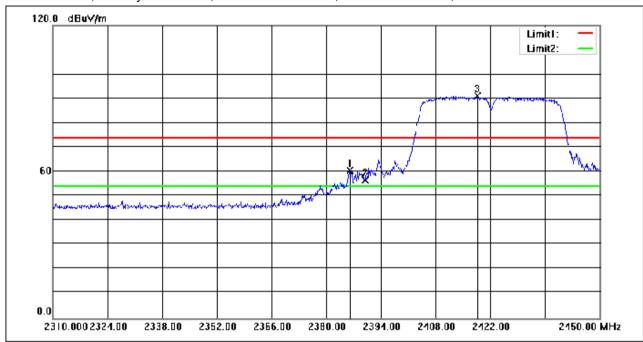

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.020	74.37	-14.02	60.35	74.00	-13.65	peak
2	2390.000	70.53	-14.01	56.52	74.00	-17.48	peak
3	2418.640	105.08	-13.91	91.17	74.00	17.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 41 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

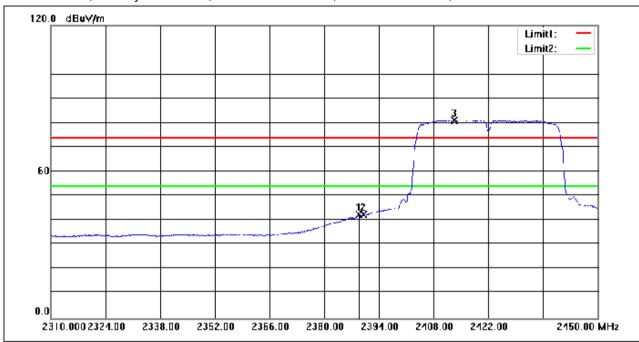

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.820	56.35	-14.01	42.34	54.00	-11.66	AVG
2	2390.000	56.55	-14.01	42.54	54.00	-11.46	AVG
3	2413.320	95.23	-13.94	81.29	54.00	27.29	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 42 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

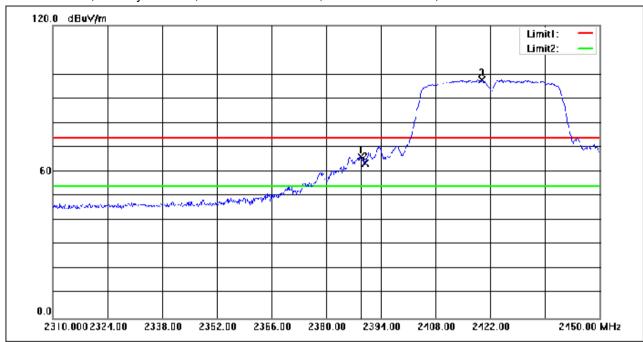

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.820	80.19	-14.01	66.18	74.00	-7.82	peak
2	2390.000	77.46	-14.01	63.45	74.00	-10.55	peak
3	2419.760	111.65	-13.91	97.74	74.00	23.74	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 43 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

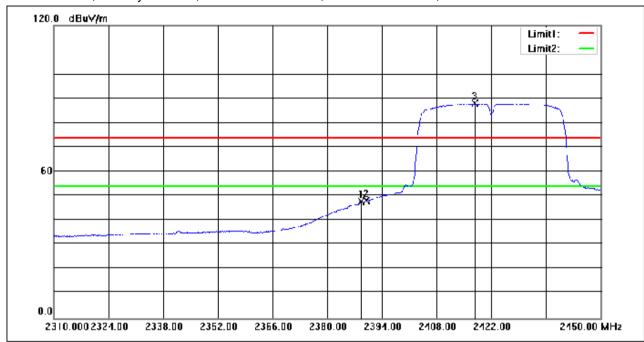

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.680	61.98	-14.01	47.97	54.00	-6.03	AVG
2	2390.000	62.23	-14.01	48.22	54.00	-5.78	AVG
3	2417.800	101.83	-13.92	87.91	54.00	33.91	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 44 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: High

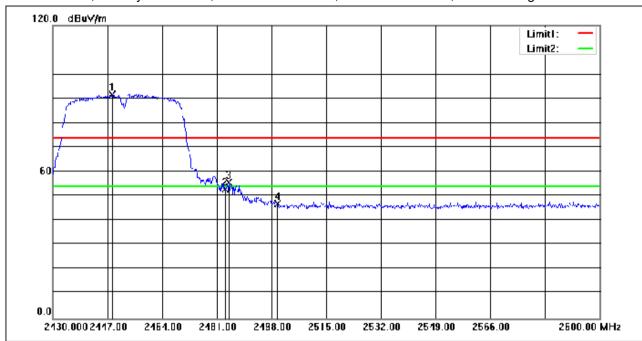

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2448.530	105.52	-13.82	91.70	74.00	17.70	peak
2	2483.500	66.54	-13.71	52.83	74.00	-21.17	peak
3	2484.740	69.29	-13.70	55.59	74.00	-18.41	peak
4	2500.000	60.65	-13.64	47.01	74.00	-26.99	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 45 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: High

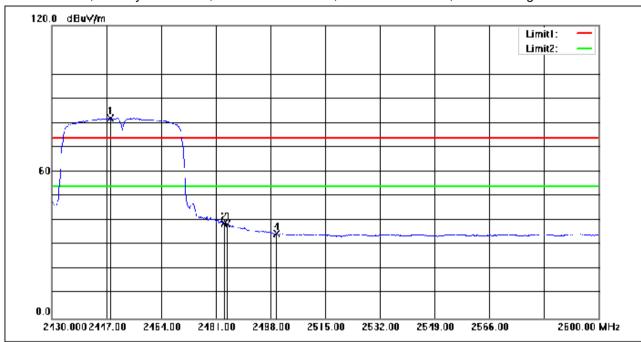

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2448.190	95.91	-13.82	82.09	54.00	28.09	AVG
2	2483.500	52.63	-13.71	38.92	54.00	-15.08	AVG
3	2484.570	52.24	-13.70	38.54	54.00	-15.46	AVG
4	2500.000	48.32	-13.64	34.68	54.00	-19.32	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 46 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: High

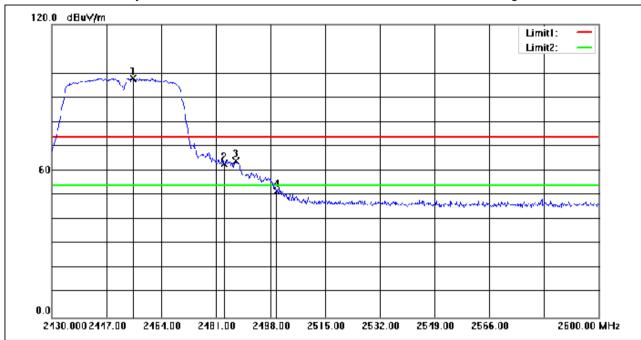

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2455.330	111.68	-13.79	97.89	74.00	23.89	peak
2	2483.500	76.59	-13.71	62.88	74.00	-11.12	peak
3	2487.120	77.76	-13.70	64.06	74.00	-9.94	peak
4	2500.000	65.47	-13.64	51.83	74.00	-22.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 47 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: High

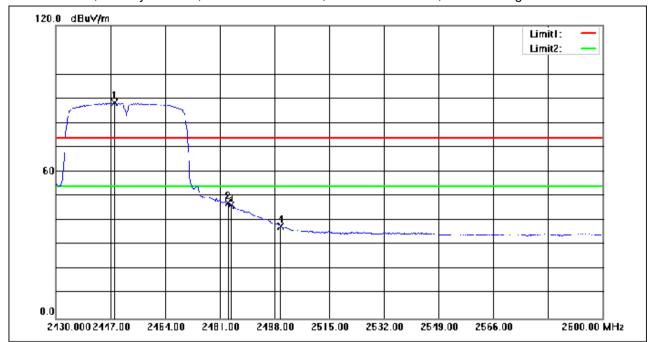

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2448.190	102.12	-13.82	88.30	54.00	34.30	AVG
2	2483.500	60.95	-13.71	47.24	54.00	-6.76	AVG
3	2484.570	60.08	-13.70	46.38	54.00	-7.62	AVG
4	2500.000	51.31	-13.64	37.67	54.00	-16.33	AVG



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 48 of 83

7.7 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.7.1 E.U.T. Operation


Operating Environment:


Temperature: 23.0 °C Humidity: 45.6 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.7.3 est Setup Diagram

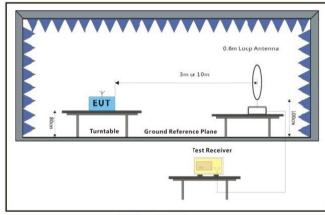

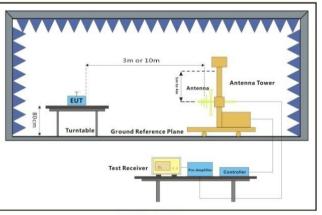

Below 30MHz 30MHz-1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220200021502

Page: 49 of 83

7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021502

Page: 50 of 83

Test Mode: 00; Polarity: Horizontal

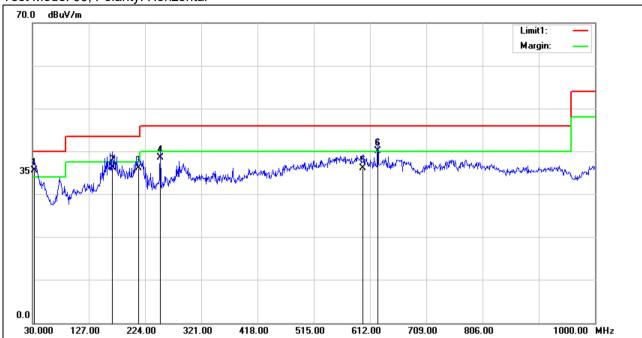

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	32.9100	10.58	25.04	35.62	40.00	-4.38	100	162	QP
2	167.7400	19.15	17.10	36.25	43.50	-7.25	100	252	QP
3	212.3600	19.39	16.76	36.15	43.50	-7.35	100	325	QP
4	250.1900	18.84	19.78	38.62	46.00	-7.38	100	144	QP
5	599.3900	9.18	27.04	36.22	46.00	-9.78	100	215	QP
6	625.5800	12.80	27.35	40.15	46.00	-5.85	100	152	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 51 of 83

Test Mode: 00; Polarity: Vertical

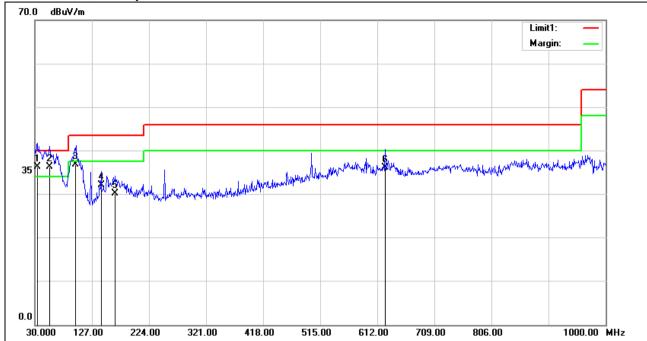

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	34.5000	11.60	24.78	36.38	40.00	-3.62	99	13	QP
2	55.4400	20.32	15.98	36.30	40.00	-3.70	101	360	QP
3	99.5600	19.77	16.99	36.76	43.50	-6.74	100	248	QP
4	142.5200	13.76	18.29	32.05	43.50	-11.45	100	359	QP
5	166.7700	13.01	17.15	30.16	43.50	-13.34	100	12	QP
6	625.5800	8.83	27.35	36.18	46.00	-9.82	100	27	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 52 of 83

7.8 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)	
Above 1000	500	3	

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 45.5 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

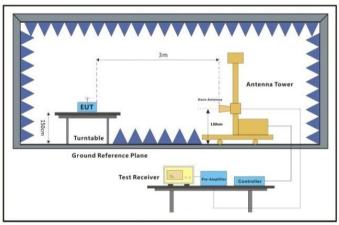

Above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 53 of 83

7.8.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021502

Page: 54 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel: Low

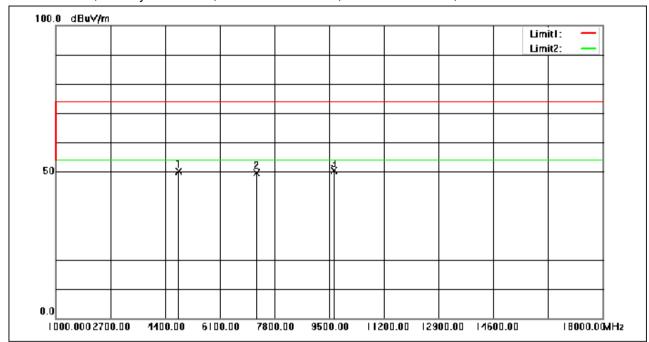

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	58.89	-8.78	50.11	74.00	-23.89	peak
2	7236.000	55.38	-5.86	49.52	74.00	-24.48	peak
3	9648.000	51.65	-1.31	50.34	74.00	-23.66	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 55 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel: Low

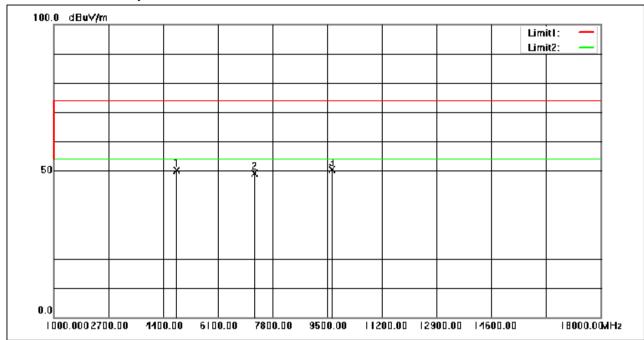

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	58.87	-8.78	50.09	74.00	-23.91	peak
2	7236.000	55.00	-5.86	49.14	74.00	-24.86	peak
3	9648.000	51.73	-1.31	50.42	74.00	-23.58	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 56 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel: middle

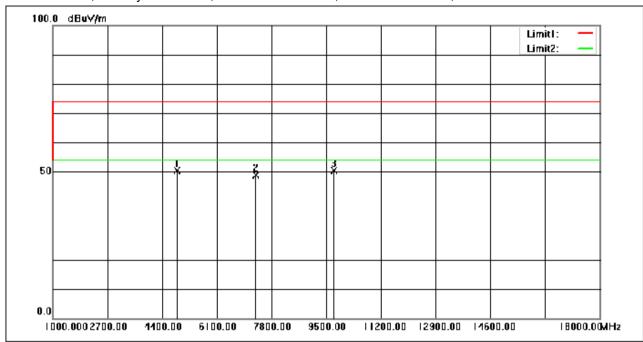

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	59.00	-8.61	50.39	74.00	-23.61	peak
2	7311.000	54.78	-5.78	49.00	74.00	-25.00	peak
3	9748.000	51.85	-1.43	50.42	74.00	-23.58	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220200021502

Page: 57 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel: middle

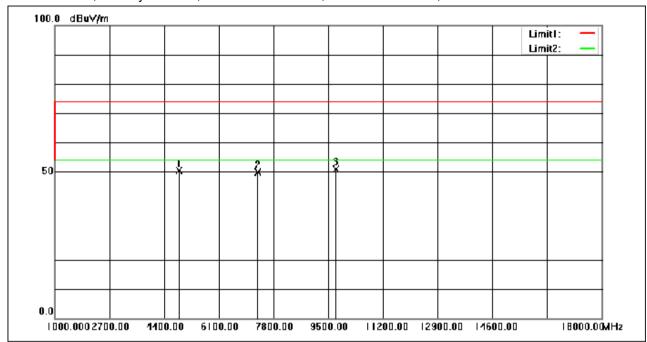

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	58.97	-8.61	50.36	74.00	-23.64	peak
2	7311.000	55.69	-5.78	49.91	74.00	-24.09	peak
3	9748.000	52.26	-1.43	50.83	74.00	-23.17	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 58 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel: High

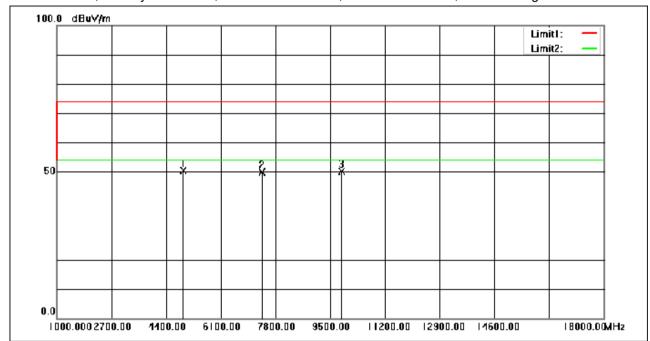

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	58.87	-8.44	50.43	74.00	-23.57	peak
2	7386.000	55.49	-5.69	49.80	74.00	-24.20	peak
3	9848.000	51.34	-1.27	50.07	74.00	-23.93	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 59 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel: High

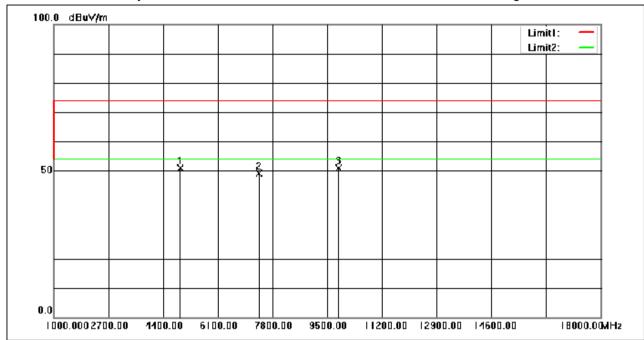

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	59.38	-8.44	50.94	74.00	-23.06	peak
2	7386.000	54.94	-5.69	49.25	74.00	-24.75	peak
3	9848.000	52.14	-1.27	50.87	74.00	-23.13	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 60 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

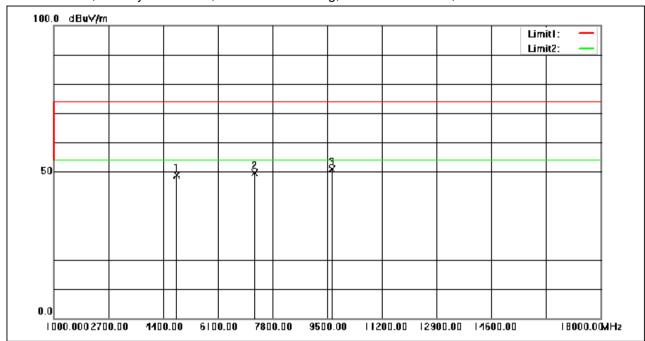

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	57.56	-8.78	48.78	74.00	-25.22	peak
2	7236.000	55.50	-5.86	49.64	74.00	-24.36	peak
3	9648.000	52.23	-1.31	50.92	74.00	-23.08	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220200021502

Page: 61 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: Low

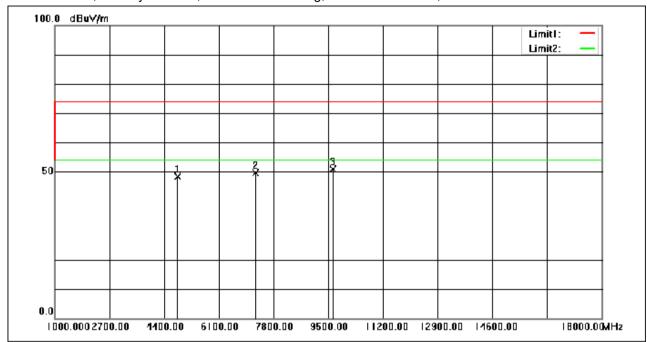

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	57.23	-8.78	48.45	74.00	-25.55	peak
2	7236.000	55.47	-5.86	49.61	74.00	-24.39	peak
3	9648.000	52.13	-1.31	50.82	74.00	-23.18	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 62 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: middle

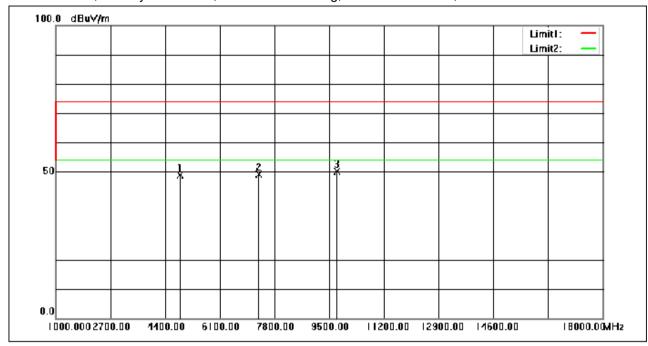

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	57.60	-8.61	48.99	74.00	-25.01	peak
2	7311.000	54.83	-5.78	49.05	74.00	-24.95	peak
3	9748.000	51.64	-1.43	50.21	74.00	-23.79	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 63 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: middle

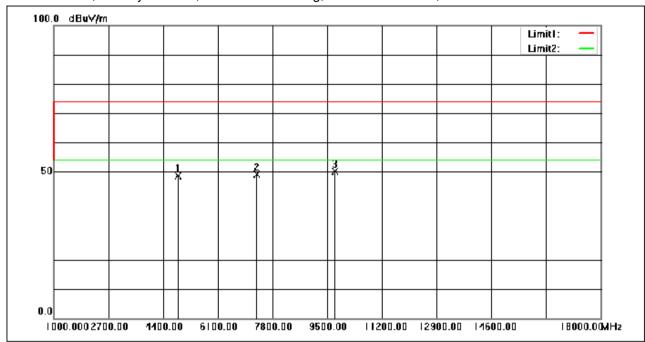

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	57.33	-8.61	48.72	74.00	-25.28	peak
2	7311.000	54.84	-5.78	49.06	74.00	-24.94	peak
3	9748.000	51.54	-1.43	50.11	74.00	-23.89	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 64 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel: High



No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	57.37	-8.44	48.93	74.00	-25.07	peak
2	7386.000	55.57	-5.69	49.88	74.00	-24.12	peak
3	9848.000	51.81	-1.27	50.54	74.00	-23.46	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 65 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel: High



No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	57.27	-8.44	48.83	74.00	-25.17	peak
2	7386.000	55.36	-5.69	49.67	74.00	-24.33	peak
3	9848.000	51.65	-1.27	50.38	74.00	-23.62	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 66 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

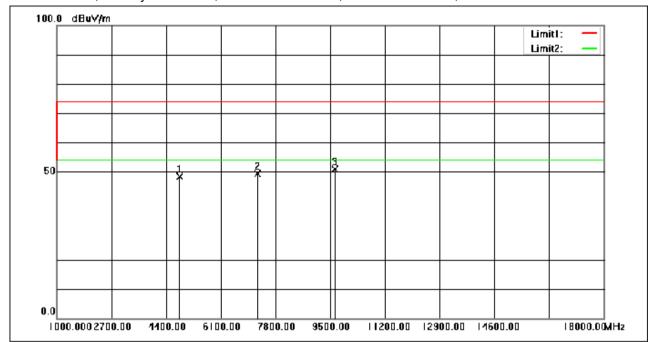

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	57.24	-8.78	48.46	74.00	-25.54	peak
2	7236.000	55.34	-5.86	49.48	74.00	-24.52	peak
3	9648.000	52.26	-1.31	50.95	74.00	-23.05	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 67 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

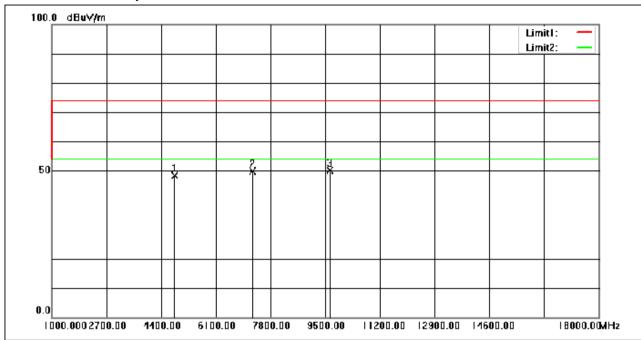

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4824.000	57.25	-8.78	48.47	74.00	-25.53	peak
2	7236.000	55.83	-5.86	49.97	74.00	-24.03	peak
3	9648.000	51.56	-1.31	50.25	74.00	-23.75	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 68 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: middle

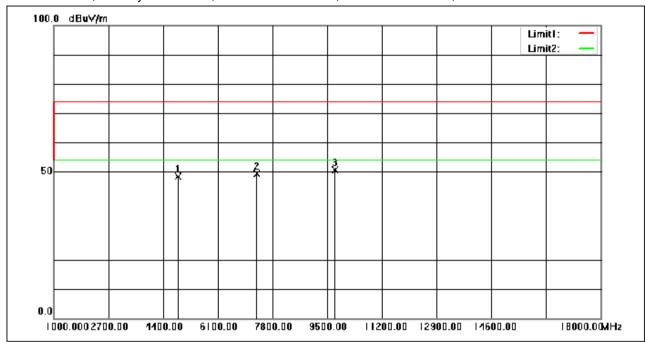

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	56.91	-8.61	48.30	74.00	-25.70	peak
2	7311.000	55.27	-5.78	49.49	74.00	-24.51	peak
3	9748.000	52.08	-1.43	50.65	74.00	-23.35	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 69 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: middle

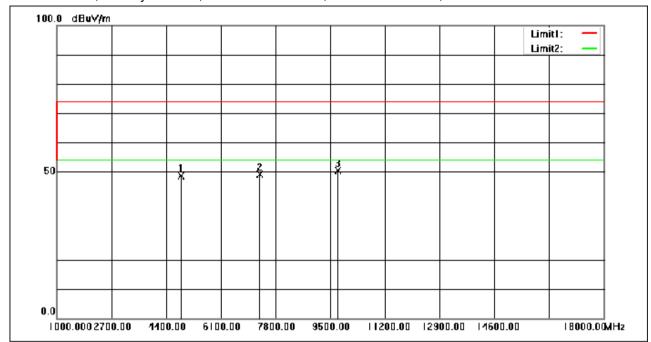

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	57.27	-8.61	48.66	74.00	-25.34	peak
2	7311.000	54.94	-5.78	49.16	74.00	-24.84	peak
3	9748.000	51.77	-1.43	50.34	74.00	-23.66	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 70 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: High

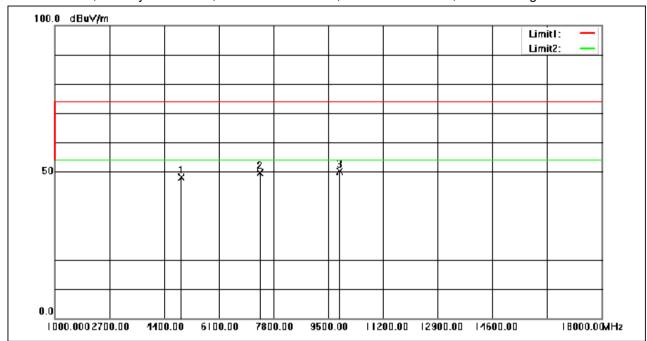

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	56.59	-8.44	48.15	74.00	-25.85	peak
2	7386.000	55.39	-5.69	49.70	74.00	-24.30	peak
3	9848.000	51.50	-1.27	50.23	74.00	-23.77	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 71 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

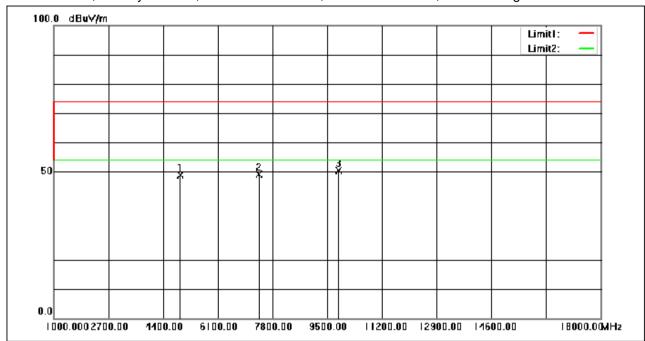

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4924.000	57.42	-8.44	48.98	74.00	-25.02	peak
2	7386.000	54.82	-5.69	49.13	74.00	-24.87	peak
3	9848.000	51.65	-1.27	50.38	74.00	-23.62	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 72 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

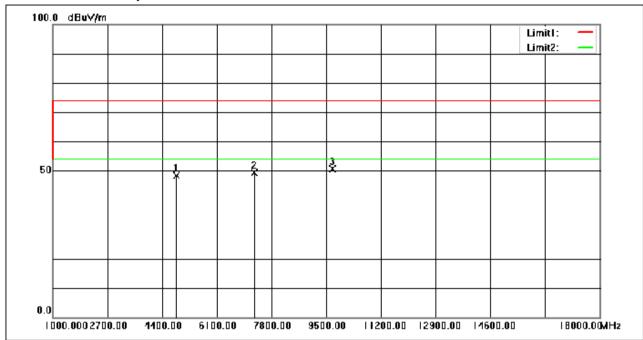

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4844.000	57.05	-8.71	48.34	74.00	-25.66	peak
2	7266.000	55.22	-5.83	49.39	74.00	-24.61	peak
3	9688.000	51.97	-1.36	50.61	74.00	-23.39	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 73 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

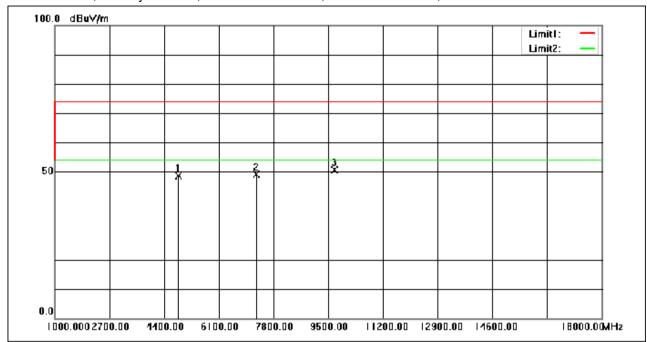

No.	Frequency	Reading Correction		Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4844.000	57.27	-8.71	48.56	74.00	-25.44	peak
2	7266.000	54.90	-5.83	49.07	74.00	-24.93	peak
3	9688.000	52.00	-1.36	50.64	74.00	-23.36	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 74 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: middle

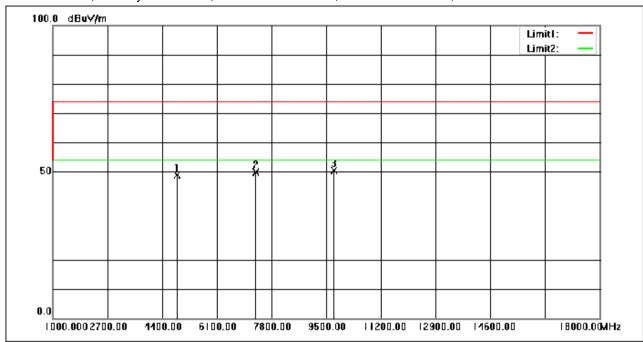

No.	Frequency	Reading	Reading Correction		Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	57.48	-8.61	48.87	74.00	-25.13	peak
2	7311.000	55.62	-5.78	49.84	74.00	-24.16	peak
3	9748.000	51.69	-1.43	50.26	74.00	-23.74	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 75 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: middle

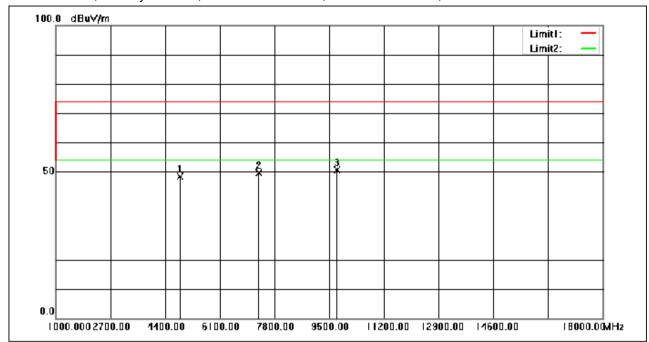

No.	Frequency	Reading Correction		Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4874.000	57.07	-8.61	48.46	74.00	-25.54	peak
2	7311.000	55.52	-5.78	49.74	74.00	-24.26	peak
3	9748.000	51.98	-1.43	50.55	74.00	-23.45	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 76 of 83

Test Mode: 00; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: High

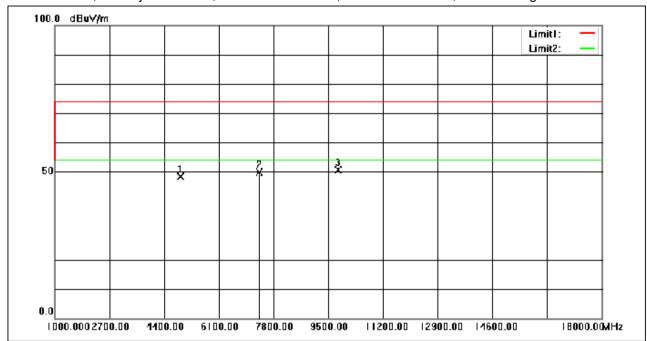

No.	Frequency	Reading	Reading Correction		Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4904.000	56.79	-8.51	48.28	74.00	-25.72	peak
2	7356.000	55.67	-5.73	49.94	74.00	-24.06	peak
3	9808.000	52.22	-1.47	50.75	74.00	-23.25	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 77 of 83

Test Mode: 00; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: High

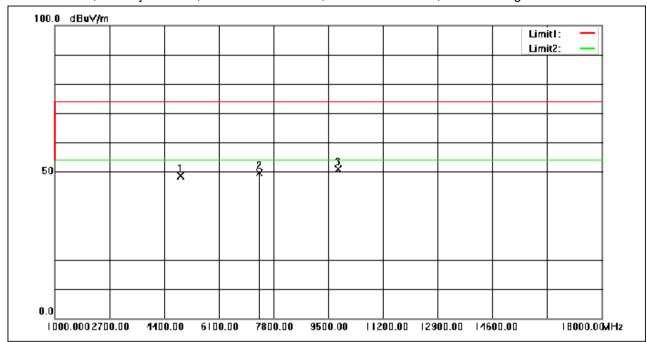

No.	Frequency	Reading	Reading Correction		Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4904.000	57.20	-8.51	48.69	74.00	-25.31	peak
2	7356.000	55.46	-5.73	49.73	74.00	-24.27	peak
3	9808.000	52.33	-1.47	50.86	74.00	-23.14	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 $\begin{array}{lll} \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{www.sgsgroup.com.cn} \\ \mbox{t(86-512)57355888} & \mbox{f(86-512)57370818} & \mbox{sgs.china@sgs.com} \end{array}$



Report No.: KSCR220200021502

Page: 78 of 83

7.9 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10 Section 6.9.3

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

Spectrum Analyzer E.U.T Non-Conducted Table

Ground Reference Plane

7.9.4 Measurement Procedure and Data

Please Refer to Appendix B for KSCR220200021502



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSCR220200021502

Page: 79 of 83

8 Emission Test Results

8.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247

RSS-Gen Issue 5 April 2018 Amendment 2

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of	Conducted limit(dBμV)								
emission(MHz)	Quasi-peak	Average							
0.15-0.5	66 to 56*	56 to 46*							
0.5-5	56	46							
5-30	60	50							
*Decreases with the logarithm	*Decreases with the logarithm of the frequency.								
Detector: Peak for pre-scan (9k	Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz								

8.1.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

8.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	00	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

8.1.3 Test Setup Diagram

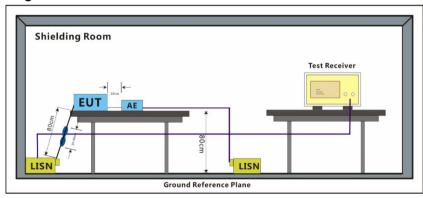



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 80 of 83

8.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 81 of 83

Test Mode: 00; Line: Live line

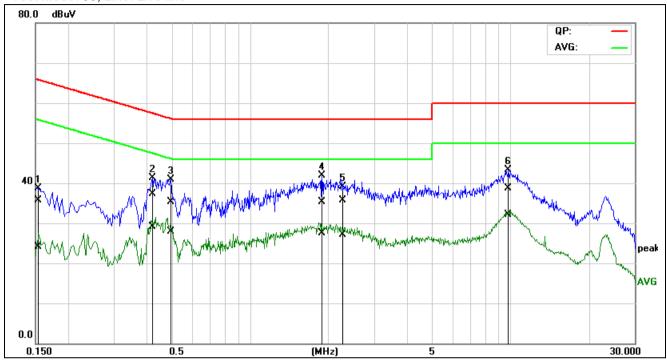

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1503	16.13	4.70	19.50	35.63	24.20	65.98	55.98	-30.35	-31.78	Pass
2	0.4212	17.74	9.50	19.54	37.28	29.04	57.42	47.42	-20.14	-18.38	Pass
3	0.4968	15.68	8.26	19.56	35.24	27.82	56.05	46.05	-20.81	-18.23	Pass
4	1.8904	15.59	7.93	19.64	35.23	27.57	56.00	46.00	-20.77	-18.43	Pass
5	2.2763	16.04	7.40	19.67	35.71	27.07	56.00	46.00	-20.29	-18.93	Pass
6*	9.7857	18.67	12.15	20.04	38.71	32.19	60.00	50.00	-21.29	-17.81	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 82 of 83

Test Mode: 00; Line: Neutral Line

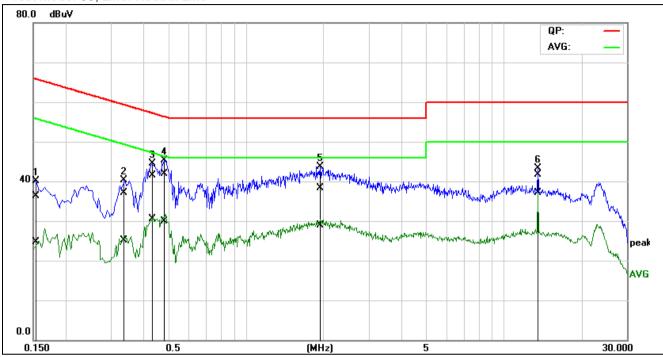

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1505	16.88	5.29	19.48	36.36	24.77	65.97	55.97	-29.61	-31.20	Pass
2	0.3407	17.55	5.57	19.51	37.06	25.08	59.18	49.19	-22.12	-24.11	Pass
3	0.4351	22.04	10.98	19.54	41.58	30.52	57.15	47.15	-15.57	-16.63	Pass
4	0.4834	22.26	10.33	19.56	41.82	29.89	56.28	46.28	-14.46	-16.39	Pass
5	1.9570	18.75	9.18	19.64	38.39	28.82	56.00	46.00	-17.61	-17.18	Pass
6*	13.5597	21.63	16.85	20.16	41.79	37.01	60.00	50.00	-18.21	-12.99	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021502

Page: 83 of 83

9 Test Setup Photographs

Refer to the < Test Setup photos >.

10 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 83071443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300