

Report No.: KSCR220200021501

Page: 1 of 40

TEST REPORT

 Application No.:
 KSCR2202000215AT

 FCC ID:
 2ADTD-KD9633WBE6

 IC:
 20199-KD9633WBE6

Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Applicant: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.

Address of Manufacturer: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China

Factory: 1.Hangzhou Hikvision Technology Co., Ltd. 2.Hangzhou Hikvision Electronics Co., Ltd.

3.Hangzhou Hikvision Digital Technology Co., Ltd. 4.Chongqing Hikvision technology Co., LTD.

Address of Factory: 1.No.700, Dongliu Road, Binjiang District, Hangzhou Zhejiang, 310052,

China

2.No.299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County,

Hangzhou, Zhejiang, 310052, China

3.No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China 4.No. 118, Haikang Road, Area C, Jingiao Industrial Park, Dadukou District,

Chongqing, 401325, ChinaDoor Station

Equipment Under Test (EUT):

EUT Name: Door Station

Model No.: DS-KD9633-WBE6, DS-KD9633-WBE6UHK, DS-KD9633-WBE6CKV, DS-

KD9633-WBE6UVS, DS-KD9633-WBE6KVO, DS-KD9633-WBE6HUN&

For IC Model No.: DS-KD9633-WBE6

Please refer to section 2 of this report which indicates which model was

actually tested and which were electrically identical.

Trade Mark: HIKVISION

Standard(s): 47 CFR Part 15, Subpart C 15.247

RSS-247 Issue 2, February 2017

RSS-Gen Issue 5 Amendment 2 (February 2021)

Date of Receipt: 2022-02-24

Date of Test: 2022-03-14 to 2022-03-30

Date of Issue: 2022-03-31

Test Result: Pass*

Eric Lin EMC Laboratory Manager

Ina fin



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: KSCR220200021501

Page: 2 of 40

	Revision Record							
Version	Chapter	Date	Modifier	Remark				
01		2022-03-31		Original				

Authorized for issue by:		
	milo Li	
	Milo Li/Project Engineer	-
	Eni fri	
	Eric Lin/Reviewer	_



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 3 of 40

2 Test Summary

Radio Spectrum Technical Requirement							
Item	FCC Requirement	IC Requirement	Method	Result			
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Customer Declaration			

Radio Spectrum Matter Part						
Item	FCC Requirement	IC Requirement	Method	Result		
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Clause 8.8	ANSI C63.10 (2013) Section 6.2	Pass		
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247a(2)	RSS-247 Clause 5.2(a)	ANSI C63.10 (2013) Section 11.8.1	Pass		
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(3)	RSS-247 Clause 5.4(d)	ANSI C63.10 (2013) Section 11.9.1	Pass		
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247(e)	RSS-247 Clause 5.2(b)	ANSI C63.10 (2013) Section 11.10.3	Pass		
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.13.3.2	Pass		
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Clause 5.5	ANSI C63.10 (2013) Section 11.11	Pass		
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass		
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass		
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass		

There are series models mentioned in this report, and they are the identical in electrical and electronic characters. Only the model DS-KD9633-WBE6 was tested since their differences were the model name.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 4 of 40

3 Contents

			rage
1	COV	/ER PAGE	1
2	TES	T SUMMARY	3
3	CON	NTENTS	4
4	GEN	NERAL INFORMATION	6
	4.1	DETAILS OF E.U.T.	6
	4.2	POWER LEVEL SETTING USING IN TEST	6
	4.3	DESCRIPTION OF SUPPORT UNITS	6
	4.4	MEASUREMENT UNCERTAINTY	7
	4.5	TEST LOCATION	3
	4.6	TEST FACILITY	3
	4.7	DEVIATION FROM STANDARDS	3
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
5	EQU	JIPMENT LIST	g
	-		
6	RAD	DIO SPECTRUM TECHNICAL REQUIREMENT	
	6.1	ANTENNA REQUIREMENT	
	6.1.1		
	6.1.2	2 Conclusion	11
7	RAD	DIO SPECTRUM MATTER TEST RESULTS	12
	7.1	CONDUCTED PEAK OUTPUT POWER	12
	7.1 <i>7.1.1</i>		
		1 E.U.T. Operation	12
	7.1.1	1 E.U.T. Operation	12 12 12
	7.1.1 7.1.2	1 E.U.T. Operation	12 12 12
	7.1.1 7.1.2 7.1.3	1 E.U.T. Operation	12 12 12 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1	1 E.U.T. Operation	12 12 12 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data MINIMUM 6DB BANDWIDTH 1 E.U.T. Operation 2 Test Mode Description	12 12 12 13 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3	1 E.U.T. Operation	12 12 13 13 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4	1 E.U.T. Operation	12 12 13 13 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4	1 E.U.T. Operation	12 12 13 13 13 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4 7.3	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data 5 MINIMUM 6DB BANDWIDTH 6 E.U.T. Operation 7 Test Mode Description 7 Test Setup Diagram 7 Measurement Procedure and Data 8 POWER SPECTRUM DENSITY 1 E.U.T. Operation	12 12 13 13 13 13
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data. MINIMUM 6DB BANDWIDTH. 1 E.U.T. Operation. 2 Test Mode Description. 3 Test Setup Diagram. 4 Measurement Procedure and Data. POWER SPECTRUM DENSITY. 1 E.U.T. Operation.	12 12 13 13 13 14 14
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3	1 E.U.T. Operation	12 12 13 13 13 14 14
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4 7.3 7.3.2 7.3.3 7.3.4	1 E.U.T. Operation	12 12 13 13 13 14 14
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.2 7.2.3 7.2.4 7.3 7.3.2 7.3.3 7.3.4	1 E.U.T. Operation	121213131314141414
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data MINIMUM 6DB BANDWIDTH 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data POWER SPECTRUM DENSITY 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation	12121313131414141414
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data MINIMUM 6DB BANDWIDTH 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data POWER SPECTRUM DENSITY 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation 2 Test Mode Description	12 12 12 12 12 12 12 12 12 12 12 12 12 1
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2 7.4.3	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data. MINIMUM 6DB BANDWIDTH. 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data POWER SPECTRUM DENSITY 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram	12121313131414141414
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.1 7.2.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4.1 7.4.2 7.4.3 7.4.4	1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data MINIMUM 6DB BANDWIDTH 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data POWER SPECTRUM DENSITY 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data CONDUCTED BAND EDGES MEASUREMENT 1 E.U.T. Operation 2 Test Mode Description 3 Test Setup Diagram 4 Measurement Procedure and Data	12121313131414141414
	7.1.1 7.1.2 7.1.3 7.1.4 7.2 7.2.3 7.2.4 7.3 7.3.1 7.3.2 7.3.3 7.3.4 7.4 7.4.1 7.4.2 7.4.3	1 E.U.T. Operation	12 12 12 12 12 12 12 12 12 12 12 12 12 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501 Compliance Certification Services (Kunshan) Inc.

Page: 5 of 40

	7.5.2	Test Mode Description	16
	7.5.3	Test Setup Diagram	16
	7.5.4	Measurement Procedure and Data	16
7.	6 R	ADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	17
	7.6.1	E.U.T. Operation	17
	7.6.2	Test Mode Description	17
	7.6.3	Test Setup Diagram	
	7.6.4	Measurement Procedure and Data	
7.	7 R	ADIATED SPURIOUS EMISSIONS BELOW 1GHZ	23
	7.7.1	E.U.T. Operation	23
	7.7.2	Test Mode Description	23
	7.7.3	Test Setup Diagram	23
	7.7.4	Measurement Procedure and Data	
7.	8 R	ADIATED SPURIOUS EMISSIONS ABOVE 1GHZ	
	7.8.1	E.U.T. Operation	27
	7.8.2	Test Mode Description	27
	7.8.3	Test Setup Diagram	
	7.8.4	Measurement Procedure and Data	
7.9	9 9	9% Bandwidth	35
	7.9.1	E.U.T. Operation	35
	7.9.2	Test Mode Description	35
	7.9.3	Test Setup Diagram	
	7.9.4	Measurement Procedure and Data	35
8	EMISS	ION TEST RESULTS	36
8.	1 C	ONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	36
	8.1.1	E.U.T. Operation	
	8.1.2	Test Mode Description	
	8.1.3	Test Setup Diagram	
	8.1.4	Measurement Procedure and Data	
9	TEST	SETUP PHOTOGRAPHS	40
10	EUT C	ONSTRUCTIONAL DETAILS	40



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 6 of 40

4 General Information

4.1 Details of E.U.T.

Power supply:	DC12V
Test Voltage:	AC 120V/60Hz
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.0 LE
Modulation Type:	GFSK
Data Rate:	1Mbps
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-5dBi (Provided by the manufacturer)
Firmware Version:	V2.3.4
Serial Number:	G75903827

4.2 Power level setting using in test

Channel	BLE
0	Default
19	Default
39	Default

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	EB24537645
Adapter	НОПОТО	ADS-12AM-12 12012EPCU	1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 7 of 40

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4 x 10 ⁻⁸
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
0	DE Dadieted Deuter	5.2dB (Below 1GHz)
8	RF Radiated Power	5.9dB (Above 1GHz)
		4.2dB (Below 30MHz)
	Dadiated Courieus Fusicaien Test	4.5dB (30MHz-1GHz)
9	Radiated Spurious Emission Test	5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 8 of 40

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888

Fax: +86 512 5737 0818

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC (Designation Number: CN1172)

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 9 of 40

5 Equipment List

Item	Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal. Due Date
	ducted Emission at Mains Terminals (150		Wiodei	Serial Number	Cai Date	Cai. Due Date
1	EMI Test Receive	R&S	ESCI	100781	01/22/2022	01/21/2023
2	LISN	R&S	ENV216	101604	10/12/2021	10/11/2022
3	LISN	Schwarzbeck	NNLK 8129	8129-143	10/12/2021	10/11/2022
4	Pulse Limiter	R&S	ESH3-Z2	100609	01/22/2022	01/21/2023
5	CE test Cable	Thermax	/	14	10/16/2021	10/15/2022
6	Test Software	Faratronic	EZ-EMC	CCS-03A1	N.C.R	N.C.R
	Conducted Test	Tarationic	LZ-LIVIO	000-00/(1	14.0.14	14.0.10
1	Spectrum Analyzer	Agilent	E4446A	MY44020154	04/16/2021	04/15/2022
2	Spectrum Analyzer	Keysight	N9020A	MY55370209	10/11/2021	10/10/2022
4	Signal Generator	Agilent	N5182A	MY50142015	08/27/2021	08/26/2022
5	Spectrum Analyzer	Keysight	N9030B	MY61330164	01/22/2022	01/21/2023
6	Vector Signal Generator	R&S	SMW200A	110074	10/12/2021	10/11/2022
7	Radio Communication Test Station	Anritsu	MT8000A	6262012849	09/23/2021	09/22/2022
8	Radio Communication Analyzer	Anritsu	MT8821C	6201692222	09/23/2021	09/22/2022
9	Universal Radio Communication Tester	R&S	CMW500	159275	10/12/2021	10/11/2022
10	Universal Radio Communication Tester	R&S	CMW500	167239	04/16/2021	04/15/2022
11	Power Meter	Anritsu	ML2495A	1445010	04/15/2021	04/14/2022
12	Switcher	CCSRF	FY562	KUS2001M001-3	10/12/2021	10/11/2022
13	AC Power Source	EXTECH	6605	1570106	N.C.R	N.C.R
14	DC Power Supply	Aglient	E3632A	MY50340053	N.C.R	N.C.R
15	6dB Attenuator	Mini-Circuits	NAT-6-2W	15542-1	N.C.R	N.C.R
16	Power Divider	AISI	IOWOPE2068	PE2068	N.C.R	N.C.R
17	Filter	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
18	Conducted Test Cable	/	RF01-RF04	1	04/15/2021	04/14/2022
19	Software	BST	TST-PASS	N/A	N/A	N/A
20	Temp. / Humidity Chamber	TERCHY	MHK-120AK	X30109	04/15/2021	04/14/2022
21	Thermometer	Anymetre	TH603	CCS007	10/14/2021	10/13/2022
	adiated Test	7 arymon o	111000	000001	10/11/2021	10/10/2022
1	Spectrum Analyzer	R&S	FSV40	101493	10/11/2021	10/10/2022
2	Signal Generator	Agilent	E8257C	MY43321570	10/18/2021	10/17/2022
3	Loop Antenna	Com-Power	AL-130R	10160008	04/13/2021	04/12/2023
4	Bilog Antenna	TESEQ	CBL 6112D	35403	06/21/2021	06/20/2023
5	Bilog Antenna	SCHWARZBECK	VULB9160	9160-3342	04/13/2021	04/12/2023
6	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	267	10/26/2020	10/25/2022
7	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	00143290	02/22/2021	02/21/2023
8	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	BBHA9170171	02/20/2022	02/19/2023
9	Pre-Amplifier(30MHz~18GHz)	LNA	/	/	04/15/2021	04/14/2022
10	Amplifier(18~40GHz)	COM-POWER	PAM-840A	461332	10/18/2021	10/17/2022
11	Low Pass Filter	MICRO-TRONICS	VLFX-950	RV142900829	N.C.R	N.C.R
12	High Pass Filter	Mini-Circuits	VHF-1200	15542	N.C.R	N.C.R
13	Filter (5450MHz~5770 MHz)	MICRO-TRONICS	BRC50704-01	2	N.C.R	N.C.R



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 10 of 40

14	Filter (5690 MHz~5930 MHz)	MICRO-TRONICS	BRC50705-01	4	N.C.R	N.C.R
15	Filter (5150 MHz~5350 MHz)	MICRO-TRONICS	BRC50703-01	2	N.C.R	N.C.R
16	Filter (885 MHz~915 MHz)	MICRO-TRONICS	BRM14698	1	N.C.R	N.C.R
17	Filter (815 MHz~860 MHz)	MICRO-TRONICS	BRM14697	1	N.C.R	N.C.R
18	Filter (1745 MHz \sim 1910 MHz)	MICRO-TRONICS	BRM14700	1	N.C.R	N.C.R
19	Filter (1922 MHz \sim 1977 MHz)	MICRO-TRONICS	BRM50715	1	N.C.R	N.C.R
20	Filter (2550 MHz)	MICRO-TRONICS	HPM13362	5	N.C.R	N.C.R
21	Filter (1532 MHz \sim 1845 MHz)	MICRO-TRONICS	BRM50713	1	N.C.R	N.C.R
22	Filter (2.4GHz)	MICRO-TRONICS	BRM50701	5	N.C.R	N.C.R
23	RE test cable	1	RE01-RE04	1	04/15/2021	04/14/2022
24	Software	Faratronic	EZ_EMC	N/A	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 11 of 40

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -5dBi.

Antenna location: Refer to internal photo.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 12 of 40

7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
	1 for ≥50 hopping channels
902-928	0.25 for 25≤ hopping channels <50
	1 for digital modulation
	1 for ≥75 non-overlapping hopping channels
2400-2483.5	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 21.2 °C Humidity: 39.3 % RH Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

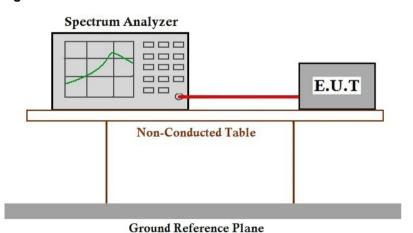

7.1.4 Measurement Procedure and Data

Please Refer to Appendix



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 (186-512



Report No.: KSCR220200021501

Page: 13 of 40

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit: ≥500 kHz

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 21.3 °C Humidity: 39.2 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.2.3 Test Setup Diagram

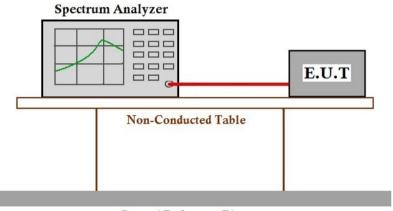

Ground Reference Plane

7.2.4 Measurement Procedure and Data

Please Refer to Appendix A for KSCR220200021501



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 83071443, or email: CN.Doccheck@sas.com



Report No.: KSCR220200021501

Page: 14 of 40

7.3 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.3.3 Test Setup Diagram

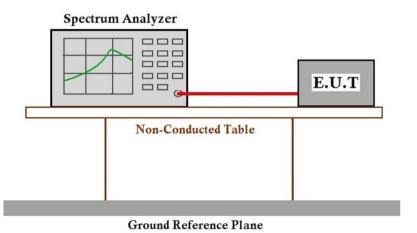

7.3.4 Measurement Procedure and Data

Please Refer to Appendix A for KSCR220200021501



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 15 of 40

7.4 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d) ANSI C63.10 (2013) Section 11.13.3.2 Test Method:

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 21.3 °C Humidity: 39.1 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.4.3 Test Setup Diagram

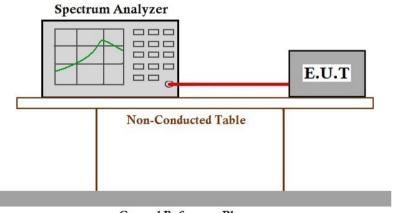

Ground Reference Plane

7.4.4 Measurement Procedure and Data

Please Refer to Appendix A for KSCR220200021501



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 16 of 40

7.5 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 21.3 °C Humidity: 39.0 % RH Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.5.3 Test Setup Diagram

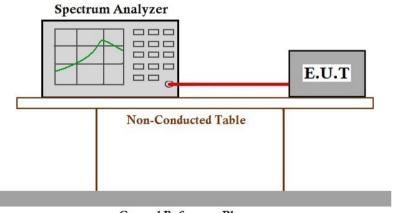

Ground Reference Plane

7.5.4 Measurement Procedure and Data

Please Refer to Appendix A for KSCR220200021501



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 17 of 40

7.6 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.6.1 E.U.T. Operation


Operating Environment:


Temperature: 23.0 °C Humidity: 46.2 % RH Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram





30MHz-1GHz Above 1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 18 of 40

7.6.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.
- Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


Member of the SGS Group (SGS SA)



Report No.: KSCR220200021501

Page: 19 of 40

Test Mode: 01; Polarity: Horizontal; Modulation: GFSK; Channel: Low

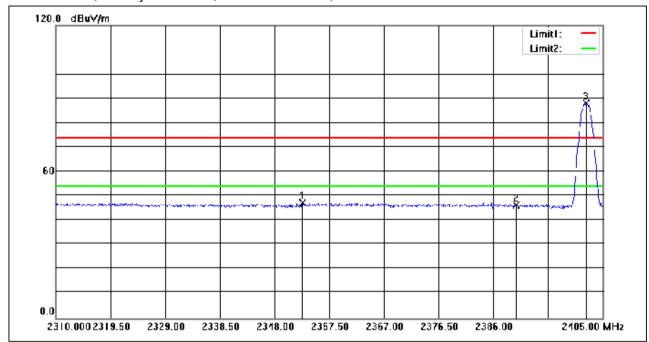

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2352.845	61.48	-14.12	47.36	74.00	-26.64	peak
2	2390.000	60.23	-14.01	46.22	74.00	-27.78	peak
3	2402.150	101.96	-13.97	87.99	74.00	13.99	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 20 of 40

Test Mode: 01; Polarity: Vertical; Modulation: GFSK; Channel: Low

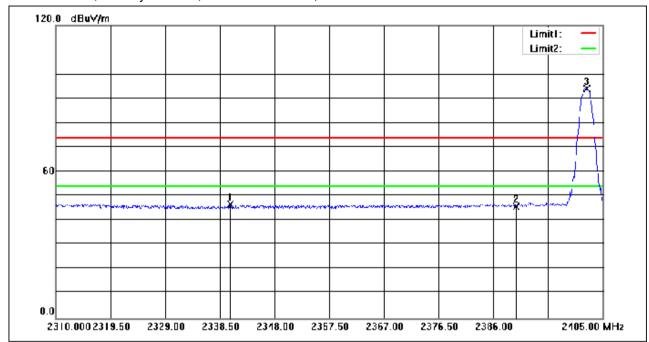

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2340.305	60.83	-14.15	46.68	74.00	-27.32	peak
2	2390.000	59.62	-14.01	45.61	74.00	-28.39	peak
3	2402.245	108.00	-13.97	94.03	74.00	20.03	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 21 of 40

Test Mode: 01; Polarity: Horizontal; Modulation: GFSK; Channel: High

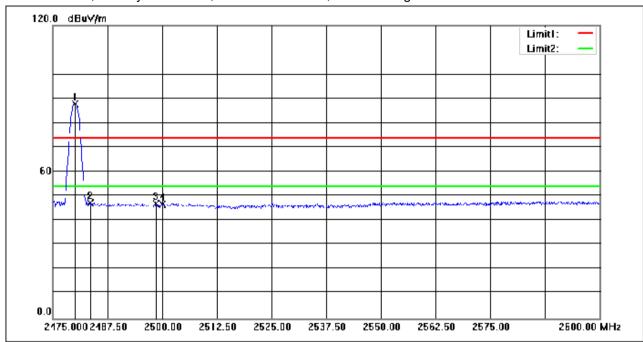

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.125	101.56	-13.71	87.85	74.00	13.85	peak
2	2483.500	60.95	-13.71	47.24	74.00	-26.76	peak
3	2498.625	60.54	-13.66	46.88	74.00	-27.12	peak
4	2500.000	60.16	-13.64	46.52	74.00	-27.48	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 22 of 40

Test Mode: 01; Polarity: Vertical; Modulation: GFSK; Channel: High

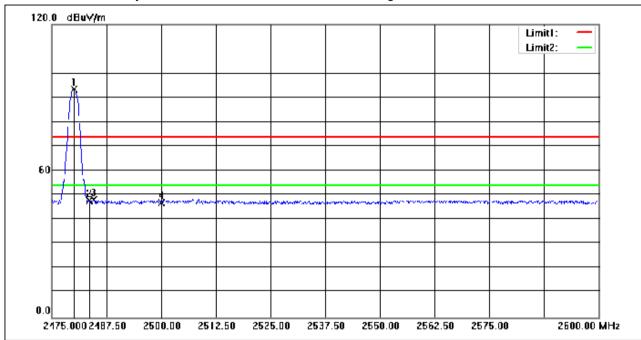

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.000	107.09	-13.71	93.38	74.00	19.38	peak
2	2483.500	61.43	-13.71	47.72	74.00	-26.28	peak
3	2484.625	61.93	-13.70	48.23	74.00	-25.77	peak
4	2500.000	60.72	-13.64	47.08	74.00	-26.92	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 23 of 40

7.7 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.7.1 E.U.T. Operation


Operating Environment:


Temperature: 23.0 °C Humidity: 46.2 % RH Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram





Below 30MHz 30MHz-1GHz



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 24 of 40

7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 25 of 40



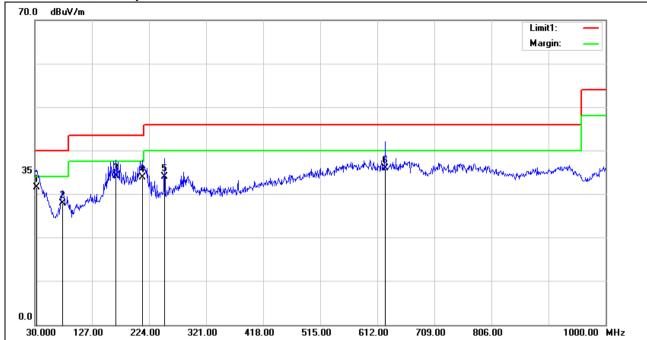

No.	Frequency	Reading	Correct Result		Limit Margin		Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	32.9100	6.48	25.04	31.52	40.00	-8.48	100	360	QP
2	76.5600	13.25	14.68	27.93	40.00	-12.07	100	156	QP
3	167.7400	17.06	17.10	34.16	43.50	-9.34	100	244	QP
4	212.3600	17.09	16.76	33.85	43.50	-9.65	100	14	QP
5	250.1900	14.18	19.78	33.96	46.00	-12.04	100	45	QP
6	625.5800	8.70	27.35	36.05	46.00	-9.95	100	233	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 26 of 40



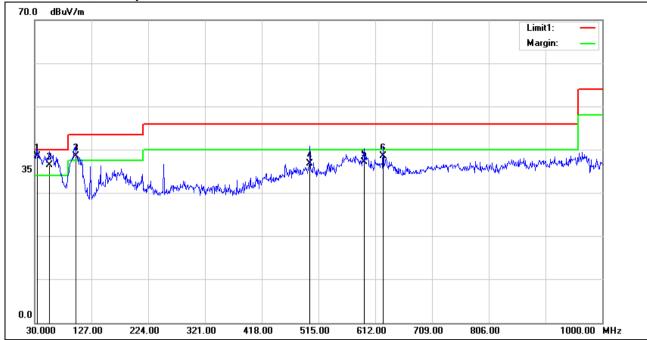

No.	Frequency	Reading	Correct	Result Limit		Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	33.8800	13.70	24.92	38.62	40.00	-1.38	100	162	QP
2	55.2200	20.46	16.06	36.52	40.00	-3.48	100	251	QP
3	99.8400	21.58	17.04	38.62	43.50	-4.88	100	325	QP
4	500.4500	11.13	25.75	36.88	46.00	-9.12	200	152	QP
5	592.6000	10.17	26.98	37.15	46.00	-8.85	100	26	QP
6	625.5800	11.29	27.35	38.64	46.00	-7.36	100	166	QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国•江苏•昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 27 of 40

7.8 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 23.0 °C Humidity: 46.1 % RH Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.8.3 Test Setup Diagram

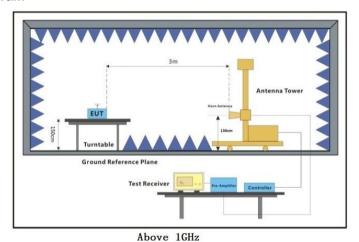



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 83071443, or email: CN.Doccheck@sas.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 28 of 40

7.8.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- 2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 29 of 40

Test Mode: 01; Polarity: Horizontal; Modulation: GFSK; Channel: Low

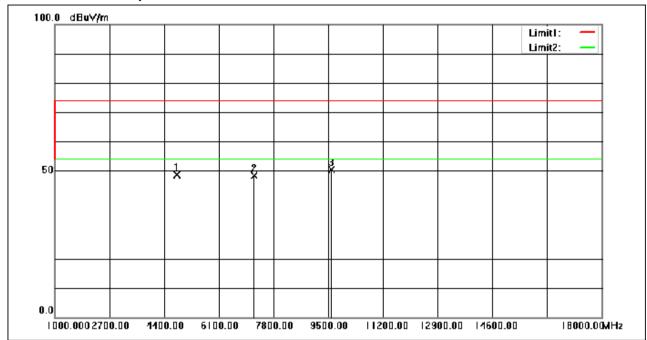

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	57.41	-8.86	48.55	74.00	-25.45	peak
2	7206.000	54.29	-5.89	48.40	74.00	-25.60	peak
3	9608.000	51.58	-1.26	50.32	74.00	-23.68	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 30 of 40

Test Mode: 01; Polarity: Vertical; Modulation: GFSK; Channel: Low

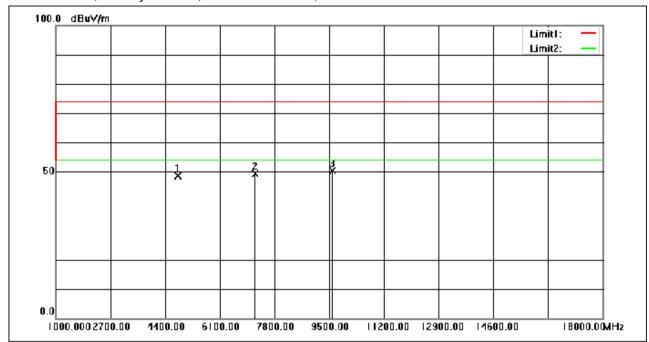

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	57.53	-8.86	48.67	74.00	-25.33	peak
2	7206.000	55.35	-5.89	49.46	74.00	-24.54	peak
3	9608.000	51.71	-1.26	50.45	74.00	-23.55	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 31 of 40

Test Mode: 01; Polarity: Horizontal; Modulation: GFSK; Channel: middle

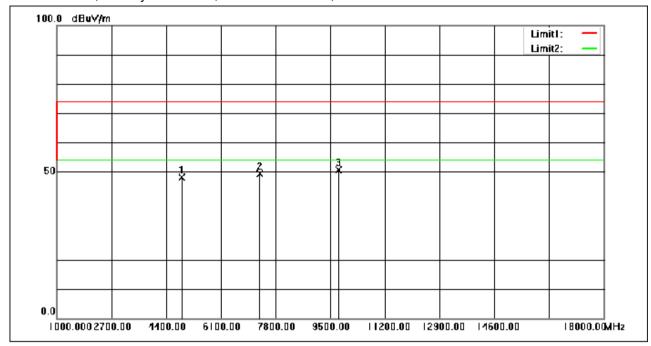

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4880.000	56.68	-8.60	48.08	74.00	-25.92	peak
2	7320.000	55.04	-5.77	49.27	74.00	-24.73	peak
3	9760.000	52.10	-1.45	50.65	74.00	-23.35	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 32 of 40

Test Mode: 01; Polarity: Vertical; Modulation: GFSK; Channel: middle

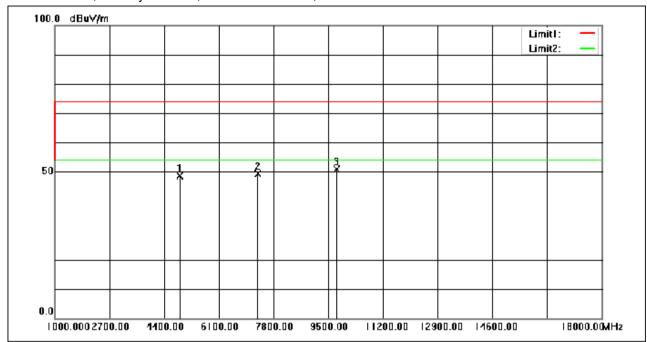

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4880.000	57.31	-8.60	48.71	74.00	-25.29	peak
2	7320.000	55.06	-5.77	49.29	74.00	-24.71	peak
3	9760.000	52.36	-1.45	50.91	74.00	-23.09	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 33 of 40

Test Mode: 01; Polarity: Horizontal; Modulation: GFSK; Channel: High

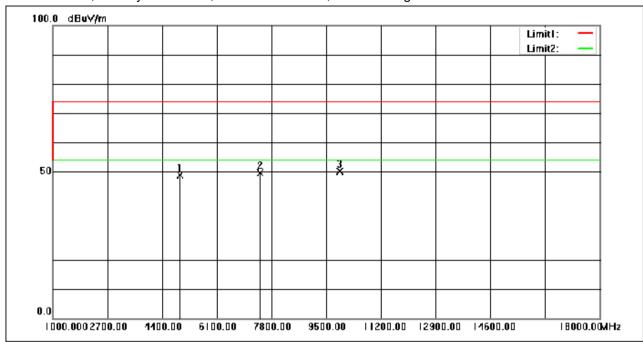

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	57.26	-8.32	48.94	74.00	-25.06	peak
2	7440.000	55.14	-5.63	49.51	74.00	-24.49	peak
3	9920.000	51.10	-0.94	50.16	74.00	-23.84	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 34 of 40

Test Mode: 01; Polarity: Vertical; Modulation: GFSK; Channel: High

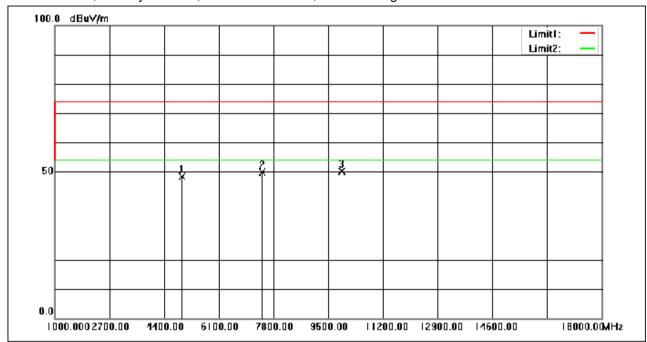

No.	Frequency	Reading	Correction	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	56.68	-8.32	48.36	74.00	-25.64	peak
2	7440.000	55.40	-5.63	49.77	74.00	-24.23	peak
3	9920.000	51.09	-0.94	50.15	74.00	-23.85	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 35 of 40

7.9 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10 Section 6.9.3

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.9.3 Test Setup Diagram

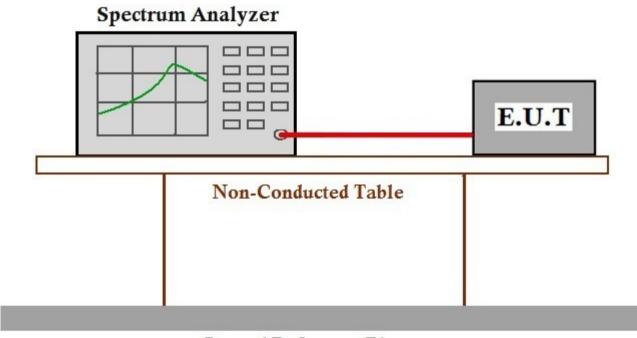

Ground Reference Plane

7.9.4 Measurement Procedure and Data

Please Refer to Appendix A for KSCR220200021501



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 36 of 40

8 Emission Test Results

8.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247

RSS-Gen Issue 5 April 2018 Amendment 2

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of	Conducted limit(dBµV)						
emission(MHz)	Quasi-peak	Average					
0.15-0.5	66 to 56*	56 to 46*					
0.5-5	56	46					
5-30	60	50					
*Decreases with the logarithm of the frequency.							
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz							

8.1.1 E.U.T. Operation


Operating Environment:

Temperature: 24 °C Humidity: 48 % RH Atmospheric Pressure: 1010 mbar

8.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with GFSK modulation.

8.1.3 Test Setup Diagram

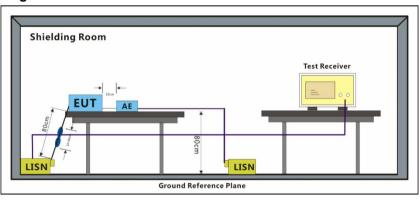



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 37 of 40

8.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50 \text{ohm}/50 \mu\text{H} + 5 \text{ohm}$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 38 of 40

Test Mode: 01; Line: Live line

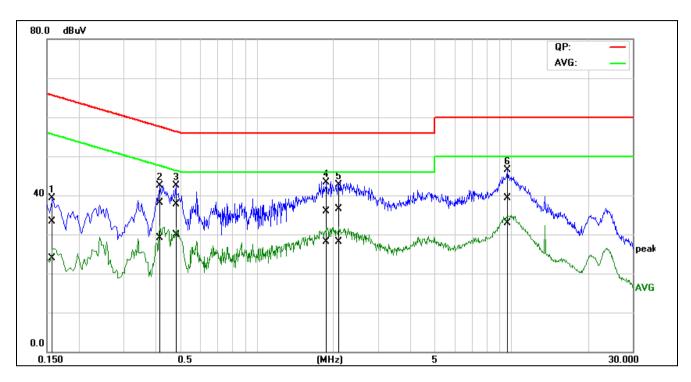

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1587	13.71	4.36	19.50	33.21	23.86	65.53	55.53	-32.32	-31.67	Pass
2	0.4180	18.56	9.61	19.54	38.10	29.15	57.49	47.49	-19.39	-18.34	Pass
3*	0.4815	18.13	10.42	19.56	37.69	29.98	56.31	46.31	-18.62	-16.33	Pass
4	1.8517	16.34	8.56	19.64	35.98	28.20	56.00	46.00	-20.02	-17.80	Pass
5	2.0683	16.80	8.49	19.65	36.45	28.14	56.00	46.00	-19.55	-17.86	Pass
6	9.6141	19.34	12.85	20.03	39.37	32.88	60.00	50.00	-20.63	-17.12	Pass




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms



Report No.: KSCR220200021501

Page: 39 of 40

Test Mode: 01; Line: Neutral Line

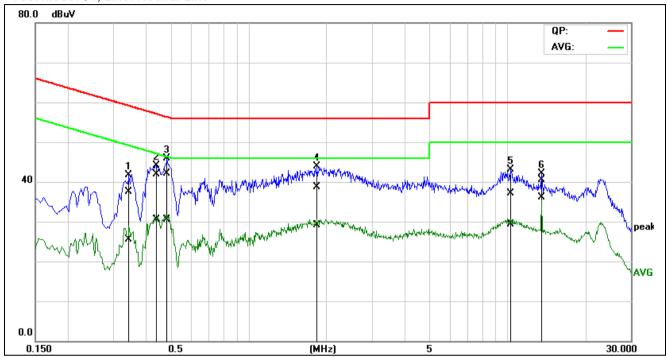

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.3478	18.02	5.95	19.51	37.53	25.46	59.01	49.01	-21.48	-23.55	Pass
2	0.4444	22.26	11.00	19.55	41.81	30.55	56.98	46.98	-15.17	-16.43	Pass
3	0.4866	22.58	10.97	19.56	42.14	30.53	56.23	46.23	-14.09	-15.70	Pass
4	1.8121	19.01	9.39	19.64	38.65	29.03	56.00	46.00	-17.35	-16.97	Pass
5	10.3501	17.03	9.33	20.05	37.08	29.38	60.00	50.00	-22.92	-20.62	Pass
6*	13.5605	20.43	15.93	20.16	40.59	36.09	60.00	50.00	-19.41	-13.91	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSCR220200021501

Page: 40 of 40

9 Test Setup Photographs

Refer to the < Test Setup photos >.

10 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 83071443, or email: CN.Doccheck@sas.com