FCC SAR TEST REPORT

Application No.:	KSCR2207001134AT
Applicant:	Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Applicant:	No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Manufacturer:	Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Manufacturer:	No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Factory:	1.Hangzhou Hikvision Technology Co., Ltd. 2.Hangzhou Hikvision Electronics Co., Ltd. 3.Hangzhou Hikvision Digital Technology Co., Ltd. 4.Chongqing Hikvision technology Co.,Ltd.
Address of Factory:	1.No.700,Dongliu Road, Binjiang District, Hangzhou City, Zhejiang, 310052, China; 2. No.299,Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou,Zhejiang,310052,China 3. No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China 4. NO.118.Haikang Road,Area C,Jianqiao Industrial Park,Dadukou District,Chongqing,401325,China.
Product Name:	Body Camera
Model No.(EUT):	DS-MCW407, DS-MCW407/32G/GLE(D), DS-MCW407/64G/GLE(D), DS-MCW407/128G/GLE(D), DS-MCW407/256G/GLE(D)
FCC ID:	2ADTD-MCW407-DWG
Standard(s) :	FCC 47CFR §2.1093
Date of Receipt:	2022-08-01
Date of Test:	2022-08-03 to 2022-08-06
Date of Issue:	2022-09-05
Test Result:	**Pass***

* In the configuration tested, the EUT complied with the standards specified above.

Eric Lin
EMC Laboratory Manager

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

REVISION HISTORY

Revision Record			
Version	**Description**	**Date**	**Remark**
00	Original	2022-09-05	/

Authorized for issue by:				
		Richard.Kong/ Project Engineer		
		Eric.Lin/Reviewer		

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)	
	Extremity	Body
LTE Band 5	0.36	0.21
LTE Band 7	3.61	1.17
LTE Band 38	3.73	1.22
LTE Band 40 a	3.14	0.89
LTE Band 40 b	2.63	0.74
LTE Band 41	3.74	1.17
WI-FI (2.4GHz)	0.24	0.23
BT	0.15	0.13
Sum SAR	3.85	1.46
SAR Limited(W/kg)	4.0	1.6

Note: There are series models mentioned in this report, and they are the Identical in electrical and electronic characters. Only the model DS-MCW407/32G/GLE(D) was tested since their differences were the model number and appearance.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

CONTENTS

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1 General Information

1.1 General Description of EUT

Product Phase:	Production unit		
Device Type:	Portable device		
Exposure Category:	Uncontrolled environment / general population		
Serial Number:	J82955765		
Software Version:	V2.2.4		
Antenna Gain:	WIFI 2.4GHz: 3.36dBi BT: 3.36dBi LTE: Band 5: -3.99dBi Band 7: 0.52dBi Band 38: 0.47dBi Band 40A: 1.54dBi Band 40B: 1.91dBi Band 41: 0.79dBi (Provided by Manufacturer)		
Antenna Type:	LDS Antenna		
Device Operating Configurations:			
Modulation Mode:	LTE: QPSK,16QAM,64QAM; WIFI: CCK, DSSS, OFDM; BT: GFSK, π/4DQPSK, 8DPSK		
Power Class:	3, tested with power control Max Power (LTE Band 5/7/38/40/41)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620- 2690
	LTE Band 38	2570~2620	2570~2620
	LTE Band 40	2305~2315 2350~2360	2305~2315 2350~2360
	LTE Band 41	2496-2690	2496-2690
	WIFI2.4G	2412-2462	2412-2462
	BT	2402-2480	2402-2480
Battery Information:	Model:	614540	
	Normal Voltage:	3.8V	
	Rated capacity:	3220mAh	
	Battery Type:	Rechargeable Li-ion Battery	
	Manufacturer:	LiFun Technology Co., Ltd	

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.1.1 DUT Antenna Locations

Please see the Appendix D

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEEE Std C95.1 – 1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D04v01	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 865664 D01 v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 v01r02	RF Exposure Compliance Reporting and Documentation Considerations
KDB 248227 D01 v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 941225 D01 v03r01	3G SAR Measurement Procedures
KDB 941225 D05 v02r05	SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.3 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.4 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g. max. clock frequency, highest internal frequency, antenna gain, cable loss, etc) is provided by the applicant. (if applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (if applicable).

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC (Designation Number: CN1172)

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

• ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 2324E

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

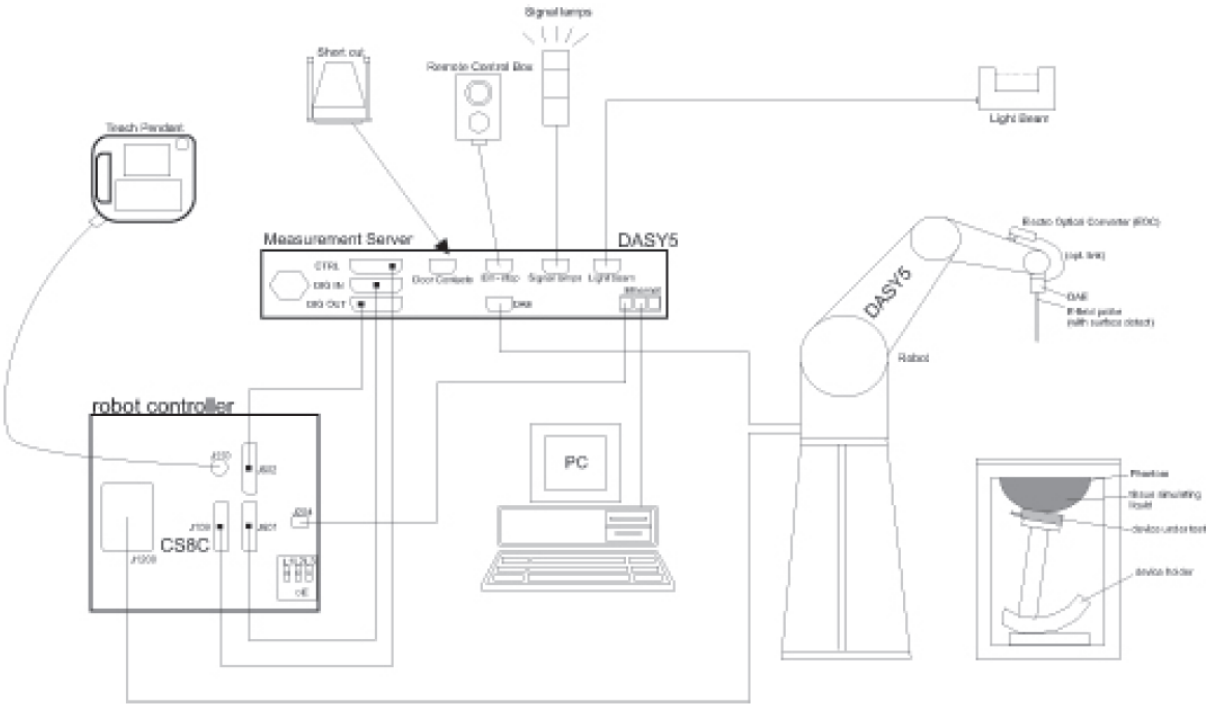

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validat the proper functioning of the system.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 µW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.3 Data Acquisition Electronics (DAE)

Model	DAE4
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
Input Offset Voltage	< 5µV (with auto zero)
Input Bias Current	< 50 f A
Dimensions	60 x 60 x 68 mm

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions **(incl. Wooden Support)**	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Wooden Support	SPEAG standard phantom table

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	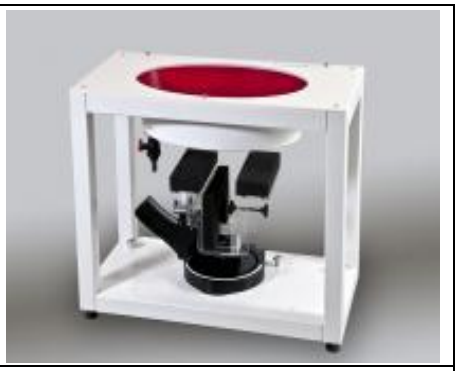
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.6 Device Holder for Transmitters

F-2. **Device Holder for Transmitters**

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε=3 and loss tangent δ=0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: *Area scan*

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: *Zoom scan*

Around this point, a volume of 30mm*30mm*30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points (≤2GHz) and 7x7x7 points (≥2GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification).The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5·$\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE3". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
	- Conversion factor	ConvFi
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	ε
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With Vi = compensated signal of channel i (i = x, y, z)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Ui = input signal of channel i (i = x, y, z)
cf = crest factor of exciting field (DASY parameter)
dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$$

With Vi = compensated signal of channel i (i = x, y, z)
Normi = sensor sensitivity of channel I (i = x, y, z)
[mV/(V/m)2] for E-field Probes
ConvF = sensitivity enhancement in solution
aij = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
Ei = electric field strength of channel i in V/m
Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_Y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$$

With SAR = local specific absorption rate in mW/g
Etot = total field strength in V/m
σ= conductivity in [mho/m] or [Siemens/m]
ε= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}{}^2{}_2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with Ppwe = equivalent power density of a plane wave in mW/cm2
Etot = total electric field strength in V/m
Htot = total magnetic field strength in A/m

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

5 Description of Test Position

5.1 Test Position

Devices that are designed or intended for use on extremities, or mainly operated in extremity only exposure conditions, i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user’ s body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Test Exclusion Thresholds in 8.2 should be applied to determine SAR test requirements. When extremity SAR testing is required, a flat phantom must be used if the exposure condition is more conservative than the actual use conditions; otherwise, a KDB inquiry is required to determine the phantom and test requirements. Body SAR compliance is also tested with a flat phantom. For devices with irregular shapes or form factors that do not conform to a flat phantom, and/or unusual operating configurations and exposure conditions, a KDB inquiry is also required to determine the appropriate SAR measurement procedures. Unless it is specified differently in the published RF exposure KDB procedures, when simultaneous transmission applies to extremity exposure, the simultaneous transmission SAR test exclusion provisions should be applied. When simultaneous transmission SAR measurement is required, the enlarged zoom scan and volume scan post-processing procedures in KDB Publication 865664 D01 should be applied.

SAR can test the sides near the antenna, the surface of the device should be tested for SAR compliance with the device touching the phantom. The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surfaces, with the adjacent surface positioned against the phantom and the surface containing the antenna positioned perpendicular to the phantom.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands：

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78
HSL5GHz is composed of the following ingredients： Water：50-65% Mineral oil：10-30% Emulsifiers：8-25% Sodium salt：0-1.5%										
MSL5GHz is composed of the following ingredients： Water：64-78% Mineral oil：11-18% Emulsifiers：9-15% Sodium salt：2-3%										

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency (MHz)	Head		Body	
	ε_r	σ (S/m)	ε_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ε_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m^3)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6.1.3 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the SPEAG DAK3.5 dielectric probe kit in conjunction with Agilent E5071B Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured Frequency（MHz）	Conductivity (σ)	Permittivity (ε_r)	Conductivity Target (σ)	Permittivity Target (ε_r)	Delta (σ) (%)	Delta (ε_r) (%)	Limit (%)	Liquid Temp. (℃)	Date
835 Head	835	0.909	41.668	0.90	41.50	1.00	0.40	±5	22.1	2022/8/3
2300 Head	2300	1.662	40.521	1.67	39.50	-0.48	2.58	±5	22	2022/8/4
2450 Head	2450	1.816	40.068	1.80	39.20	0.89	2.21	±5	22	2022/8/5
2600 Head	2600	1.992	39.563	1.96	39.00	1.63	1.44	±5	22.1	2022/8/6

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

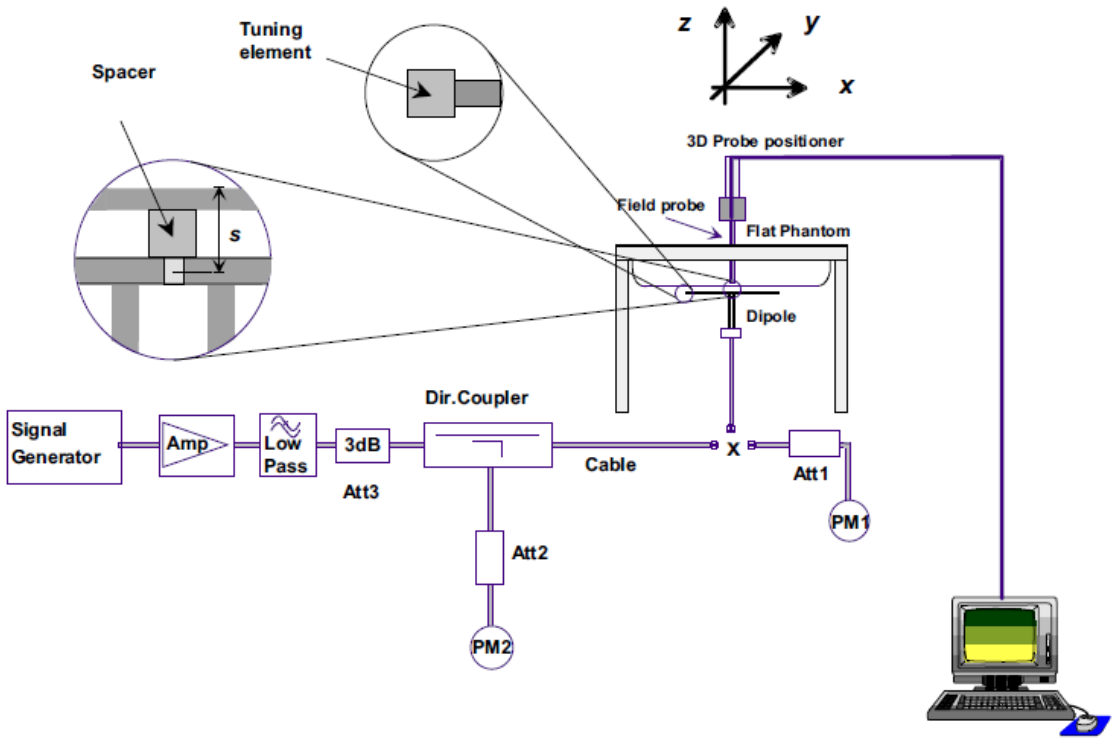

F-3. the microwave circuit arrangement used for SAR system verification

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

a) There is no physical damage on the dipole;

b) System check with specific dipole is within 10% of calibrated value;

c) Return-loss is within 10% of calibrated measurement;

d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (℃)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D835V2	Head	2.38	1.48	9.52	5.92	9.40 (8.46~10.34)	6.12 (5.51~6.73)	22.1	2022/8/3
D2300V2	Head	12.5	5.74	50	22.96	49.2 (44.28~54.12)	23.4 (21.06~25.74)	22	2022/8/4
D2450V2	Head	12.6	5.87	50.4	23.48	53 (47.70~58.30)	24.7 (22.23~27.17)	22	2022/8/5
D2600V2	Head	13.46	6.25	53.84	25	54.8 (49.32~60.28)	24.5 (22.05~26.95)	22.1	2022/8/6

6.2.3 Detailed System Check Results

Please see the Appendix A

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

7 Test Configuration

7.1 Operation Configurations

7.1.1 Wi-Fi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.1.1 Duty cycle

1) 2.4GHz Wi-Fi:

WI-FI 802.11b: Duty cycle= 99.97%

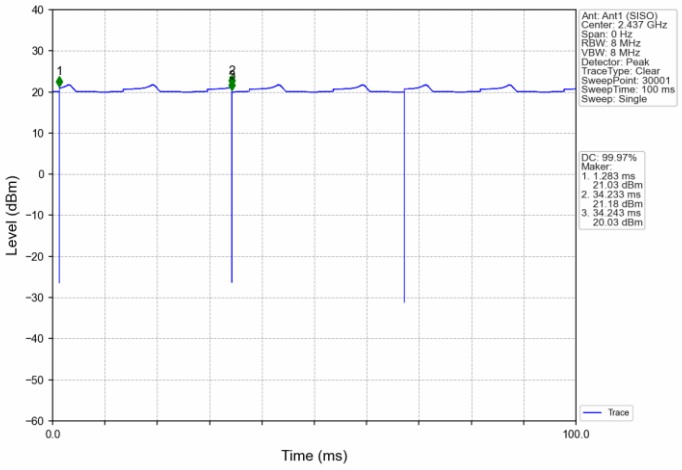

7.1.1.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

1）. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).

2）. When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.

3）. For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.1.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.1.1.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

1）. When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

2）. When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

3）. The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.

b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.

4）. SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:

a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)

b) replace “initial test configuration” with “all tested higher output power configurations”

7.1.1.5 2.4 GHz Wi-Fi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

1）. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2）. When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

1）. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2）. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

7.1.2 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 V13.5.0 (201609) Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > ½ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > ½ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

7.1.3 BluetoothTest Configuration

For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels, 1MHz Bandwidth, frequency hops at 1600 hops/second per the Bluetooth standard. The Radio Frequency Channel Number (RFCN) is allocated to 0, 39 and 78 respectively in the case of 2402~2480 MHz during the test at each test frequency channel, the EUT is operated at the RF continuous emission mode.

7.1.3.1 Duty cycle

Bluetooth duty cycle: 76.8%

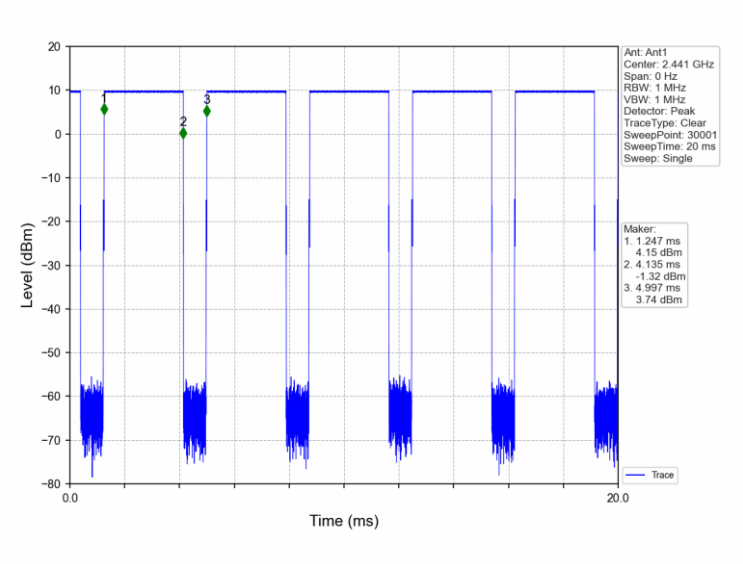

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power Of LTE

LTE Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 20407	Channel 20525	Channel 20643	Tune up
1.4MHz	QPSK	1	0	23.15	23.24	23.10	24.00
		1	2	23.31	23.35	23.27	24.00
		1	5	23.16	23.18	23.10	24.00
		3	0	23.23	23.28	23.21	24.00
		3	2	23.26	23.31	23.23	24.00
		3	3	23.25	23.34	23.23	24.00
		6	0	22.22	22.31	22.19	23.00
	16QAM	1	0	22.10	22.39	22.24	23.00
		1	2	22.27	22.60	22.43	23.00
		1	5	22.05	22.39	22.22	23.00
		3	0	22.08	22.23	22.11	23.00
		3	2	22.09	22.27	22.08	23.00
		3	3	22.07	22.23	22.05	23.00
		6	0	21.24	21.24	21.27	22.00
	64QAM	1	0	21.44	21.20	21.50	22.00
		1	2	21.63	21.39	21.68	22.00
		1	5	21.42	21.20	21.48	22.00
		3	0	21.35	21.22	21.23	22.00
		3	2	21.37	21.20	21.27	22.00
		3	3	21.35	21.18	21.25	22.00
		6	0	20.20	20.17	20.07	21.00
Bandwidth	Modulation	RB size	RB offset	Channel 20415	Channel 20525	Channel 20635	Tune up
3MHz	QPSK	1	0	23.09	23.30	23.17	24.00
		1	7	23.42	23.49	23.38	24.00
		1	14	23.15	23.24	23.10	24.00
		8	0	22.21	22.29	22.18	23.00
		8	4	22.25	22.29	22.22	23.00
		8	7	22.22	22.28	22.15	23.00
		15	0	22.19	22.26	22.13	23.00
	16QAM	1	0	22.36	22.20	22.41	23.00
		1	7	22.52	22.39	22.49	23.00
		1	14	22.37	22.17	22.20	23.00
		8	0	21.30	21.29	21.25	22.00
		8	4	21.30	21.33	21.26	22.00
		8	7	21.30	21.29	21.21	22.00

		15	0	21.22	21.18	21.14	22.00
	64QAM	1	0	21.11	21.55	21.20	22.00
		1	7	21.47	21.76	21.25	22.00
		1	14	21.14	21.56	21.13	22.00
		8	0	20.23	20.23	20.21	21.00
		8	4	20.23	20.22	20.26	21.00
		8	7	20.20	20.23	20.17	21.00
		15	0	20.30	20.21	20.17	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	0	23.10	23.23	23.14	24.00
		1	13	23.26	23.36	23.21	24.00
		1	24	23.14	23.19	23.02	24.00
		12	0	22.27	22.24	22.14	23.00
		12	6	22.29	22.32	22.21	23.00
		12	13	22.23	22.24	22.10	23.00
		25	0	22.30	22.26	22.10	23.00
	16QAM	1	0	22.20	22.38	22.33	23.00
		1	13	22.37	22.48	22.39	23.00
		1	24	22.27	22.33	22.18	23.00
		12	0	21.29	21.25	21.24	22.00
		12	6	21.27	21.32	21.29	22.00
		12	13	21.23	21.22	21.11	22.00
		25	0	21.27	21.29	21.13	22.00
	64QAM	1	0	21.04	21.55	21.74	22.00
		1	13	21.18	21.63	21.81	22.00
		1	24	21.04	21.47	21.60	22.00
		12	0	20.29	20.26	20.22	21.00
		12	6	20.34	20.37	20.29	21.00
		12	13	20.26	20.31	20.15	21.00
		25	0	20.29	20.28	20.12	21.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20450	20525	20600	
10MHz	QPSK	1	0	23.14	23.30	23.20	24.00
		1	25	23.35	**23.48**	23.28	**24.00**
		1	49	23.17	23.22	23.05	24.00
		25	0	22.35	22.24	22.41	23.00
		25	13	22.32	22.33	22.29	23.00
		25	25	**22.46**	22.30	22.22	**23.00**
		50	0	22.38	22.22	22.30	23.00
	16QAM	1	0	22.37	22.25	22.43	23.00
		1	25	22.61	22.32	22.54	23.00
		1	49	22.42	22.09	22.23	23.00
		25	0	21.39	21.27	21.44	22.00
		25	13	21.32	21.36	21.36	22.00
		25	25	21.45	21.33	21.30	22.00
		50	0	21.38	21.25	21.35	22.00

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

	64QAM	1	0	21.14	21.56	21.25	22.00
		1	25	21.29	21.66	21.35	22.00
		1	49	21.12	21.53	21.08	22.00
		25	0	20.38	20.21	20.40	21.00
		25	13	20.37	20.29	20.28	21.00
		25	25	20.46	20.26	20.25	21.00
		50	0	20.36	20.23	20.36	21.00

LTE Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	21.08	21.04	20.31	22.00
		1	13	21.23	21.12	20.47	22.00
		1	24	21.14	21.01	20.26	22.00
		12	0	20.28	20.15	19.51	21.00
		12	6	20.34	20.16	19.50	21.00
		12	13	20.25	20.07	19.37	21.00
		25	0	20.30	20.13	19.44	21.00
	16QAM	1	0	20.21	20.23	19.59	21.00
		1	13	20.42	20.36	19.69	21.00
		1	24	20.29	20.19	19.56	21.00
		12	0	19.25	19.21	18.57	20.00
		12	6	19.30	19.24	18.54	20.00
		12	13	19.30	19.15	18.42	20.00
		25	0	19.33	19.23	18.46	20.00
	64QAM	1	0	19.10	19.37	18.95	20.00
		1	13	19.22	19.53	19.04	20.00
		1	24	19.14	19.36	18.90	20.00
		12	0	18.26	18.25	17.57	19.00
		12	6	18.33	18.23	17.53	19.00
		12	13	18.28	18.12	17.40	19.00
		25	0	18.27	18.18	17.45	19.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	21.14	21.10	20.41	22.00
		1	25	21.34	21.19	20.43	22.00
		1	49	21.28	21.03	20.25	22.00
		25	0	20.34	20.24	19.55	21.00
		25	13	20.35	20.17	19.45	21.00
		25	25	20.38	20.11	19.31	21.00
		50	0	20.36	20.14	19.40	21.00
	16QAM	1	0	20.33	20.06	19.67	21.00
		1	25	20.61	20.14	19.67	21.00
		1	49	20.51	19.95	19.50	21.00
		25	0	19.37	19.28	18.58	20.00

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		25	13	19.38	19.17	18.48	20.00
		25	25	19.41	19.18	18.35	20.00
		50	0	19.36	19.18	18.44	20.00
	64QAM	1	0	19.15	19.43	18.43	20.00
		1	25	19.26	19.53	18.48	20.00
		1	49	19.26	19.34	18.26	20.00
		25	0	18.29	18.14	17.46	19.00
		25	13	18.37	18.12	17.37	19.00
		25	25	18.35	18.03	17.20	19.00
		50	0	18.26	18.11	17.36	19.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	21.06	21.04	20.50	22.00
		1	38	21.27	21.11	20.41	22.00
		1	74	21.18	20.93	20.16	22.00
		36	0	20.30	20.18	19.58	21.00
		36	18	20.38	20.16	19.50	21.00
		36	39	20.42	20.08	19.29	21.00
		75	0	20.34	20.13	19.49	21.00
	16QAM	1	0	20.27	19.98	19.85	21.00
		1	38	20.49	20.00	19.72	21.00
		1	74	20.41	19.84	19.53	21.00
		36	0	19.30	19.14	18.63	20.00
		36	18	19.37	19.10	18.52	20.00
		36	39	19.42	18.99	18.35	20.00
		75	0	19.31	19.14	18.46	20.00
	64QAM	1	0	19.07	19.35	18.90	20.00
		1	38	19.32	19.44	18.75	20.00
		1	74	19.20	19.22	18.58	20.00
		36	0	18.33	18.12	17.50	19.00
		36	18	18.37	18.13	17.46	19.00
		36	39	18.38	17.94	17.29	19.00
		75	0	18.32	18.07	17.42	19.00
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	20.92	20.81	20.69	22.00
		1	50	**21.49**	21.05	20.68	**22.00**
		1	99	21.01	20.65	20.13	22.00
		50	0	20.32	20.19	19.63	21.00
		50	25	20.35	20.16	19.61	21.00
		50	50	**20.43**	20.05	19.37	**21.00**
		100	0	20.37	20.11	19.51	21.00
	16QAM	1	0	20.18	20.03	19.84	21.00
		1	50	20.65	20.30	19.80	21.00
		1	99	20.23	19.79	19.28	21.00
		50	0	19.36	19.28	18.73	20.00
		50	25	19.35	19.25	18.64	20.00

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		50	50	19.46	19.11	18.41	20.00
		100	0	19.39	19.12	18.55	20.00
	64QAM	1	0	19.37	18.91	19.05	20.00
		1	50	19.90	19.22	19.02	20.00
		1	99	19.37	18.72	18.47	20.00
		50	0	18.33	18.20	17.68	19.00
		50	25	18.38	18.17	17.65	19.00
		50	50	18.47	18.06	17.41	19.00
		100	0	18.38	18.12	17.62	19.00

LTE Band 38				Conducted Power(dBm)			Tune up
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				37775	38000	38225	
5MHz	QPSK	1	0	22.13	22.51	22.69	24
		1	13	22.34	22.68	22.79	24
		1	24	22.1	22.62	22.46	24
		12	0	21.19	21.65	21.7	23
		12	6	21.35	21.8	21.82	23
		12	13	21.22	21.73	21.68	23
		25	0	21.36	21.71	21.69	23
	16QAM	1	0	21.25	21.83	21.68	23
		1	13	21.4	21.48	22.05	23
		1	24	21.4	21.7	21.6	23
		12	0	20.18	20.68	20.79	22
		12	6	20.32	20.72	20.82	22
		12	13	20.2	20.81	20.64	22
		25	0	20.29	20.77	20.62	22
	64QAM	1	0	20.15	20.96	20.9	22
		1	13	20.37	20.75	21	22
		1	24	19.85	20.41	20.82	22
		12	0	19.15	19.65	19.69	21
		12	6	19.11	19.64	19.79	21
		12	13	19.15	19.66	19.66	21
		25	0	19.21	19.66	19.71	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	0	22.28	22.64	22.91	24
		1	25	22.45	23.02	22.97	24
		1	49	22.35	22.87	22.7	24
		25	0	21.36	21.74	21.87	23
		25	13	21.43	21.77	21.86	23
		25	25	21.41	21.93	21.82	23
		50	0	21.38	21.86	21.88	23
	16QAM	1	0	21.49	21.68	21.63	23
		1	25	21.49	21.87	21.73	23
		1	49	21.19	21.8	21.58	23

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		25	0	20.43	20.7	20.88	22
		25	13	20.33	20.79	20.91	22
		25	25	20.52	20.91	20.8	22
		50	0	20.46	20.78	20.83	22
	64QAM	1	0	19.79	20.25	20.52	22
		1	25	20.8	21.31	21.13	22
		1	49	20.69	20.9	20.36	22
		25	0	19.21	19.59	19.74	21
		25	13	19.4	19.85	19.76	21
		25	25	19.25	19.68	19.69	21
		50	0	19.36	19.78	19.71	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37825	38000	38175	
15MHz	QPSK	1	0	22.27	22.46	22.85	24
		1	38	22.45	22.85	22.82	24
		1	74	22.43	22.78	22.71	24
		36	0	21.36	21.64	21.84	23
		36	18	21.43	21.8	21.85	23
		36	39	21.52	21.91	21.9	23
		75	0	21.46	21.71	21.84	23
	16QAM	1	0	21.35	21.27	21.77	23
		1	38	21.32	21.7	22.33	23
		1	74	21.57	21.5	22.08	23
		36	0	20.23	20.59	20.87	22
		36	18	20.27	20.79	20.82	22
		36	39	20.51	20.87	20.82	22
		75	0	20.42	20.74	20.82	22
	64QAM	1	0	20.45	20.53	20.84	22
		1	38	19.83	21.2	20.96	22
		1	74	20.67	20.31	20.85	22
		36	0	19.2	19.55	19.75	21
		36	18	19.27	19.65	19.9	21
		36	39	19.37	19.69	19.77	21
		75	0	19.24	19.73	19.76	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
20MHz	QPSK	1	0	22.02	22.17	22.55	24
		1	50	22.52	22.91	**22.98**	**24**
		1	99	22.32	22.51	22.39	24
		50	0	21.34	21.56	21.88	23
		50	25	21.48	21.74	**21.96**	**23**
		50	50	21.62	21.8	21.83	23
		100	0	21.49	21.69	21.9	23
	16QAM	1	0	21.14	21.04	21.55	23
		1	50	21.67	22.14	21.63	23
		1	99	21.38	21.41	21.47	23
		50	0	20.39	20.64	20.8	22

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		50	25	20.39	20.8	20.83	22
		50	50	20.52	20.9	20.8	22
		100	0	20.52	20.77	20.81	22
	64QAM	1	0	20.15	19.77	20.64	22
		1	50	20.51	20.84	20.82	22
		1	99	20.37	20.34	20.65	22
		50	0	19.24	19.54	19.89	21
		50	25	19.49	19.71	19.86	21
		50	50	19.55	19.75	19.93	21
		100	0	19.45	19.7	19.8	21

LTE Band 40 a				Conducted Power(dBm)			Tune up
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				38725	38750	38775	
5MHz	QPSK	1	0	22.09	22.07	22.07	23
		1	13	22.24	22.26	22.24	23
		1	24	22.12	21.96	21.99	23
		12	0	21.15	21.08	21.07	22
		12	6	21.35	21.26	21.28	22
		12	13	21.21	21.19	21.09	22
		25	0	21.15	21.1	21.11	22
	16QAM	1	0	21.07	21.05	21.12	22
		1	13	21.47	20.94	20.92	22
		1	24	21.15	21.16	21.14	22
		12	0	19.99	20.08	20.05	21
		12	6	20.28	20.23	20.19	21
		12	13	20.13	20.16	20.17	21
		25	0	20.35	20.21	20.18	21
	64QAM	1	0	19.82	20.63	20.58	21
		1	13	20.4	20.33	20.32	21
		1	24	20.37	20.33	19.92	21
		12	0	19.25	19.25	19.25	20
		12	6	19.35	19.28	19.22	20
		12	13	19.17	19.17	19.12	20
		25	0	19.07	19.09	19.21	20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					38750		
10MHz	QPSK	1	0	/	22.23	/	23
		1	25	/	**22.44**	/	**23**
		1	49	/	22.15	/	23
		25	0	/	21.18	/	22
		25	13	/	**21.25**	/	**22**
		25	25	/	21.18	/	22
		50	0	/	21.14	/	22
	16QAM	1	0	/	21.26	/	22

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		1	25	/	21.25	/	22
		1	49	/	21.33	/	22
		25	0	/	20.19	/	21
		25	13	/	20.37	/	21
		25	25	/	20.15	/	21
		50	0	/	20.14	/	21
	64QAM	1	0	/	20.29	/	21
		1	25	/	20.73	/	21
		1	49	/	19.72	/	21
		25	0	/	19.26	/	20
		25	13	/	19.17	/	20
		25	25	/	19.22	/	20
		50	0	/	19.19	/	20

LTE Band 40 b				Conducted Power(dBm)			Tune up
Bandwidth	Modulation	RB size	RB offset	Channel 39175	Channel 39200	Channel 39225	
5MHz	QPSK	1	0	22.06	21.58	21.69	22.5
		1	13	21.75	21.85	21.61	22.5
		1	24	22.05	21.67	21.51	22.5
		12	0	21.15	21.18	21.23	22
		12	6	21.35	21.41	21.38	22
		12	13	21.29	21.31	21.32	22
		25	0	21.2	21.27	21.35	22
	16QAM	1	0	21.15	21.19	21.22	22
		1	13	21.19	21.31	21.65	22
		1	24	21.18	21.16	21.34	22
		12	0	20.16	20.21	20.27	21
		12	6	20.37	20.38	20.29	21
		12	13	20.34	20.33	20.35	21
		25	0	20.28	20.33	20.38	21
	64QAM	1	0	20.3	20	20.42	21
		1	13	20.66	20.71	20.39	21
		1	24	20.16	20.19	20.41	21
		12	0	19.34	19.18	19.18	20
		12	6	19.28	19.45	19.26	20
		12	13	19.11	19.2	19.26	20
		25	0	19.17	19.24	19.27	20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel 39200	Channel	Tune up
10MHz	QPSK	1	0	/	21.53	/	22
		1	25	/	**21.76**	/	**22**
		1	49	/	21.31	/	22
		25	0	/	21.2	/	22
		25	13	/	21.29	/	22
		25	25	/	**21.43**	/	**22**

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		50	0	/	21.35	/	22
	16QAM	1	0	/	21.2	/	22
		1	25	/	21.65	/	22
		1	49	/	21.04	/	22
		25	0	/	20.38	/	21
		25	13	/	20.36	/	21
		25	25	/	20.42	/	21
		50	0	/	20.36	/	21
	64QAM	1	0	/	19.82	/	21
		1	25	/	20.84	/	21
		1	49	/	19.97	/	21
		25	0	/	19.11	/	20
		25	13	/	19.36	/	20
		25	25	/	19.33	/	20
		50	0	/	19.28	/	20

LTE Band 41				Conducted Power(dBm)			Tune up
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	
				39675	40620	41565	
5MHz	QPSK	1	0	23.01	22.52	22.9	24
		1	13	23.18	22.74	23.07	24
		1	24	23.03	22.59	22.92	24
		12	0	22.02	21.67	21.92	23
		12	6	22.11	21.76	22.09	23
		12	13	22.02	21.71	21.98	23
		25	0	22	21.6	21.98	23
	16QAM	1	0	22.05	21.55	21.83	23
		1	13	22.09	21.79	22.27	23
		1	24	22.03	21.71	22	23
		12	0	20.9	20.63	20.92	22
		12	6	21.05	20.68	20.99	22
		12	13	21.08	20.61	20.97	22
		25	0	21.06	20.69	21.02	22
	64QAM	1	0	20.54	20.59	21.21	22
		1	13	20.83	20.87	20.73	22
		1	24	20.75	20.28	20.71	22
		12	0	20.03	19.49	19.87	21
		12	6	20.15	19.73	20.2	21
		12	13	20.08	19.62	20.05	21
		25	0	20.11	19.52	19.94	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				39700	40620	41540	
10MHz	QPSK	1	0	23.01	22.53	22.77	24
		1	25	23.29	22.95	23.17	24
		1	49	23.34	22.79	23.07	24
		25	0	22.09	21.57	21.84	23

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		25	13	22.17	21.76	21.98	23
		25	25	22.3	21.78	21.97	23
		50	0	22.12	21.72	21.88	23
	16QAM	1	0	21.85	21.35	21.8	23
		1	25	22.48	21.86	21.99	23
		1	49	22.37	21.55	21.94	23
		25	0	21.15	20.67	20.88	22
		25	13	21.24	20.76	20.89	22
		25	25	21.16	20.8	21.02	22
		50	0	21.19	20.62	20.88	22
	64QAM	1	0	21.32	20.22	20.91	22
		1	25	21	20.49	20.76	22
		1	49	21.01	20.89	20.85	22
		25	0	20.05	19.48	19.82	21
		25	13	20.2	19.62	19.89	21
		25	25	20.21	19.64	19.93	21
		50	0	20.09	19.69	19.94	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				39725	40620	41515	
15MHz	QPSK	1	0	22.97	22.38	22.66	24
		1	38	23.3	22.78	22.95	24
		1	74	23.13	22.71	23.1	24
		36	0	22.08	21.52	21.82	23
		36	18	22.29	21.67	21.96	23
		36	39	22.23	21.73	21.91	23
		75	0	22.25	21.63	21.94	23
	16QAM	1	0	22.15	21.18	21.57	23
		1	38	22.18	21.46	21.88	23
		1	74	22.36	21.71	22.43	23
		36	0	21.02	20.58	20.71	22
		36	18	21.23	20.7	20.87	22
		36	39	21.18	20.7	20.87	22
		75	0	21.23	20.61	20.92	22
	64QAM	1	0	21.43	20.81	20.57	22
		1	38	21.46	21.1	21.08	22
		1	74	20.9	20.3	20.77	22
		36	0	20.08	19.58	19.68	21
		36	18	20.18	19.71	19.8	21
		36	39	20.34	19.68	19.89	21
		75	0	20.26	19.61	19.81	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				39750	40620	41490	
20MHz	QPSK	1	0	22.81	22.09	22.24	24
		1	50	**23.35**	22.68	22.91	**24**
		1	99	23	22.46	22.73	24
		50	0	22.12	21.6	21.66	23
		50	25	22.21	21.64	21.75	23

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

		50	50	**22.32**	21.83	21.94	**23**
		100	0	22.24	21.73	21.76	23
	16QAM	1	0	21.89	20.98	21.51	23
		1	50	22.48	22.08	21.97	23
		1	99	22.24	21.8	21.8	23
		50	0	21.17	20.46	20.79	22
		50	25	21.23	20.68	20.88	22
		50	50	21.25	20.8	20.96	22
		100	0	21.17	20.62	20.75	22
	64QAM	1	0	20.99	20.34	20.1	22
		1	50	21.56	20.5	21.06	22
		1	99	21.19	20.71	20.98	22
		50	0	20.09	19.5	19.72	21
		50	25	20.15	19.65	19.76	21
		50	50	20.44	19.84	19.84	21
		100	0	20.18	19.71	19.86	21

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.1.2 Conducted Power Of Wi-Fi

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Tune up
802.11b	1	2412	1	16.05	17
	6	2437		16.23	17
	11	2462		15.96	17
802.11g	1	2412	6	12.91	14
	6	2437		13.23	14
	11	2462		13.00	14
802.11n HT20 SISO	1	2412	6.5	12.12	13
	6	2437		12.23	13
	11	2462		12.02	13
802.11n HT40 SISO	3	2422	13.5	11.07	12
	6	2437		11.10	12
	9	2452		11.01	12

Note:

a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.

b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.1.3 Conducted Power Of BT

BT			Average Conducted Power(dBm)	Tune up (dBm)
Modulation	Channel	Frequency (MHz)		
GFSK	0	2402	7.92	9
	39	2441	8.53	9
	78	2480	7.43	9
π/4DQPSK	0	2402	8.06	9
	39	2441	8.61	9
	78	2480	7.44	9
8DPSK	0	2402	8.06	9
	39	2441	8.70	9
	78	2480	7.49	9

BLE			Average Conducted Power(dBm)	Tune up (dBm)
Modulation	Channel	Frequency (MHz)		
GFSK	0	2402	-1.13	0
	19	2440	-0.38	0
	39	2480	-1.39	0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2 Measurement of SAR Data

Note:

1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B

2) Per FCC KDB Publication 447498 D04, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

3) "*" is repeated measured SAR

WiFi 2.4G:

1) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.1 SAR Result Of LTE Band 5

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	10M_QPSK 1RB_25	20525/836.5	1:1	0.184	0.106	0.04	23.48	24	1.127	**0.208**	22.1	1.6
Front side	10M_QPSK 1RB_25	20450/829	1:1	0.179	0.105	0.1	23.35	24	1.161	0.207	22.1	1.6
Front side	10M_QPSK 1RB_25	20600/844	1:1	0.174	0.100	-0.08	23.28	24	1.180	0.205	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	10M_QPSK 1RB_25	20525/836.5	1:1	0.549	0.317	-0.08	23.48	24	1.127	**0.357**	22.1	4.0
Back side	10M_QPSK 1RB_25	20525/836.5	1:1	0.008	0.006	0.04	23.48	24	1.127	0.007	22.1	4.0
Left side	10M_QPSK 1RB_25	20525/836.5	1:1	0.121	0.078	0.03	23.48	24	1.127	0.088	22.1	4.0
Right side	10M_QPSK 1RB_25	20525/836.5	1:1	0.053	0.036	-0.07	23.48	24	1.127	0.040	22.1	4.0
Top side	10M_QPSK 1RB_25	20525/836.5	1:1	0.030	0.018	-0.15	23.48	24	1.127	0.021	22.1	4.0
Bottom side	10M_QPSK 1RB_25	20525/836.5	1:1	0.489	0.288	0.19	23.48	24	1.127	0.325	22.1	4.0
Front side	10M_QPSK 25RB_25	20450/829	1:1	0.510	0.296	-0.16	22.46	23	1.132	0.335	22.1	4.0
Back side	10M_QPSK 25RB_25	20450/829	1:1	0.008	0.010	0.09	22.46	23	1.132	0.011	22.1	4.0
Left side	10M_QPSK 25RB_25	20450/829	1:1	0.113	0.073	0.03	22.46	23	1.132	0.082	22.1	4.0
Right side	10M_QPSK 25RB_25	20450/829	1:1	0.052	0.038	0.01	22.46	23	1.132	0.043	22.1	4.0
Top side	10M_QPSK 25RB_25	20450/829	1:1	0.030	0.017	0.17	22.46	23	1.132	0.019	22.1	4.0
Bottom side	10M_QPSK 25RB_25	20450/829	1:1	0.455	0.267	-0.18	22.46	23	1.132	0.302	22.1	4.0
Front side	10M_QPSK 1RB_25	20450/829	1:1	0.464	0.270	0.19	23.35	24	1.161	0.313	22.1	4.0
Front side	10M_QPSK 1RB_25	20600/844	1:1	0.460	0.267	0.09	23.28	24	1.180	0.315	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.2 SAR Result Of LTE Band 7

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	20M_QPSK 1RB_50	20850/2510	1:1	1.04	0.396	-0.14	21.49	22	1.125	**1.171**	22.1	1.6
Front side	20M_QPSK 1RB_50	21100/2535.5	1:1	0.933	0.321	0.07	21.05	22	1.245	1.161	22.1	1.6
Front side	20M_QPSK 1RB_50	21350/2560	1:1	0.855	0.303	-0.07	20.68	22	1.355	1.159	22.1	1.6
Front side *	20M_QPSK 1RB_50	20850/2510	1:1	0.992	0.387	-0.02	21.49	22	1.125	1.116	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	20M_QPSK 1RB_50	20850/2510	1:1	3.12	1.18	-0.04	21.49	22	1.125	1.332	22.1	4.0
Back side	20M_QPSK 1RB_50	20850/2510	1:1	0.140	0.061	-0.17	21.49	22	1.125	0.068	22.1	4.0
Left side	20M_QPSK 1RB_50	20850/2510	1:1	2.04	0.877	0.16	21.49	22	1.125	0.986	22.1	4.0
Right side	20M_QPSK 1RB_50	20850/2510	1:1	0.92	0.422	0.09	21.49	22	1.125	0.474	22.1	4.0
Top side	20M_QPSK 1RB_50	20850/2510	1:1	0.470	0.209	0.18	21.49	22	1.125	0.236	22.1	4.0
Bottom side	20M_QPSK 1RB_50	20850/2510	1:1	9.86	3.21	-0.11	21.49	22	1.125	**3.610**	22.1	4.0
Front side	20M_QPSK 50RB_50	20850/2510	1:1	2.87	1.09	-0.09	20.43	21	1.140	1.243	22.1	4.0
Back side	20M_QPSK 50RB_50	20850/2510	1:1	0.129	0.059	0.07	20.43	21	1.140	0.067	22.1	4.0
Left side	20M_QPSK 50RB_50	20850/2510	1:1	1.88	0.81	0.11	20.43	21	1.140	0.920	22.1	4.0
Right side	20M_QPSK 50RB_50	20850/2510	1:1	0.84	0.388	0.01	20.43	21	1.140	0.442	22.1	4.0
Top side	20M_QPSK 50RB_50	20850/2510	1:1	0.433	0.200	-0.13	20.43	21	1.140	0.228	22.1	4.0
Bottom side	20M_QPSK 50RB_50	20850/2510	1:1	9.45	3.11	-0.06	20.43	21	1.140	3.546	22.1	4.0
Bottom side	20M_QPSK 1RB_50	21100/2535.5	1:1	9.11	2.84	-0.13	21.05	22	1.245	3.534	22.1	4.0
Bottom side	20M_QPSK 1RB_50	21350/2560	1:1	8.94	2.59	0.06	20.68	22	1.355	3.504	22.1	4.0
Bottom side *	20M_QPSK 1RB_50	20850/2510	1:1	9.79	3.16	-0.04	21.49	22	1.125	3.554	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.3 SAR Result Of LTE Band 38

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	20M_QPSK 1RB_50	38150/2610	1:1	0.967	0.370	-0.04	22.98	24	1.265	**1.223**	22.1	1.6
Front side	20M_QPSK 1RB_50	37850/2580	1:1	0.855	0.338	0.06	22.52	24	1.406	1.202	22.1	1.6
Front side	20M_QPSK 1RB_50	38000/2595	1:1	0.918	0.353	-0.09	22.91	24	1.285	1.180	22.1	1.6
Front side *	20M_QPSK 1RB_50	38150/2610	1:1	0.963	0.367	0.02	22.98	24	1.265	1.218	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	20M_QPSK 1RB_50	38150/2610	1:1	2.90	1.11	-0.13	22.98	24	1.265	1.398	22.1	4.0
Back side	20M_QPSK 1RB_50	38150/2610	1:1	0.124	0.055	0.14	22.98	24	1.265	0.070	22.1	4.0
Left side	20M_QPSK 1RB_50	38150/2610	1:1	1.90	0.817	0.17	22.98	24	1.265	1.034	22.1	4.0
Right side	20M_QPSK 1RB_50	38150/2610	1:1	0.849	0.388	-0.17	22.98	24	1.265	0.491	22.1	4.0
Top side	20M_QPSK 1RB_50	38150/2610	1:1	0.432	0.194	0.11	22.98	24	1.265	0.245	22.1	4.0
Bottom side	20M_QPSK 1RB_50	38150/2610	1:1	8.09	2.95	0.03	22.98	24	1.265	**3.731**	22.1	4.0
Front side	20M_QPSK 50RB_25	38150/2610	1:1	2.67	1.02	-0.04	21.96	23	1.271	1.294	22.1	4.0
Back side	20M_QPSK 50RB_25	38150/2610	1:1	0.120	0.052	0.09	21.96	23	1.271	0.066	22.1	4.0
Left side	20M_QPSK 50RB_25	38150/2610	1:1	1.75	0.751	-0.07	21.96	23	1.271	0.954	22.1	4.0
Right side	20M_QPSK 50RB_25	38150/2610	1:1	0.784	0.359	-0.12	21.96	23	1.271	0.456	22.1	4.0
Top side	20M_QPSK 50RB_25	38150/2610	1:1	0.401	0.180	0.08	21.96	23	1.271	0.229	22.1	4.0
Bottom side	20M_QPSK 50RB_25	38150/2610	1:1	7.43	2.90	-0.05	21.96	23	1.271	3.679	22.1	4.0
Bottom side	20M_QPSK 1RB_50	37850/2580	1:1	7.07	2.60	0.02	22.52	24	1.406	3.649	22.1	4.0
Bottom side	20M_QPSK 1RB_50	38000/2595	1:1	7.25	2.76	0.09	22.91	24	1.285	3.545	22.1	4.0
Bottom side *	20M_QPSK 1RB_50	38150/2610	1:1	7.96	2.83	-0.11	22.98	24	1.265	3.579	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.4 SAR Result Of LTE Band 40

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	10M_QPSK 1RB_25	38750/2310	1:1	0.78	0.318	0.09	22.44	23	1.138	**0.886**	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	10M_QPSK 1RB_25	38750/2310	1:1	2.33	0.951	0.16	22.44	23	1.138	1.082	22.1	4.0
Back side	10M_QPSK 1RB_25	38750/2310	1:1	0.099	0.040	0.1	22.44	23	1.138	0.046	22.1	4.0
Left side	10M_QPSK 1RB_25	38750/2310	1:1	1.53	0.706	0.18	22.44	23	1.138	0.803	22.1	4.0
Right side	10M_QPSK 1RB_25	38750/2310	1:1	0.688	0.338	-0.17	22.44	23	1.138	0.384	22.1	4.0
Top side	10M_QPSK 1RB_25	38750/2310	1:1	0.350	0.164	-0.19	22.44	23	1.138	0.186	22.1	4.0
Bottom side	10M_QPSK 1RB_25	38750/2310	1:1	6.47	2.76	-0.02	22.44	23	1.138	**3.140**	22.1	4.0
Front side	10M_QPSK 25RB_13	38750/2310	1:1	2.14	0.873	-0.03	21.25	22	1.189	1.037	22.1	4.0
Back side	10M_QPSK 25RB_13	38750/2310	1:1	0.094	0.040	0.03	21.25	22	1.189	0.047	22.1	4.0
Left side	10M_QPSK 25RB_13	38750/2310	1:1	1.41	0.648	0.16	21.25	22	1.189	0.770	22.1	4.0
Right side	10M_QPSK 25RB_13	38750/2310	1:1	0.635	0.315	0.07	21.25	22	1.189	0.374	22.1	4.0
Top side	10M_QPSK 25RB_13	38750/2310	1:1	0.323	0.152	-0.11	21.25	22	1.189	0.181	22.1	4.0
Bottom side	10M_QPSK 25RB_13	38750/2310	1:1	5.94	2.54	-0.06	21.25	22	1.189	3.016	22.1	4.0
Bottom side *	10M_QPSK 1RB_25	38750/2310	1:1	6.39	2.71	-0.06	22.44	23	1.138	3.083	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.5 SAR Result Of LTE Band 40b

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	10M_QPSK 1RB_25	39200/2355	1:1	0.70	0.287	-0.15	21.76	22	1.057	**0.742**	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	10M_QPSK 1RB_25	39200/2355	1:1	2.10	0.857	-0.15	21.76	22	1.057	0.906	22.1	4.0
Back side	10M_QPSK 1RB_25	39200/2355	1:1	0.093	0.041	0.14	21.76	22	1.057	0.043	22.1	4.0
Left side	10M_QPSK 1RB_25	39200/2355	1:1	1.38	0.641	0.15	21.76	22	1.057	0.678	22.1	4.0
Right side	10M_QPSK 1RB_25	39200/2355	1:1	0.621	0.307	0.13	21.76	22	1.057	0.324	22.1	4.0
Top side	10M_QPSK 1RB_25	39200/2355	1:1	0.317	0.152	-0.18	21.76	22	1.057	0.161	22.1	4.0
Bottom side	10M_QPSK 1RB_25	39200/2355	1:1	5.83	2.49	0.19	21.76	22	1.057	**2.630**	22.1	4.0
Front side	10M_QPSK 25RB_25	39200/2355	1:1	1.94	0.792	-0.02	21.43	22	1.140	0.903	22.1	4.0
Back side	10M_QPSK 25RB_25	39200/2355	1:1	0.085	0.039	-0.08	21.43	22	1.140	0.044	22.1	4.0
Left side	10M_QPSK 25RB_25	39200/2355	1:1	1.27	0.587	0.06	21.43	22	1.140	0.669	22.1	4.0
Right side	10M_QPSK 25RB_25	39200/2355	1:1	0.577	0.288	-0.08	21.43	22	1.140	0.329	22.1	4.0
Top side	10M_QPSK 25RB_25	39200/2355	1:1	0.292	0.142	-0.14	21.43	22	1.140	0.162	22.1	4.0
Bottom side	10M_QPSK 25RB_25	39200/2355	1:1	5.35	2.29	-0.06	21.43	22	1.140	2.607	22.1	4.0
Bottom side *	10M_QPSK 1RB_25	39200/2355	1:1	5.76	2.44	0.07	21.76	22	1.057	2.579	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.6 SAR Result Of LTE Band 41

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)												
Front side	20M_QPSK 1RB_50	39750/2506	1:1	1.00	0.37	0.04	23.35	24	1.161	**1.165**	22.1	1.6
Front side	20M_QPSK 1RB_50	40620/2593	1:1	0.765	0.289	0.03	22.68	24	1.355	1.037	22.1	1.6
Front side	20M_QPSK 1RB_50	41490/2680	1:1	0.790	0.302	-0.05	22.91	24	1.285	1.016	22.1	1.6
Front side *	20M_QPSK 1RB_50	39750/2506	1:1	0.989	0.365	0.12	23.35	24	1.161	1.149	22.1	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power Drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)												
Front side	20M_QPSK 1RB_50	39750/2506	1:1	3.00	1.12	0.04	23.35	24	1.161	1.302	22.1	4.0
Back side	20M_QPSK 1RB_50	39750/2506	1:1	0.125	0.051	0.06	23.35	24	1.161	0.059	22.1	4.0
Left side	20M_QPSK 1RB_50	39750/2506	1:1	1.97	0.835	0.1	23.35	24	1.161	0.970	22.1	4.0
Right side	20M_QPSK 1RB_50	39750/2506	1:1	0.879	0.394	0.19	23.35	24	1.161	0.458	22.1	4.0
Top side	20M_QPSK 1RB_50	39750/2506	1:1	0.453	0.193	-0.17	23.35	24	1.161	0.224	22.1	4.0
Bottom side	20M_QPSK 1RB_50	39750/2506	1:1	8.25	3.22	-0.12	23.35	24	1.161	**3.740**	22.1	4.0
Front side	20M_QPSK 50RB_50	39750/2506	1:1	2.76	1.03	-0.11	22.32	23	1.169	1.206	22.1	4.0
Back side	20M_QPSK 50RB_50	39750/2506	1:1	0.117	0.052	-0.11	22.32	23	1.169	0.061	22.1	4.0
Left side	20M_QPSK 50RB_50	39750/2506	1:1	1.81	0.767	0.17	22.32	23	1.169	0.897	22.1	4.0
Right side	20M_QPSK 50RB_50	39750/2506	1:1	0.812	0.367	0.05	22.32	23	1.169	0.429	22.1	4.0
Top side	20M_QPSK 50RB_50	39750/2506	1:1	0.418	0.180	-0.09	22.32	23	1.169	0.210	22.1	4.0
Bottom side	20M_QPSK 50RB_50	39750/2506	1:1	7.57	2.96	0.15	22.32	23	1.169	3.458	22.1	4.0
Bottom side	20M_QPSK 1RB_50	40620/2593	1:1	7.31	2.66	0.17	22.68	24	1.355	3.605	22.1	4.0
Bottom side	20M_QPSK 1RB_50	41490/2680	1:1	7.62	2.85	-0.03	22.91	24	1.285	3.663	22.1	4.0
Bottom side *	20M_QPSK 1RB_50	39750/2506	1:1	8.11	3.12	0.05	23.35	24	1.161	3.624	22.1	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.7 SAR Result Of 2.4GHz Wi-Fi

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)													
Front side	802.11b	6/2437	99.97%	1	0.195	0.066	0.10	16.23	17.00	1.194	**0.232**	22.0	1.6
Front side	802.11b	1/2412	99.98%	1	0.177	0.066	0.14	16.05	17.00	1.245	0.221	22.0	1.6
Front side	802.11b	11/2462	99.97%	1	0.172	0.064	-0.05	15.96	17.00	1.271	0.219	22.0	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)													
Front side	802.11b	6/2437	99.97%	1	0.578	0.198	0.10	16.23	17.00	1.194	**0.237**	22.0	4.0
Back side	802.11b	6/2437	99.97%	1	0.008	0.009	-0.17	16.23	17.00	1.194	0.011	22.0	4.0
Left side	802.11b	6/2437	99.97%	1	0.106	0.048	-0.14	16.23	17.00	1.194	0.057	22.0	4.0
Right side	802.11b	6/2437	99.97%	1	0.041	0.019	0.11	16.23	17.00	1.194	0.023	22.0	4.0
Top side	802.11b	6/2437	99.97%	1	0.025	0.010	-0.09	16.23	17.00	1.194	0.012	22.0	4.0
Bottom side	802.11b	6/2437	99.97%	1	0.276	0.095	0.11	16.23	17.00	1.194	0.113	22.0	4.0
Front side	802.11b	1/2412	99.98%	1	0.571	0.183	0.16	16.05	17.00	1.245	0.228	22.0	4.0
Front side	802.11b	11/2462	99.97%	1	0.551	0.167	0.12	15.96	17.00	1.271	0.212	22.0	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.8 SAR Result Of Bluetooth

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 1-g	Liquid Temp.	SAR limit (W/kg) 1-g
Body Test data(With back clamp)													
Front side	GFSK	39/2441	76.80%	1.302	0.092	0.037	0.15	8.53	9.00	1.114	**0.133**	22.0	1.6
Front side	GFSK	0/2402	76.80%	1.302	0.073	0.035	0.08	7.92	9.00	1.282	0.123	22.0	1.6
Front side	GFSK	78/2480	76.80%	1.302	0.065	0.024	-0.07	7.43	9.00	1.435	0.121	22.0	1.6

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Conducted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg) 10-g	Liquid Temp.	SAR limit (W/kg) 10-g
Extremity Test data(Separate 0mm)													
Front side	GFSK	39/2441	76.80%	1.302	0.275	0.106	0.15	8.53	9.00	1.114	**0.154**	22.0	4.0
Back side	GFSK	39/2441	76.80%	1.302	0.007	0.006	0.13	8.53	9.00	1.114	0.008	22.0	4.0
Left side	GFSK	39/2441	76.80%	1.302	0.056	0.031	-0.10	8.53	9.00	1.114	0.045	22.0	4.0
Right side	GFSK	39/2441	76.80%	1.302	0.023	0.010	-0.01	8.53	9.00	1.114	0.015	22.0	4.0
Top side	GFSK	39/2441	76.80%	1.302	0.010	0.010	0.07	8.53	9.00	1.114	0.015	22.0	4.0
Bottom side	GFSK	39/2441	76.80%	1.302	0.164	0.068	-0.05	8.53	9.00	1.114	0.099	22.0	4.0
Front side	GFSK	0/2402	76.80%	1.302	0.236	0.087	0.05	7.92	9.00	1.282	0.145	22.0	4.0
Front side	GFSK	78/2480	76.80%	1.302	0.179	0.068	0.07	7.43	9.00	1.435	0.127	22.0	4.0

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.2.9 Repeated measurements

Wireless	Test position	First Measure SAR (W/kg)	Second Measure SAR (W/kg)	Radio
LTE Band 7	Front side	1.04	0.992	1.05
LTE Band 7	Bottom side	3.21	3.16	1.02
LTE Band 38	Front side	0.967	0.963	1.00
LTE Band 38	Bottom side	2.95	2.83	1.04
LTE Band 40a	Bottom side	2.76	2.71	1.02
LTE Band 40b	Bottom side	2.49	2.44	1.02
LTE Band 41	Front side	1.00	0.989	1.01
LTE Band 41	Bottom side	3.22	3.12	1.03

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.20

2) When the original highest measured SAR is ⩾ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ⩾ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ⩾ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

8.3 Multiple Transmitter Evaluation

8.3.1 Simultaneous SAR SAR test evaluation

Simultaneous Transmission

NO.	Simultaneous Transmission Configuration	Body
1	WWAN + WIFI 2.4GHz	Yes
2	WWAN + BT	Yes
3	WIFI + BT (They share the same antenna and cannot transmit at the same time by design.)	No

Simultaneous Transmission SAR Summation Scenario for Extremity

WWAN Band	Exposure position	①MAX. WWAN SAR (W/kg)	②MAX. WLAN2.4G SAR (W/kg)	③MAX BT SAR (W/kg)	Summed SAR ①+②	Summed SAR ①+③	Volume scan
LTE Band 5	Front	0.357	0.237	0.154	0.594	0.511	NO
	Back	0.007	0.011	0.008	0.018	0.015	NO
	Left	0.088	0.057	0.045	0.145	0.133	NO
	Right	0.04	0.023	0.015	0.063	0.055	NO
	Top	0.021	0.012	0.015	0.033	0.036	NO
	Bottom	0.325	0.113	0.099	0.438	0.424	NO
LTE Band 7	Front	1.332	0.237	0.154	1.569	1.486	NO
	Back	0.068	0.011	0.008	0.079	0.076	NO
	Left	0.986	0.057	0.045	1.043	1.031	NO
	Right	0.474	0.023	0.015	0.497	0.489	NO
	Top	0.236	0.012	0.015	0.248	0.251	NO
	Bottom	3.61	0.113	0.099	3.723	3.709	NO
LTE Band 38	Front	1.398	0.237	0.154	1.635	1.552	NO
	Back	0.07	0.011	0.008	0.081	0.078	NO
	Left	1.034	0.057	0.045	1.091	1.079	NO
	Right	0.491	0.023	0.015	0.514	0.506	NO
	Top	0.245	0.012	0.015	0.257	0.260	NO
	Bottom	3.731	0.113	0.099	3.844	3.830	NO
LTE Band 40 a	Front	1.082	0.237	0.154	1.319	1.236	NO
	Back	0.046	0.011	0.008	0.057	0.054	NO
	Left	0.803	0.057	0.045	0.860	0.848	NO
	Right	0.384	0.023	0.015	0.407	0.399	NO

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

	Top	0.186	0.012	0.015	0.198	0.201	NO
	Bottom	3.14	0.113	0.099	3.253	3.239	NO
LTE Band 40 b	Front	0.906	0.237	0.154	1.143	1.060	NO
	Back	0.043	0.011	0.008	0.054	0.051	NO
	Left	0.678	0.057	0.045	0.735	0.723	NO
	Right	0.324	0.023	0.015	0.347	0.339	NO
	Top	0.161	0.012	0.015	0.173	0.176	NO
	Bottom	2.63	0.113	0.099	2.743	2.729	NO
LTE Band 41	Front	1.302	0.237	0.154	1.539	1.456	NO
	Back	0.059	0.011	0.008	0.070	0.067	NO
	Left	0.97	0.057	0.045	1.027	1.015	NO
	Right	0.458	0.023	0.015	0.481	0.473	NO
	Top	0.224	0.012	0.015	0.236	0.239	NO
	Bottom	3.74	0.113	0.099	3.853	3.839	NO

Simultaneous Transmission SAR Summation Scenario for Body

WWAN Band	Exposure position	①MAX. WWAN SAR (W/kg)	②MAX. WLAN2.4G SAR (W/kg)	③MAX BT SAR (W/kg)	Summed SAR ①+②	Summed SAR ①+③	Volume scan
LTE Band 5	Front	0.208	0.232	0.133	0.440	0.341	NO
LTE Band 7	Front	1.171	0.232	0.133	1.403	1.304	NO
LTE Band 38	Front	1.223	0.232	0.133	1.455	1.356	NO
LTE Band 40 a	Front	0.886	0.232	0.133	1.118	1.019	NO
LTE Band 40 b	Front	0.742	0.232	0.133	0.974	0.875	NO
LTE Band 41	Front	1.165	0.232	0.133	1.397	1.298	NO

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

9 Equipment list

Test Platform	SPEAG DASY5 Professional
Location	Compliance Certification Services (Kunshan) Inc.
Software Reference	DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)
Hardware Reference	

	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	P C	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A
☒	Signal Generator	Agilent	E5182A	MY50142015	2021/09/24	2022/09/23
☒	S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	2022/02/20	2023/02/19
☒	DAK-3.5 probe	SPEAG	DAK-3.5	1102	N/A	N/A
☒	Wireless Communication Test Set	R&S	CMW500	159275	2021/10/12	2022/10/11
☒	DAE	SPEAG	DAE4	1245	2022/05/30	2023/05/29
☒	E-field PROBE	SPEAG	EX3DV4	7346	2022/03/30	2023/03/29
☒	Dipole	SPEAG	D835V2	4d114	2022/03/31	2025/03/30
☒	Dipole	SPEAG	D2450V2	817	2022/04/01	2025/03/31
☒	Electro Thermometer	DTM	DTM3000	3030	2021/10/17	2022/10/16
☒	Amplifier	Mini-circuits	ZVE-8G	110405	N/A	N/A
☒	Amplifier	Mini-circuits	ZHL-42	QA1331003	N/A	N/A
☒	3db ATTENUATOR	MINI	MCL BW-S3W5	0533	N/A	N/A
☒	DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A
☒	Dual Directional Coupler	Woken	20W couple	DOM2BHW1A1	N/A	N/A
☒	SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A
☒	Twin SAM Phantom	SPEAG	QD000P40CD	1609	N/A	N/A
☒	ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A
☒	ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A
☒	LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A

Note: All the equipments are within the valid period when the tests are performed.

All measurement facilities used to collect the measurement data are located at

☒ No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Appendix A: Detailed System Check Results

The plots are showing as followings.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Date: 2022/08/03

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

System Performance Check-D835

DUT: Dipole 835 MHz D835V2; Type: SN4d114

Communication System: UID 0, CW; Frequency: 835 MHz;Duty Cycle: 1:1
Medium parameters used: f = 835 MHz; σ = 0.909 S/m; ε_r = 41.668; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.12, 10.12, 10.12); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies Low 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 2.64 W/kg
System Performance Check at Frequencies Low 1 GHz/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.58 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 3.03 W/kg
SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.48 W/kg; Maximum value of SAR (measured) = 2.61 W/kg

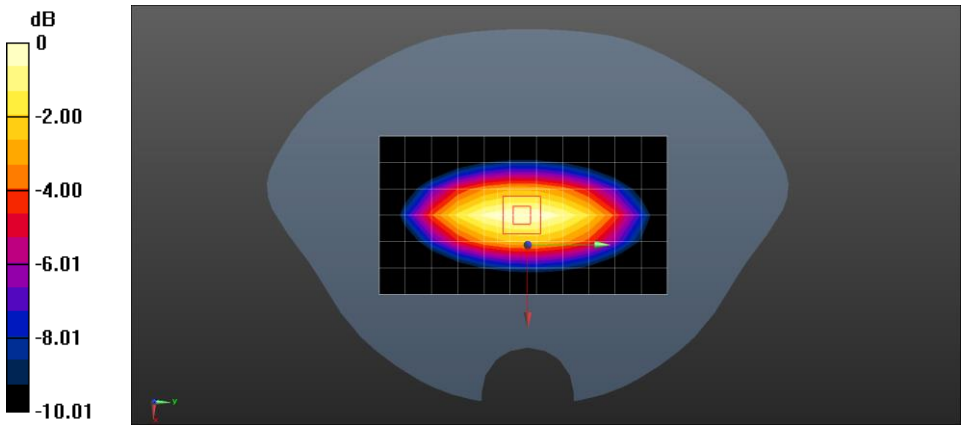

0 dB = 2.61 W/kg = 4.17 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

System Performance Check-D2300

DUT: Dipole 2300 MHz D2300V2; Type: 1096

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2300 MHz; σ = 1.662 S/m; ε_r = 40.521; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.86, 7.86, 7.86); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 16.1 W/kg
System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 107.7 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 25.9 W/kg
SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.74 W/kg; Maximum value of SAR (measured) = 15.3 W/kg

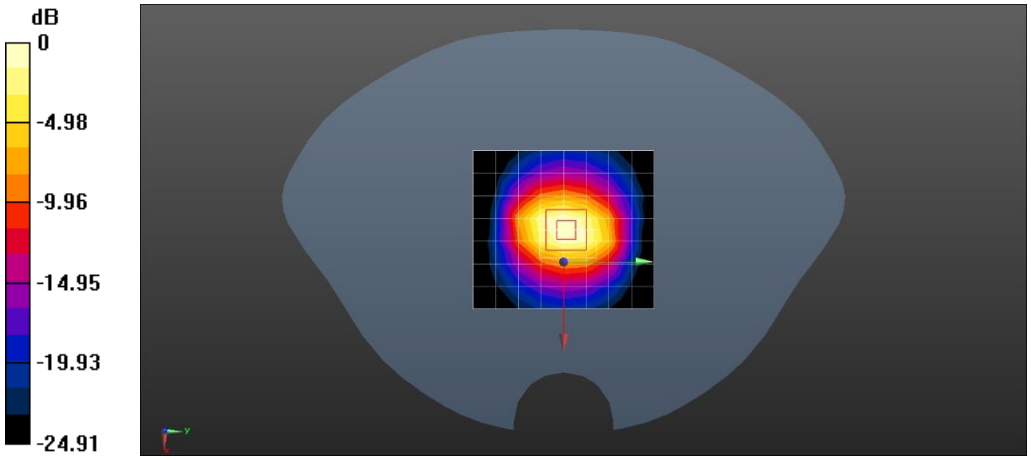

0 dB = 15.3 W/kg = 11.85 dBW/kg

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

System Performance Check-D2450

DUT: Dipole 2450 MHz D2450V2; Type: 817

Communication System: UID 0, CW; Frequency: 2450 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2450 MHz; σ = 1.816 S/m; ε_r = 40.068; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.63, 7.63, 7.63); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 15.8 W/kg
System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 109.3 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 25.7 W/kg
SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.87 W/kg; Maximum value of SAR (measured) = 17.2 W/kg

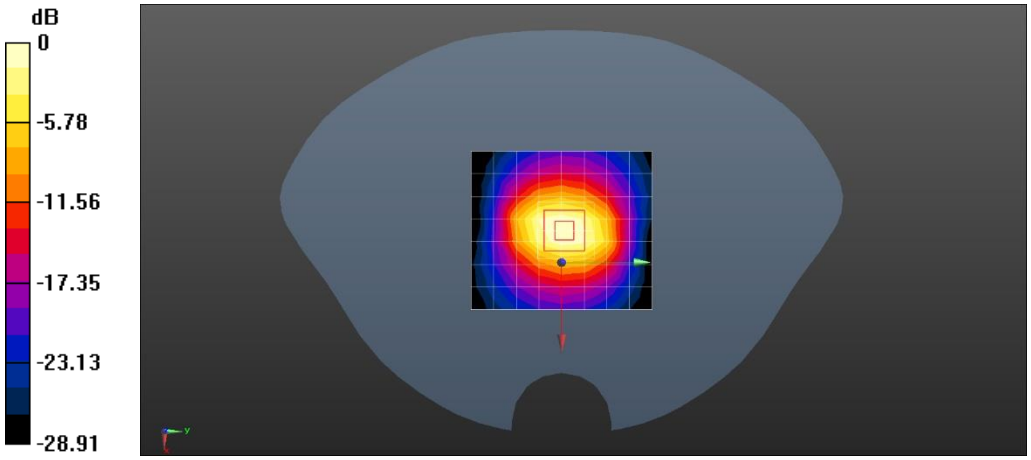

0 dB = 17.2 W/kg = 12.36 dBW/kg

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

System Performance Check-D2600

DUT: Dipole 2600 MHz D2600V2; Type: 1158

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2600 MHz; σ = 1.992 S/m; ε_r = 39.563; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.33, 7.33, 7.33); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 18.0 W/kg
System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 111.5 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 29.2 W/kg
SAR(1 g) = 13.46 W/kg; SAR(10 g) = 6.25 W/kg; Maximum value of SAR (measured) = 19.5 W/kg

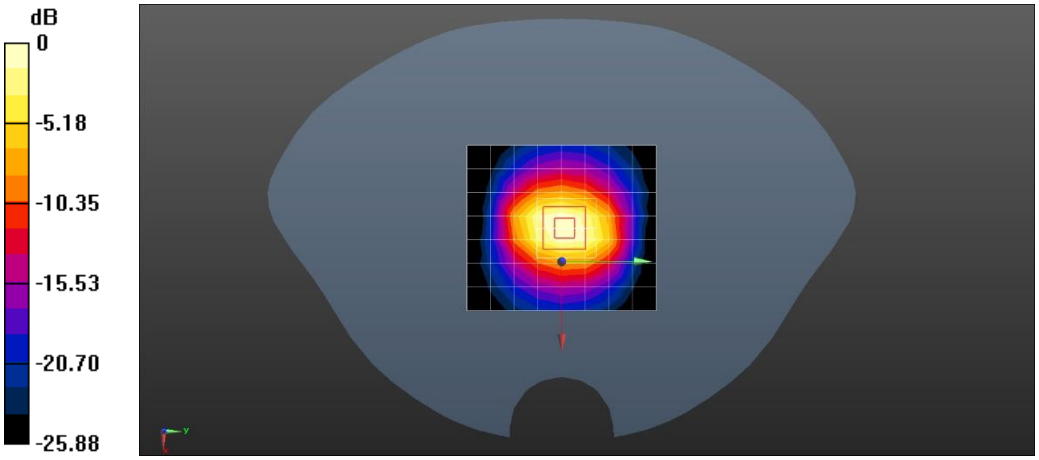

0 dB = 19.5 W/kg = 12.90 dBW/kg

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 5 10M QPSK 1RB25 Front side Ch20525 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, FDD_LTE (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): f = 836.5 MHz; σ = 0.91 S/m; ε_r = 41.612; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(10.12, 10.12, 10.12); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.704 W/kg

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 26.14 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.06 W/kg
SAR(1 g) = 0.549 W/kg; SAR(10 g) = 0.317 W/kg
Maximum value of SAR (measured) = 0.861 W/kg

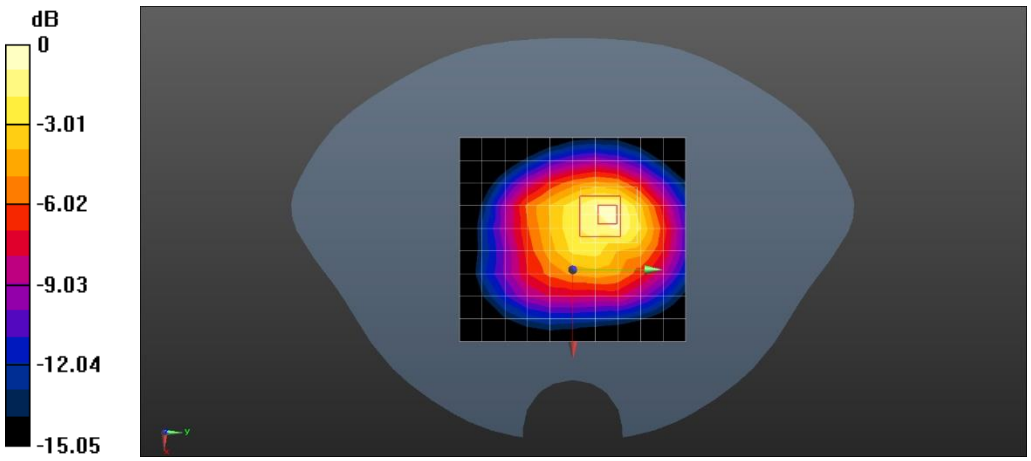

0 dB = 0.861 W/kg = -0.65 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 7 20M QPSK 1RB50 Bottom side Ch20850 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, FDD_LTE (0); Frequency: 2510 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2510 MHz; σ = 1.893 S/m; ε_r = 39.905; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.33, 7.33, 7.33); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 13.3 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 98.77 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 22.7 W/kg
SAR(1 g) = 9.86 W/kg; SAR(10 g) = 3.21 W/kg
Maximum value of SAR (measured) = 19.2 W/kg

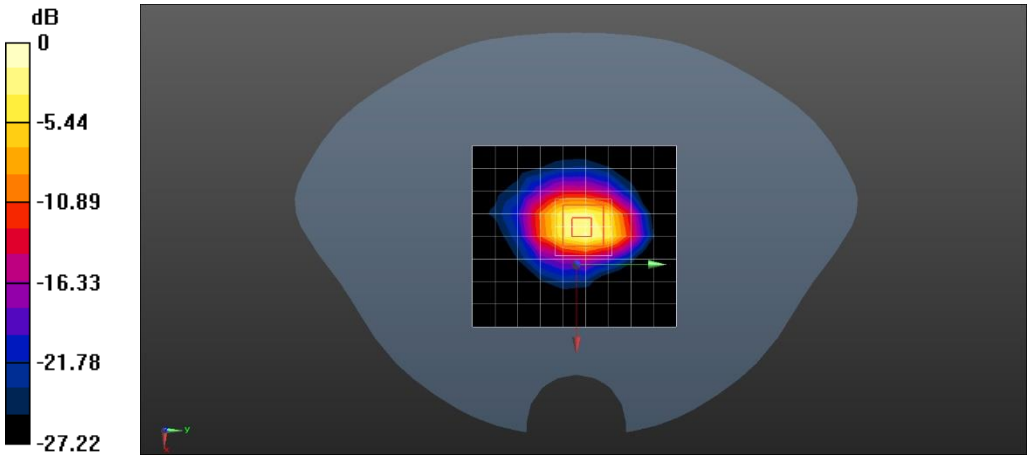

0 dB = 19.2 W/kg = 12.83 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Date: 2022/08/06

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 38 20M QPSK 1RB50 Bottom side Ch38150 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, TDD_LTE (0); Frequency: 2610 MHz;Duty Cycle: 1:1.57943
Medium parameters used: f = 2610 MHz; σ = 2.005 S/m; ε_r = 39.547; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.33, 7.33, 7.33); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 9.29 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 80.70 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 17.0 W/kg
SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.95 W/kg; Maximum value of SAR (measured) = 14.2 W/kg

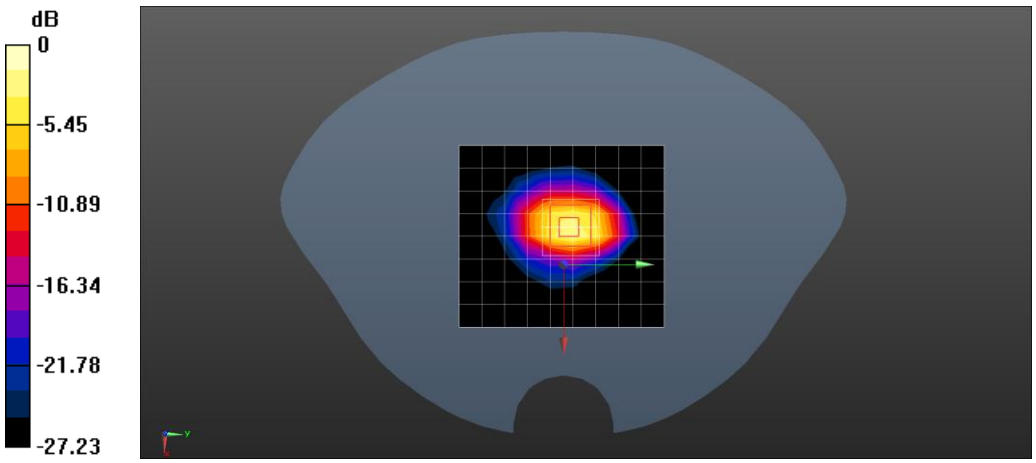

0 dB = 14.2 W/kg = 11.52 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 40 a 10M QPSK 1RB25 Bottom side Ch38750 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, TDD_LTE (0); Frequency: 2310 MHz;Duty Cycle: 1:1.57943
Medium parameters used: f = 2310 MHz; σ = 1.671 S/m; ε_r = 40.487; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.86, 7.86, 7.86); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 6.96 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 76.84 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 12.2 W/kg
SAR(1 g) = 6.47 W/kg; SAR(10 g) = 2.76 W/kg
Maximum value of SAR (measured) = 10.2 W/kg

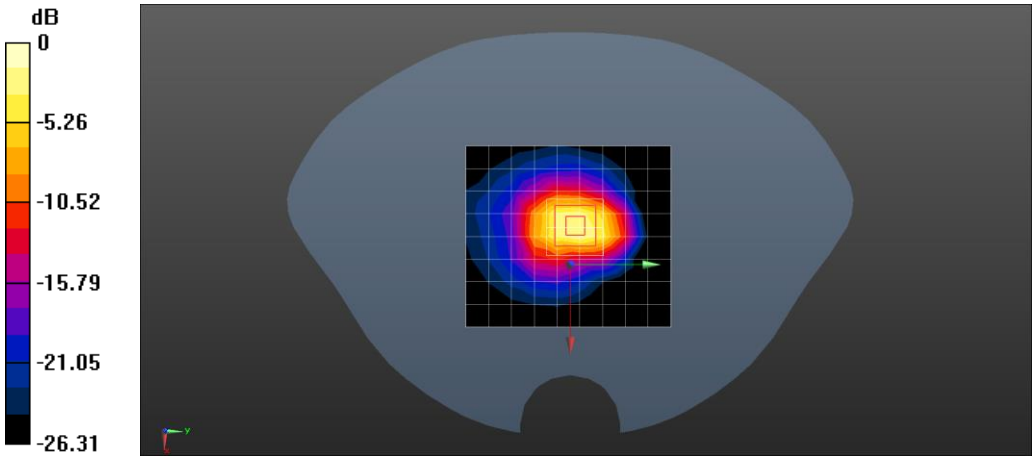

0 dB = 10.2 W/kg = 10.09 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 40 10M QPSK 1RB25 Bottom side Ch39200 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, TDD_LTE (0); Frequency: 2355 MHz;Duty Cycle: 1:1.57943
Medium parameters used: f = 2355 MHz; σ = 1.712 S/m; ε_r = 40.311; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.86, 7.86, 7.86); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 7.24 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 77.42 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 5.83 W/kg; SAR(10 g) = 2.49 W/kg
Maximum value of SAR (measured) = 10.6 W/kg

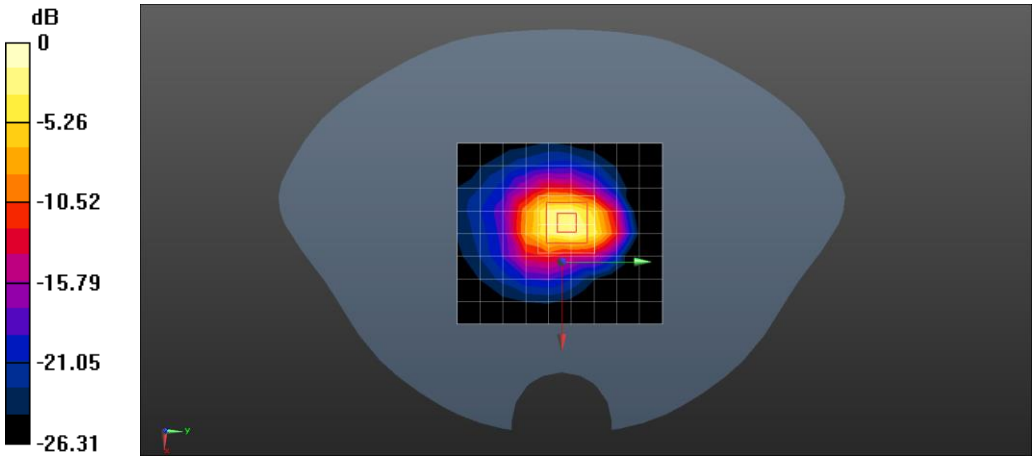

0 dB = 10.6 W/kg = 10.25 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

LTE Band 41 20M QPSK 1RB50 Bottom side Ch39750 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, TDD_LTE (0); Frequency: 2506 MHz;Duty Cycle: 1:1.57943
Medium parameters used: f = 2506 MHz; σ = 1.888 S/m; ε_r = 39.911; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.33, 7.33, 7.33); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 8.81 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 85.19 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 15.5 W/kg
SAR(1 g) = 8.25 W/kg; SAR(10 g) = 3.22 W/kg
Maximum value of SAR (measured) = 13.1 W/kg

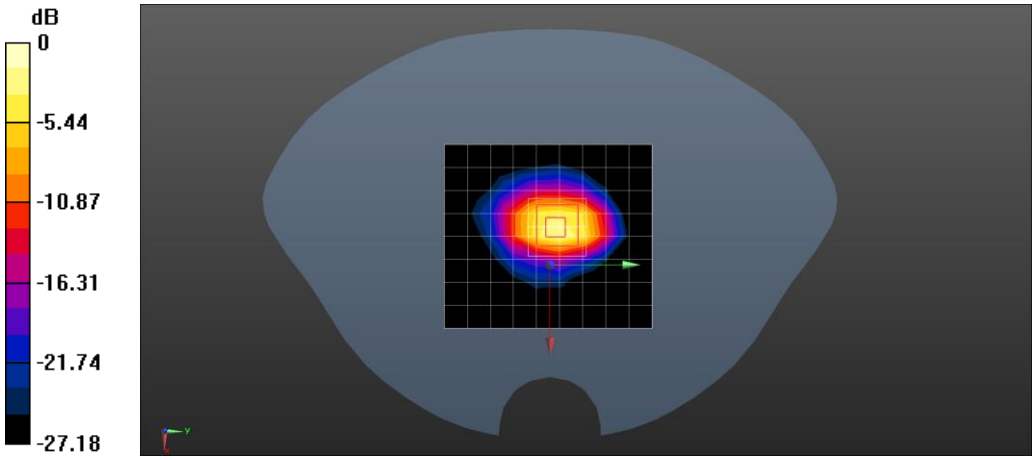

0 dB = 13.1 W/kg = 11.17 dBW/kg

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

WLAN2.4Ghz 802.11b Front side Ch6 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, WiFi (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2437 MHz; σ = 1.806 S/m; ε_r = 40.128; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.63, 7.63, 7.63); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.53 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 28.05 V/m; Power Drift = 0.1 dB
Peak SAR (extrapolated) = 2.00 W/kg
SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.198 W/kg

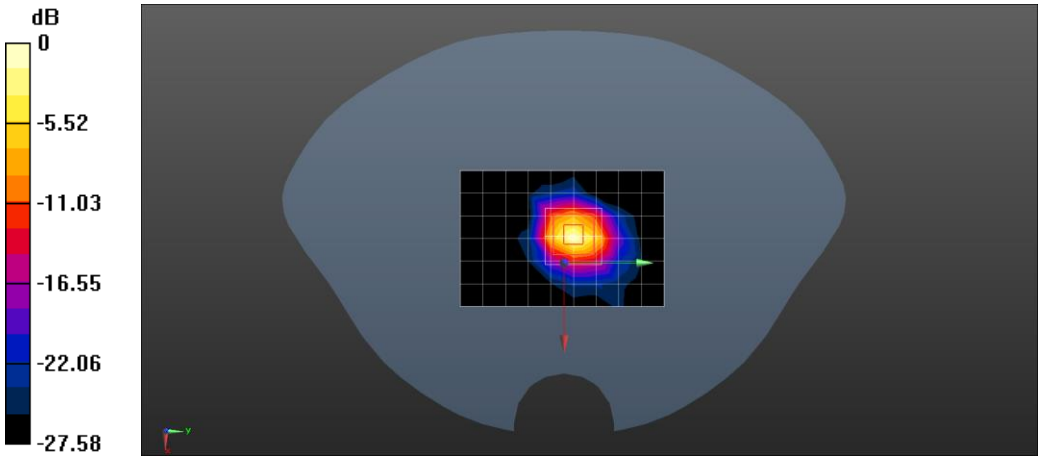

0 dB = 1.53 W/kg = 1.85 dBW/kg

Test Laboratory: Compliance Certification Services (Kunshan) Inc.

Bluetooth GFSK Front side Ch39 0mm

DUT: Body Camera; Type: DS-MCW407/32G/GLE(D)

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz;Duty Cycle: 1:1
Medium parameters used: f = 2441 MHz; σ = 1.806 S/m; ε_r = 40.118; ρ = 1000 kg/m^3
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7346; ConvF(7.63, 7.63, 7.63); Calibrated: 2022/03/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2022/05/30
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Head/Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.959 W/kg
Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 18.64 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.903 W/kg
SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.106 W/kg
Maximum value of SAR (measured) = 0.681 W/kg

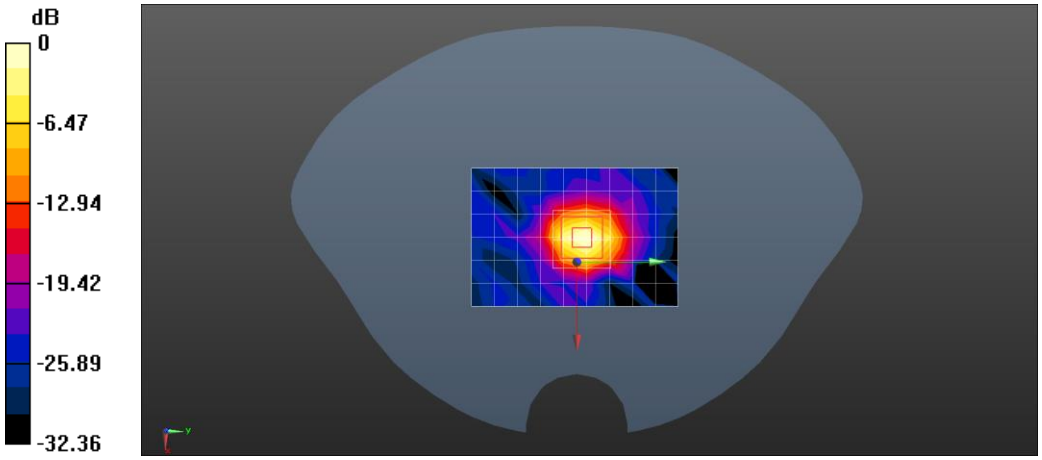

0 dB = 0.681 W/kg = -1.67 dBW/kg

Appendix C: Calibration certificate

Appendix D: Photographs

---END---

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com