

ENGLISH (Diagram references)

(Diagram references)

- ## Technical Specification

[illegible]

The batteries supplied have been chosen to provide long service life whilst, for safety reasons, having limited output current.

The battery leads must be connected for operation. When disposing of the product, the battery must be removed and disposed of separately in accordance with the local regulations.

COPYRIGHT
ALL RIGHTS
Any and all
Hangzhou
This user n
distributed
prior writt
guaranteee

COPYRIGHT ©2018 Hangzhou Hikvision Digital Technology Co., Ltd.

ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou Hikvision Digital Technology Co., Ltd. or its subsidiaries (hereinafter referred to be "Hikvision"). This user manual (hereinafter referred to be "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise stipulated, Hikvision does not make any warranties guarantees or representations, express or implied, regarding to the Manual.

About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the company website.

Please use this user manual under the guidance of professionals.



Trademarks Acknowledgement

Hikvision and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.

-
- 1 2 x 3.0V Lithium 4700mAh
- 3
- 5
- 12 13 14
- TAMPER
- LEDs ON
- Buzzer ON
- Top PIR HIGH
- Bottom PIR HIGH
- LEDs ON
- Buzzer ON
- Sensitivita' PIR Superiore: Alta
- Sensitivita' PIR Inferiore: Alta
- W = XD-WALLBRACKET
- F = XD-FIXEDBRACKET
- TAMPER

- 3
- 
- Max: 15m
- 
- Approx: 10m
- 
- OFF

- 4**

Diagram 4 illustrates four scenarios for the 'NO' button, showing the button state (1-4) and the sensor type (Red LED, White PIR, or White Motion).

 - Scenario 1:** Red LED sensor, button state 1, person walking, sensor beam hits person. (Label: HIGH)
 - Scenario 2:** Red LED sensor, button state 2, person walking, sensor beam hits person. (Label: LOW)
 - Scenario 3:** White PIR sensor, button state 3, person walking, sensor beam hits person. (Label: HIGH)
 - Scenario 4:** White PIR sensor, button state 4, person walking, sensor beam hits person. (Label: LOW)



XDH10TT1-WE

 Pink
 Blue
 Red

XDH10TT3-WE (UK ONLY)

White
Green
Red

- 2**

TOP PIR ALARM MICROWAVE

BOTTOM PIR

Powering Up / Accensione

Low Battery / Batteria Bassa

Top PIR Activated / PIR Alto Attivato

Microwave Activated / Microonda Attivata

Bottom PIR Activated / PIR Basso Attivato

Alarm / Allarme

5

Please register the detector within 90 seconds after it being powered on.

Register Detector Locally



1. Make the security control panel enter the registration mode.
2. Register the detector: Hold the learnt key until the three LEDs flash alternately. The green LED will flash 7 times if the registration is finished.
3. Communication Test: Release the TAMPER spring to trigger the alarm.

Note: The distance between the security control panel and the detector should be less than 50 cm.

Unregister Detector

Delete the Detector from the Control Panel

1. Make the security control panel enter the unregistration mode.
2. Unregister the detector: Hold the registration key until the three LEDs flash alternately.


Initialize the Detector

1. Remove the battery to power the detector off.
2. 5s later, hold the registration key and reinstall the battery to power the detector on at the same time to make the three LEDs start flashing alternately. Release the registration key while the three LEDs flash once together.


Register Detector via APP

- 1 Log in to the **APP Store** and input "Hik-Connect" to search the mobile client.
- 2 Download and install Hik-Connect to your phone.
- 3 After installing, tap to run the client.
- 4 Power on the security control panel.
- 5 Log in the Hik-Connect and tap the icon "+" at the upper-right corner of the Hik-Connect page to add the security control panel. You can scan the QR code on the device rear panel or on the package box, or input the device serial No. manually to add the device when the device is in the registration mode.
- 6 After adding the security control panel, tap the arming status icon on the right of the security control panel's name to enter the Partition page.
- 6 Tap the "+" icon on the Partition page to add the peripherals.


6

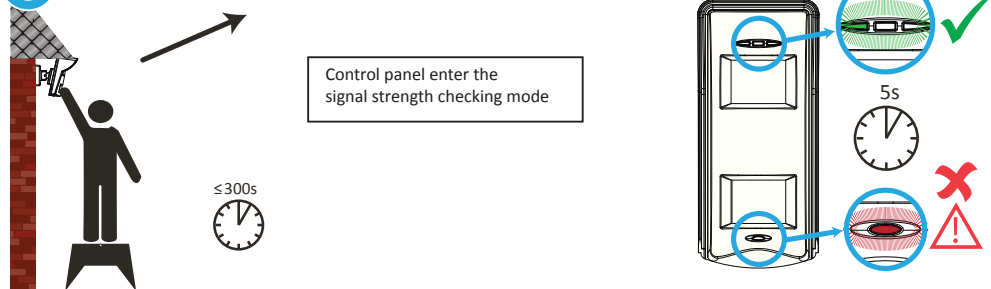


7

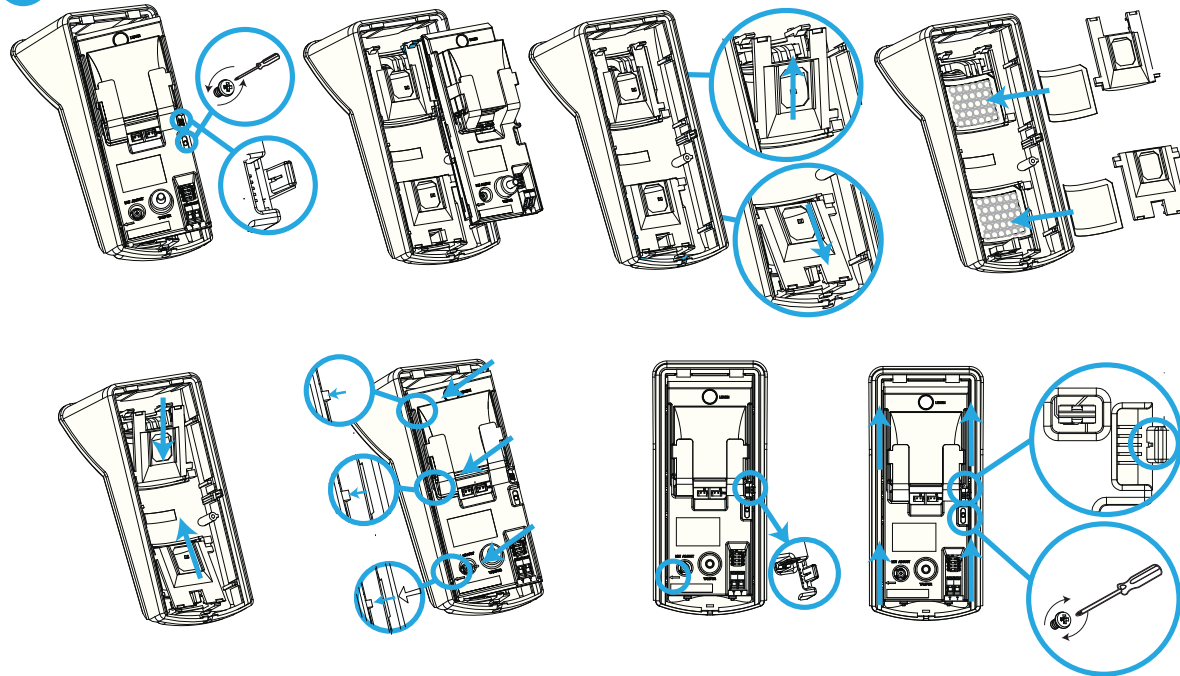


8

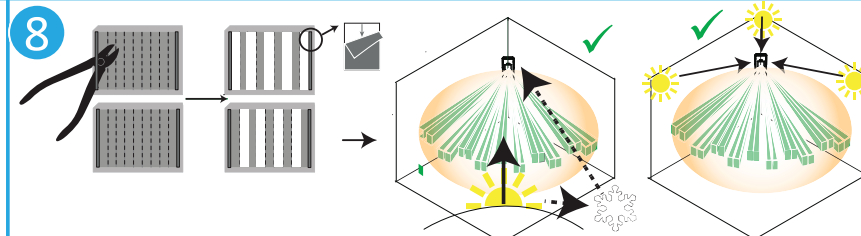


9

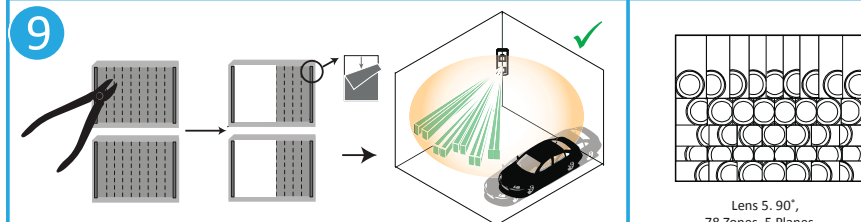


10

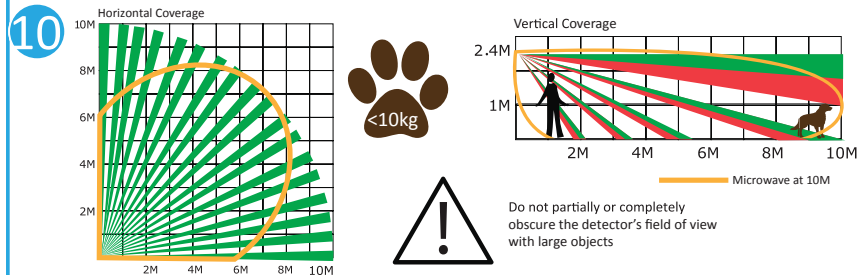


11 WALLBRACKET + ADAPTER

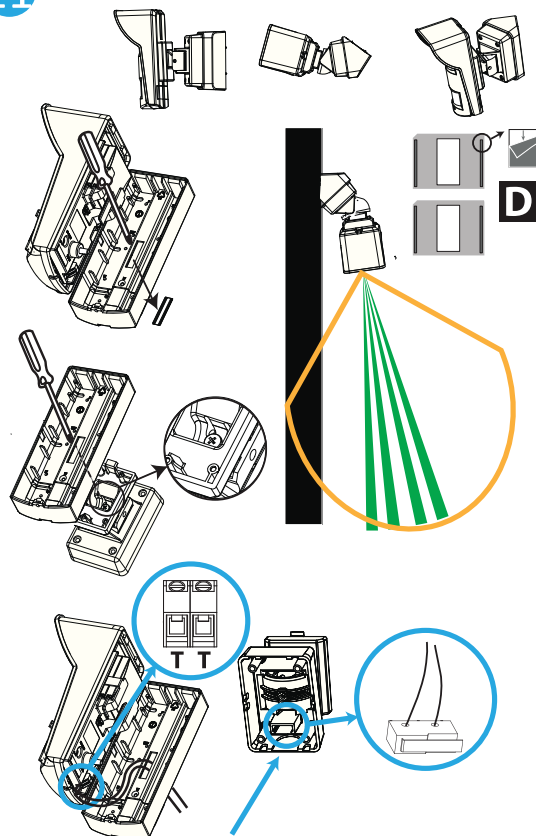


12 WALLBRACKET

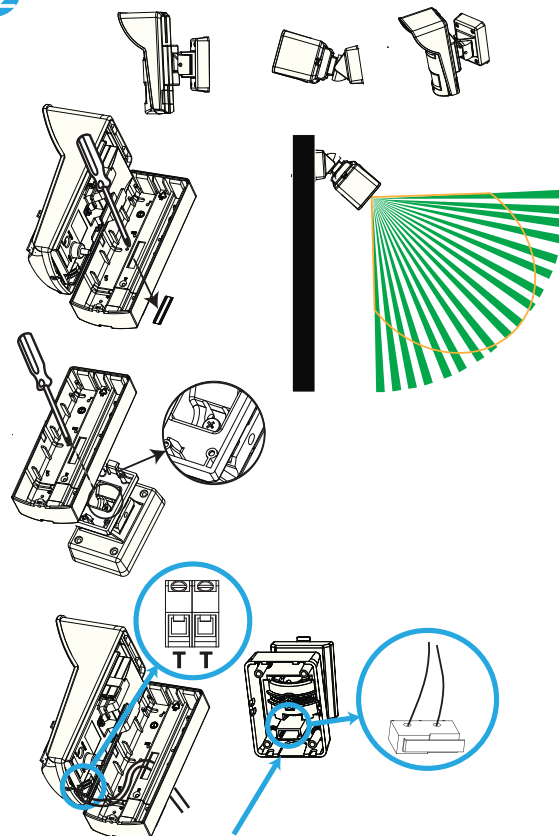

13 FIXEDBRACKET

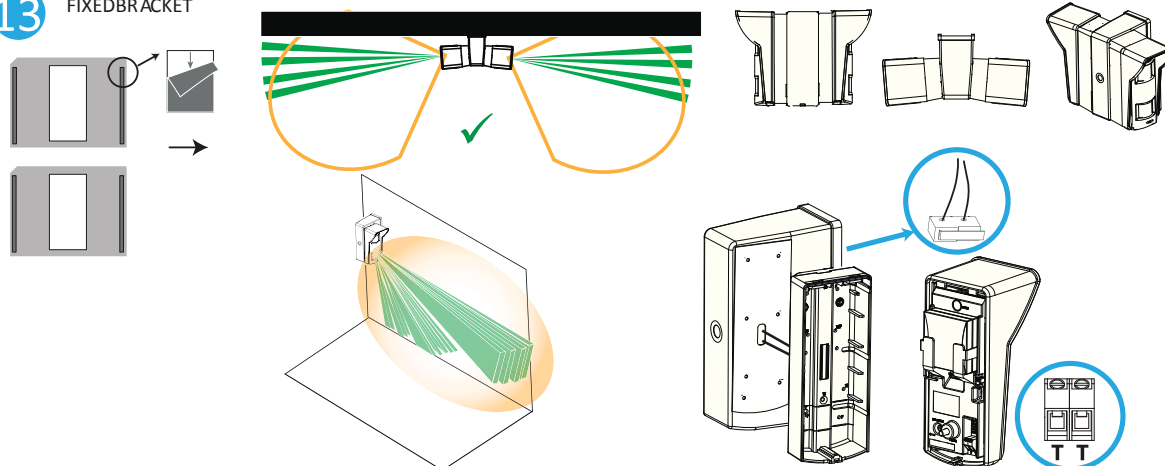

14

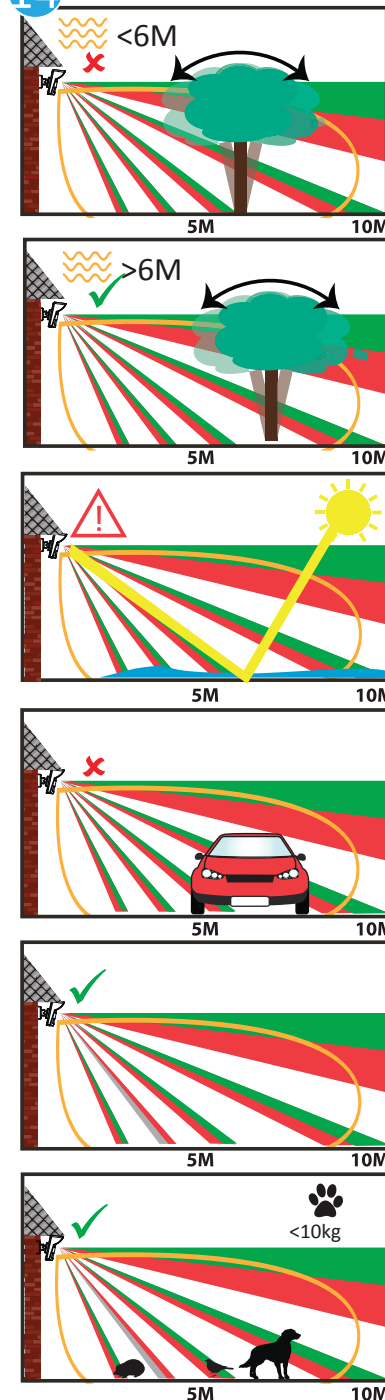

FCC Information

Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. FCC compliance: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.