



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM171101187102
Page: 1 of 43

TEST REPORT

Application No.: SZEM1711011871CR (SHEM1707004543CR)
Applicant: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Applicant: No.555 Qianmo Road, Binjiang District, Hangzhou 310052, China
Manufacturer: Hangzhou Hikvision Digital Technology Co., Ltd.
Address of Manufacturer: No. 555, Qianmo Road, Binjiang District, Hangzhou City, Zhejiang Province, China
Factory: 1.Hangzhou Hikvision Technology Co., Ltd.
2.Hangzhou Hikvision Electronics Co., Ltd.
Address of Factory: 1.No.700 Dongliu Road, Binjiang District, Hangzhou City, Zhejiang , China
2.No.299, Qiushi Road, Tonglu Economic Development Zone,Tonglu County, Hangzhou, Zhejiang , China
FCC ID: 2ADTD-MH2211
Equipment Under Test (EUT):
EUT Name: Body Camera
Model No.: DS-MH2211
Trade mark: HIKVISION
Standards: 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2017-07-13
Date of Test: 2017-10-23 to 2017-11-09
Date of Issue: 2017-11-20

| | |
|----------------------|--------------|
| Test Result : | Pass* |
|----------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.





Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 00 | / | 2017-11-17 | / | Original |
| | | | | |
| | | | | |

| | | | |
|--------------------------|---|------------|------|
| Authorized for issue by: | | | |
| Tested By |  Foray Chen /Project Engineer | 2017-11-17 | Date |
| Checked By |  Eric Fu /Reviewer | 2017-11-17 | Date |

2 Test Summary

| Test Item | FCC Requirement | Test method | Result |
|--|---|--|--------|
| Antenna Requirement | FCC Part 15, Subpart C Section 15.203/15.247 (c) | --- | PASS |
| AC Power Line Conducted Emission | FCC Part 15, Subpart C Section 15.207 | ANSI C63.10 (2013) Section 6.2 | PASS |
| Minimum 6dB Bandwidth | FCC Part 15, Subpart C Section 15.247 (a)(2) | ANSI C63.10 (2013) Section 11.8.1 | PASS |
| Conducted Average Output Power | FCC Part 15, Subpart C Section 15.247 (b)(3) | ANSI C63.10 (2013) Section 11.9.2.2 | PASS |
| Average Power Spectrum Density | FCC Part 15, Subpart C Section 15.247 (e) | ANSI C63.10 (2013) Section 11.10.3 | PASS |
| RF Conducted Spurious Emissions and Band-edge | FCC Part 15, Subpart C Section 15.247(d) | ANSI C63.10 (2013) Section 11.11&11.13.3.2 | PASS |
| Radiated Spurious Emissions and Band-edge | FCC Part 15, Subpart C Section 15.209&15.205 | ANSI C63.10 (2013) Section 6.4&6.5&6.6&6.10 | PASS |

3 Contents

| | Page |
|--|-----------|
| 1 COVER PAGE | 1 |
| 2 TEST SUMMARY | 3 |
| 3 CONTENTS | 4 |
| 4 GENERAL INFORMATION..... | 6 |
| 4.1 DETAILS OF E.U.T. | 6 |
| 4.2 TECHNICAL SPECIFICATIONS | 6 |
| 4.3 DESCRIPTION OF SUPPORT UNITS..... | 6 |
| 4.4 MEASUREMENT UNCERTAINTY..... | 6 |
| 4.5 TEST LOCATION | 7 |
| 4.6 TEST FACILITY | 7 |
| 4.7 DEVIATION FROM STANDARDS..... | 7 |
| 4.8 ABNORMALITIES FROM STANDARD CONDITIONS | 7 |
| 5 EQUIPMENT LIST..... | 8 |
| 6 RADIO SPECTRUM TECHNICAL REQUIREMENT..... | 9 |
| 6.1 ANTENNA REQUIREMENT | 9 |
| 6.1.1 Test Requirement: | 9 |
| 6.1.2 Conclusion | 9 |
| 7 RADIO SPECTRUM MATTER TEST RESULTS | 10 |
| 7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz) | 10 |
| 7.1.1 E.U.T. Operation..... | 10 |
| 7.1.2 Test Setup Diagram..... | 10 |
| 7.1.3 Measurement Data | 11 |
| 7.2 MINIMUM 6dB BANDWIDTH | 14 |
| 7.2.1 E.U.T. Operation..... | 14 |
| 7.2.2 Test Setup Diagram..... | 14 |
| 7.2.3 Measurement Data | 14 |
| 7.3 CONDUCTED AVERAGE OUTPUT POWER..... | 15 |
| 7.3.1 E.U.T. Operation..... | 15 |
| 7.3.2 Test Setup Diagram..... | 15 |
| 7.3.3 Measurement Data | 15 |
| 7.4 POWER SPECTRUM DENSITY | 16 |
| 7.4.1 E.U.T. Operation..... | 16 |
| 7.4.2 Test Setup Diagram..... | 16 |
| 7.4.3 Measurement Data | 16 |
| 7.5 CONDUCTED BAND EDGES MEASUREMENT..... | 17 |
| 7.5.1 E.U.T. Operation..... | 18 |
| 7.5.2 Test Setup Diagram..... | 18 |
| 7.5.3 Measurement Data | 18 |
| 7.6 CONDUCTED SPURIOUS EMISSIONS..... | 19 |
| 7.6.1 E.U.T. Operation..... | 20 |
| 7.6.2 Test Setup Diagram..... | 20 |
| 7.6.3 Measurement Data | 20 |
| 7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS..... | 21 |
| 7.7.1 E.U.T. Operation..... | 22 |

| | | |
|-------|-----------------------------------|----|
| 7.7.2 | Test Setup Diagram..... | 22 |
| 7.7.3 | Measurement Data | 23 |
| 7.8 | RADIATED SPURIOUS EMISSIONS | 35 |
| 7.8.1 | E.U.T. Operation..... | 36 |
| 7.8.2 | Test Setup Diagram..... | 36 |
| 7.8.3 | Measurement Data | 37 |
| 8 | PHOTOGRAPHS..... | 43 |
| 9 | EUT CONSTRUCTIONAL DETAILS..... | 43 |

4 General Information

4.1 Details of E.U.T.

| | |
|------------------|--|
| Power supply: | Model: EE9-050200UE Input: AC200-240V 50/60Hz, 0.3A Output: DC 5.0V 2.0A |
| Test voltage: | AC 230V/50Hz |
| Cable: | USB Cable: 100cm |
| Internal source: | 816MHz |

4.2 Technical Specifications

| | |
|----------------------|---|
| Operation Frequency: | 802.11 b/g/n(HT20): 2412MHz-2462MHz |
| Modulation Type: | 02.11 b DSSS(CCK, DQPSK, DBPSK) 802.11 g/n(HT20)/ OFDM(64QAM, 16QAM, QPSK, BPSK) |
| Number of Channel: | 802.11 b/g/n(HT20): 11 |
| Data Rate: | 802.11b: 1/2/5.5/11Mbps, 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: MCS0-7 |
| Antenna Type | PCB Antenna |
| Antenna Gain | -1.0 dBi |

4.3 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-------------|--------------|-----------|------------|
| Laptop 1 | LENOVO | R400 | -- |

4.4 Measurement Uncertainty

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.25 x 10 ⁻⁸ |
| 2 | Timeout | 2s |
| 3 | Duty cycle | 0.37% |
| 4 | Occupied Bandwidth | 3% |
| 5 | RF conducted power | 0.75dB |
| 6 | RF power density | 2.84dB |
| 7 | Conducted Spurious emissions | 0.75dB |
| 8 | RF Radiated power | 4.5dB (below 1GHz) |
| | | 4.8dB (above 1GHz) |
| 9 | Radiated Spurious emission test | 4.5dB (30MHz-1GHz) |
| | | 4.8dB (1GHz-18GHz) |
| 10 | Temperature test | 1°C |
| 11 | Humidity test | 3% |
| 12 | Supply voltages | 1.5% |
| 13 | Time | 3% |

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
|--|--------------|--------------------|--------------|------------|--------------|
| Conducted Emission at AC Power Line | | | | | |
| EMI test receiver | R&S | ESR7 | SHEM162-1 | 2016-12-29 | 2017-12-28 |
| LISN | Schwarzbeck | NSLK8127 | SHEM061-1 | 2016-12-29 | 2017-12-28 |
| LISN | EMCO | 3816/2 | SHEM019-1 | 2016-12-29 | 2017-12-28 |
| Pulse limiter | R&S | ESH3-Z2 | SHEM029-1 | 2017-08-12 | 2018-08-11 |
| CE test Cable | / | CE01 | / | 2016-12-29 | 2017-12-28 |
| Conducted Test | | | | | |
| Spectrum Analyzer | R&S | FSP-30 | SHEM002-1 | 2017-04-24 | 2018-04-23 |
| Spectrum Analyzer | Agilent | N9020A | SHEM181-1 | 2017-07-03 | 2018-07-02 |
| Power meter | R&S | NRP | SHEM057-1 | 2016-12-29 | 2017-12-28 |
| Power Sensor | R&S | NRP-Z22 | SHEM136-1 | 2017-07-22 | 2018-07-21 |
| Power Sensor | R&S | NRP-Z91 | SHEM057-2 | 2016-12-29 | 2017-12-28 |
| Signal Generator | R&S | SMR40 | SHEM058-1 | 2017-07-03 | 2018-07-02 |
| Signal Generator | Agilent | N5182A | SHEM182-1 | 2017-07-03 | 2018-07-02 |
| Communication Tester | R&S | CMW500 | SHEM183-1 | 2017-07-03 | 2018-07-02 |
| Switcher | Tonscend | JS0806 | SHEM184-1 | / | / |
| Splitter | Anritsu | MA1612A | SHEM185-1 | / | / |
| Coupler | e-meca | 803-S-1 | SHEM186-1 | / | / |
| High-low Temp Cabinet | Suzhou Zhihe | TL-40 | SHEM087-1 | 2017-09-13 | 2018-09-12 |
| AC Power Stabilizer | WOCEN | 6100 | SHEM045-1 | 2017-01-14 | 2018-01-13 |
| DC Power Supply | QJE | QJ30003SII | SHEM046-1 | 2017-01-14 | 2018-01-13 |
| Radiated Test | | | | | |
| EMI test receiver | R&S | ESU40 | SHEM051-1 | 2017-09-26 | 2018-09-25 |
| Spectrum Analyzer | R&S | FSP-30 | SHEM002-1 | 2017-04-24 | 2018-04-23 |
| Loop Antenna (9kHz-30MHz) | Schwarzbeck | FMZB1519 | SHEM135-1 | 2017-04-10 | 2018-04-09 |
| Antenna (25MHz-2GHz) | Schwarzbeck | VULB9168 | SHEM048-1 | 2017-02-28 | 2018-02-27 |
| Antenna (25MHz-3GHz) | Schwarzbeck | HL562 | SHEM010-1 | 2017-02-28 | 2018-02-27 |
| Horn Antenna (1-8GHz) | Schwarzbeck | HF906 | SHEM009-1 | 2016-09-24 | 2018-09-23 |
| Horn Antenna (1-18GHz) | Schwarzbeck | BBHA9120D | SHEM050-1 | 2017-01-14 | 2018-01-13 |
| Horn Antenna (14-40GHz) | Schwarzbeck | BBHA 9170 | SHEM049-1 | 2017-02-13 | 2018-01-15 |
| Pre-amplifier (9KHz-2GHz) | CLAVIIO | BDLNA-0001-412010 | SHEM164-1 | 2017-08-22 | 2018-08-21 |
| Pre-amplifier (1-26.5GHz) | CLAVIIO | BDLNA-0118-352810 | SHEM050-2 | 2017-08-22 | 2018-08-21 |
| Band filter | LORCH | 9BRX-875/X150-SR | SHEM156-1 | / | / |
| Band filter | LORCH | 13BRX-1950/X500-SR | SHEM083-2 | / | / |
| Band filter | LORCH | 5BRX-2400/X200-SR | SHEM155-1 | / | / |
| Band filter | LORCH | 5BRX-5500/X1000-SR | SHEM157-2 | / | / |
| High pass Filter | Wainwright | WHK3.0/18G-100SS | SHEM157-1 | / | / |
| High pass Filter | Wainwright | WHKS1700-3SS | SHEM157-3 | / | / |
| Semi/Fully Anechoic | ST | 11*6*6M | SHEM078-2 | 2017-07-22 | 2018-07-21 |
| RE test Cable | / | RE01, RE02, RE06 | / | 2016-12-29 | 2017-12-28 |

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.1.2 Conclusion

Standard Requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -1.0dBi.

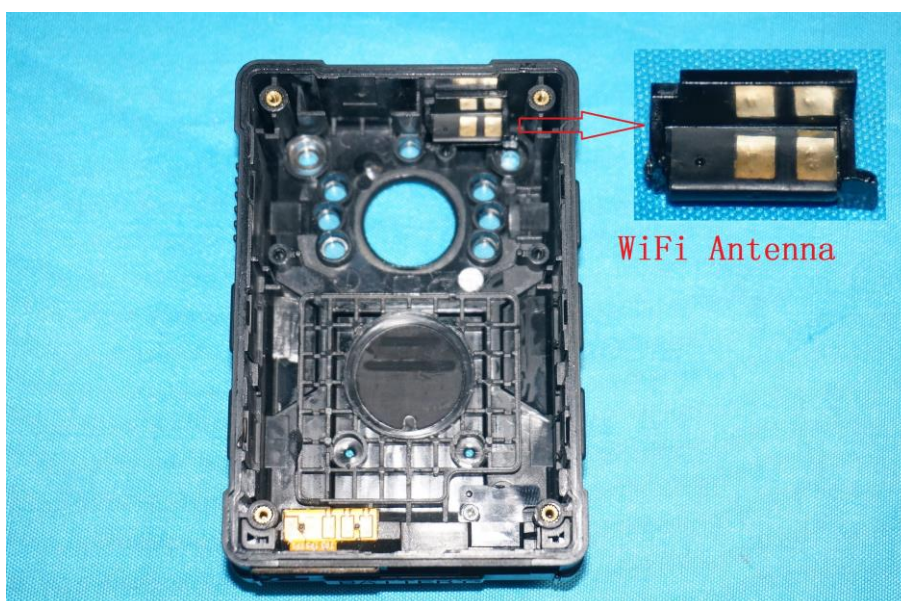

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) | |
|----------------------------|-----------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1002 mbar

b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

Pretest these mode to

find the worst case:


c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.

The worst case for

final test:

c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.


7.1.2 Test Setup Diagram

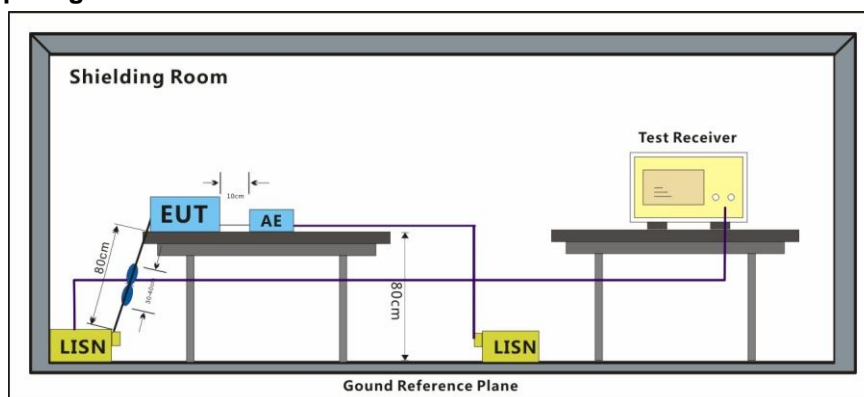

7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Mode:c; Line:Live Line

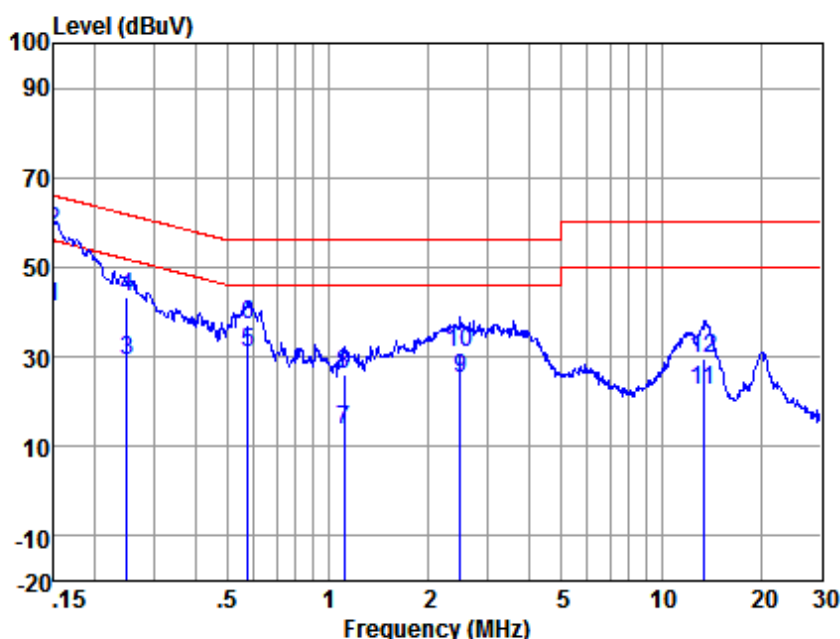

Site : chamber
Condition : LISN-L-2017
Project No: 4543CR
Test mode : c

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.150 | 31.23 | 0.11 | 9.81 | 41.15 | 56.00 | -14.85 | Average |
| 2 | 0.150 | 48.04 | 0.11 | 9.81 | 57.96 | 66.00 | -8.04 | QP |
| 3 | 0.249 | 19.12 | 0.11 | 9.81 | 29.04 | 51.78 | -22.74 | Average |
| 4 | 0.249 | 33.34 | 0.11 | 9.81 | 43.26 | 61.78 | -18.52 | QP |
| 5 | 0.576 | 20.86 | 0.11 | 9.82 | 30.79 | 46.00 | -15.21 | Average |
| 6 | 0.576 | 27.39 | 0.11 | 9.82 | 37.32 | 56.00 | -18.68 | QP |
| 7 | 1.117 | 3.66 | 0.11 | 9.84 | 13.61 | 46.00 | -32.39 | Average |
| 8 | 1.117 | 15.96 | 0.11 | 9.84 | 25.91 | 56.00 | -30.09 | QP |
| 9 | 2.500 | 15.13 | 0.12 | 9.85 | 25.10 | 46.00 | -20.90 | Average |
| 10 | 2.500 | 20.78 | 0.12 | 9.85 | 30.75 | 56.00 | -25.25 | QP |
| 11 | 13.408 | 12.47 | 0.13 | 9.97 | 22.57 | 50.00 | -27.43 | Average |
| 12 | 13.408 | 19.71 | 0.13 | 9.97 | 29.81 | 60.00 | -30.19 | QP |

Mode:c; Line:Neutral Line

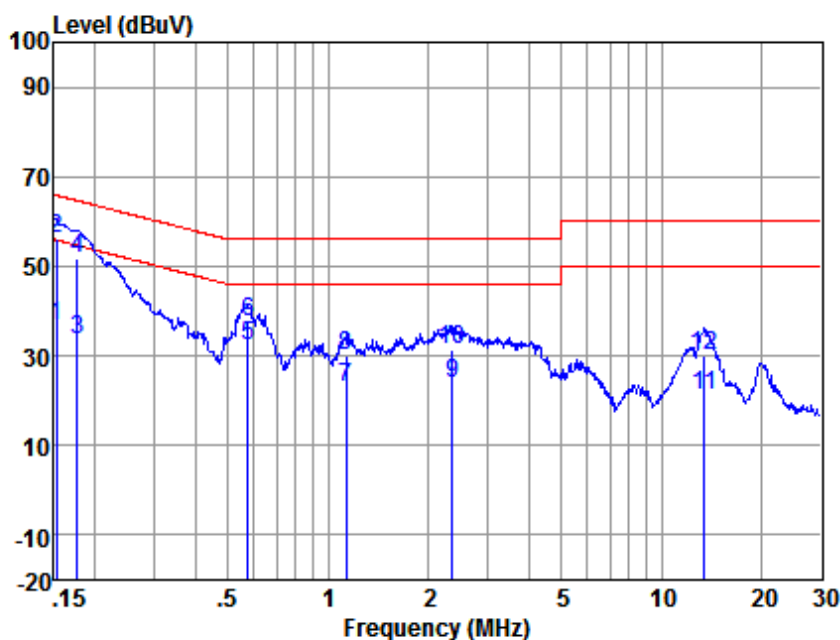

Site : chamber
Condition : LISN-N-2017
Project No: 4543CR
Test mode : c

| | Freq | Read Level | LISN Factor | Cable Loss | Level | Limit Line | Over Limit | Remark |
|----|--------|------------|-------------|------------|-------|------------|------------|---------|
| | MHz | dBuV | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.152 | 26.63 | 0.12 | 9.81 | 36.56 | 55.87 | -19.31 | Average |
| 2 | 0.152 | 46.28 | 0.12 | 9.81 | 56.21 | 65.87 | -9.66 | QP |
| 3 | 0.177 | 23.81 | 0.12 | 9.81 | 33.74 | 54.64 | -20.90 | Average |
| 4 | 0.177 | 41.82 | 0.12 | 9.81 | 51.75 | 64.64 | -12.89 | QP |
| 5 | 0.573 | 22.35 | 0.11 | 9.82 | 32.28 | 46.00 | -13.72 | Average |
| 6 | 0.573 | 27.82 | 0.11 | 9.82 | 37.75 | 56.00 | -18.25 | QP |
| 7 | 1.129 | 13.19 | 0.11 | 9.84 | 23.14 | 46.00 | -22.86 | Average |
| 8 | 1.129 | 20.09 | 0.11 | 9.84 | 30.04 | 56.00 | -25.96 | QP |
| 9 | 2.358 | 14.02 | 0.13 | 9.85 | 24.00 | 46.00 | -22.00 | Average |
| 10 | 2.358 | 21.53 | 0.13 | 9.85 | 31.51 | 56.00 | -24.49 | QP |
| 11 | 13.479 | 10.97 | 0.16 | 9.97 | 21.10 | 50.00 | -28.90 | Average |
| 12 | 13.479 | 19.77 | 0.16 | 9.97 | 29.90 | 60.00 | -30.10 | QP |


7.2 Minimum 6dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247
Test Method: ANSI C63.10 (2013) Section 11.8.1
Measurement Distance: 3m
Limit: ≥ 500 kHz

7.2.1 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar
Test mode b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

7.2.2 Test Setup Diagram

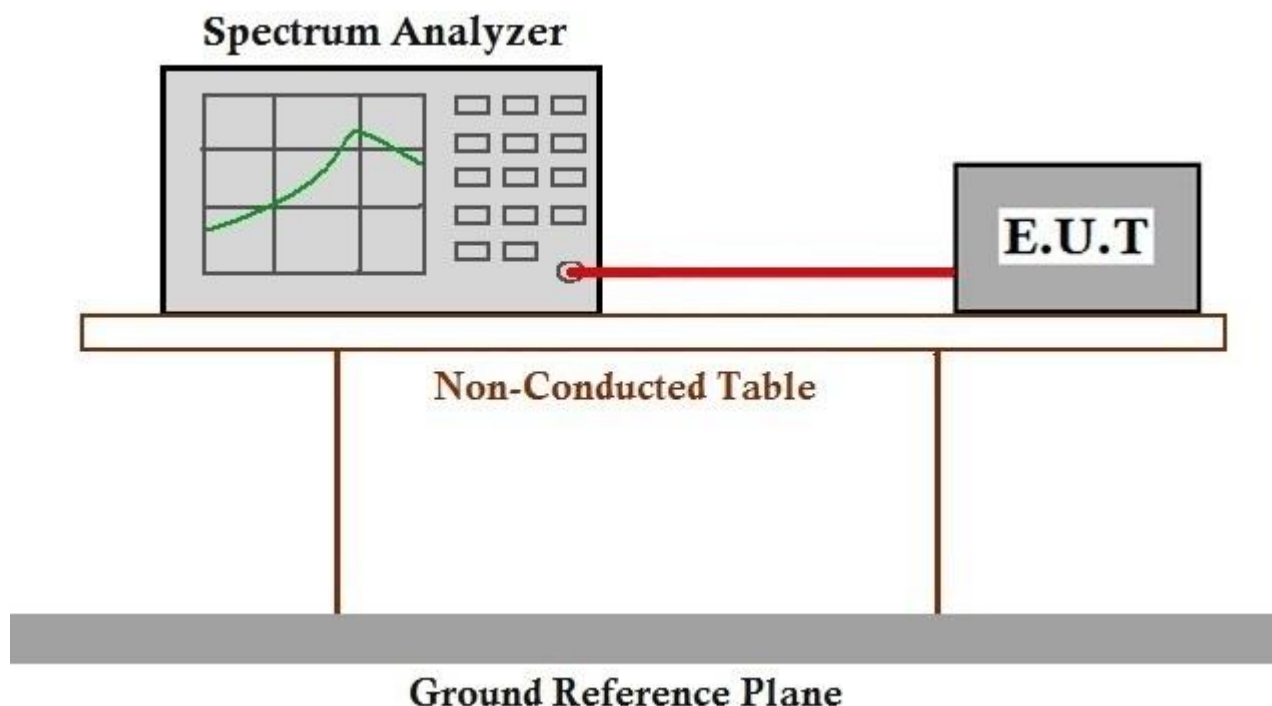

7.2.3 Measurement Data

The detailed test data see: Appendix 15.247

7.3 Conducted Average Output Power


Test Requirement: 47 CFR Part 15, Subpart C 15.247
Test Method: ANSI C63.10 (2013) Section 11.9.2
Measurement Distance: 3m
Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt) |
|----------------------|--|
| 902-928 | 1 for ≥ 50 hopping channels |
| | 0.25 for < 50 hopping channels |
| | 1 for digital modulation |
| 2400-2483.5 | 1 for ≥ 75 non-overlapping hopping channels |
| | 0.125 for all other frequency hopping systems |
| | 1 for digital modulation |
| 5725-5850 | 1 for frequency hopping systems and digital modulation |

7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar
Test mode b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

7.3.2 Test Setup Diagram

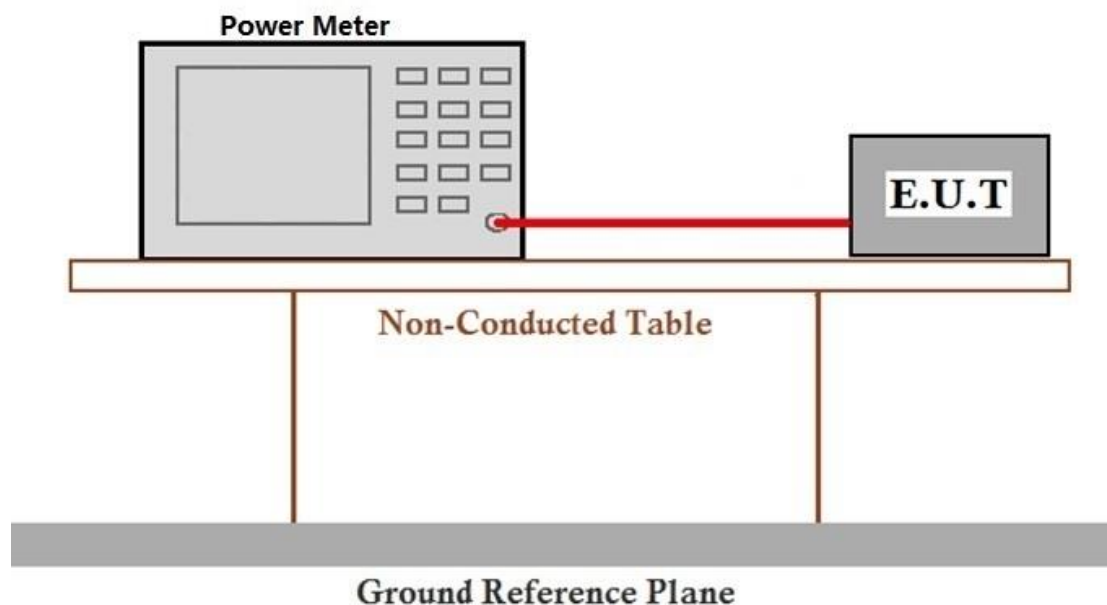

7.3.3 Measurement Data

The detailed test data see: Appendix 15.247


7.4 Average Power Spectrum Density

Test Requirement: 47 CFR Part 15, Subpart C 15.247
Test Method: ANSI C63.10 (2013) Section 11.10.3
Measurement Distance: 3m
Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar
Test mode b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

7.4.2 Test Setup Diagram

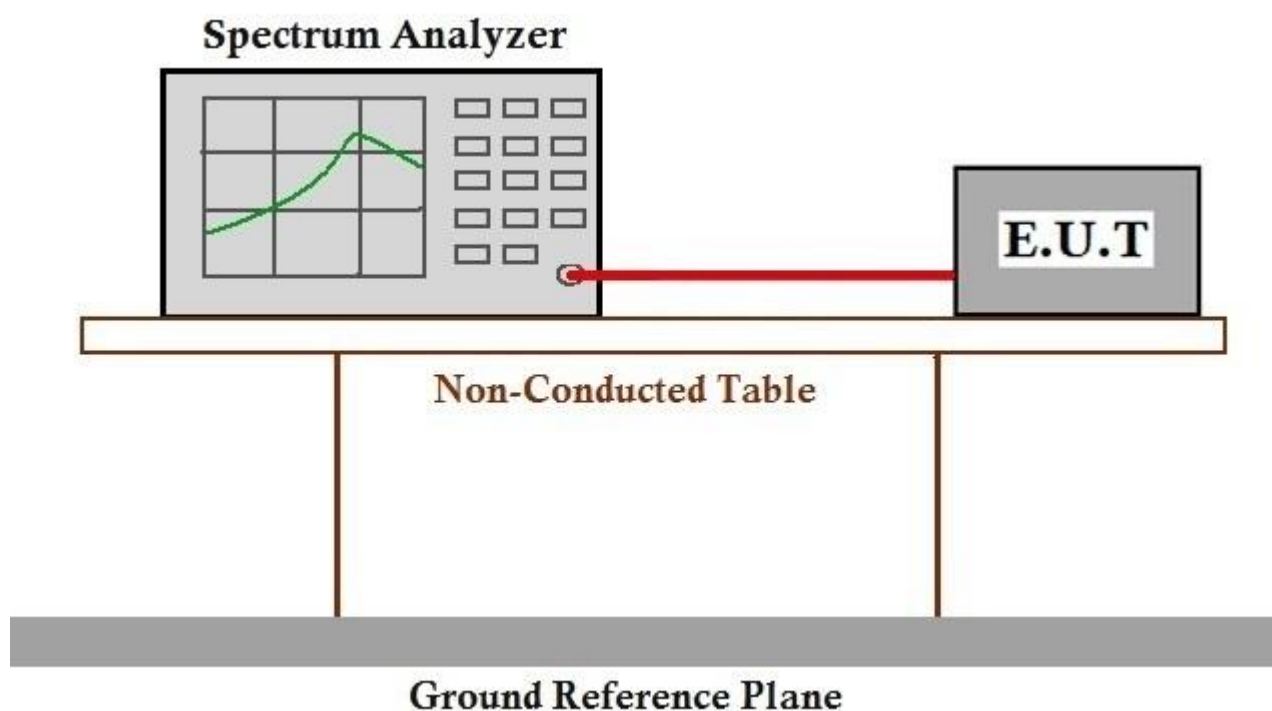

7.4.3 Measurement Data

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

| | |
|-----------------------|--|
| Test Requirement: | 47 CFR Part 15, Subpart C 15.247 |
| Test Method: | ANSI C63.10 (2013) Section 11.13.3.2 |
| Measurement Distance: | 3m |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmi |


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

7.5.2 Test Setup Diagram

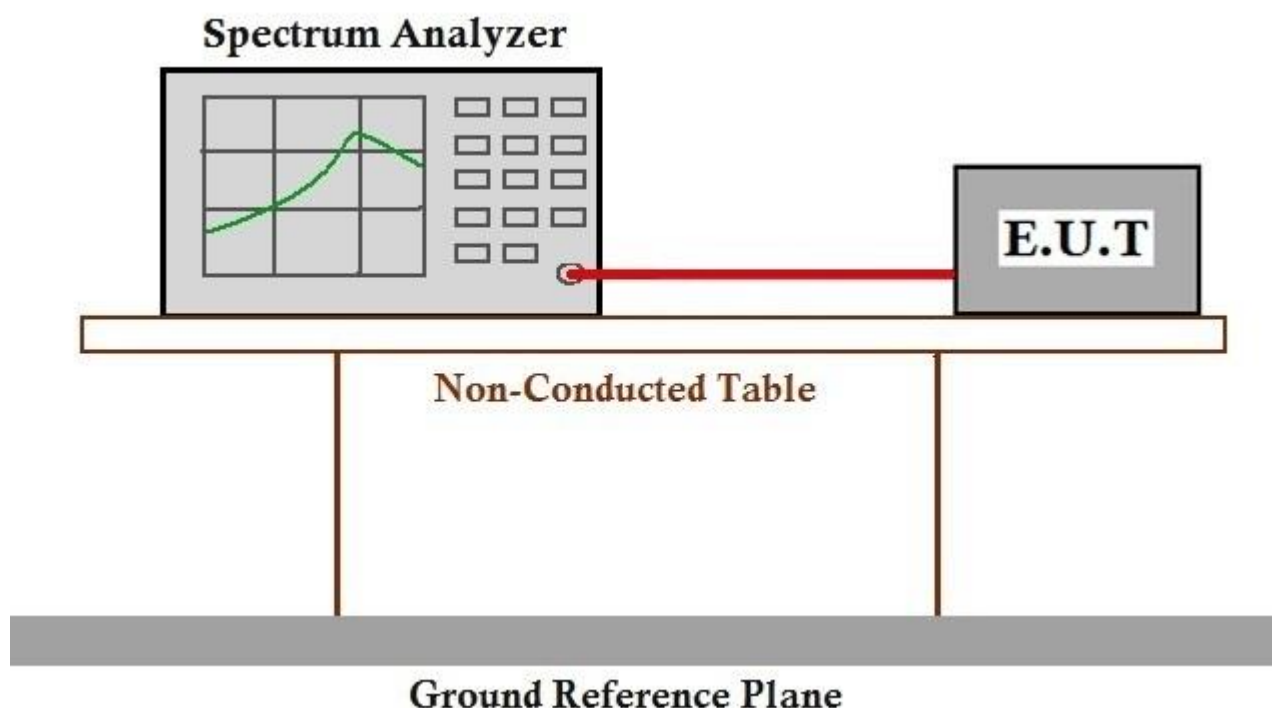

7.5.3 Measurement Data

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

| | |
|-----------------------|--|
| Test Requirement: | 47 CFR Part 15, Subpart C 15.247 |
| Test Method: | ANSI C63.10 (2013) Section 11.11 |
| Measurement Distance: | 3m |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmi |


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Test mode b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

7.6.2 Test Setup Diagram

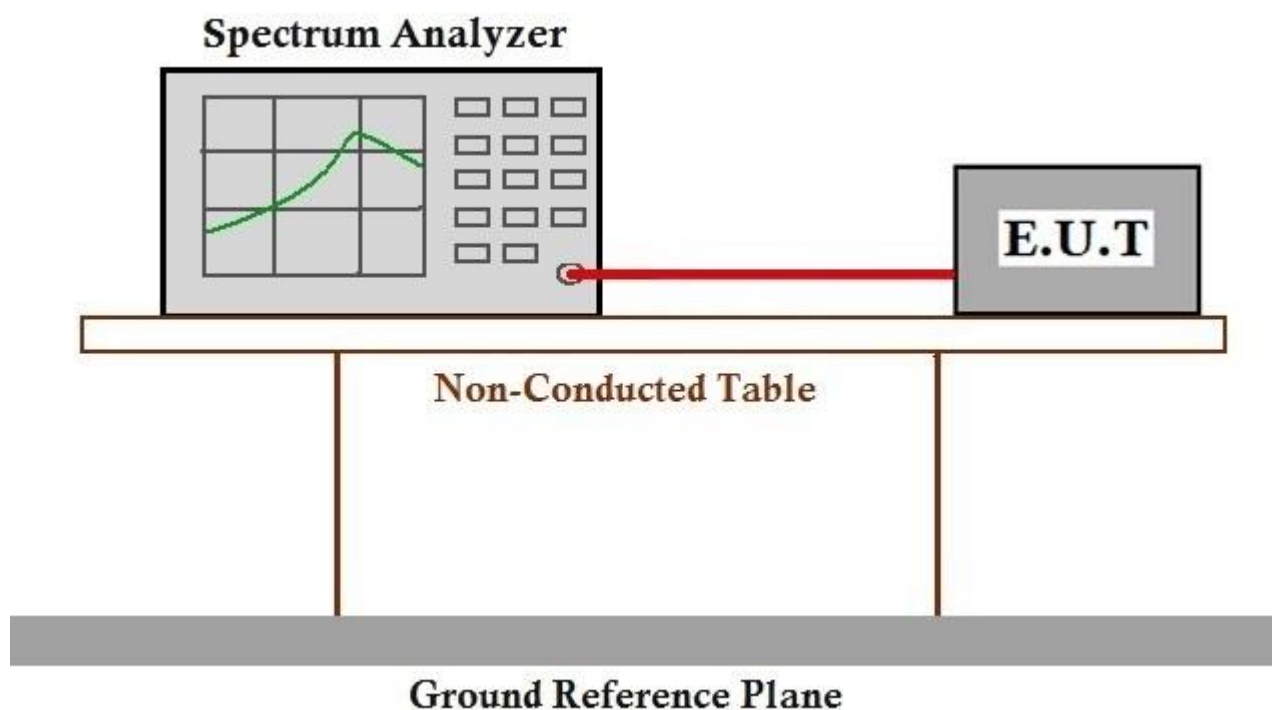

7.6.3 Measurement Data

The detailed test data see: Appendix 15.247

7.7 Radiated Emissions which fall in the restricted bands

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.7.1 E.U.T. Operation

Operating Environment:




Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

Pretest these mode to find the worst case: b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.

The worst case for final test: c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.

7.7.2 Test Setup Diagram

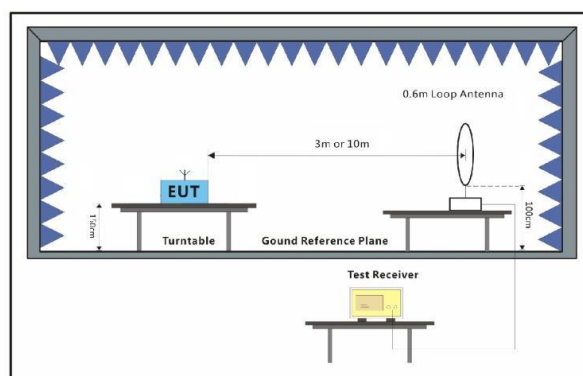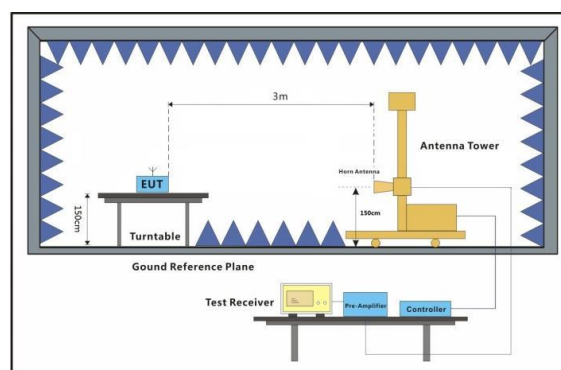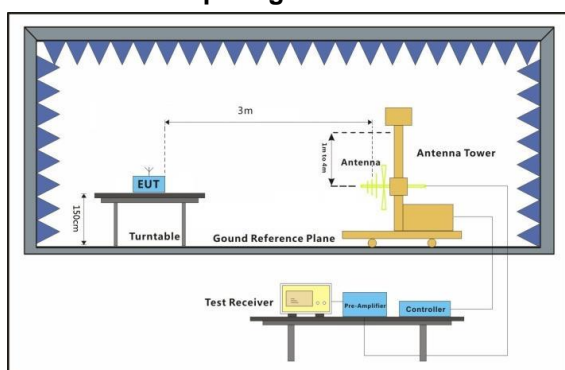



7.7.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Test Mode: 802.11b

Channel: 2412



| MK | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|----|--------------------|---------------------|-------------------------|--------------------|-------------------|--------------------|----------|--------------|
| 1 | 2383.2 | 55.06 | -3.87 | 51.19 | 54 | -2.81 | Peak | Horizontal |
| 2 | 2390 | 52.31 | -3.89 | 48.42 | 54 | -5.58 | Peak | Horizontal |
| 3 | 2412 | 109.15 | -3.93 | 105.22 | 54 | 51.22 | Peak | Horizontal |
| 1 | 2373.48 | 47.65 | -3.84 | 43.81 | 54 | -10.19 | Peak | Vertical |
| 2 | 2390 | 46.33 | -3.89 | 42.44 | 54 | -11.56 | Peak | Vertical |
| 3 | 2411.4 | 101.97 | -3.93 | 98.04 | 54 | 44.04 | Peak | Vertical |

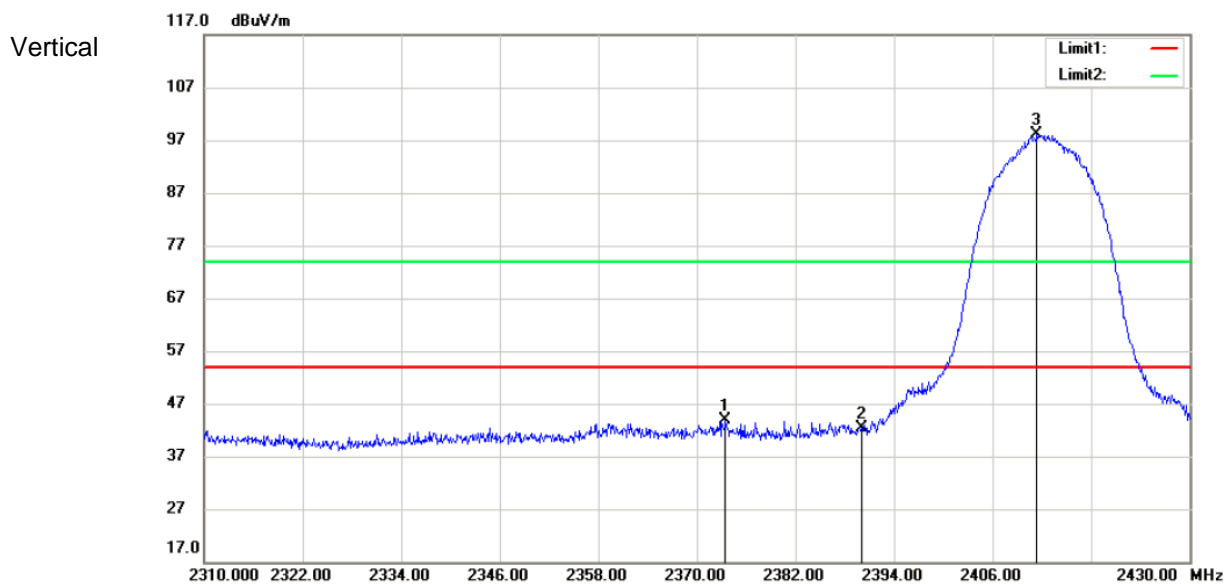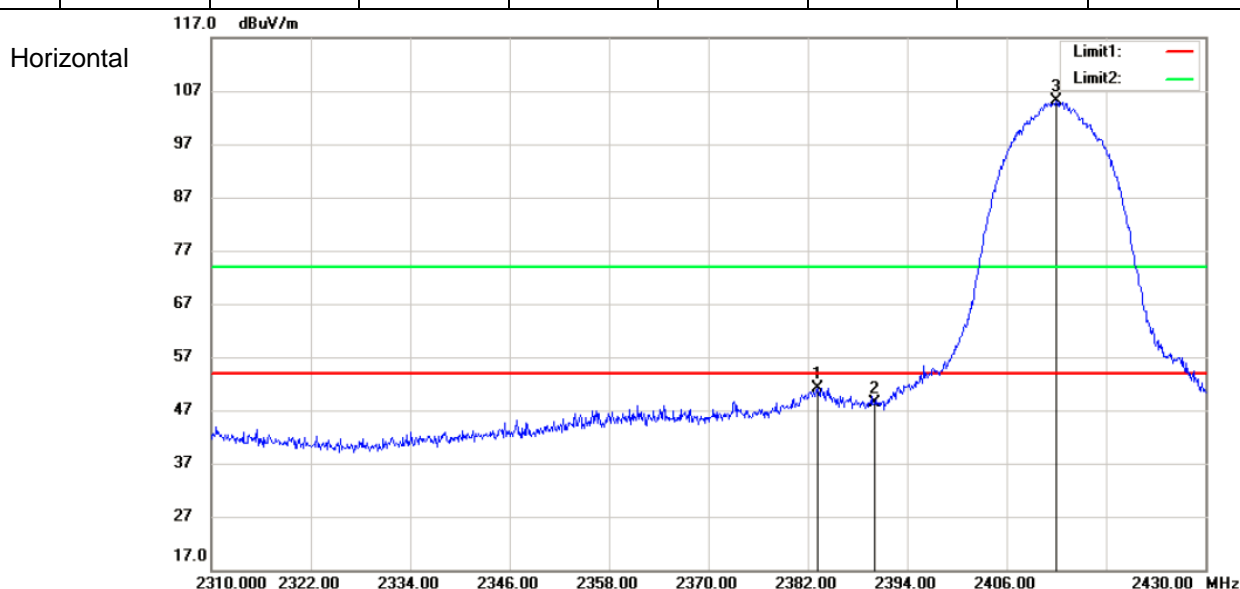

Test Mode: 802.11b

Channel: 2462



| MK | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2462.4 | 107.69 | -3.99 | 103.7 | 54 | 49.7 | Peak | Horizontal |
| 2 | 2483.5 | 50.16 | -4.01 | 46.15 | 54 | -7.85 | Peak | Horizontal |
| 3 | 2494.6 | 49.02 | -4.02 | 45 | 54 | -9 | Peak | Horizontal |
| 1 | 2462.2 | 102.24 | -3.99 | 98.25 | 54 | 44.25 | Peak | Vertical |
| 2 | 2483.5 | 46.7 | -4.01 | 42.69 | 54 | -11.31 | Peak | Vertical |
| 3 | 2499.9 | 47.52 | -4.03 | 43.49 | 54 | -10.51 | Peak | Vertical |

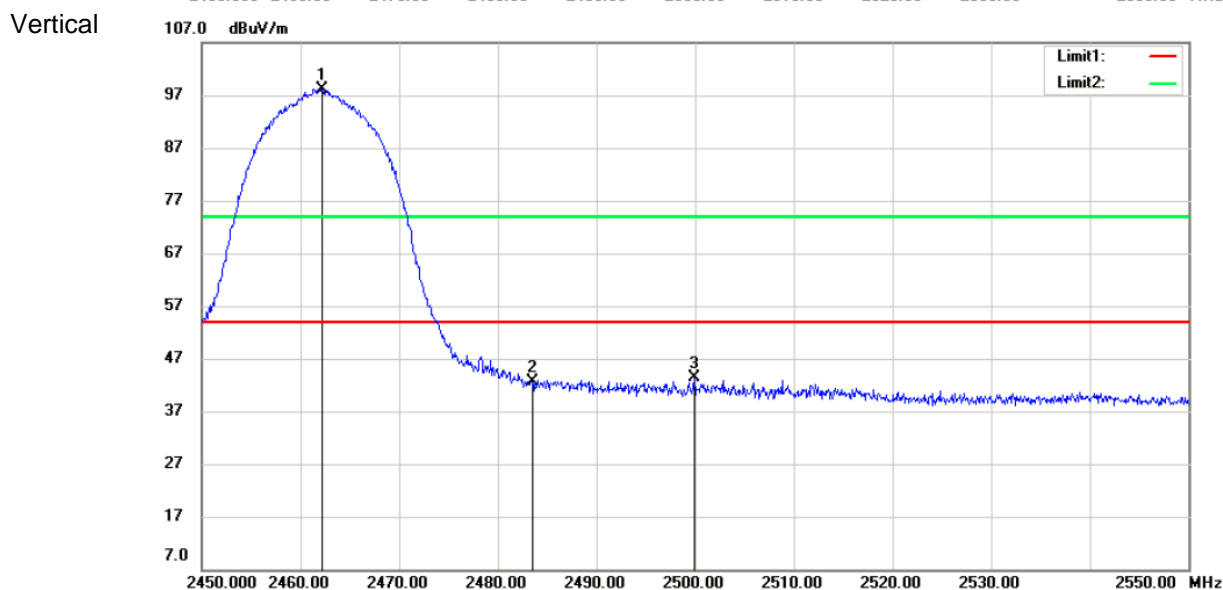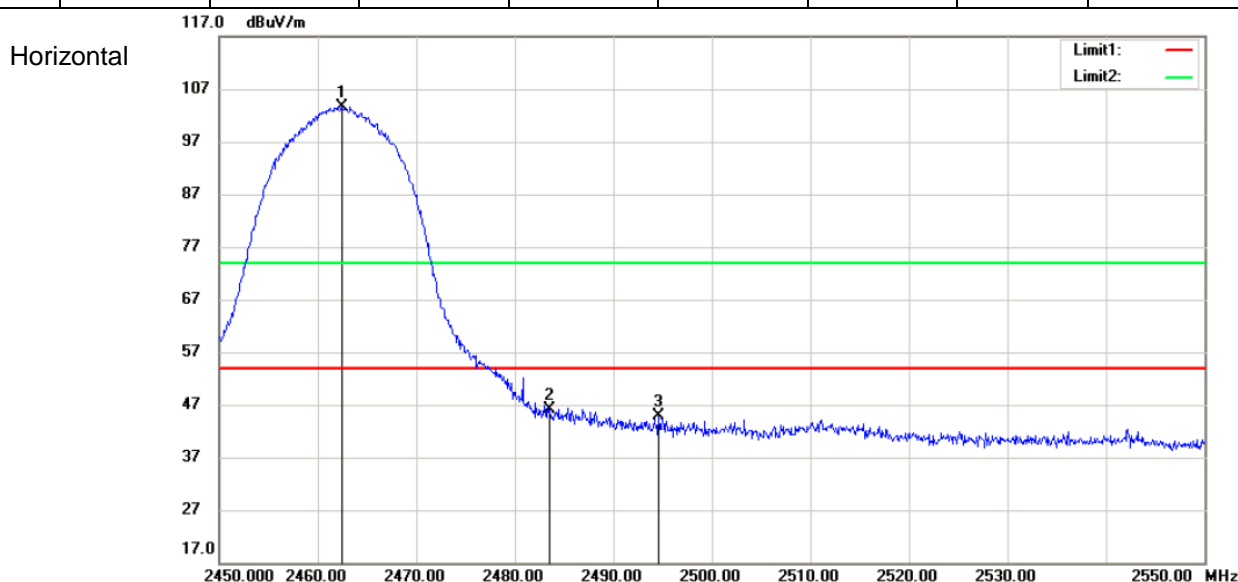

Test Mode: 802.11g

Channel: 2412



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2382.96 | 75.32 | -3.86 | 71.46 | 74 | -2.54 | Peak | Horizontal |
| 2 | 2390 | 73.24 | -3.89 | 69.35 | 74 | -4.65 | Peak | Horizontal |
| 3 | 2412.24 | 106.1 | -3.94 | 102.16 | 74 | 28.16 | Peak | Horizontal |
| 1 | 2387.16 | 43.83 | -3.87 | 39.96 | 54 | -14.04 | Average | Horizontal |
| 2 | 2390 | 45.21 | -3.89 | 41.32 | 54 | -12.68 | Average | Horizontal |
| 3 | 2411.04 | 94.77 | -3.93 | 90.84 | 54 | 36.84 | Average | Horizontal |

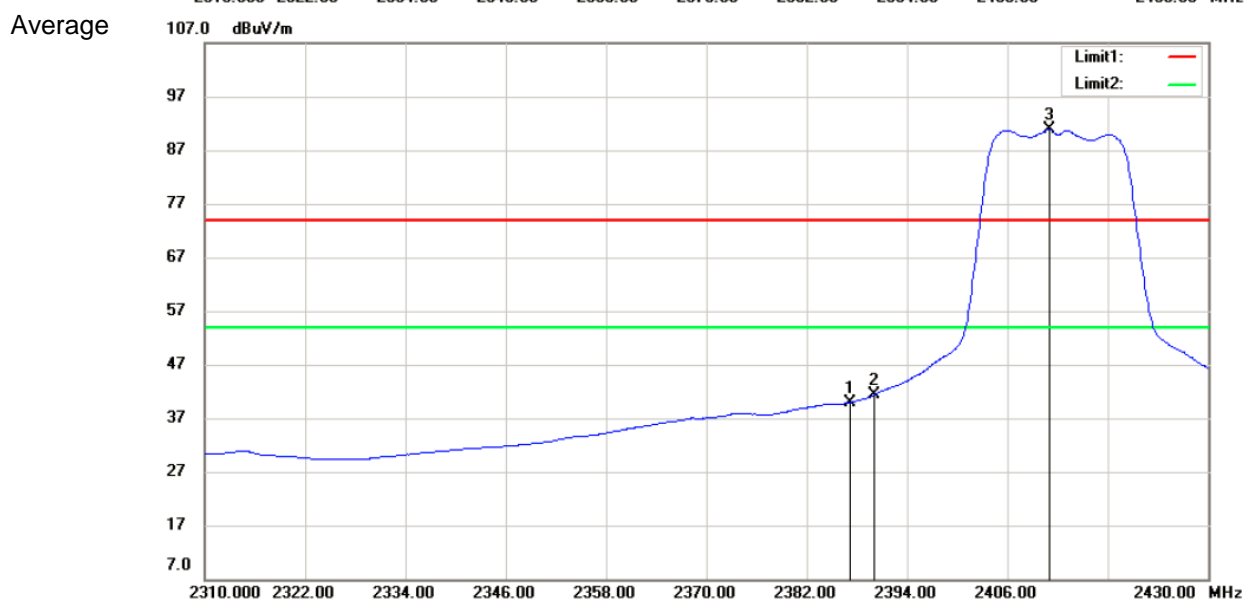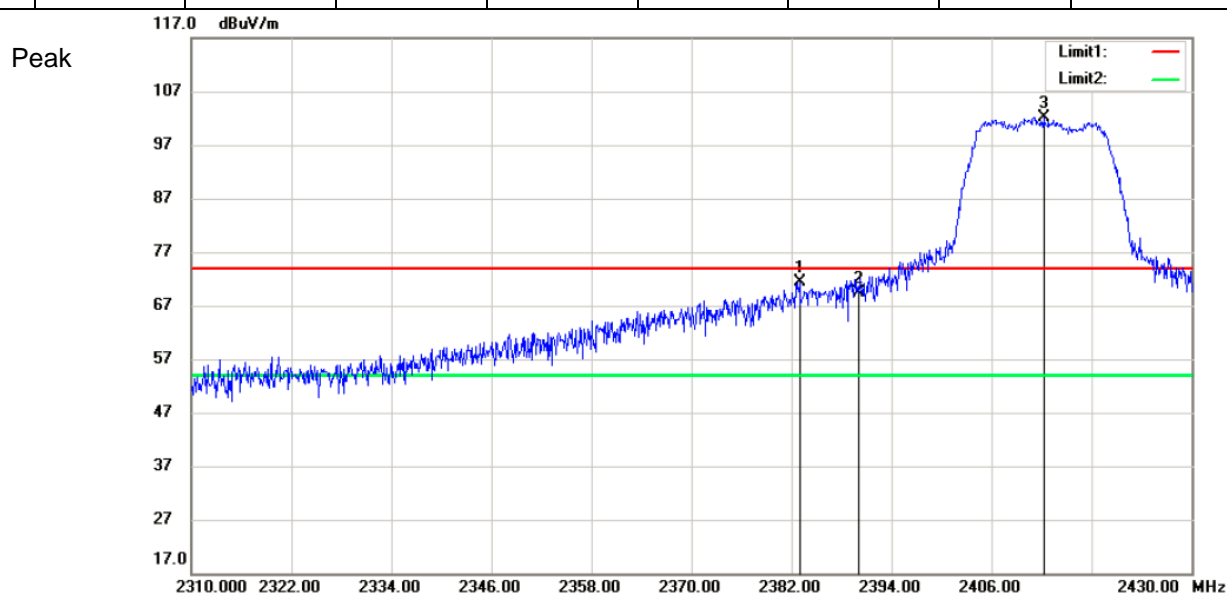

Test Mode: 802.11g

Channel: 2412



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2382.36 | 62.15 | -3.86 | 58.29 | 74 | -15.71 | Peak | Vertical |
| 2 | 2390 | 65.67 | -3.89 | 61.78 | 74 | -12.22 | Peak | Vertical |
| 3 | 2418.24 | 102.27 | -3.93 | 98.34 | 74 | 24.34 | Peak | Vertical |
| 1 | 2383.44 | 35.1 | -3.87 | 31.23 | 54 | -22.77 | Average | Vertical |
| 2 | 2390 | 36.29 | -3.89 | 32.4 | 54 | -21.6 | Average | Vertical |
| 3 | 2405.64 | 85.86 | -3.93 | 81.93 | 54 | 27.93 | Average | Vertical |

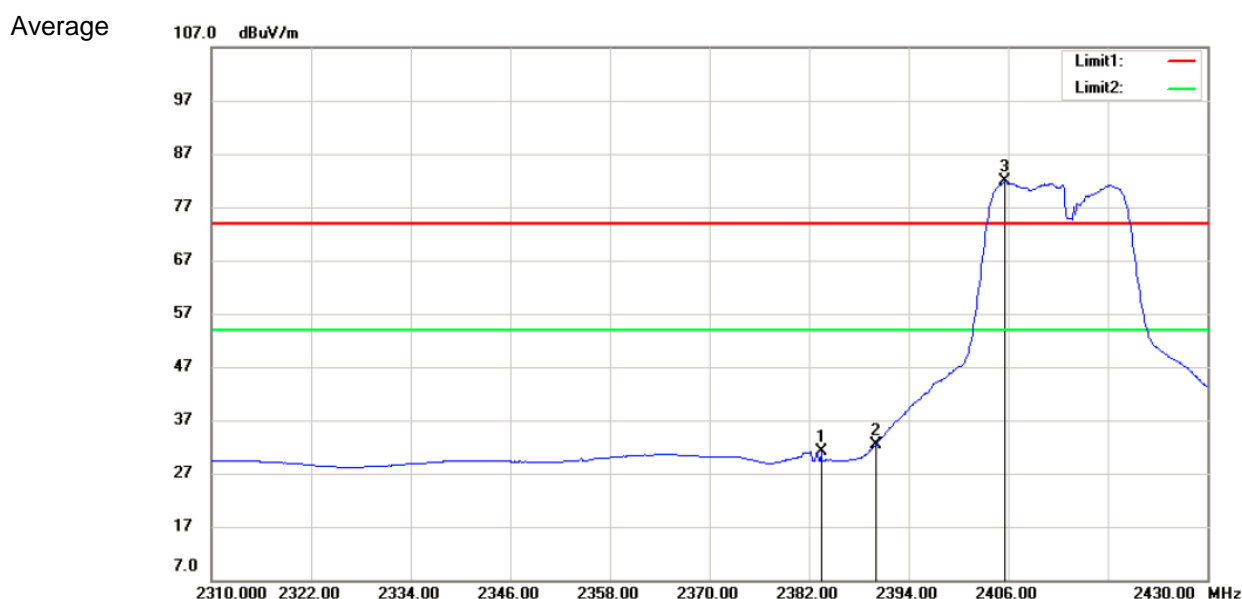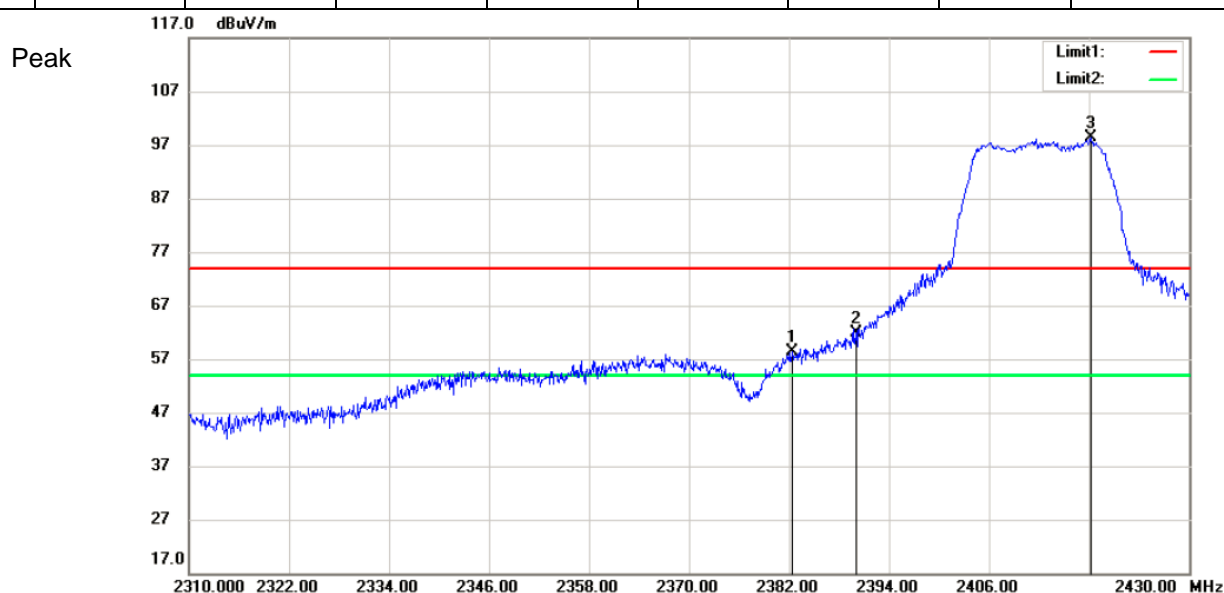

Test Mode: 802.11g

Channel: 2462



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2468.4 | 107.68 | -3.99 | 103.69 | 74 | 29.69 | Peak | Horizontal |
| 2 | 2483.5 | 76.12 | -4.01 | 72.11 | 74 | -1.89 | Peak | Horizontal |
| 3 | 2485 | 75.66 | -4.01 | 71.65 | 74 | -2.35 | Peak | Horizontal |
| 1 | 2468.2 | 96.18 | -3.99 | 92.19 | 54 | 38.19 | Average | Horizontal |
| 2 | 2483.5 | 52.87 | -4.01 | 48.86 | 54 | -5.14 | Average | Horizontal |
| 3 | 2484.7 | 49.2 | -4.01 | 45.19 | 54 | -8.81 | Average | Horizontal |

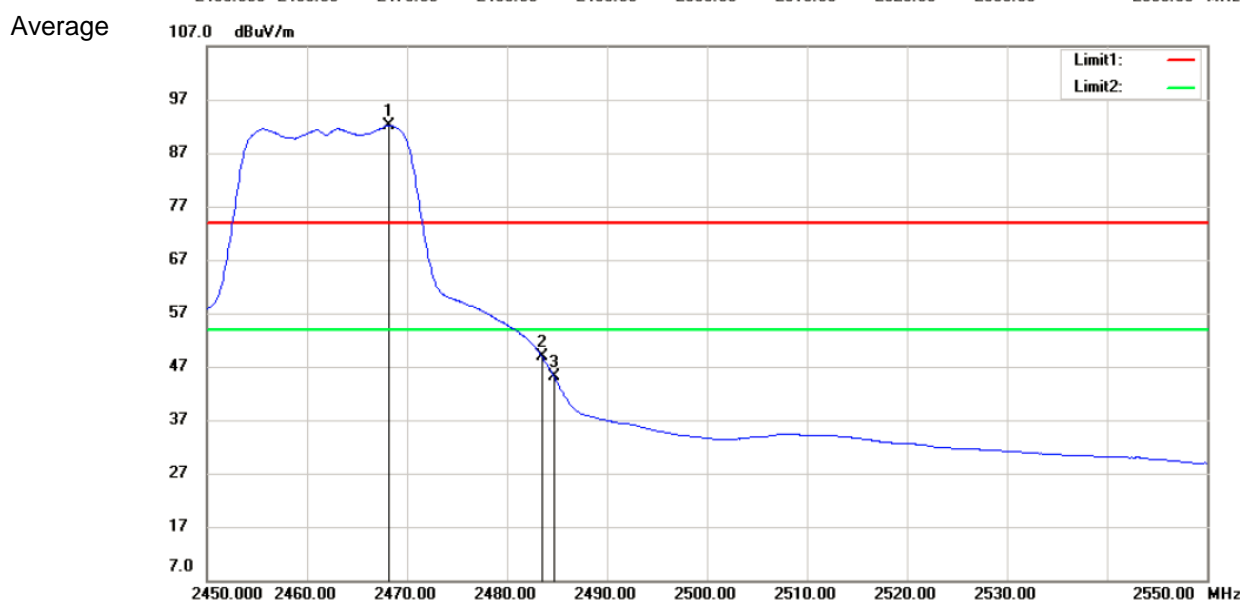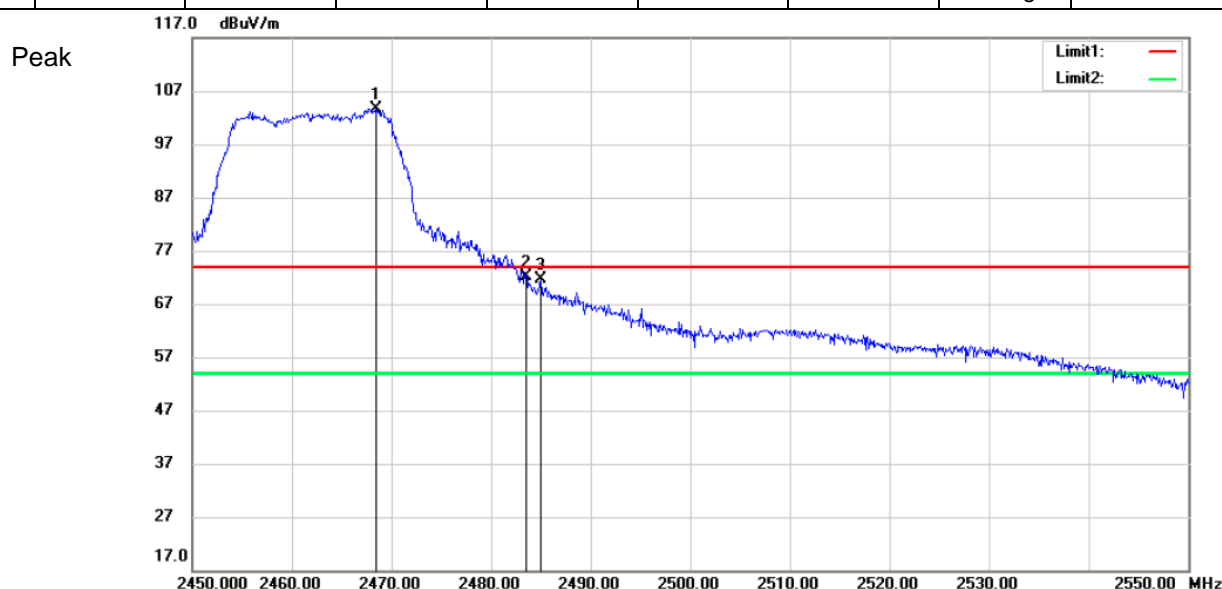

Test Mode: 802.11 g

Channel: 2462



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2467.8 | 100.49 | -4 | 96.49 | 74 | 22.49 | Peak | Vertical |
| 2 | 2483.5 | 70.2 | -4.01 | 66.19 | 74 | -7.81 | Peak | Vertical |
| 3 | 2487.2 | 70.38 | -4.02 | 66.36 | 74 | -7.64 | Peak | Vertical |
| 1 | 2455.6 | 89.18 | -3.98 | 85.2 | 54 | 31.2 | Average | Vertical |
| 2 | 2483.5 | 41.02 | -4.01 | 37.01 | 54 | -16.99 | Average | Vertical |
| 3 | 2489 | 38.32 | -4.02 | 34.3 | 54 | -19.7 | Average | Vertical |

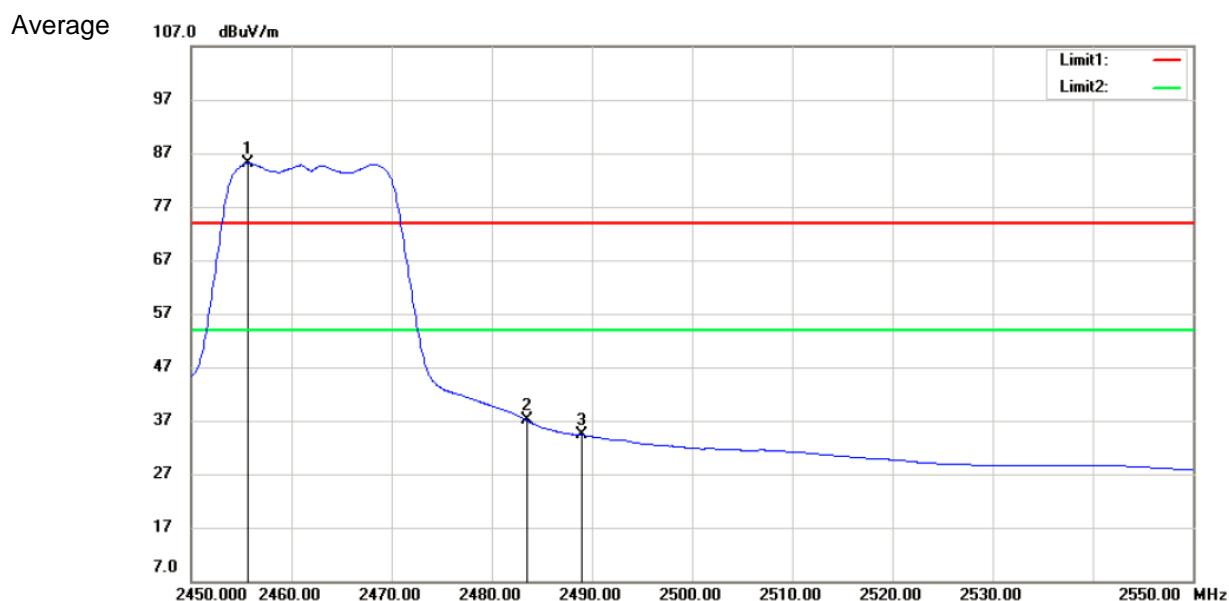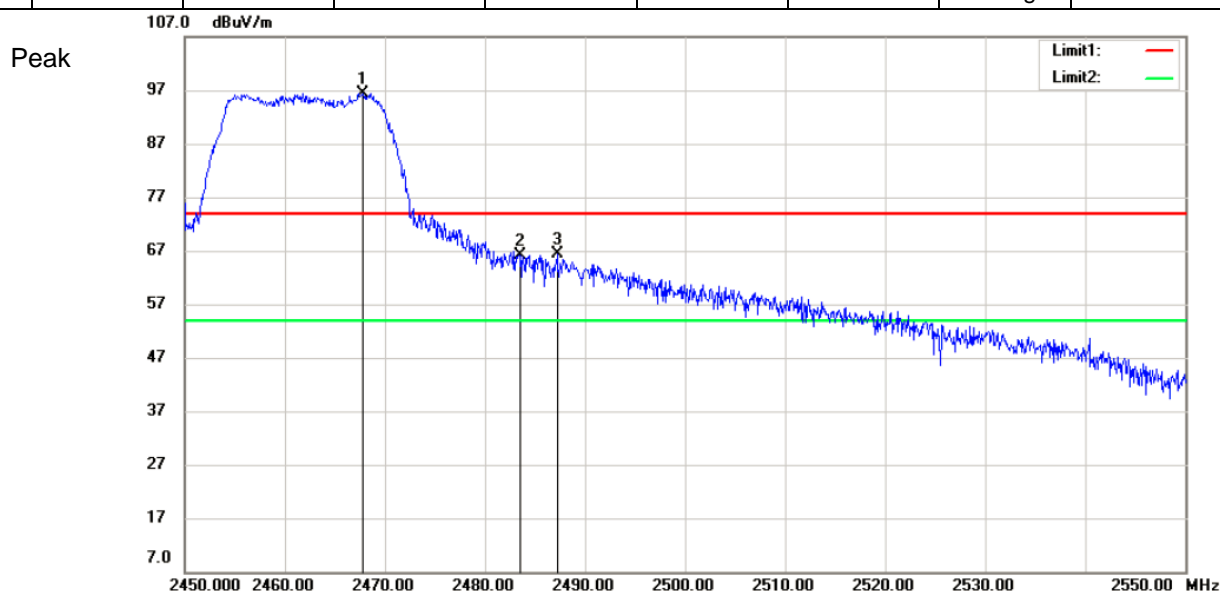

Test Mode: 802.11 n(HT20)

Channel: 2412



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2384.04 | 74.98 | -3.87 | 71.11 | 74 | -2.89 | Peak | Horizontal |
| 2 | 2390 | 74.08 | -3.89 | 70.19 | 74 | -3.81 | Peak | Horizontal |
| 3 | 2411.4 | 105.58 | -3.93 | 101.65 | 74 | 27.65 | Peak | Horizontal |
| 1 | 2382.84 | 43.12 | -3.86 | 39.26 | 54 | -14.74 | Average | Horizontal |
| 2 | 2390 | 46.27 | -3.89 | 42.38 | 54 | -11.62 | Average | Horizontal |
| 3 | 2410.8 | 94.56 | -3.92 | 90.64 | 54 | 36.64 | Average | Horizontal |

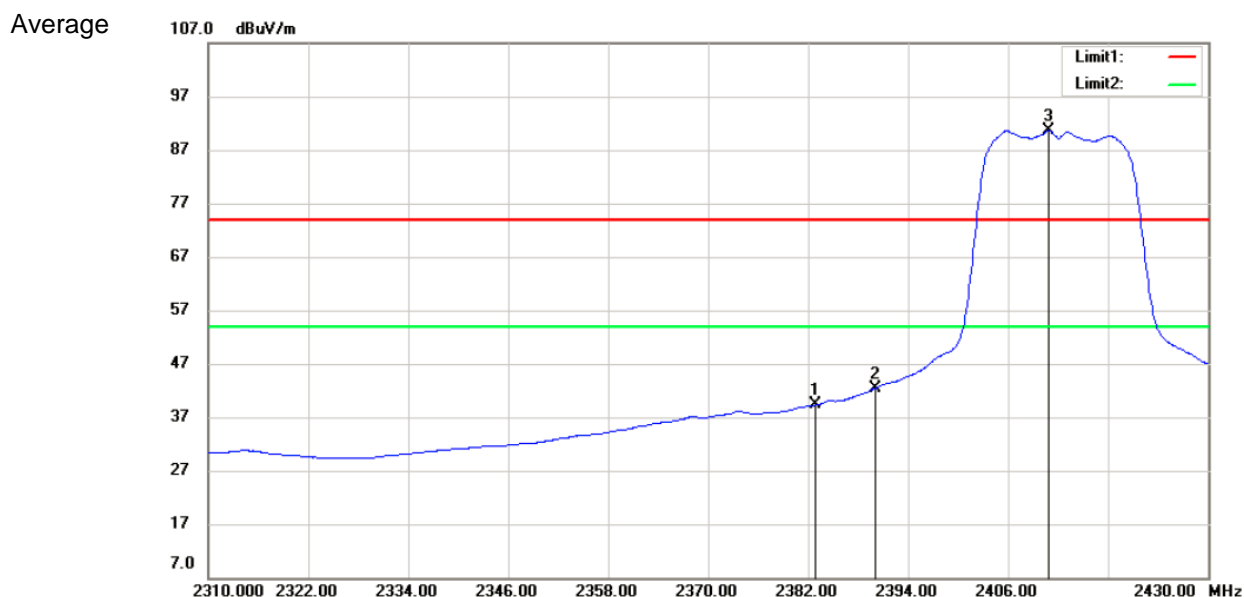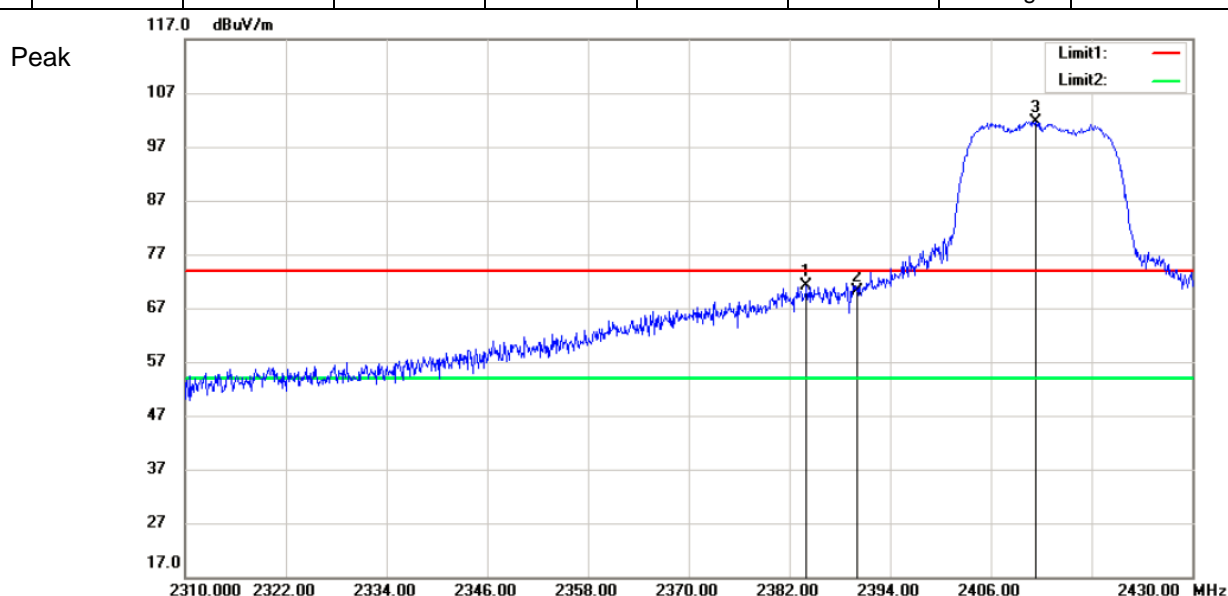

Test Mode: 802.11 n(HT20)

Channel: 2412



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2363.76 | 61.01 | -3.81 | 57.2 | 74 | -16.8 | Peak | Vertical |
| 2 | 2390 | 65.9 | -3.89 | 62.01 | 74 | -11.99 | Peak | Vertical |
| 3 | 2418 | 102.32 | -3.94 | 98.38 | 74 | 24.38 | Peak | Vertical |
| 1 | 2365.92 | 34.35 | -3.81 | 30.54 | 54 | -23.46 | Average | Vertical |
| 2 | 2390 | 38.39 | -3.89 | 34.5 | 54 | -19.5 | Average | Vertical |
| 3 | 2418.12 | 89.82 | -3.93 | 85.89 | 54 | 31.89 | Average | Vertical |

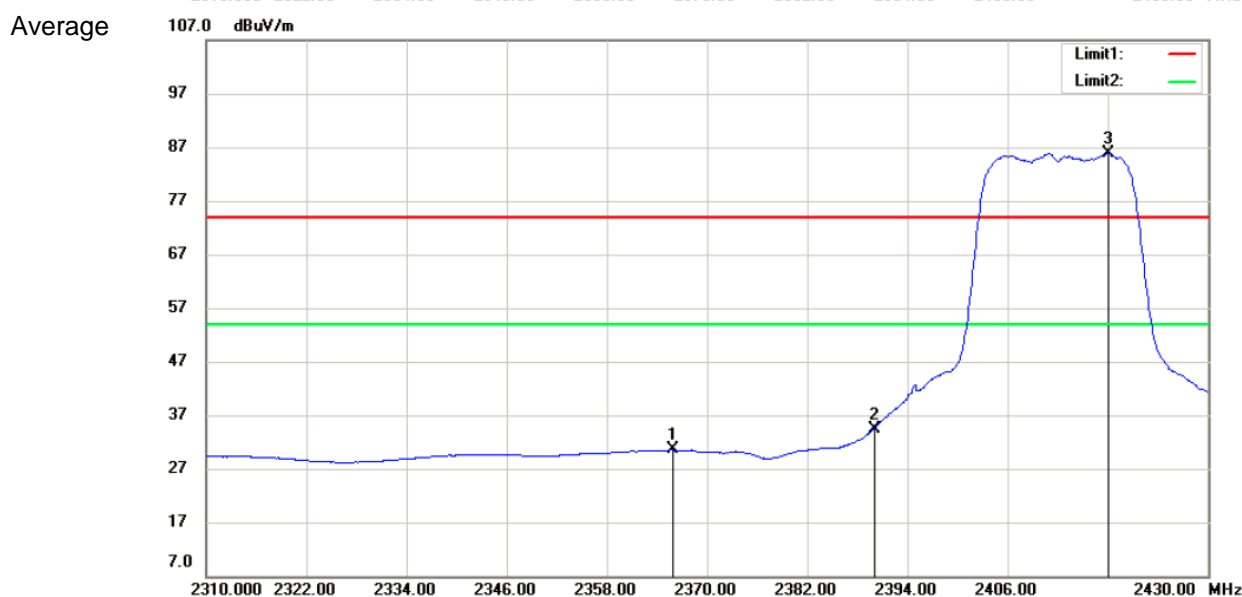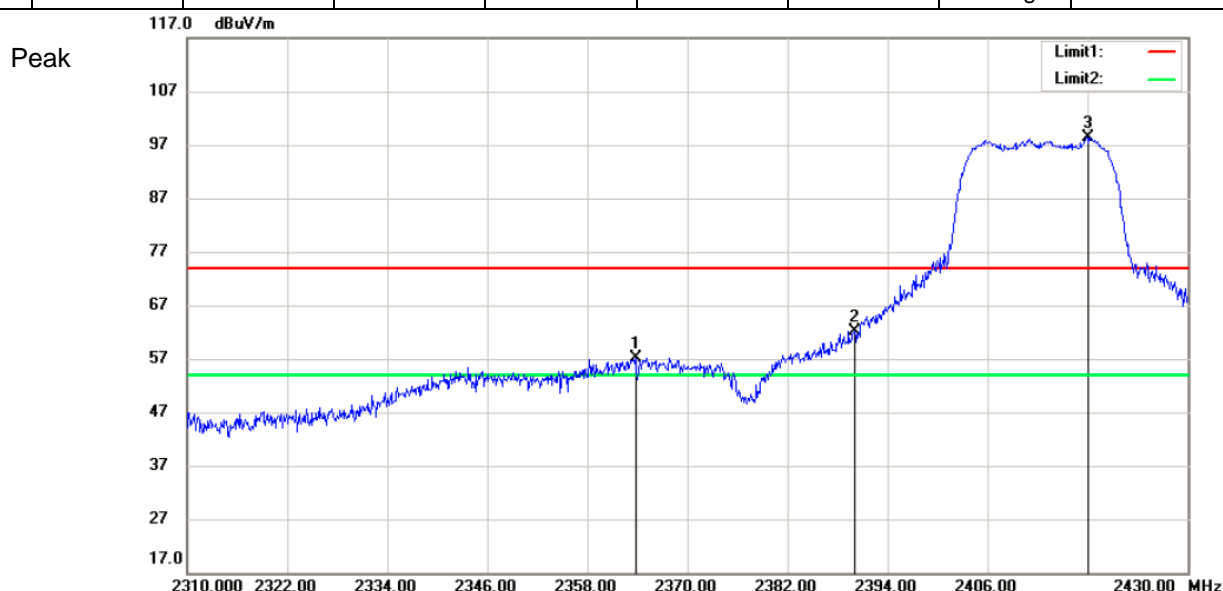

Test Mode: 802.11 n(HT20)

Channel: 2462



| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2468.3 | 106.34 | -3.99 | 102.35 | 74 | 28.35 | Peak | Horizontal |
| 2 | 2483.5 | 71.02 | -4.01 | 67.01 | 74 | -6.99 | Peak | Horizontal |
| 3 | 2489.2 | 70.18 | -4.02 | 66.16 | 74 | -7.84 | Peak | Horizontal |
| 1 | 2468.2 | 95 | -3.99 | 91.01 | 54 | 37.01 | Average | Horizontal |
| 2 | 2483.5 | 51.1 | -4.01 | 47.09 | 54 | -6.91 | Average | Horizontal |
| 3 | 2485 | 48.22 | -4.01 | 44.21 | 54 | -9.79 | Average | Horizontal |

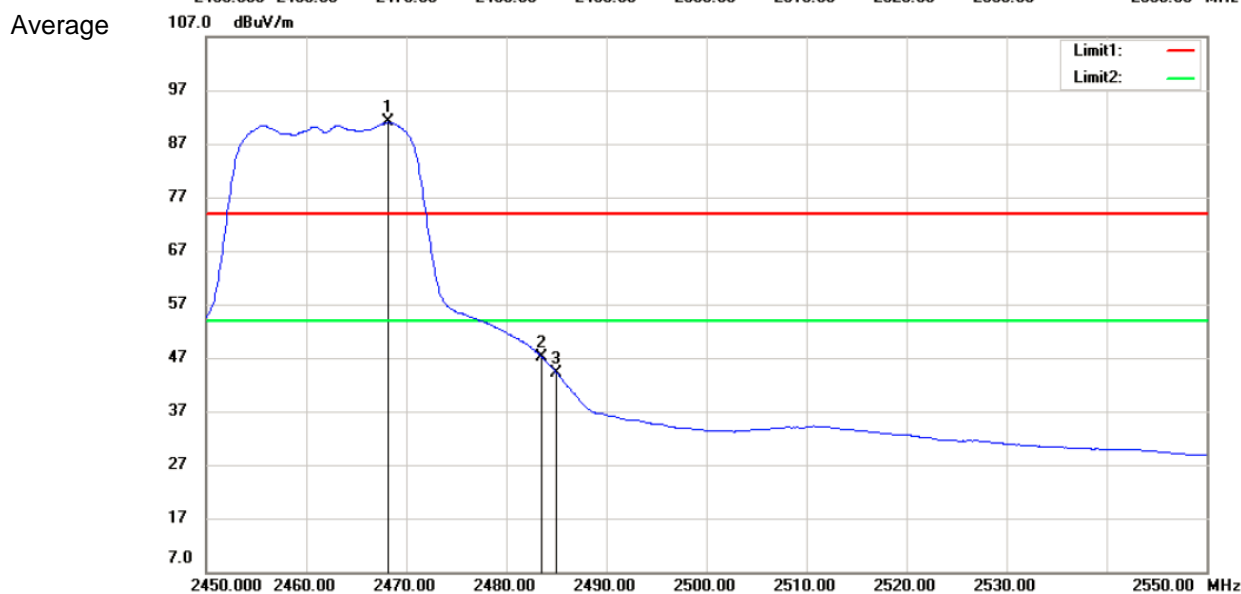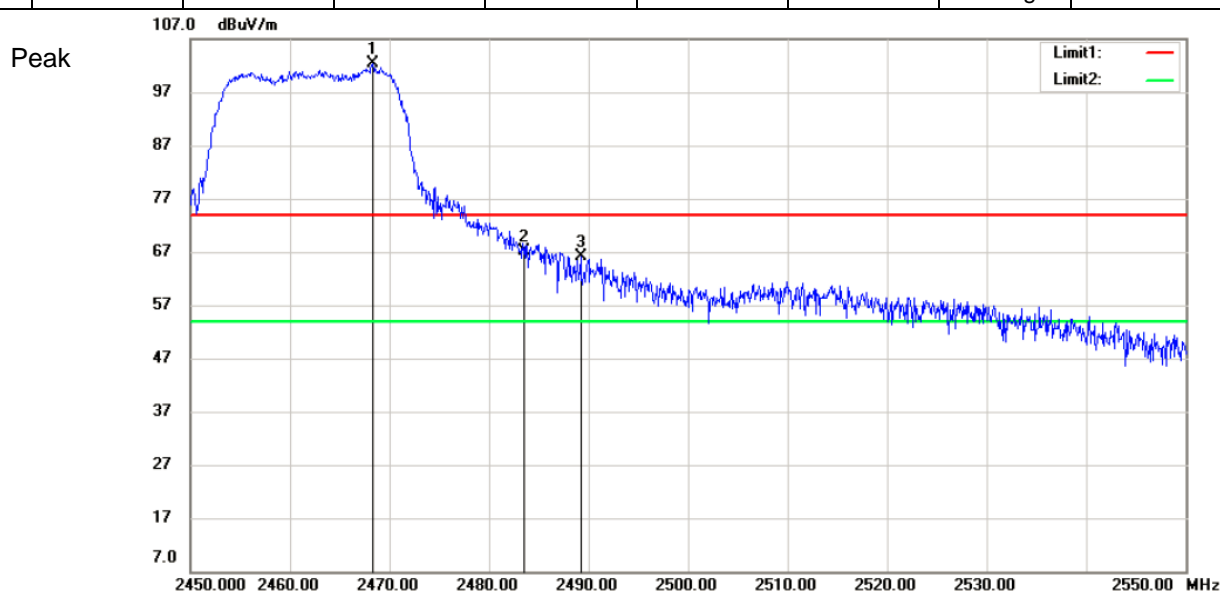

Test Mode: 802.11 n(HT20)

Channel: 2462

| MK. | Frequency (MHz) | Reading (dBuV/m) | Corrected factor(dB) | Result (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|-----|-----------------|------------------|----------------------|-----------------|----------------|-----------------|----------|--------------|
| 1 | 2468.1 | 101.02 | -3.99 | 97.03 | 74 | 23.03 | Peak | Vertical |
| 2 | 2483.5 | 68.55 | -4.01 | 64.54 | 74 | -9.46 | Peak | Vertical |
| 3 | 2486.8 | 70.2 | -4.02 | 66.18 | 74 | -7.82 | Peak | Vertical |
| 1 | 2455.6 | 90.21 | -3.98 | 86.23 | 54 | 32.23 | Average | Vertical |
| 2 | 2483.5 | 42.5 | -4.01 | 38.49 | 54 | -15.51 | Average | Vertical |
| 3 | 2489.3 | 38.75 | -4.01 | 34.74 | 54 | -19.26 | Average | Vertical |

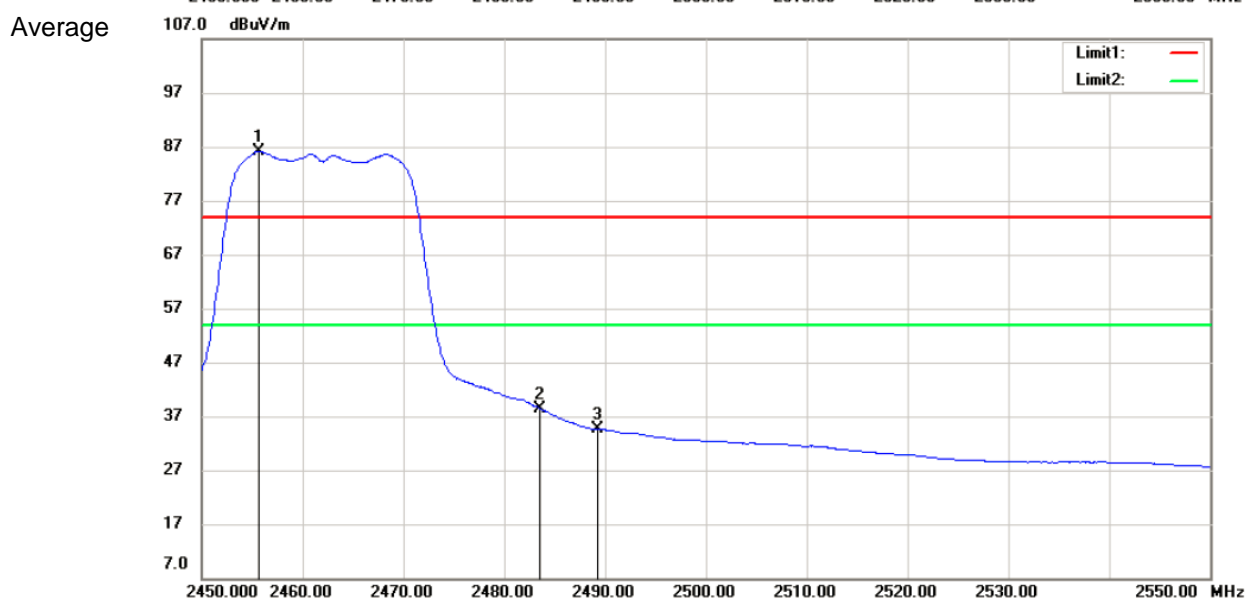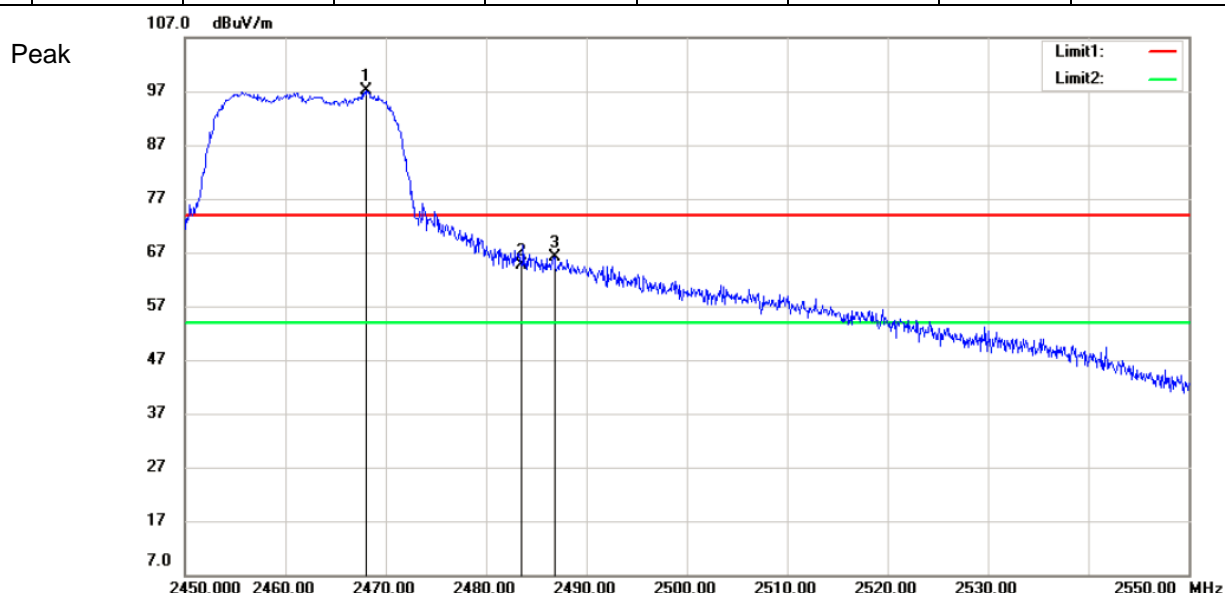

Remark: 1). Test Level = Receiver Reading + Antenna Factor + Cable Loss- Preamplifier Factor

2). If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

All frequencies within the "Restricted bands" have been evaluated to compliance. Except as shown in paragraph of this section, only spurious emissions are permitted in any of the frequency bands listed below:

a. FCC Part 15, Subpart C Section 15.205 Restricted bands of operation.

| MHz | MHz | MHz | GHz |
|---------------------|-----------------------|-----------------|---------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| 10.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.5 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | |
| 13.36 - 13.41 | | | |

7.8 Radiated Spurious Emissions

Test Requirement: 47 CFR Part 15, Subpart C 15.247

Test Method: ANSI C63.10 (2013) Section 6.10.4

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 22 °C Humidity: 50 % RH Atmospheric Pressure: 1001 mbar

b:TX mode_Keep the EUT in continuously transmitting mode with all modulation types.

Pretest these mode to




find the worst case:

c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.

The worst case for
final test:

c:Charge + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types.


7.8.2 Test Setup Diagram

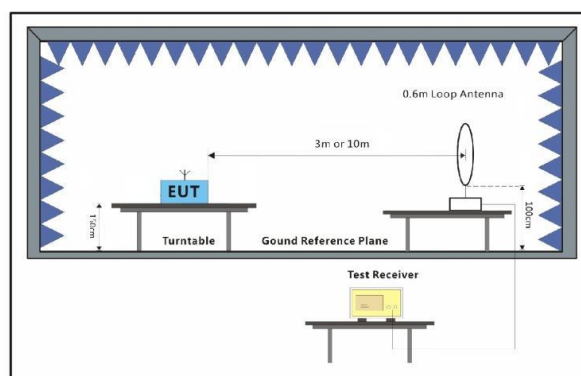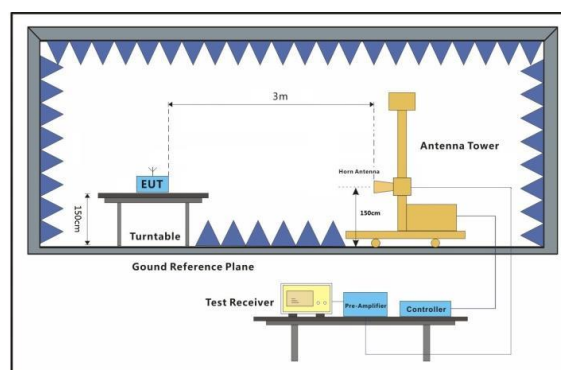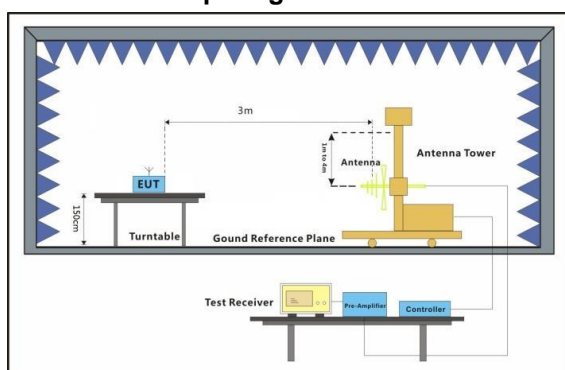

7.8.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel,the middle channel,the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

30MHz-1GHz:
Polarization:Horizontal

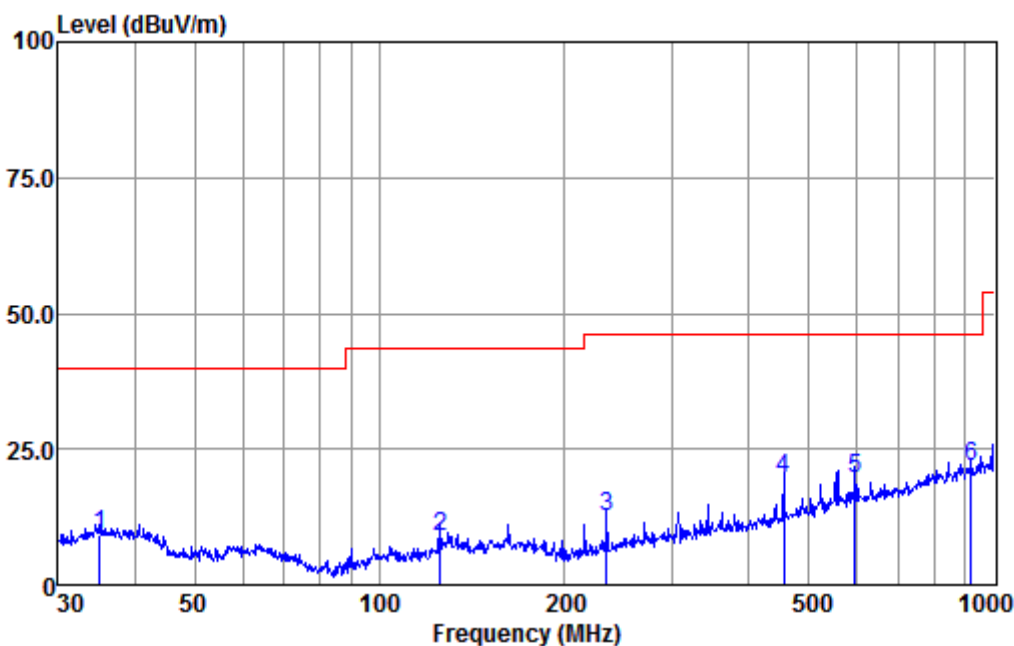


Condition : HORIZONTAL

| | Freq | ReadAntenna | Cable | Preamp | | Limit | Over | |
|-----|--------|-------------|--------|--------|--------|--------|--------|-----------|
| | | Level | Factor | Loss | Factor | Level | Line | Limit |
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 35.00 | 35.78 | 15.84 | 0.20 | 42.61 | 9.21 | 40.00 | -30.79 QP |
| 2 | 125.89 | 39.34 | 11.70 | 0.56 | 42.67 | 8.93 | 43.50 | -34.57 QP |
| 3 | 234.17 | 43.44 | 10.87 | 0.75 | 42.48 | 12.58 | 46.00 | -33.42 QP |
| 4 | 455.91 | 44.33 | 16.33 | 1.10 | 42.12 | 19.64 | 46.00 | -26.36 QP |
| 5 | 595.13 | 41.16 | 19.32 | 1.36 | 42.18 | 19.66 | 46.00 | -26.34 QP |
| 6 q | 919.29 | 38.06 | 22.92 | 2.49 | 41.75 | 21.72 | 46.00 | -24.28 QP |

Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Polarization: Vertical

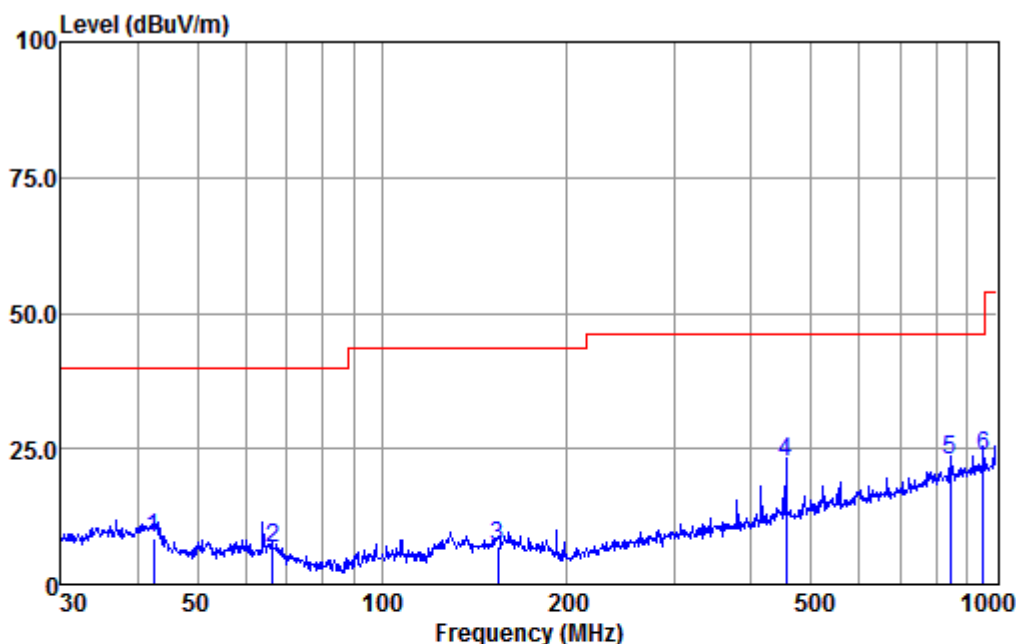

Condition : VERTICAL

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level | Limit | Over Limit | Remark |
|-----|--------|------------|----------------|------------|---------------|--------|--------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | |
| 1 | 42.45 | 36.09 | 14.79 | 0.23 | 42.63 | 8.48 | 40.00 | -31.52 | QP |
| 2 | 66.27 | 37.11 | 11.84 | 0.32 | 42.66 | 6.61 | 40.00 | -33.39 | QP |
| 3 | 154.28 | 36.47 | 12.43 | 0.63 | 42.60 | 6.93 | 43.50 | -36.57 | QP |
| 4 | 455.91 | 47.03 | 16.33 | 1.10 | 42.12 | 22.34 | 46.00 | -23.66 | QP |
| 5 | 842.13 | 40.61 | 22.25 | 2.21 | 42.28 | 22.79 | 46.00 | -23.21 | QP |
| 6 q | 955.44 | 39.13 | 23.32 | 2.66 | 41.50 | 23.61 | 46.00 | -22.39 | QP |

Result Level = Read Level + Antenna Factor + Cable loss - Preamp Factor

Above 1GHz:

Test mode: 802.11b

Channel: 2412

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4824 | 40.35 | 6.4 | 46.75 | 54 | -7.25 | peak | Horizontal |
| 2 | 7236 | 37.65 | 10.76 | 48.41 | 54 | -5.59 | peak | Horizontal |
| 3 | 9648 | 36.68 | 14.37 | 51.05 | 54 | -2.95 | peak | Horizontal |
| 4 | 4824 | 44.14 | 6.4 | 50.54 | 54 | -3.46 | peak | Vertical |
| 5 | 7236 | 37.88 | 10.76 | 48.64 | 54 | -5.36 | peak | Vertical |
| 6 | 9648 | 32.48 | 14.37 | 46.85 | 54 | -7.15 | peak | Vertical |

Test mode: 802.11b

Channel: 2437

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4874 | 38.62 | 6.92 | 45.54 | 54 | -8.46 | peak | Horizontal |
| 2 | 7311 | 36.06 | 11.08 | 47.14 | 54 | -6.86 | peak | Horizontal |
| 3 | 9748 | 34.19 | 14.36 | 48.55 | 54 | -5.45 | peak | Horizontal |
| 4 | 4874 | 40.35 | 6.92 | 47.27 | 54 | -6.73 | peak | Vertical |
| 5 | 7311 | 34.32 | 11.08 | 45.4 | 54 | -8.6 | peak | Vertical |
| 6 | 9748 | 32.93 | 14.36 | 47.29 | 54 | -6.71 | peak | Vertical |

Test mode: 802.11b

Channel: 2462

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4924 | 41.05 | 7.31 | 48.36 | 54 | -5.64 | peak | Horizontal |
| 2 | 7386 | 39.8 | 11.41 | 51.21 | 54 | -2.79 | peak | Horizontal |
| 3 | 9848 | 33.45 | 14.38 | 47.83 | 54 | -6.17 | peak | Horizontal |
| 4 | 4924 | 38.47 | 7.31 | 45.78 | 54 | -8.22 | peak | Vertical |
| 5 | 7386 | 34.87 | 11.41 | 46.28 | 54 | -7.72 | peak | Vertical |
| 6 | 9848 | 33.64 | 14.38 | 48.02 | 54 | -5.98 | peak | Vertical |

Test mode: 802.11g

Channel: 2412

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4824 | 44.15 | 6.4 | 50.55 | 54 | -3.45 | peak | Horizontal |
| 2 | 7236 | 37.7 | 10.76 | 48.46 | 54 | -5.54 | peak | Horizontal |
| 3 | 9648 | 34.62 | 14.37 | 48.99 | 54 | -5.01 | peak | Horizontal |
| 4 | 4824 | 38.42 | 6.4 | 44.82 | 54 | -9.18 | peak | Vertical |
| 5 | 7236 | 36.58 | 10.76 | 47.34 | 54 | -6.66 | peak | Vertical |
| 6 | 9648 | 30.63 | 14.37 | 45 | 54 | -9 | peak | Vertical |

Test mode: 802.11g

Channel: 2437

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4874 | 40.78 | 6.92 | 47.7 | 54 | -6.3 | peak | Horizontal |
| 2 | 7311 | 37.2 | 11.08 | 48.28 | 54 | -5.72 | peak | Horizontal |
| 3 | 9748 | 34.62 | 14.36 | 48.98 | 54 | -5.02 | peak | Horizontal |
| 4 | 4874 | 43.21 | 6.92 | 50.13 | 54 | -3.87 | peak | Vertical |
| 5 | 7311 | 34.49 | 11.08 | 45.57 | 54 | -8.43 | peak | Vertical |
| 6 | 9748 | 32.9 | 14.36 | 47.26 | 54 | -6.74 | peak | Vertical |

Test mode: 802.11g

Channel: 2462

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4924 | 39.14 | 7.31 | 46.45 | 54 | -7.55 | peak | Horizontal |
| 2 | 7386 | 34.85 | 11.41 | 46.26 | 54 | -7.74 | peak | Horizontal |
| 3 | 9848 | 35.63 | 14.38 | 50.01 | 54 | -3.99 | peak | Horizontal |
| 4 | 4924 | 42.18 | 7.31 | 49.49 | 54 | -4.51 | peak | Vertical |
| 5 | 7386 | 39.54 | 11.41 | 50.95 | 54 | -3.05 | peak | Vertical |
| 6 | 9848 | 32.37 | 14.38 | 46.75 | 54 | -7.25 | peak | Vertical |

Test mode: 802.11 n(HT20)

Channel: 2412

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4824 | 40.75 | 6.4 | 47.15 | 54 | -6.85 | peak | Horizontal |
| 2 | 7236 | 34 | 10.76 | 44.76 | 54 | -9.24 | peak | Horizontal |
| 3 | 9648 | 36.58 | 14.37 | 50.95 | 54 | -3.05 | peak | Horizontal |
| 4 | 4824 | 39.84 | 6.4 | 46.24 | 54 | -7.76 | peak | Vertical |
| 5 | 7236 | 34.06 | 10.76 | 44.82 | 54 | -9.18 | peak | Vertical |
| 6 | 9648 | 32.17 | 14.37 | 46.54 | 54 | -7.46 | peak | Vertical |

Test mode: 802.11 n(HT20)

Channel: 2437

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4874 | 40.27 | 6.92 | 47.19 | 54 | -6.81 | peak | Horizontal |
| 2 | 7311 | 35.4 | 11.08 | 46.48 | 54 | -7.52 | peak | Horizontal |
| 3 | 9748 | 33.88 | 14.36 | 48.24 | 54 | -5.76 | peak | Horizontal |
| 4 | 4874 | 38.68 | 6.92 | 45.6 | 54 | -8.4 | peak | Vertical |
| 5 | 7311 | 36.98 | 11.08 | 48.06 | 54 | -5.94 | peak | Vertical |
| 6 | 9748 | 32.7 | 14.36 | 47.06 | 54 | -6.94 | peak | Vertical |

Test mode: 802.11 n(HT20)

Channel: 2462

| Mark | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Emission (dBuV/m) | Limit (dBuV/m) | Over Limit (dB) | Detector | Polarization |
|------|-----------------|----------------|-------------|-------------------|----------------|-----------------|----------|--------------|
| 1 | 4924 | 38.85 | 7.31 | 46.16 | 54 | -7.84 | peak | Horizontal |
| 2 | 7386 | 39.2 | 11.41 | 50.61 | 54 | -3.39 | peak | Horizontal |
| 3 | 9848 | 32.2 | 14.38 | 46.58 | 54 | -7.42 | peak | Horizontal |
| 4 | 4924 | 38.97 | 7.31 | 46.28 | 54 | -7.72 | peak | Vertical |
| 5 | 7386 | 36.26 | 11.41 | 47.67 | 54 | -6.33 | peak | Vertical |
| 6 | 9848 | 34.49 | 14.38 | 48.87 | 54 | -5.13 | peak | Vertical |

Remark: 1) Emission = Receiver Reading + Factor

2) Factor = Antenna Factor + Cable Loss - Pre-amplifier Factor.

3) If the Peak value below the AV Limit, the AV test doesn't perform for this submission.

4) No spurious emissions were detected within 20dB of limit below 30MHz

8 Photographs

Refer to the < Test Setup photos>.

9 EUT Constructional Details

Refer to the < External Photos > & < Internal Photos >.

--End of the Report--