

**Test Plot 1#: GSM 850\_Head Left Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896 \text{ S/m}$ ;  $\epsilon_r = 40.83$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.233 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.925 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.238 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 0.223 W/kg

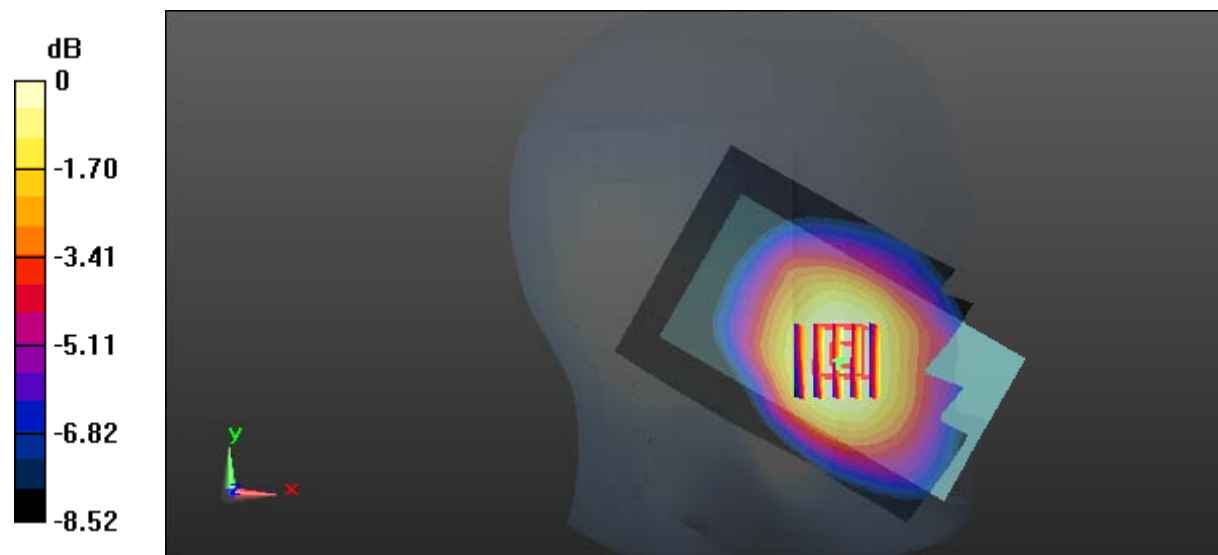

0 dB = 0.223 W/kg = -6.52 dBW/kg

**Test Plot 2#: GSM 850\_Head Left Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.133 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.546 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.148 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.139 W/kg

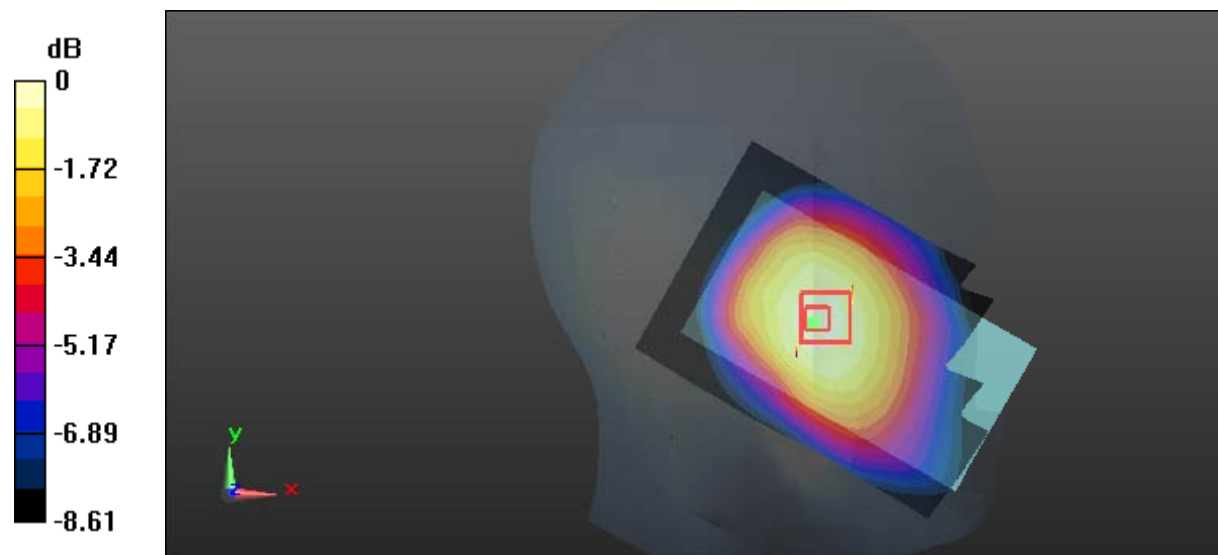

0 dB = 0.139 W/kg = -8.57 dBW/kg

**Test Plot 3#: GSM 850\_Head Right Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.232 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.079 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.246 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

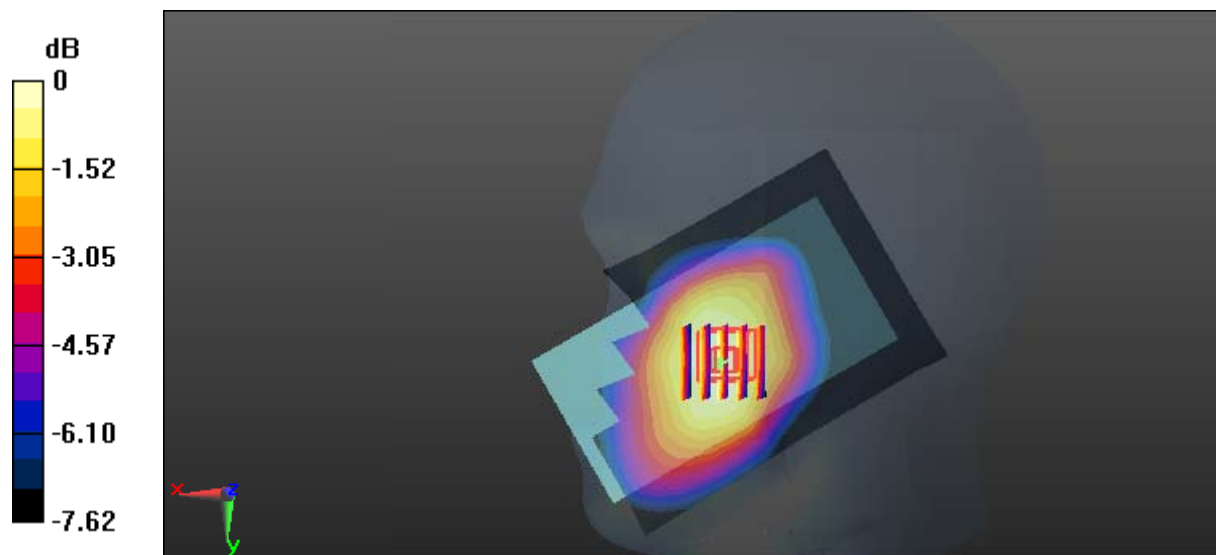

0 dB = 0.229 W/kg = -6.40 dBW/kg

**Test Plot 4#: GSM 850\_Head Right Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.139 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 5.966 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.146 W/kg

**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

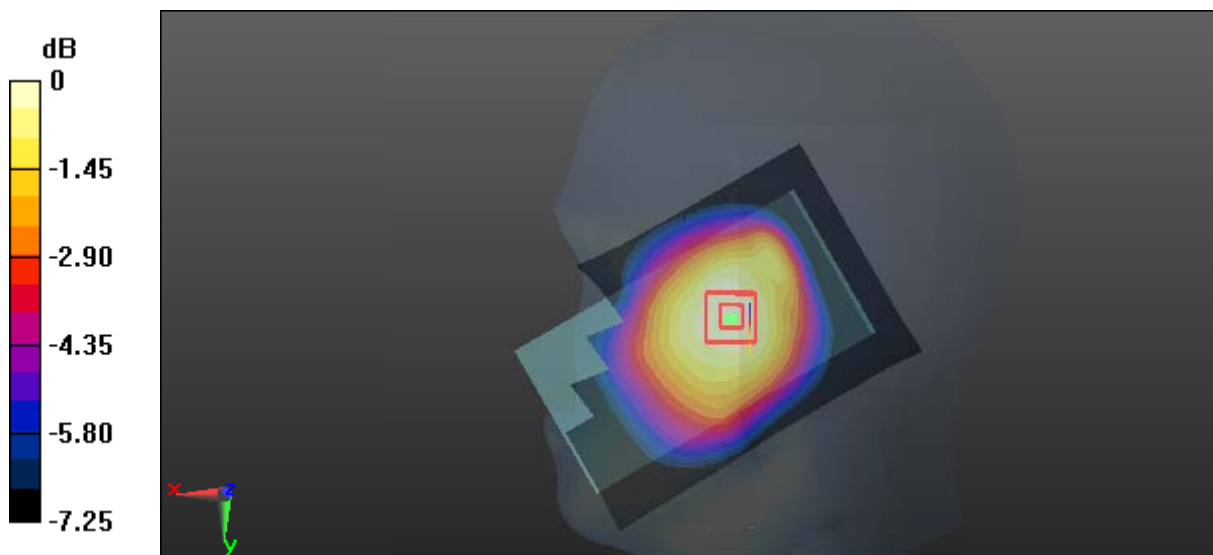

0 dB = 0.138 W/kg = -8.60 dBW/kg

**Test Plot 5#: GSM 850\_Body Worn Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.371 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.401 W/kg

**SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.246 W/kg**

Maximum value of SAR (measured) = 0.376 W/kg

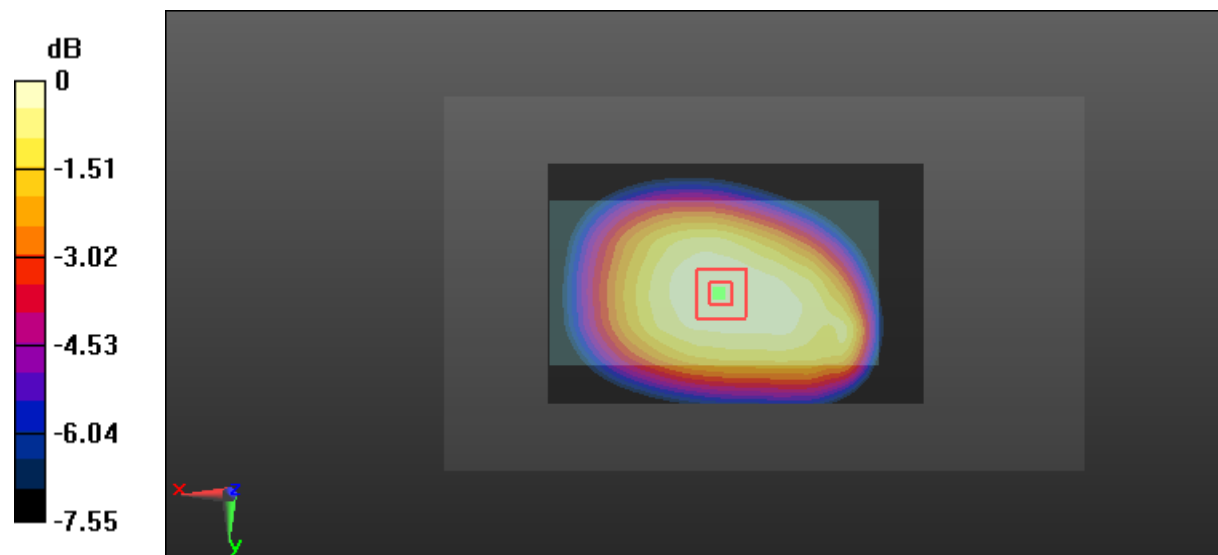

0 dB = 0.376 W/kg = -4.25 dBW/kg

**Test Plot 6#: GSM 850\_Body Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.600 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.84 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.652 W/kg

**SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.400 W/kg**

Maximum value of SAR (measured) = 0.609 W/kg

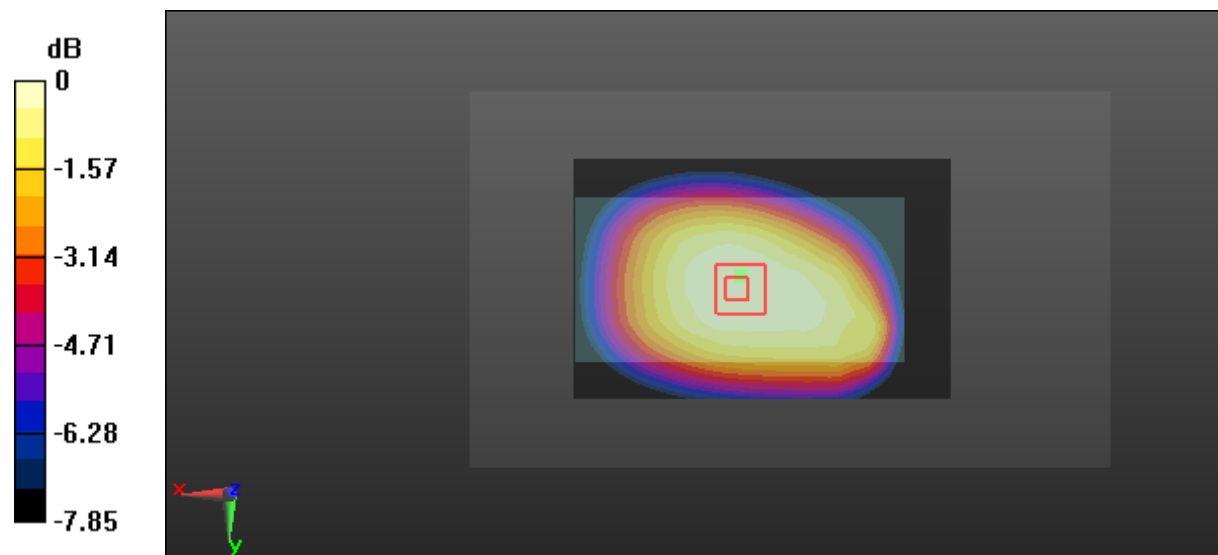

0 dB = 0.609 W/kg = -2.15 dBW/kg

**Test Plot 7#: GSM 850\_Body Right\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.539 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.80 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.603 W/kg

**SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.292 W/kg**

Maximum value of SAR (measured) = 0.545 W/kg

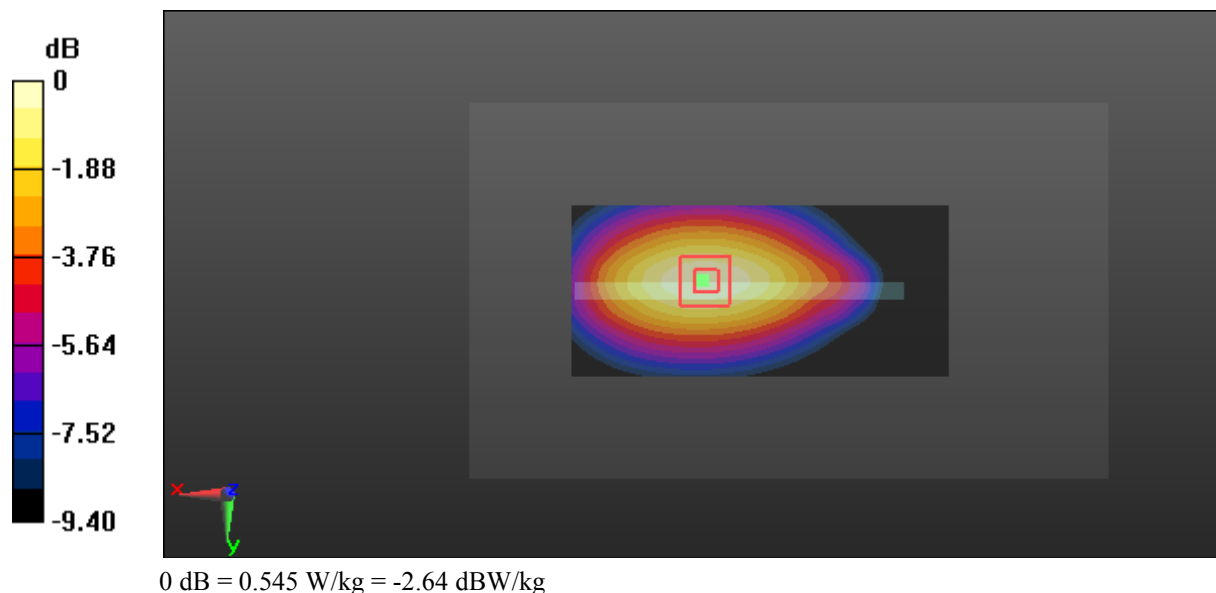

**Test Plot 8#: GSM 850\_Body Bottom\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.342 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.24 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.411 W/kg

**SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.351 W/kg

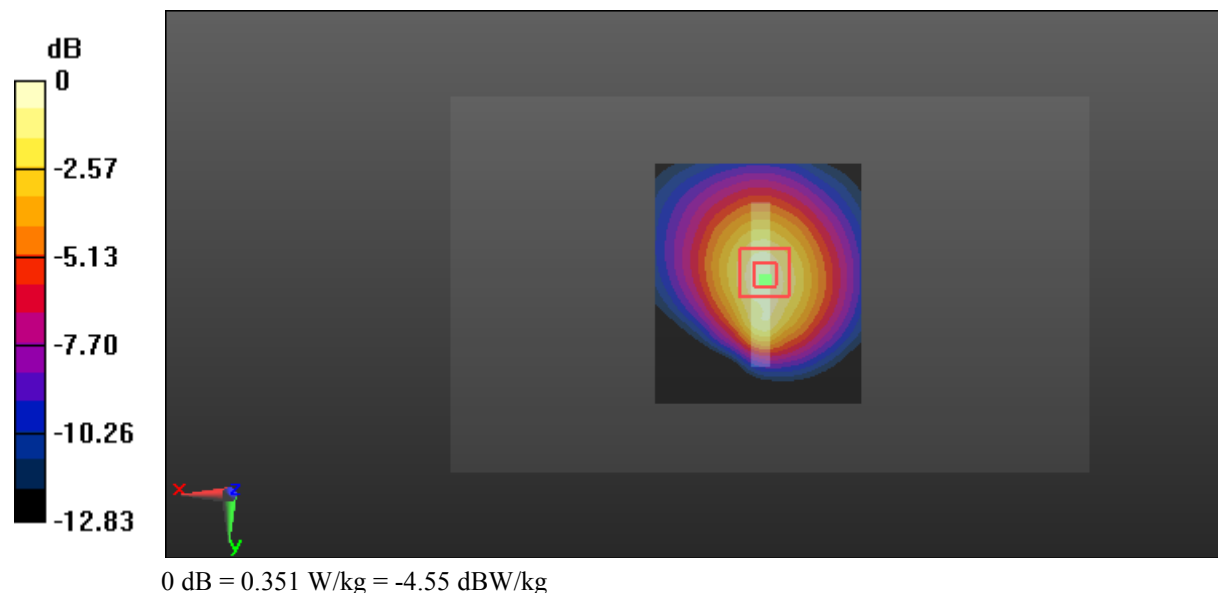



**Test Plot 9#: GSM 1900\_Head Left Cheek\_Middle****DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used: 1880 MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.140 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.912 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.157 W/kg

**SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.133 W/kg

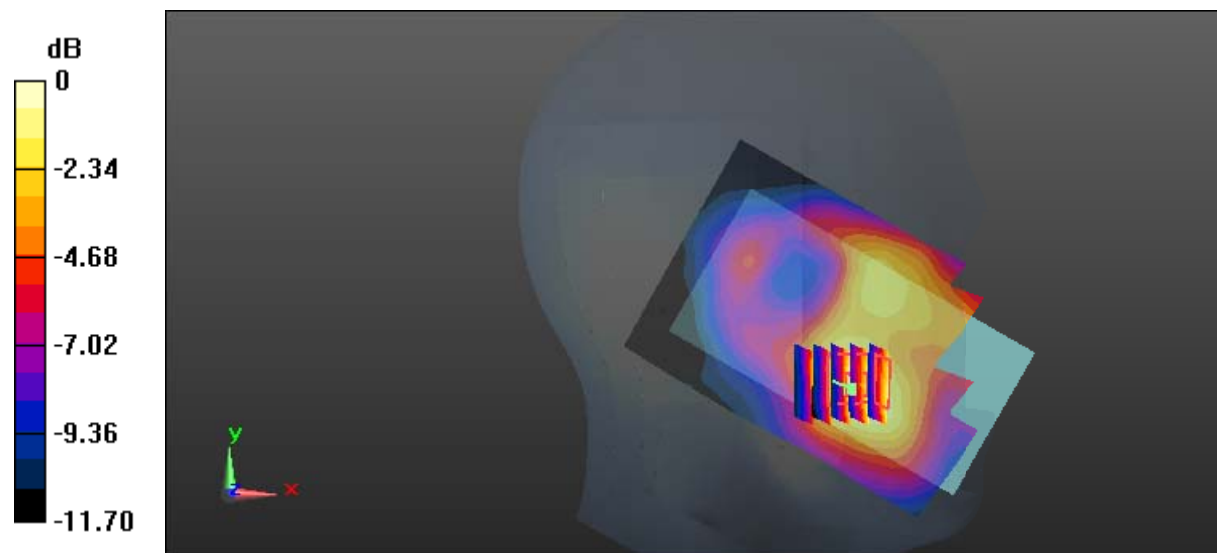

0 dB = 0.133 W/kg = -8.76 dBW/kg

**Test Plot 10#: GSM 1900\_Head Left Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0606 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.947 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0720 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0607 W/kg

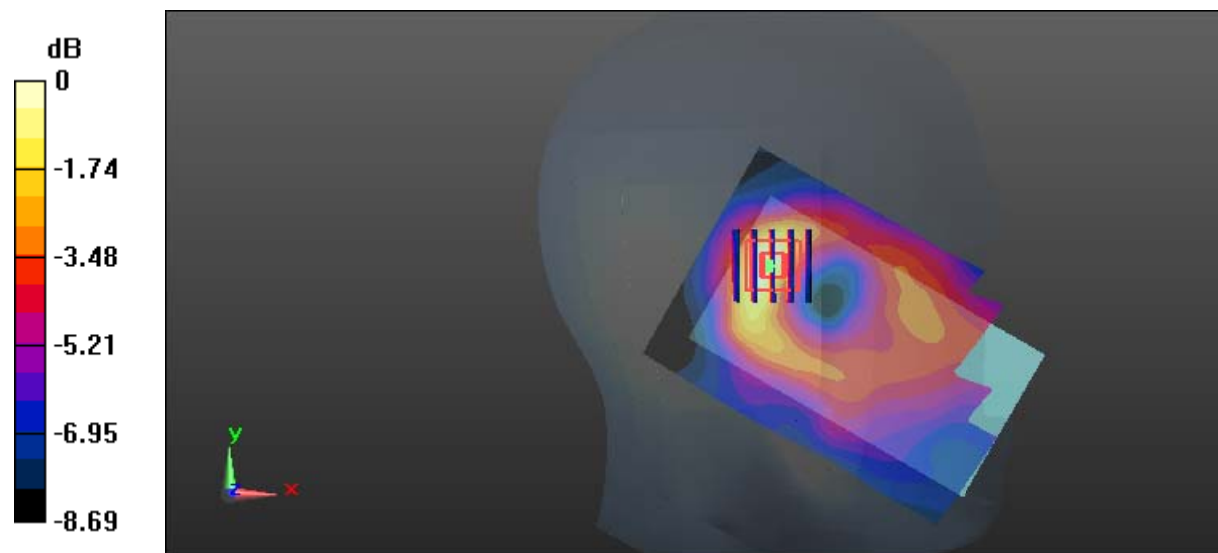

0 dB = 0.0607 W/kg = -12.17 dBW/kg

**Test Plot 11#: GSM 1900\_Head Right Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395 \text{ S/m}$ ;  $\epsilon_r = 38.961$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.182 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 3.592 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

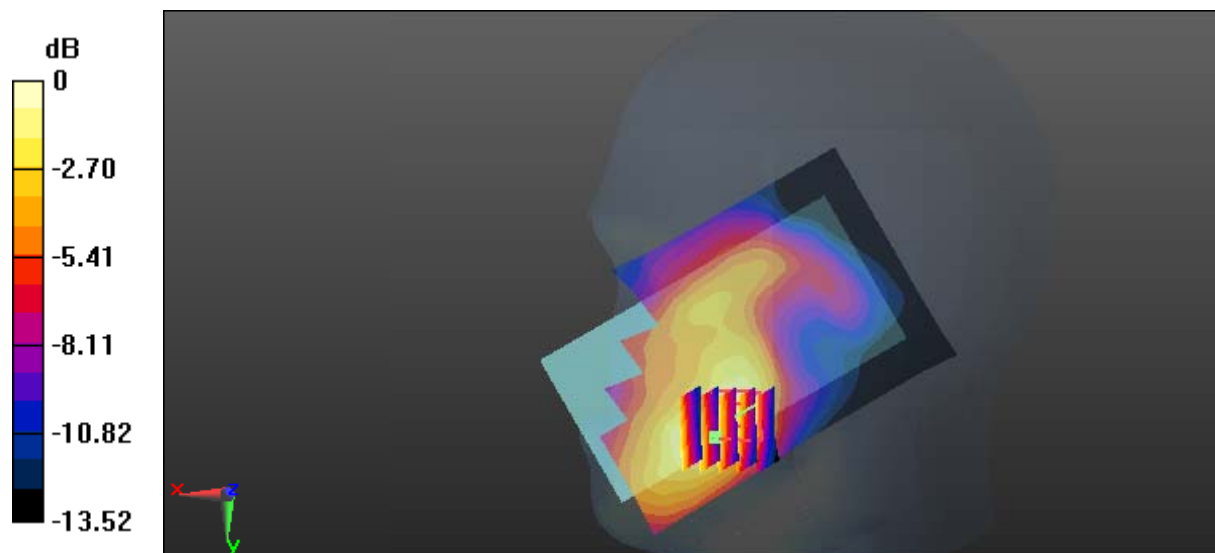

0 dB = 0.175 W/kg = -7.57 dBW/kg

**Test Plot 12#: GSM 1900\_Head Right Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395 \text{ S/m}$ ;  $\epsilon_r = 38.961$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0767 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.728 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0732 W/kg

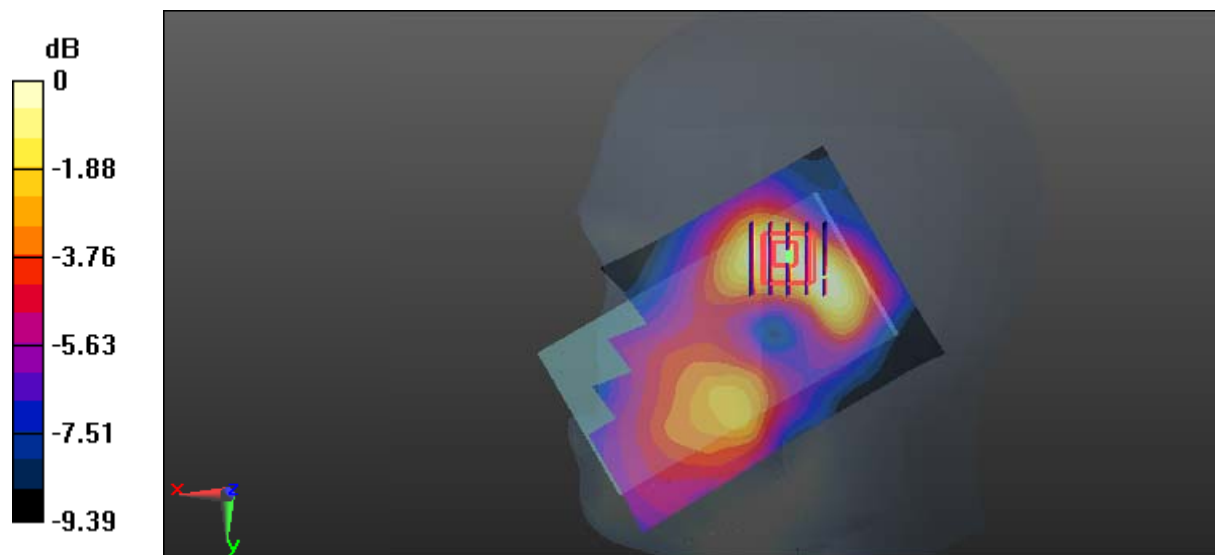

0 dB = 0.0732 W/kg = -11.35 dBW/kg

**Test Plot 13#: GSM 1900\_Body Worn Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.597$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.343 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.023 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.439 W/kg

**SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.349 W/kg

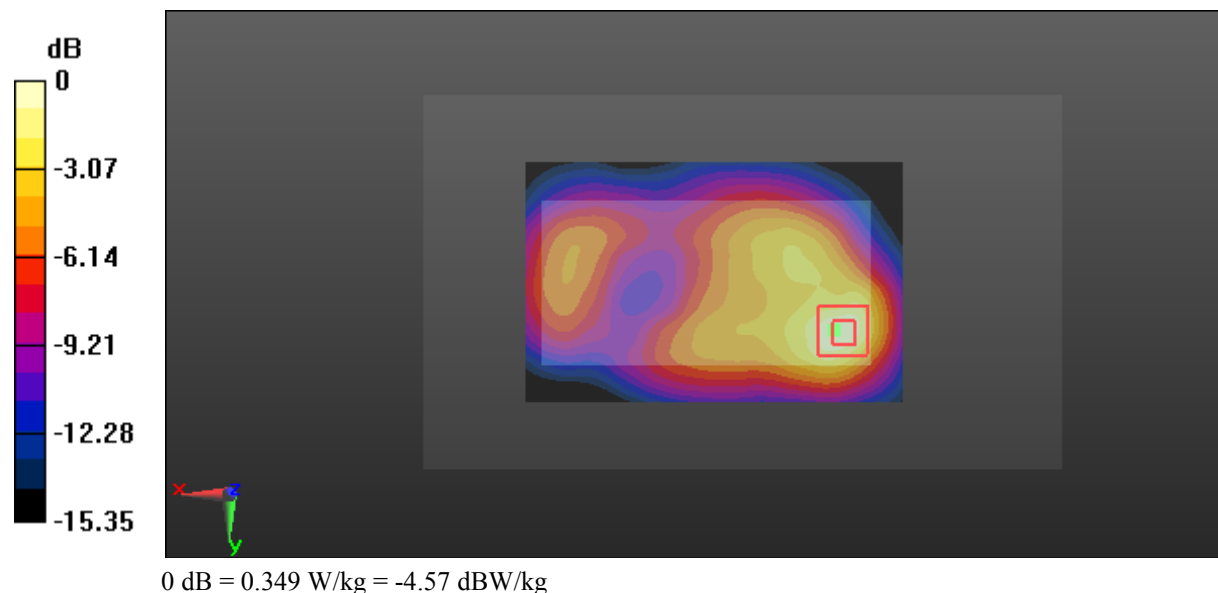

**Test Plot 14#: GSM 1900\_Body Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.597$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.642 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.766 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.219 W/kg**

Maximum value of SAR (measured) = 0.605 W/kg

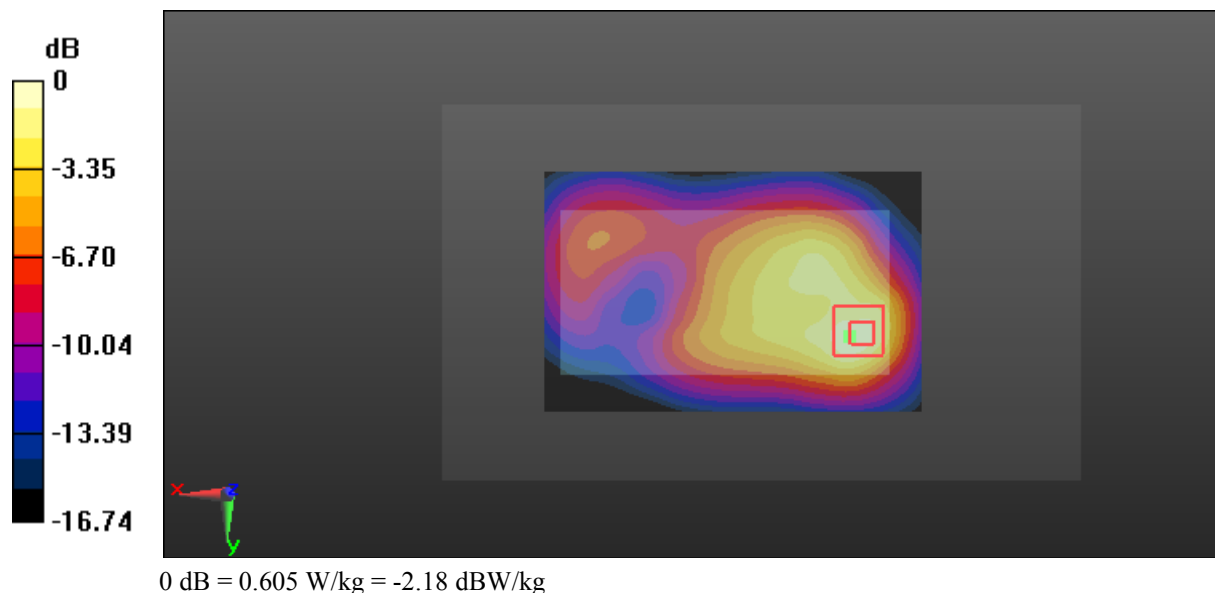

**Test Plot 15#: GSM 1900\_Body Right\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514 \text{ S/m}$ ;  $\epsilon_r = 52.597$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.971 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.183 W/kg

**SAR(1 g) = 0.106 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

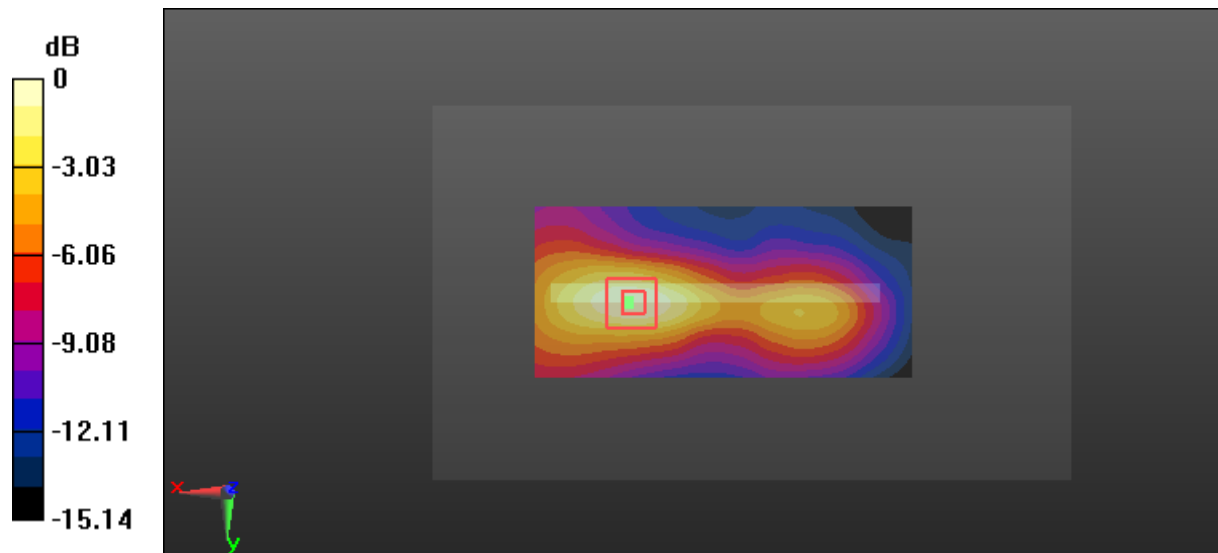

0 dB = 0.156 W/kg = -8.07 dBW/kg

**Test Plot 16#: GSM 1900\_Body Bottom\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: GPRS-4 slots; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.597$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.499 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.67 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.632 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.534 W/kg

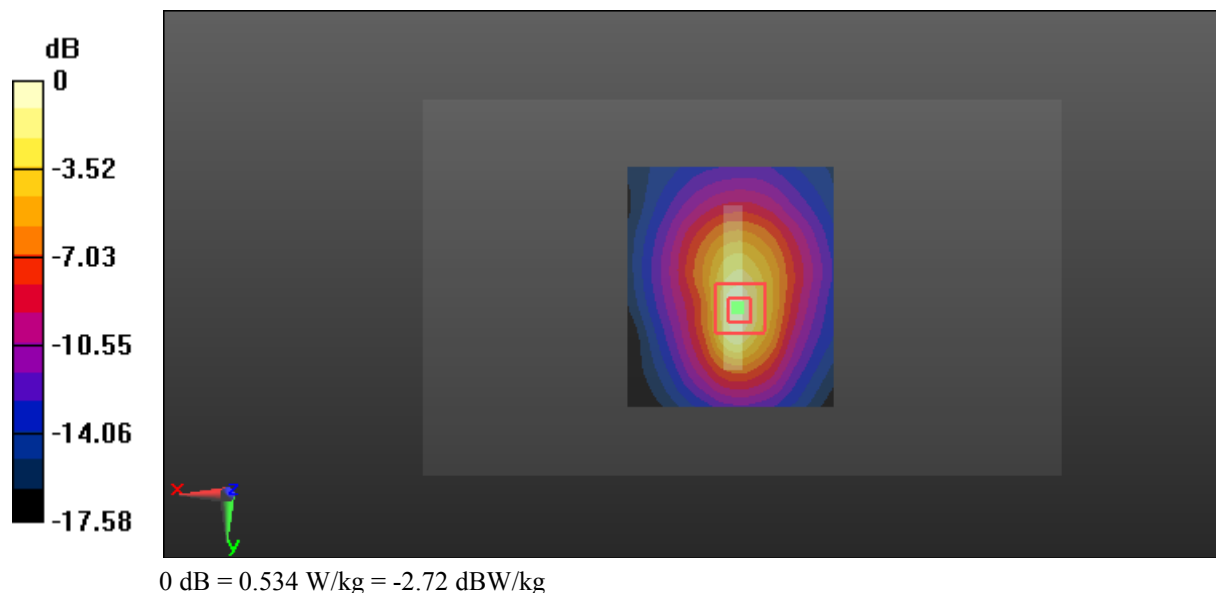



**Test Plot 17#: WCDMA Band 2\_Head Left Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.302 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.632 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.341 W/kg

**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

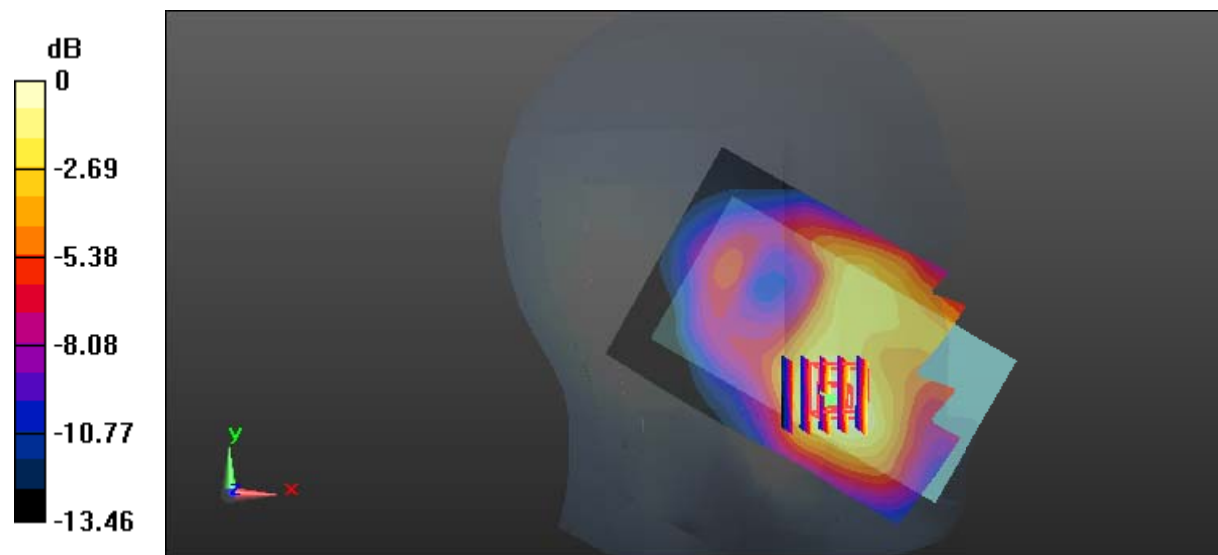

0 dB = 0.287 W/kg = -5.42 dBW/kg

**Test Plot 18#: WCDMA Band 2\_Head Left Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.120 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.123 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.152 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.051 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

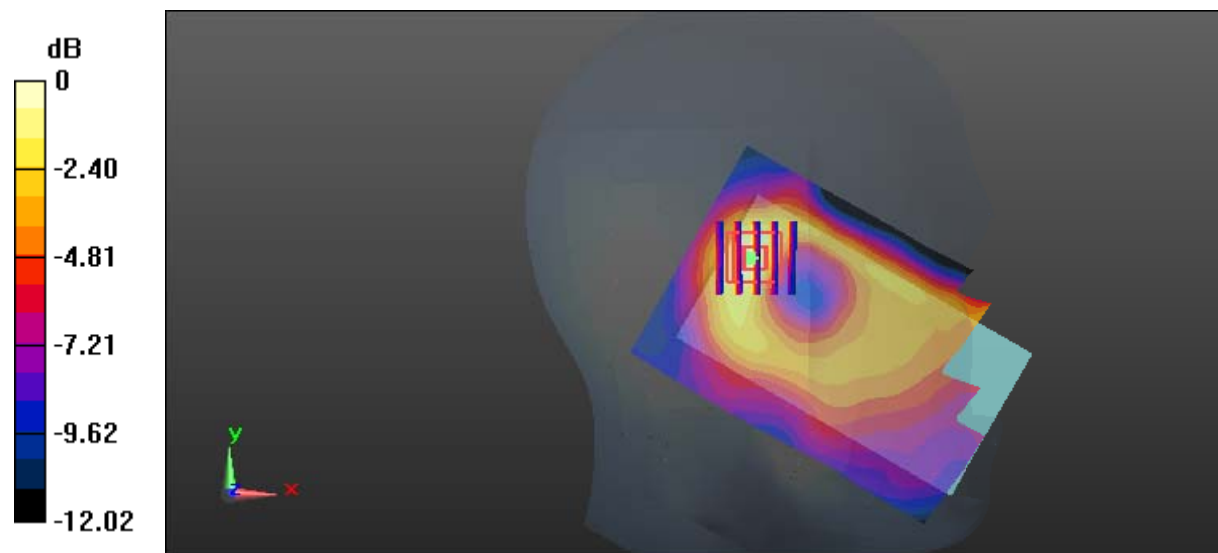

0 dB = 0.128 W/kg = -8.93 dBW/kg

**Test Plot 19#: WCDMA Band 2\_Head Right Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395$  S/m;  $\epsilon_r = 38.961$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.427 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 5.281 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 0.462 W/kg

**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (measured) = 0.395 W/kg

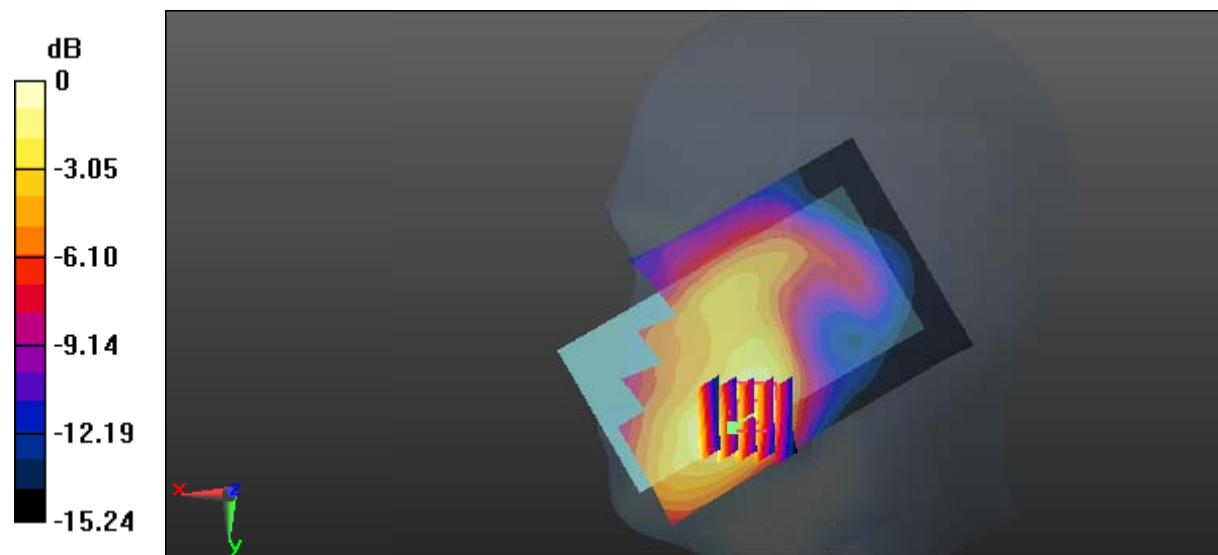

0 dB = 0.395 W/kg = -4.03 dBW/kg

**Test Plot 20#: WCDMA Band 2\_Head Right Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.395 \text{ S/m}$ ;  $\epsilon_r = 38.961$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.48, 8.48, 8.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.346 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.179 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

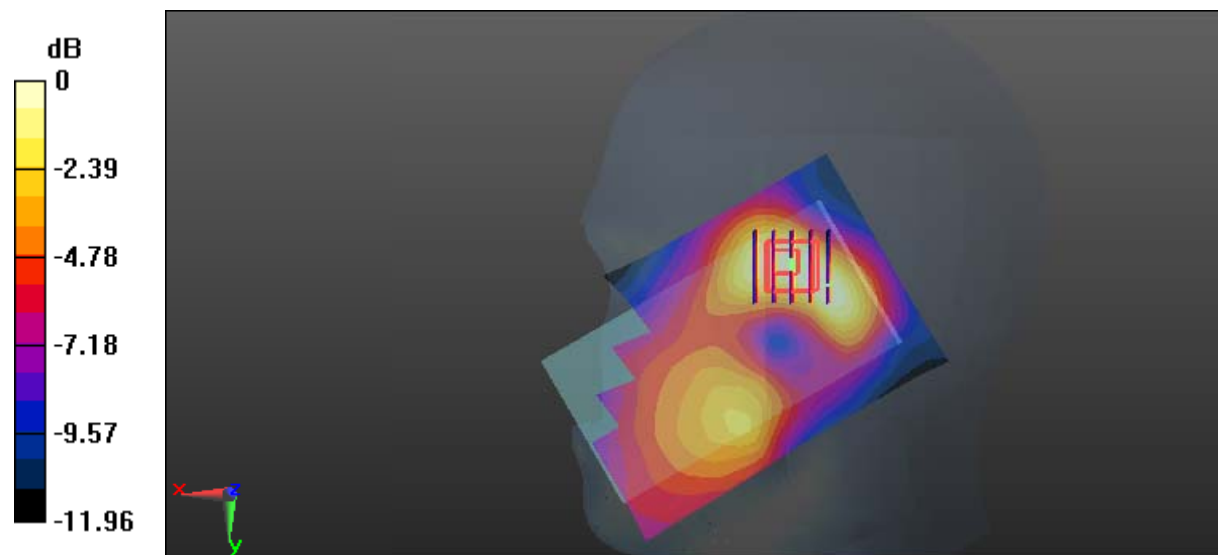

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 21#: WCDMA Band 2\_Body Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.597$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.05 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 15.78 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.655 W/kg; SAR(10 g) = 0.350 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

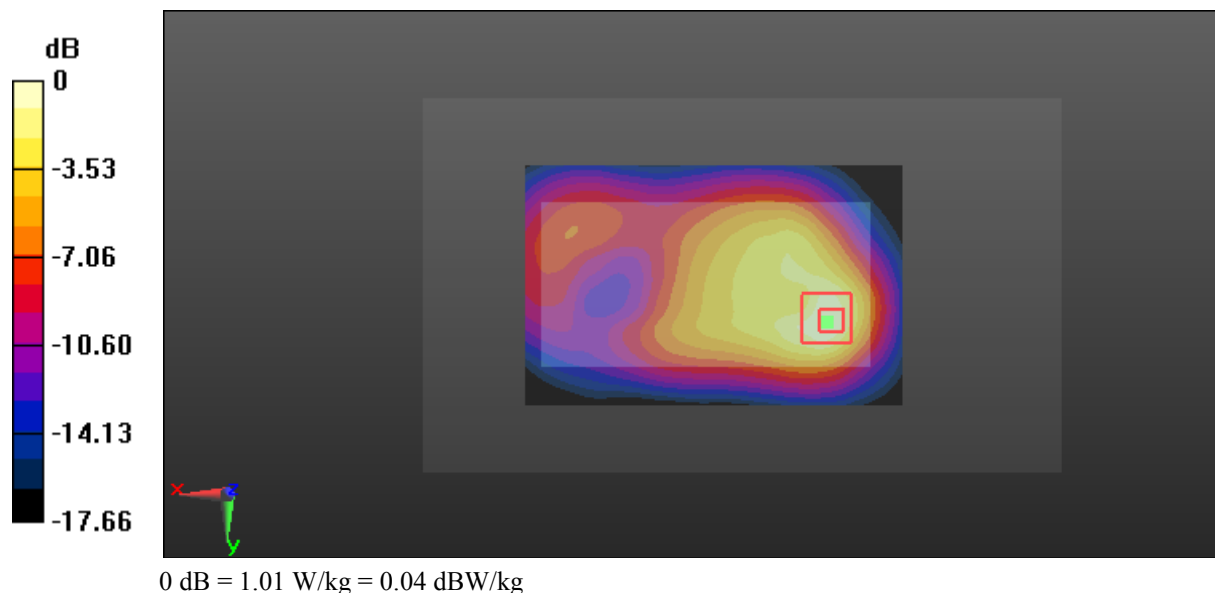

**Test Plot 22#: WCDMA Band 2\_Body Right\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 52.597$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.266 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.357 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.101 W/kg**

Maximum value of SAR (measured) = 0.264 W/kg

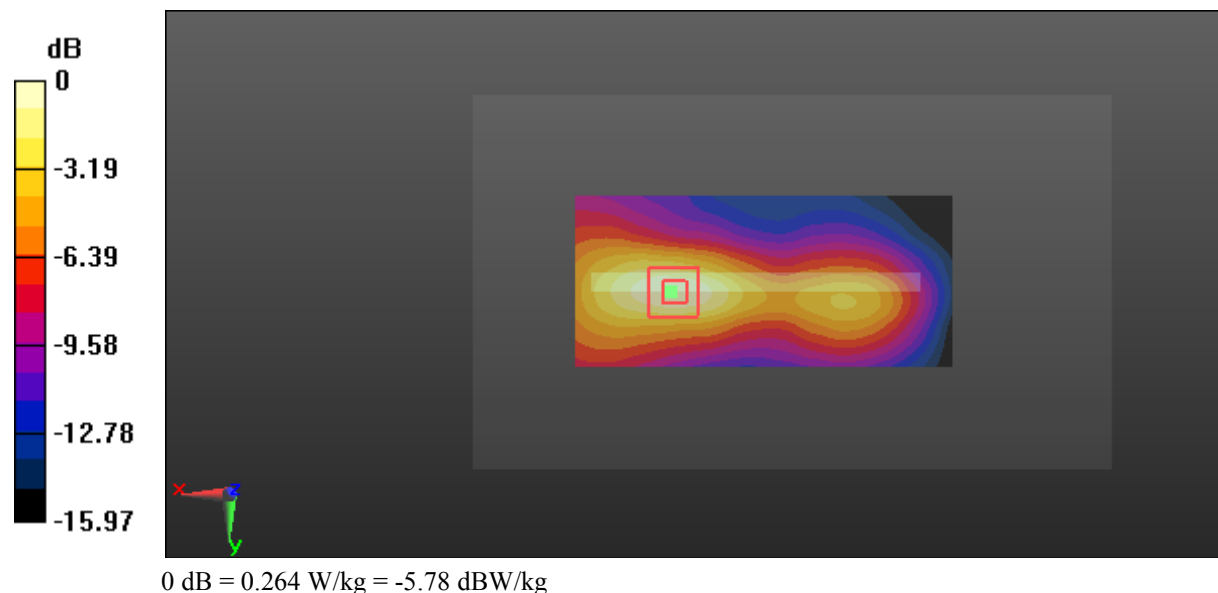

**Test Plot 23#: WCDMA Band 2\_Body Bottom\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.514 \text{ S/m}$ ;  $\epsilon_r = 52.597$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.95, 7.95, 7.95); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.931 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.91 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.336 W/kg**

Maximum value of SAR (measured) = 0.982 W/kg

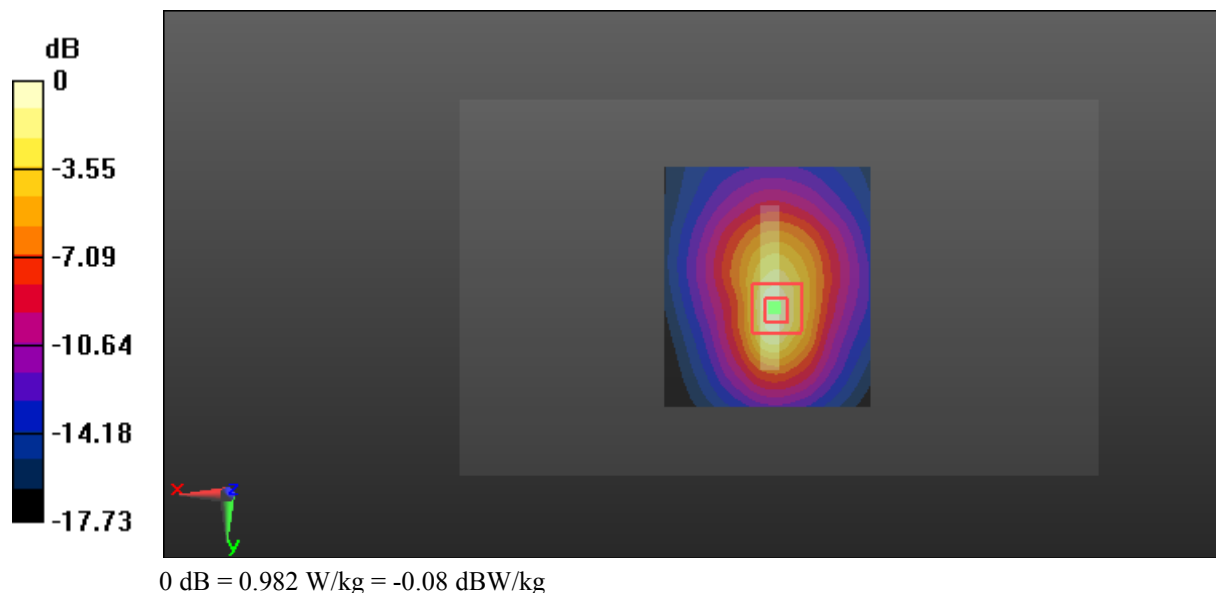

**Test Plot 24#: WCDMA Band 5\_Head Left Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.247 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.623 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.243 W/kg

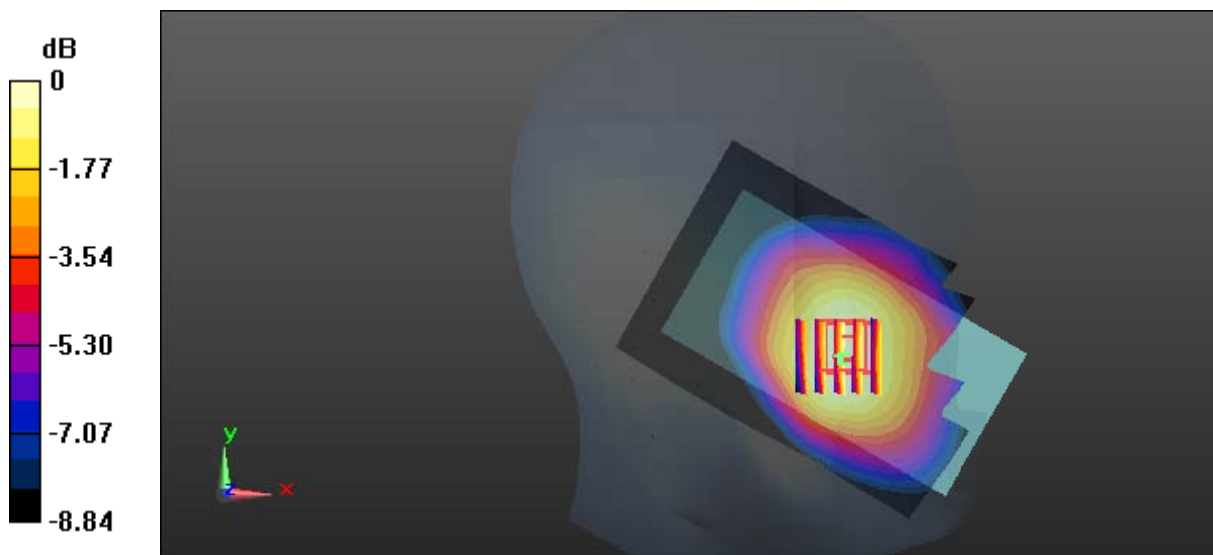

0 dB = 0.243 W/kg = -6.14 dBW/kg



**Test Plot 25#: WCDMA Band 5\_Head Left Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.133 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.609 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

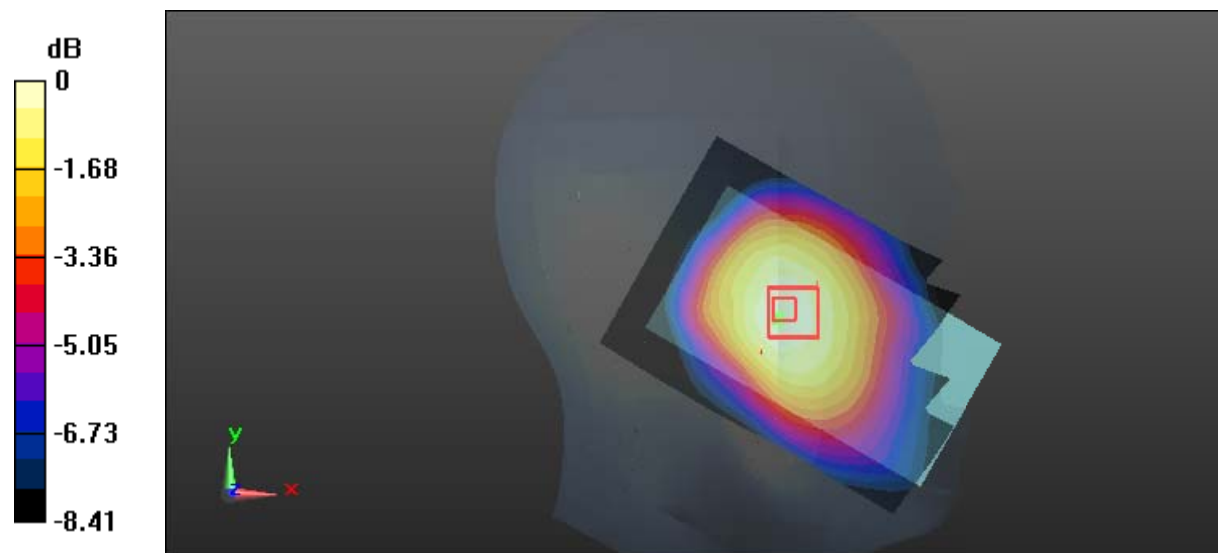

0 dB = 0.134 W/kg = -8.73 dBW/kg

**Test Plot 26#: WCDMA Band 5\_Head Right Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.061 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.160 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

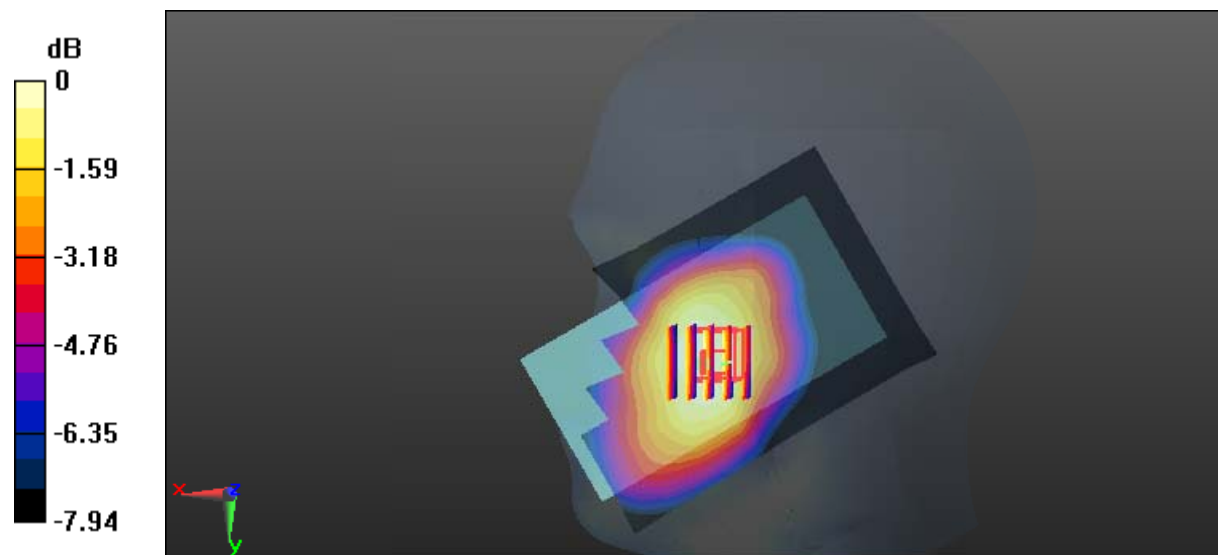

0 dB = 0.237 W/kg = -6.25 dBW/kg

**Test Plot 27#: WCDMA Band 5\_Head Right Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System:WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.896$  S/m;  $\epsilon_r = 40.83$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.22, 10.22, 10.22); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.053 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.142 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

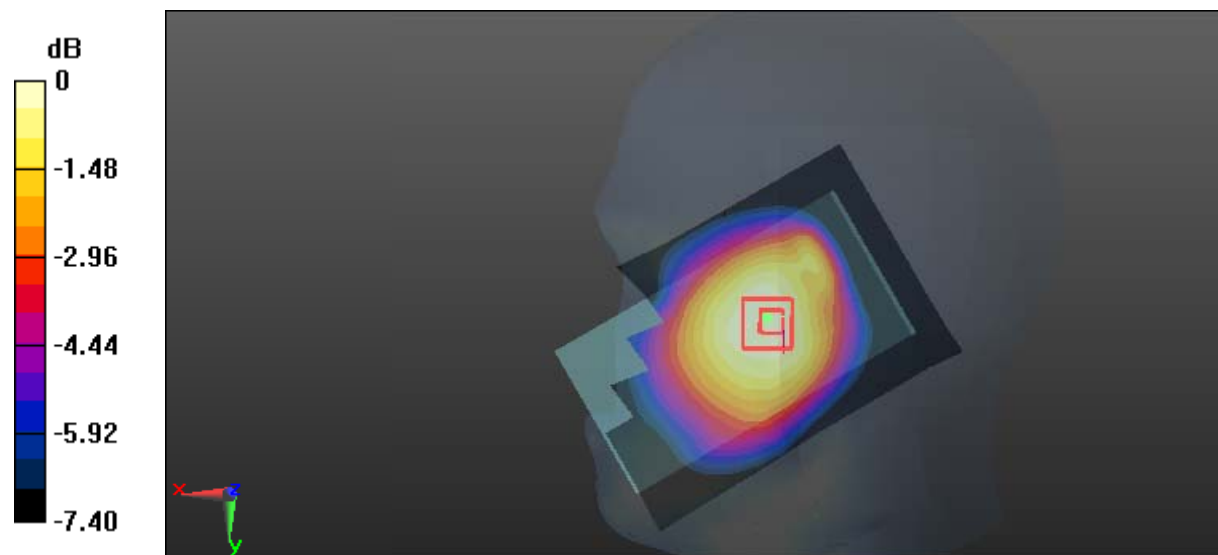

0 dB = 0.134 W/kg = -8.73 dBW/kg

**Test Plot 28#: WCDMA Band 5\_Body Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.390 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.61 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.417 W/kg

**SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (measured) = 0.391 W/kg

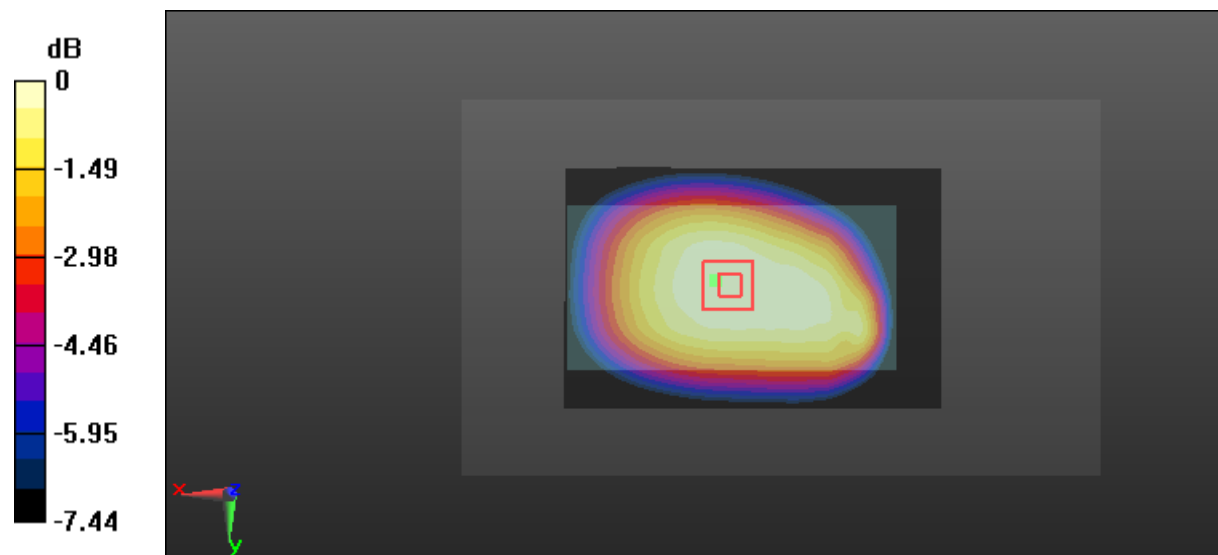

0 dB = 0.391 W/kg = -4.08 dBW/kg

**Test Plot 29#: WCDMA Band 5\_Body Right\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.19 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.374 W/kg

**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.338 W/kg

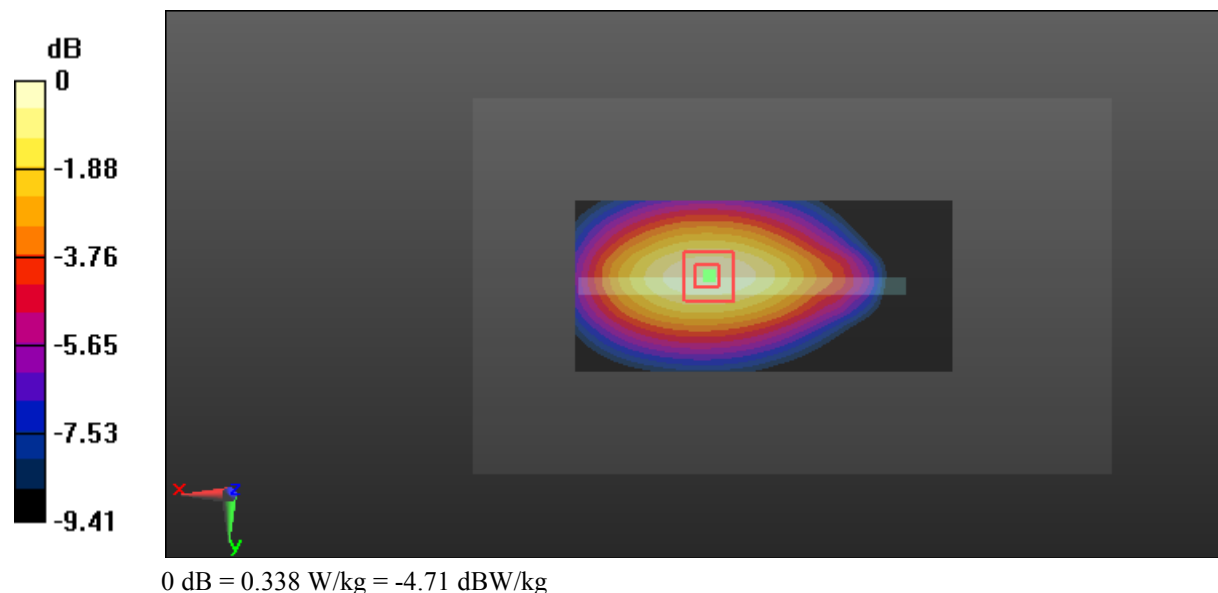

**Test Plot 30#: WCDMA Band 5\_Body Bottom\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.981$  S/m;  $\epsilon_r = 55.297$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7441; ConvF(9.85, 9.85, 9.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.221 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 12.11 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.215 W/kg

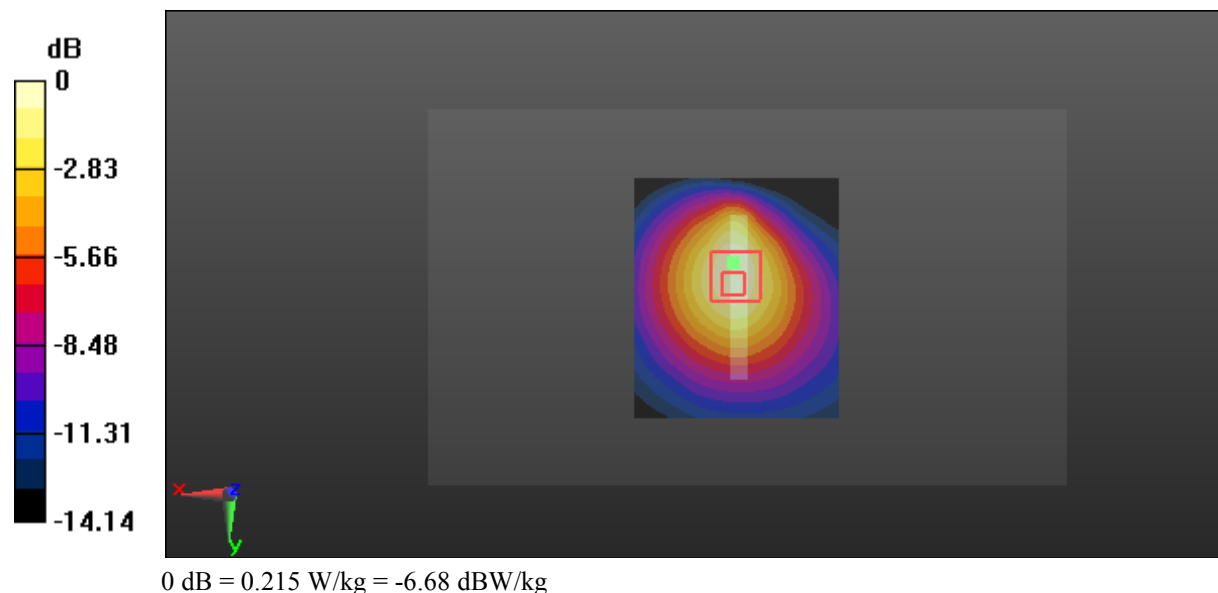

**Test Plot 31#: WLAN 2.4G\_Head Left Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.799 \text{ S/m}$ ;  $\epsilon_r = 40.267$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.85, 7.85, 7.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.484 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.85 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.540 W/kg  
**SAR(1 g) = 0.324 W/kg; SAR(10 g) = 0.189 W/kg**  
 Maximum value of SAR (measured) = 0.455 W/kg

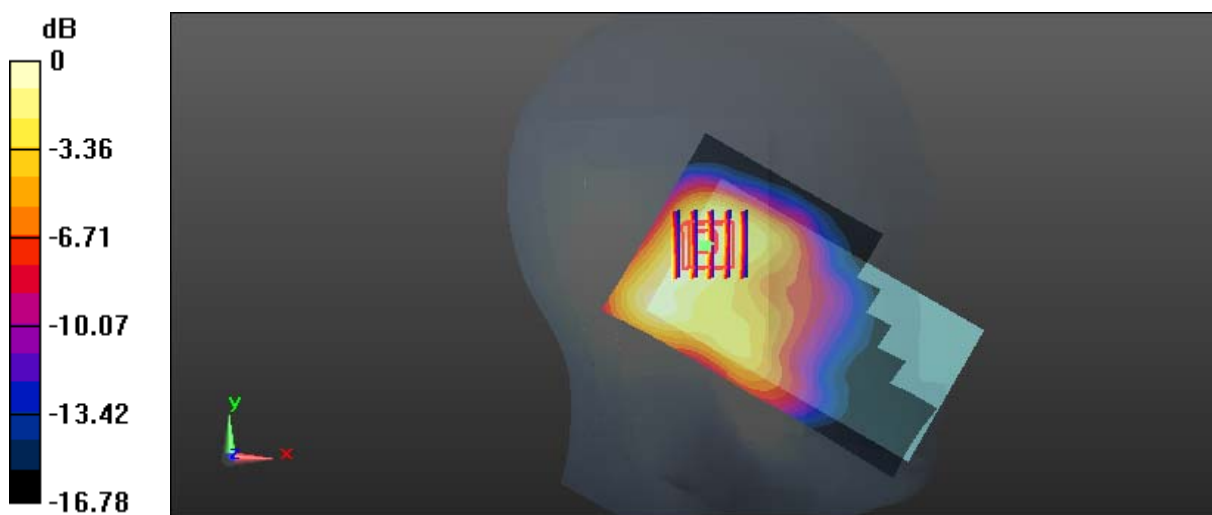

0 dB = 0.455 W/kg = -3.42 dBW/kg

**Test Plot 32#: WLAN 2.4G\_Head Left Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.799 \text{ S/m}$ ;  $\epsilon_r = 40.267$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.85, 7.85, 7.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.697 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.20 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.810 W/kg  
**SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.241 W/kg**  
 Maximum value of SAR (measured) = 0.675 W/kg

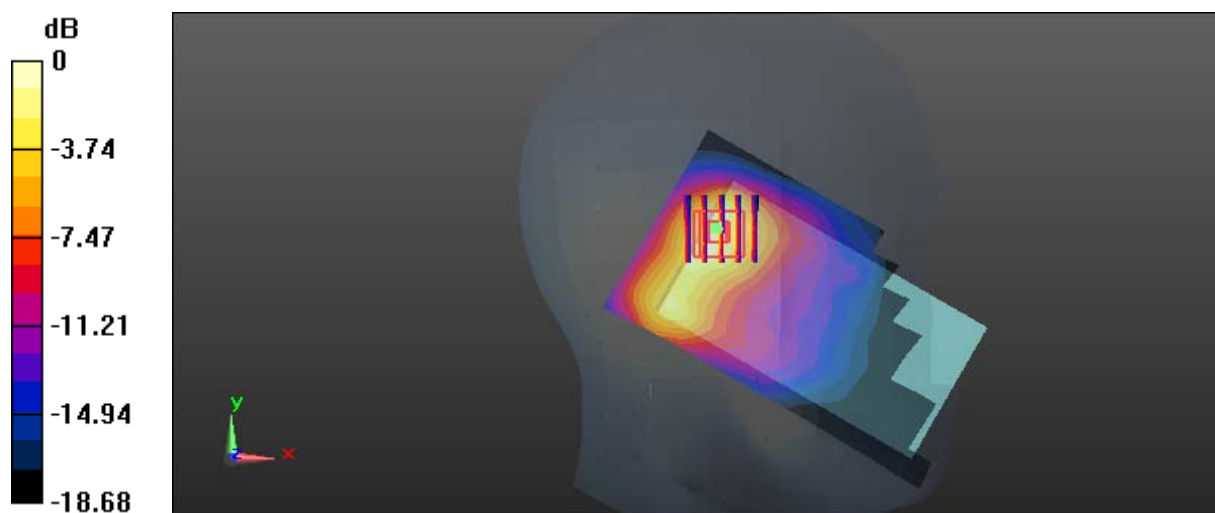

0 dB = 0.675 W/kg = -1.71 dBW/kg



**Test Plot 33#: WLAN 2.4G\_Head Right Cheek\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.799 \text{ S/m}$ ;  $\epsilon_r = 40.267$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.85, 7.85, 7.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.33 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.19 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 1.58 W/kg  
**SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.392 W/kg**  
 Maximum value of SAR (measured) = 1.28 W/kg

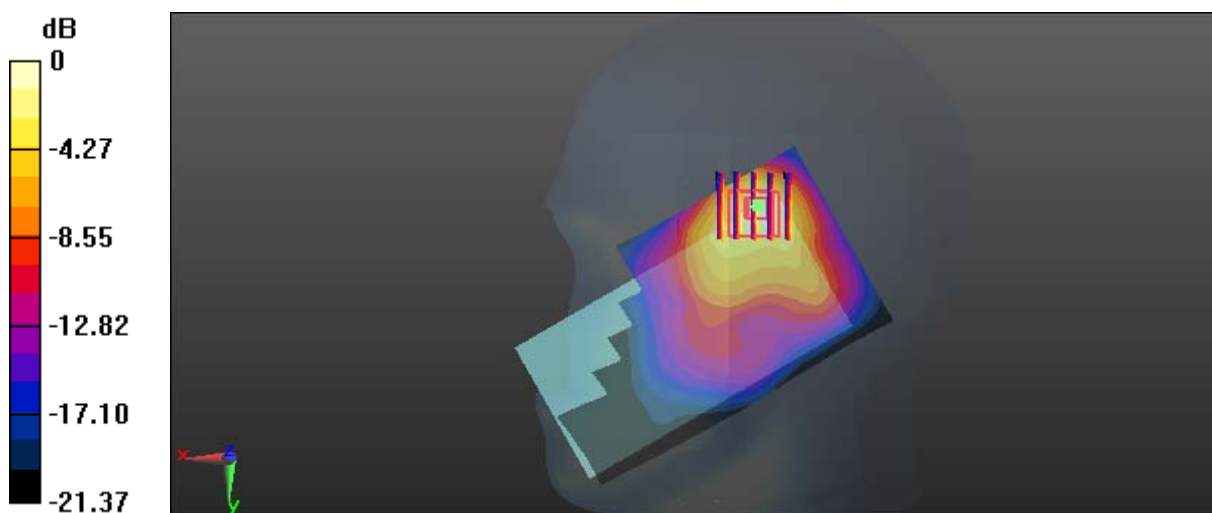

0 dB = 1.28 W/kg = 1.07 dBW/kg

**Test Plot 34#: WLAN 2.4G\_Head Right Tilt\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.799 \text{ S/m}$ ;  $\epsilon_r = 40.267$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.85, 7.85, 7.85); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.08 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.35 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 1.35 W/kg  
**SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.303 W/kg**  
 Maximum value of SAR (measured) = 1.02 W/kg

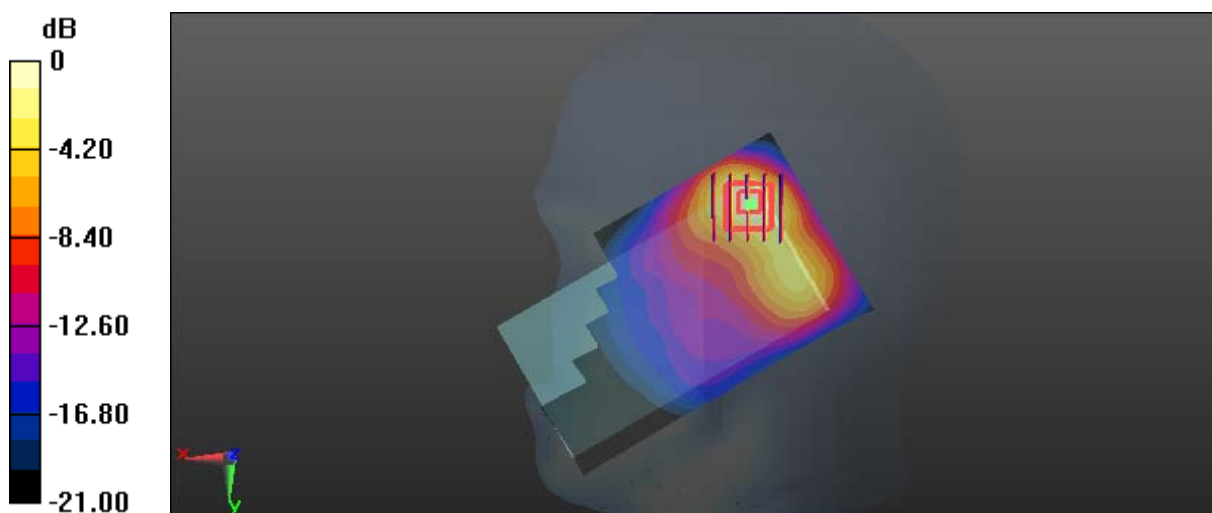

0 dB = 1.02 W/kg = 0.09 dBW/kg

**Test Plot 35#: WLAN 2.4G\_Body Back\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.954 \text{ S/m}$ ;  $\epsilon_r = 54.352$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.244 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.746 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.288 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.066 W/kg**  
 Maximum value of SAR (measured) = 0.221 W/kg

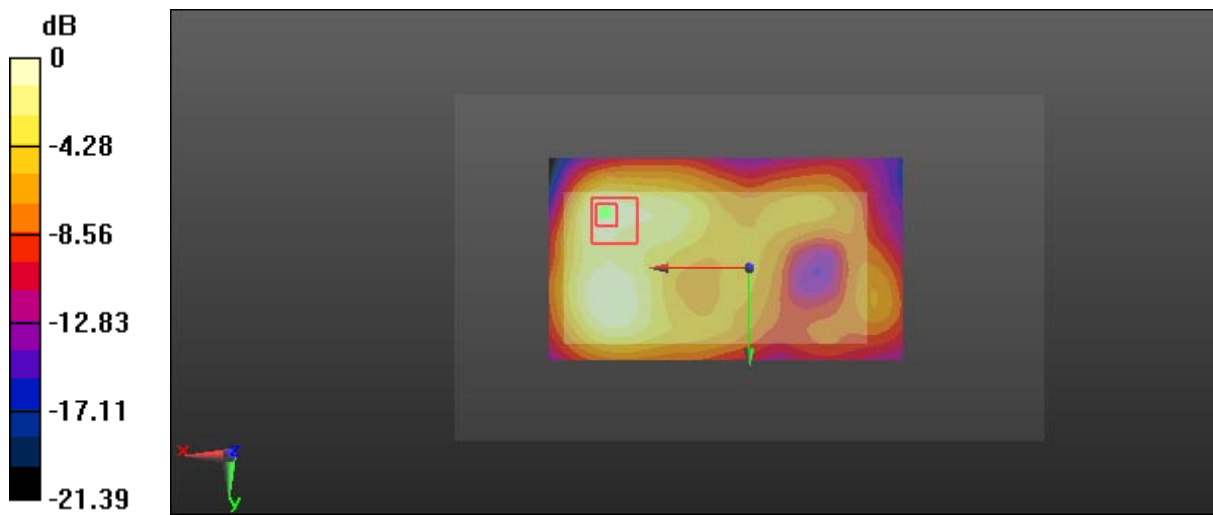

0 dB = 0.221 W/kg = -6.56 dBW/kg

**Test Plot 36#: WLAN 2.4G\_Body Left\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.954 \text{ S/m}$ ;  $\epsilon_r = 54.352$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.210 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.058 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.245 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.192 W/kg

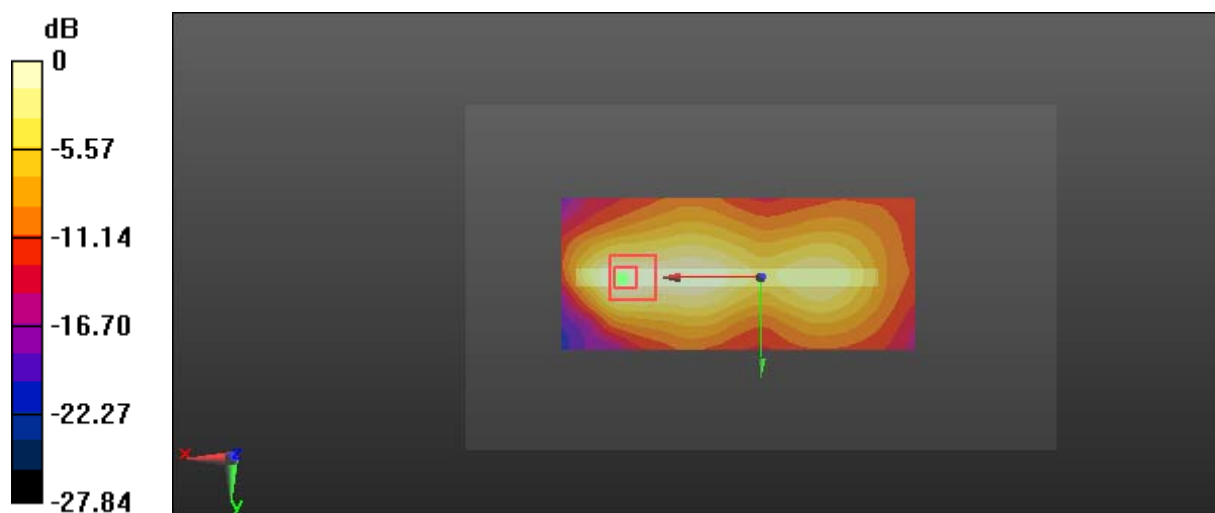

0 dB = 0.192 W/kg = -7.17 dBW/kg

**Test Plot 37#: WLAN 2.4G\_Body Top\_Middle**

**DUT: Mobile phone; Type: SHOOT 2; Serial: 17031680120**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.954 \text{ S/m}$ ;  $\epsilon_r = 54.352$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.182 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.318 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.178 W/kg

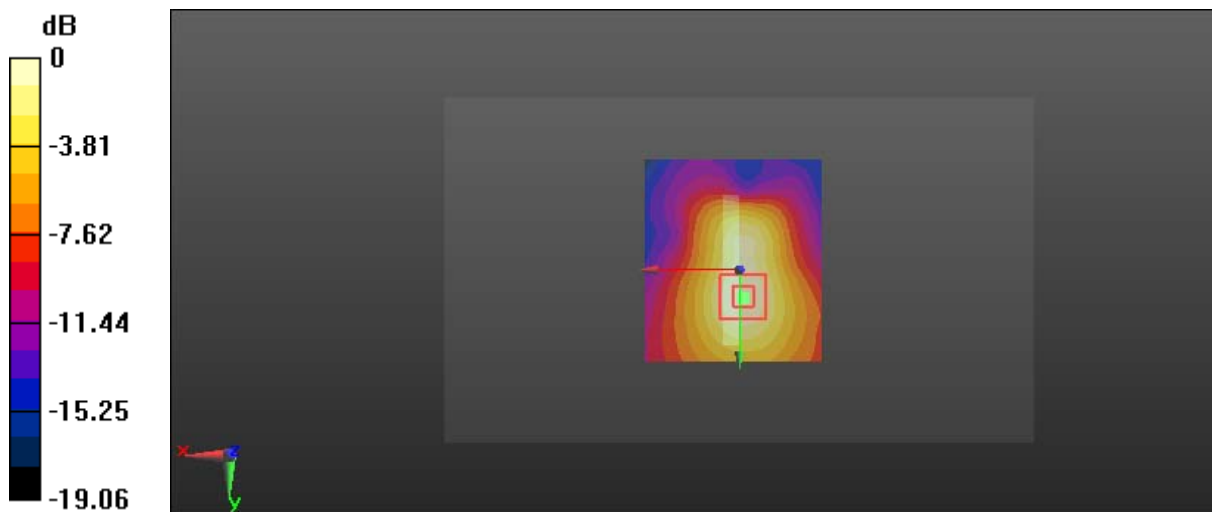

0 dB = 0.178 W/kg = -7.50 dBW/kg