

# TEST REPORT

**Reference No.**..... : WTS15S0627744E  
**FCC ID** ..... : 2ADTE-Y100  
**Applicant**..... : Shenzhen KVD Communication Equipment  
**Address**..... : 13C, Block C, Shenzhen Electronic Technology Building, Shennan Middle Road, Futian District, Shenzhen City, China  
**Manufacturer** ..... : The same as above  
**Address**..... : The same as above  
**Product Name**..... : mobile phone  
**Model No.**..... : VALENCIA2 Y100  
**Brand**..... : DOOGEE  
**Standards** ..... : FCC PART15 SUBPART B: 2014  
**Date of Receipt sample** .... : Jun,04, 2015  
**Date of Test** ..... : Jun.05, 2015 – Jun,15, 2015  
**Date of Issue**..... : Jun.16, 2015  
**Test Result**..... : Pass

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

## 1 Test Summary

Test Item	Test Requirement	Class	Test Method	Test Result
Power Line Conducted Emission (150kHz to 30MHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass
Radiated Emission 30MHz to 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass
Radiated Emission (Above 1GHz)	FCC PART 15, SUBPART B: 2014	Class B	ANSI C63.4: 2003	Pass

Remark:

Pass Test item meets the requirement

Fail Test item does not meet the requirement

N/A Test case does not apply to the test object

## 2 Contents

Page

	<b>COVER PAGE</b> .....	<b>1</b>
<b>1</b>	<b>TEST SUMMARY</b> .....	<b>2</b>
<b>2</b>	<b>CONTENTS</b> .....	<b>3</b>
<b>3</b>	<b>GENERAL INFORMATION</b> .....	<b>4</b>
3.1	GENERAL DESCRIPTION OF E.U.T.....	4
3.2	DETAILS OF E.U.T.....	4
3.3	STANDARDS APPLICABLE FOR TESTING .....	4
3.4	TEST FACILITY .....	5
3.5	SUBCONTRACTED .....	5
3.6	ABNORMALITIES FROM STANDARD CONDITIONS .....	5
<b>4</b>	<b>EQUIPMENT USED DURING TEST</b> .....	<b>6</b>
4.1	EQUIPMENT LIST.....	6
4.2	DESCRIPTION OF SUPPORT UNITS.....	7
4.3	MEASUREMENT UNCERTAINTY.....	7
<b>5</b>	<b>EMISSION TEST RESULTS</b> .....	<b>8</b>
5.1	POWER LINE CONDUCTED EMISSION, 150KHZ TO 30MHZ .....	8
5.2	RADIATION EMISSION, 30MHZ TO 1000MHZ.....	11
5.3	RADIATION EMISSION, ABOVE 1000MHZ.....	14
<b>6</b>	<b>PHOTOGRAPHS – TEST SETUP</b> .....	<b>17</b>
6.1	PHOTOGRAPH –POWER LINE CONDUCTED EMISSION TEST SETUP AT TEST SITE 2#.....	17
6.2	PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR 30~1000MHZ AT TEST SITE 2#.....	17
6.3	PHOTOGRAPH – RADIATED EMISSION TEST SETUP FOR ABOVE 1GHZ AT TEST SITE 1#.....	18
<b>7</b>	<b>PHOTOGRAPHS - CONSTRUCTIONAL DETAILS</b> .....	<b>19</b>
7.1	EXTERNAL VIEW .....	19
7.2	INTERNAL PHOTOS .....	24

### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: VALENCIA2 Y100
Model Description	: N/A
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS Class	: 12
EDGE	: N/A
WCDMA Band(s)	: FDD Band I/II/V
Wi-Fi Specification	: 802.11b/g/n HT20/n HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: S316-W05
Software Version	: DOOGEE-Valencia2-Y100-Android4.4-V01

#### 3.2 Details of E.U.T.

Technical Data	: Battery DC 3.8V, 2200mAh C 5V,1.0A, Charging form adapter ( Adapter Input:100-240V~50/60Hz, 0.16A )
Adapter	:: Manufacture: DOOGEE Model No.: TN-050100U2

#### 3.3 Standards Applicable for Testing

The tests were performed according to following standards:

FCC PART 15, SUBPART B: Electronic Code of Federal Regulations- Unintentional Radiators 2014

### 3.4 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services (Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

- 

### 3.5 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab:      N/A

Lab address: N/A

Test items:    N/A

### 3.6 Abnormalities from Standard Conditions

None.

## 4 Equipment Used during Test

### 4.1 Equipment List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2014	Sep.14,2015
2.	LISN	R&S	ENV216	101215	Sep.15,2014	Sep.14,2015
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2014	Sep.14,2015
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2014	Sep.14,2015
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2014	Sep.14,2015
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.15,2014	Sep.14,2015
4.	Cable	LARGE	RF300	-	Sep.15,2014	Sep.14,2015
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2014	Sep.14,2015
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2015	Apr.18,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2014	Sep.14,2015
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2015	Apr.18,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2015	Apr.18,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2015	Mar.16,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2015	Apr.09,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2014	Sep.14,2015
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2014	Sep.14,2015
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2014	Sep.14,2015

4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2014	Sep.14,2015
<b>RF Conducted Testing</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2014	Sep.14,2015
2.	Spectrum Analyzer (9k~6GHz)	R&S	FSL6	100959	Sep.15,2014	Sep.14,2015
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2014	Sep.14,2015

#### 4.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
MacBook Air	APPLE	A1465	C17KTQDNF5N7

#### 4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±3.64dB	(1)
Radiation Emission	30MHz~1000MHz	±5.03dB	(1)
	1GHz~6GHz	±5.47dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

## 5 Emission Test Results

### 5.1 Power Line Conducted Emission, 150kHz to 30MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result..... : Pass  
 Frequency Range ..... : 150kHz to 30MHz  
 Class ..... : Class B  
 Limit ..... :

Frequency (MHz)	Limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 t 5	56	46
5 to 30	60	50

#### 5.1.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 23°C  
 Humidity ..... : 53.6%RH  
 Atmospheric Pressure..... : 101kPa

EUT Operation:

Input Voltage..... : DC 5V by Adapter Input AC 120V/50Hz  
 Operating Mode ..... : Data transmitting  
 Remark ..... : The worse case(Data transmitting mode) is under the condition of AC 120V/50Hz adapter input and the data is shown as follow.

#### 5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the ANSI C63.4 .

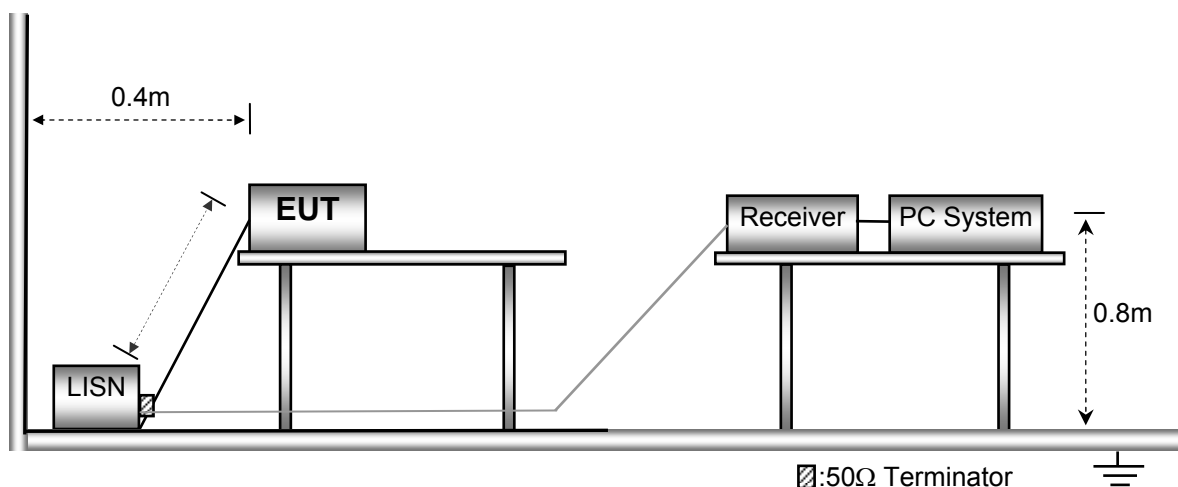




### 5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line. According to the data in section 5.1.4, the EUT complied with the FCC PART 15, SUBPART B standards.


### 5.1.4 Power Line Conducted Emission Test Data

Live Line:

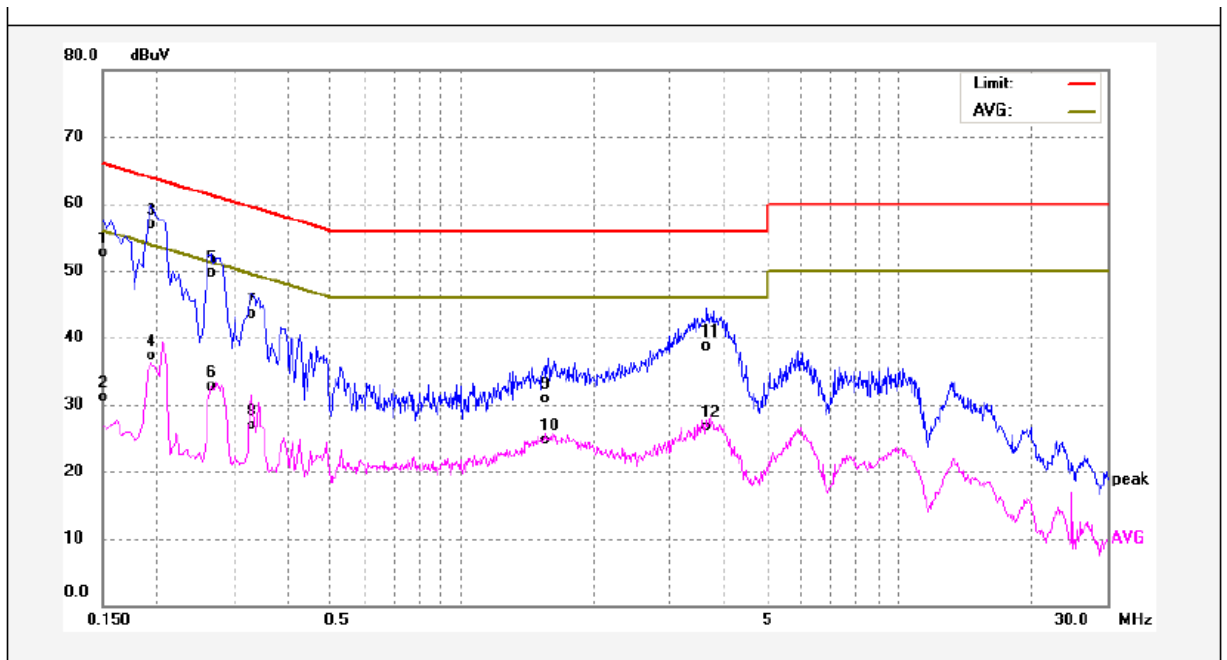

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	42.61	10.10	52.71	65.99	-13.28	QP	
2	0.1500	21.10	10.10	31.20	55.99	-24.79	AVG	
3	0.1940	46.83	10.10	56.93	63.86	-6.93	QP	
4	0.1940	27.20	10.10	37.30	53.86	-16.56	AVG	
5	0.2660	39.69	10.10	49.79	61.24	-11.45	QP	
6	0.2660	22.52	10.10	32.62	51.24	-18.62	AVG	
7	0.3300	33.43	10.11	43.54	59.45	-15.91	QP	
8	0.3300	16.87	10.11	26.98	49.45	-22.47	AVG	
9	1.5740	20.70	10.20	30.90	56.00	-25.10	QP	
10	1.5740	14.54	10.20	24.74	46.00	-21.26	AVG	
11	3.6300	28.56	10.22	38.78	56.00	-17.22	QP	
12	3.6300	16.49	10.22	26.71	46.00	-19.29	AVG	

Neutral Line:

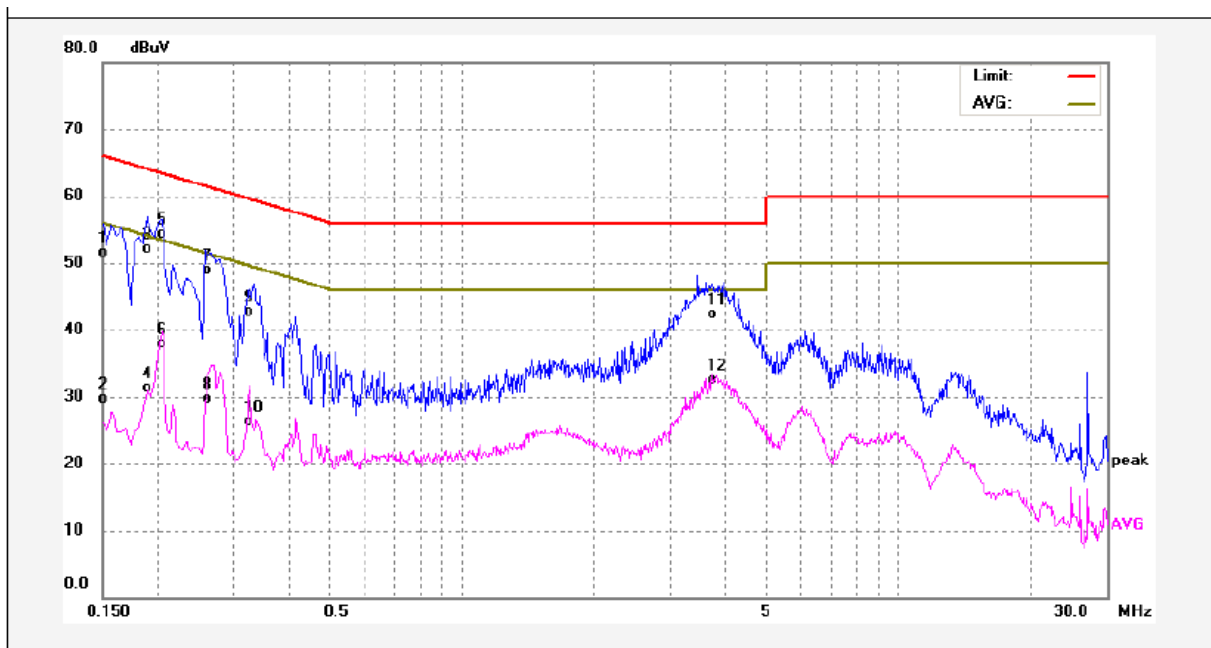

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	41.45	10.10	51.55	65.99	-14.44	QP	
2	0.1500	19.60	10.10	29.70	55.99	-26.29	AVG	
3	0.1900	42.07	10.10	52.17	64.03	-11.86	QP	
4	0.1900	21.17	10.10	31.27	54.03	-22.76	AVG	
5	0.2060	44.25	10.10	54.35	63.36	-9.01	QP	
6	0.2060	27.90	10.10	38.00	53.36	-15.36	AVG	
7	0.2580	38.76	10.10	48.86	61.49	-12.63	QP	
8	0.2580	19.53	10.10	29.63	51.49	-21.86	AVG	
9	0.3260	32.55	10.11	42.66	59.55	-16.89	QP	
10	0.3260	16.19	10.11	26.30	49.55	-23.25	AVG	
11	3.7500	32.04	10.22	42.26	56.00	-13.74	QP	
12	3.7500	22.26	10.22	32.48	46.00	-13.52	AVG	

### 5.2 Radiation Emission, 30MHz to 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result ..... : Pass  
 Frequency Range ..... : 30MHz to 1000MHz  
 Class. : Class B  
 Limit..... :

Frequency (MHz)	Distance (Meter)	Limit (dB $\mu$ V/m
		Qu si-peak
30 to 88	3	40
88 to 216	3	43.5
216 to 960	3	46
960 to 1000	3	54

#### 5.2.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.5°C  
 Humidity ..... : 52.6%RH  
 Atmospheric Pressure..... : 101.2kPa

EUT Operation:

Input Voltage ..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting  
 Remark ..... : The worse case(Data transmitting mode) is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 5.2.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

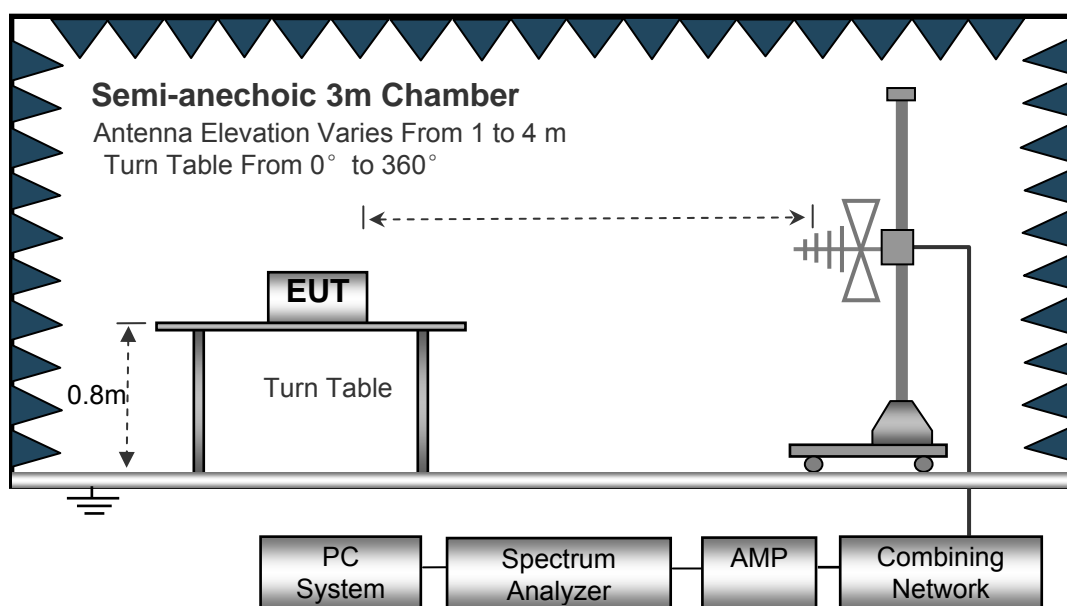


### 5.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Quasi-peak measurements were performed if peak emissions were within 6dB of the Quasi-peak limit line.


### 5.2.4 Radiated Emission Test Data, 30MHz to 1000MHz

Antenna Polarization: Vertical

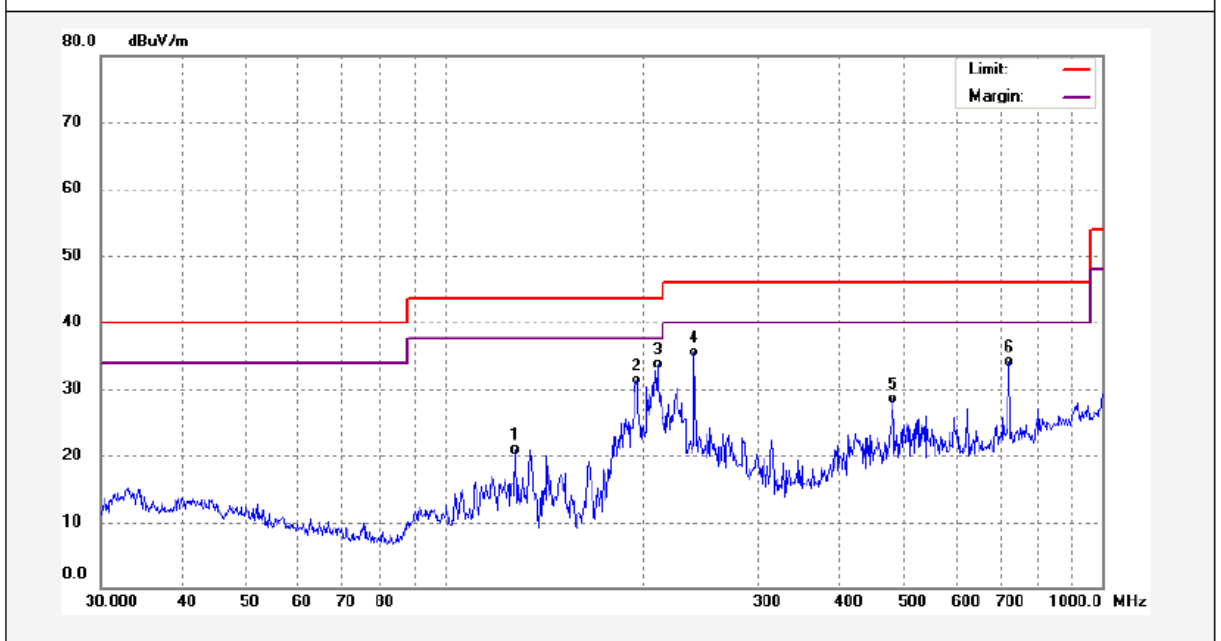

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	128.1130	38.95	-18.12	20.83	43.50	-22.67	QP	
2	195.8220	48.57	-17.19	31.38	43.50	-12.12	QP	
3	210.7860	50.95	-17.20	33.75	43.50	-9.75	QP	
4	239.9873	51.69	-16.10	35.59	46.00	-10.41	QP	
5	480.5276	39.50	-10.97	28.53	46.00	-17.47	QP	
6	721.7259	41.24	-7.21	34.03	46.00	-11.97	QP	

Antenna Polarization: Horizontal

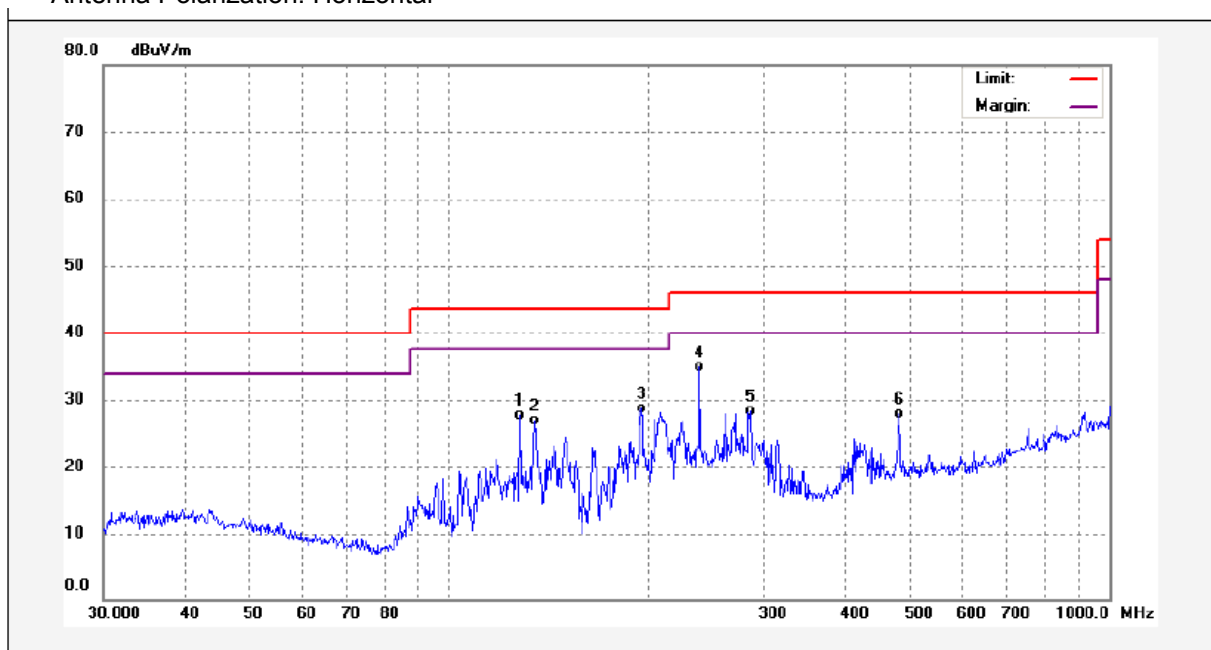

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	128.1130	45.77	-18.12	27.65	43.50	-15.85	QP	
2	134.5592	45.73	-18.78	26.95	43.50	-16.55	QP	
3	195.8220	45.89	-17.19	28.70	43.50	-14.80	QP	
4	239.9873	50.91	-16.10	34.81	46.00	-11.19	QP	
5	285.9778	43.61	-15.35	28.26	46.00	-17.74	QP	
6	480.5276	38.78	-10.97	27.81	46.00	-18.19	QP	

### 5.3 Radiation Emission, Above 1000MHz

Test Requirement ..... : FCC PART 15, SUBPART B  
 Test Method ..... : ANSI C63.4  
 Test Result ..... : Pass  
 Frequency Range ..... : 1GHz~6GHz  
 Class. : Class B  
 Limit. .... :

Frequency Range (MHz)	Distance (Meter)	Average Limit dB(uV/m)	Peak Limit (dBUV/m)
Above 1GHz	3	54	74

#### 5.3.1 E.U.T. Operation

Operating Environment:


Temperature ..... : 22.4°C  
 Humidity ..... : 52.3%RH  
 Atmospheric Pressure ..... : 101.3kPa

EUT Operation:

Input Voltage ..... : DC 5V by Adapter Input AC 120V/60Hz  
 Operating Mode ..... : Data transmitting mode  
 Remark ..... : The worse case(Data transmitting mode) is under the condition of AC 120V/60Hz adapter input and the data is shown as follow.

#### 5.3.2 Block Diagram of Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4.

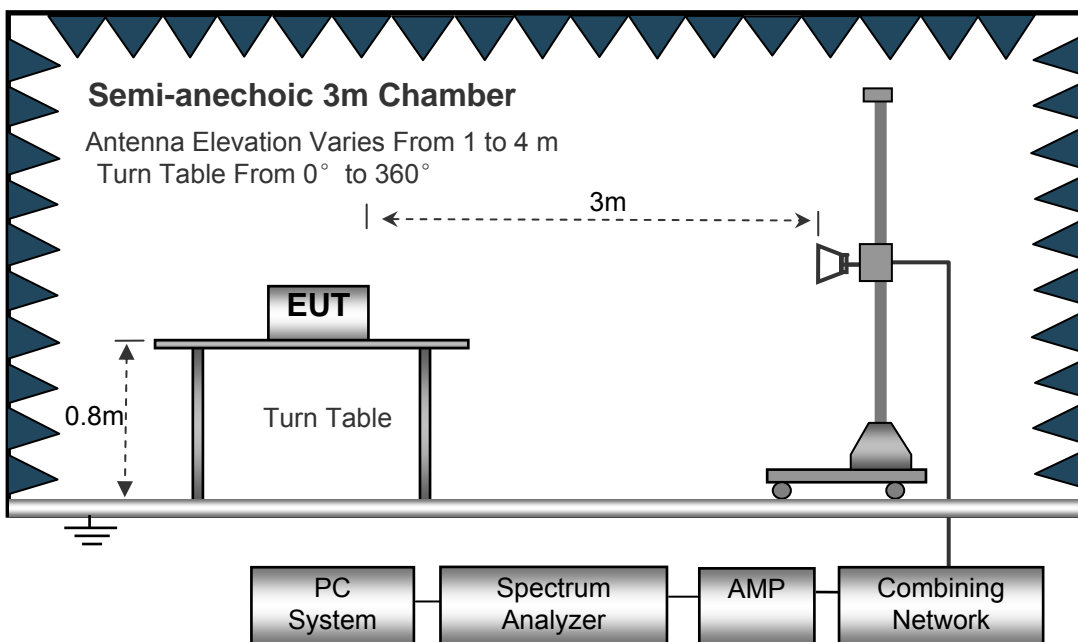


### 5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Antenna Vertical Polarization and Antenna Horizontal Polarization. Average measurements were performed if peak emissions were within 6dB of the average limit line


### 5.3.4 Radiated Emission Test Data, Above 1000MHz

Antenna Polarization: Vertical

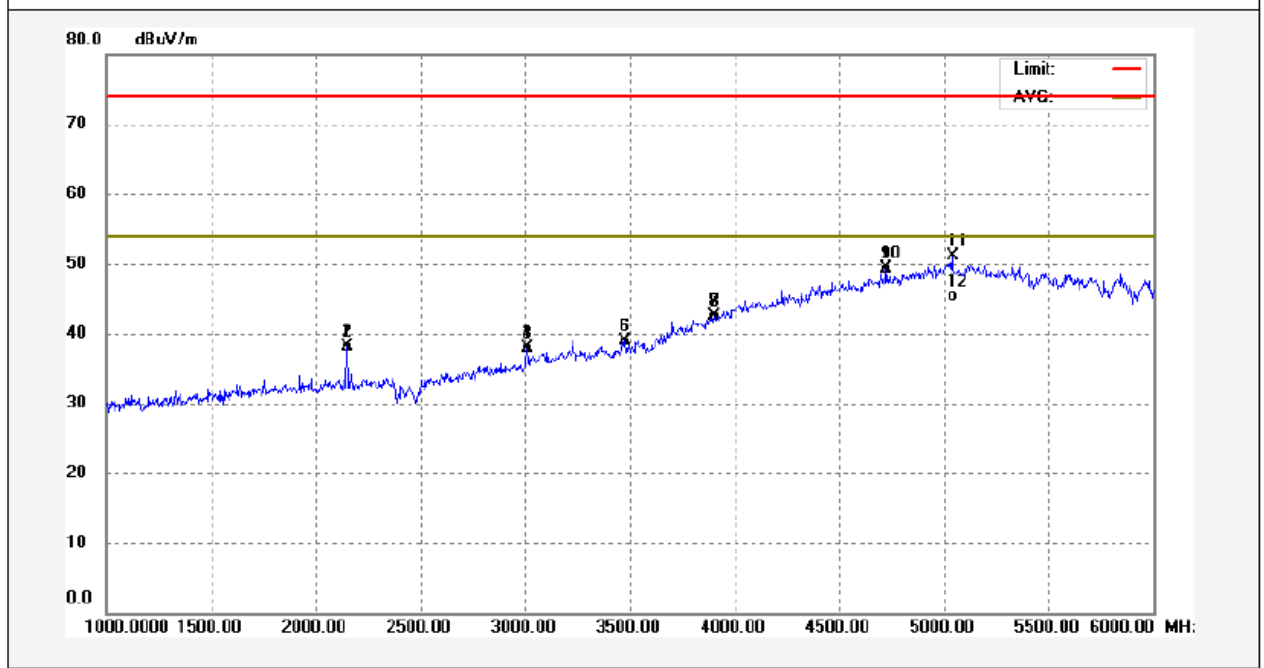

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2150.000	54.27	-16.20	38.07	74.00	-35.93	peak	
2	2150.000	54.27	-16.20	38.07	54.00	-15.93	AVG	
3	3010.000	51.22	-13.37	37.85	74.00	-36.15	peak	
4	3010.000	51.22	-13.37	37.85	54.00	-16.15	AVG	
5	3475.000	50.55	-11.61	38.94	74.00	-35.06	peak	
6	3475.000	50.55	-11.61	38.94	54.00	-15.06	AVG	
7	3900.000	49.76	-7.20	42.56	74.00	-31.44	peak	
8	3900.000	49.76	-7.20	42.56	54.00	-11.44	AVG	
9	4725.000	51.04	-1.83	49.21	74.00	-24.79	peak	
10	4725.000	51.04	-1.83	49.21	54.00	-4.79	AVG	
11	5040.000	51.48	-0.35	51.13	74.00	-22.87	peak	
12	5040.000	45.67	-0.35	45.32	54.00	-8.68	AVG	

Antenna Polarization: Horizontal

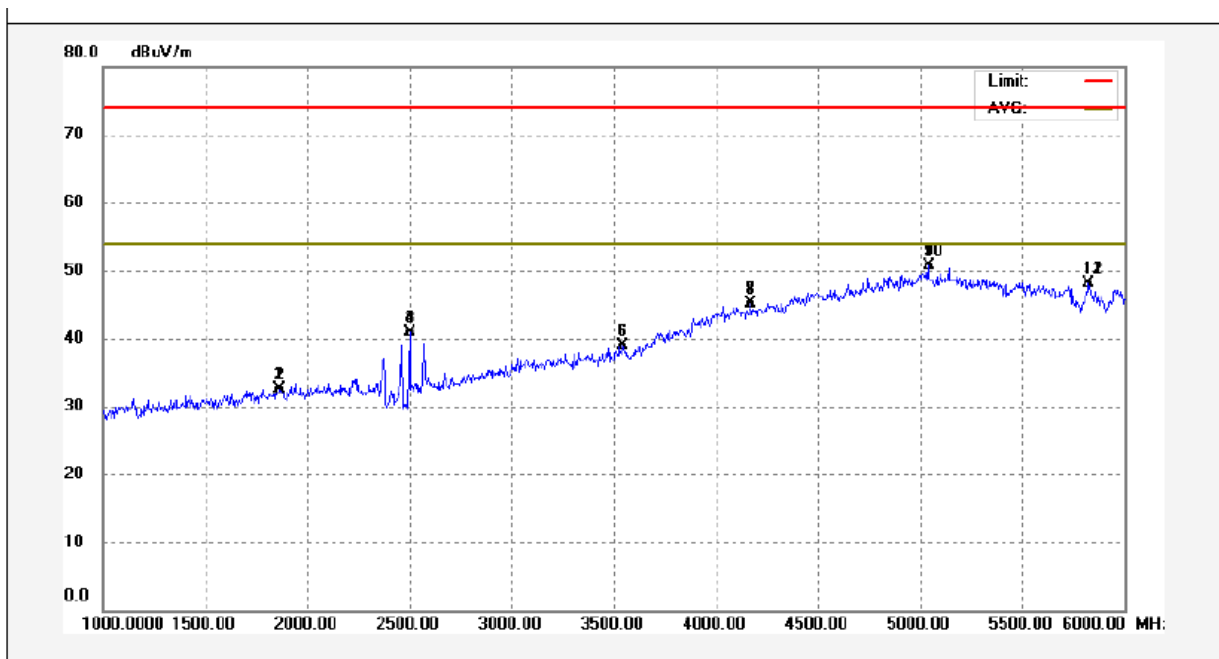

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1865.000	49.33	-16.75	32.58	74.00	-41.42	peak	
2	1865.000	49.33	-16.75	32.58	54.00	-21.42	AVG	
3	2500.000	56.77	-15.92	40.85	74.00	-33.15	peak	
4	2500.000	56.77	-15.92	40.85	54.00	-13.15	AVG	
5	3545.000	49.84	-11.03	38.81	74.00	-35.19	peak	
6	3545.000	49.84	-11.03	38.81	54.00	-15.19	AVG	
7	4170.000	50.22	-5.10	45.12	74.00	-28.88	peak	
8	4170.000	50.22	-5.10	45.12	54.00	-8.88	AVG	
9	5040.000	51.13	-0.35	50.78	74.00	-23.22	peak	
10	5040.000	51.13	-0.35	50.78	54.00	-3.22	AVG	
11	5825.000	50.09	-2.07	48.02	74.00	-25.98	peak	
12	5825.000	50.09	-2.07	48.02	54.00	-5.98	AVG	




## 6 Photographs – Test Setup

### 6.1 Photograph –Power Line Conducted Emission Test Setup at Test Site 2#



### 6.2 Photograph – Radiated Emission Test Setup for 30~1000MHz at Test Site 2#

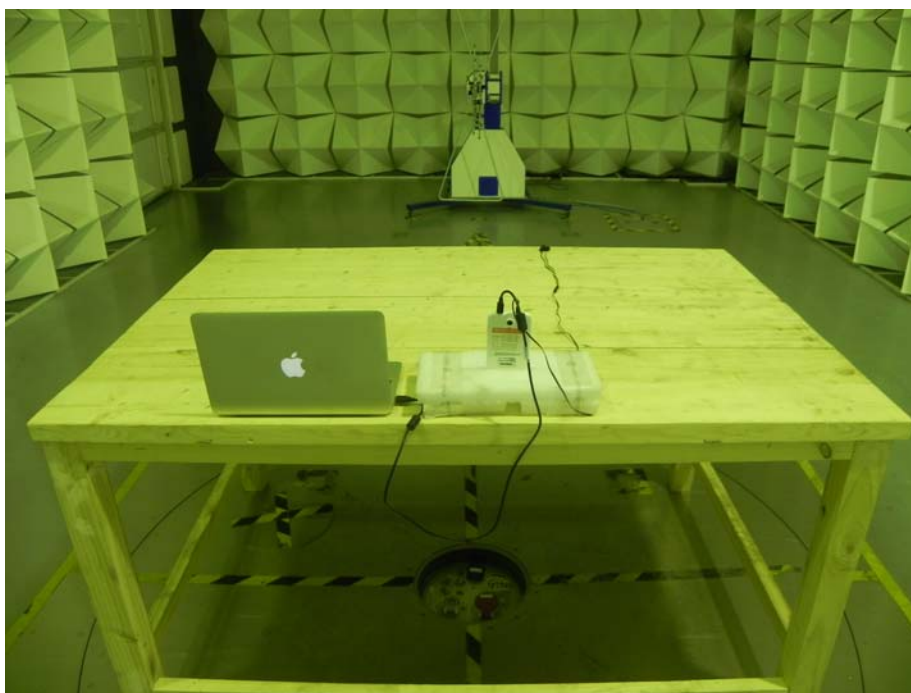

### 6.3 Photograph – Radiated Emission Test Setup for Above 1GHz at Test Site 1#



## 7 Photographs - Constructional Details

### 7.1 External View

















## 7.2 Internal Photos








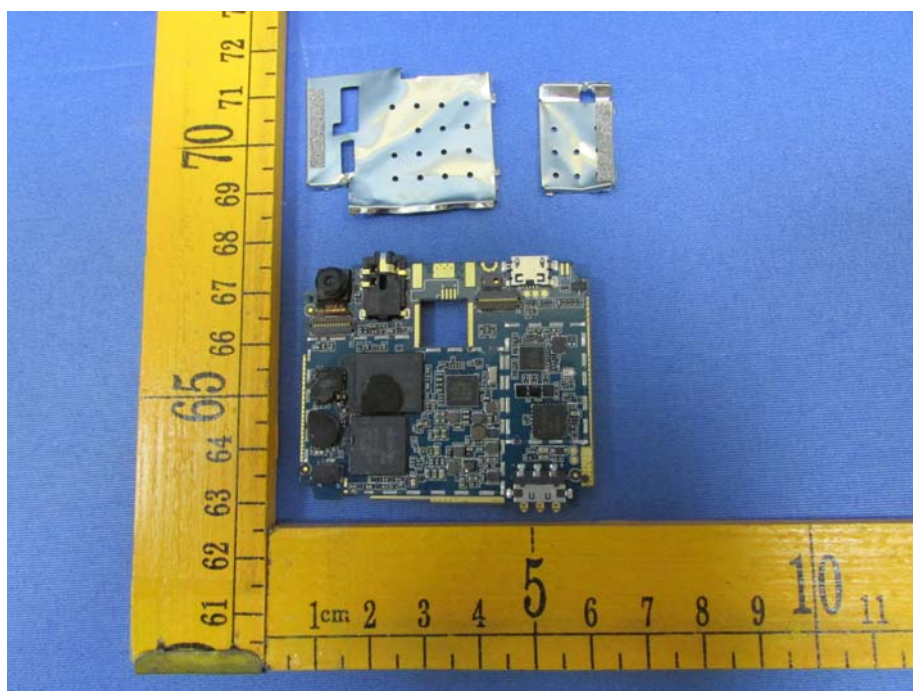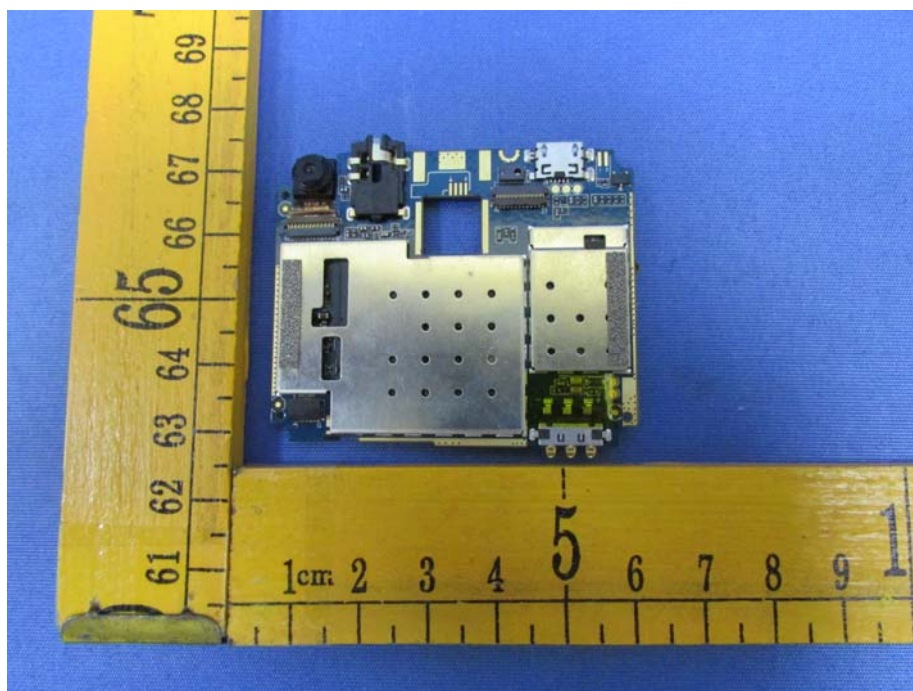

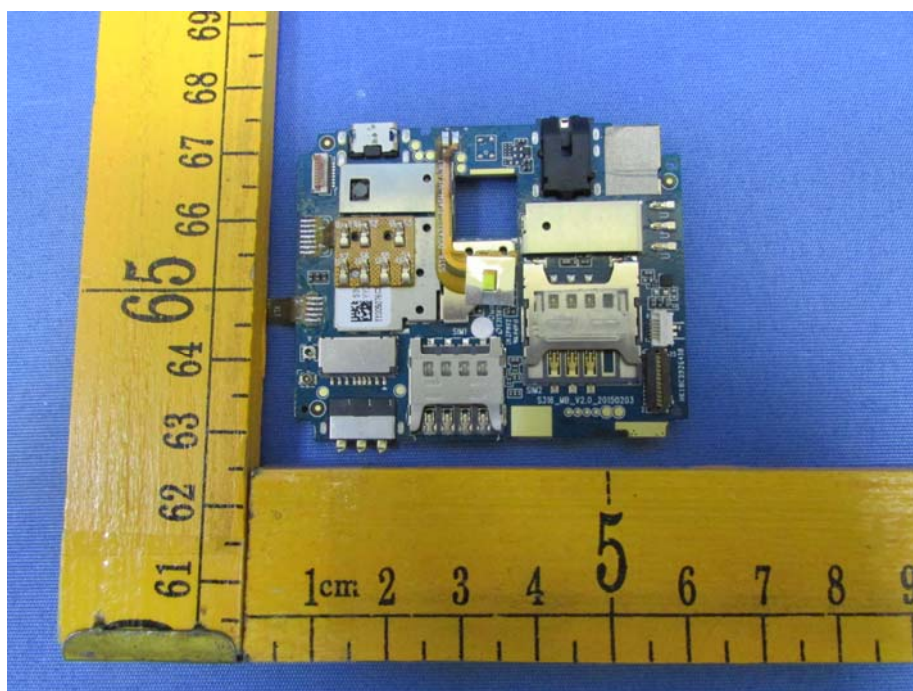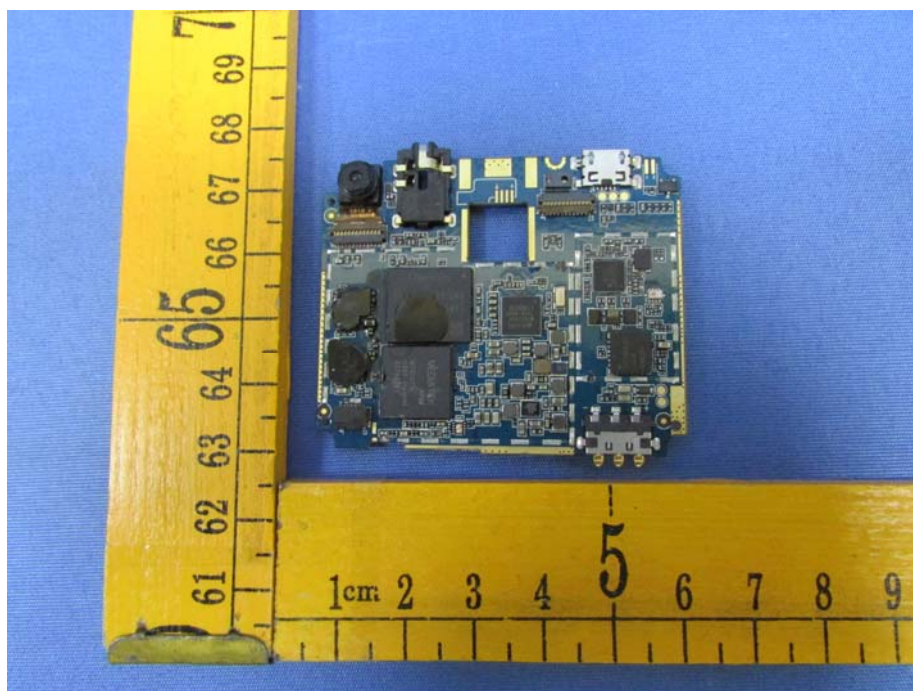



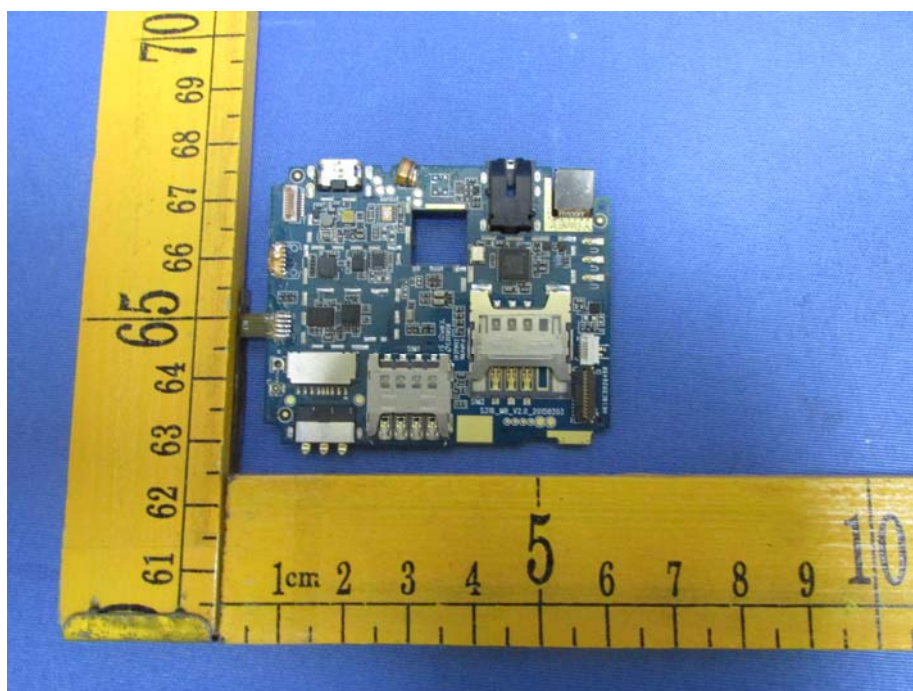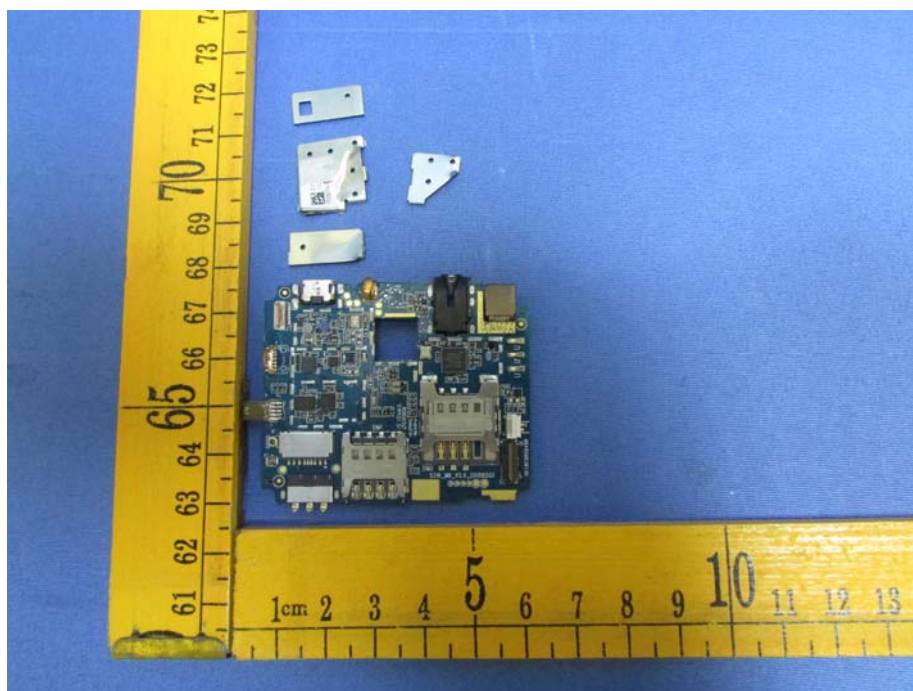

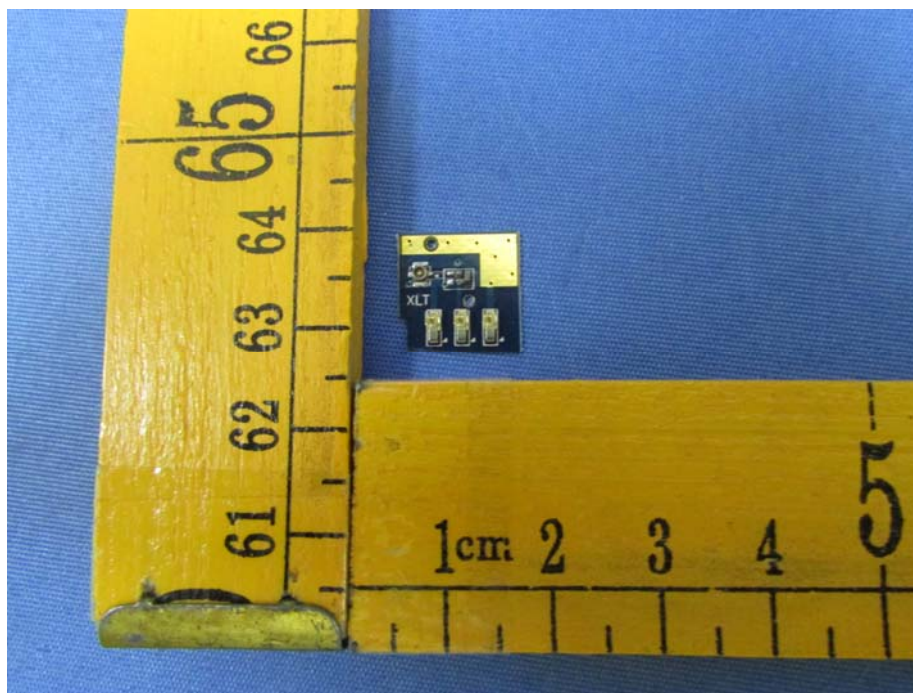





====End of Report====