

FCC TEST REPORT

For

Shenzhen KVD Communication Equipment Limited

LTE GSM/WCDMA Smartphone

Model No.: Y6 MAX

Additional Model No.: /

Prepared for : Shenzhen KVD Communication Equipment Limited
Address : Lenovo R&D Center 2F-B, South First Road, High-tech Park,
Nanshan District, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : May 26, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : May 26, 2017~Jul 05, 2017
Date of Report : Jul 05, 2017

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247)

Report Reference No. : **LCS170516127AE**

Date of Issue : Jul 05, 2017

Testing Laboratory Name..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name : **Shenzhen KVD Communication Equipment Limited**

Address : Lenovo R&D Center 2F-B, South First Road, High-tech Park,
Nanshan District, Shenzhen, Guangdong, China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.247)

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

EUT Description. : **LTE GSM/WCDMA Smartphone**

Trade Mark..... : DOOGEE

Model/ Type reference : Y6 MAX

Ratings : DC 3.8V by Li-ion Battery(4300mAh)
Charging parameter: Input: 100~240V AC, 50/60Hz, 0.3A;
Adapter output:DC 5V, 2000mA

Result : **Positive**

Compiled by:




Calvin Weng/ Administrators

Supervised by:



Glin Lu/ Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|---|-------------------------------|
| Test Report No. : LCS170516127AE | Jul 05, 2017 Date of issue |
|---|-------------------------------|

EUT..... : LTE GSM/WCDMA Smartphone
 Type / Model..... : Y6 MAX

Applicant..... : Shenzhen KVD Communication Equipment Limited
 Address..... : Lenovo R&D Center 2F-B, South First Road, High-tech Park,
 Nanshan District, Shenzhen, Guangdong, China
 Telephone..... :
 Fax..... :

Manufacturer..... : Shenzhen KVD Communication Equipment Limited
 Address..... : A, 3rd floor, Building A2, Silicon valley Digital Industrial Park, 22nd
 of Dafu industrial area, Aobei Community, Guanlan town, Longhua
 District, shenzhen 518000, China
 Telephone..... :
 Fax..... :

Factory..... : Shenzhen KVD Communication Equipment Limited
 Address..... : A, 3rd floor, Building A2, Silicon valley Digital Industrial Park, 22nd
 of Dafu industrial area, Aobei Community, Guanlan town, Longhua
 District, shenzhen 518000, China
 Telephone..... :
 Fax..... :

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

| Revision | Issue Date | Revisions | Revised By |
|----------|--------------|---------------|-------------|
| 000 | Jul 05, 2017 | Initial Issue | Gavin Liang |
| | | | |
| | | | |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. GENERAL INFORMATION | 6 |
| 1.1. DESCRIPTION OF DEVICE (EUT) | 6 |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS | 6 |
| 1.3. EXTERNAL I/O CABLE | 7 |
| 1.4. DESCRIPTION OF TEST FACILITY | 7 |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 7 |
| 1.6. MEASUREMENT UNCERTAINTY | 7 |
| 1.7. DESCRIPTION OF TEST MODES | 8 |
| 2. TEST METHODOLOGY | 9 |
| 2.1. EUT CONFIGURATION | 9 |
| 2.2. EUT EXERCISE | 9 |
| 2.3. GENERAL TEST PROCEDURES | 9 |
| 3. SYSTEM TEST CONFIGURATION..... | 10 |
| 3.1. JUSTIFICATION | 10 |
| 3.2. EUT EXERCISE SOFTWARE..... | 10 |
| 3.3. SPECIAL ACCESSORIES | 10 |
| 3.4. BLOCK DIAGRAM/SCHEMATICS..... | 10 |
| 3.5. EQUIPMENT MODIFICATIONS | 10 |
| 3.6. TEST SETUP | 10 |
| 4. SUMMARY OF TEST RESULTS | 11 |
| 5. TEST RESULT | 12 |
| 5.1. ON TIME AND DUTY CYCLE | 12 |
| 5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT..... | 14 |
| 5.3. POWER SPECTRAL DENSITY MEASUREMENT | 16 |
| 5.4. 6 dB SPECTRUM BANDWIDTH MEASUREMENT | 21 |
| 5.5. RADIATED EMISSIONS MEASUREMENT..... | 26 |
| 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST..... | 45 |
| 5.7. POWER LINE CONDUCTED EMISSIONS | 56 |
| 5.8. ANTENNA REQUIREMENTS | 59 |
| 6. LIST OF MEASURING EQUIPMENTS | 60 |
| 7. TEST SETUP PHOTOGRAPHS OF EUT..... | 61 |
| 8. EXTERIOR PHOTOGRAPHS OF THE EUT..... | 61 |
| 9. INTERIOR PHOTOGRAPHS OF THE EUT | 61 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

| | |
|--|--|
| Name of EUT | LTE GSM/WCDMA Smartphone |
| Model Number | Y6 MAX |
| Modulation Type | GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS, QPSK, 16QAM for LTE |
| Antenna Gain | 0 dBi (max.) For GSM 850, GSM 900, DCS 1800, PCS 1900; 0 dBi (max.) For WCDMA Band II, V; 0 dBi (max.) For LTE Band 2, 4, 5, 7, 17; -1 dBi (max.) For BT and WLAN |
| Hardware version | DK9FA23WTAF |
| Software version | DK9FA23WTAF.DGE.D7.HB.FHD.SCS8.0118.V3.07 |
| GSM/EDGE/GPRS Operation Frequency Band | GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900 |
| UMTS Operation Frequency Band | UMTS FDD Band II/V |
| LTE Operation Frequency Band | LTE Band 2, 4, 5, 7, 17 |
| GSM/EDGE/GPRS | Supported GSM/GPRS/EDGE |
| GSM Release Version | R99 |
| GSM/EDGE/GPRS Power Class | GSM850:Power Class 4/ PCS1900:Power Class 1 |
| GPRS/EDGE Multislot Class | GPRS/EDGE: Multi-slot Class 12 |
| GPRS operation mode | Class B |
| WCDMA Release Version | R99 |
| HSDPA Release Version | Release 9 |
| HSUPA Release Version | Release 6 |
| DC-HSUPA Release Version | Not Supported |
| LTE Release Version | Release 9 |
| LTE/UMTS Power Class | Class 3 |
| WLAN FCC Modulation Type | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| WLAN FCC Operation frequency | IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz |
| Antenna Type | PIFA Antenna |
| BT Modulation Type | GFSK,8-DPSK, π /4DQPSK(BT V4.1) |
| Extreme temp. Tolerance | -30°C to +50°C |
| GPS function | Support and only RX |
| NFC Function | Not Supported |
| Extreme vol. Limits | 3.40VDC to 4.35VDC (nominal: 3.80VDC) |

1.2. Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|---------------------------------------|---------------|-----------------|---------------|-------------|
| Shenzhen HuaJin Electronics Co., Ltd. | Power Adapter | HJ-0502000W2-US | --- | FCC VoC |

1.3. External I/O Cable

| I/O Port Description | Quantity | Cable |
|----------------------|----------|----------------------|
| USB | 1 | 1m, unshielded cable |
| Earphone | 1 | N/A |

1.4. Description of Test Facility

CNAS Registration Number. is L4595.
 FCC Registration Number. is 899208.
 Industry Canada Registration Number. is 9642A-1.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|------------------------|-----------------|-------------|------|
| Radiation Uncertainty | 9KHz~30MHz | ±3.10dB | (1) |
| | 30MHz~200MHz | ±2.96dB | (1) |
| | 200MHz~1000MHz | ±3.10dB | (1) |
| | 1GHz~26.5GHz | ±3.80dB | (1) |
| | 26.5GHz~40GHz | ±3.90dB | (1) |
| Conduction Uncertainty | 150kHz~30MHz | ±1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | ±1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be IEEE 802.11b mode (High Channel).

AC conducted emission pre-test at both at AC 120V/60Hz and AC 240V/50Hz modes, recorded worst case;

AC conducted emission pre-test at both at power adapter and power from PC modes, recorded worst case;

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power that was determined to be IEEE 802.11b mode (High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

IEEE 802.11b Mode: 1 Mbps, DSSS.

IEEE 802.11g Mode: 6 Mbps, OFDM.

IEEE 802.11n Mode HT20: MCS0, OFDM.

IEEE 802.11n Mode HT40: MCS0, OFDM.

BT LE: 1Mbps, GFSK.

Channel List & Frequency

IEEE 802.11b/g/n HT20

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | -- | -- |

IEEE 802.11n HT40

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz | -- | -- | 7 | 2442 |
| | -- | -- | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | -- | -- |
| | 5 | 2432 | -- | -- |
| | 6 | 2437 | -- | -- |

Bluetooth V4.1(DTS)

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|---------|----------------|---------|----------------|
| 1 | 2402 | 21 | 2442 |
| 2 | 2404 | --- | --- |
| 3 | 2406 | --- | --- |
| --- | --- | 38 | 2476 |
| --- | --- | 39 | 2478 |
| 19 | 2438 | 40 | 2480 |
| 20 | 2440 | | |

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v04 and KDB 662911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

The sample is controlled by using dialing engineering code (*##3646633##) to control sample change channel, modulation and so on;

3.3. Special Accessories

| No. | Equipment | Manufacturer | Model No. | Serial No. | Length | shielded/ unshielded | Notes |
|-----|---------------|--------------|-----------|------------|--------|-------------------------|-------|
| 1 | PC | Lenovo | Ideapad | A131101550 | / | / | DOC |
| 2 | Power adapter | Lenovo | CPA-A090 | 36200414 | 1.00m | unshielded | DOC |

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b) | Maximum Conducted Output Power | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(a) | Occupied Bandwidth | Compliant |
| §15.205, §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.207(a) | Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |
| §15.247(i)§2.1093 | RF Exposure | Compliant |

5. TEST RESULT

5.1. On Time and Duty Cycle

5.1.1. Standard Applicable

None; for reporting purpose only.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

5.1.3. Test Procedures

1. Set the centre frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

5.1.4. Test Setup Layout

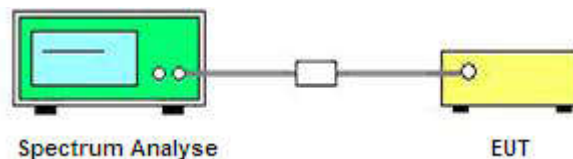



5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test result



| Mode | On Time B (ms) | Period (ms) | Duty Cycle x (Linear) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | 1/B Minimum VBW(KHz) |
|-------------------|----------------|-------------|-----------------------|----------------|-----------------------------------|----------------------|
| BT LE | 5 | 5 | 1 | 100 | 0 | 0.010 |
| IEEE 802.11b | 5 | 5 | 1 | 100 | 0 | 0.010 |
| IEEE 802.11g | 5 | 5 | 1 | 100 | 0 | 0.010 |
| IEEE 802.11n-HT20 | 5 | 5 | 1 | 100 | 0 | 0.010 |
| IEEE 802.11n-HT40 | 5 | 5 | 1 | 100 | 0 | 0.010 |

On Time and Duty Cycle

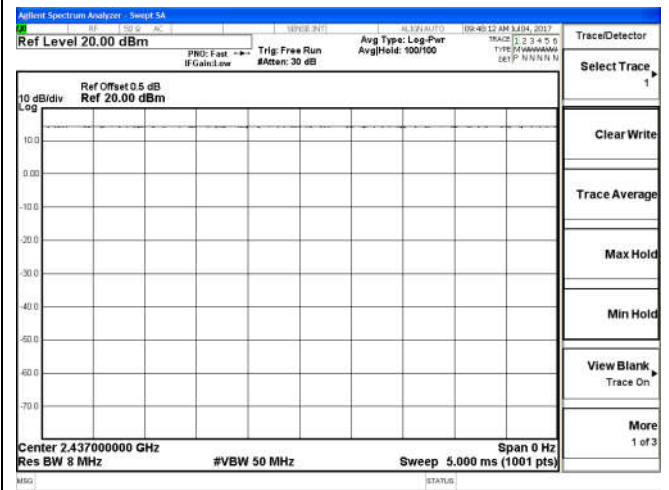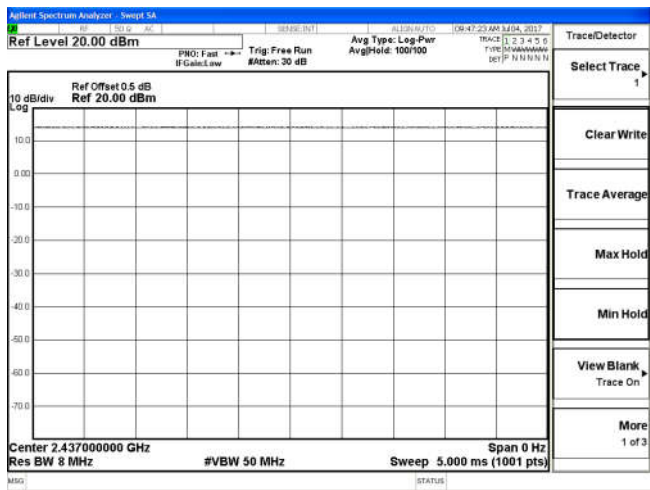


IEEE 802.11b

IEEE 802.11g

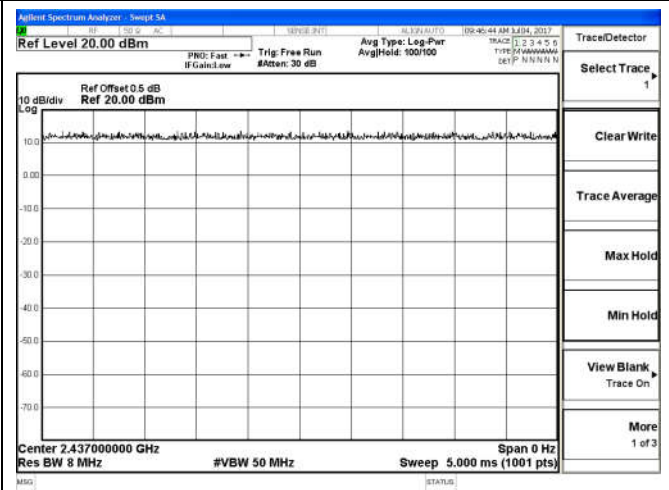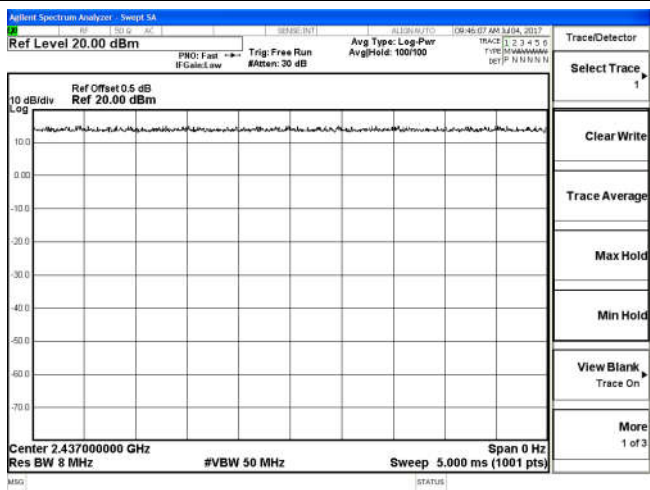

IEEE 802.11n-HT20

IEEE 802.11n-HT40

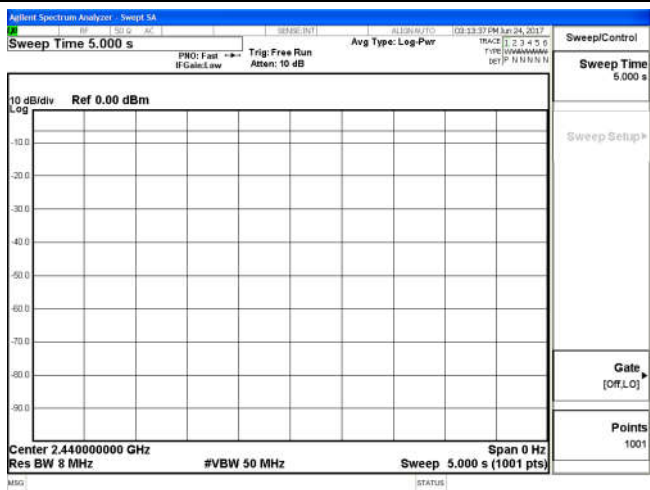

BT LE

5.2. Maximum Conducted Output Power Measurement

5.2.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.

5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the power meter.

5.2.3. Test Procedures

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power, 9.1.2 the maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

According to KDB558074 D01 DTS Measurement Guidance Section 9.2 Maximum average conducted output power, 9.2.3.1 Method AVGPM (Measurement using an RF average power meter)

(a) As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.


- 1) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
- 2) At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 3) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

(b) If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

(c) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

(d) Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

5.2.4. Test Setup Layout

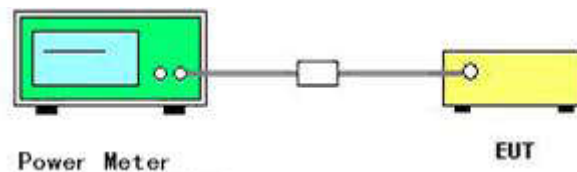

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Maximum Conducted Output Power

| | | | |
|---------------|-------------|----------------|--------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b/g/n & BT LE |

| Test Mode | Channel | Frequency (MHz) | Measured Peak Output Power (dBm) | Measured Average Output Power (dBm) | Limits (dBm) | Verdict |
|-------------------|---------|-----------------|----------------------------------|-------------------------------------|--------------|---------|
| IEEE 802.11b | 1 | 2412 | 13.29 | 11.37 | 30 | PASS |
| | 6 | 2437 | 14.51 | 12.64 | | |
| | 11 | 2462 | 14.64 | 12.73 | | |
| IEEE 802.11g | 1 | 2412 | 11.25 | 9.41 | 30 | PASS |
| | 6 | 2437 | 12.08 | 10.26 | | |
| | 11 | 2462 | 12.60 | 10.64 | | |
| IEEE 802.11n HT20 | 1 | 2412 | 11.37 | 9.40 | 30 | PASS |
| | 6 | 2437 | 12.13 | 10.28 | | |
| | 11 | 2462 | 12.25 | 10.38 | | |
| IEEE 802.11n HT40 | 3 | 2422 | 11.77 | 9.85 | 30 | PASS |
| | 6 | 2437 | 12.18 | 10.31 | | |
| | 9 | 2452 | 12.17 | 10.39 | | |
| BT – LE | 0 | 2402 | -7.750 | -7.783 | 30 | PASS |
| | 19 | 2440 | -5.748 | -5.761 | | |
| | 39 | 2480 | -4.869 | -4.882 | | |

Remark:

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. Average power is for report only;

5.3. Power Spectral Density Measurement

5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


5.3.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of Spectrum Analyzer.

5.3.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 KHz~100 KHz.
4. Set the VBW ≥ 3*RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.3.4. Test Setup Layout

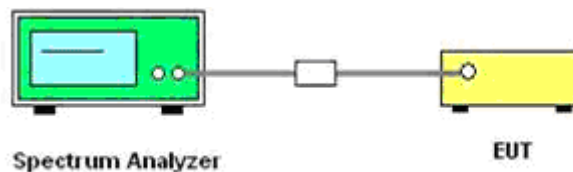

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of Power Spectral Density

| | | | |
|---------------|-------------|----------------|--------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b/g/n & BT LE |

| Test Mode | Channel | Frequency (MHz) | Measured Peak Power Spectral Density (dBm/3KHz) | Limits (dBm/3KHz) | Verdict |
|-------------------|---------|-----------------|---|-------------------|---------|
| IEEE 802.11b | 1 | 2412 | -11.737 | 8 | PASS |
| | 6 | 2437 | -10.910 | | |
| | 11 | 2462 | -11.445 | | |
| IEEE 802.11g | 1 | 2412 | -16.820 | 8 | PASS |
| | 6 | 2437 | -14.935 | | |
| | 11 | 2462 | -14.708 | | |
| IEEE 802.11n HT20 | 1 | 2412 | -17.577 | 8 | PASS |
| | 6 | 2437 | -15.075 | | |
| | 11 | 2462 | -14.731 | | |
| IEEE 802.11n HT40 | 3 | 2422 | -16.612 | 8 | PASS |
| | 6 | 2437 | -17.093 | | |
| | 9 | 2452 | -18.221 | | |

| Test Mode | Channel | Frequency (MHz) | Measured Peak Power Spectral Density (dBm/3KHz) | Limits (dBm/3KHz) | Verdict |
|-----------|---------|-----------------|---|-------------------|---------|
| BT – LE | 0 | 2402 | -14.899 | 8 | PASS |
| | 19 | 2440 | -12.726 | | |
| | 39 | 2480 | -11.869 | | |



Remark:

1. Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. Please refer to following plots;

Power Spectral Density



IEEE 802.11b

IEEE 802.11g

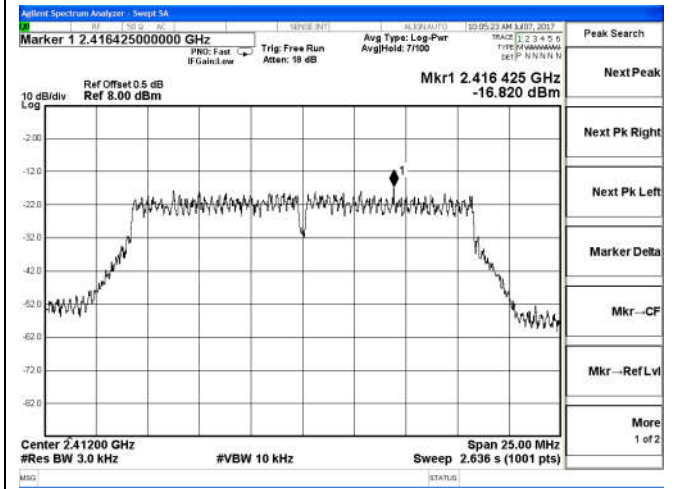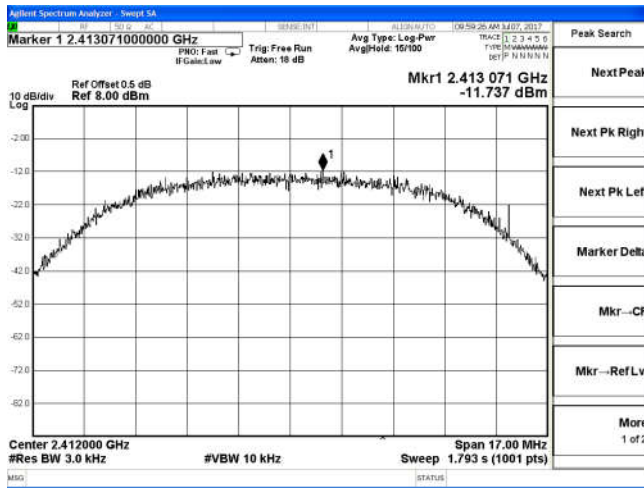



Channel 1 / 2412 MHz

Channel 1 / 2412 MHz

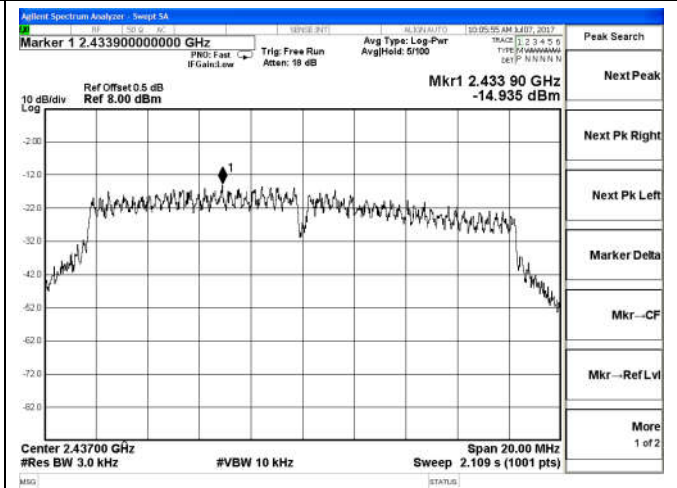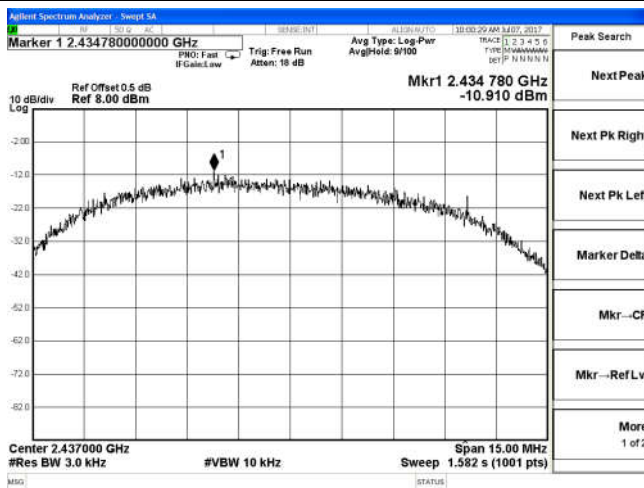

Channel 6 / 2437 MHz

Channel 6 / 2437 MHz

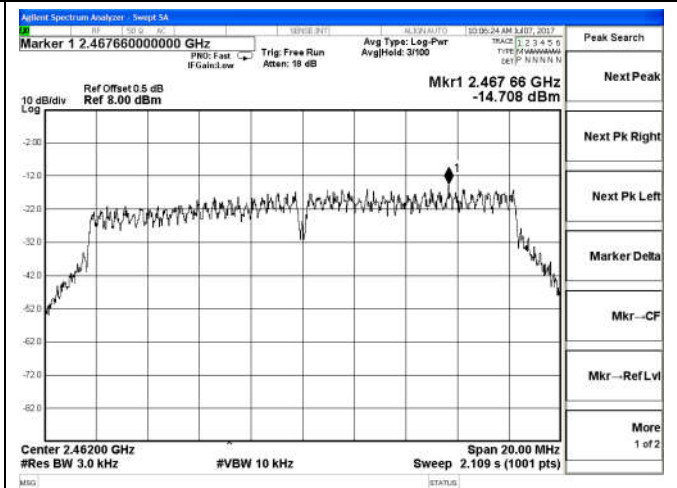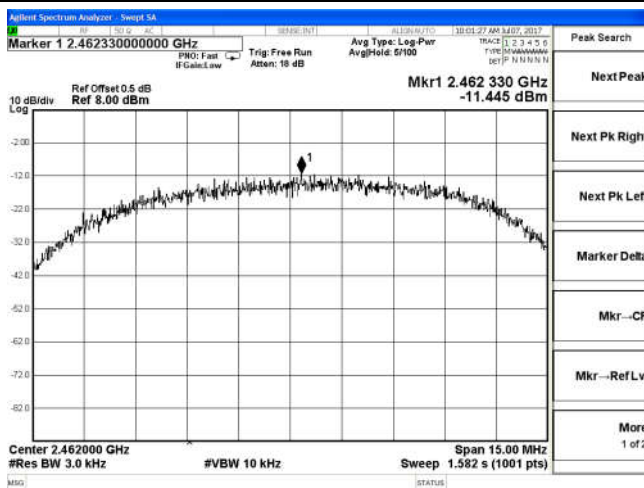



Channel 11 / 2462 MHz

Channel 11 / 2462 MHz

Power Spectral Density



IEEE 802.11n HT20

IEEE 802.11n HT40

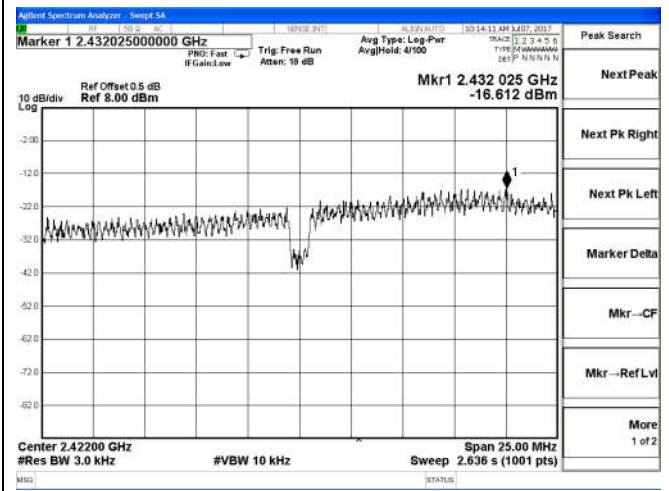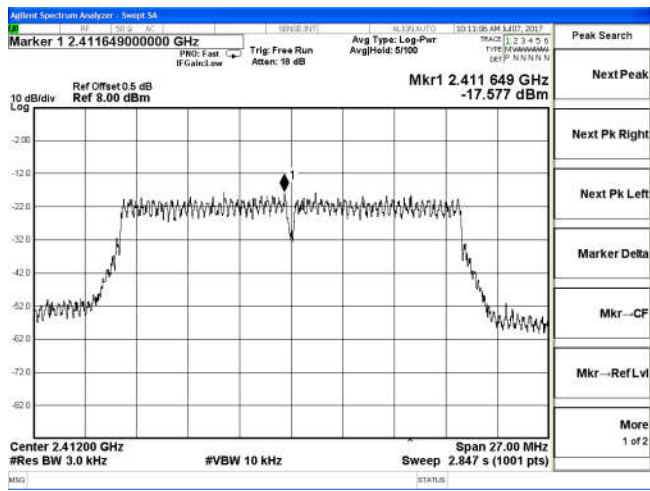



Channel 1 / 2412 MHz

Channel 3 / 2422 MHz

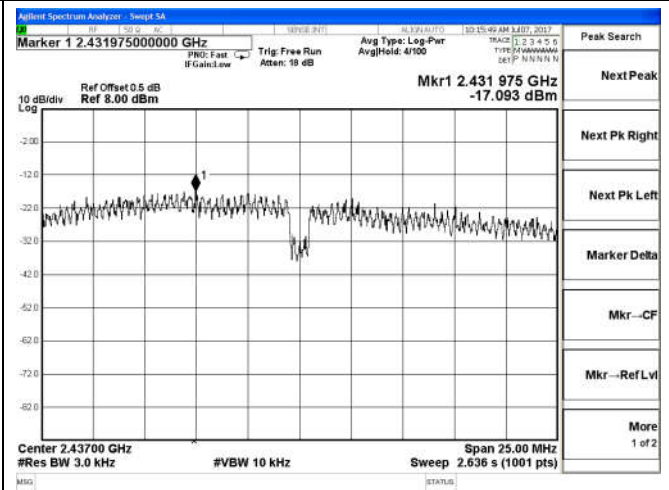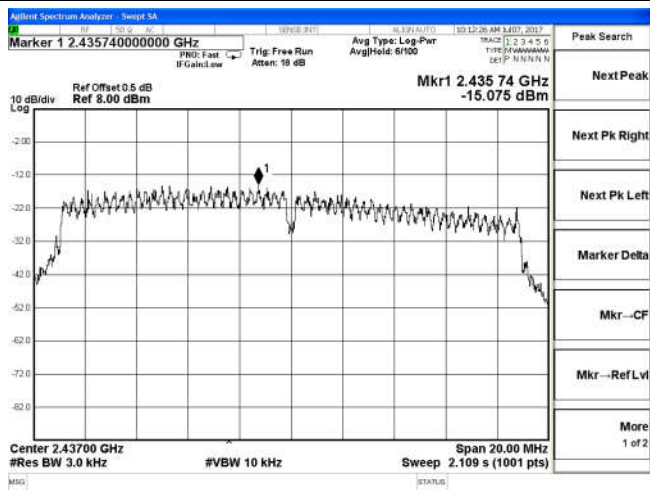

Channel 6 / 2437 MHz

Channel 6 / 2437 MHz

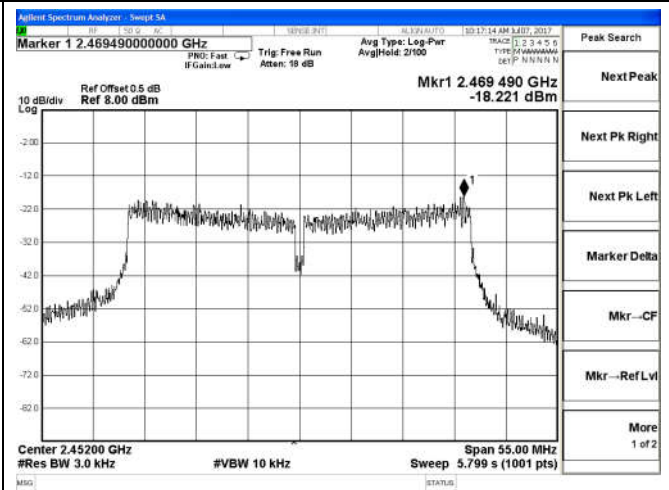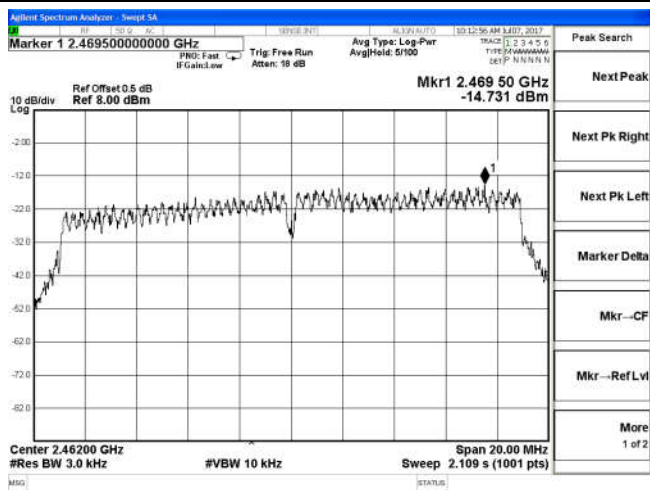



Channel 11 / 2462 MHz

Channel 9 / 2452 MHz

Power Spectral Density


BT - LE

BT - LE

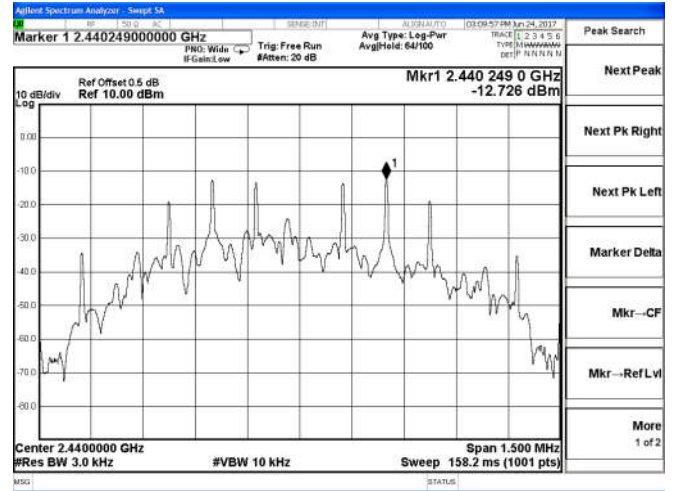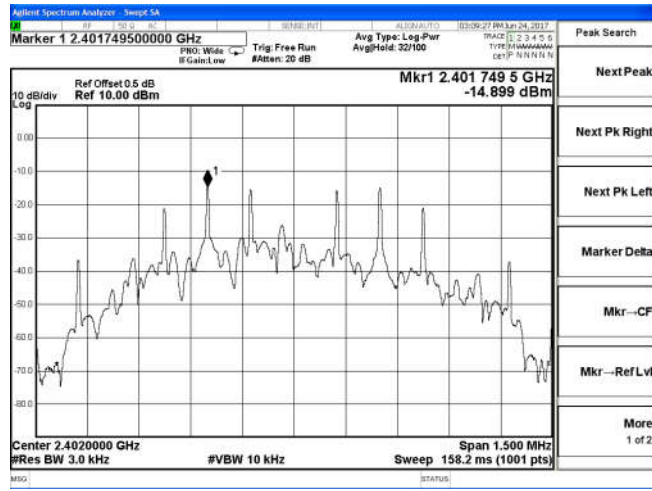

Channel 0 / 2402 MHz

Channel 19 / 2440 MHz

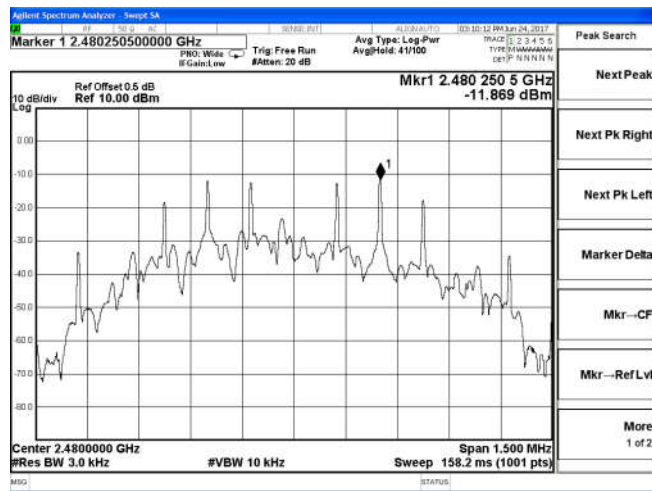

Channel 39 / 2480 MHz

5.4. 6 dB Spectrum Bandwidth Measurement

5.4.1. Standard Applicable

According to §15.247(a) (2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 KHz.

5.4.2. Measuring Instruments and Setting


Please refer to section 6 of equipment’s list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| Span Frequency | > RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 100ms |

5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.4.4. Test Setup Layout

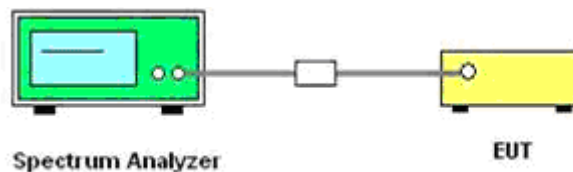

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 6dB Spectrum Bandwidth

| | | | |
|---------------|-------------|----------------|--------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b/g/n & BT LE |

| Test Mode | Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limits (MHz) | Verdict |
|----------------------|---------|-----------------|---------------------|--------------|---------|
| IEEE 802.11b | 1 | 2412 | 11.09 | 0.500 | PASS |
| | 6 | 2437 | 8.910 | | |
| | 11 | 2462 | 9.441 | | |
| IEEE 802.11g | 1 | 2412 | 16.64 | 0.500 | PASS |
| | 6 | 2437 | 12.46 | | |
| | 11 | 2462 | 12.66 | | |
| IEEE 802.11n HT20 | 1 | 2412 | 17.87 | 0.500 | PASS |
| | 6 | 2437 | 12.77 | | |
| | 11 | 2462 | 12.601 | | |
| IEEE 802.11n HT40 | 3 | 2422 | 15.69 | 0.500 | PASS |
| | 6 | 2437 | 16.15 | | |
| | 9 | 2452 | 36.58 | | |
| BT - LE | 0 | 2402 | 0.6541 | 0.500 | PASS |
| | 19 | 2440 | 0.6577 | | |
| | 39 | 2480 | 0.6665 | | |



Remark:

1. Measured 6dB Bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;
4. Please refer to following plots;

6 dB Bandwidth



IEEE 802.11b

IEEE 802.11g

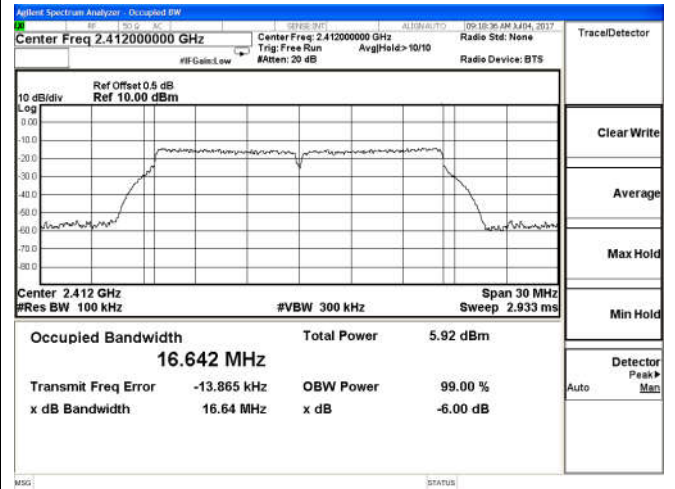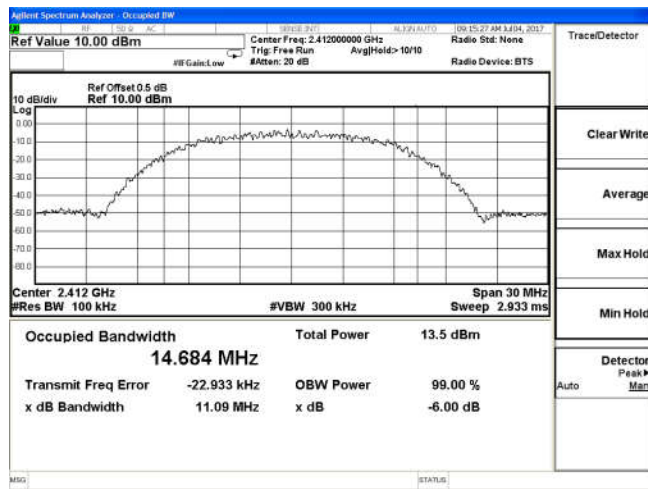



Channel 1 / 2412 MHz

Channel 1 / 2412 MHz

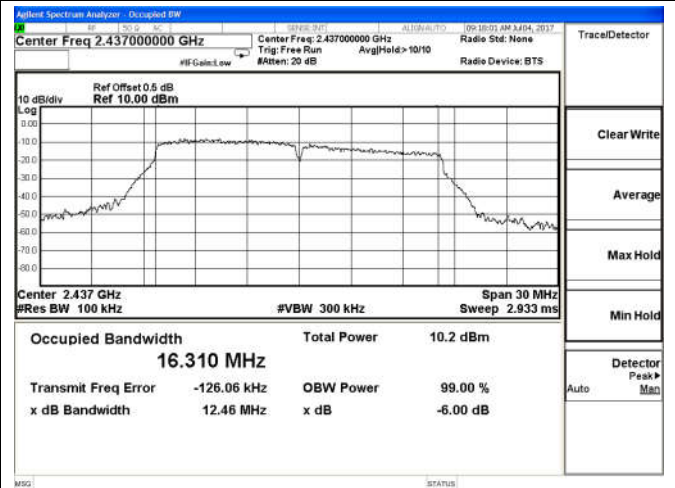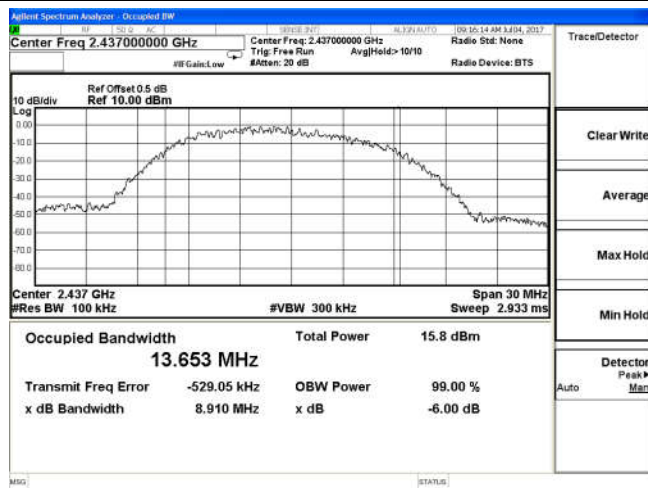

Channel 6 / 2437 MHz

Channel 6 / 2437 MHz

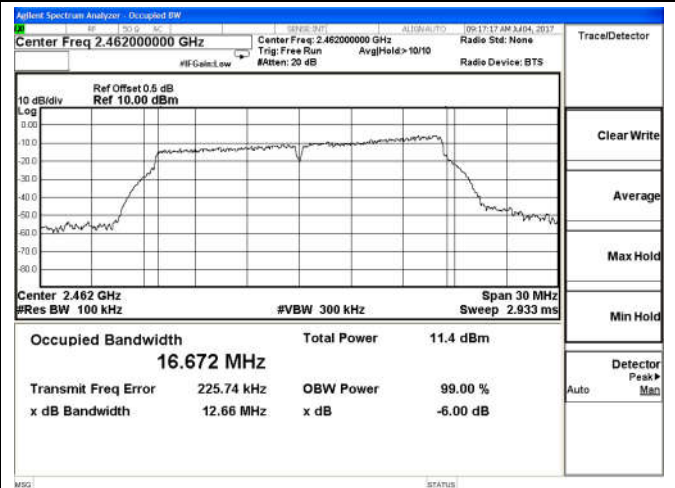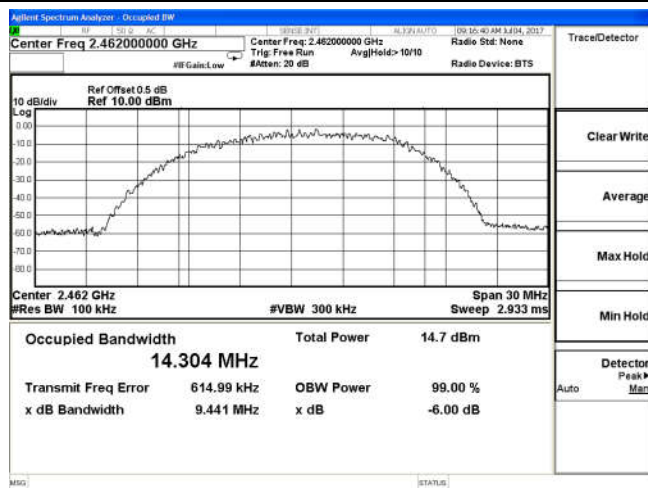


Channel 11 / 2462 MHz


Channel 11 / 2462 MHz

6 dB Bandwidth


IEEE 802.11n HT20

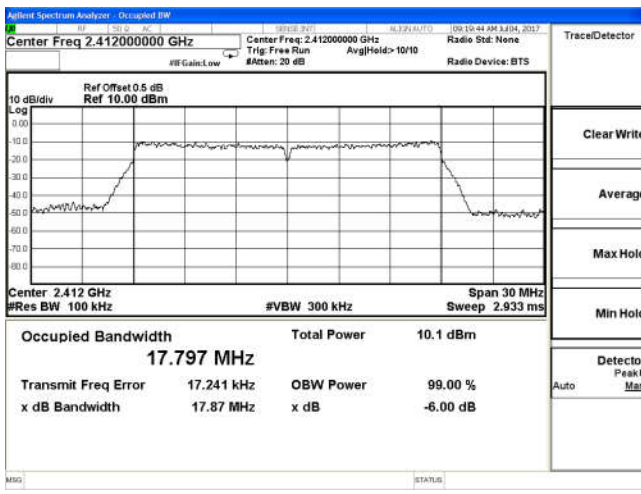


IEEE 802.11n HT40

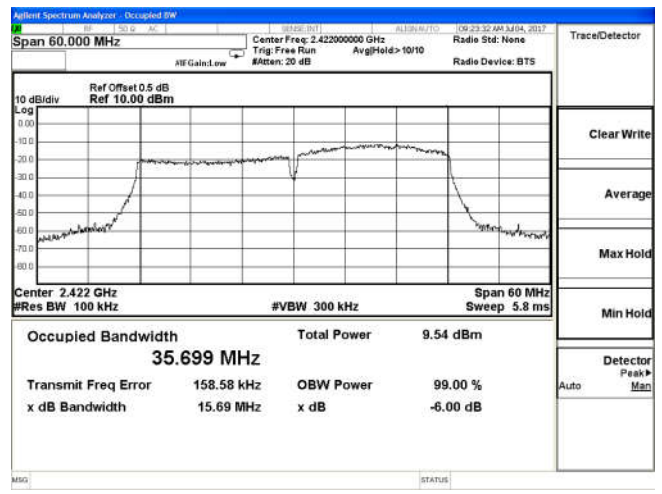


Channel 1 / 2412 MHz

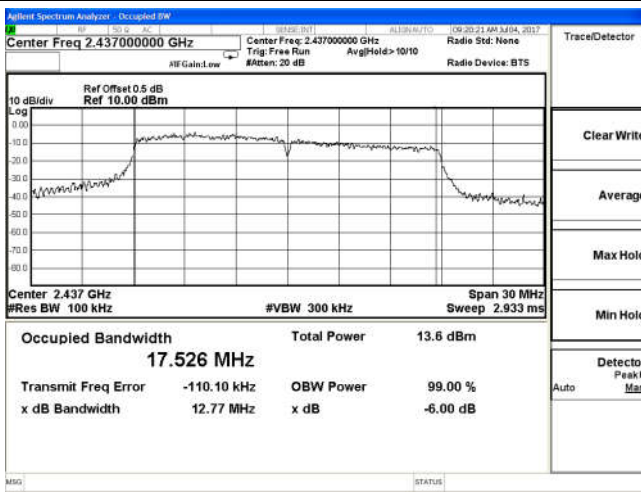


Channel 3 / 2422 MHz

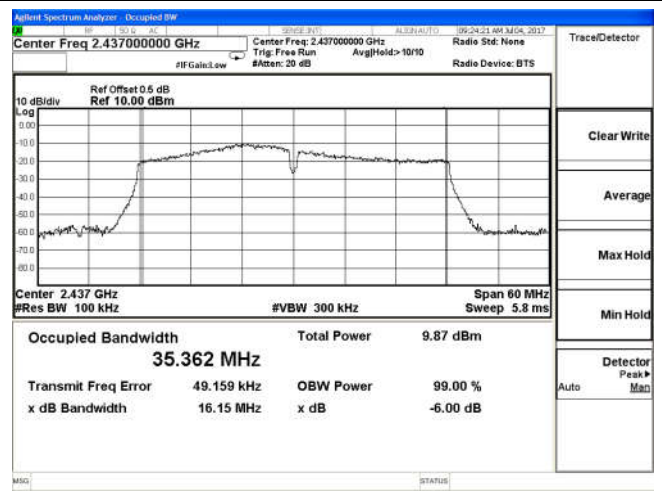

Channel 6 / 2437 MHz

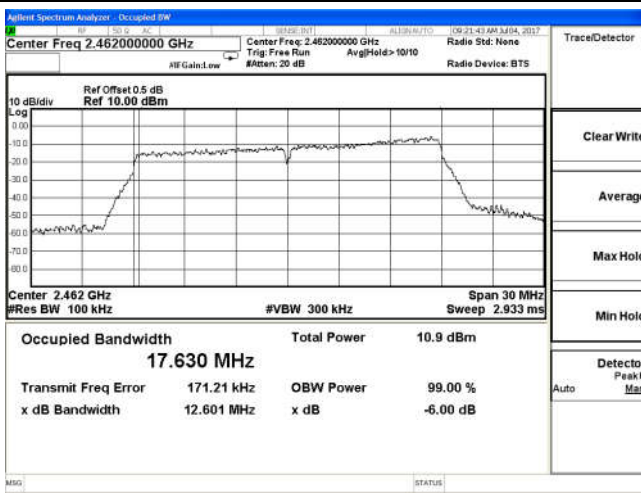

Channel 6 / 2437 MHz

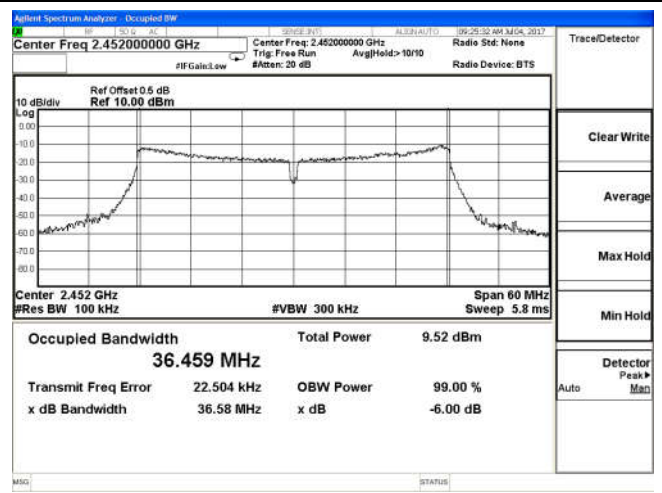



Channel 11 / 2462 MHz

Channel 9 / 2452 MHz

6 dB Bandwidth


BT - LE

BT - LE

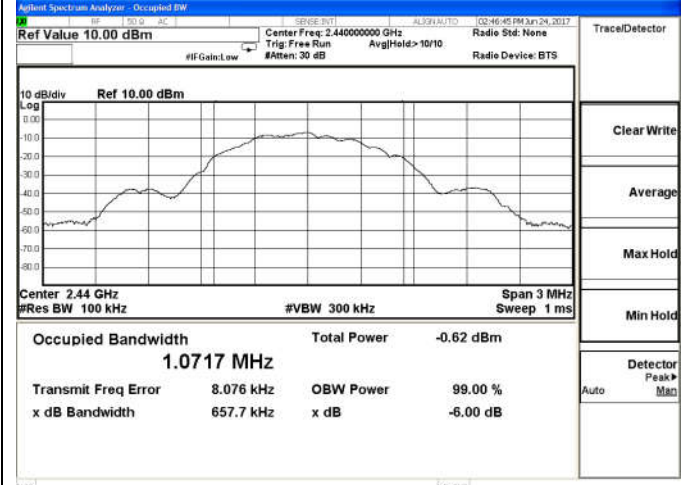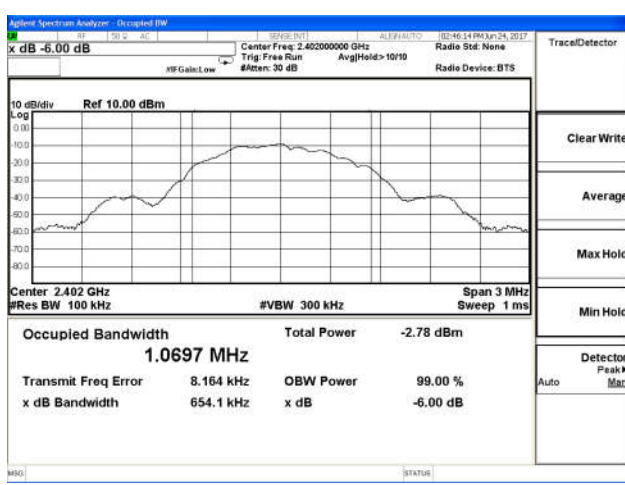

Channel 0 / 2402 MHz

Channel 19 / 2440 MHz

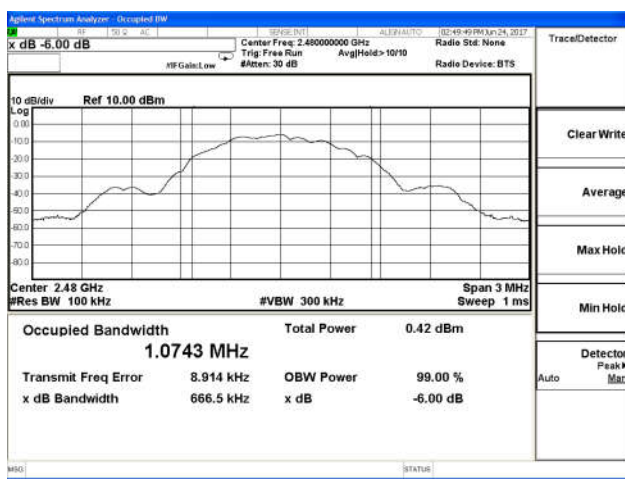

Channel 39 / 2480 MHz

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (\2\) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|---|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10 th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average |

| Receiver Parameter | Setting |
|------------------------|--|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG |
| Start ~ Stop Frequency | 150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB/VB 120kHz/1MHz for QP |

5.5.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.

--- If the EUT is a floor standing device, it is placed on the ground.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions.

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna height is 0.8 meter.

--- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

--- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).

--- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.


Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.


5.5.4. Test Setup Layout

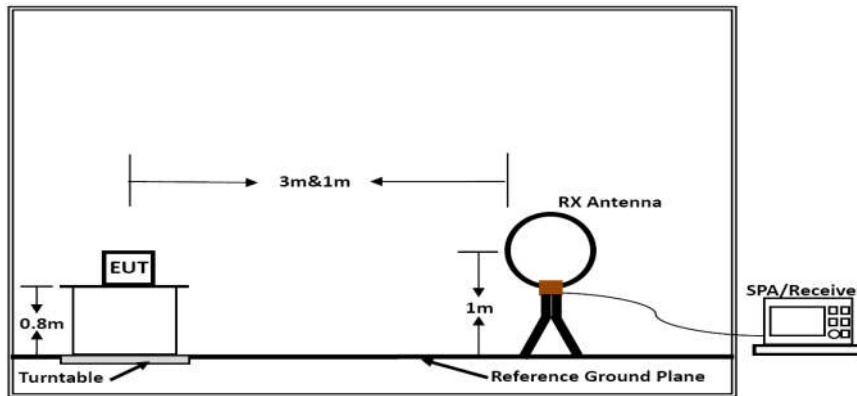

Below 30MHz

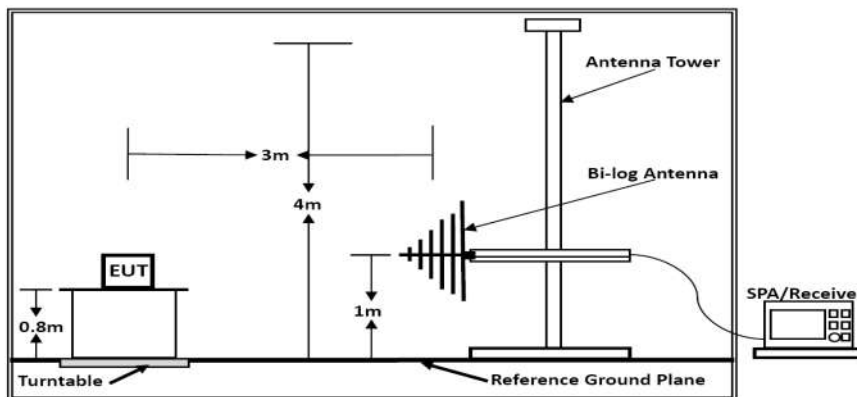

Below 1GHz

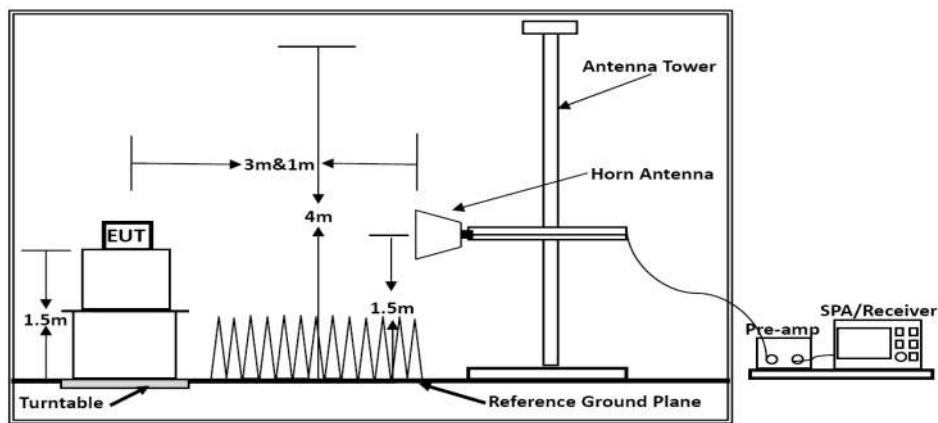

Above 1GHz

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

| | | | |
|---------------|-------------|----------------|--------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b/g/n & BT LE |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|-------------|--------------|-----------------|-------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance / test distance) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

| | | | |
|---------------|-------------|----------------|------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b (High CH) |

Test result for IEEE 802.11b (High Channel)


Horizontal:

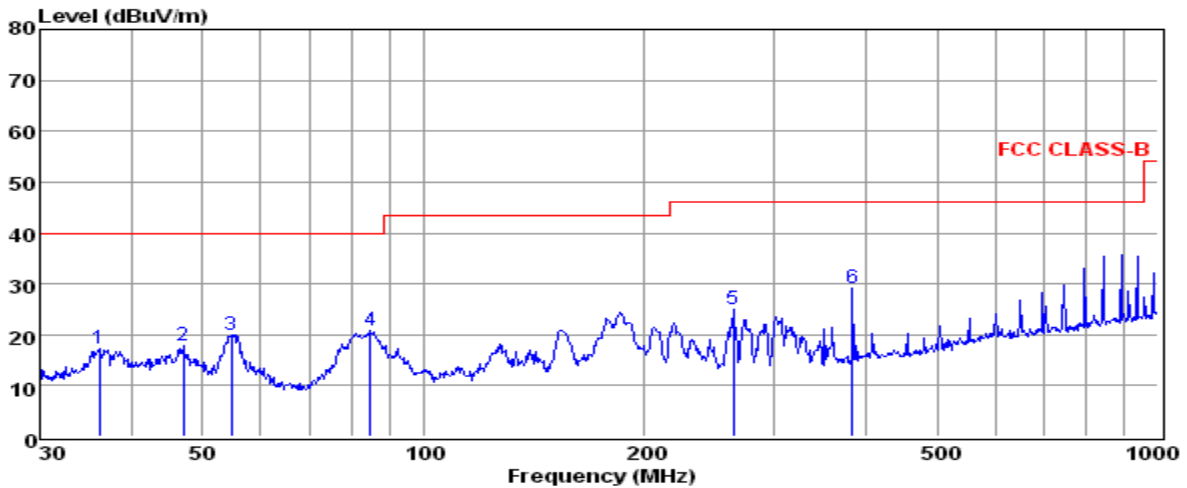

| | Freq MHz | Reading dBuV | CabLos dB | Antfac dB/m | Measured dBuV/m | Limit dBuV/m | Over dB | Remark |
|---|-------------|-----------------|--------------|----------------|--------------------|-----------------|------------|--------|
| 1 | 36.13 | 4.27 | 0.41 | 12.59 | 17.27 | 40.00 | -22.73 | QP |
| 2 | 46.99 | 4.10 | 0.35 | 13.43 | 17.88 | 40.00 | -22.12 | QP |
| 3 | 54.64 | 6.55 | 0.46 | 13.04 | 20.05 | 40.00 | -19.95 | QP |
| 4 | 84.70 | 10.00 | 0.54 | 10.20 | 20.74 | 40.00 | -19.26 | QP |
| 5 | 263.82 | 11.66 | 1.03 | 12.17 | 24.86 | 46.00 | -21.14 | QP |
| 6 | 383.93 | 13.39 | 1.13 | 14.68 | 29.20 | 46.00 | -16.80 | QP |

- Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that are 20db below the official limit are not reported

Vertical:

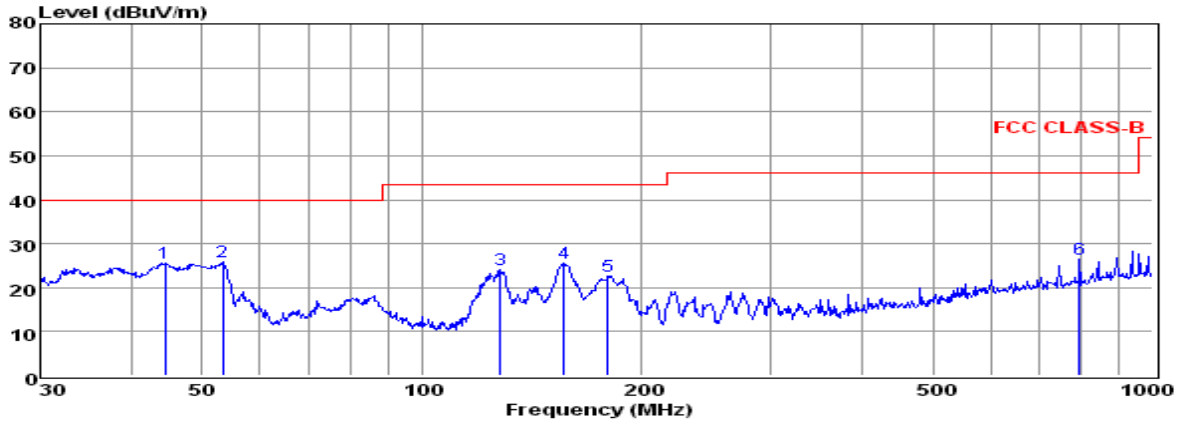


| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 44.43 | 11.56 | 0.41 | 13.55 | 25.52 | 40.00 | -14.48 | QP |
| 2 | 53.32 | 12.18 | 0.46 | 13.10 | 25.74 | 40.00 | -14.26 | QP |
| 3 | 128.11 | 14.21 | 0.67 | 9.22 | 24.10 | 43.50 | -19.40 | QP |
| 4 | 156.46 | 16.26 | 0.83 | 8.52 | 25.61 | 43.50 | -17.89 | QP |
| 5 | 179.39 | 12.13 | 0.89 | 9.64 | 22.66 | 43.50 | -20.84 | QP |
| 6 | 793.40 | 4.86 | 1.73 | 19.98 | 26.57 | 46.00 | -19.43 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that at 20db below the official limit are not reported

| | | | |
|---------------|-------------|----------------|--------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | BLE(High CH) |


Horizontal:

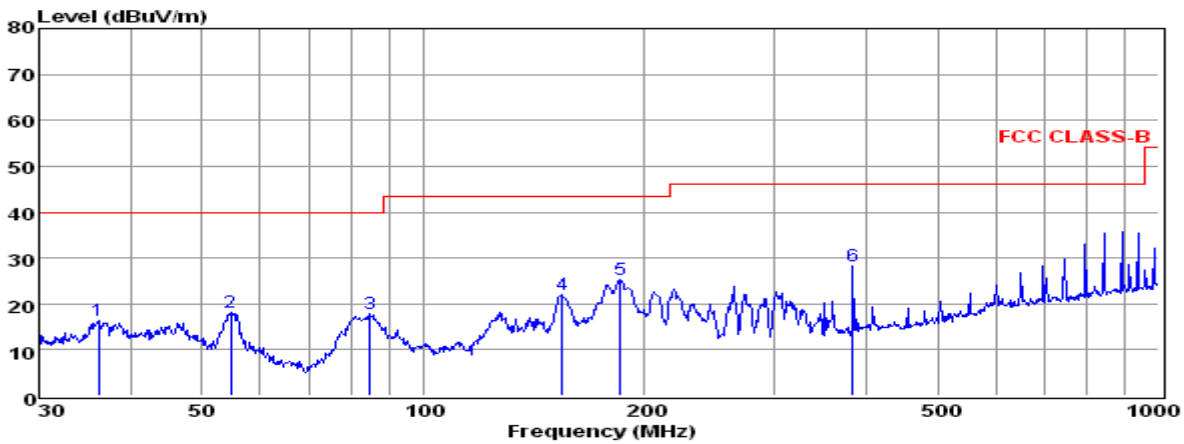

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 36.13 | 3.27 | 0.41 | 12.59 | 16.27 | 40.00 | -23.73 | QP |
| 2 | 54.64 | 4.55 | 0.46 | 13.04 | 18.05 | 40.00 | -21.95 | QP |
| 3 | 84.70 | 7.00 | 0.54 | 10.20 | 17.74 | 40.00 | -22.26 | QP |
| 4 | 154.28 | 12.74 | 0.76 | 8.44 | 21.94 | 43.50 | -21.56 | QP |
| 5 | 185.14 | 14.52 | 0.70 | 10.13 | 25.35 | 43.50 | -18.15 | QP |
| 6 | 383.93 | 12.39 | 1.13 | 14.68 | 28.20 | 46.00 | -17.80 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that at 20db below the official limit are not reported

Vertical:

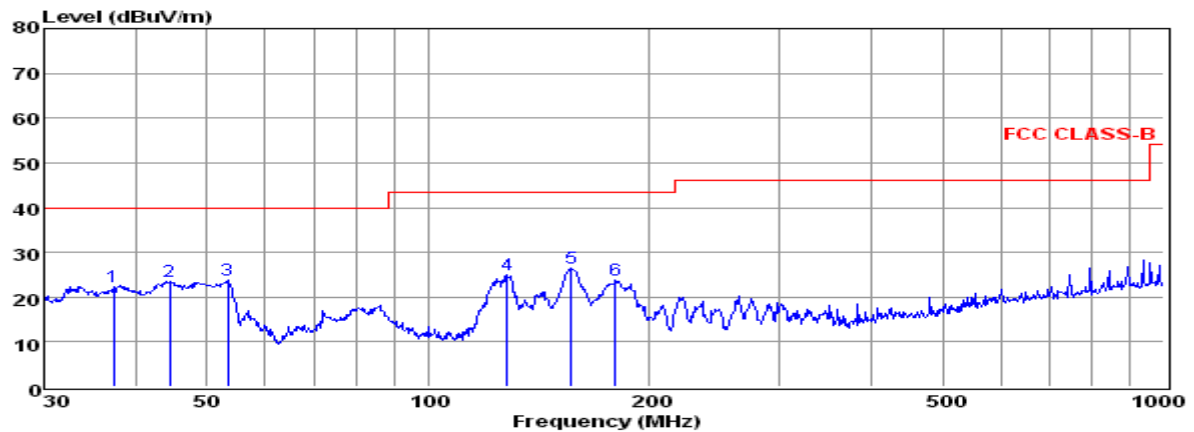

| | Freq | Reading | CabLos | Antfac | Measured | Limit | Over | Remark |
|---|--------|---------|--------|--------|----------|--------|--------|--------|
| | MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 | 37.29 | 9.04 | 0.41 | 12.89 | 22.34 | 40.00 | -17.66 | QP |
| 2 | 44.43 | 9.56 | 0.41 | 13.55 | 23.52 | 40.00 | -16.48 | QP |
| 3 | 53.32 | 10.18 | 0.46 | 13.10 | 23.74 | 40.00 | -16.26 | QP |
| 4 | 128.11 | 15.21 | 0.67 | 9.22 | 25.10 | 43.50 | -18.40 | QP |
| 5 | 156.46 | 17.26 | 0.83 | 8.52 | 26.61 | 43.50 | -16.89 | QP |
| 6 | 179.39 | 13.13 | 0.89 | 9.64 | 23.66 | 43.50 | -19.84 | QP |

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b&BLE (High Channel)). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.5.8. Results for Radiated Emissions (Above 1GHz)

IEEE 802.11b

Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00 | 54.13 | 33.06 | 35.14 | 3.98 | 56.03 | 74.00 | -17.97 | Peak | Horizontal |
| 4824.00 | 38.14 | 33.06 | 35.14 | 3.98 | 40.04 | 54.00 | -13.96 | Average | Horizontal |
| 4824.00 | 58.27 | 33.06 | 35.14 | 3.98 | 60.17 | 74.00 | -13.83 | Peak | Vertical |
| 4824.00 | 41.05 | 33.06 | 35.14 | 3.98 | 42.95 | 54.00 | -11.05 | Average | Vertical |

Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00 | 55.18 | 33.16 | 35.15 | 3.96 | 57.15 | 74.00 | -16.85 | Peak | Horizontal |
| 4874.00 | 39.05 | 33.16 | 35.15 | 3.96 | 41.02 | 54.00 | -12.98 | Average | Horizontal |
| 4874.00 | 58.08 | 33.16 | 35.15 | 3.96 | 60.05 | 74.00 | -13.95 | Peak | Vertical |
| 4874.00 | 42.40 | 33.16 | 35.15 | 3.96 | 44.37 | 54.00 | -9.63 | Average | Vertical |

Channel 11 / 2462MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00 | 54.66 | 33.26 | 35.14 | 3.98 | 56.76 | 74.00 | -17.24 | Peak | Horizontal |
| 4924.00 | 39.54 | 33.26 | 35.14 | 3.98 | 41.64 | 54.00 | -12.36 | Average | Horizontal |
| 4924.00 | 58.54 | 33.26 | 35.14 | 3.98 | 60.64 | 74.00 | -13.36 | Peak | Vertical |
| 4924.00 | 42.08 | 33.26 | 35.14 | 3.98 | 44.18 | 54.00 | -9.82 | Average | Vertical |

IEEE 802.11g

Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00 | 55.50 | 33.06 | 35.14 | 3.98 | 57.40 | 74.00 | -16.60 | Peak | Horizontal |
| 4824.00 | 39.95 | 33.06 | 35.14 | 3.98 | 41.85 | 54.00 | -12.15 | Average | Horizontal |
| 4824.00 | 59.66 | 33.06 | 35.14 | 3.98 | 61.56 | 74.00 | -12.44 | Peak | Vertical |
| 4824.00 | 42.45 | 33.06 | 35.14 | 3.98 | 44.35 | 54.00 | -9.65 | Average | Vertical |

Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00 | 54.09 | 33.16 | 35.15 | 3.96 | 56.06 | 74.00 | -17.94 | Peak | Horizontal |
| 4874.00 | 39.46 | 33.16 | 35.15 | 3.96 | 41.43 | 54.00 | -12.57 | Average | Horizontal |
| 4874.00 | 59.04 | 33.16 | 35.15 | 3.96 | 61.01 | 74.00 | -12.99 | Peak | Vertical |
| 4874.00 | 42.61 | 33.16 | 35.15 | 3.96 | 44.58 | 54.00 | -9.42 | Average | Vertical |

Channel 11 / 2462MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00 | 54.67 | 33.26 | 35.14 | 3.98 | 56.77 | 74.00 | -17.23 | Peak | Horizontal |
| 4924.00 | 38.29 | 33.26 | 35.14 | 3.98 | 40.39 | 54.00 | -13.61 | Average | Horizontal |
| 4924.00 | 59.49 | 33.26 | 35.14 | 3.98 | 61.59 | 74.00 | -12.41 | Peak | Vertical |
| 4924.00 | 42.16 | 33.26 | 35.14 | 3.98 | 44.26 | 54.00 | -9.74 | Average | Vertical |

IEEE 802.11n HT20

Channel 1 / 2412MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4824.00 | 49.48 | 33.06 | 35.14 | 3.98 | 51.38 | 74.00 | -22.62 | Peak | Horizontal |
| 4824.00 | 34.16 | 33.06 | 35.14 | 3.98 | 36.06 | 54.00 | -17.94 | Average | Horizontal |
| 4824.00 | 54.10 | 33.06 | 35.14 | 3.98 | 56.00 | 74.00 | -18.00 | Peak | Vertical |
| 4824.00 | 37.76 | 33.06 | 35.14 | 3.98 | 39.66 | 54.00 | -14.34 | Average | Vertical |

Channel 6 / 2437MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00 | 50.58 | 33.16 | 35.15 | 3.96 | 52.55 | 74.00 | -21.45 | Peak | Horizontal |
| 4874.00 | 35.29 | 33.16 | 35.15 | 3.96 | 37.26 | 54.00 | -16.74 | Average | Horizontal |
| 4874.00 | 55.47 | 33.16 | 35.15 | 3.96 | 57.44 | 74.00 | -16.56 | Peak | Vertical |
| 4874.00 | 38.84 | 33.16 | 35.15 | 3.96 | 40.81 | 54.00 | -13.19 | Average | Vertical |

Channel 11 / 2462MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4924.00 | 49.53 | 33.26 | 35.14 | 3.98 | 51.63 | 74.00 | -22.37 | Peak | Horizontal |
| 4924.00 | 35.00 | 33.26 | 35.14 | 3.98 | 37.10 | 54.00 | -16.90 | Average | Horizontal |
| 4924.00 | 54.04 | 33.26 | 35.14 | 3.98 | 56.14 | 74.00 | -17.86 | Peak | Vertical |
| 4924.00 | 38.66 | 33.26 | 35.14 | 3.98 | 40.76 | 54.00 | -13.24 | Average | Vertical |

IEEE 802.11n HT40

Channel 3 / 2422 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4844.00 | 49.42 | 33.06 | 35.14 | 3.98 | 51.32 | 74.00 | -22.68 | Peak | Horizontal |
| 4844.00 | 35.10 | 33.06 | 35.14 | 3.98 | 37.00 | 54.00 | -17.00 | Average | Horizontal |
| 4844.00 | 54.10 | 33.06 | 35.14 | 3.98 | 56.00 | 74.00 | -18.00 | Peak | Vertical |
| 4844.00 | 38.18 | 33.06 | 35.14 | 3.98 | 40.08 | 54.00 | -13.92 | Average | Vertical |

Channel 6 / 2437 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4874.00 | 50.40 | 33.16 | 35.15 | 3.96 | 52.37 | 74.00 | -21.63 | Peak | Horizontal |
| 4874.00 | 34.84 | 33.16 | 35.15 | 3.96 | 36.81 | 54.00 | -17.19 | Average | Horizontal |
| 4874.00 | 54.31 | 33.16 | 35.15 | 3.96 | 56.28 | 74.00 | -17.72 | Peak | Vertical |
| 4874.00 | 37.91 | 33.16 | 35.15 | 3.96 | 39.88 | 54.00 | -14.12 | Average | Vertical |

Channel 9 / 2452 MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4904.00 | 50.90 | 33.26 | 35.14 | 3.98 | 53.00 | 74.00 | -21.00 | Peak | Horizontal |
| 4904.00 | 34.83 | 33.26 | 35.14 | 3.98 | 36.93 | 54.00 | -17.07 | Average | Horizontal |
| 4904.00 | 54.52 | 33.26 | 35.14 | 3.98 | 56.62 | 74.00 | -17.38 | Peak | Vertical |
| 4904.00 | 37.84 | 33.26 | 35.14 | 3.98 | 39.94 | 54.00 | -14.06 | Average | Vertical |

BT LE

Channel 0 / 2402MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4804.00 | 48.02 | 33.06 | 35.04 | 3.94 | 49.98 | 74.00 | -24.02 | Peak | Horizontal |
| 4804.00 | 31.15 | 33.06 | 35.04 | 3.94 | 33.11 | 54.00 | -20.89 | Average | Horizontal |
| 4804.00 | 48.85 | 33.06 | 35.04 | 3.94 | 50.81 | 74.00 | -23.19 | Peak | Vertical |
| 4804.00 | 34.15 | 33.06 | 35.04 | 3.94 | 36.11 | 54.00 | -17.89 | Average | Vertical |

Channel 19 / 2440MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4880.00 | 48.21 | 33.16 | 35.15 | 3.96 | 50.18 | 74.00 | -23.82 | Peak | Horizontal |
| 4880.00 | 33.74 | 33.16 | 35.15 | 3.96 | 35.71 | 54.00 | -18.29 | Average | Horizontal |
| 4880.00 | 49.68 | 33.16 | 35.15 | 3.96 | 51.65 | 74.00 | -22.35 | Peak | Vertical |
| 4880.00 | 35.83 | 33.16 | 35.15 | 3.96 | 37.80 | 54.00 | -16.20 | Average | Vertical |

Channel 39 / 2480MHz

| Freq. MHz | Reading dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|-----------|--------------|----------------|--------------|--------------|-----------------|--------------|-----------|---------|------------|
| 4960.00 | 48.37 | 33.26 | 35.14 | 3.98 | 50.47 | 74.00 | -23.53 | Peak | Horizontal |
| 4960.00 | 32.69 | 33.26 | 35.14 | 3.98 | 34.79 | 54.00 | -19.21 | Average | Horizontal |
| 4960.00 | 50.86 | 33.26 | 35.14 | 3.98 | 52.96 | 74.00 | -21.04 | Peak | Vertical |
| 4960.00 | 35.95 | 33.26 | 35.14 | 3.98 | 38.05 | 54.00 | -15.95 | Average | Vertical |

Notes:

1. Measuring frequencies from 9 KHz~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9 KHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20
13.5Mbps at IEEE 802.11n HT40

Results of Restricted Bands Test (Radiated)

According to C63.10:2013 Clause 11.12.2.2, for conducted measurements above 1000 MHz, EIRP shall be computed as specified in 11.12.2.2, and then field strength shall be computed as follows (see 11.12.2.2e):

1) $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{m}]) + 104.77$, where E is field strength and d is distance at which the field strength limit is specified in the applicable requirements.

2) $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3 \text{ m}$.

Then the radiated field strength E can be calculated as

$$E = \text{EIRP}[\text{dBm}] + 95.2$$

=Antenna port power+Antenna gain(or 2dBi, which is greater)+95.2

And note if the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater.

Add the appropriate maximum ground reflection factor to the EIRP (6 dB for frequencies < 30 MHz; 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive; and 0 dB for frequencies > 1000 MHz).

If all peak measurement results satisfy the average limit, then average measurements are not required.

| 802.11b | | | | | | |
|-----------|-------------------|------------------|---------------------|--------------|-----------|---------|
| Freq. MHz | Reading Level dBm | Antenna Gain dBi | Calculated E dBuV/m | Limit dBuV/m | Margin dB | Remark |
| 2310.000 | -50.919 | -1.00 | 46.28 | 74.00 | -27.72 | Peak |
| 2310.000 | -62.968 | -1.00 | 34.23 | 54.00 | -19.77 | Average |
| 2390.000 | -49.841 | -1.00 | 47.36 | 74.00 | -26.64 | Peak |
| 2390.000 | -61.946 | -1.00 | 35.25 | 54.00 | -18.75 | Average |
| 2483.500 | -49.395 | -1.00 | 47.81 | 74.00 | -26.20 | Peak |
| 2483.500 | -60.959 | -1.00 | 36.24 | 54.00 | -17.76 | Average |
| 2500.000 | -49.622 | -1.00 | 47.58 | 74.00 | -26.42 | Peak |
| 2500.000 | -61.074 | -1.00 | 36.13 | 54.00 | -17.87 | Average |



| 802.11g | | | | | | |
|-----------|-------------------|------------------|---------------------|--------------|-----------|---------|
| Freq. MHz | Reading Level dBm | Antenna Gain dBi | Calculated E dBuV/m | Limit dBuV/m | Margin dB | Remark |
| 2310.000 | -50.804 | -1.00 | 46.40 | 74.00 | -27.60 | Peak |
| 2310.000 | -62.970 | -1.00 | 34.23 | 54.00 | -19.77 | Average |
| 2390.000 | -50.314 | -1.00 | 46.89 | 74.00 | -27.11 | Peak |
| 2390.000 | -61.018 | -1.00 | 36.18 | 54.00 | -17.82 | Average |
| 2483.500 | -46.009 | -1.00 | 51.19 | 74.00 | -22.81 | Peak |
| 2483.500 | -59.656 | -1.00 | 37.54 | 54.00 | -16.46 | Average |
| 2500.000 | -48.247 | -1.00 | 48.95 | 74.00 | -25.05 | Peak |
| 2500.000 | -60.116 | -1.00 | 37.08 | 54.00 | -16.92 | Average |

| 802.11n(HT20) | | | | | | |
|---------------|-------------------|------------------|---------------------|--------------|-----------|---------|
| Freq. MHz | Reading Level dBm | Antenna Gain dBi | Calculated E dBuV/m | Limit dBuV/m | Margin dB | Remark |
| 2310.000 | -51.389 | -1.00 | 45.81 | 74.00 | -28.19 | Peak |
| 2310.000 | -62.948 | -1.00 | 34.25 | 54.00 | -19.75 | Average |
| 2390.000 | -45.748 | -1.00 | 51.45 | 74.00 | -22.55 | Peak |
| 2390.000 | -59.183 | -1.00 | 38.02 | 54.00 | -15.98 | Average |
| 2483.500 | -39.704 | -1.00 | 57.50 | 74.00 | -16.50 | Peak |
| 2483.500 | -59.024 | -1.00 | 38.18 | 54.00 | -15.82 | Average |
| 2500.000 | -48.185 | -1.00 | 49.02 | 74.00 | -24.99 | Peak |
| 2500.000 | -60.176 | -1.00 | 37.02 | 54.00 | -16.98 | Average |

| 802.11n(HT40) | | | | | | |
|---------------|-------------------|------------------|---------------------|--------------|-----------|---------|
| Freq. MHz | Reading Level dBm | Antenna Gain dBi | Calculated E dBuV/m | Limit dBuV/m | Margin dB | Remark |
| 2310.000 | -51.562 | -1.00 | 45.64 | 74.00 | -28.36 | Peak |
| 2310.000 | -62.949 | -1.00 | 34.25 | 54.00 | -19.75 | Average |
| 2390.000 | -49.431 | -1.00 | 47.77 | 74.00 | -26.23 | Peak |
| 2390.000 | -61.993 | -1.00 | 35.21 | 54.00 | -18.79 | Average |
| 2483.500 | -48.468 | -1.00 | 48.73 | 74.00 | -25.27 | Peak |
| 2483.500 | -59.785 | -1.00 | 37.42 | 54.00 | -16.59 | Average |
| 2500.000 | -45.444 | -1.00 | 51.76 | 74.00 | -22.24 | Peak |
| 2500.000 | -58.766 | -1.00 | 38.43 | 54.00 | -15.57 | Average |



| BT LE | | | | | | |
|-----------|-------------------|------------------|---------------------|--------------|-----------|--------|
| Freq. MHz | Reading Level dBm | Antenna Gain dBi | Calculated E dBuV/m | Limit dBuV/m | Margin dB | Remark |
| 2310.000 | -61.362 | -1.00 | 35.838 | 74.00 | -38.162 | Peak |
| 2390.000 | -60.457 | -1.00 | 36.743 | 74.00 | -37.257 | Peak |
| 2483.500 | -58.705 | -1.00 | 38.495 | 74.00 | -35.505 | Peak |
| 2500.000 | -61.164 | -1.00 | 36.036 | 74.00 | -37.964 | Peak |

Test plot of Restricted Bands-conducted

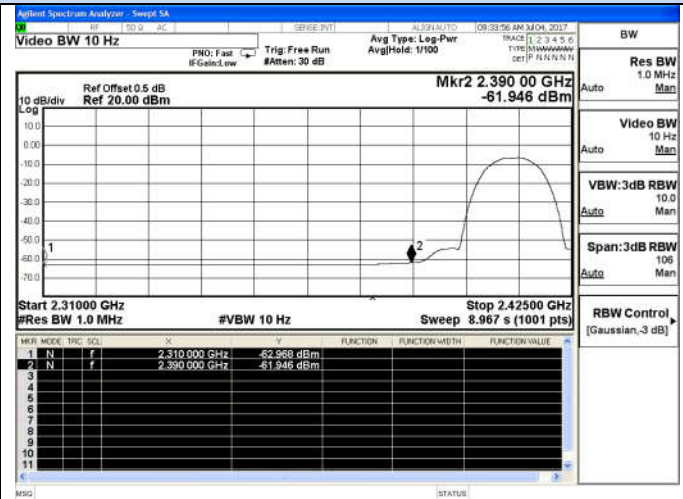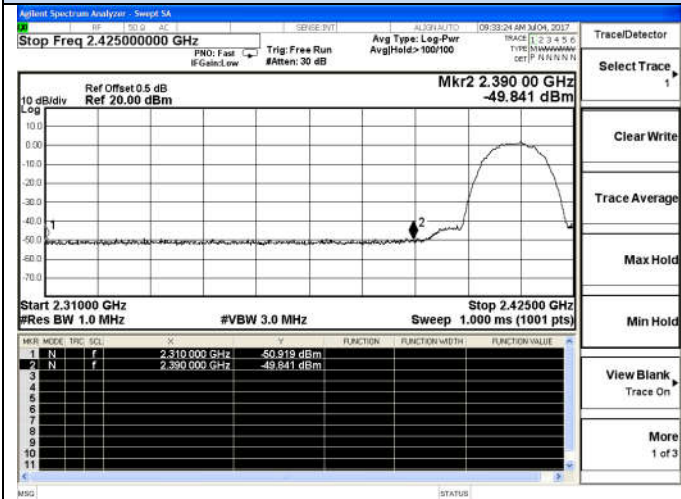



802.11b-Low channel(Peak)

802.11b-Low channel(Average)

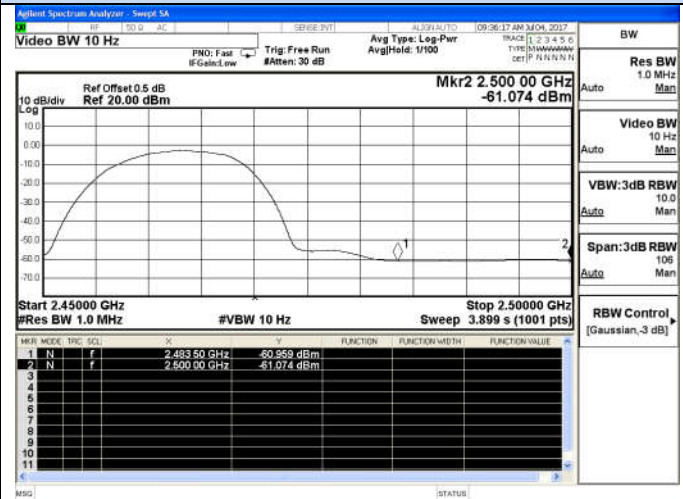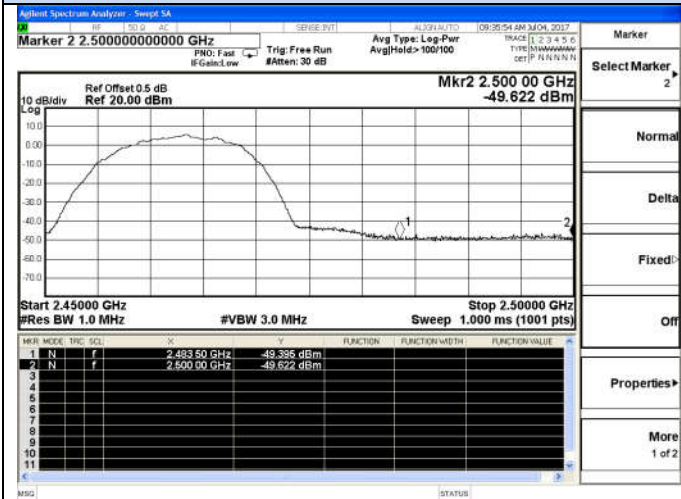

802.11b-High channel(Peak)


802.11b-High channel(Average)

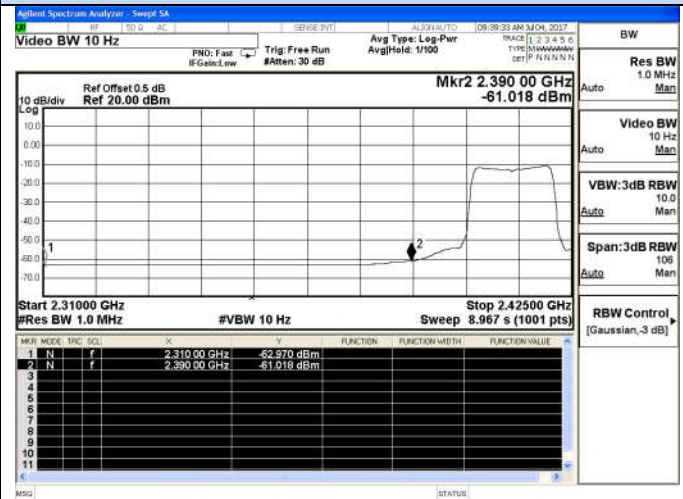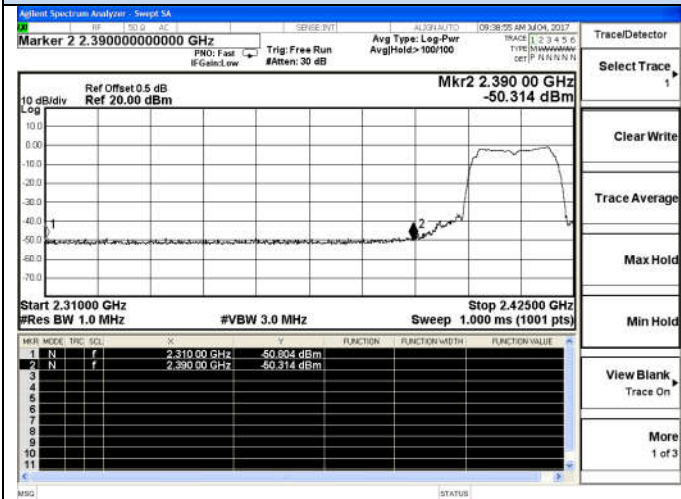


802.11g-Low channel(Peak)

802.11g-Low channel(Average)


Test plot of Restricted Bands

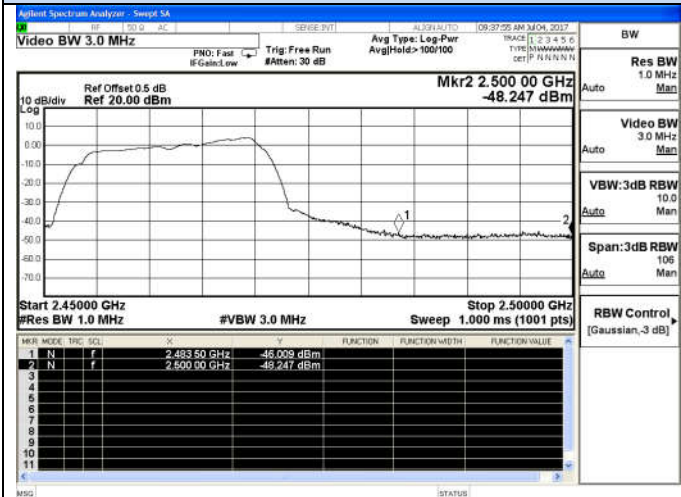


802.11g-High channel(Peak)

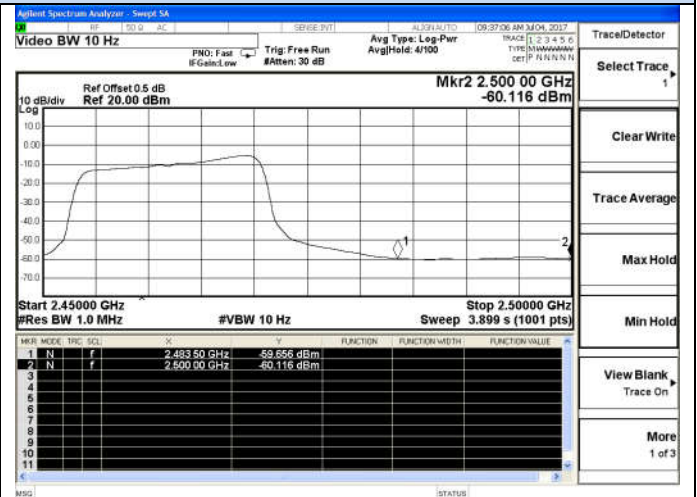


802.11g-High channel(Average)

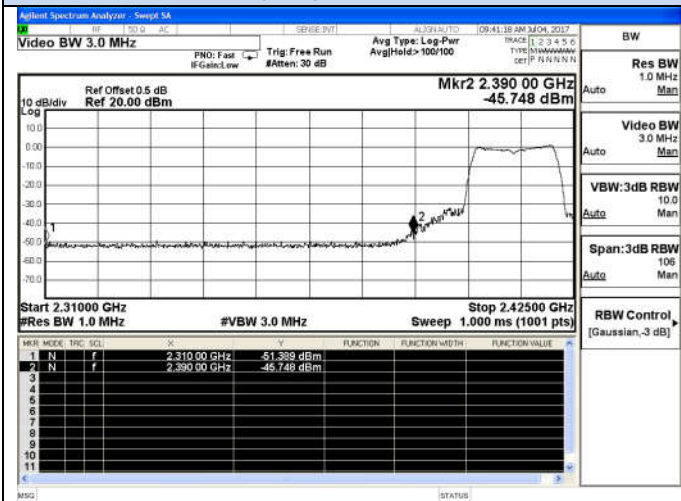


802.11n(HT20)-Low channel(Peak)

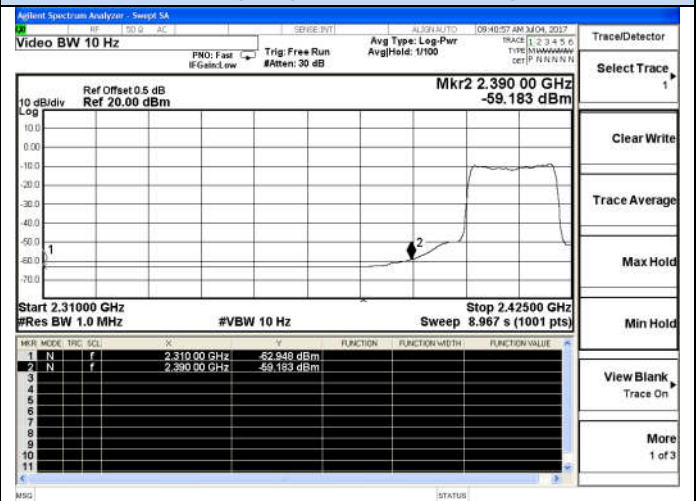

802.11n(HT20)-Low channel(Average)

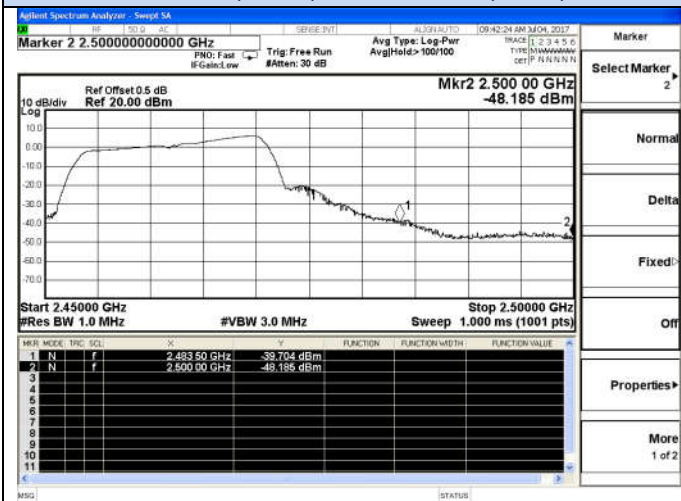


802.11n(HT20)-High channel(Peak)

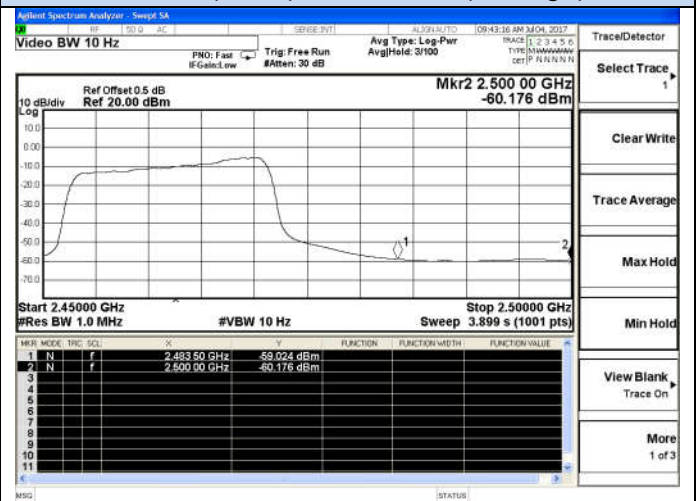


802.11n(HT20)-High channel(Average)


Test plot of Restricted Bands

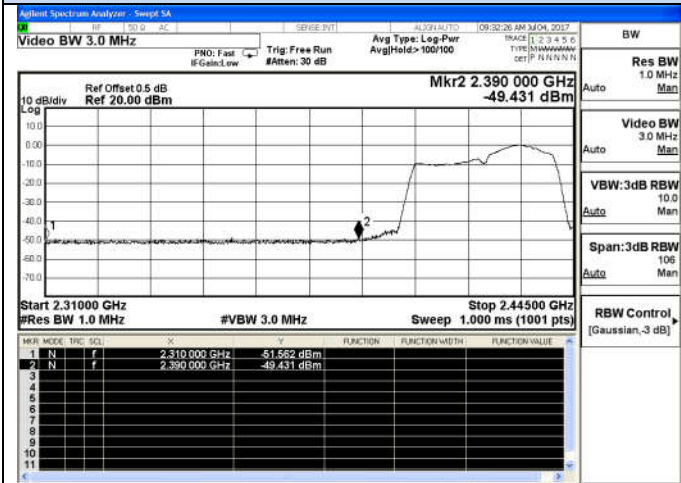


802.11n(HT40)-Low channel(Peak)

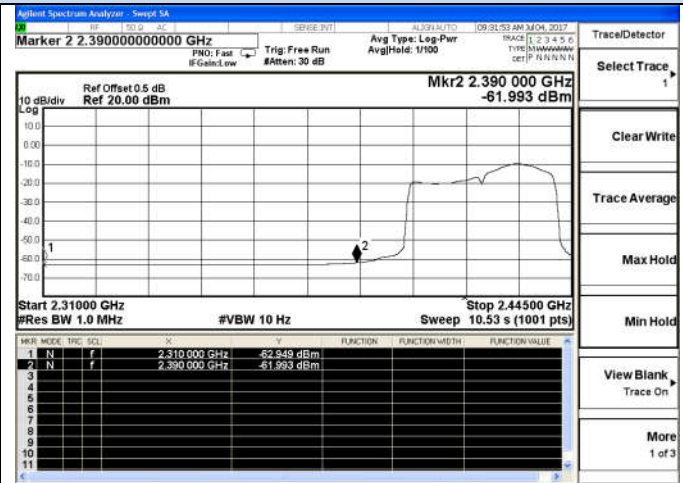

802.11n(HT40)-Low channel(Average)

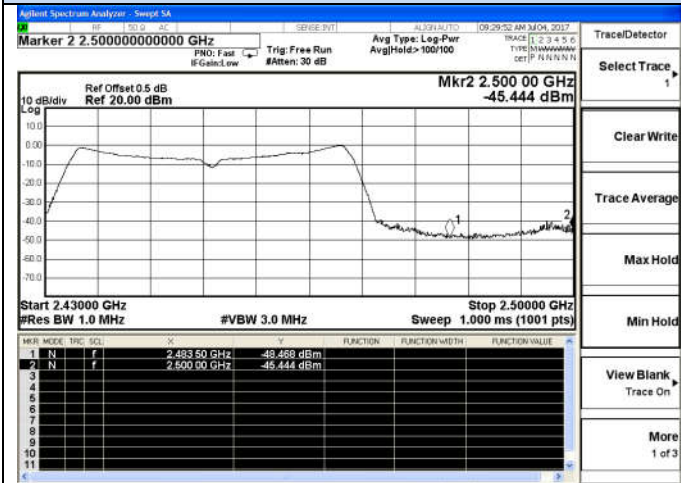


802.11n(HT40)-High channel(Peak)

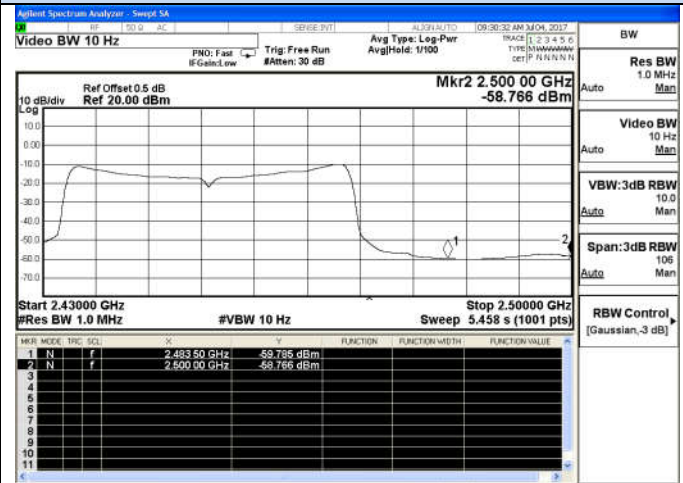


802.11n(HT40)-High channel(Average)

Test plot of Restricted Bands

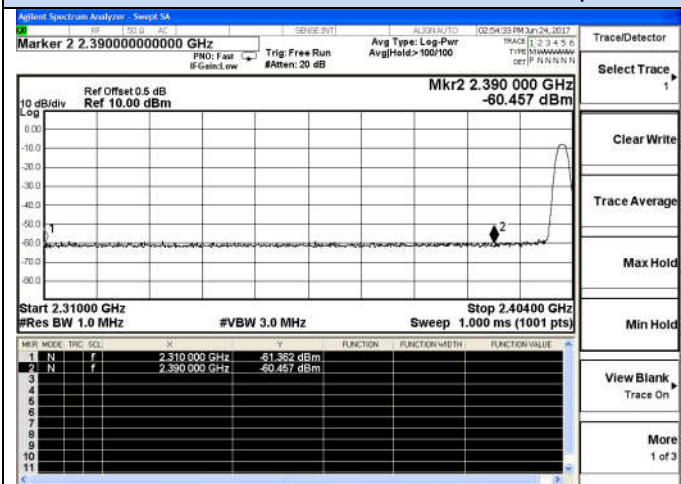

BT LE-Low channel(Peak)

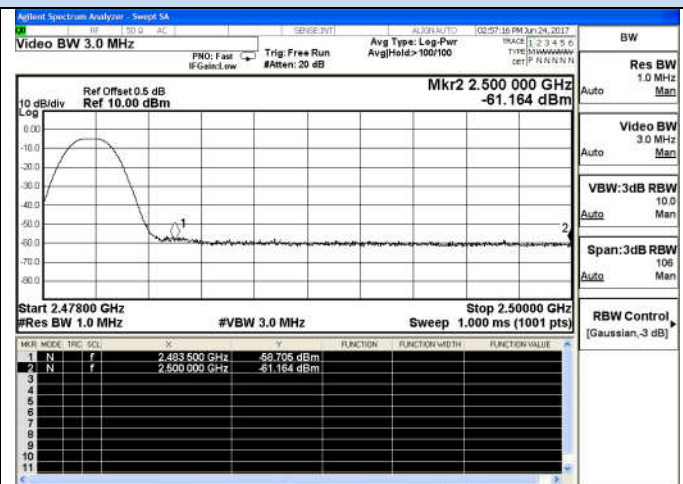

BT LE-High channel(Peak)

5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---------------|
| Detector | Peak |
| Attenuation | Auto |
| RB / VB (Emission in restricted band) | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 KHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.6.6. Test Results of Conducted Spurious Emissions



| | | | |
|---------------|-------------|----------------|--------------------------|
| Temperature | 25°C | Humidity | 46% |
| Test Engineer | Jayden Zhuo | Configurations | IEEE 802.11b/g/n & BT LE |

| Test Mode | Channel | Frequency (MHz) | Spurious RF Conducted Emission (dBc) | Limits (dBc) | Verdict |
|-------------------|---------|-----------------|--------------------------------------|--------------|---------|
| IEEE 802.11b | 1 | 2412 | <-20 | -20 | PASS |
| | 6 | 2437 | <-20 | | |
| | 11 | 2462 | <-20 | | |
| IEEE 802.11g | 1 | 2412 | <-20 | -20 | PASS |
| | 6 | 2437 | <-20 | | |
| | 11 | 2462 | <-20 | | |
| IEEE 802.11n HT20 | 1 | 2412 | <-20 | -20 | PASS |
| | 6 | 2437 | <-20 | | |
| | 11 | 2462 | <-20 | | |
| IEEE 802.11n HT40 | 3 | 2412 | <-20 | -20 | PASS |
| | 6 | 2437 | <-20 | | |
| | 9 | 2452 | <-20 | | |
| BT – LE | 0 | 2402 | <-20 | -20 | PASS |
| | 19 | 2440 | <-20 | | |
| | 39 | 2480 | <-20 | | |

Remark:



1. Measured RF conducted spurious emission at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40; “---“means that the fundamental frequency not for 15.209 limits requirement.
4. Please refer to following plots;

RF Conducted Spurious Emission
IEEE 802.11b

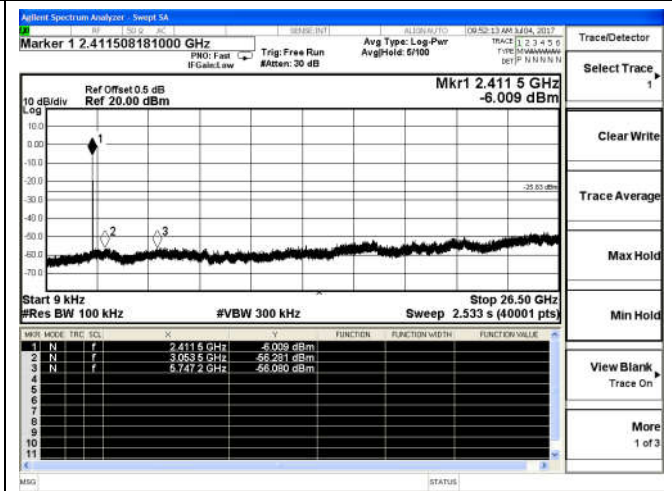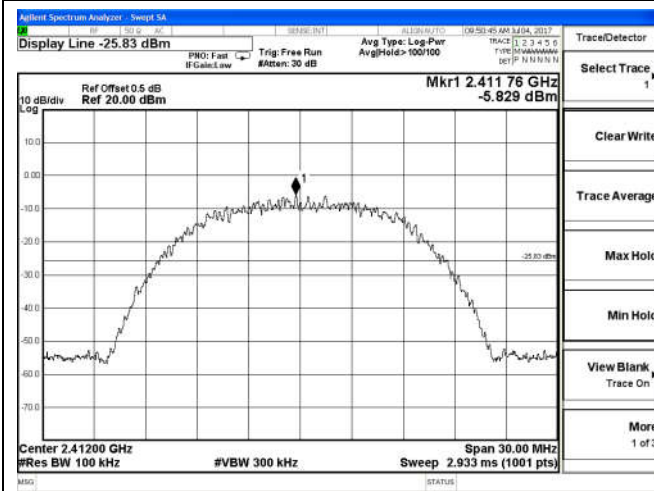



Reference Peak Value

9 KHz – 26.5 GHz

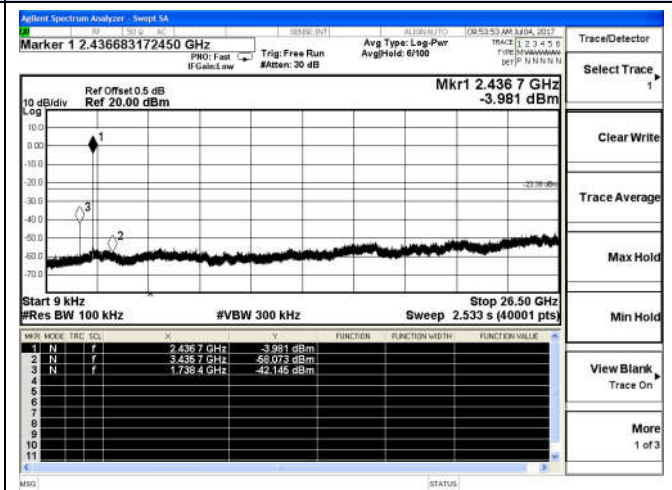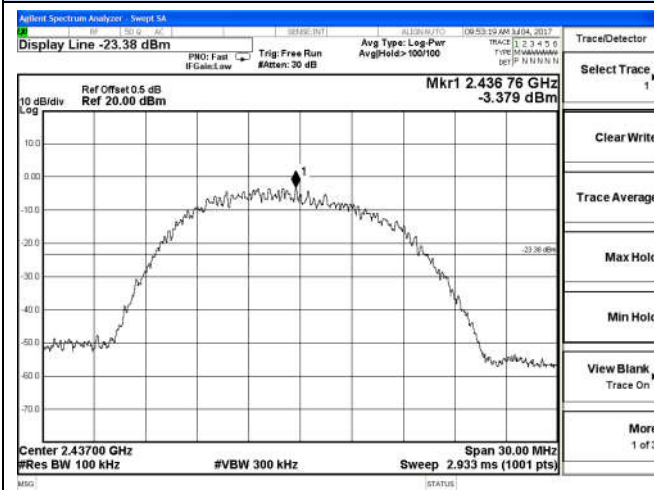

Reference Peak Value




9 KHz – 26.5 GHz

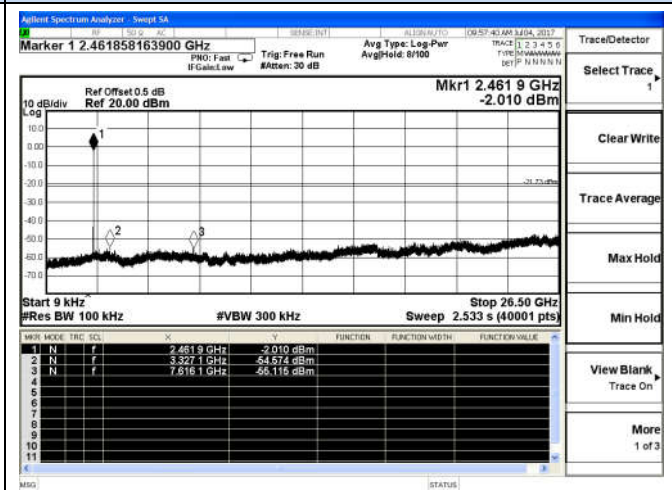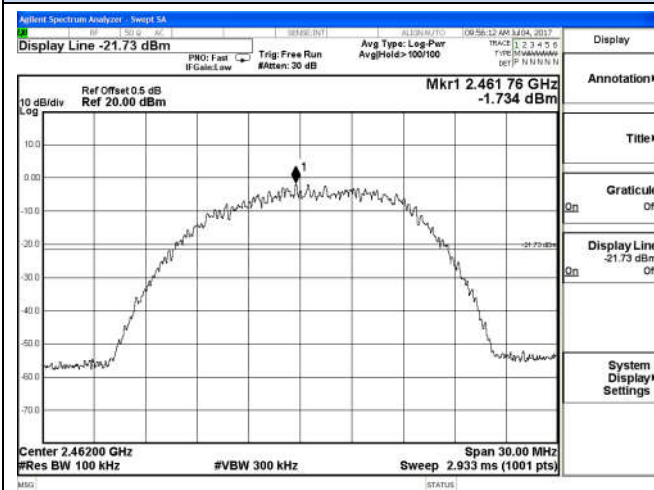




Reference Peak Value

9 KHz – 26.5 GHz


RF Conducted Spurious Emission IEEE 802.11g

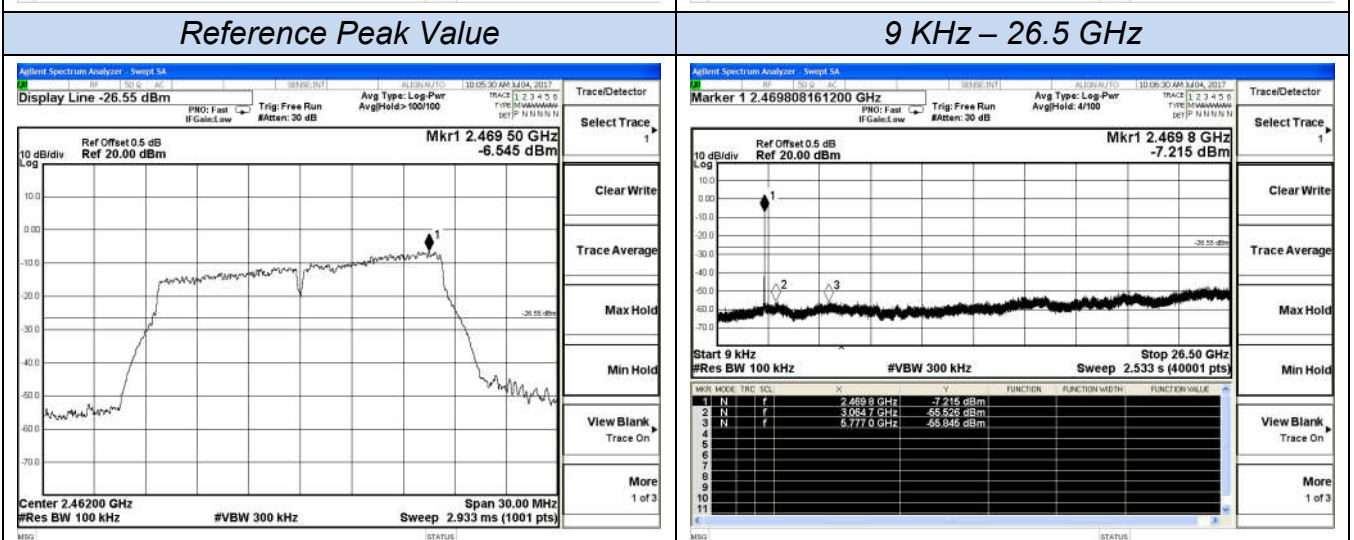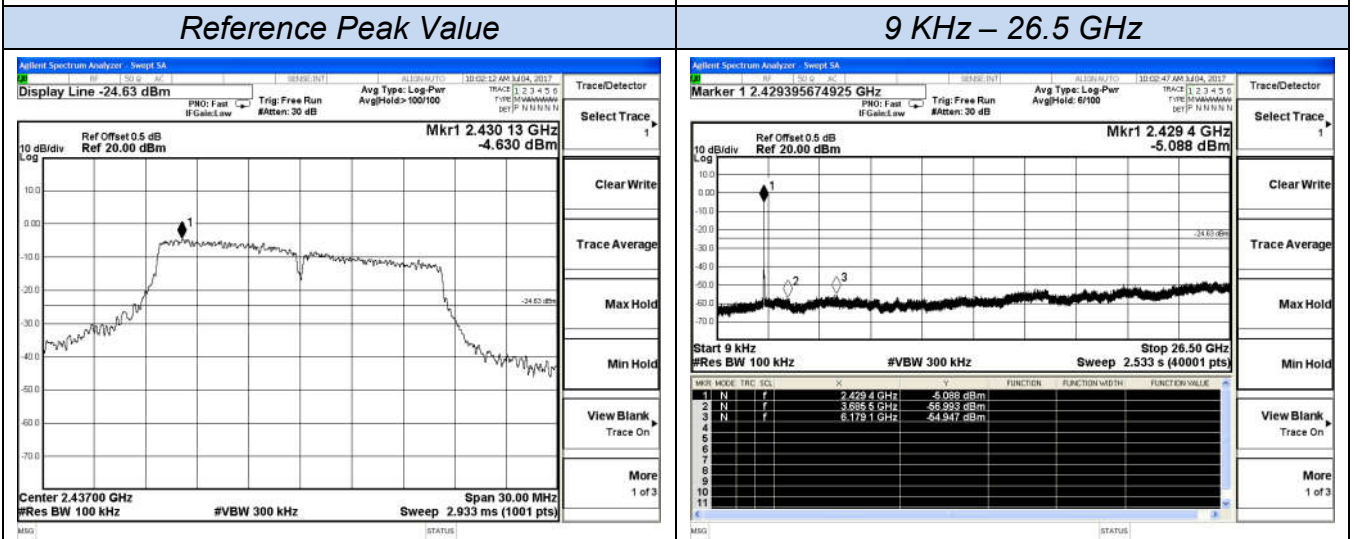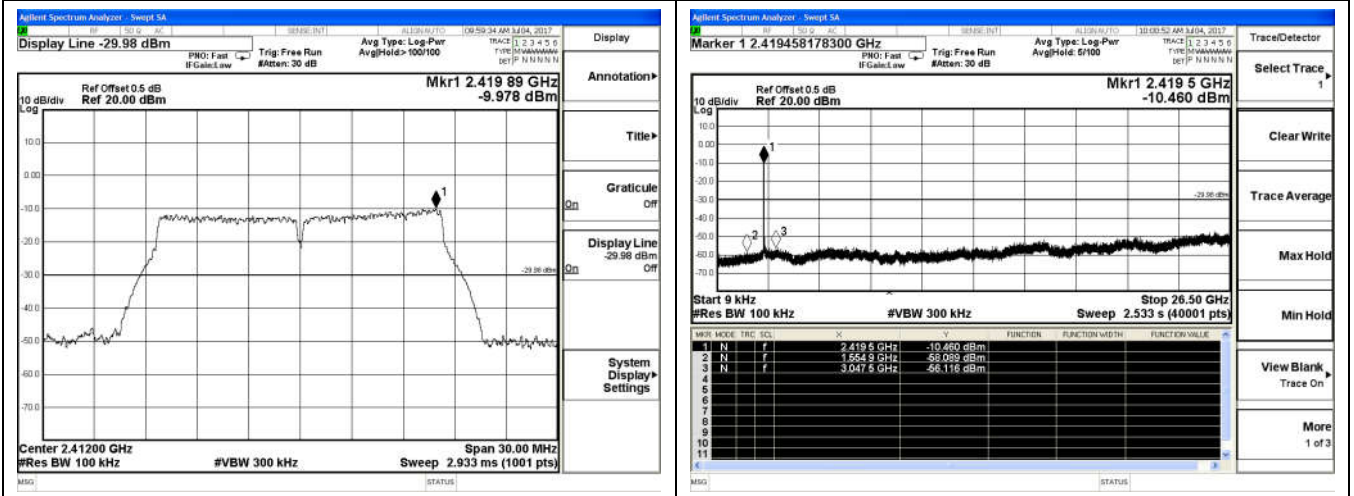


RF Conducted Spurious Emission IEEE 802.11n HT20

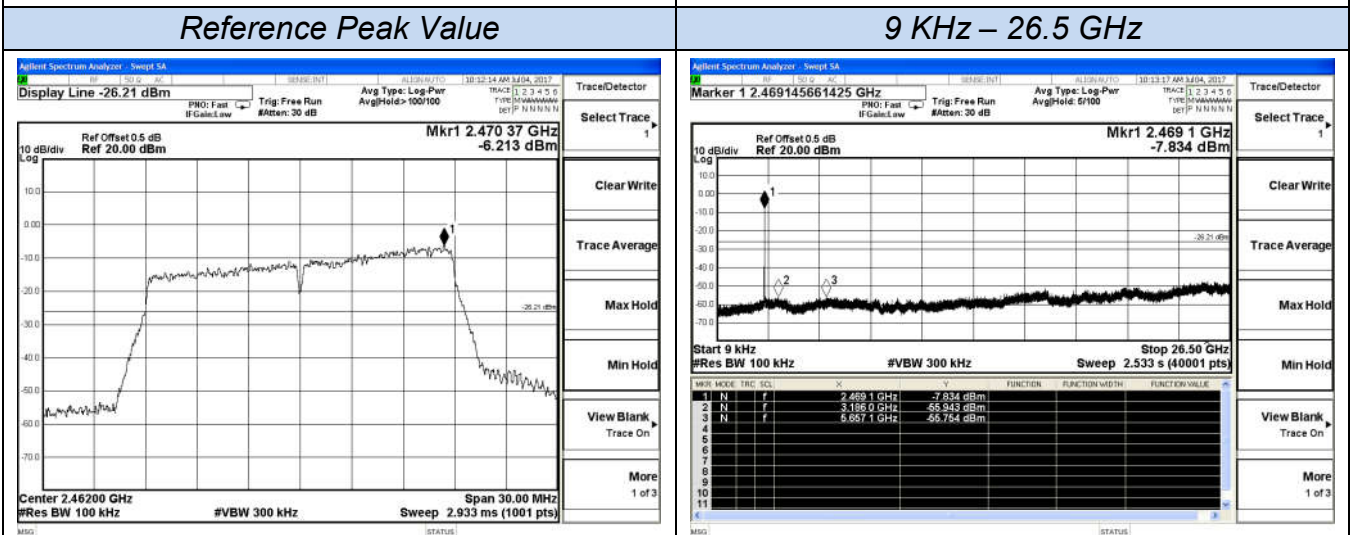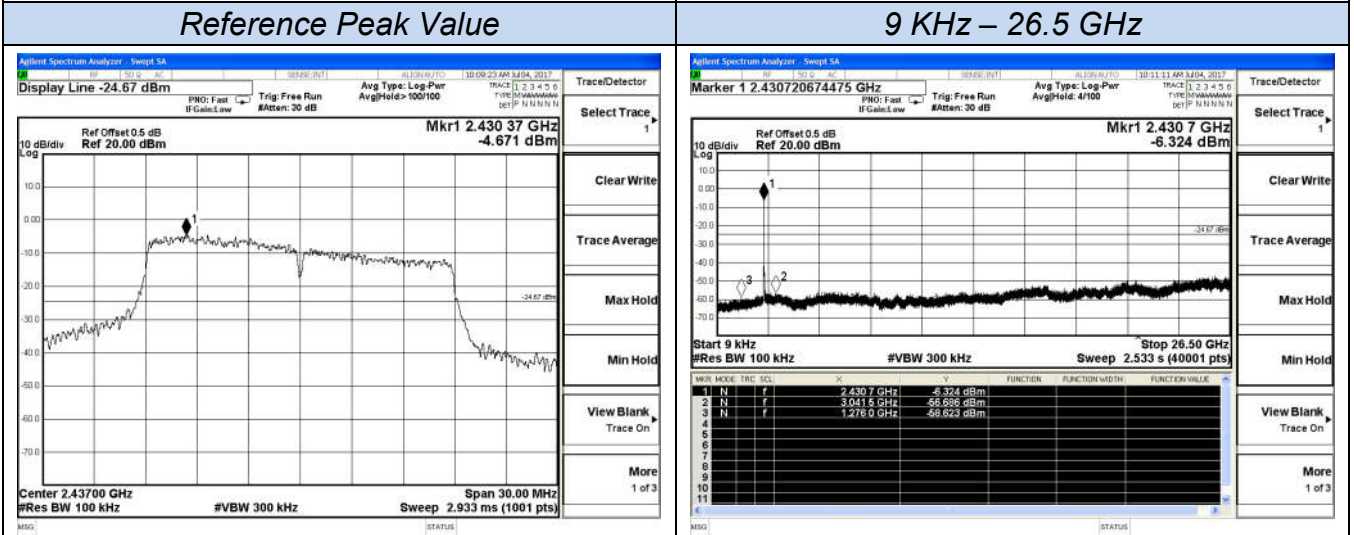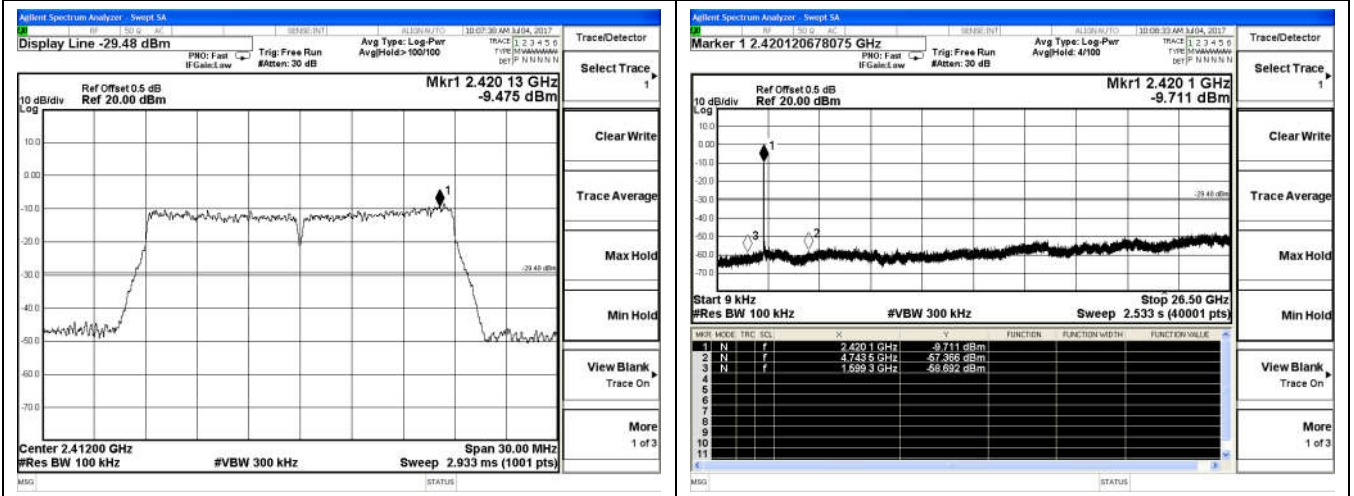


RF Conducted Spurious Emission IEEE 802.11n HT40

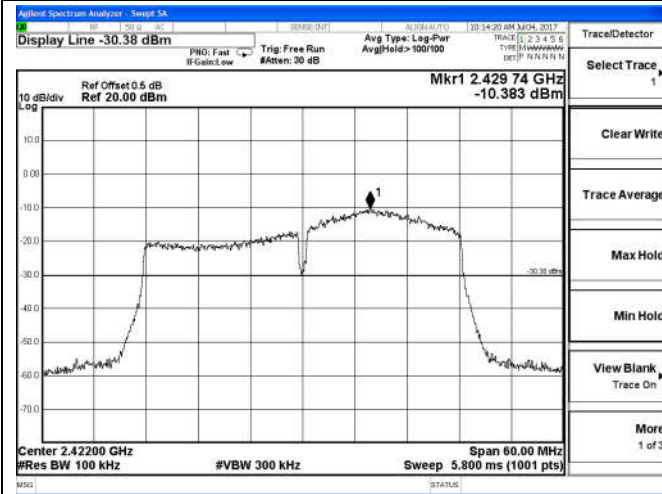


Reference Peak Value

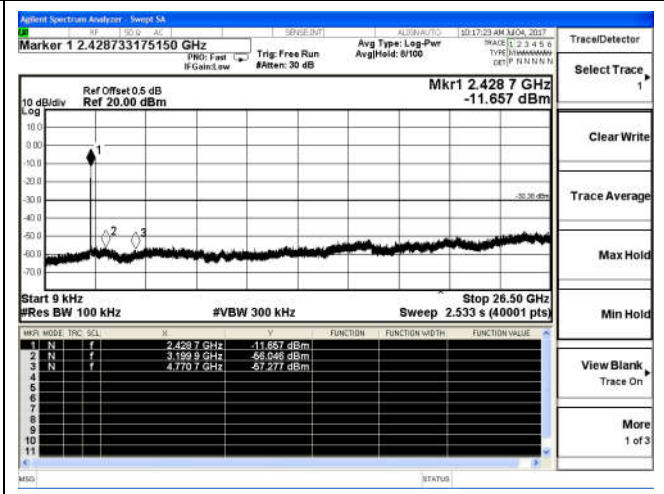


9 KHz – 26.5 GHz

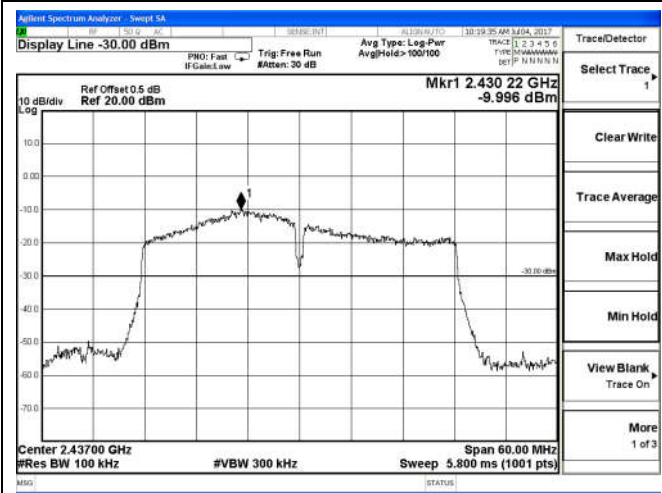


Reference Peak Value

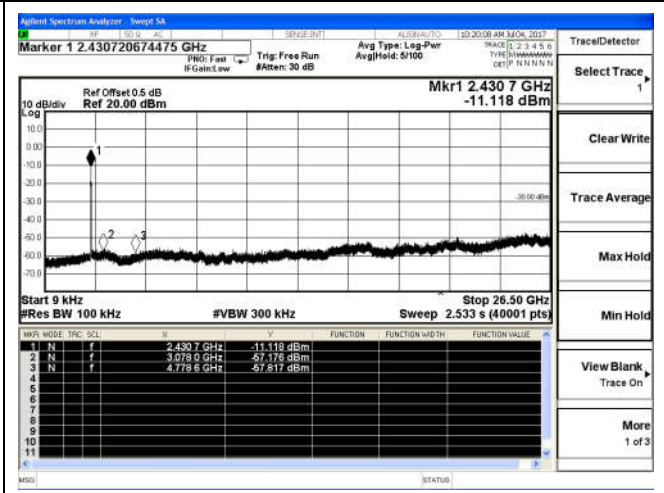

9 KHz – 26.5 GHz


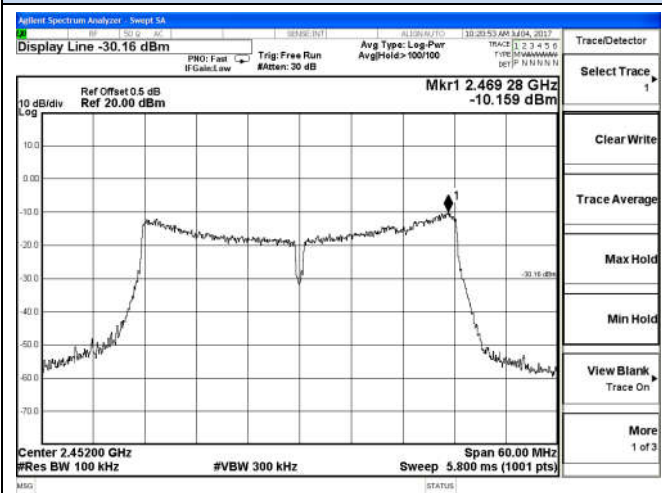


Reference Peak Value

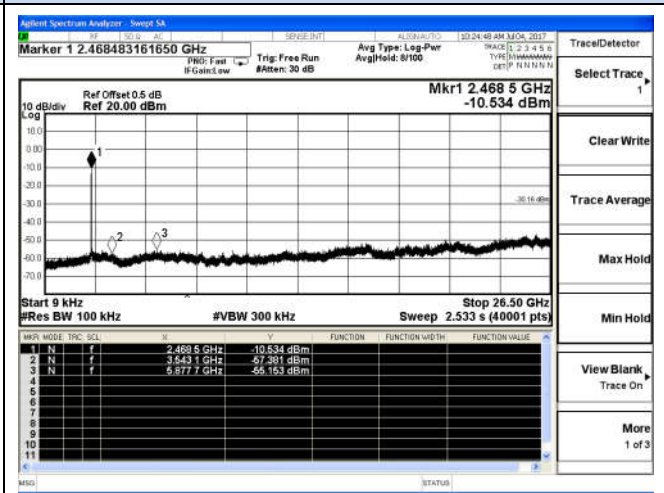



9 KHz – 26.5 GHz

RF Conducted Spurious Emission BT LE

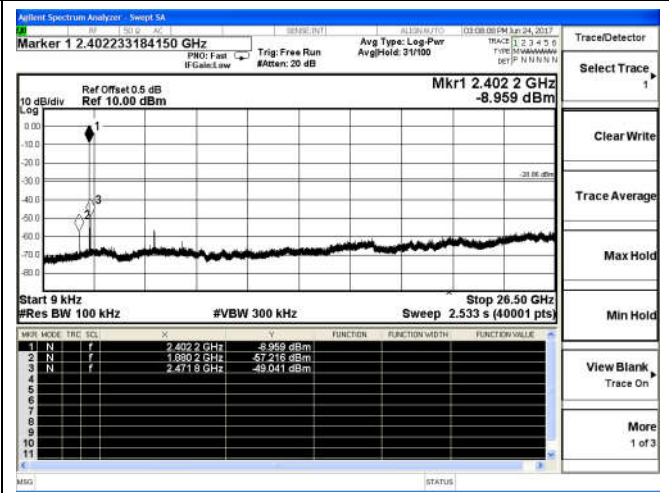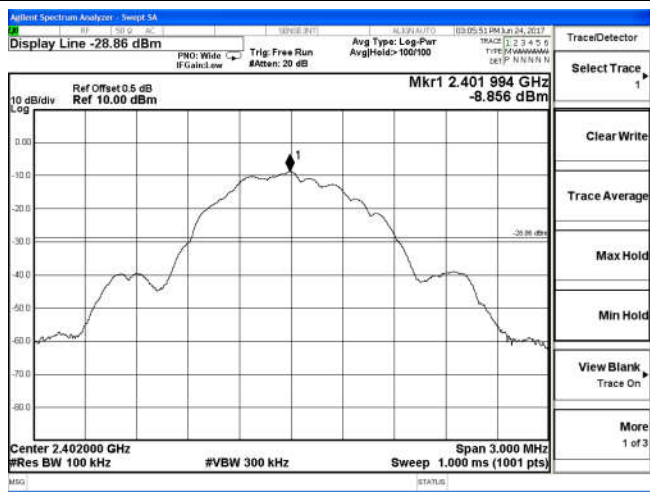



Reference Peak Value

9 KHz – 26.5 GHz

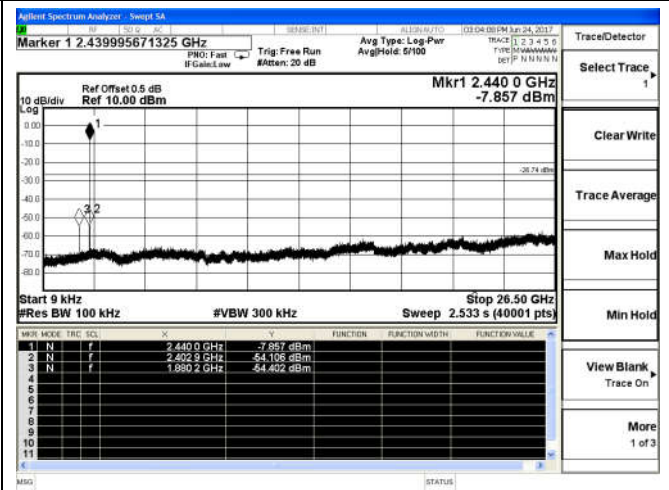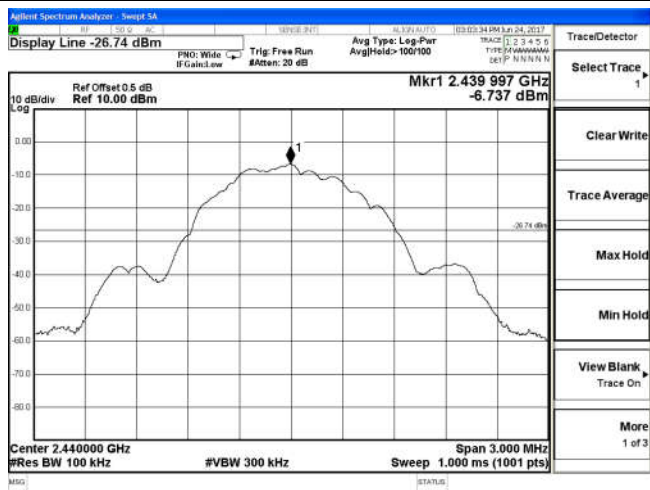

Reference Peak Value

9 KHz – 26.5 GHz

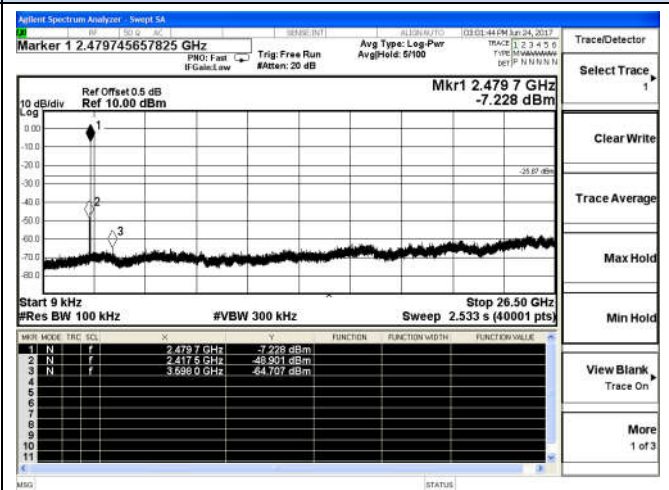
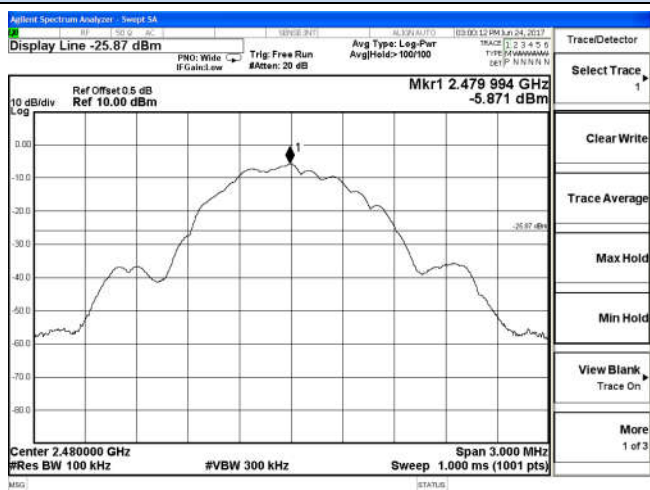


Reference Peak Value

9 KHz – 26.5 GHz



Band-edge measurements for conducted emissions

IEEE 802.11b

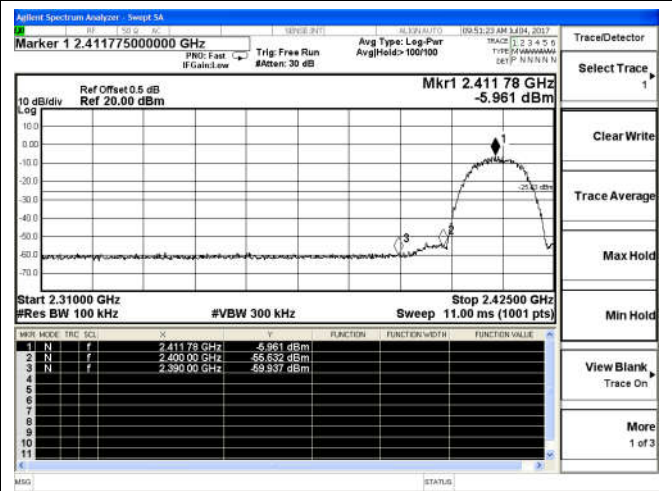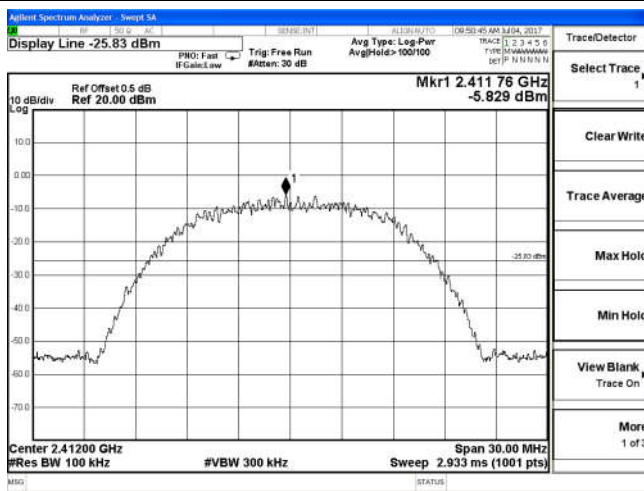

Reference Peak Value



Channel 1 / 2412 MHz

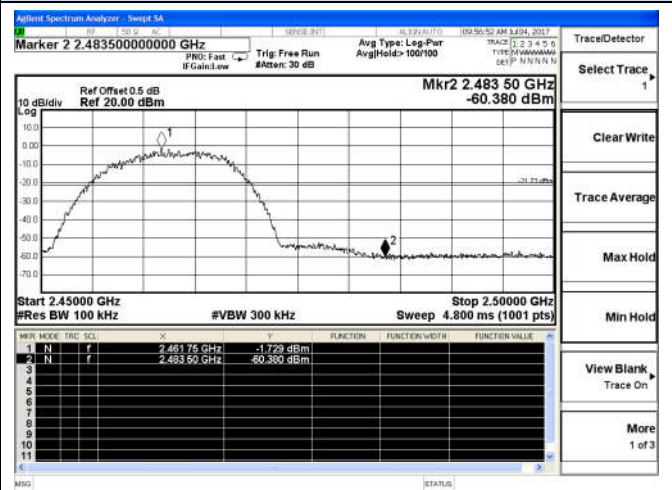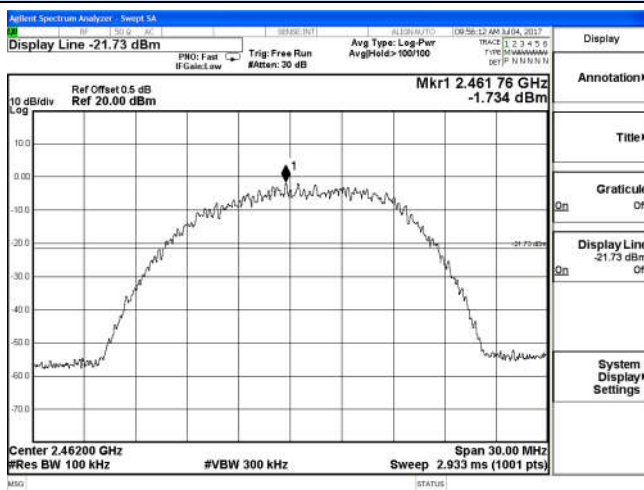

Reference Peak Value

Channel 11 / 2462 MHz

IEEE 802.11g

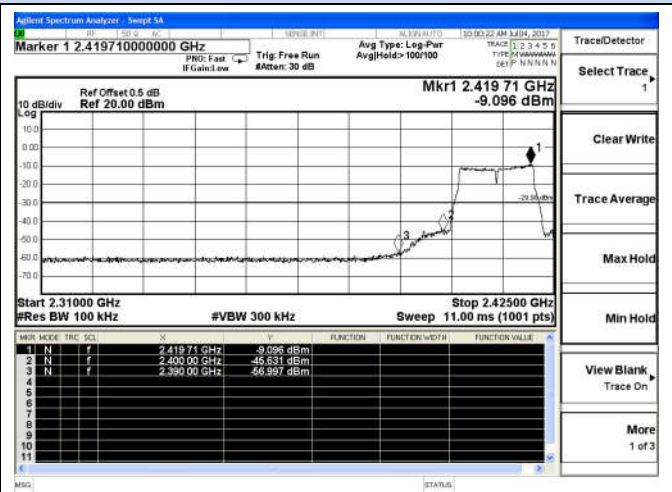
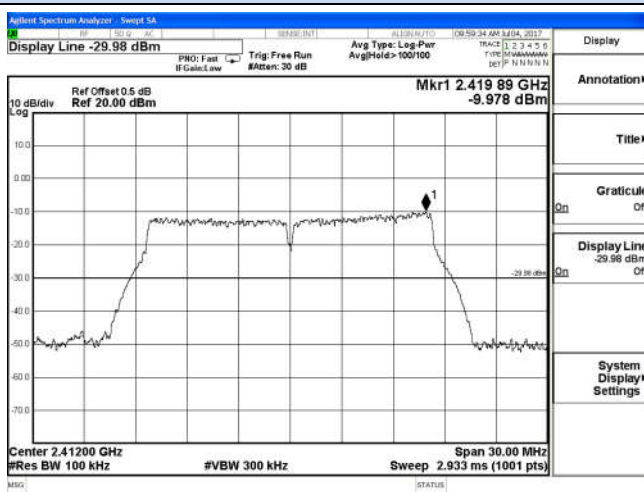


Reference Peak Value

Channel 1 / 2412 MHz

Band-edge measurements for conducted emissions



IEEE 802.11g

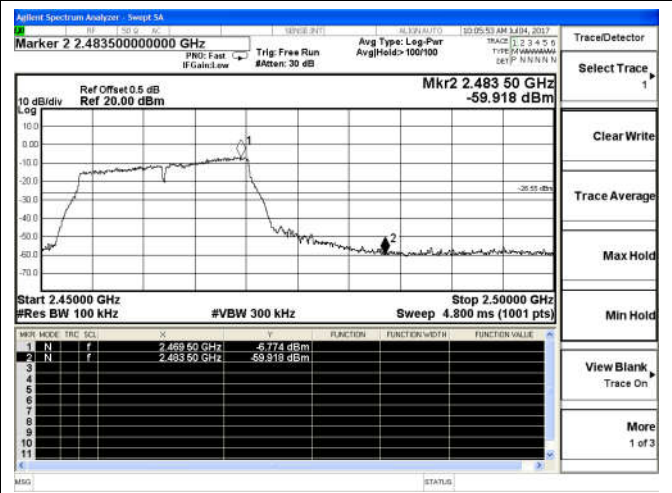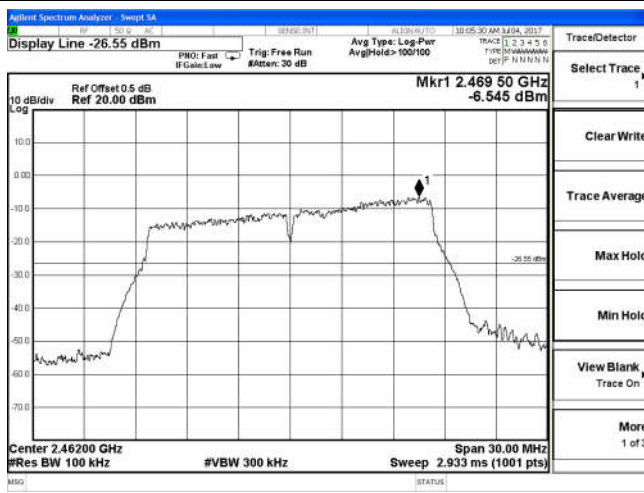

Reference Peak Value



Channel 11 / 2462 MHz

IEEE 802.11n HT20

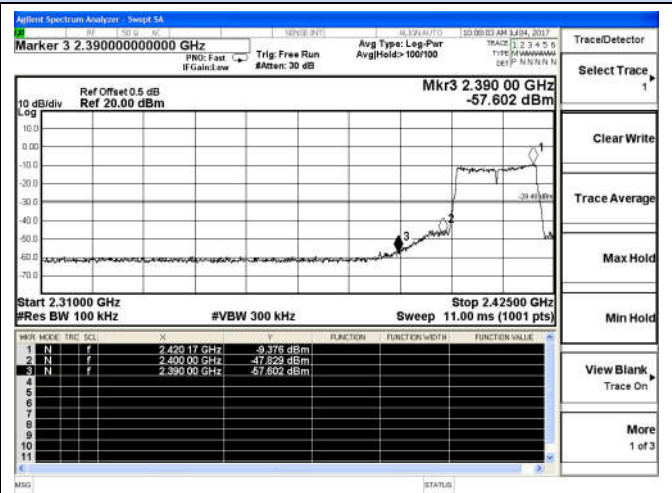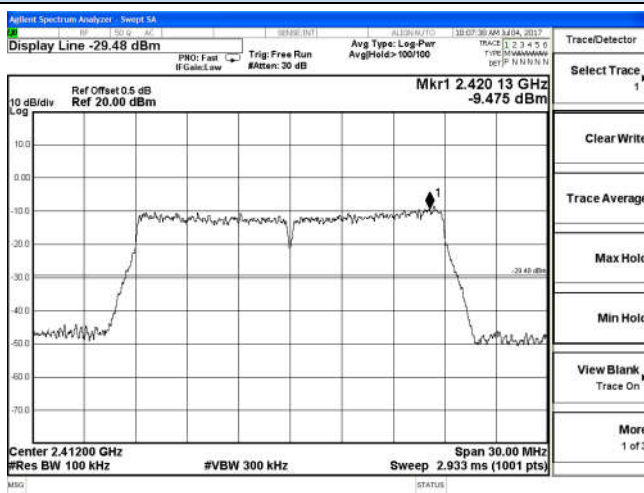

Reference Peak Value


Channel 1 / 2412 MHz

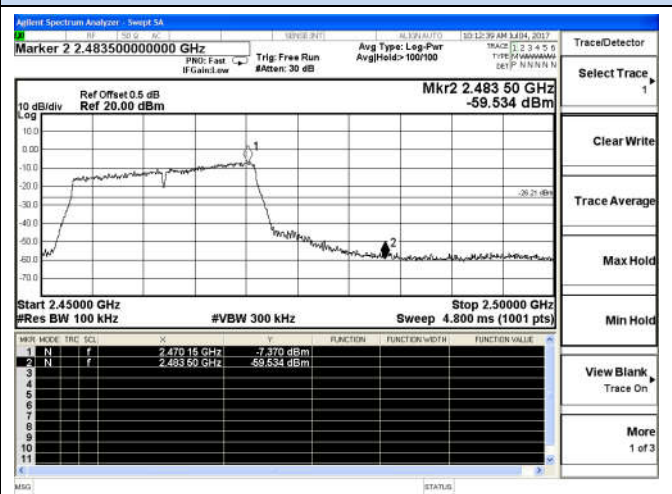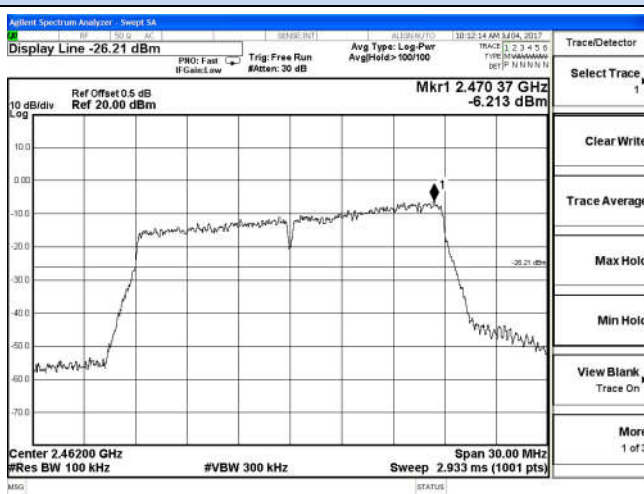


Reference Peak Value

Channel 11 / 2462 MHz


Band-edge measurements for conducted emissions
IEEE 802.11n HT40

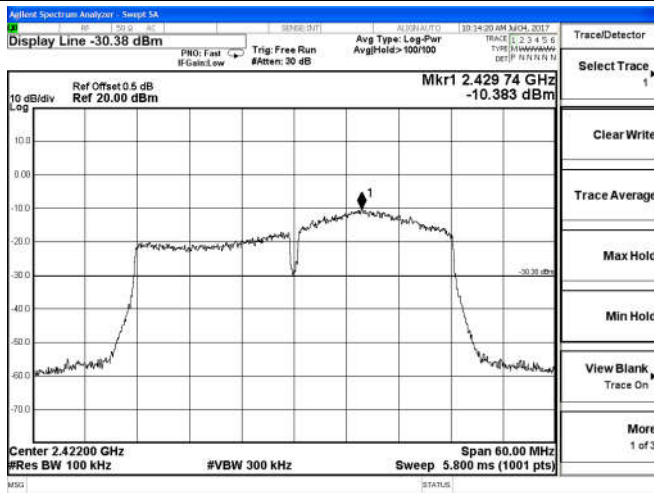


Reference Peak Value

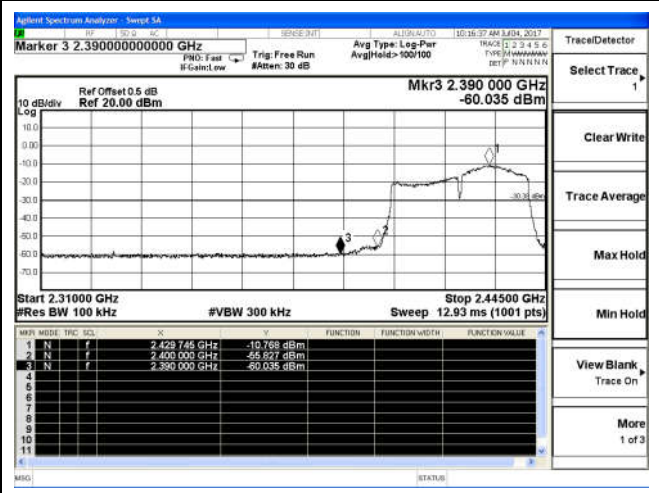

Channel 3 / 2422 MHz

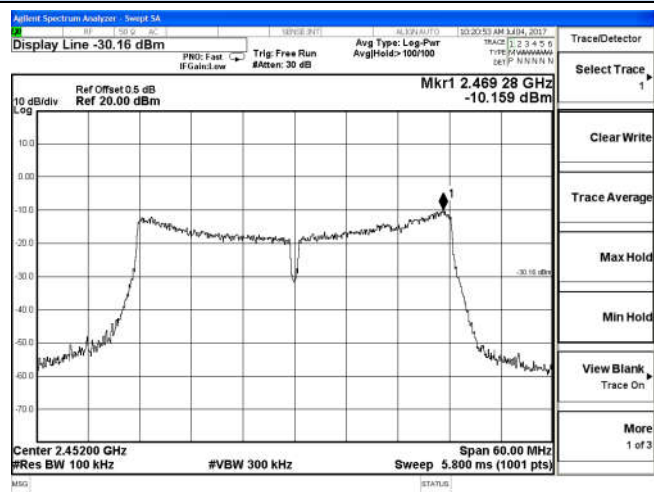



Reference Peak Value

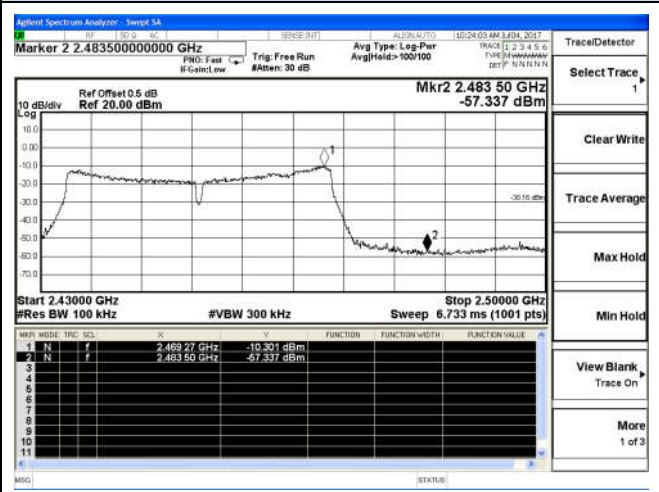

Channel 9 / 2452 MHz



Band-edge measurements for conducted emissions

BT - LE

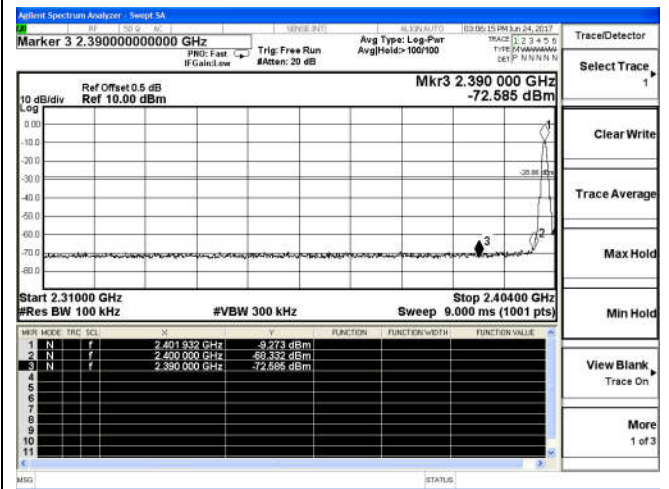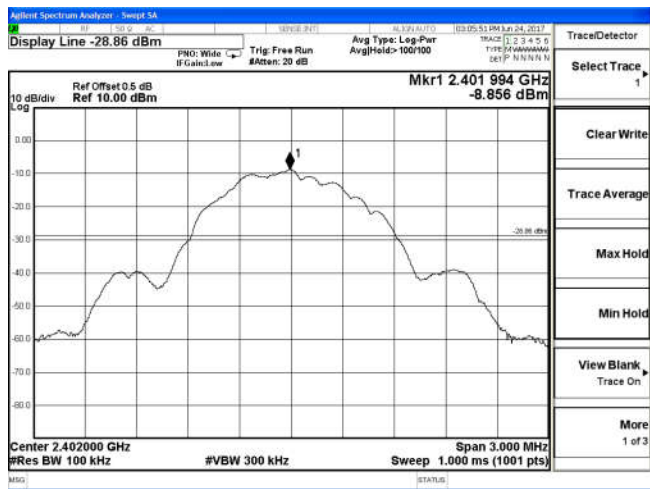

Reference Peak Value

Channel 0 / 2402 MHz

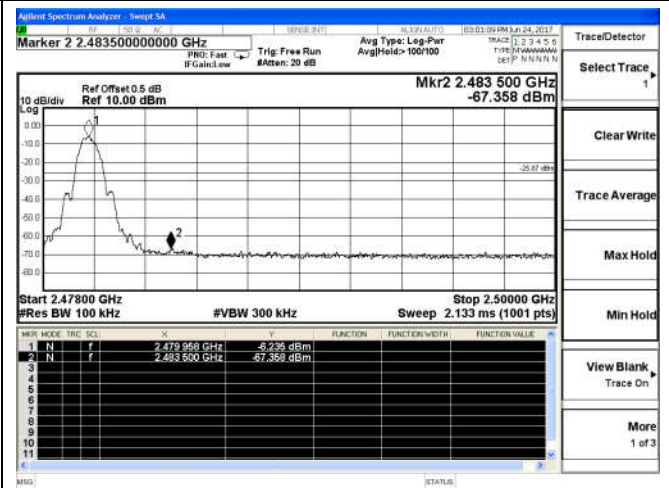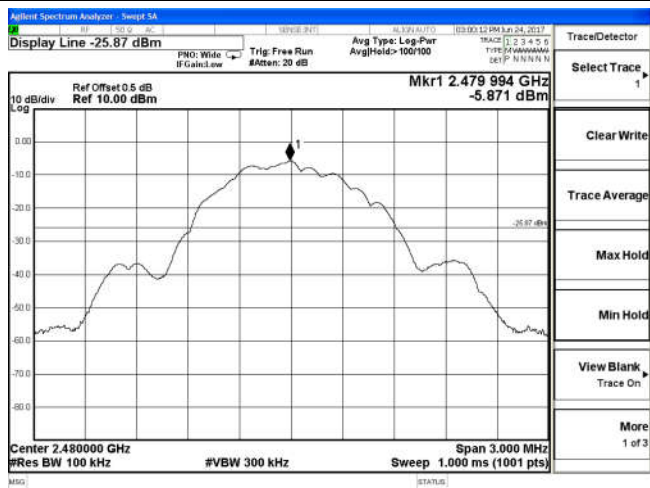

Reference Peak Value

Channel 39 / 2480 MHz

5.7. Power line conducted emissions


5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

| Frequency Range (MHz) | Limits (dBµV) | |
|-----------------------|---------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency

5.7.2 Block Diagram of Test Setup

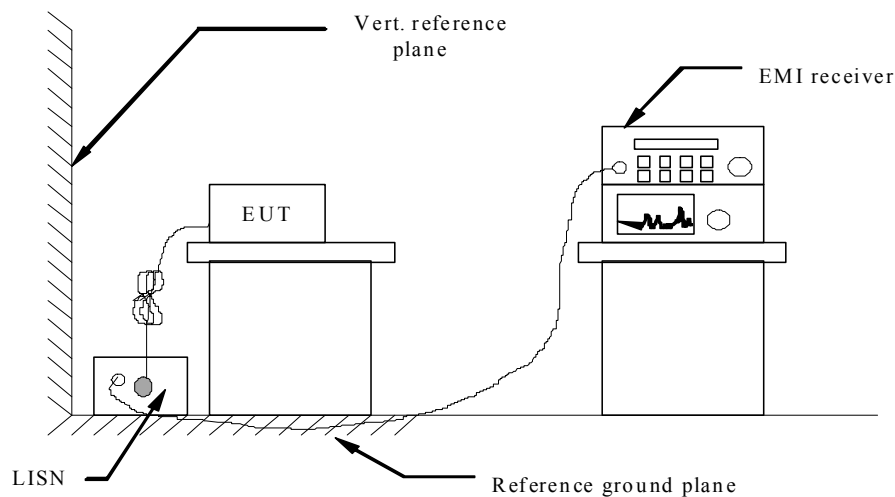


5.7.3 Test Results

PASS.

The test data please refer to following page.

AC Conducted Emission of power adapter @ AC 240V/50Hz @ IEEE 802.11b (worst case)


Line:

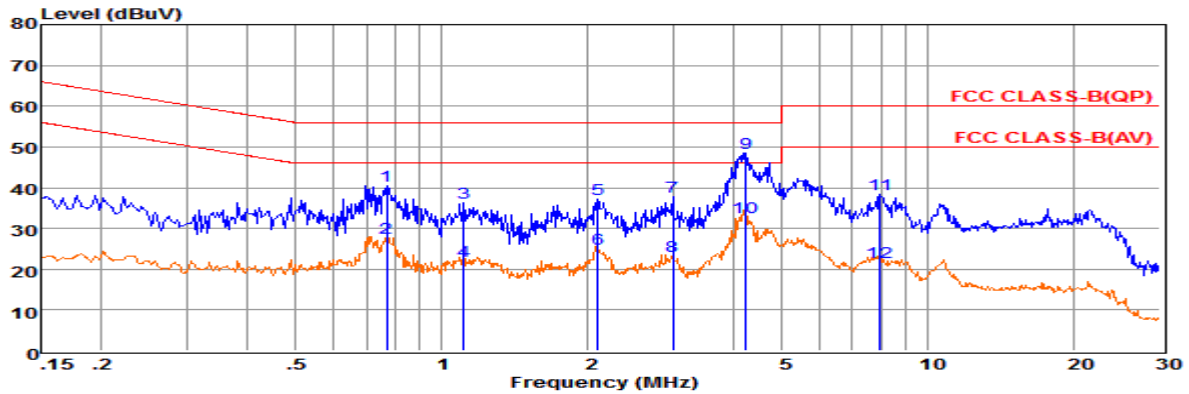

| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB |
| 1 | 0.77 | 20.91 | 9.64 | 0.04 | 10.00 | 40.59 | 56.00 | -15.41 | QP |
| 2 | 0.77 | 7.87 | 9.64 | 0.04 | 10.00 | 27.55 | 46.00 | -18.45 | Average |
| 3 | 1.11 | 16.50 | 9.63 | 0.05 | 10.00 | 36.18 | 56.00 | -19.82 | QP |
| 4 | 1.11 | 2.41 | 9.63 | 0.05 | 10.00 | 22.09 | 46.00 | -23.91 | Average |
| 5 | 2.10 | 17.42 | 9.64 | 0.05 | 10.00 | 37.11 | 56.00 | -18.89 | QP |
| 6 | 2.10 | 5.38 | 9.64 | 0.05 | 10.00 | 25.07 | 46.00 | -20.93 | Average |
| 7 | 2.99 | 18.17 | 9.64 | 0.06 | 10.00 | 37.87 | 56.00 | -18.13 | QP |
| 8 | 2.99 | 3.36 | 9.64 | 0.06 | 10.00 | 23.06 | 46.00 | -22.94 | Average |
| 9 | 4.22 | 28.66 | 9.65 | 0.06 | 10.00 | 48.37 | 56.00 | -7.63 | QP |
| 10 | 4.23 | 12.96 | 9.65 | 0.06 | 10.00 | 32.67 | 46.00 | -13.33 | Average |
| 11 | 7.98 | 18.57 | 9.68 | 0.07 | 10.00 | 38.32 | 60.00 | -21.68 | QP |
| 12 | 7.98 | 1.91 | 9.68 | 0.07 | 10.00 | 21.66 | 50.00 | -28.34 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

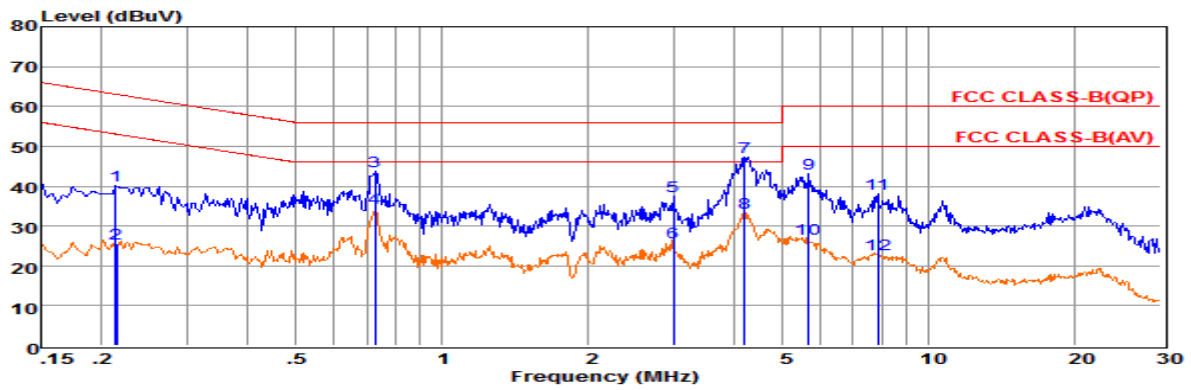


| | Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark |
|----|------|---------|---------|--------|---------|----------|-------|--------|---------|
| | MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB |
| 1 | 0.21 | 20.43 | 9.59 | 0.03 | 10.00 | 40.05 | 63.05 | -23.00 | QP |
| 2 | 0.21 | 5.83 | 9.59 | 0.03 | 10.00 | 25.45 | 53.05 | -27.60 | Average |
| 3 | 0.73 | 24.06 | 9.63 | 0.04 | 10.00 | 43.73 | 56.00 | -12.27 | QP |
| 4 | 0.73 | 14.89 | 9.63 | 0.04 | 10.00 | 34.56 | 46.00 | -11.44 | Average |
| 5 | 2.99 | 17.65 | 9.64 | 0.06 | 10.00 | 37.35 | 56.00 | -18.65 | QP |
| 6 | 2.99 | 6.22 | 9.64 | 0.06 | 10.00 | 25.92 | 46.00 | -20.08 | Average |
| 7 | 4.18 | 27.63 | 9.65 | 0.06 | 10.00 | 47.34 | 56.00 | -8.66 | QP |
| 8 | 4.18 | 13.70 | 9.65 | 0.06 | 10.00 | 33.41 | 46.00 | -12.59 | Average |
| 9 | 5.68 | 23.31 | 9.67 | 0.06 | 10.00 | 43.04 | 60.00 | -16.96 | QP |
| 10 | 5.68 | 7.02 | 9.67 | 0.06 | 10.00 | 26.75 | 50.00 | -23.25 | Average |
| 11 | 7.85 | 18.22 | 9.70 | 0.07 | 10.00 | 37.99 | 60.00 | -22.01 | QP |
| 12 | 7.85 | 3.25 | 9.70 | 0.07 | 10.00 | 23.02 | 50.00 | -26.98 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

AC Conducted Emission of power adapter @ AC 240V/50Hz @ BLE (worst case)


Line:

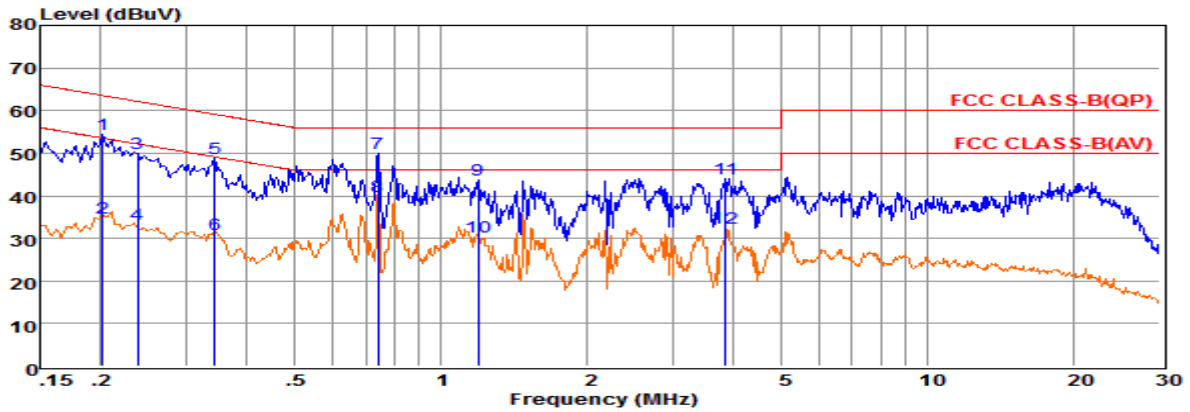

| Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark | |
|------|---------|---------|--------|---------|----------|-------|-------|--------|---------|
| MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.20 | 34.73 | 9.63 | 0.02 | 10.00 | 54.38 | 63.54 | -9.16 | QP |
| 2 | 0.20 | 15.26 | 9.63 | 0.02 | 10.00 | 34.91 | 53.53 | -18.62 | Average |
| 3 | 0.24 | 30.21 | 9.63 | 0.03 | 10.00 | 49.87 | 62.17 | -12.30 | QP |
| 4 | 0.24 | 13.65 | 9.63 | 0.03 | 10.00 | 33.31 | 52.17 | -18.86 | Average |
| 5 | 0.34 | 29.25 | 9.62 | 0.03 | 10.00 | 48.90 | 59.13 | -10.23 | QP |
| 6 | 0.34 | 11.18 | 9.62 | 0.03 | 10.00 | 30.83 | 49.13 | -18.30 | Average |
| 7 | 0.74 | 30.21 | 9.64 | 0.04 | 10.00 | 49.89 | 56.00 | -6.11 | QP |
| 8 | 0.74 | 20.06 | 9.64 | 0.04 | 10.00 | 39.74 | 46.00 | -6.26 | Average |
| 9 | 1.19 | 24.00 | 9.63 | 0.05 | 10.00 | 43.68 | 56.00 | -12.32 | QP |
| 10 | 1.19 | 10.72 | 9.63 | 0.05 | 10.00 | 30.40 | 46.00 | -15.60 | Average |
| 11 | 3.84 | 24.28 | 9.65 | 0.06 | 10.00 | 43.99 | 56.00 | -12.01 | QP |
| 12 | 3.84 | 12.64 | 9.65 | 0.06 | 10.00 | 32.35 | 46.00 | -13.65 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral:

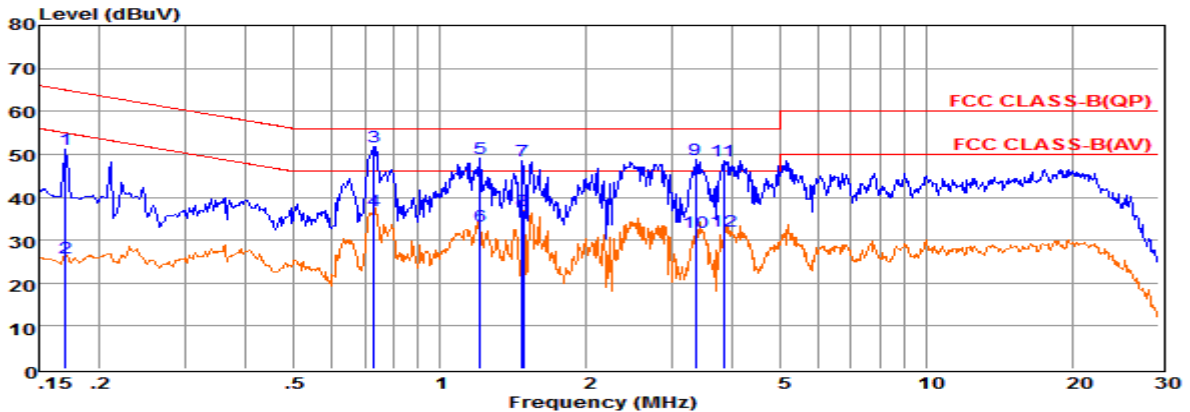

| Freq | Reading | LISNFac | CabLos | Aux2Fac | Measured | Limit | Over | Remark | |
|------|---------|---------|--------|---------|----------|-------|-------|--------|---------|
| MHz | dBuV | dB | dB | dB | dB | dBuV | dBuV | dB | |
| 1 | 0.17 | 31.59 | 9.65 | 0.02 | 10.00 | 51.26 | 64.94 | -13.68 | QP |
| 2 | 0.17 | 6.26 | 9.65 | 0.02 | 10.00 | 25.93 | 54.94 | -29.01 | Average |
| 3 | 0.73 | 32.21 | 9.63 | 0.04 | 10.00 | 51.88 | 56.00 | -4.12 | QP |
| 4 | 0.73 | 17.08 | 9.63 | 0.04 | 10.00 | 36.75 | 46.00 | -9.25 | Average |
| 5 | 1.21 | 29.36 | 9.63 | 0.05 | 10.00 | 49.04 | 56.00 | -6.96 | QP |
| 6 | 1.21 | 13.52 | 9.63 | 0.05 | 10.00 | 33.20 | 46.00 | -12.80 | Average |
| 7 | 1.48 | 28.94 | 9.63 | 0.05 | 10.00 | 48.62 | 56.00 | -7.38 | QP |
| 8 | 1.48 | 17.11 | 9.63 | 0.05 | 10.00 | 36.79 | 46.00 | -9.21 | Average |
| 9 | 3.35 | 28.92 | 9.65 | 0.06 | 10.00 | 48.63 | 56.00 | -7.37 | QP |
| 10 | 3.35 | 12.23 | 9.65 | 0.06 | 10.00 | 31.94 | 46.00 | -14.06 | Average |
| 11 | 3.82 | 28.82 | 9.65 | 0.06 | 10.00 | 48.53 | 56.00 | -7.47 | QP |
| 12 | 3.82 | 12.34 | 9.65 | 0.06 | 10.00 | 32.05 | 46.00 | -13.95 | Average |

Remarks: 1. Measured = Reading +Cable Loss +Aux2 Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

***Note: Pre-scan all modes and recorded the worst case results in this report (IEEE 802.11b@240VAC, BLE@240VAC).

5.8 Antenna Requirements

5.8.1 Standard Applicable

According to antenna requirement of §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.8.2 Antenna Connected Construction

5.8.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is -1dBi, and the antenna is a PIFA antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.
The WLAN and BT share same antenna;

5.8.2.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|------|--------------------------|--------------------|----------------------------------|-------------|------------|------------|
| 1 | Power Sensor | R&S | NRV-Z51 | 100458 | 2017-06-18 | 2018-06-17 |
| 2 | Power Sensor | R&S | NRV-Z32 | 10057 | 2017-06-18 | 2018-06-17 |
| 3 | Power Meter | R&S | NRVS | 100444 | 2017-06-18 | 2018-06-17 |
| 4 | DC Filter | MPE | 23872C | N/A | 2017-06-18 | 2018-06-17 |
| 5 | RF Cable | Harbour Industries | 1452 | N/A | 2017-06-18 | 2018-06-17 |
| 6 | SMA Connector | Harbour Industries | 9625 | N/A | 2017-06-18 | 2018-06-17 |
| 7 | Spectrum Analyzer | Agilent | N9020A | MY50510140 | 2016-10-27 | 2017-10-26 |
| 8 | Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 2017-06-18 | 2018-06-17 |
| 9 | RF Cable | Hubersuhne | SucofleY6 MAX4 | FP2RX2 | 2017-06-18 | 2018-06-17 |
| 10 | 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 2017-06-18 | 2018-06-17 |
| 11 | Amplifier | SCHAFFNER | COA9231A | 18667 | 2017-04-18 | 2018-04-17 |
| 12 | Amplifier | Agilent | 8449B | 3008A02120 | 2017-04-18 | 2018-04-17 |
| 13 | Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 2017-04-18 | 2018-04-17 |
| 14 | Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 2017-04-18 | 2018-04-17 |
| 15 | By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 2017-04-18 | 2018-04-17 |
| 16 | Horn Antenna | EMCO | 3115 | 6741 | 2017-04-18 | 2018-04-17 |
| 17 | Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 2017-04-18 | 2018-04-17 |
| 18 | RF Cable-R03m | Jye Bao | RG142 | CB021 | 2017-06-18 | 2018-06-17 |
| 19 | RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 2017-06-18 | 2018-06-17 |
| 20 | EMI Test Receiver | R&S | ESCI | 101142 | 2017-06-18 | 2018-06-17 |
| 21 | Artificial Mains | R&S | ENV216 | 101288 | 2017-06-18 | 2018-06-17 |
| 22 | EMI Test Software | AUDIX | E3 | N/A | 2017-06-18 | 2018-06-17 |

7. TEST SETUP PHOTOGRAPHS OF EUT

Please refer to separated files for Test Setup Photos of the EUT.

8. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

9. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----