



Test Report

Part 15 & RSS-247 (Issue 2)

Equipment under test SANP G
Model name IU-100
FCC ID 2ADTG-IU100
IC ID 12594A-IU100
Applicant THINKWARE CORPORATION
Manufacturer THINKWARE CORPORATION
Date of test(s) 2021.11.29 ~ 2021.12.01
Date of issue 2021.12.07

Issued to
THINKWARE CORPORATION
A, 9FL, Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si
Gyeonggi-do, South Korea
Tel: +82-2-589-9000 / Fax : +82-2-589-9200

Issued by
KES Co., Ltd.
3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	Report approval by :
	
Bong-Seok, Kim Test engineer	Young-Jin, Lee Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (2) of (52)

Revision history

Revision	Date of issue	Test report No.	Description
-	2021.12.07	KES-RF1-21T0214	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



TABLE OF CONTENTS

1.	General information	4
1.1.	EUT description	4
1.2.	Test configuration	4
1.3.	Device modifications	5
1.4.	Accessory information	5
1.5.	Sample calculation	5
1.6.	Measurement Uncertainty	5
1.7.	Frequency/channel operations	6
1.8.	Worst case data rate	6
2.	Summary of tests	7
3.	Test results	8
3.1.	Output power	8
3.2.	Radiated restricted band and emissions	10
3.3.	AC conducted emissions	48
Appendix A.	Measurement equipment	51
Appendix B.	Test setup photos	52

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (4) of (52)

1. General information

Applicant: THINKWARE CORPORATION
Applicant address: A, 9FL, Samwhan Hipex, 240, Pangyoyeok-ro, Bundang-gu, Seongnam-si
Gyeonggi-do, South Korea
Test site: KES Co., Ltd.
Test site address: 3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, 14057, Korea
 473-21, Gayeo-ro, Yeosu-si, Gyeonggi-do, Korea
Test Facility FCC Accreditation Designation No.: KR0100, Registration No.: 444148
ISED test site 23298
FCC rule part(s): 15.247
IC rule part(s): RSS-247
FCC ID: 2ADTG-IU100
IC Certification: 12594A-IU100
Test device serial No.: Production Pre-production Engineering

1.1. EUT description

Equipment under test SNAP G
Frequency range 2 402 MHz ~ 2 480 MHz (LE 1Mbps), 2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20)
2 422 MHz ~ 2 452 MHz (802.11n_HT40)
Model: IU-100
Modulation technique GFSK, DSSS, OFDM
Number of channels 2 402 MHz ~ 2 480 MHz (LE 1Mbps) : 40ch
2 412 MHz ~ 2 462 MHz (802.11b/g/n_HT20) : 11ch
2 422 MHz ~ 2 452 MHz (802.11n_HT40) : 7ch
Antenna specification Antenna type : Chip Antenna // Peak gain: 2.74 dBi
Power source DC 3.7 V (Battery)
H/W version V3.1.0
S/W version 1.2.91

1.2. Test configuration

The **THINKWARE CORPORATION // SNAP G // IU-100 // FCC ID: 2ADTG-IU100 // IC ID: 12594A-IU100** was tested according to the specification of EUT, the EUT must comply with following standards and KDB documents.

FCC Part 15.247
ISED RSS-247 Issue 2 and RSS-Gen Issue 5
KDB 558074 D01 v05 r02
ANSI C63.10-2013

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (5) of (52)

1.3. Device modifications

N/A

1.4. Accessory information

Equipment	Manufacturer	Model	Serial No.	Power source
-	-	-	-	-

1.5. Sample calculation

Where relevant, the following sample calculation is provided

For all conducted test items :

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 0.52 + 10 = 10.52 \text{ (dB)} \end{aligned}$$

For Radiation test :

Field strength level (dB μ V/m) = Measured level (dB μ V) + Antenna factor (dB) + Cable loss (dB) – Amplifier gain (dB)

1.6. Measurement Uncertainty

Test Item		Uncertainty
Uncertainty for Conduction emission test		2.46 dB
Uncertainty for Radiation emission test (include Fundamental emission)	Below 1GHz	4.40 dB
	Above 1GHz	5.94 dB
Note. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

1.7. Frequency/channel operations

Ch.	Frequency (MHz)	Rate(Mbps)
00	2 402	LE 1 Mbps
⋮	⋮	⋮
20	2 442	LE 1 Mbps
⋮	⋮	⋮
39	2 480	LE 1 Mbps

Ch.	Frequency (MHz)	Rate(Mbps)
01	2 412	802.11b/g/n_HT20
⋮	⋮	⋮
06	2 442	802.11b/g/n_HT20
⋮	⋮	⋮
11	2 462	802.11b/g/n_HT20

Ch.	Frequency (MHz)	Rate(Mbps)
03	2 422	802.11n_HT40
⋮	⋮	⋮
06	2 437	802.11n_HT40
⋮	⋮	⋮
09	2 452	802.11n_HT40

1.8. Worst case data rate

1. Radiated emission was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.
2. Worst-case data rates were:
 - 802.11b : **1 Mbps**
 - 802.11g : **6 Mbps**
 - 802.11n_HT20 : **MCS0**
 - 802.11n_HT40 : **MCS0**

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (7) of (52)

2. Summary of tests

Section in FCC Part 15	Section in RSS-247 & Gen	Parameter	Test results
-	RSS-Gen 6.7	99% Occupied bandwidth	N/A ⁽¹⁾
15.247(a)(2)	RSS-247 5.2(a)	6 dB bandwidth	N/A ⁽¹⁾
15.247(b)(3)	RSS-247 5.4(d)	Output power	Pass
15.247(e)	RSS-247 5.2(b)	Power spectral density	N/A ⁽¹⁾
15.205 15.209	RSS-247 5.5 RSS-Gen 8.9,8,10	Radiated restricted band and emission	Pass
15.247(d)	RSS-247 5.5	Conducted spurious emission and band edge	N/A ⁽¹⁾
15.207(a)	RSS-Gen 8.8	AC Conducted emissions	Pass

Note :

- 1) Please Refer to the approved Module Report (Report No : NTC1712033FV00, NCT1712035FV00, EC1905007RI01, EC1905007RI03) for these parameters.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


3. Test results

3.1. Output power

Test procedure

ANSI C63.10-2013 - Section 11.9.1.3 and 11.9.2.3.2

Test setup



ANSI C63.10-2013 - Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

ANSI C63.10-2013 - Section 11.9.2.3.2

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

Limit

According to §15.247(b)(3), For systems using digital modulation in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted out-put power. Maximum Conducted Out-put Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (9) of (52)

Test results**Mode: LE 1Mbps**

Mode	2 402 MHz		2 442 MHz		2 480 MHz	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
LE 1Mbps	-1.22	-0.92	-1.30	-1.06	-1.49	-1.14

Mode: 802.11b

Mode	2 412 MHz		2 442 MHz		2 462 MHz	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
802.11b	5.19	7.41	4.98	7.25	5.06	7.10

Mode: 802.11g

Mode	2 412 MHz		2 442 MHz		2 462 MHz	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
802.11g	0.64	4.30	0.60	4.24	0.52	4.21

Mode: 802.11n_HT20

Mode	2 412 MHz		2 442 MHz		2 462 MHz	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
802.11n_HT20	-0.11	3.16	-0.14	3.08	-0.19	3.06

Mode: 802.11n_HT40


Mode	2 422 MHz		2 437 MHz		2 452 MHz	
	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)	Average (dBm)	Peak (dBm)
802.11n_HT40	-0.35	2.98	-0.39	2.94	-0.42	2.89

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr


3.2. Radiated restricted band and emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

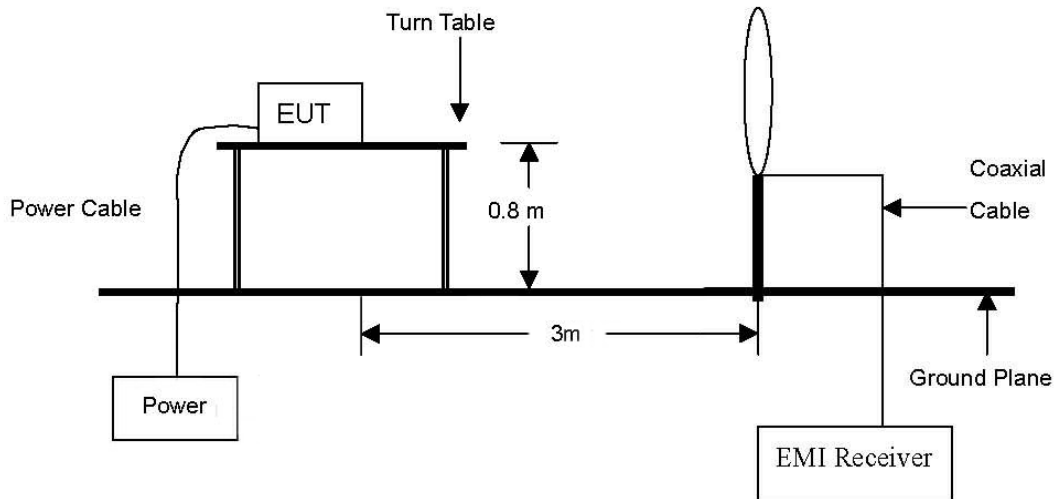


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

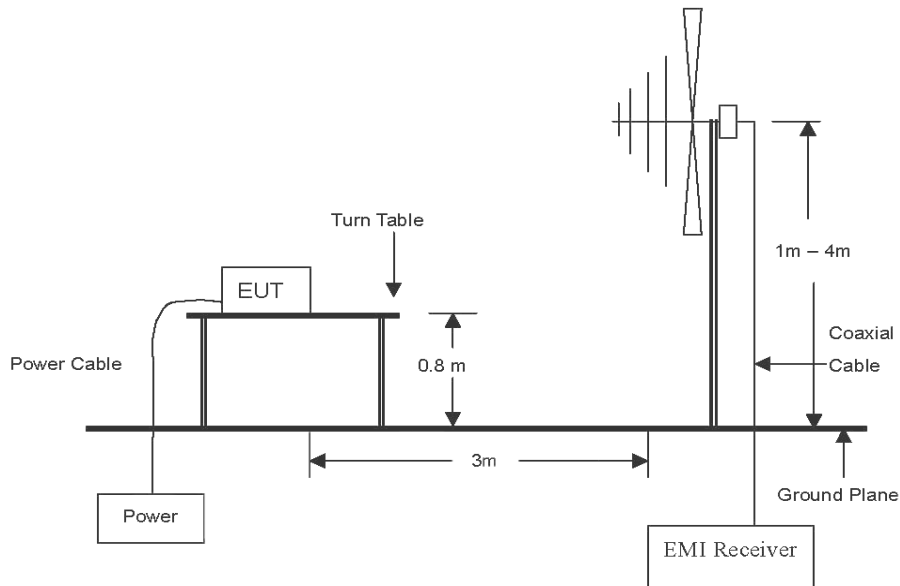

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz emissions, whichever is lower.

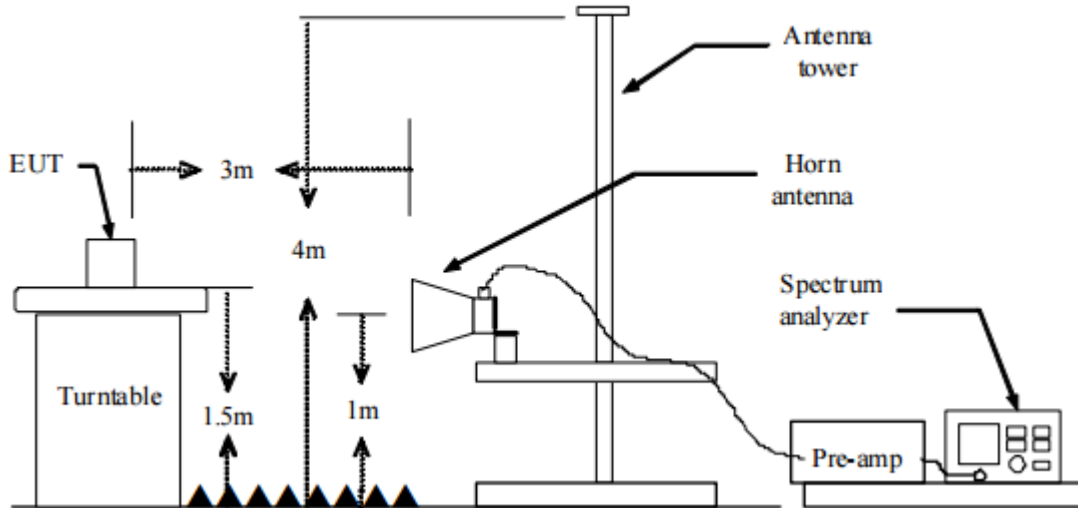

Test procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

Test procedure below 30 MHz

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel, ground parallel and perpendicular of the antenna are set to make the measurement. It was determined that **parallel** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **parallel**.
3. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test-receiver system was set to average or quasi peak detect function and Specified Bandwidth with Maximum hold mode.

Test procedure above 30 MHz

1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The antenna is a bi-log antenna, a horn antenna, and its height are varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
4. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5. Spectrum analyzer settings for $f < 1$ GHz:

- ① Span = wide enough to fully capture the emission being measured
- ② RBW = 100 kHz
- ③ VBW \geq RBW
- ④ Detector = quasi peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold

6. Spectrum analyzer settings for $f \geq 1$ GHz: Peak

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW ≥ 3 MHz
- ④ Detector = peak
- ⑤ Sweep time = auto
- ⑥ Trace = max hold
- ⑦ Trace was allowed to stabilize

7. Spectrum analyzer settings for $f \geq 1$ GHz: Average

- ① Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- ② RBW = 1 MHz
- ③ VBW $\geq 3 \times$ RBW
- ④ Detector = RMS, if span/(# of points in sweep) \leq (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- ⑤ Averaging type = power(i.e., RMS)
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- ⑥ Sweep = auto
- ⑦ Trace = max hold
- ⑧ Perform a trace average of at least 100 traces.
- ⑨ A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (RMS) mode was used in step ⑤, then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
 - 2) If linear voltage averaging mode was used in step ⑤, then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
 - 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (13) of (52)

Note.

- $f < 30$ MHz, extrapolation factor of 40 dB/decade of distance. $F_d = 40\log(D_m/D_s)$
 $f \geq 30$ MHz, extrapolation factor of 20 dB/decade of distance. $F_d = 20\log(D_m/D_s)$
 Where:
 F_d = Distance factor in dB
 D_m = Measurement distance in meters
 D_s = Specification distance in meters
- Field strength(dB μ V/m) = Level(dB μ V) + CF (dB) + or DCF(dB)
- Margin(dB) = Limit(dB μ V/m) - Field strength(dB μ V/m)
- Emissions below 18 GHz were measured at a 3 meter test distance while emissions above 18 GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that **X orientation** was worst-case orientation; therefore, all final radiated testing was performed with the EUT in **X orientation**.
- The worst-case emissions are reported however emissions whose levels were not within 20 dB of respective limits were not reported.
- According to exploratory test no any obvious emission were detected from 9 kHz to 30 MHz. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

Frequency (MHz)	Distance (Meters)	Radiated (μ V/m)
0.009 ~ 0.490	300	2400/F(kHz)
0.490 ~ 1.705	30	24000/F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

Duty cycle


Regarding to KDB 558074 D01_v05 r02, 6. Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have sufficiently short response time to permit accurate measurements of the on- and off-times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on- and off-times of the transmitted signal.


Mode	T _{on} time (ms)	Period (ms)	Duty cycle (Linear)	Duty cycle (%)	Duty cycle correction factor (dB)
LE 1Mbps	2.15	2.50	0.86	85.69	6.70
802.11b	12.46	12.55	0.99	99.28	0.44
802.11g	2.07	2.18	0.95	94.95	0.22
802.11n_HT20	1.93	2.03	0.95	95.07	0.22
802.11n_HT40	0.95	1.08	0.88	87.96	0.56

Duty cycle (Linear) = T_{on} time/Period

DCF(Duty cycle correction factor (dB)) = 10log(1/duty cycle)

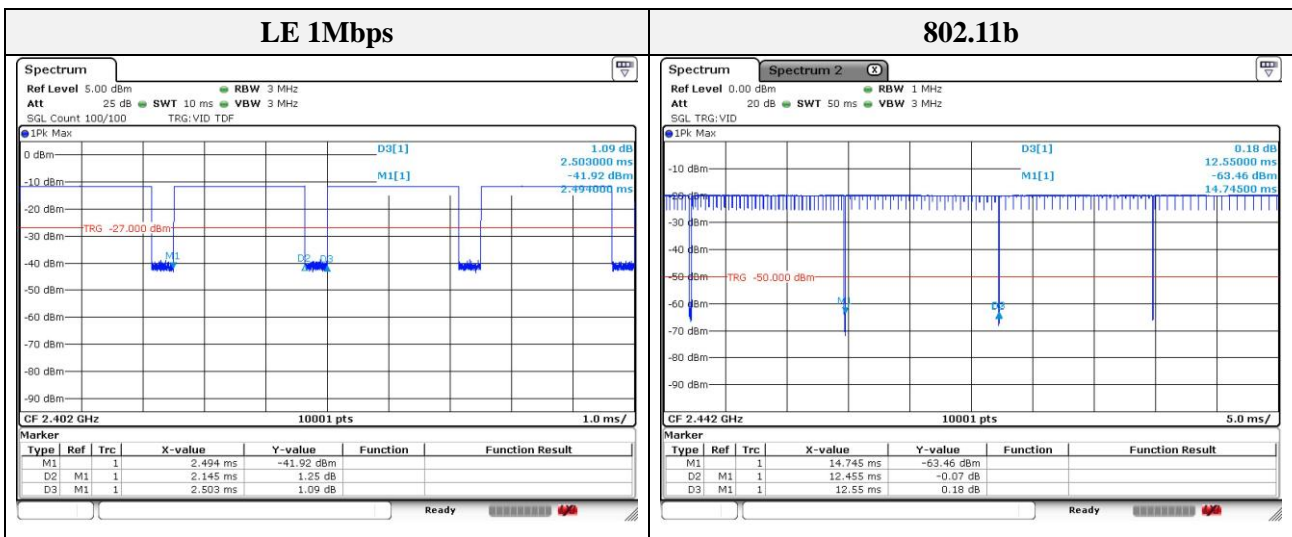

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

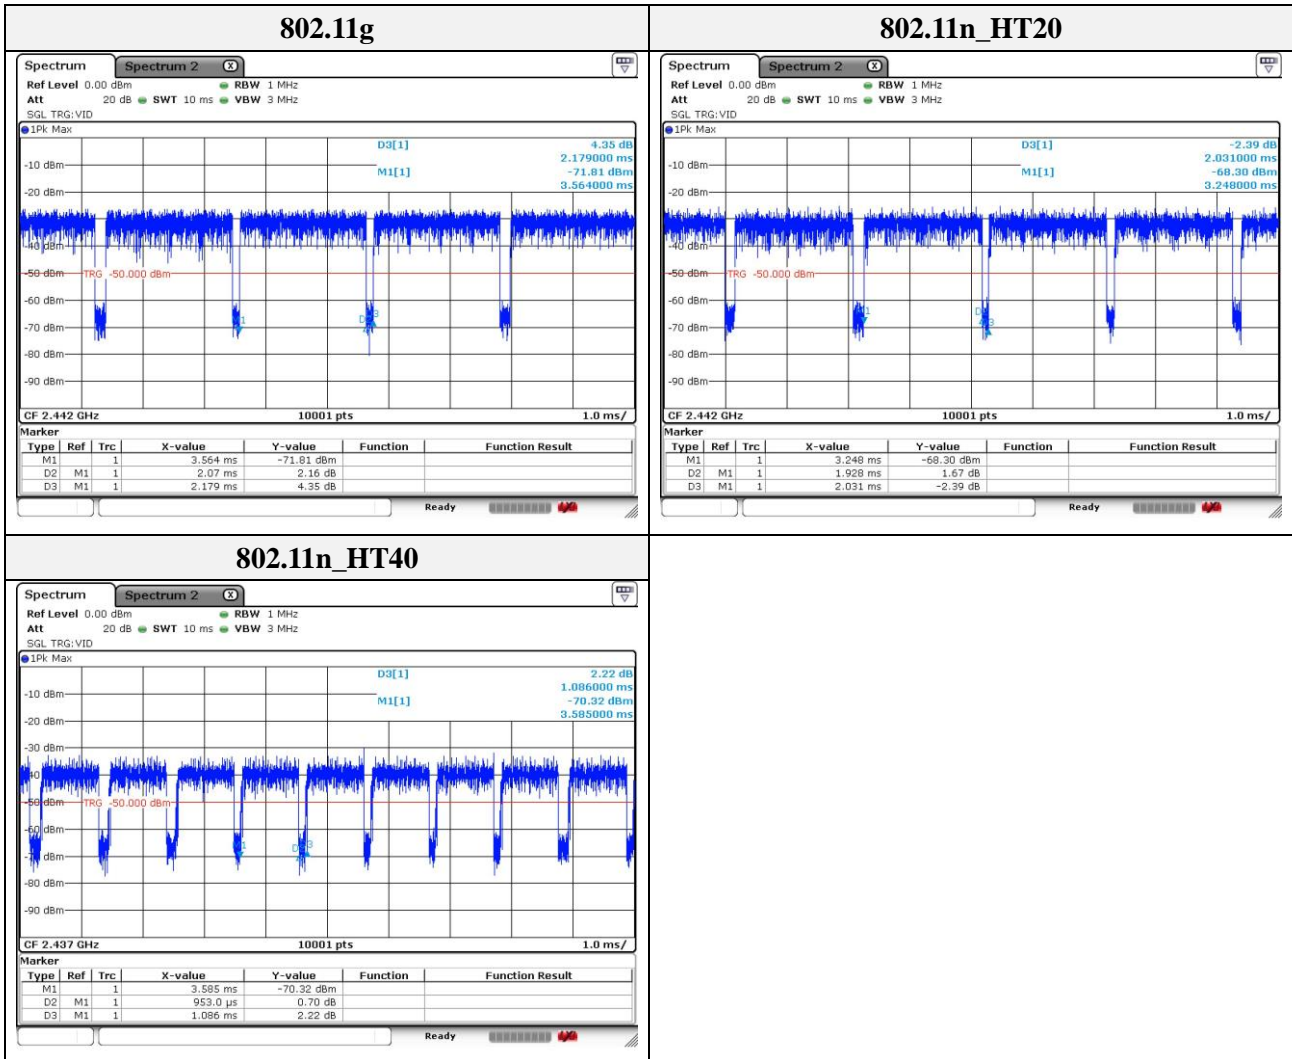

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-RF1-21T0214
 Page (16) of (52)

Test results (Below 30 MHz)

Mode: LE 1 Mbps
 Distance of measurement: 3 meter
 Channel: 00 (Worst case)

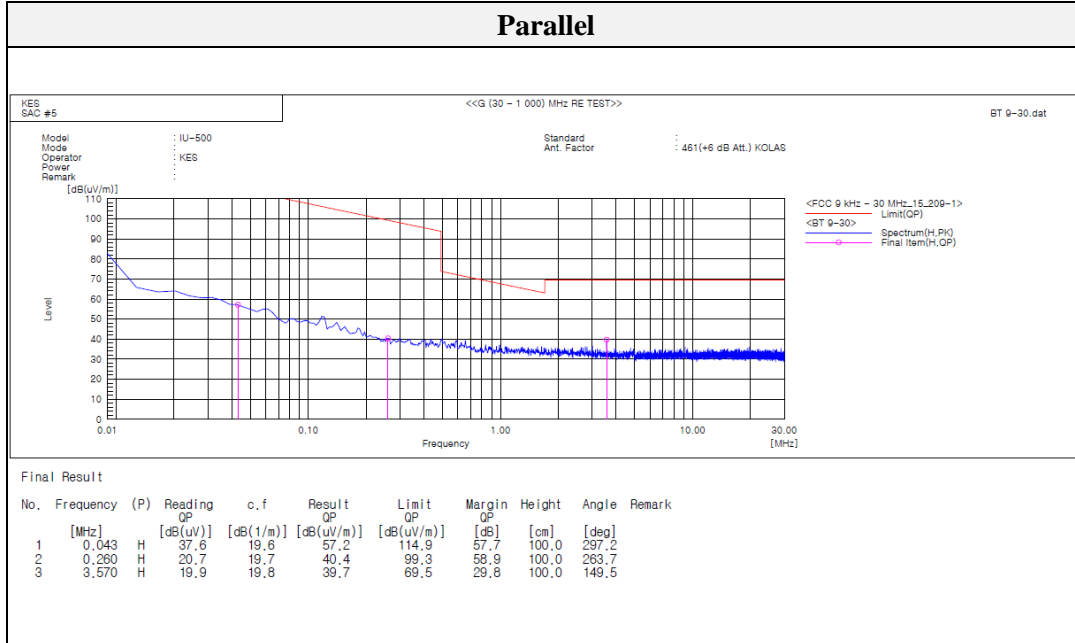

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-RF1-21T0214
 Page (18) of (52)

Test results (Below 1 000 MHz)

Mode: LE 1 Mbps
 Distance of measurement: 3 meter
 Channel: 00 (Worst case)

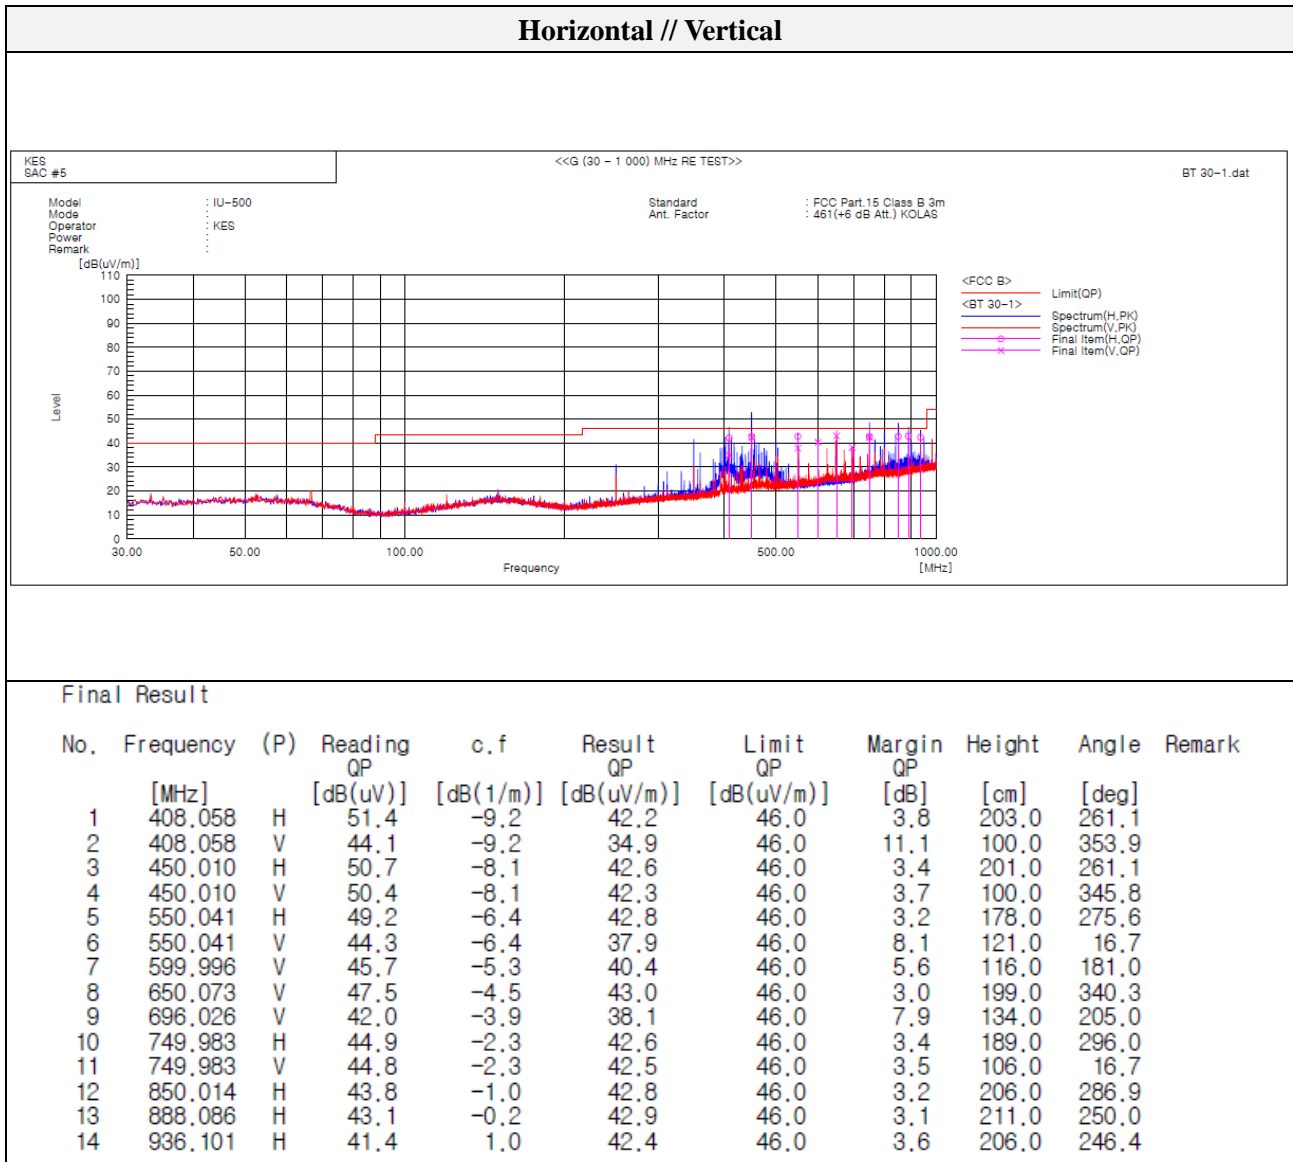

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-RF1-21T0214
 Page (19) of (52)

Mode: 802.11b
 Distance of measurement: 3 meter
 Channel: 01 (Worst case)

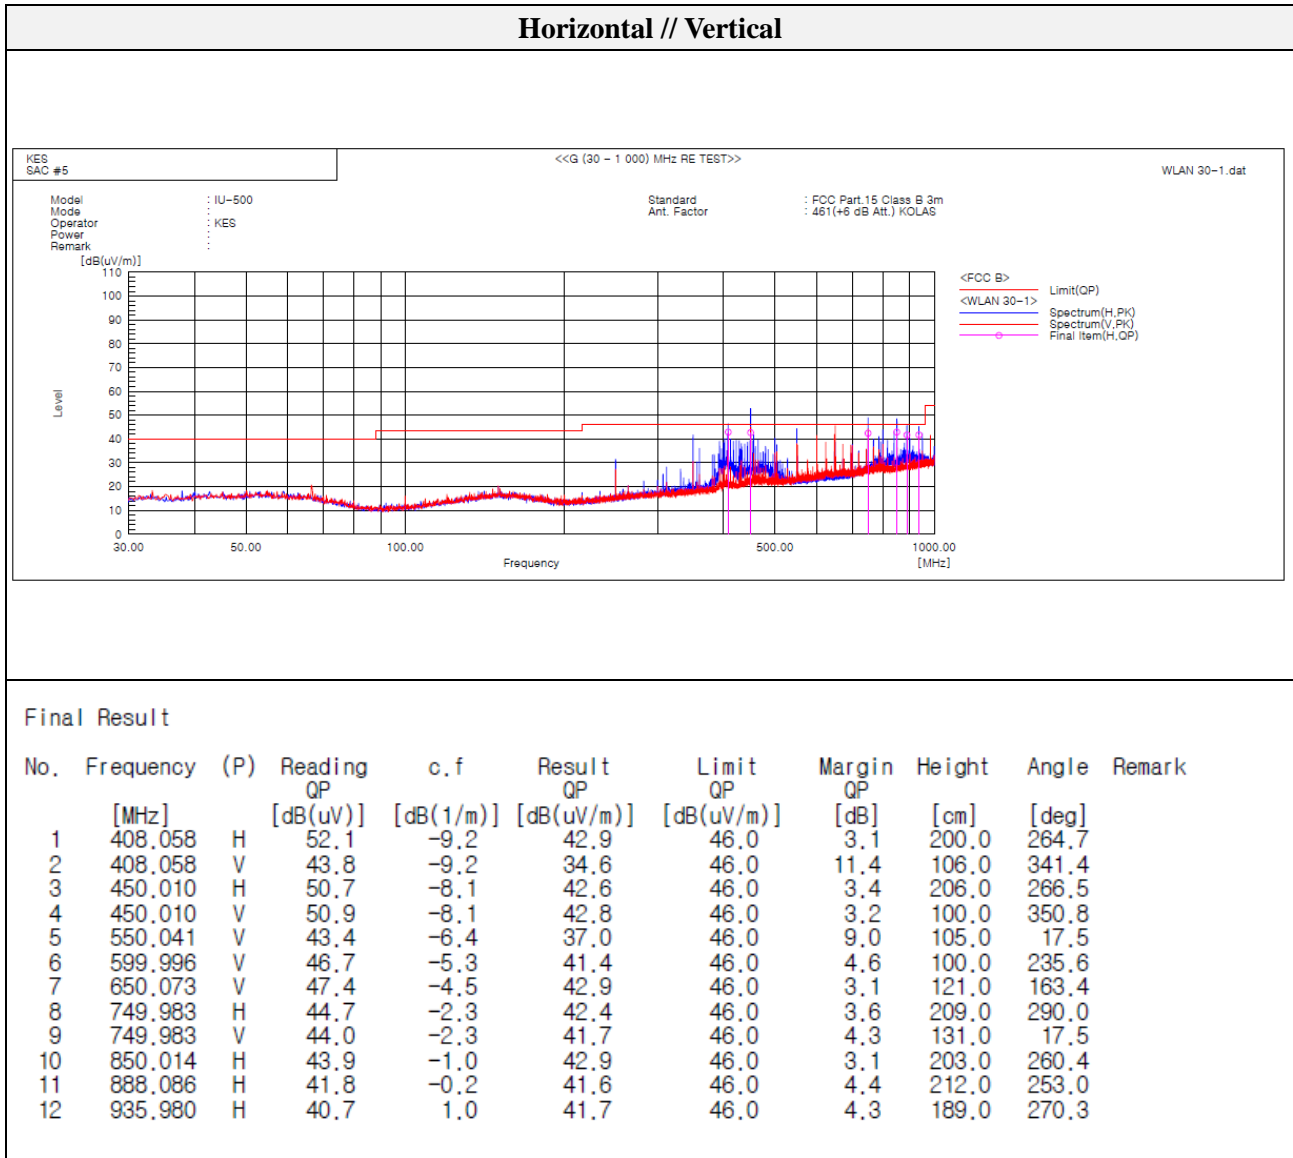

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (20) of (52)

Test results (Above 1 000 MHz)

Mode: LE 1 Mbps
Distance of measurement: 3 meter
Channel: 00


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 007.50	46.52	Peak	H	-11.12	-	35.40	74.00	38.60
1 008.30	45.99	Peak	V	-11.12	-	34.87	74.00	39.13

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 389.23	42.95	Peak	H	-2.77	-	40.18	74.00	33.82
2 358.00	41.99	Peak	V	-2.90	-	39.09	74.00	34.91

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

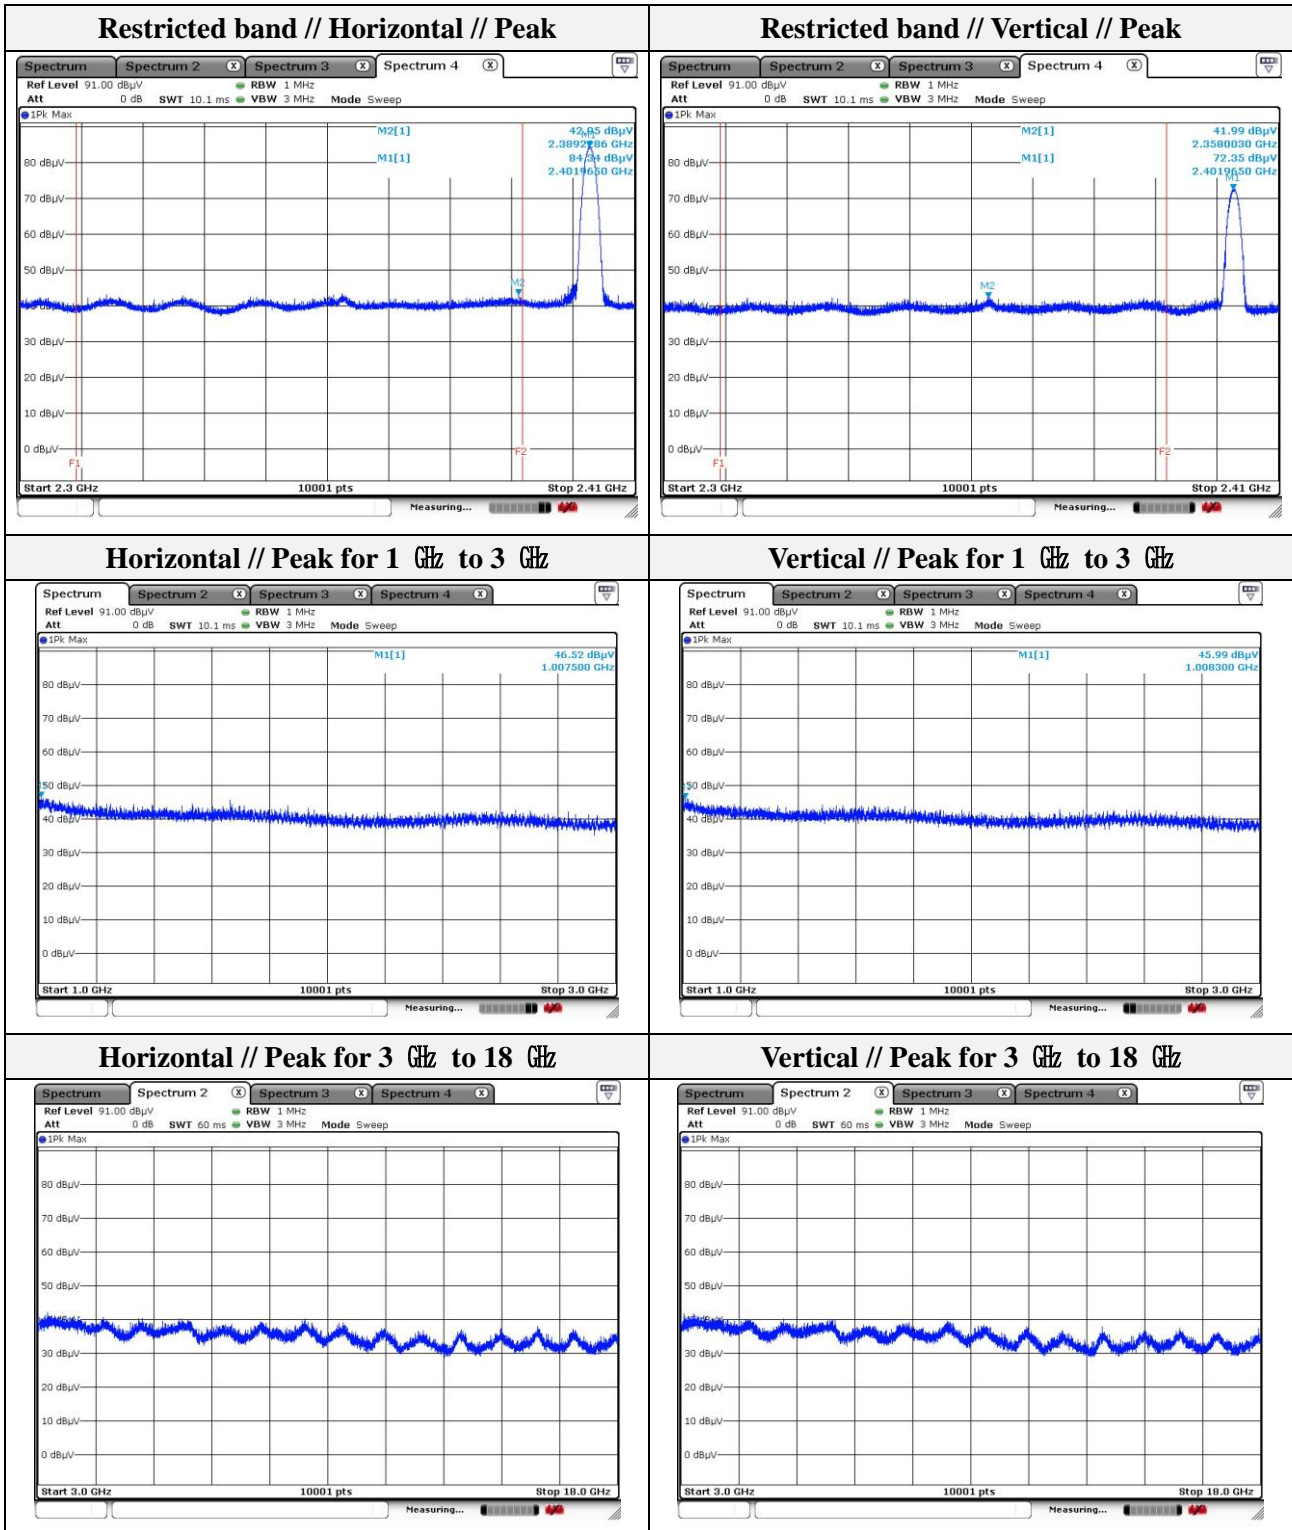

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Mode: LE 1 Mbps
 Distance of measurement: 3 meter
 Channel: 20

- **Spurious**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 091.09	45.47	Peak	V	-10.68	-	34.79	74.00	39.21
1 109.49	45.98	Peak	H	-10.58	-	35.40	74.00	38.60
4 883.10	41.45	Peak	H	5.43	-	46.88	74.00	27.12
4 884.60	44.45	Peak	V	5.44	-	49.89	74.00	24.11

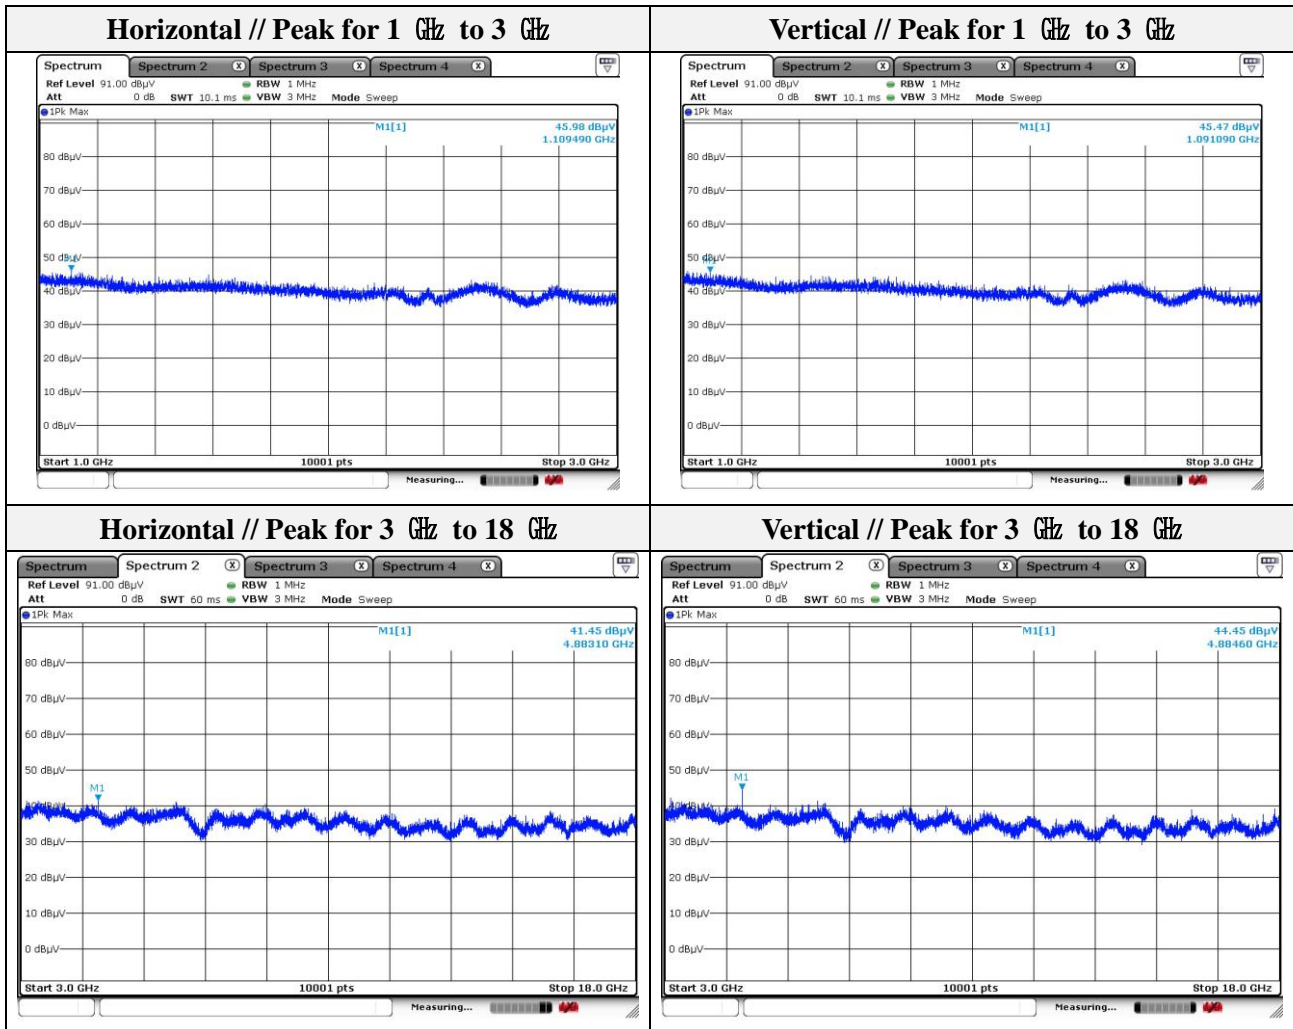

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (23) of (52)

Mode: LE 1 Mbps
Distance of measurement: 3 meter
Channel: 39


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 000.10	49.50	Peak	H	-11.16	-	38.34	74.00	35.66
1 021.50	46.51	Peak	V	-11.05	-	35.46	74.00	38.54

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.59	44.64	Peak	V	-2.40	-	42.24	74.00	31.76
2 498.20	43.66	Peak	H	-2.34	-	41.32	74.00	32.68

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

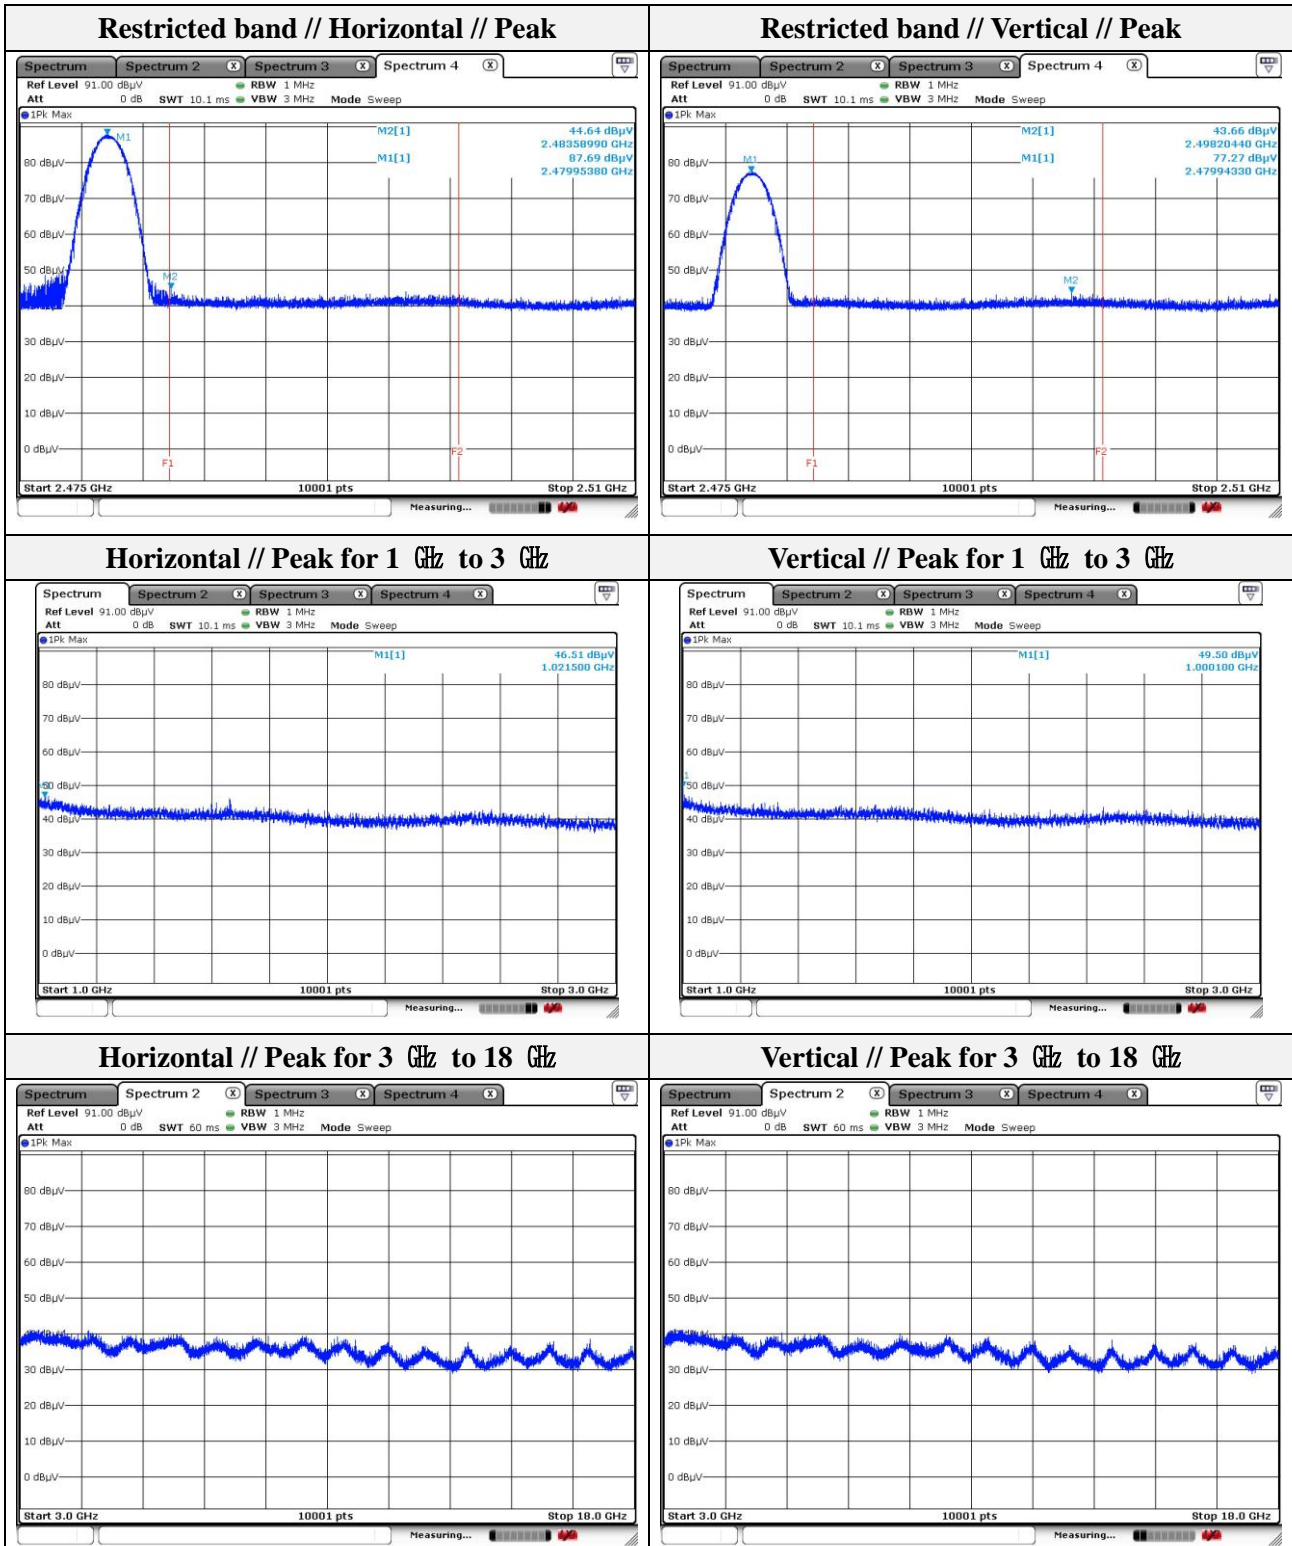

Note.


1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test results (18 GHz to 30 GHz) – Worst case

Mode: LE 1 Mbps
Distance of measurement: 3 meter
Channel: 00 (Worst case)

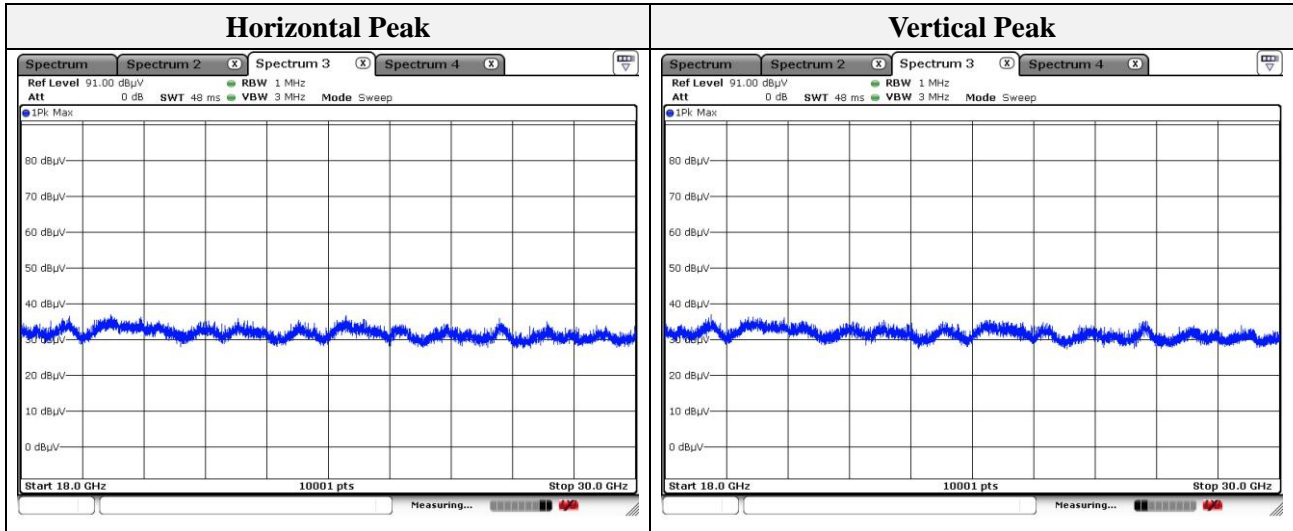

Note.
No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (26) of (52)

Test results (Above 1 000 MHz)

Mode: 802.11b
Distance of measurement: 3 meter
Channel: 01


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 006.50	46.33	Peak	H	-11.13	-	35.20	74.00	38.80
1 333.47	45.95	Peak	V	-9.38	-	36.57	74.00	37.43

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 358.14	44.40	Peak	H	-2.90	-	41.50	74.00	32.50
2 329.49	43.07	Peak	V	-3.03	-	40.04	74.00	33.96

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

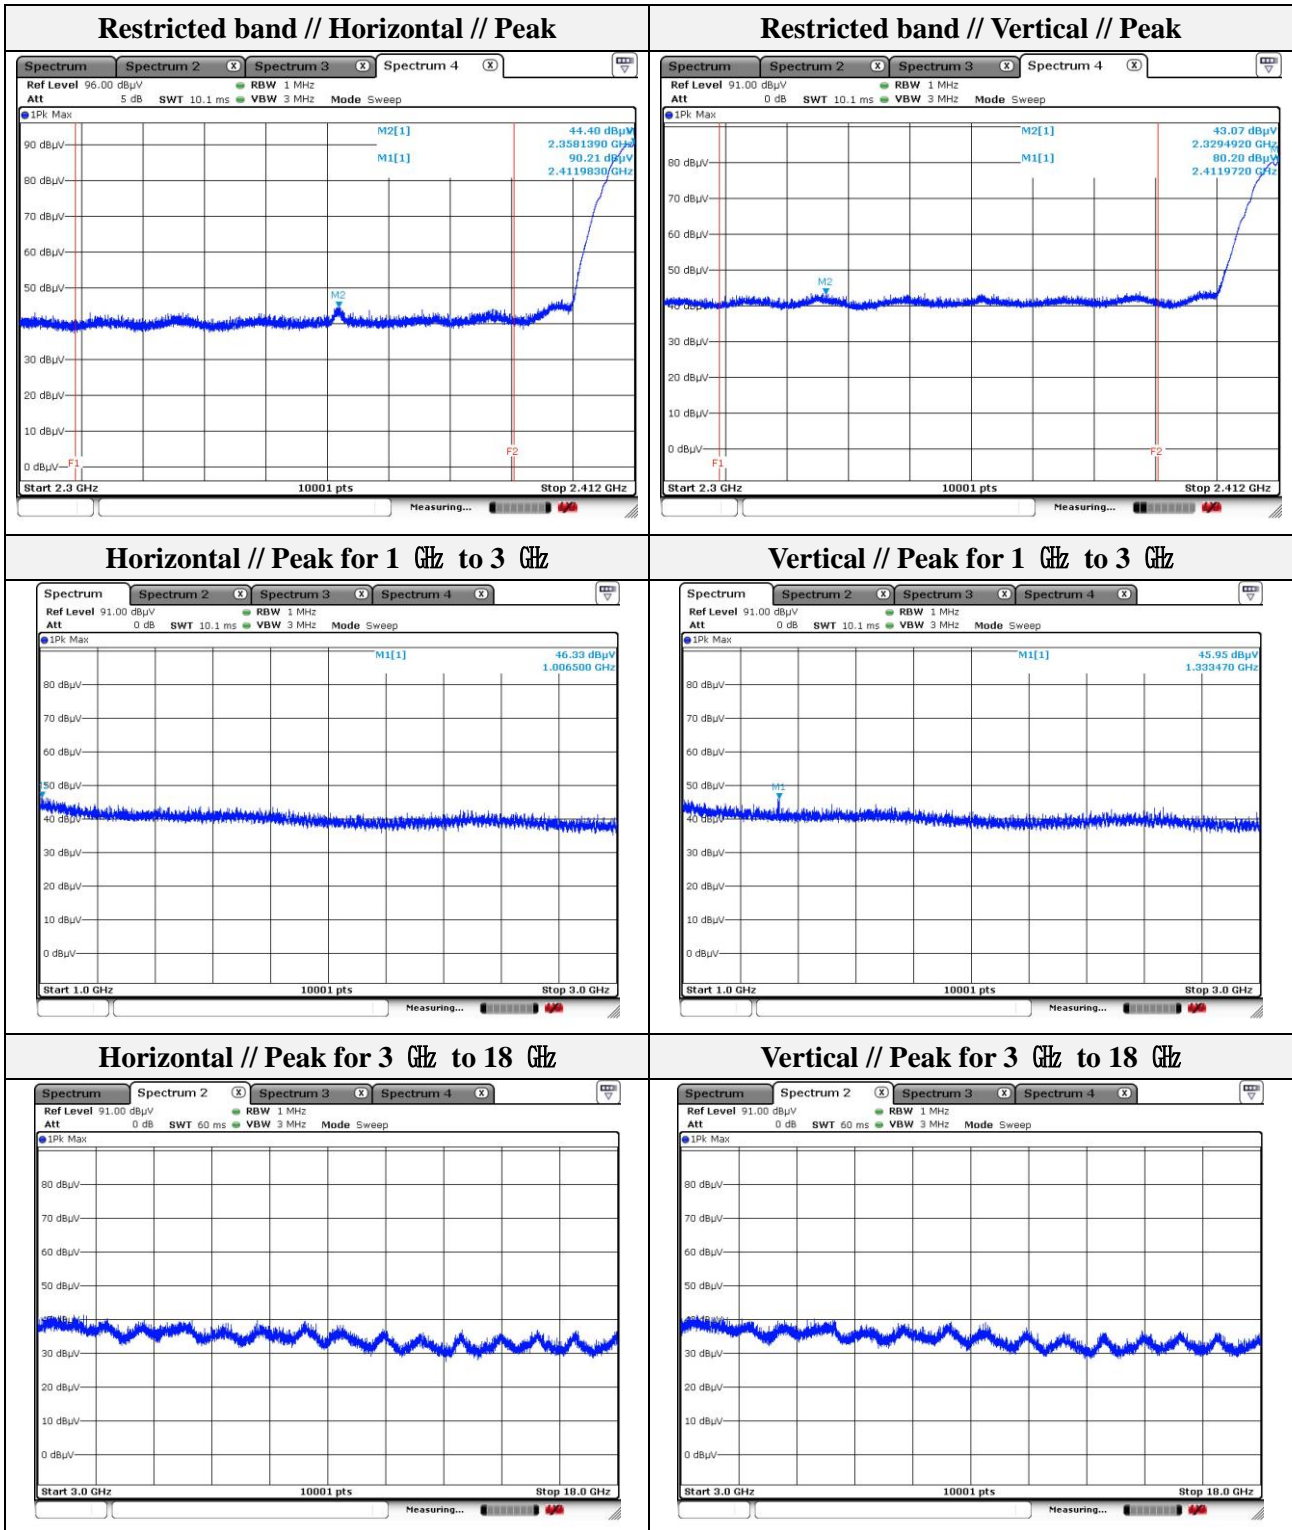

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Mode: 802.11b
Distance of measurement: 3 meter
Channel: 06

- **Spurious**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 659.03	47.71	Peak	H	-7.19	-	40.52	74.00	33.48
1 331.07	45.86	Peak	V	-9.40	-	36.46	74.00	37.54

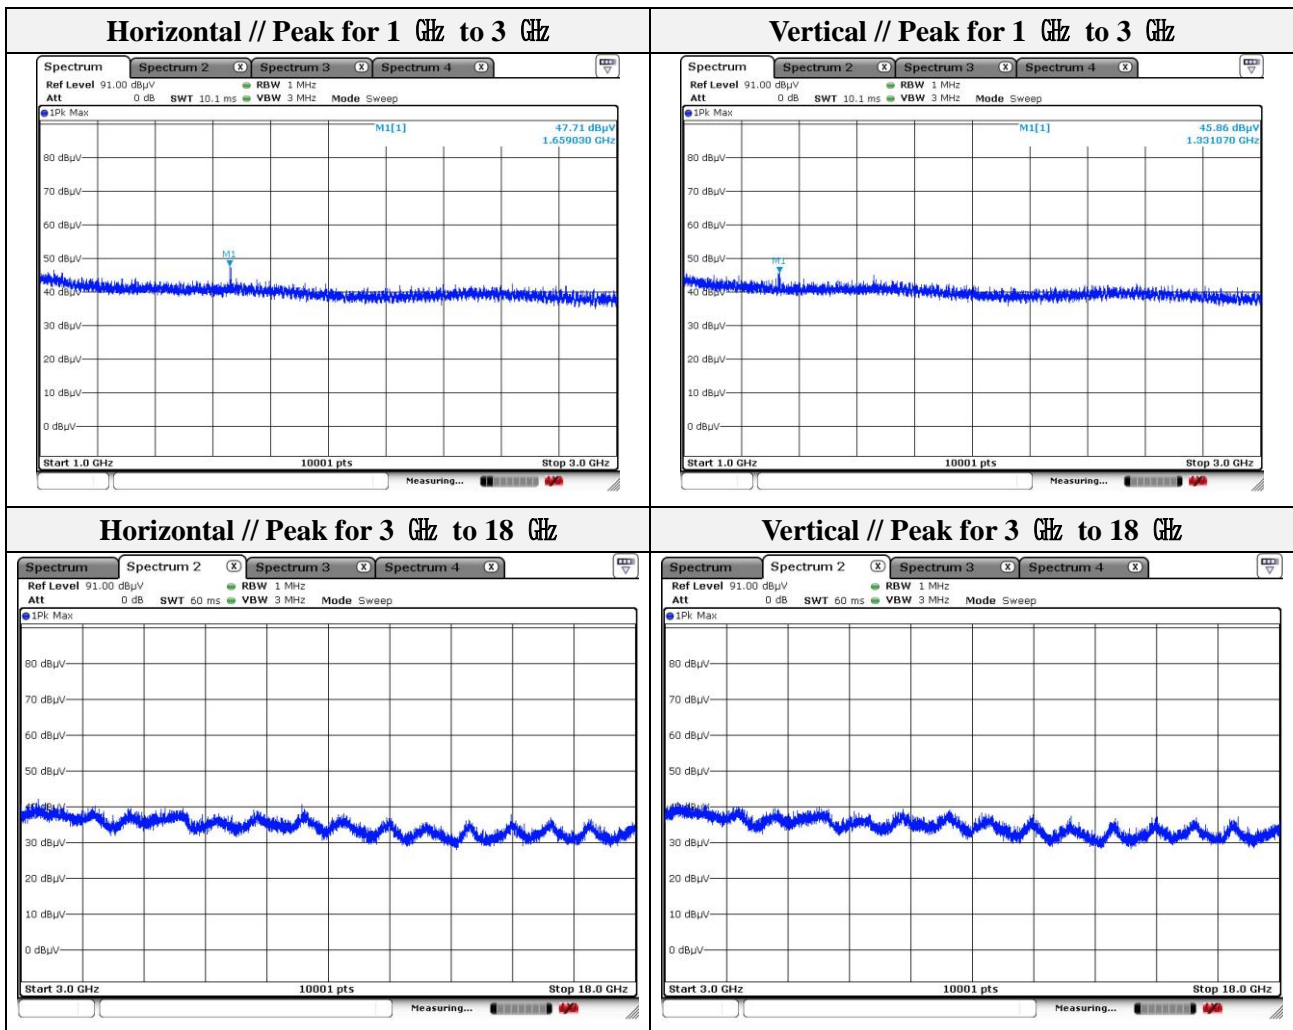

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (29) of (52)

Mode: 802.11b
Distance of measurement: 3 meter
Channel: 11


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 030.30	45.99	Peak	H	-11.00	-	34.99	74.00	39.01
1 091.89	45.87	Peak	V	-10.67	-	35.20	74.00	38.80

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 497.28	48.22	Peak	H	-2.35	-	45.87	74.00	28.13
2 498.55	46.43	Peak	V	-2.34	-	44.09	74.00	29.91

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

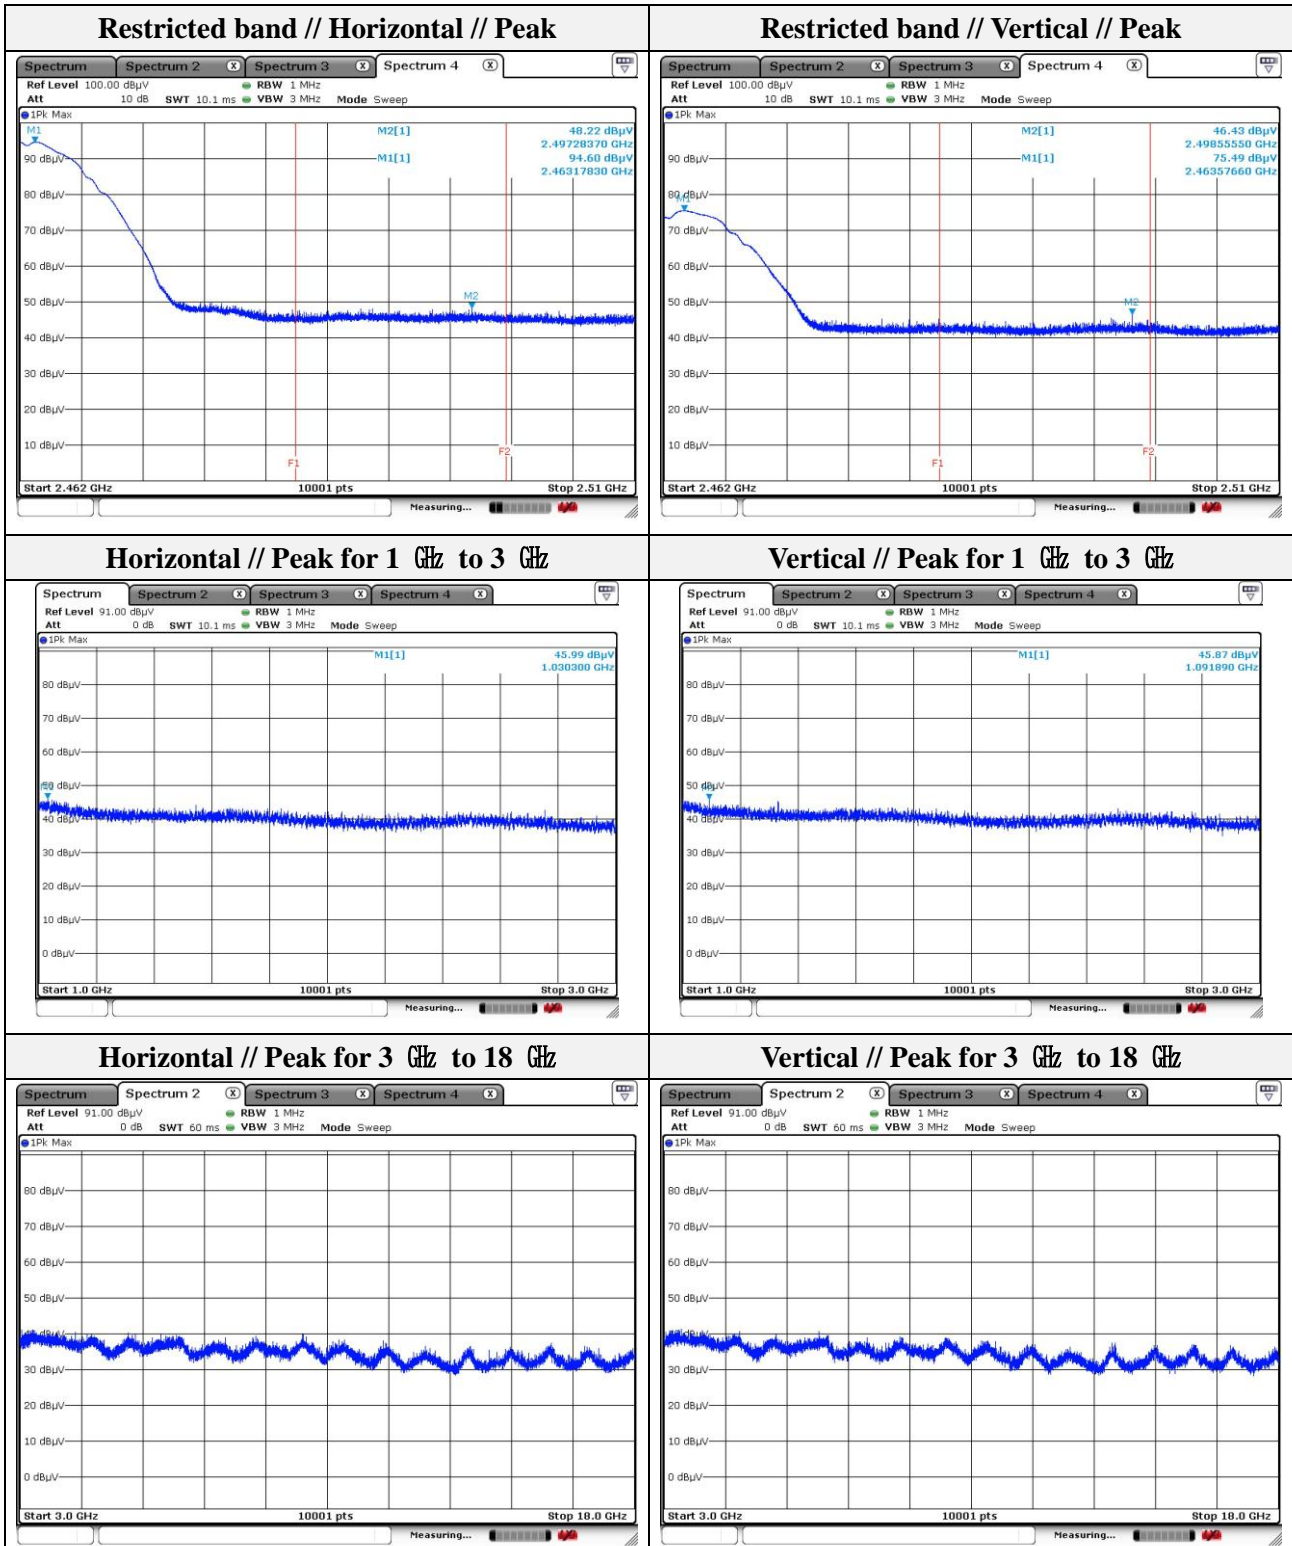

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (31) of (52)

Test results (Above 1 000 MHz)

Mode: 802.11g
Distance of measurement: 3 meter
Channel: 01


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 048.30	46.35	Peak	H	-10.90	-	35.45	74.00	38.55
1 664.83	46.06	Peak	V	-7.14	-	38.92	74.00	35.08

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 357.85	46.69	Peak	H	-2.90	-	43.79	74.00	30.21
2 384.17	45.35	Peak	V	-2.79	-	42.56	74.00	31.44

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

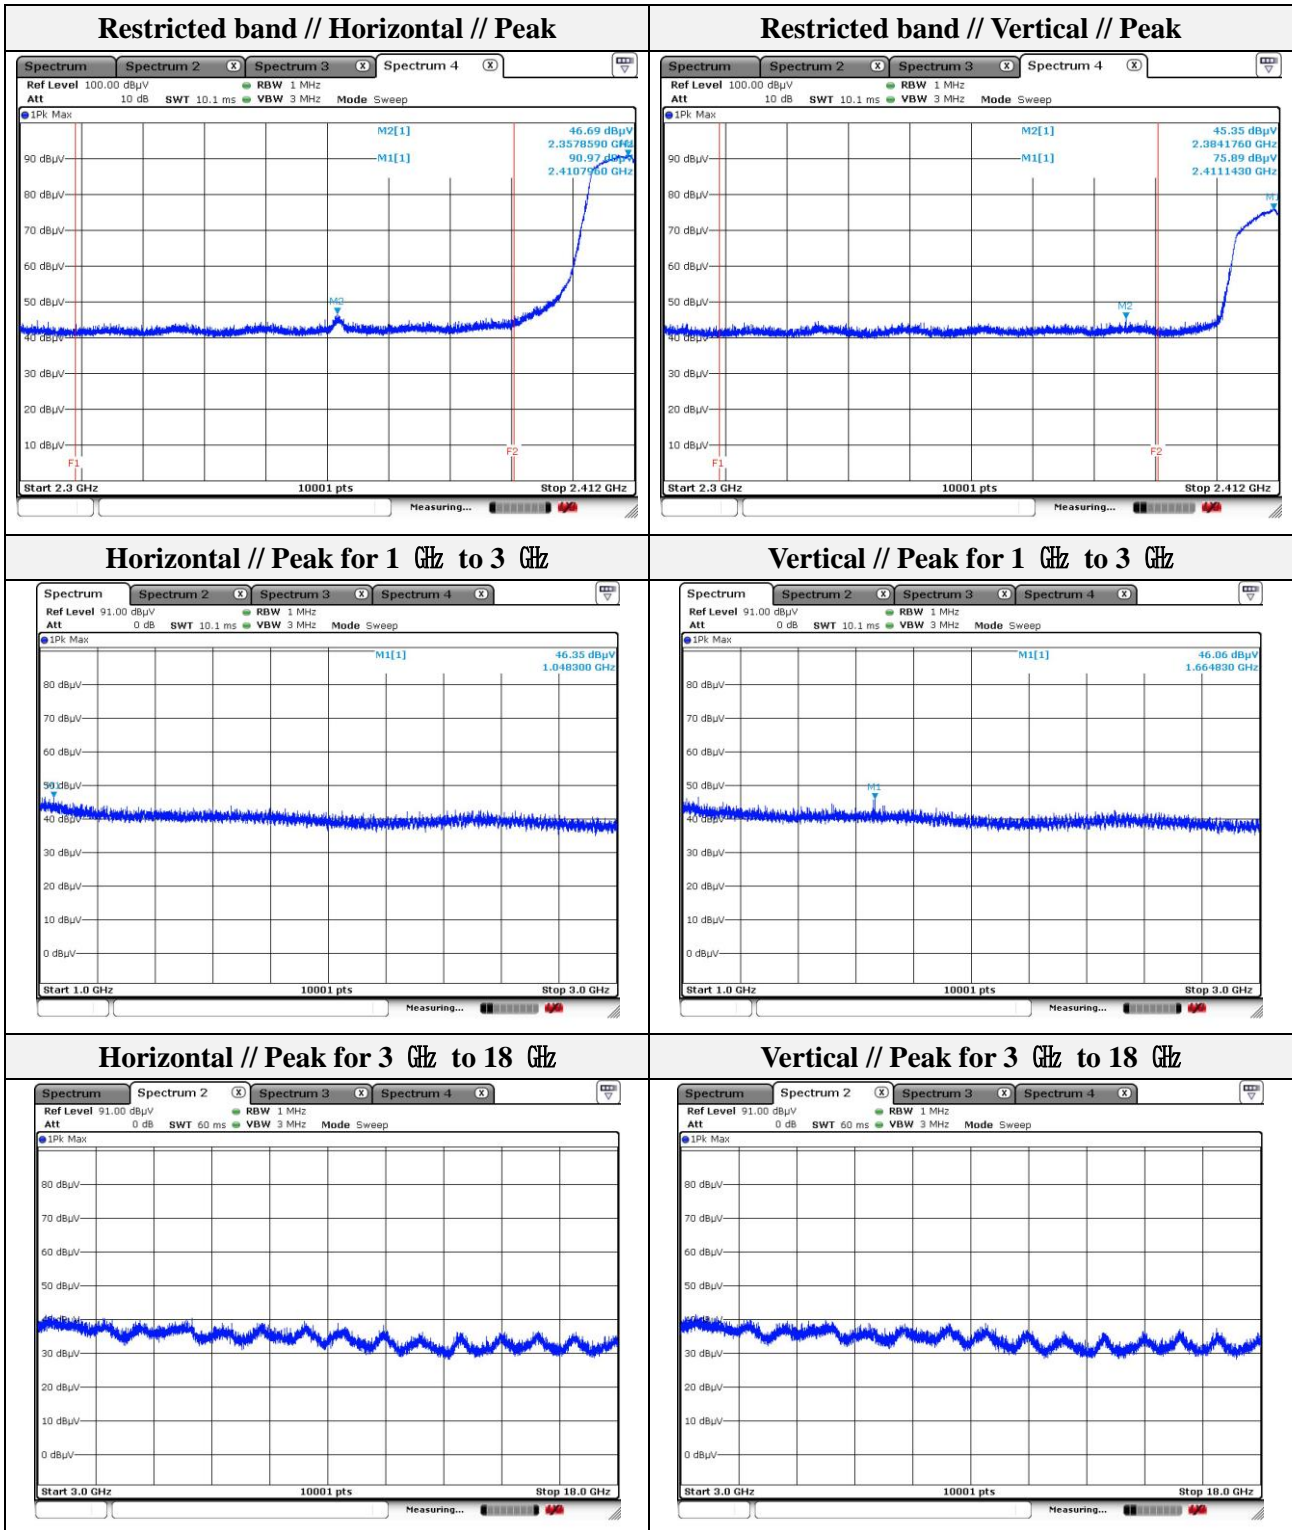

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Mode: 802.11g
 Distance of measurement: 3 meter
 Channel: 06

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 031.10	47.11	Peak	H	-10.99	-	36.12	74.00	37.88
1 327.87	45.19	Peak	V	-9.41	-	35.78	74.00	38.22

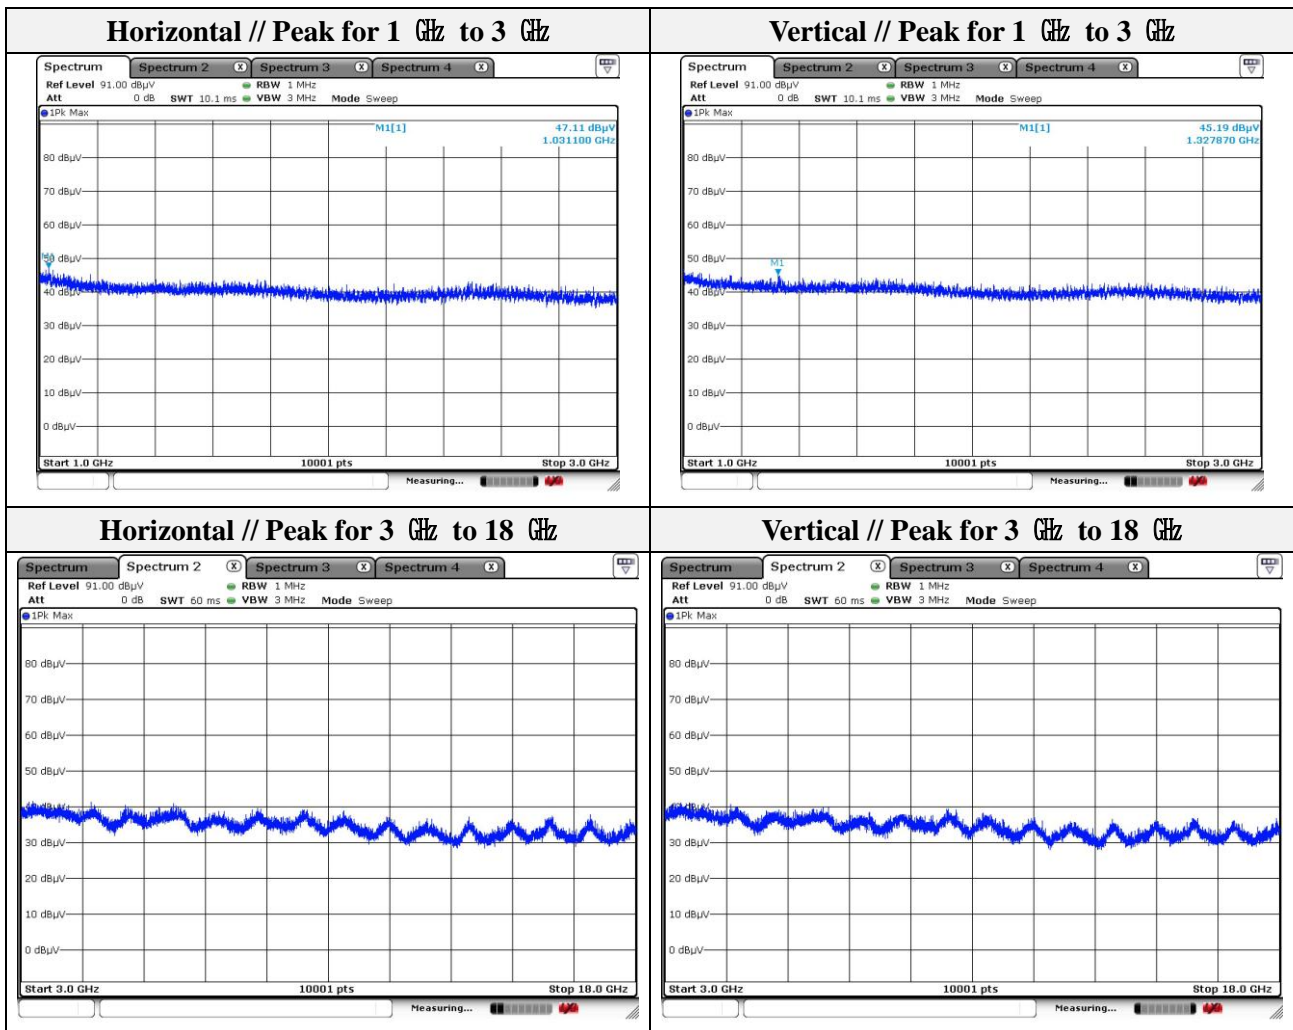

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (34) of (52)

Mode: 802.11g
Distance of measurement: 3 meter
Channel: 11


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 029.30	46.48	Peak	H	-11.00	-	35.48	74.00	38.52
1 000.50	48.37	Peak	V	-11.16	-	37.21	74.00	36.79

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.97	49.82	Peak	H	-2.40	-	47.42	74.00	26.58
2 483.81	45.90	Peak	V	-2.40	-	43.50	74.00	30.50

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

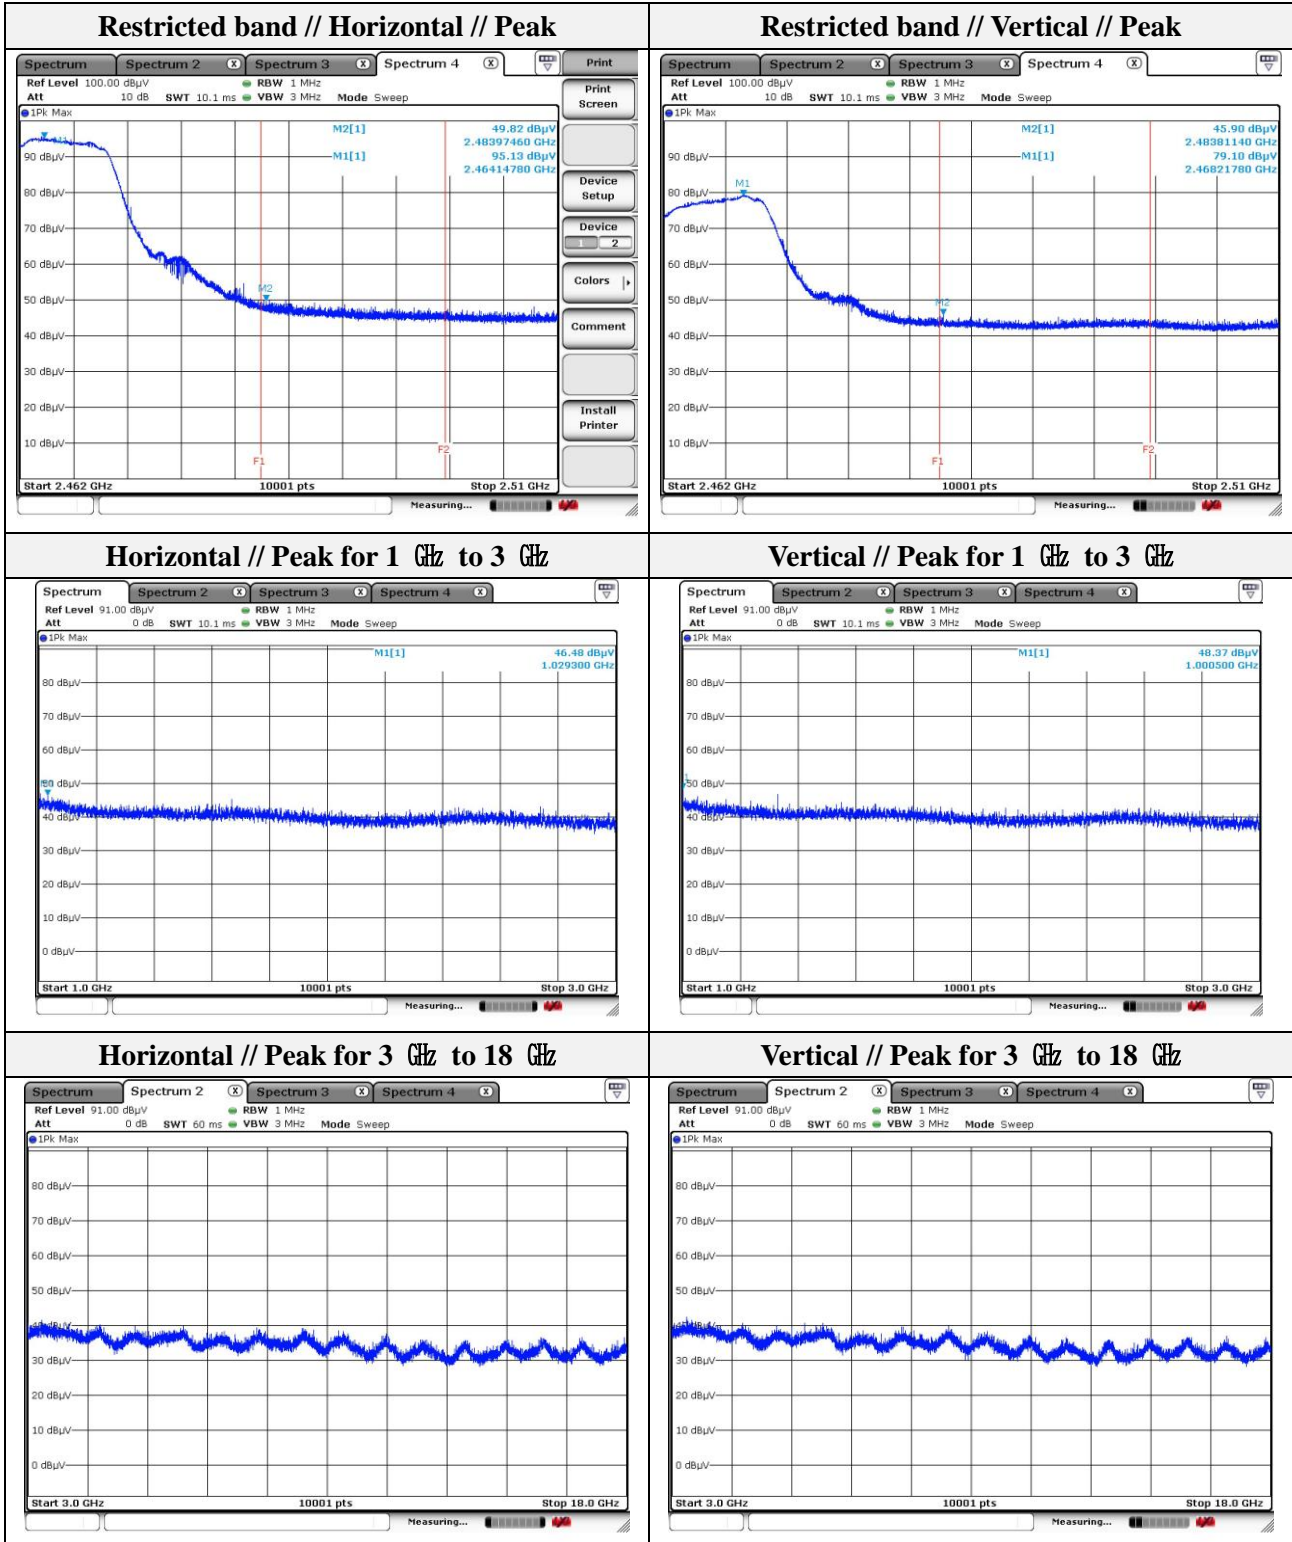

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (36) of (52)

Test results (Above 1 000 MHz)

Mode: 802.11n_HT20
Distance of measurement: 3 meter
Channel: 01


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 329.87	46.75	Peak	V	-9.40	-	37.35	74.00	36.65
1 663.83	47.31	Peak	H	-7.15	-	40.16	74.00	33.84

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 356.93	44.80	Peak	V	-2.91	-	41.89	74.00	32.11
2 358.28	46.33	Peak	H	-2.90	-	43.43	74.00	30.57

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

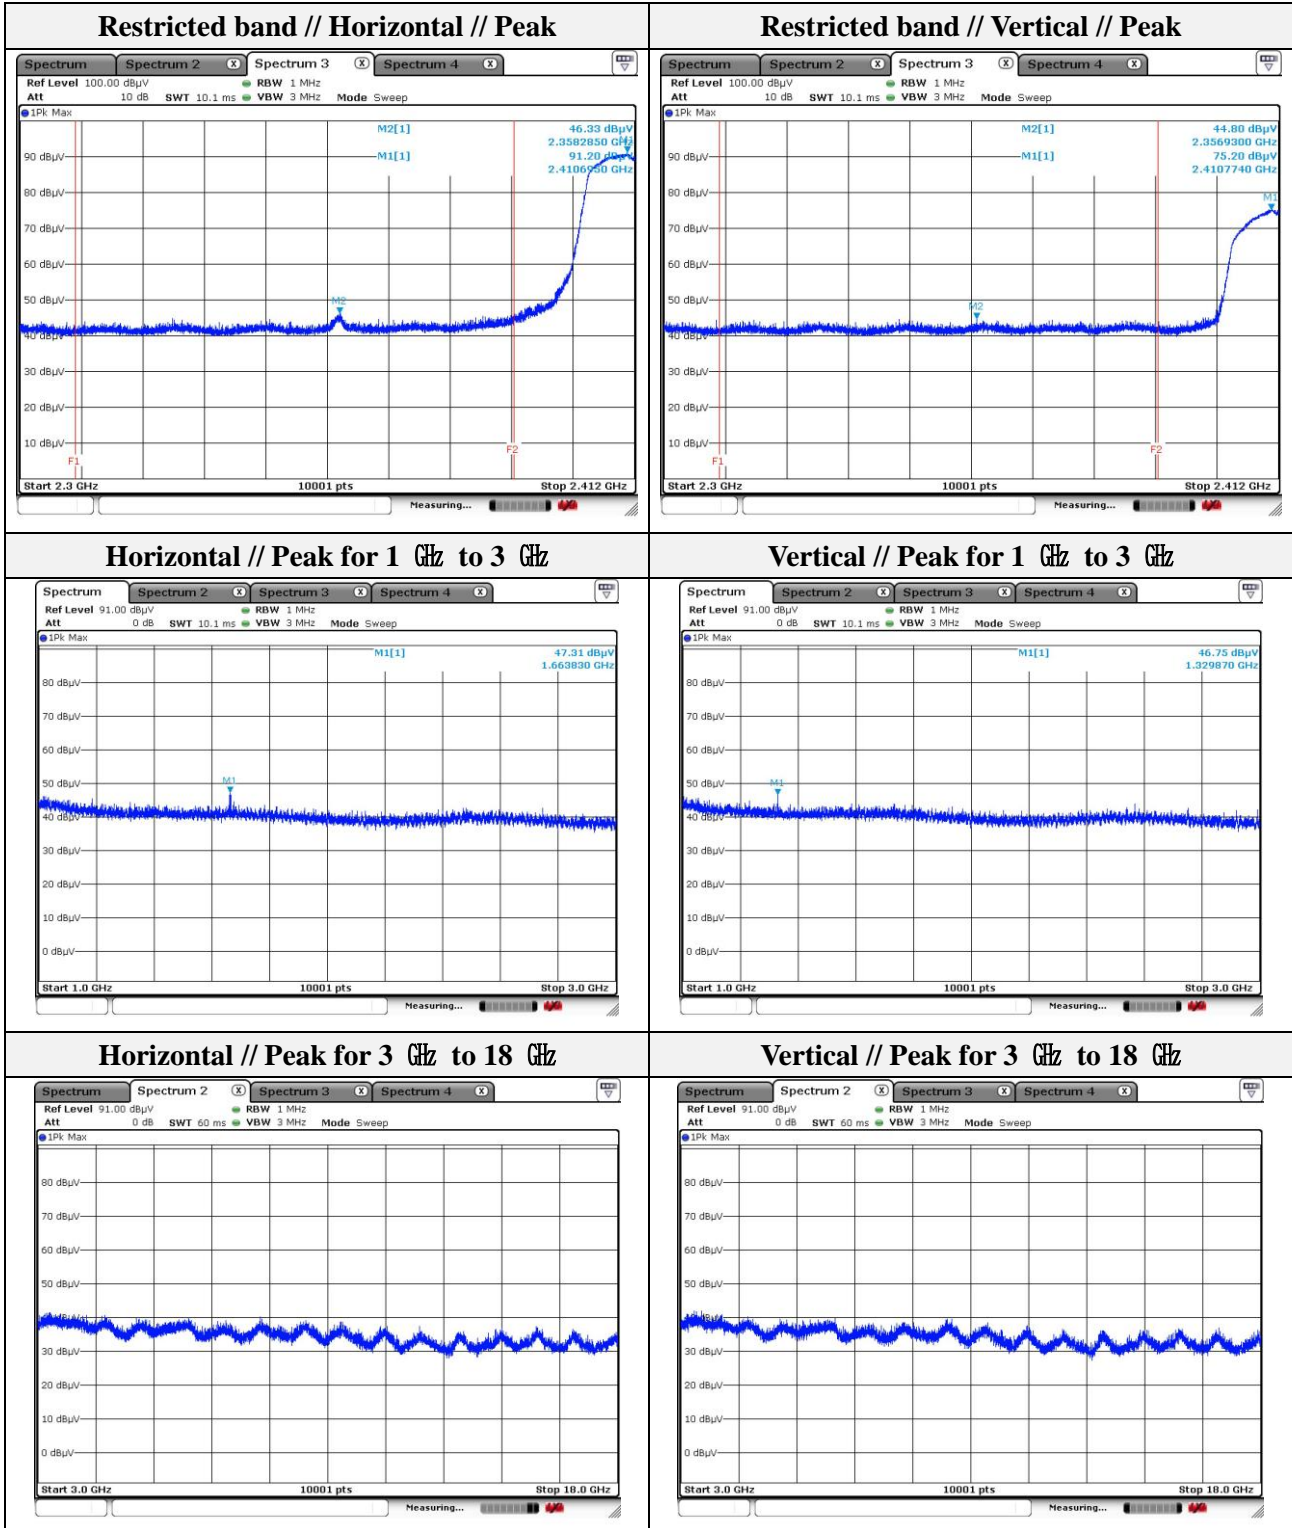

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Mode: 802.11n_HT20
Distance of measurement: 3 meter
Channel: 06

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 331.87	45.98	Peak	V	-9.39	-	36.59	74.00	37.41
1 664.83	46.40	Peak	H	-7.14	-	39.26	74.00	34.74

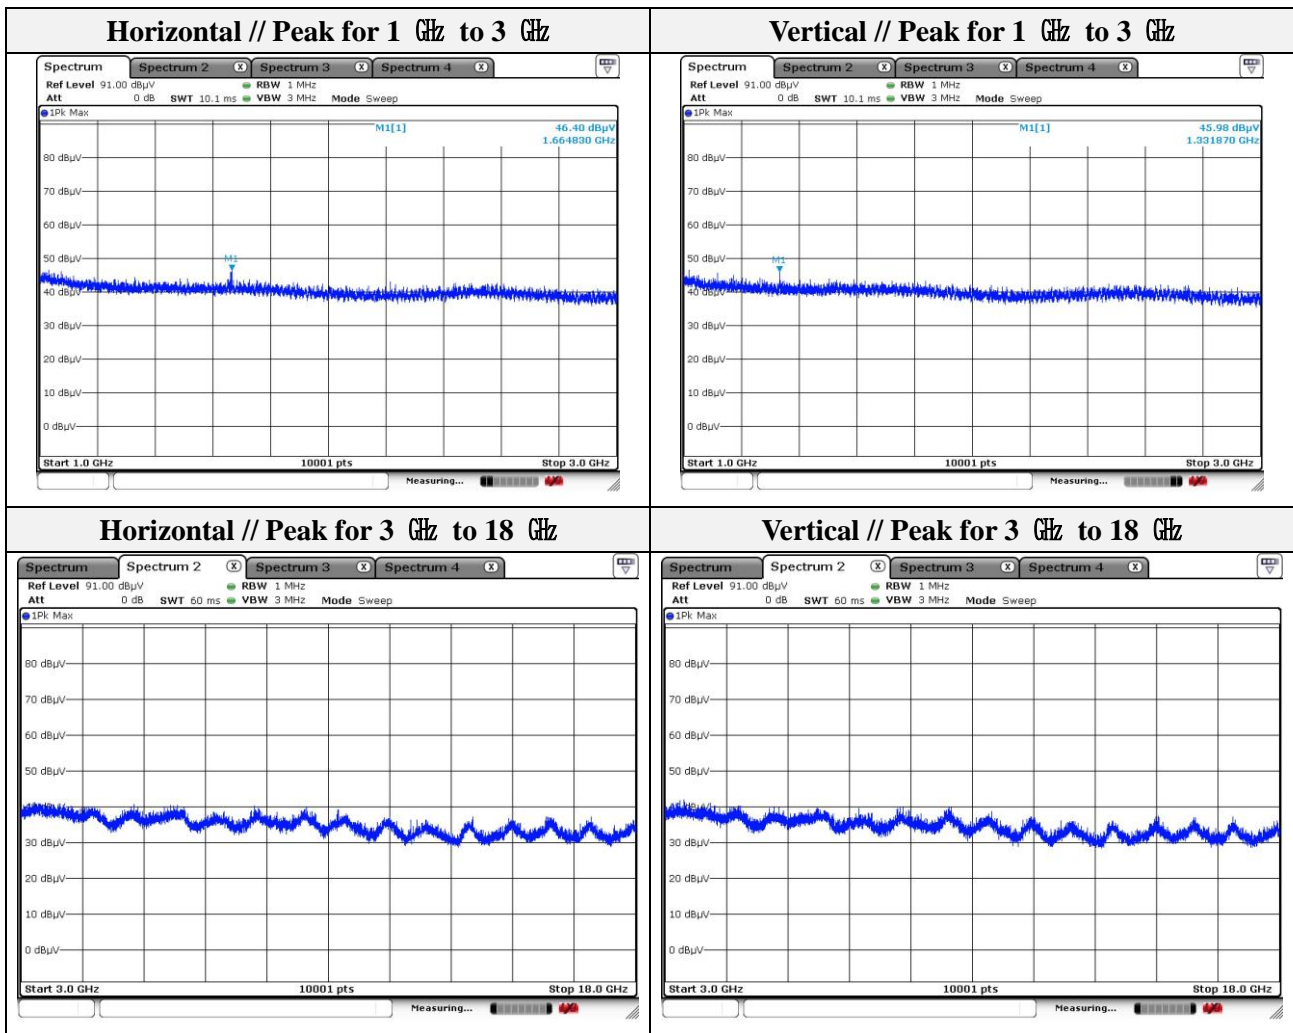

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (39) of (52)

Mode: 802.11n_HT20
Distance of measurement: 3 meter
Channel: 11


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 003.30	46.23	Peak	V	-11.14	-	35.09	74.00	38.91
1 665.43	45.84	Peak	H	-7.14	-	38.70	74.00	35.30

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 483.72	51.12	Peak	H	-2.40	-	48.72	74.00	25.28
2 487.05	45.81	Peak	V	-2.39	-	43.42	74.00	30.58

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

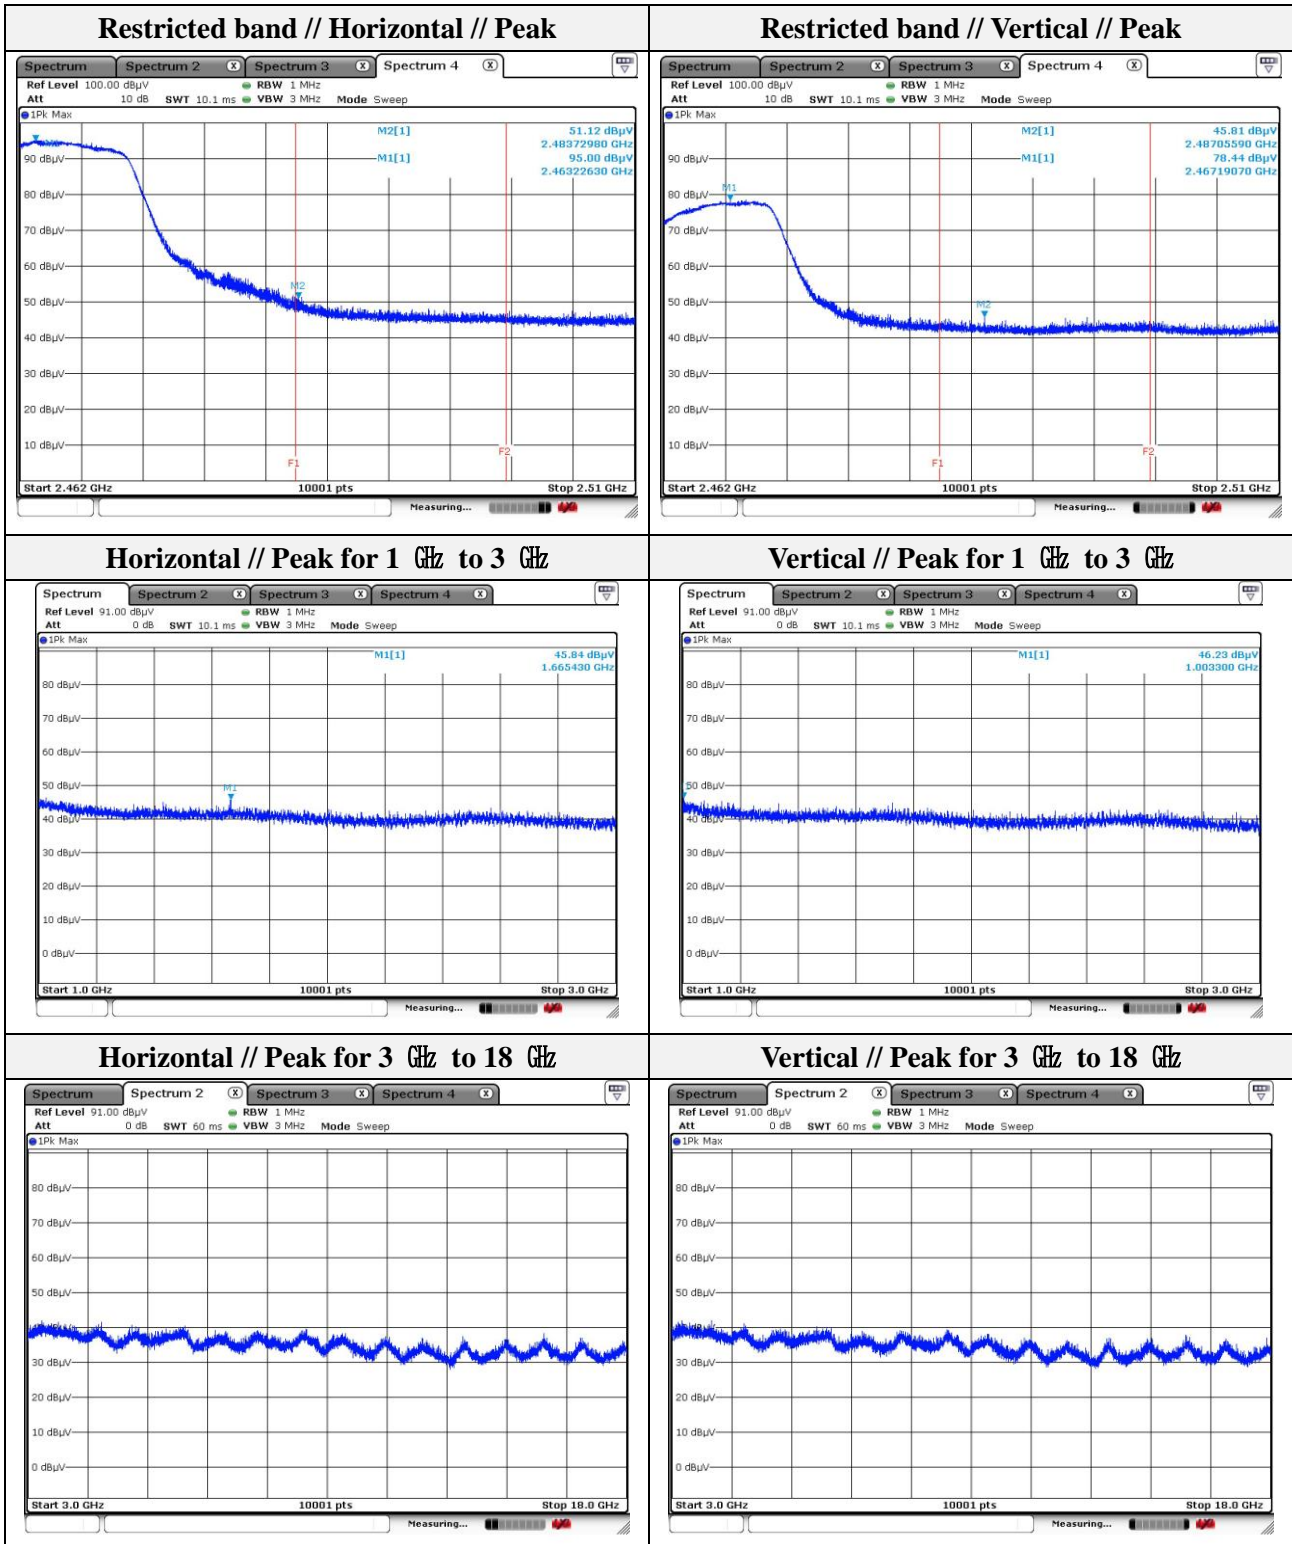

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (41) of (52)

Test results (Above 1 000 MHz)

Mode: 802.11n_HT40
Distance of measurement: 3 meter
Channel: 03


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 005.50	46.82	Peak	V	-11.13	-	35.69	74.00	38.31
1 665.23	46.48	Peak	H	-7.14	-	39.34	74.00	34.66

- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 377.63	50.44	Peak	H	-2.82	-	47.62	74.00	26.38
2 381.41	50.86	Peak	H	-2.80	-	48.06	74.00	25.94
2 383.28	44.95	Peak	V	-2.79	-	42.16	74.00	31.84
2 387.38	52.49	Peak	H	-2.78	-	49.71	74.00	24.29

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

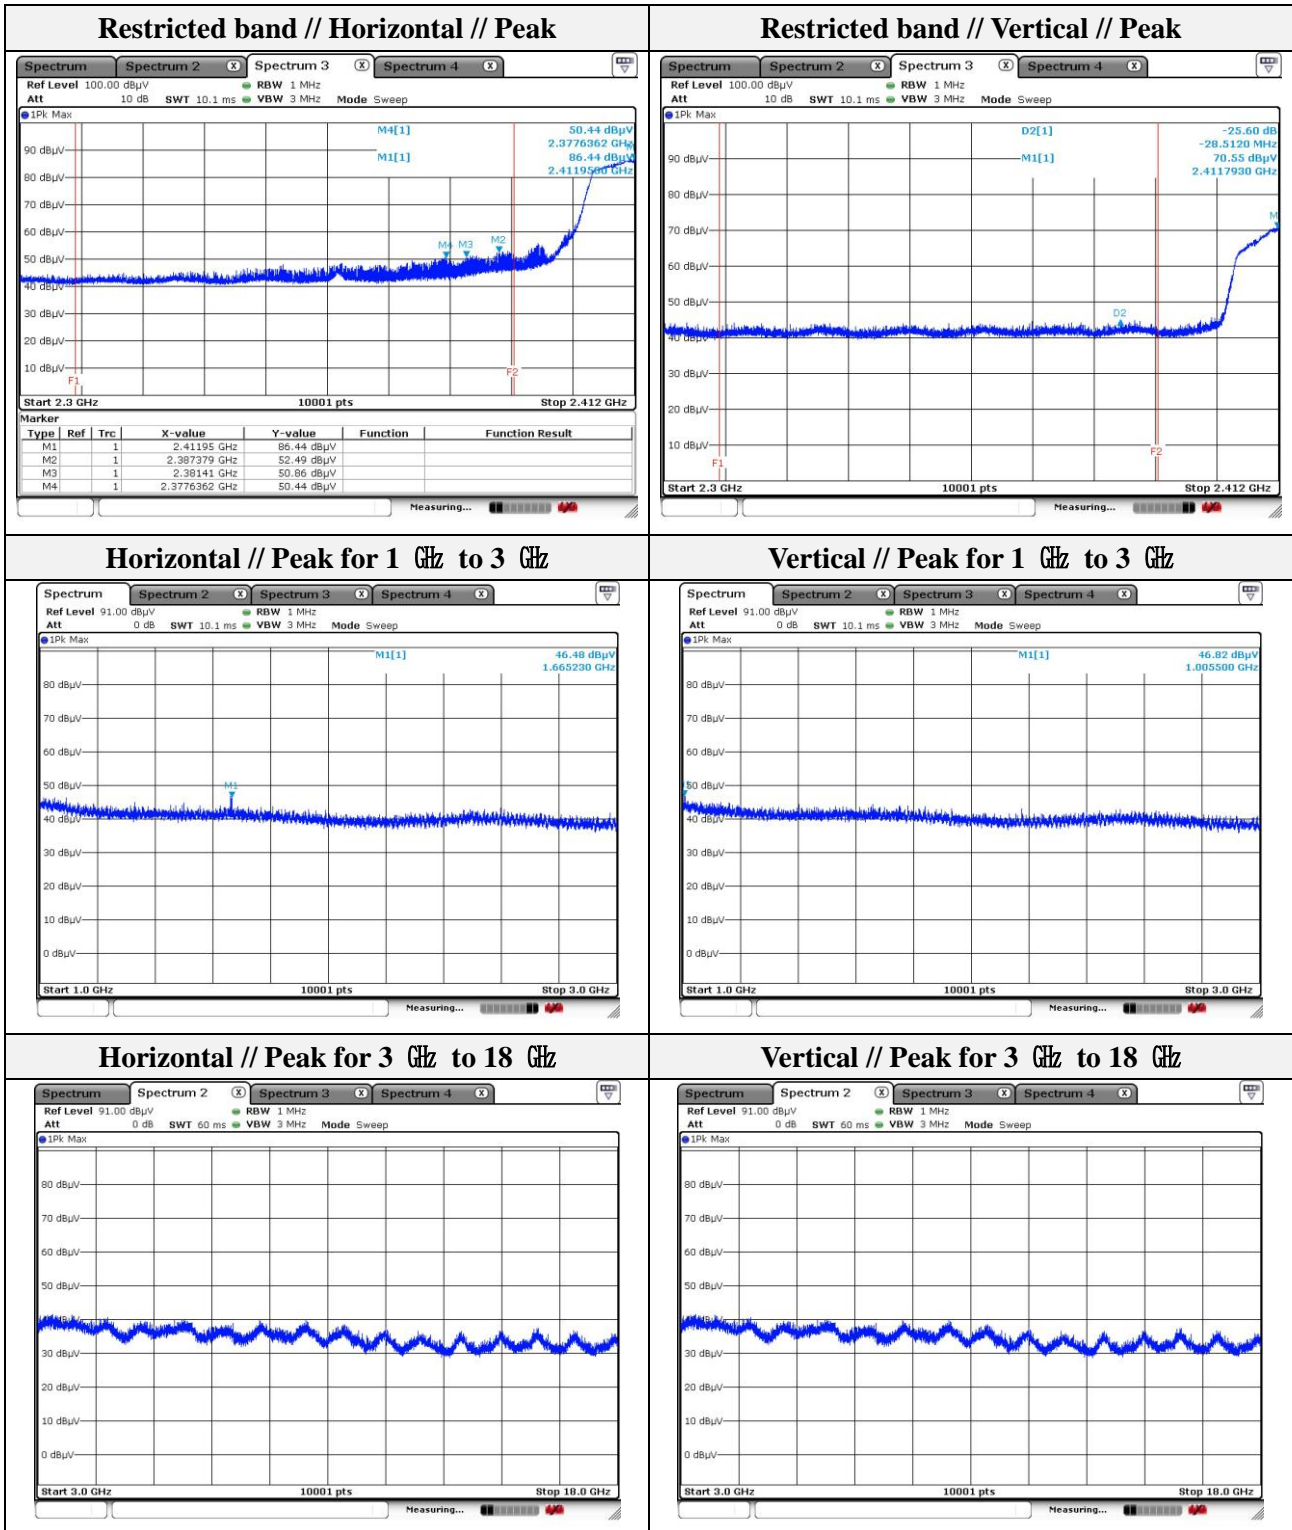

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.


This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr



Mode: 802.11n_HT40
Distance of measurement: 3 meter
Channel: 06

- **Spurious**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 000.10	46.50	Peak	H	-11.16	-	35.34	74.00	38.66
1 329.07	46.76	Peak	V	-9.41	-	37.35	74.00	36.65

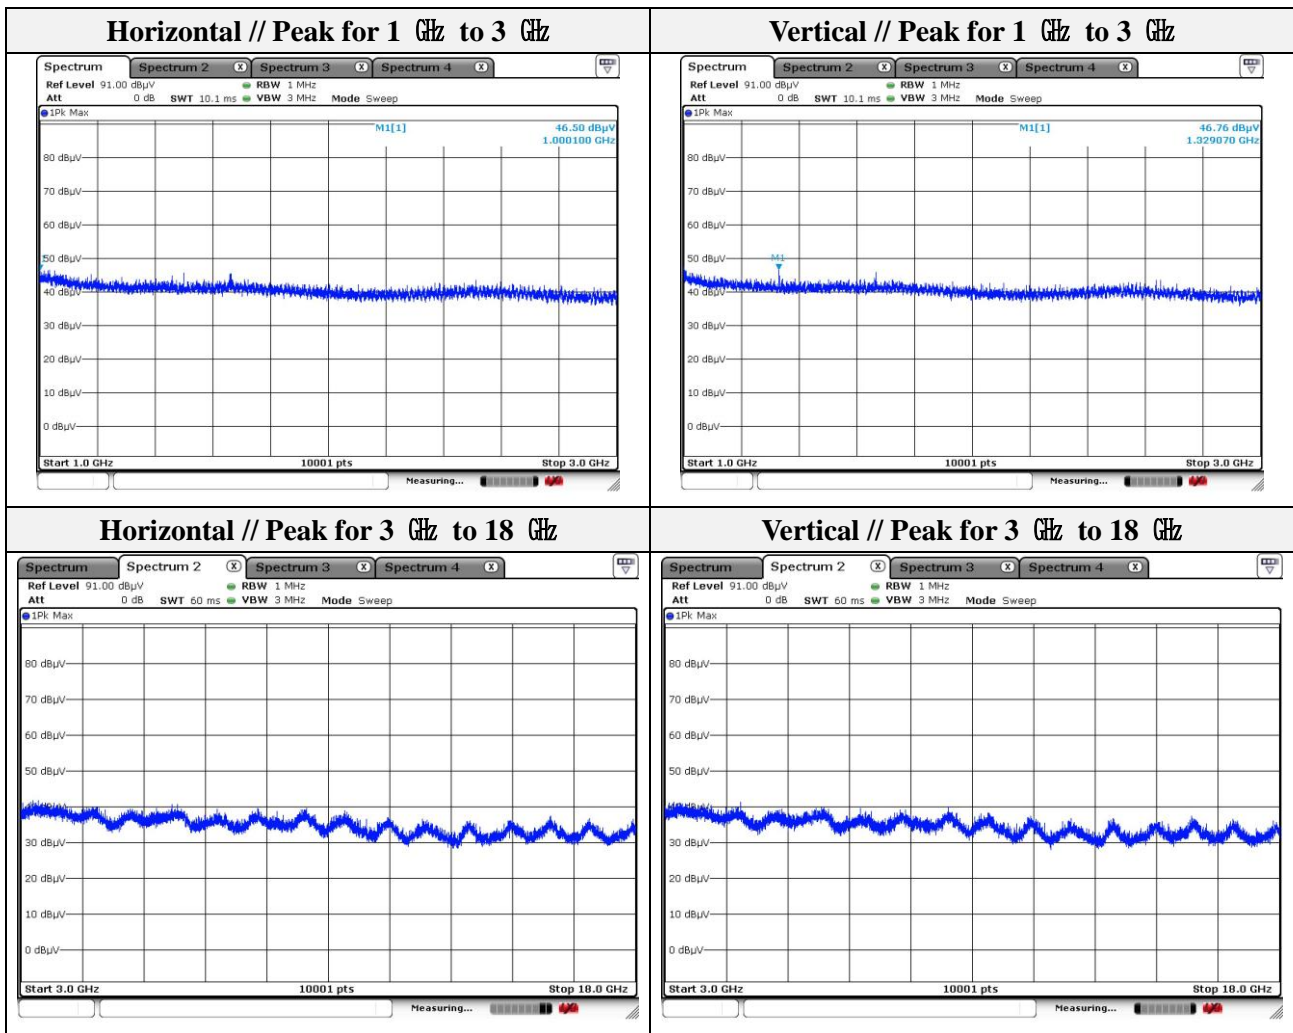

Note.

1. No spurious emission were detected above 3 GHz.
2. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (44) of (52)

Mode: 802.11n_HT40
Distance of measurement: 3 meter
Channel: 09


- Spurious

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 058.09	46.21	Peak	H	-10.85	-	35.36	74.00	38.64
1 330.07	46.48	Peak	V	-9.40	-	37.08	74.00	36.92


- Band edge

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 485.49	58.70	Peak	H	-2.39	-	56.31	74.00	17.69
2 485.49	36.56	Average	H	-2.39	0.56	34.17	54.00	20.39
2 490.98	47.14	Peak	H	-2.37	-	54.77	74.00	19.23
2 490.98	35.84	Average	H	-2.37	0.56	33.47	54.00	21.09
2 497.15	54.51	Peak	H	-2.35	-	52.16	74.00	21.84
2 484.83	46.35	Peak	V	-2.39	-	43.96	74.00	30.04

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

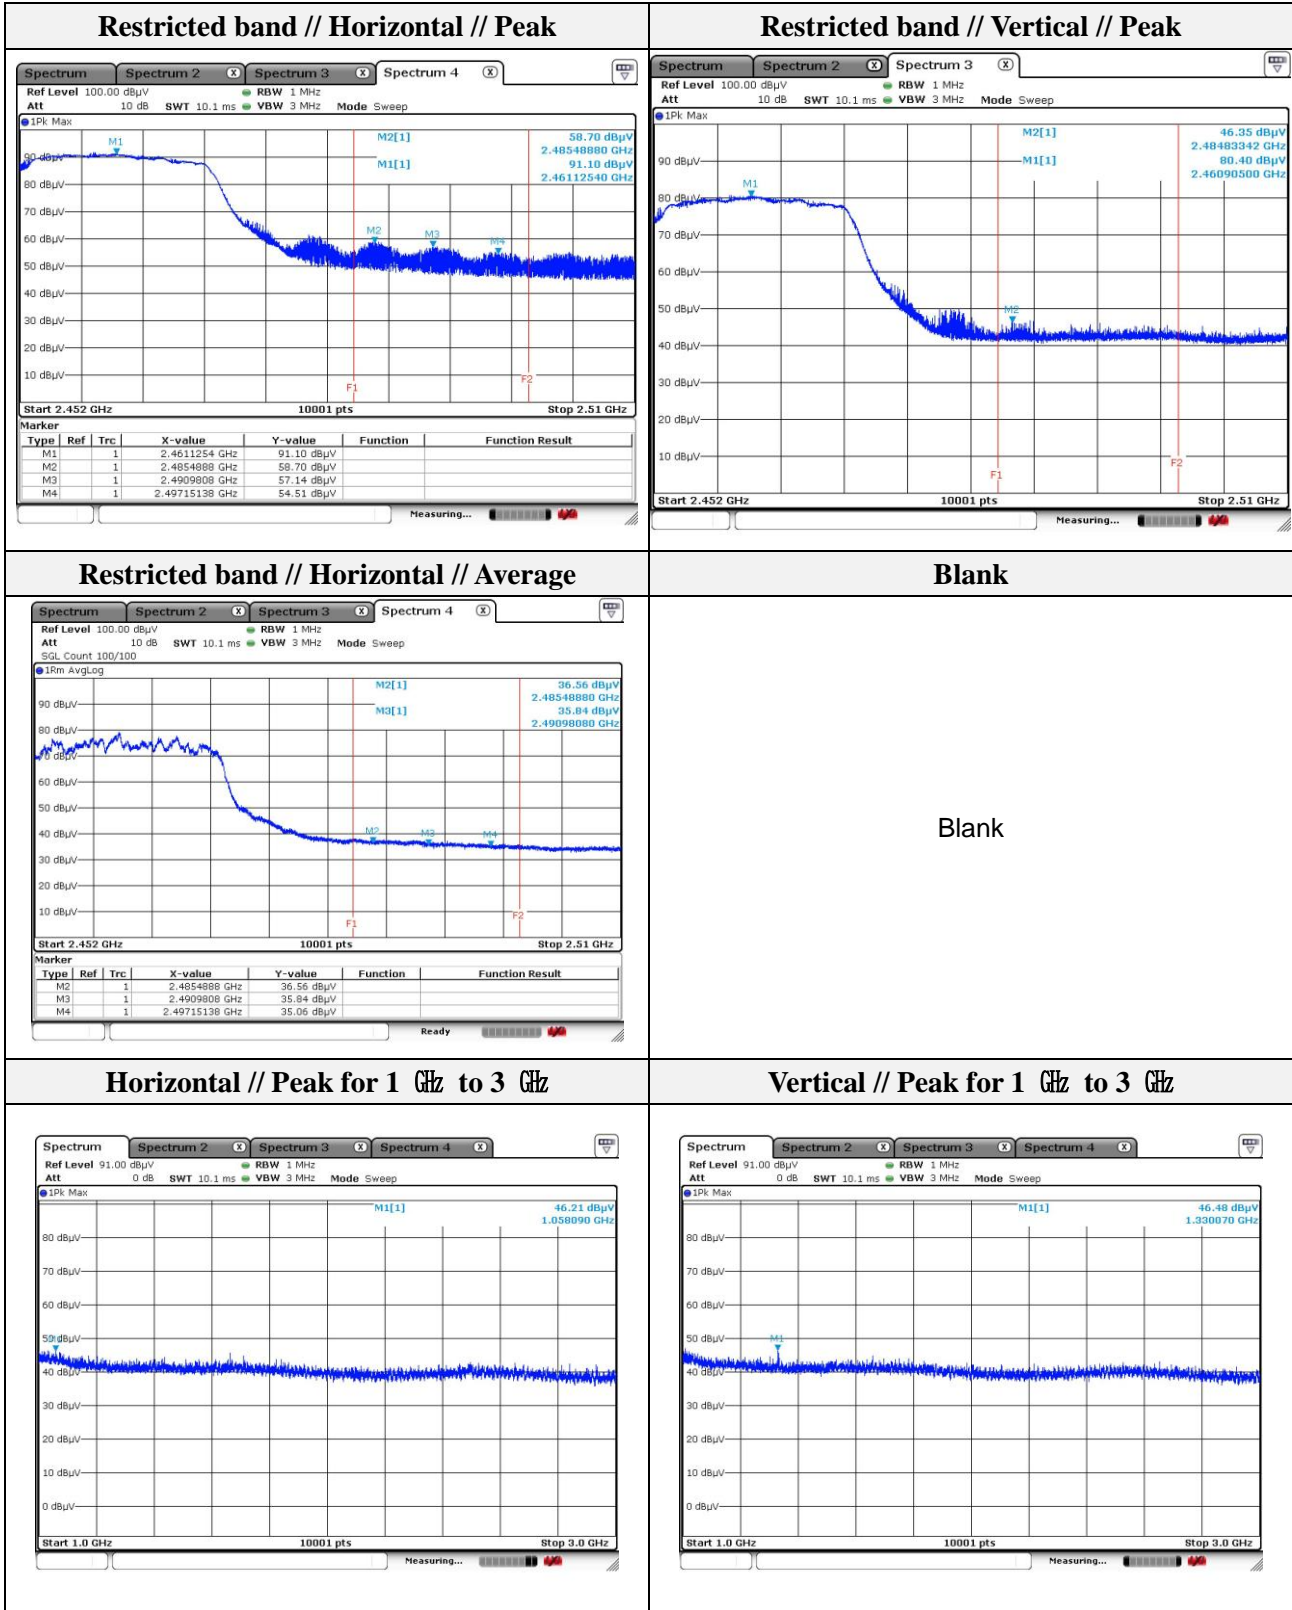

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

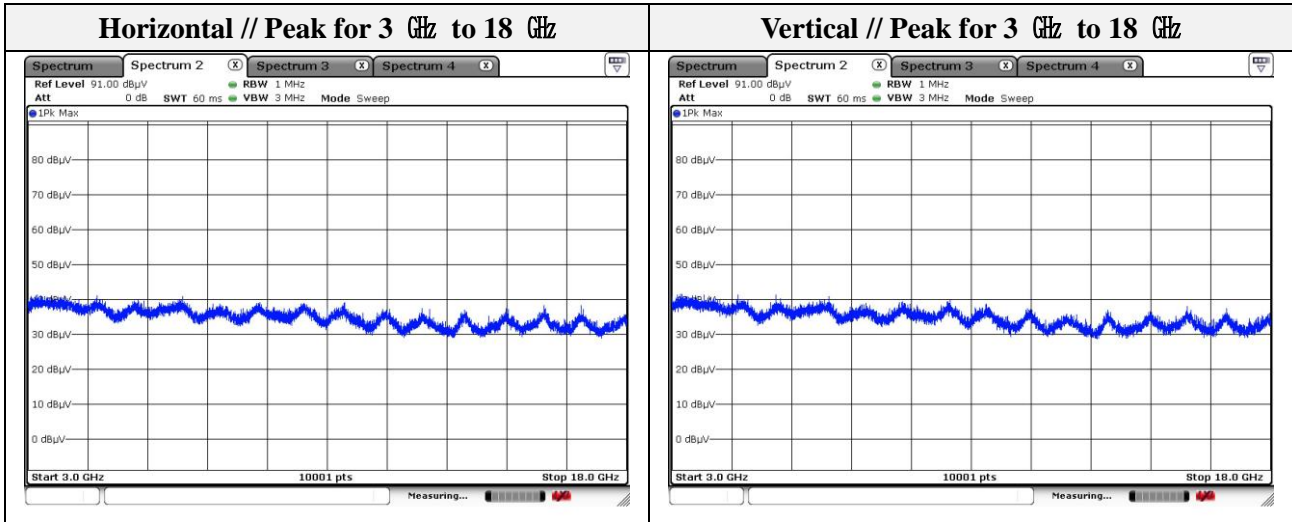

Note.


1. No spurious emission were detected above 3 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Test results (18 GHz to 30 GHz) – Worst case

Mode: 802.11b
Distance of measurement: 3 meter
Channel: 01 (Worst case)

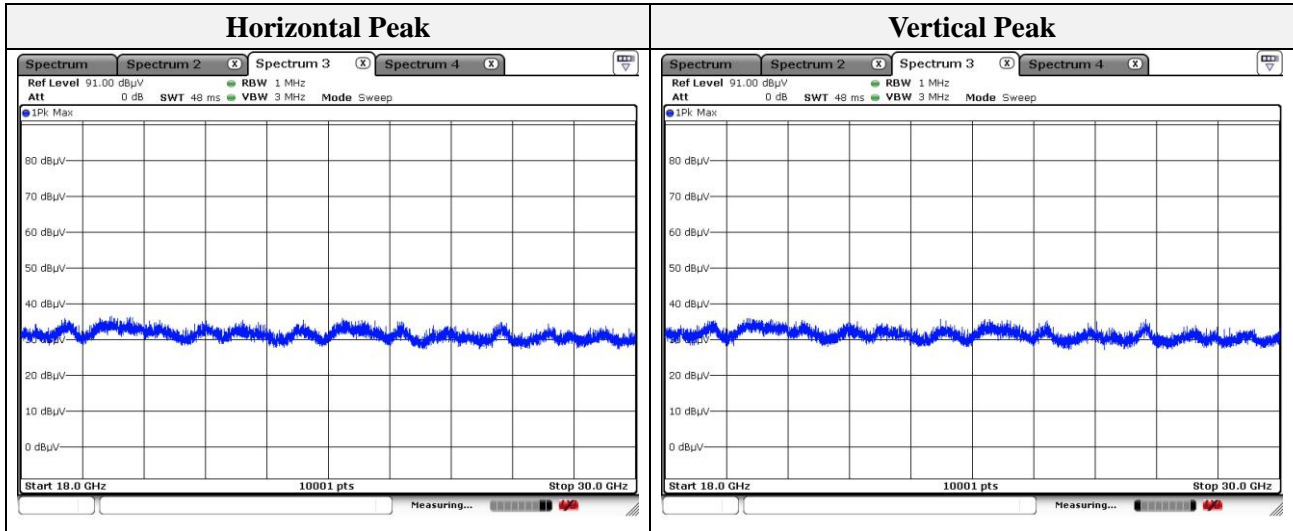


Note.
No spurious emission were detected above 18 GHz.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr

3.3. AC conducted emissions

Test setup

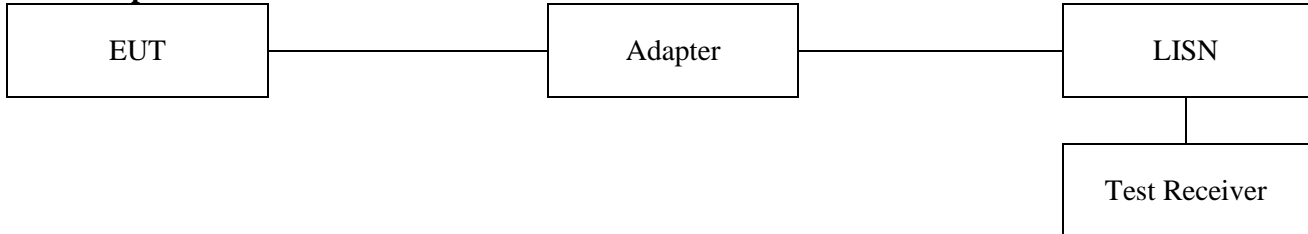

Limit

According to 15.207(a), for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50uH/50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequencies ranges.

According to RSS-Gen Issue 5, 8.8, a radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in Table 3. Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 3 below. The more stringent limit applies at the frequency range boundaries.

The conducted emissions shall be measured in accordance with the reference publication mentioned in Section 3.

Frequency of Emission (MHz)	Conducted limit (dB μ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

Note:

- All AC line conducted spurious emission are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and the appropriate frequencies. All data rates and modes were investigated for conducted spurious emission. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.
- Both Cable loss and LISN factor are included in measurement level(QP Level or AV Level).

Test results

LE 1 Mbps																																																																																																																						
Hot Line																																																																																																																						
	<p>Final Result</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency (MHz)</th> <th>QuasiPeak (dBµV)</th> <th>Average (dBµV)</th> <th>Limit (dBµV)</th> <th>Margin (dB)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Line</th> <th>Corr. (dB)</th> </tr> </thead> <tbody> <tr><td>0.594000</td><td>---</td><td>29.52</td><td>46.00</td><td>16.48</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>0.594000</td><td>46.76</td><td>---</td><td>56.00</td><td>9.24</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>0.598000</td><td>---</td><td>29.23</td><td>46.00</td><td>16.77</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>0.598000</td><td>46.55</td><td>---</td><td>56.00</td><td>9.45</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.2</td></tr> <tr><td>1.566000</td><td>---</td><td>27.06</td><td>46.00</td><td>18.94</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.6</td></tr> <tr><td>1.566000</td><td>43.63</td><td>---</td><td>56.00</td><td>12.37</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.6</td></tr> <tr><td>1.590000</td><td>---</td><td>26.97</td><td>46.00</td><td>19.03</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.6</td></tr> <tr><td>1.590000</td><td>43.47</td><td>---</td><td>56.00</td><td>12.53</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.6</td></tr> <tr><td>5.414000</td><td>---</td><td>28.17</td><td>50.00</td><td>21.83</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.1</td></tr> <tr><td>5.414000</td><td>35.27</td><td>---</td><td>60.00</td><td>24.73</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.1</td></tr> <tr><td>5.418000</td><td>---</td><td>27.30</td><td>50.00</td><td>22.70</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.1</td></tr> <tr><td>5.418000</td><td>34.45</td><td>---</td><td>60.00</td><td>25.55</td><td>1000.0</td><td>9.000</td><td>L1</td><td>20.1</td></tr> </tbody> </table>	Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.594000	---	29.52	46.00	16.48	1000.0	9.000	L1	20.2	0.594000	46.76	---	56.00	9.24	1000.0	9.000	L1	20.2	0.598000	---	29.23	46.00	16.77	1000.0	9.000	L1	20.2	0.598000	46.55	---	56.00	9.45	1000.0	9.000	L1	20.2	1.566000	---	27.06	46.00	18.94	1000.0	9.000	L1	20.6	1.566000	43.63	---	56.00	12.37	1000.0	9.000	L1	20.6	1.590000	---	26.97	46.00	19.03	1000.0	9.000	L1	20.6	1.590000	43.47	---	56.00	12.53	1000.0	9.000	L1	20.6	5.414000	---	28.17	50.00	21.83	1000.0	9.000	L1	20.1	5.414000	35.27	---	60.00	24.73	1000.0	9.000	L1	20.1	5.418000	---	27.30	50.00	22.70	1000.0	9.000	L1	20.1	5.418000	34.45	---	60.00	25.55	1000.0	9.000	L1	20.1
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																														
0.594000	---	29.52	46.00	16.48	1000.0	9.000	L1	20.2																																																																																																														
0.594000	46.76	---	56.00	9.24	1000.0	9.000	L1	20.2																																																																																																														
0.598000	---	29.23	46.00	16.77	1000.0	9.000	L1	20.2																																																																																																														
0.598000	46.55	---	56.00	9.45	1000.0	9.000	L1	20.2																																																																																																														
1.566000	---	27.06	46.00	18.94	1000.0	9.000	L1	20.6																																																																																																														
1.566000	43.63	---	56.00	12.37	1000.0	9.000	L1	20.6																																																																																																														
1.590000	---	26.97	46.00	19.03	1000.0	9.000	L1	20.6																																																																																																														
1.590000	43.47	---	56.00	12.53	1000.0	9.000	L1	20.6																																																																																																														
5.414000	---	28.17	50.00	21.83	1000.0	9.000	L1	20.1																																																																																																														
5.414000	35.27	---	60.00	24.73	1000.0	9.000	L1	20.1																																																																																																														
5.418000	---	27.30	50.00	22.70	1000.0	9.000	L1	20.1																																																																																																														
5.418000	34.45	---	60.00	25.55	1000.0	9.000	L1	20.1																																																																																																														
Neutral Line																																																																																																																						
	<p>Final Result</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency (MHz)</th> <th>QuasiPeak (dBµV)</th> <th>Average (dBµV)</th> <th>Limit (dBµV)</th> <th>Margin (dB)</th> <th>Meas. Time (ms)</th> <th>Bandwidth (kHz)</th> <th>Line</th> <th>Corr. (dB)</th> </tr> </thead> <tbody> <tr><td>0.570000</td><td>---</td><td>32.64</td><td>46.00</td><td>13.36</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>0.570000</td><td>46.06</td><td>---</td><td>56.00</td><td>9.94</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>0.578000</td><td>---</td><td>32.68</td><td>46.00</td><td>13.32</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>0.578000</td><td>46.08</td><td>---</td><td>56.00</td><td>9.92</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>3.082000</td><td>---</td><td>26.60</td><td>46.00</td><td>19.40</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.5</td></tr> <tr><td>3.082000</td><td>43.95</td><td>---</td><td>56.00</td><td>12.05</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.5</td></tr> <tr><td>3.418000</td><td>---</td><td>26.08</td><td>46.00</td><td>19.92</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.4</td></tr> <tr><td>3.418000</td><td>44.62</td><td>---</td><td>56.00</td><td>11.38</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.4</td></tr> <tr><td>5.166000</td><td>---</td><td>22.40</td><td>50.00</td><td>27.60</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>5.166000</td><td>36.32</td><td>---</td><td>60.00</td><td>23.68</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.1</td></tr> <tr><td>6.002000</td><td>---</td><td>25.56</td><td>50.00</td><td>24.44</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.0</td></tr> <tr><td>6.002000</td><td>35.59</td><td>---</td><td>60.00</td><td>24.41</td><td>1000.0</td><td>9.000</td><td>N</td><td>20.0</td></tr> </tbody> </table>	Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	0.570000	---	32.64	46.00	13.36	1000.0	9.000	N	20.1	0.570000	46.06	---	56.00	9.94	1000.0	9.000	N	20.1	0.578000	---	32.68	46.00	13.32	1000.0	9.000	N	20.1	0.578000	46.08	---	56.00	9.92	1000.0	9.000	N	20.1	3.082000	---	26.60	46.00	19.40	1000.0	9.000	N	20.5	3.082000	43.95	---	56.00	12.05	1000.0	9.000	N	20.5	3.418000	---	26.08	46.00	19.92	1000.0	9.000	N	20.4	3.418000	44.62	---	56.00	11.38	1000.0	9.000	N	20.4	5.166000	---	22.40	50.00	27.60	1000.0	9.000	N	20.1	5.166000	36.32	---	60.00	23.68	1000.0	9.000	N	20.1	6.002000	---	25.56	50.00	24.44	1000.0	9.000	N	20.0	6.002000	35.59	---	60.00	24.41	1000.0	9.000	N	20.0
Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)																																																																																																														
0.570000	---	32.64	46.00	13.36	1000.0	9.000	N	20.1																																																																																																														
0.570000	46.06	---	56.00	9.94	1000.0	9.000	N	20.1																																																																																																														
0.578000	---	32.68	46.00	13.32	1000.0	9.000	N	20.1																																																																																																														
0.578000	46.08	---	56.00	9.92	1000.0	9.000	N	20.1																																																																																																														
3.082000	---	26.60	46.00	19.40	1000.0	9.000	N	20.5																																																																																																														
3.082000	43.95	---	56.00	12.05	1000.0	9.000	N	20.5																																																																																																														
3.418000	---	26.08	46.00	19.92	1000.0	9.000	N	20.4																																																																																																														
3.418000	44.62	---	56.00	11.38	1000.0	9.000	N	20.4																																																																																																														
5.166000	---	22.40	50.00	27.60	1000.0	9.000	N	20.1																																																																																																														
5.166000	36.32	---	60.00	23.68	1000.0	9.000	N	20.1																																																																																																														
6.002000	---	25.56	50.00	24.44	1000.0	9.000	N	20.0																																																																																																														
6.002000	35.59	---	60.00	24.41	1000.0	9.000	N	20.0																																																																																																														

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




KES Co., Ltd.

3701, 40, Simin-daero 365beon-gil,
 Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
 Tel: +82-31-425-6200 / Fax: +82-31-424-0450
 www.kes.co.kr

Report No.:
 KES-RF1-21T0214
 Page (50) of (52)

802.11b (Worst case)


Hot Line

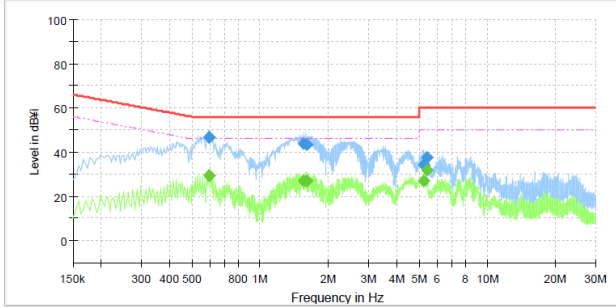

Final Result

Frequency (MHz)	QuasiPeak (dBm V)	Average (dBm V)	Limit (dBm V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.594000	---	29.47	46.00	16.53	1000.0	9.000	L1	20.2
0.594000	46.71	---	56.00	9.29	1000.0	9.000	L1	20.2
0.598000	---	29.22	46.00	16.78	1000.0	9.000	L1	20.2
0.598000	46.65	---	56.00	9.45	1000.0	9.000	L1	20.2
1.542000	---	27.05	46.00	18.95	1000.0	9.000	L1	20.6
1.542000	43.69	---	56.00	12.41	1000.0	9.000	L1	20.6
1.602000	---	26.93	46.00	19.07	1000.0	9.000	L1	20.6
1.602000	43.38	---	56.00	12.62	1000.0	9.000	L1	20.6
5.238000	---	27.15	50.00	22.85	1000.0	9.000	L1	20.1
5.238000	34.26	---	60.00	25.74	1000.0	9.000	L1	20.1
5.434000	---	31.82	50.00	18.18	1000.0	9.000	L1	20.1
5.434000	37.39	---	60.00	22.61	1000.0	9.000	L1	20.1

Neutral Line

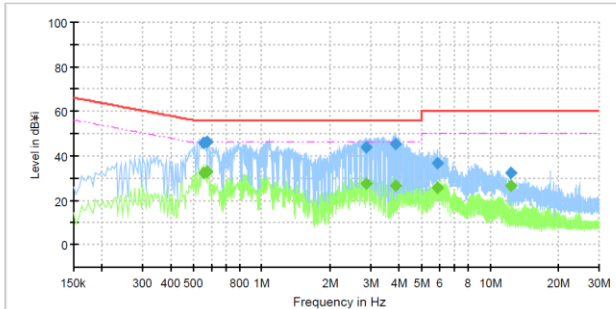

Final Result

Frequency (MHz)	QuasiPeak (dBm V)	Average (dBm V)	Limit (dBm V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.558000	---	32.12	46.00	13.88	1000.0	9.000	N	20.1
0.558000	45.60	---	56.00	10.40	1000.0	9.000	N	20.1
0.574000	---	32.66	46.00	13.34	1000.0	9.000	N	20.1
0.574000	46.04	---	56.00	9.96	1000.0	9.000	N	20.1
2.870000	---	27.33	46.00	18.67	1000.0	9.000	N	20.6
2.870000	43.86	---	56.00	12.14	1000.0	9.000	N	20.6
3.838000	---	26.54	46.00	19.46	1000.0	9.000	N	20.3
3.838000	45.38	---	56.00	10.62	1000.0	9.000	N	20.3
5.850000	---	25.74	50.00	24.26	1000.0	9.000	N	20.0
5.850000	36.78	---	60.00	23.22	1000.0	9.000	N	20.0
12.290000	---	26.41	50.00	23.59	1000.0	9.000	N	20.6
12.290000	32.32	---	60.00	27.68	1000.0	9.000	N	20.6

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

**KES Co., Ltd.**

3701, 40, Simin-daero 365beon-gil,
Dongan-gu, Anyang-si, Gyeonggi-do, 14057, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450
www.kes.co.kr

Report No.:
KES-RF1-21T0214
Page (51) of (52)

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101725	1 year	2022.06.18
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2022.01.15
SIGNAL GENERATOR	Anritsu	68369B	002118	1 year	2022.05.17
Power Meter	Anritsu	ML2495A	2010001	1 year	2022.04.29
Pulse Power Sensor	Anritsu	MA2411B	1911111	1 year	2022.04.29
Attenuator	Mini-Circuits	BW-S10-2W263+	1	1 year	2022.01.18
Attenuator	6806.17.A	HEBER+SUHNER	-	1 year	2022.11.02
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2023.01.18
BILOG ANTENNA	Schwarzbeck	VULB 9168	9168-461	2 years	2022.12.22
Horn Antenna	A.H	SAS-571	414	1 year	2022.01.22
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA 9170550	1 year	2022.01.18
Amplifier	SONOMA INSTRUMENT	310N	401123	1 year	2022.06.07
PREAMPLIFIER	8449B	HP	3008A00538	1 year	2022.06.21
EMI Test Receiver	R&S	ESU26	100552	1 year	2022.04.01
DC Power supply	Agilent	6632B	MY43004090	1 year	2022.06.21
BROADBAND AMPLIFIER	SCHWARZBECK	BBV9721	PS9721-003	1 year	2022.01.19
LISN	R&S	ENV216	101787	1 year	2021.12.29
EMI TEST RECEIVER	R&S	ESR3	101783	1 year	2022.01.15
PULSE LIMITER	R&S	ESH3-Z2	101915	1 year	2021.12.29

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
NoteBook	LG Electronics.	LG15N54	411NZJV044052
NoteBook DC Power Unit	LITE-ON TECHNOLOGY (CHANGZHOU)CO., LTD	PA-1900-14	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr