



Test results (Above 1 000 MHz)


Mode: 12 V_802.11b (1 Mbps)
 Channel: 01
 Distance of measurement: 3 meter

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 000.90	44.64	Peak	V	-11.16	-	33.48	74.00	40.52
1 084.49	44.83	Peak	H	-10.71	-	34.12	74.00	39.88
1 088.49	44.10	Peak	V	-10.69	-	33.41	74.00	40.59
1 098.29	44.49	Peak	H	-10.64	-	33.85	74.00	40.15
4 824.60	48.42	Peak	H	5.01	-	53.43	74.00	20.57
4 824.60	46.21	Peak	V	5.01	-	51.22	74.00	22.78

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 383.48	52.08	Peak	H	-2.79	-	49.29	74.00	24.71
2 384.26	48.56	Peak	V	-2.79	-	45.77	74.00	28.23
2 386.97	51.59	Peak	H	-2.78	-	48.81	74.00	25.19
2 388.13	49.08	Peak	V	-2.77	-	46.31	74.00	27.69

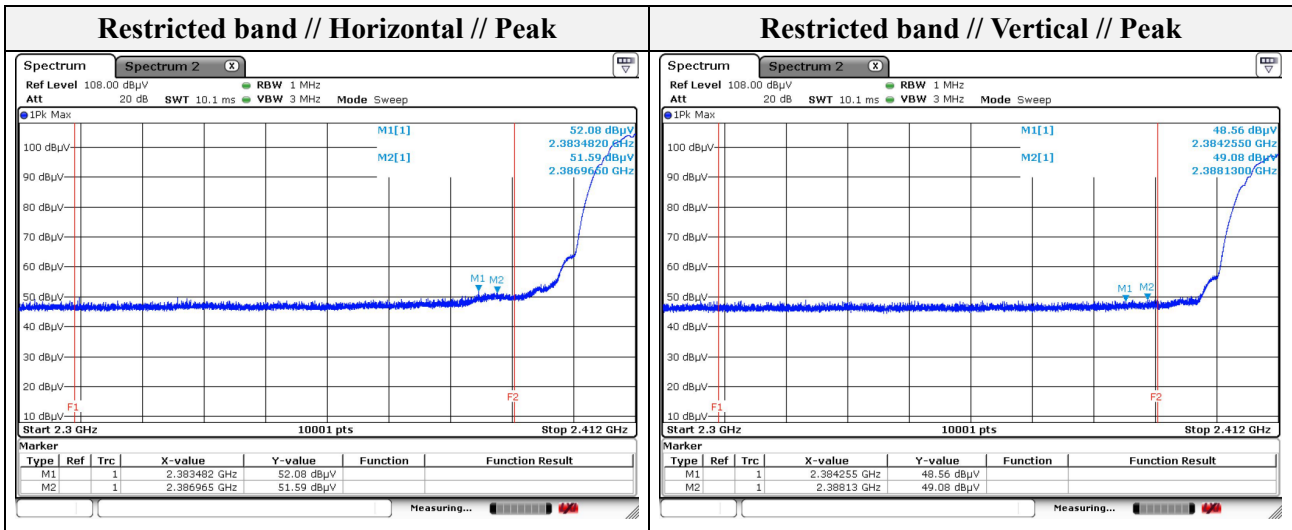

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

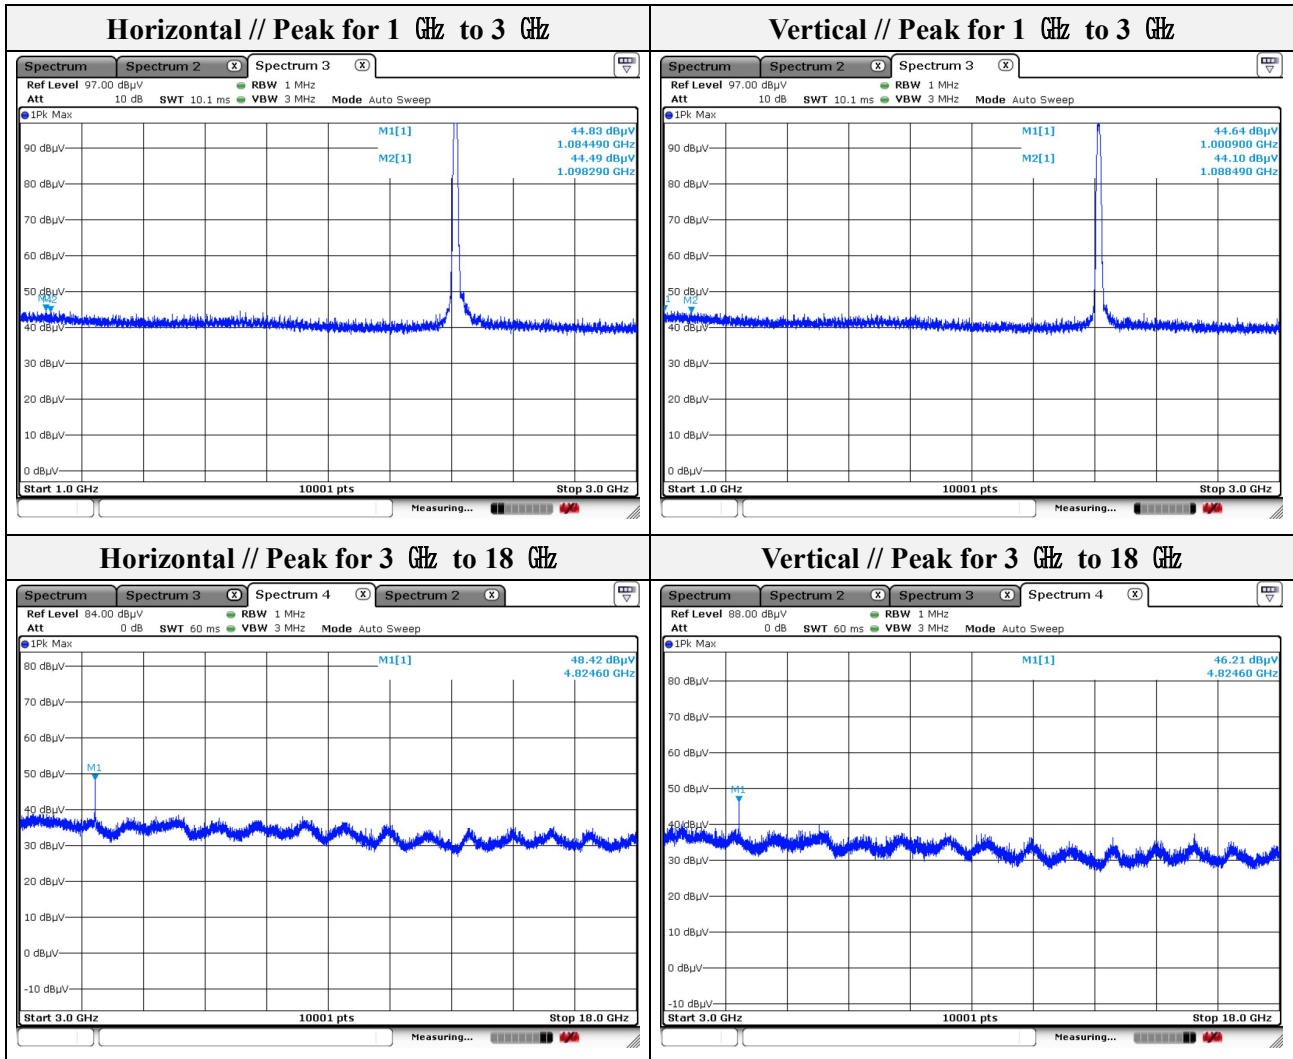

Note.


1. Average test would be performed if the peak result were greater than the average limit.



Mode: 12 V_802.11b (1 Mbps)
Channel 06
Distance of measurement: 3 meter

- **Spurious**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 005.70	44.97	Peak	V	-11.13		33.84	74.00	40.16
1 009.70	44.11	Peak	H	-11.11		33.00	74.00	41.00
1 049.30	44.82	Peak	V	-10.90		33.92	74.00	40.08
1 154.28	44.15	Peak	H	-10.34		33.81	74.00	40.19
4 874.10	41.40	Peak	H	5.37		46.77	74.00	27.23
4 874.10	40.06	Peak	V	5.37		45.43	74.00	28.57

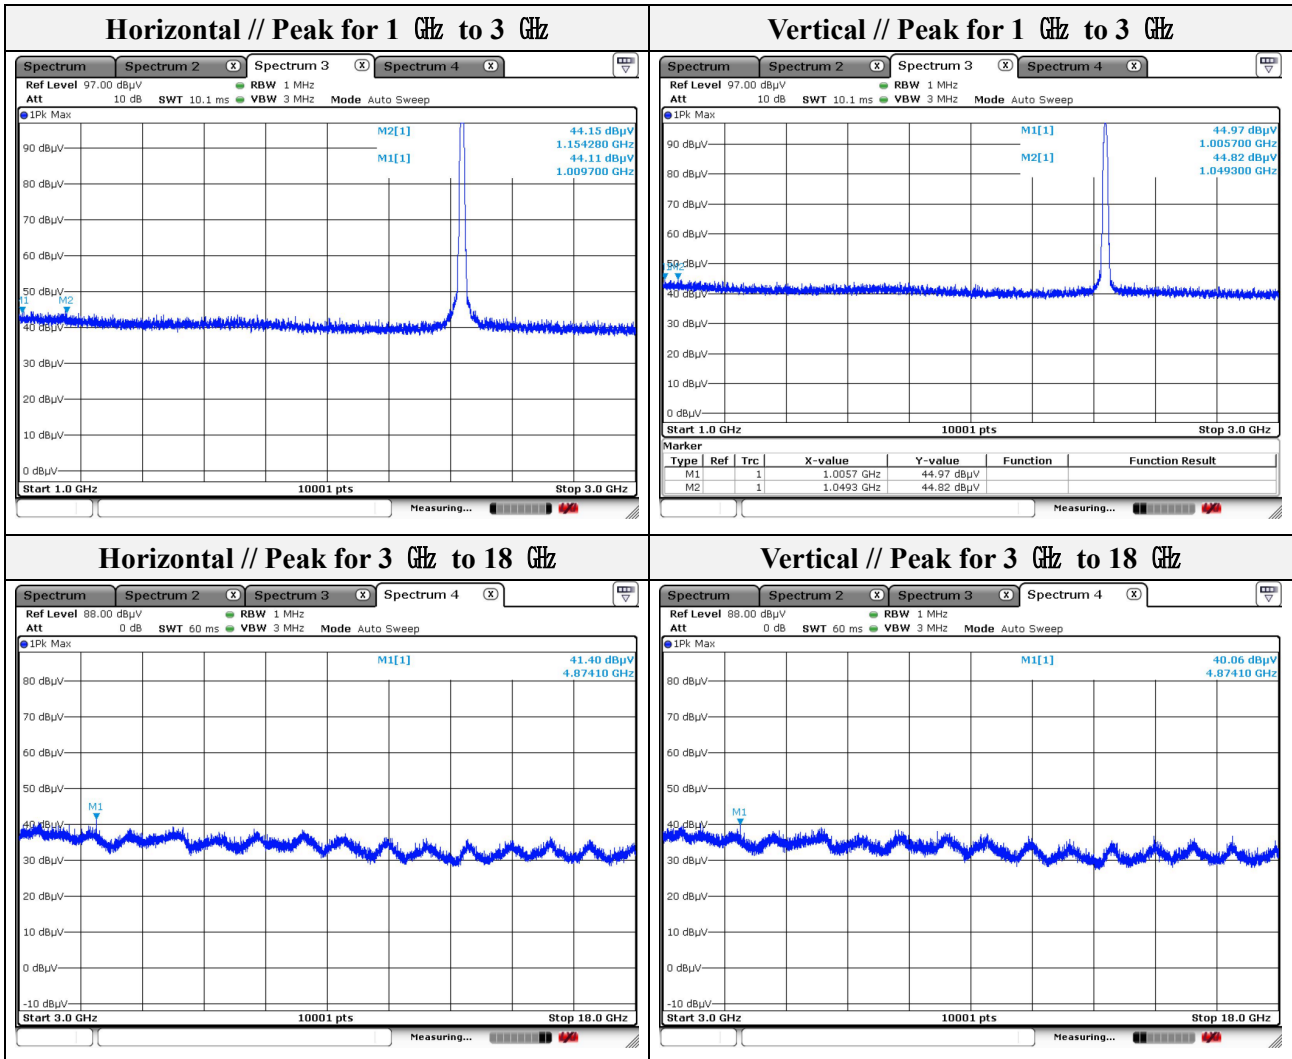

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr




Mode: 12 V_802.11b (1 Mbps)
Channel 11
Distance of measurement: 3 meter

- **Spurious**


Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 028.90	44.58	Peak	H	-11.01	-	33.57	74.00	40.43
1 039.50	44.99	Peak	V	-10.95	-	34.04	74.00	39.96
1 221.48	44.59	Peak	V	-9.98	-	34.61	74.00	39.39
2 251.97	43.79	Peak	H	-3.36	-	40.43	74.00	33.57
4 923.60	48.78	Peak	H	5.73	-	54.51	74.00	19.49
4 923.60	44.68	Average	H	5.73	-	51.08	54.00	2.92
4 923.60	49.50	Peak	H	5.73	-	55.23	74.00	18.77
4 923.60	45.44	Average	V	5.73	-	51.17	54.00	2.83

- **Band edge**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
2 487.14	48.64	Peak	V	-2.38	-	46.93	74.00	27.07
2 494.86	50.21	Peak	H	-2.35	-	47.86	74.00	26.14
2 495.74	49.11	Peak	V	-2.35	-	46.76	74.00	27.24
2 498.79	49.58	Peak	H	-2.34	-	47.24	74.00	26.76

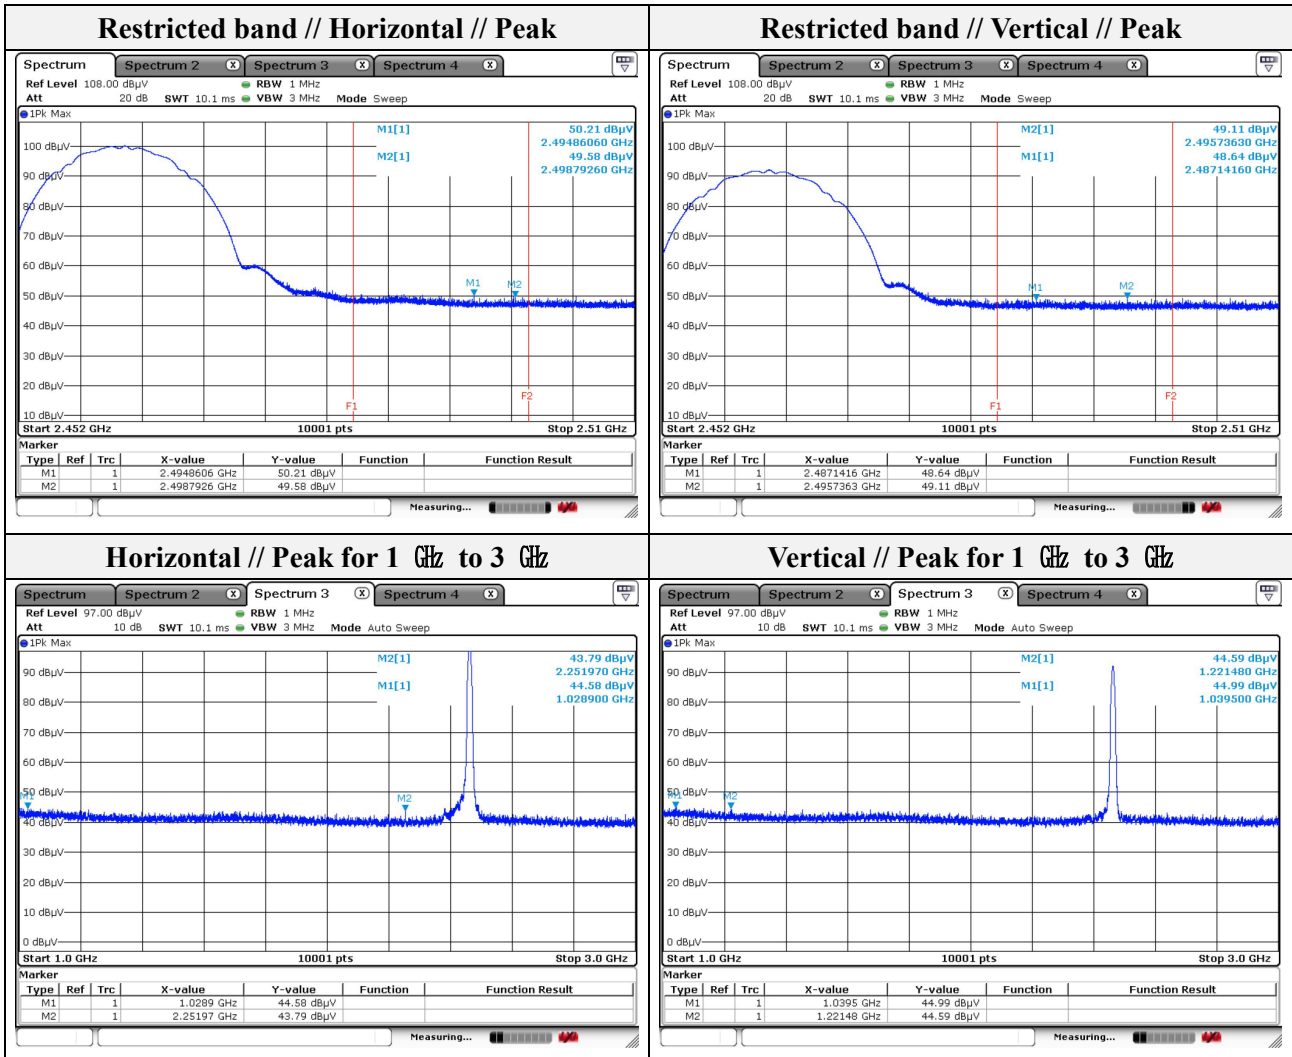

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

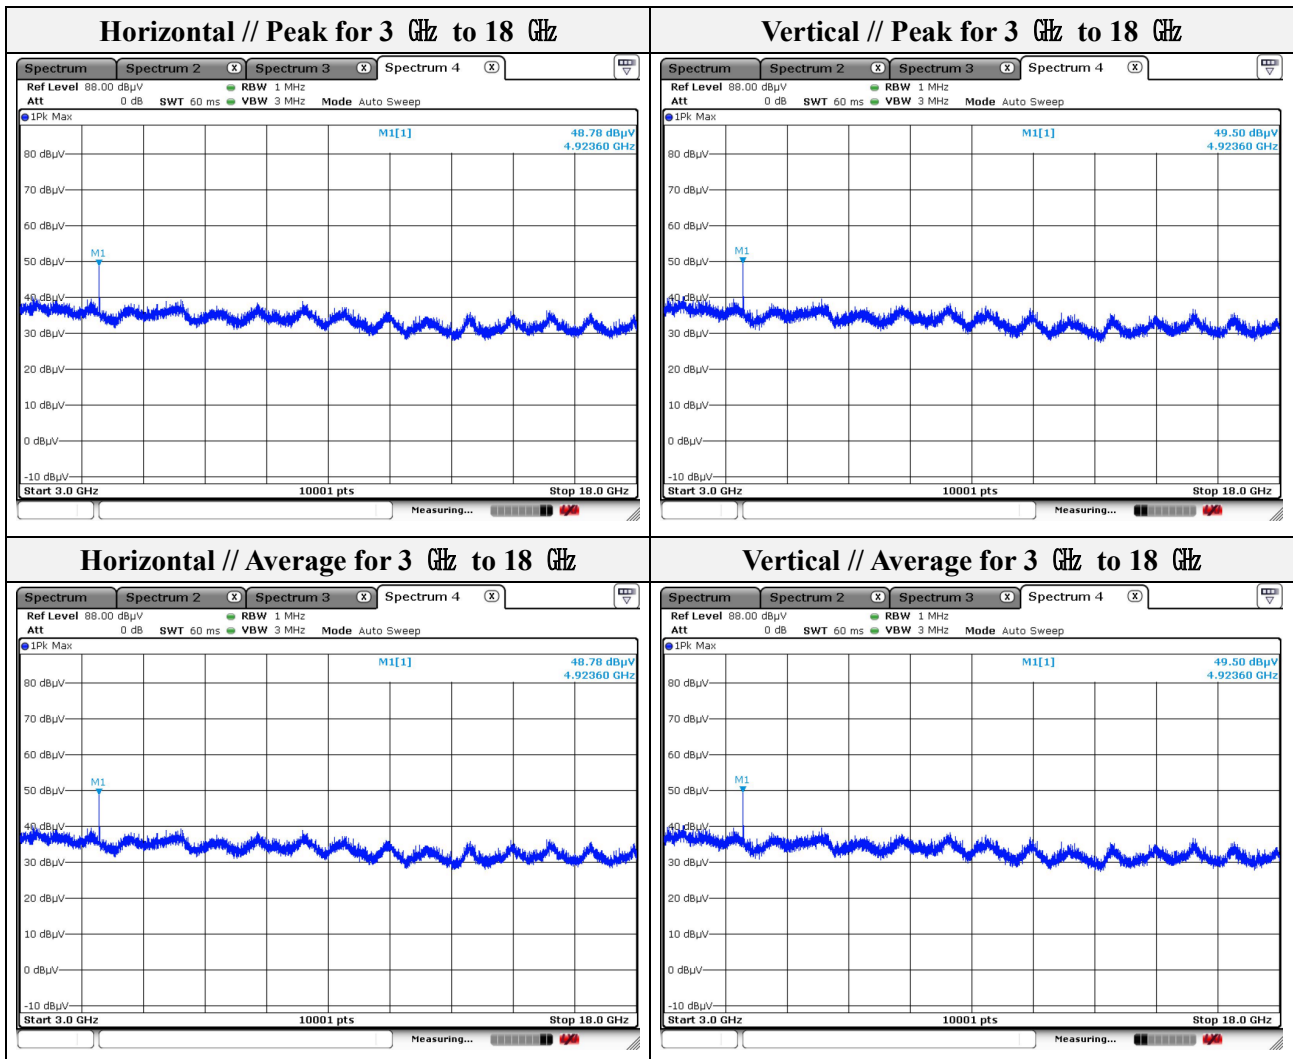

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr




Mode: 24 V_802.11b (1 Mbps)
 Channel 01
 Distance of measurement: 3 meter

- Spurious


Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1 013.90	45.03	Peak	V	-11.09	-	33.94	74.00	40.06
1 015.50	44.39	Peak	H	-11.08	-	33.31	74.00	40.69
1 026.50	44.73	Peak	H	-11.02	-	33.71	74.00	40.29
1 673.23	43.98	Peak	V	-7.08	-	36.90	74.00	37.10
4 824.60	48.01	Peak	H	5.01	-	53.02	74.00	20.98
4 824.60	46.41	Peak	V	5.01	-	51.42	74.00	22.58

- Band edge

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2 383.76	51.06	Peak	H	-2.79	-	48.27	74.00	25.73
2 379.15	49.38	Peak	V	-2.81	-	46.57	74.00	27.43
2 386.27	51.14	Peak	H	-2.78	-	48.36	74.00	25.64
2 385.91	49.55	Peak	V	-2.78	-	46.77	74.00	27.23

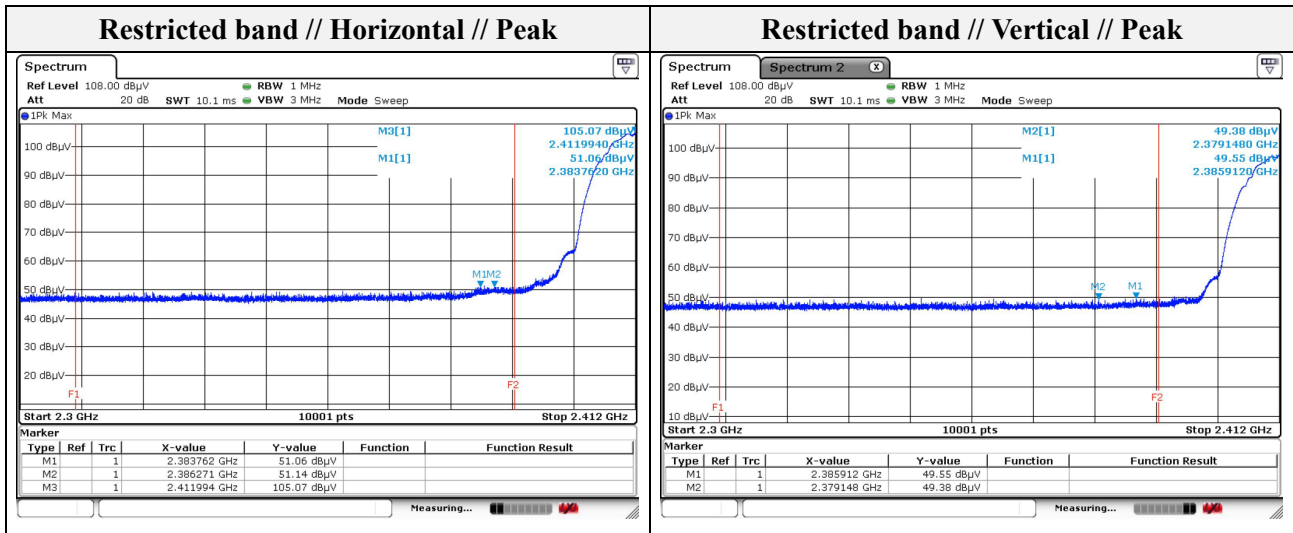

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
 The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
 The authenticity of the test report, contact shchoi@kes.co.kr

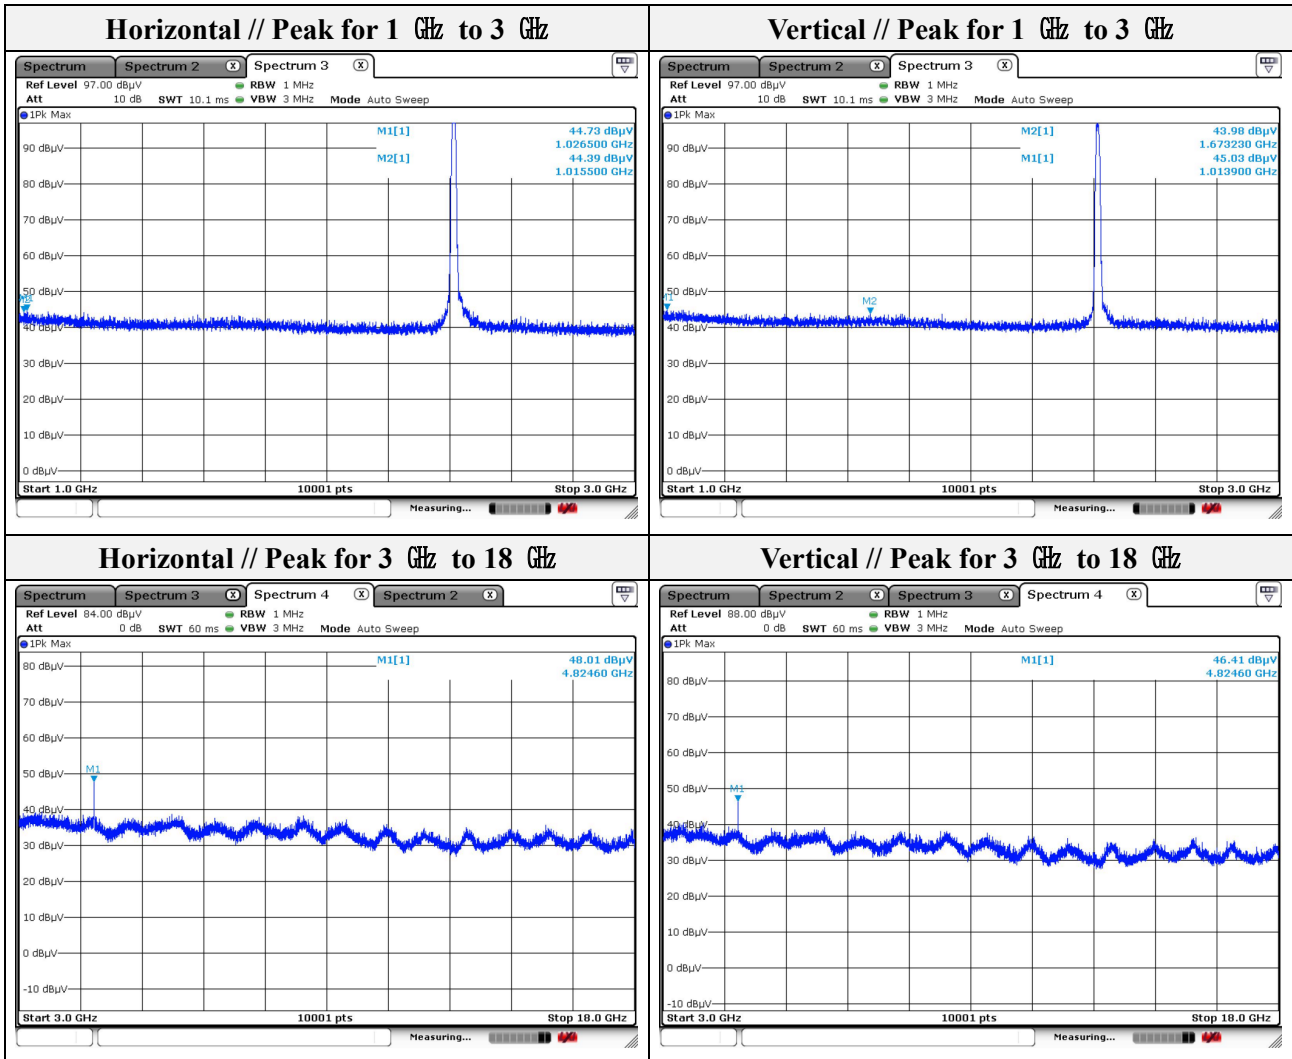

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.
The authenticity of the test report, contact shchoi@kes.co.kr



Mode: 24 V_802.11b (1 Mbps)
Channel 06
Distance of measurement: 3 meter

- **Spurious**

Frequency (MHz)	Level (dB μ V)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1 013.90	44.80	Peak	H	-11.09	-	33.71	74.00	40.29
1 153.68	44.18	Peak	V	-10.34	-	33.84	74.00	40.16
1 184.88	44.69	Peak	H	-10.18	-	34.51	74.00	39.49
1 634.24	45.46	Peak	V	-7.38	-	38.08	74.00	35.92
4 874.10	40.15	Peak	H	5.37	-	45.52	74.00	28.48
4 874.10	40.70	Peak	V	5.37	-	46.07	74.00	27.93