



13 Power Spectral density

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General UNII Test Procedures New Rules v01, Section F
Test Limit:	≤17.00dBm/MHz for Operation in the band I(5150MHz-5250MHz)of device ≤30.00dBm/500KHz for Operation in the band IV(5725MHz- 5850MHz)of device
Test Result:	PASS

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer:
Band I
RBW = 1MHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
Band IV
RBW = 510KHz, VBW ≥ 3 * RBW Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.



13.2 Test Result:

Band	Operation mode	CH	Power Spectral Density (dBm/MHz)		
			ANT0	ANT1	Total
Band I	802.11a	Low	11.169	10.841	/
		Middle	11.449	10.856	/
		High	11.995	10.818	/
	802.11n(HT20)	Low	10.657	11.105	13.90
		Middle	11.351	11.213	14.29
		High	12.265	10.986	14.68
	802.11n(HT40)	Low	5.237	6.029	8.66
		Middle	/	/	/
		High	5.762	6.555	9.19
	802.11ac(HT20)	Low	10.305	10.946	13.65
		Middle	11.346	11.334	14.35
		High	10.934	11.786	14.39
	802.11ac(HT40)	Low	5.443	6.166	8.83
		Middle	/	/	/
		High	5.998	5.582	8.81
	802.11ac(HT80)	Low	4.402	2.212	6.45
		Middle	/	/	/
		High	/	/	/
Limit		≤17.00dBm/MHz			




Band	Operation mode	CH	Power Spectral Density (dBm/500KHz)		
			ANT0	ANT1	Total
Band IV	802.11a	Low	8.063	8.119	11.10
		Middle	7.839	7.736	10.80
		High	8.305	8.503	11.42
	802.11n(HT20)	Low	8.632	8.731	11.69
		Middle	7.890	7.680	10.80
		High	8.460	7.951	11.22
	802.11n(HT40)	Low	4.193	4.274	7.24
		Middle	/	/	/
		High	3.298	3.461	6.39
	802.11ac(HT20)	Low	8.603	7.602	11.14
		Middle	7.696	8.219	10.98
		High	8.121	7.672	10.91
	802.11ac(HT40)	Low	4.239	4.408	7.33
		Middle	/	/	/
		High	3.655	3.922	6.80
	802.11ac(HT80)	Low	1.642	1.425	4.55
		Middle	/	/	/
		High	/	/	/
Limit		≤30.00dBm/500KHz			

Test result plots shown as follows:




ANT0

802.11a band I Low channel

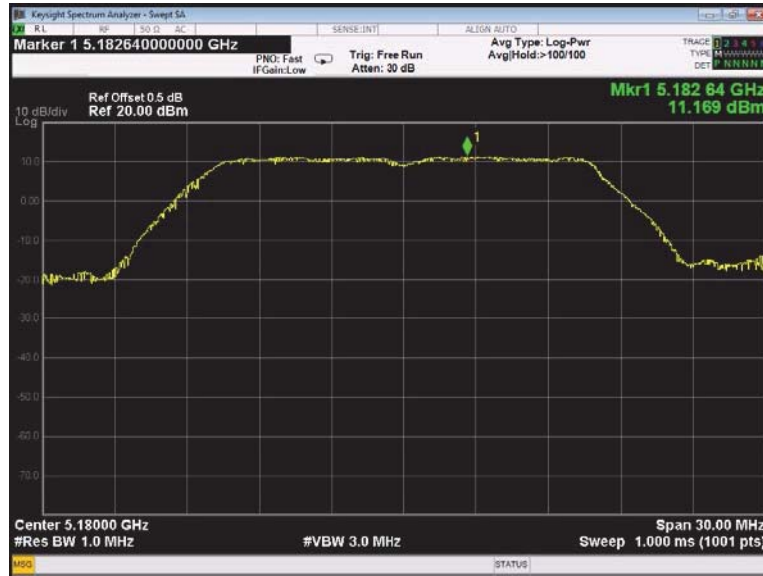

802.11a band I Middle channel

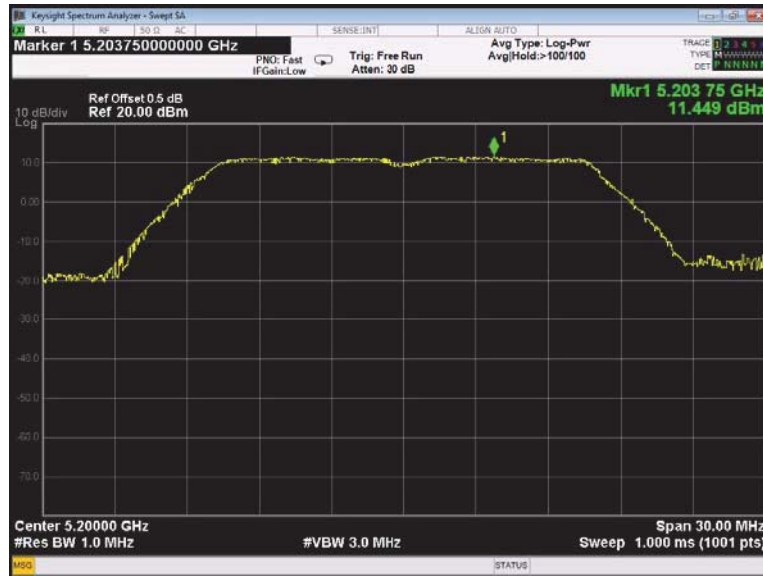




802.11a band I High channel




802.11n(HT20) band I Low channel

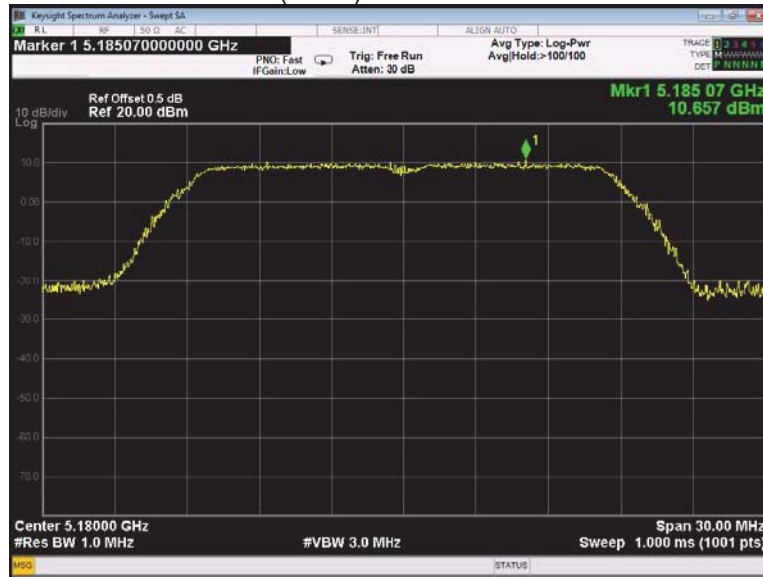




802.11n(HT20) band I Middle channel

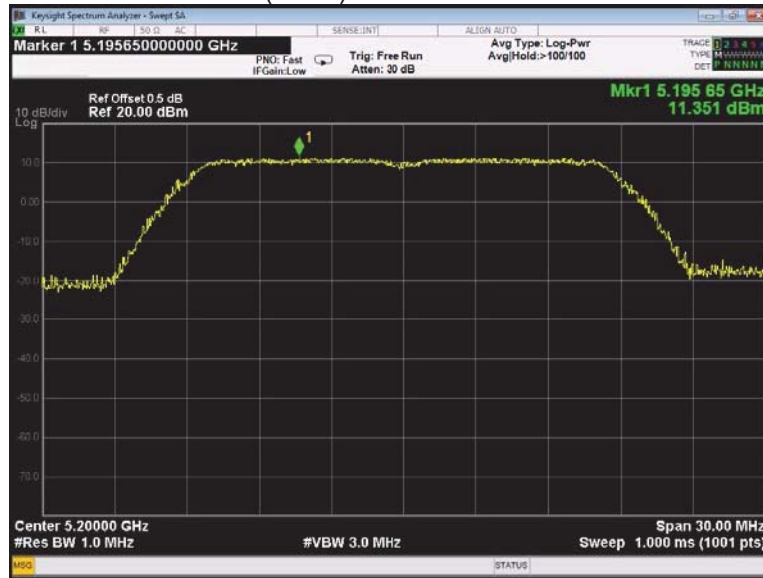


802.11n(HT20) band I High channel

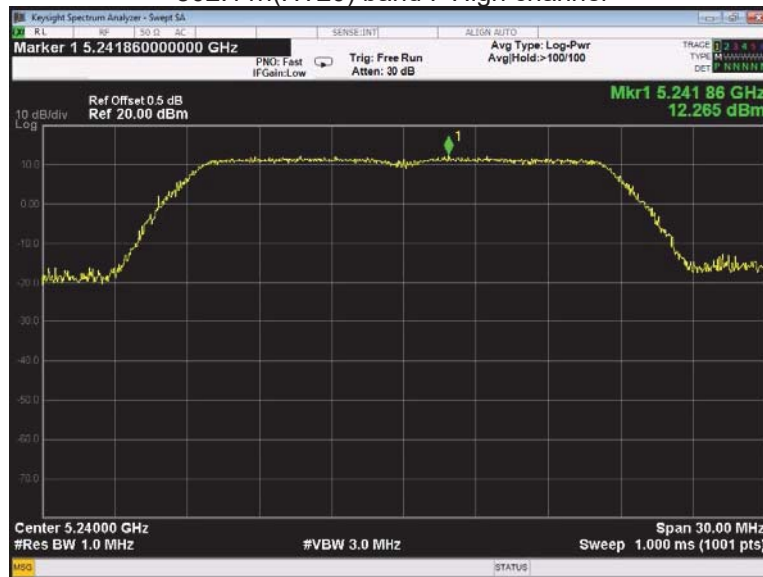




802.11n(HT40) band I Low channel

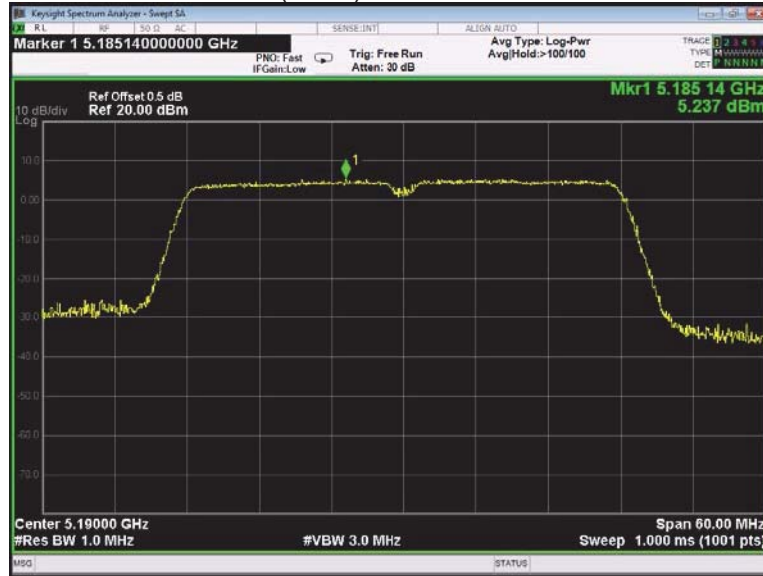


802.11n(HT40) band I High channel

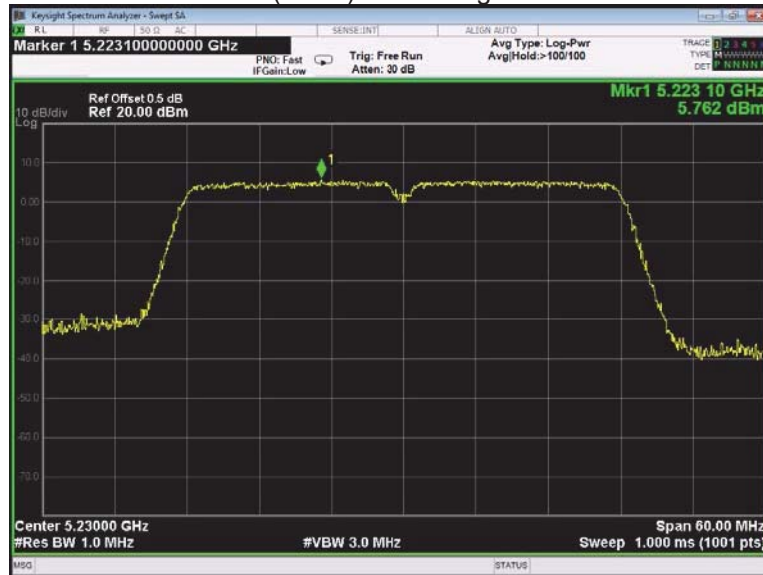




802.11ac(HT20) band I Low channel

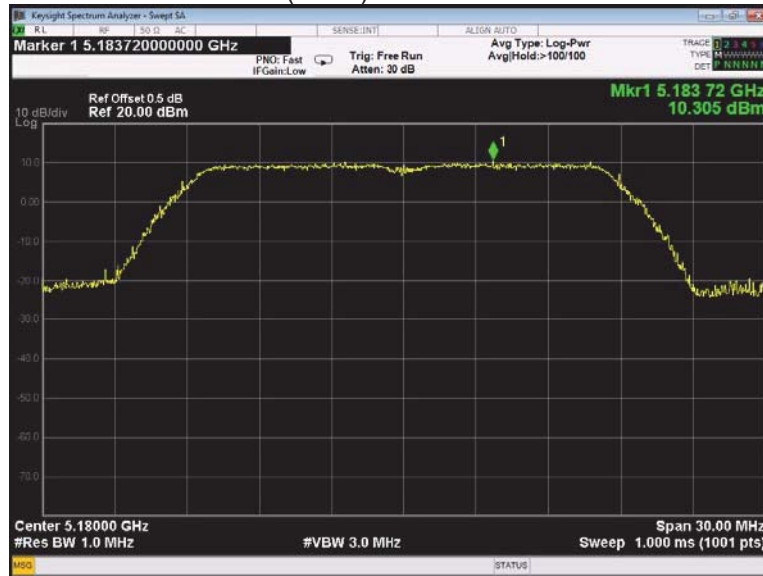


802.11ac(HT20) band I Middle channel

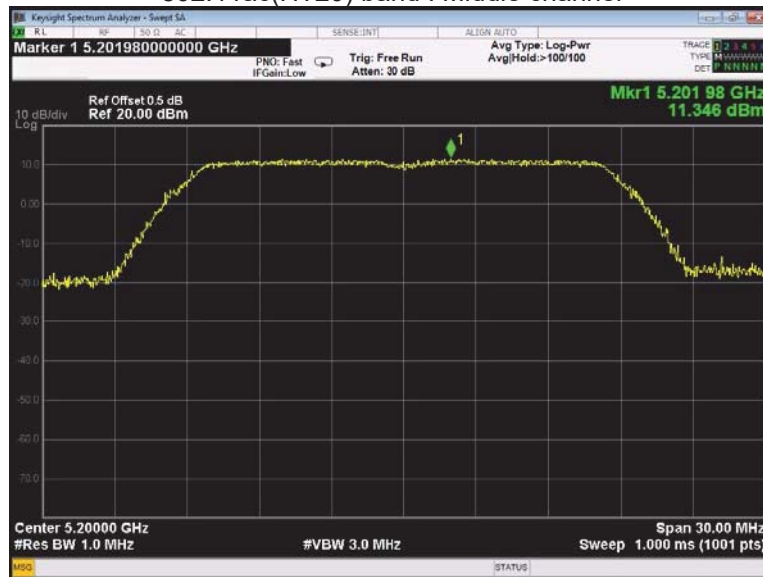




802.11ac(HT20) band I High channel

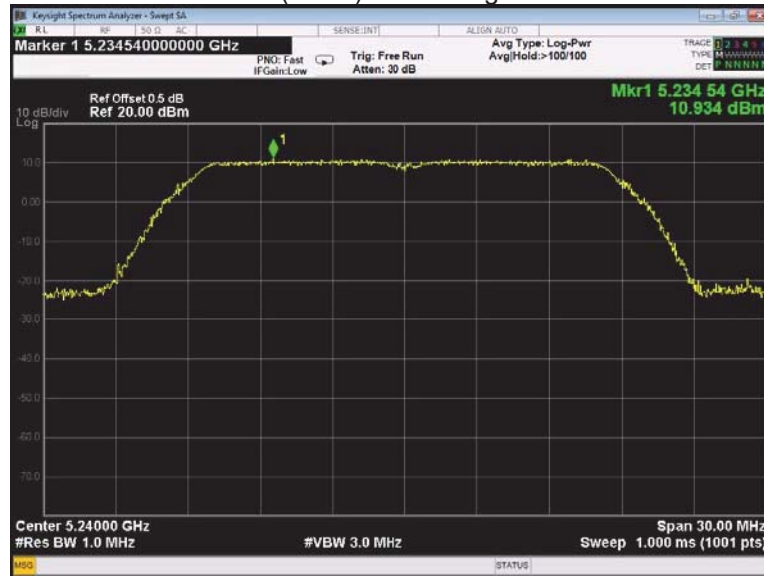


802.11ac(HT40) band I Low channel

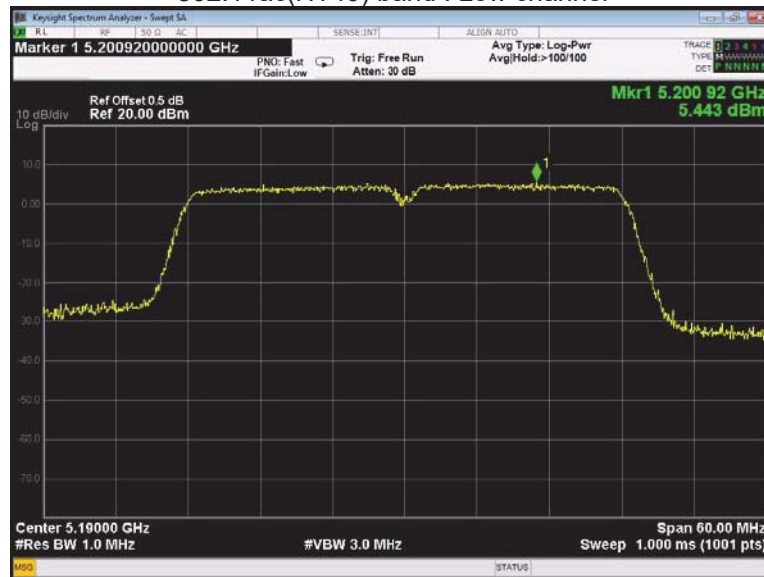




802.11n(HT40) band I High channel

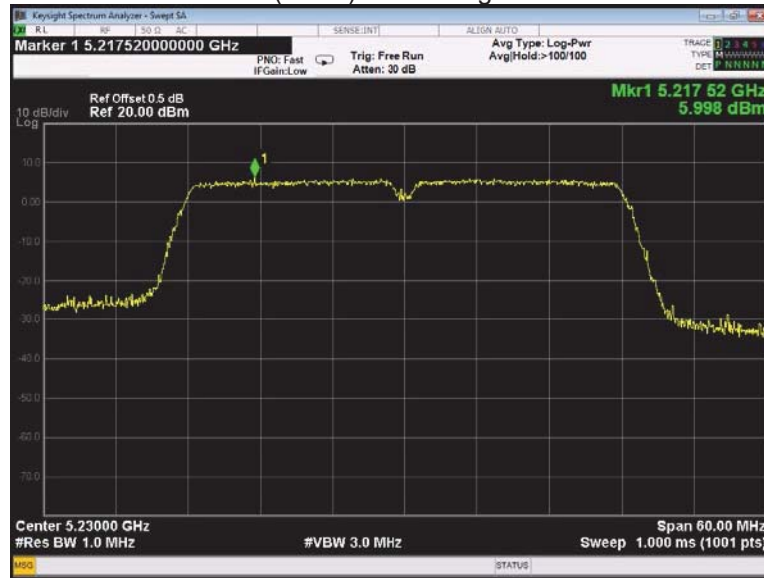

802.11ac(HT80) band I Low channel

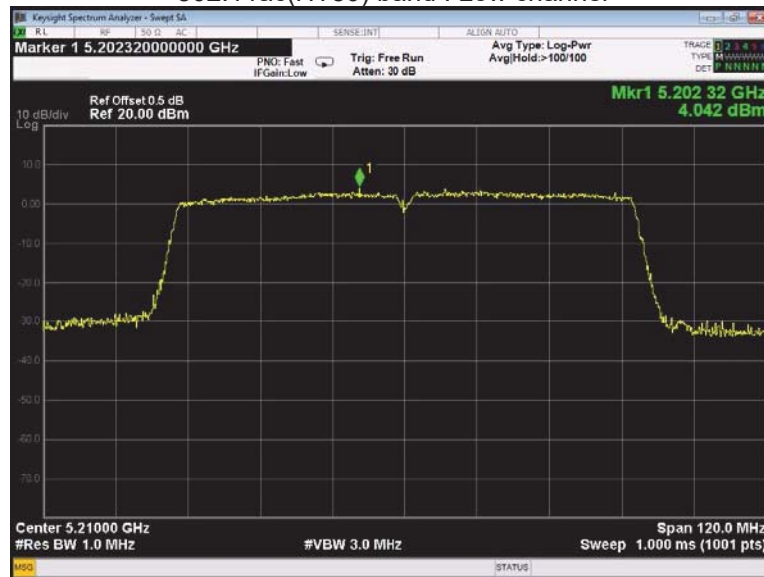



802.11a band IV Low channel




802.11a band IV Middle channel






802.11a band IV High channel

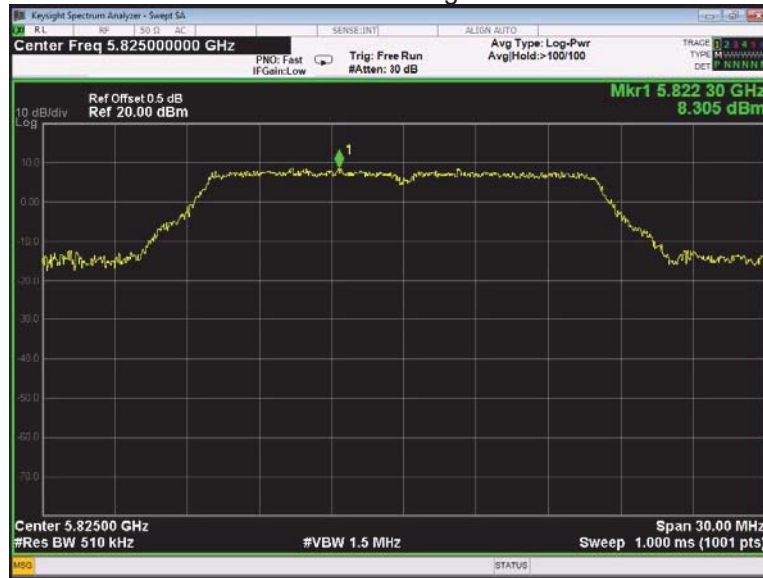


802.11n(HT20) band IV Low channel

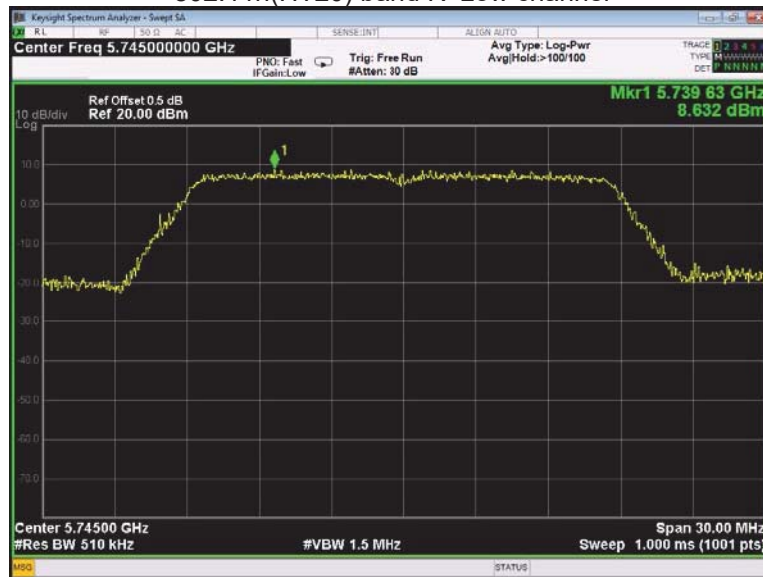



802.11n(HT20) band IV Middle channel

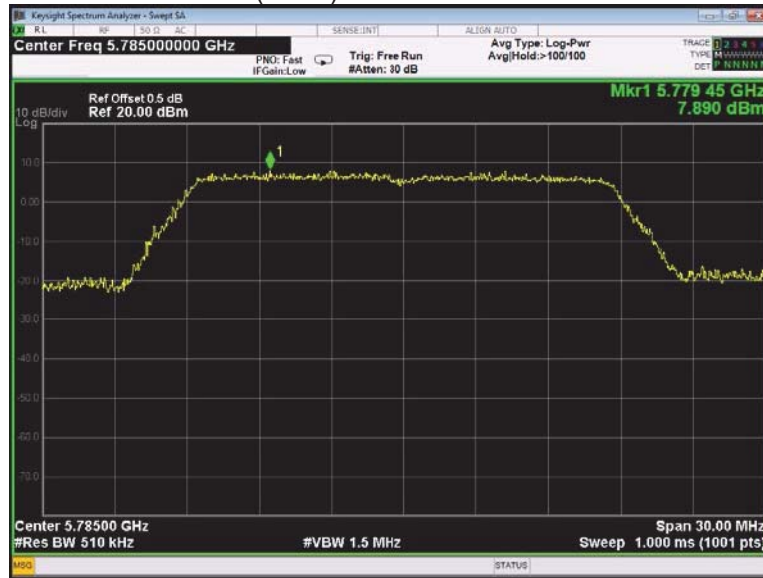


802.11n(HT20) band IV High channel





802.11n(HT40) band IV Low channel

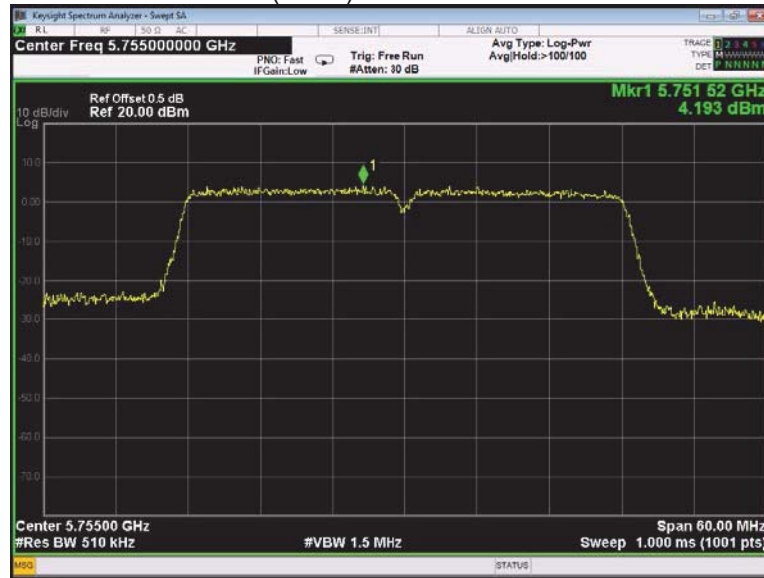


802.11n(HT40) band IV High channel






802.11ac(HT20) band IV Low channel

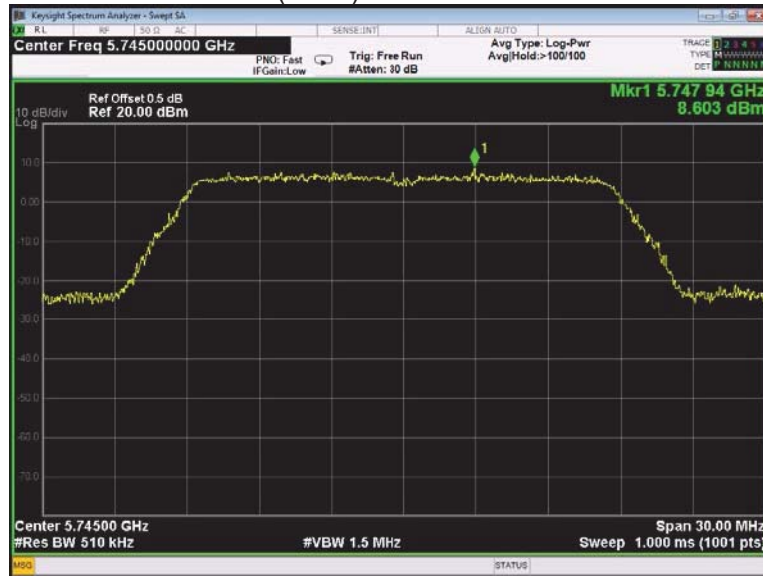


802.11ac(HT20) band IV Middle channel

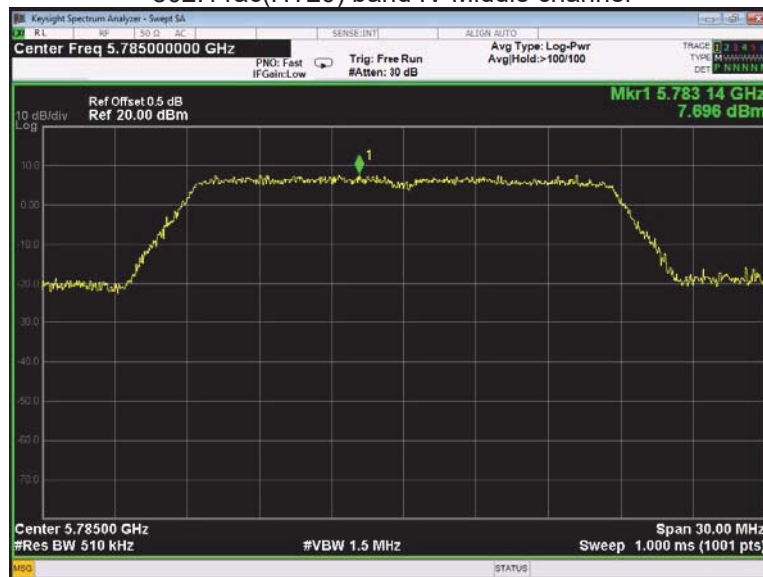




802.11ac(HT20) band IV High channel

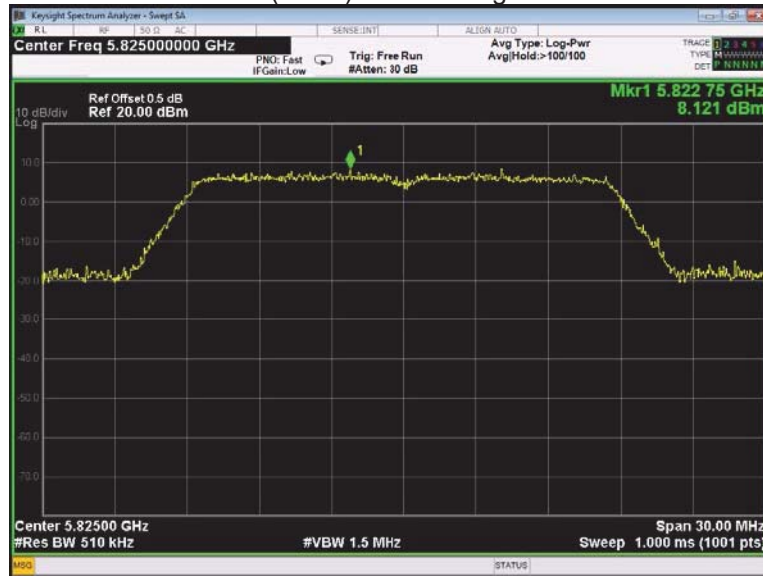


802.11ac(HT40) band IV Low channel

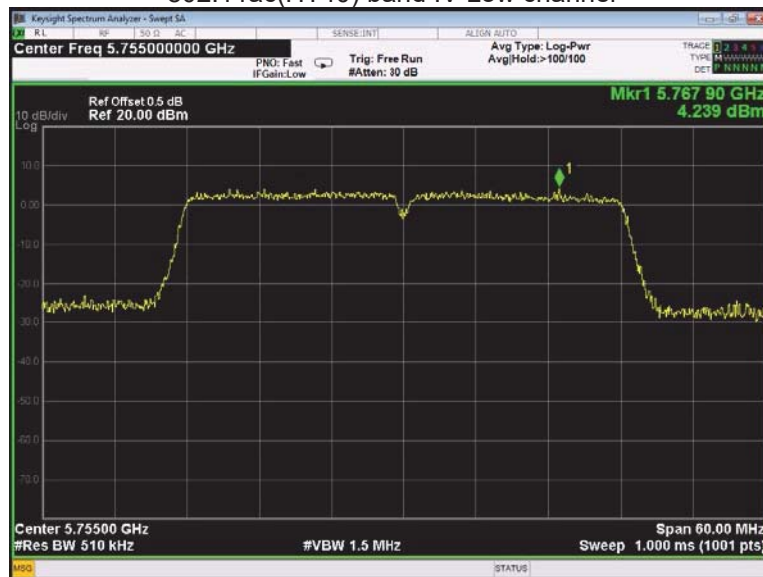



802.11n(HT40) band IV High channel

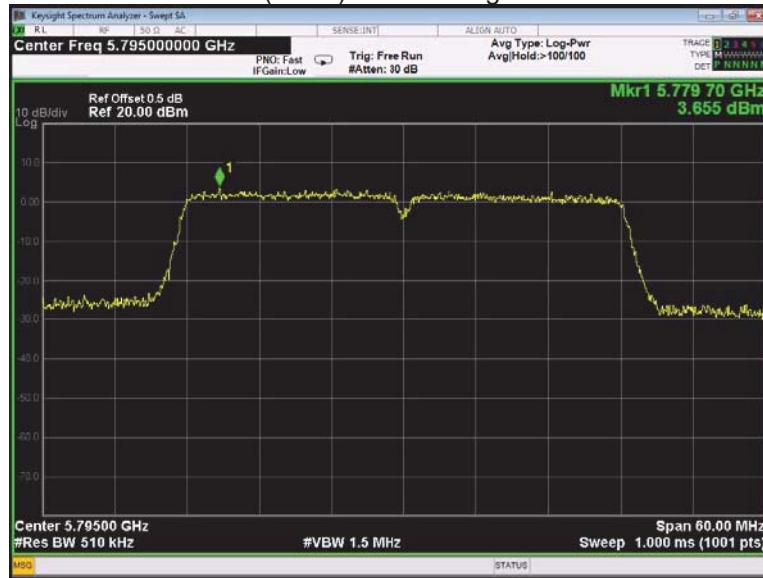

802.11ac(HT80) band IV Low channel





ANT 1

802.11a band I Low channel




802.11a band I Middle channel






802.11a band I High channel

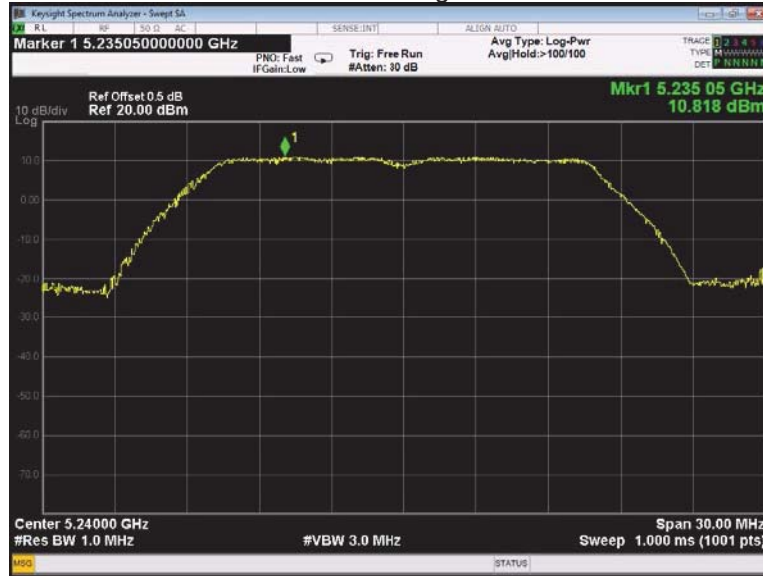


802.11n(HT20) band I Low channel

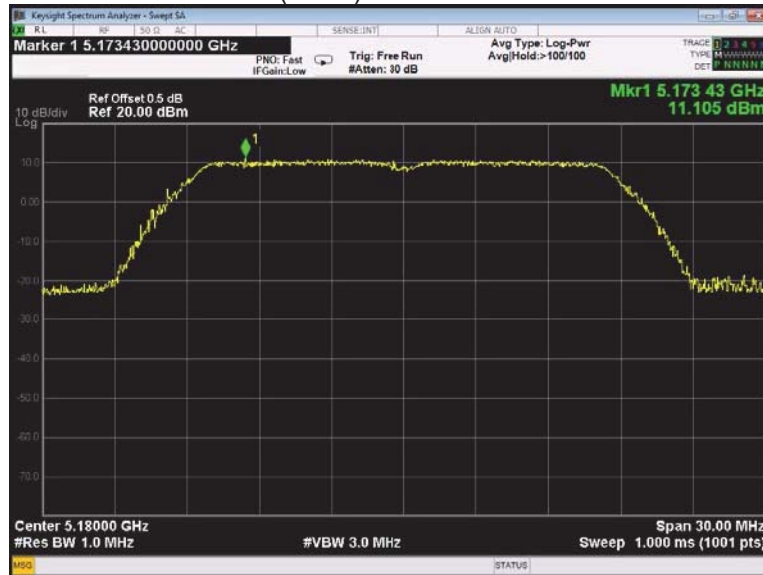




802.11n(HT20) band I Middle channel

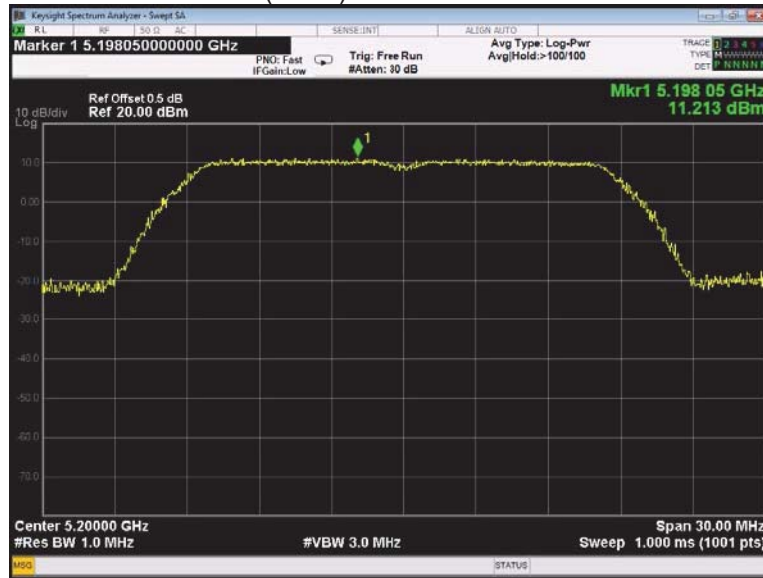


802.11n(HT20) band I High channel

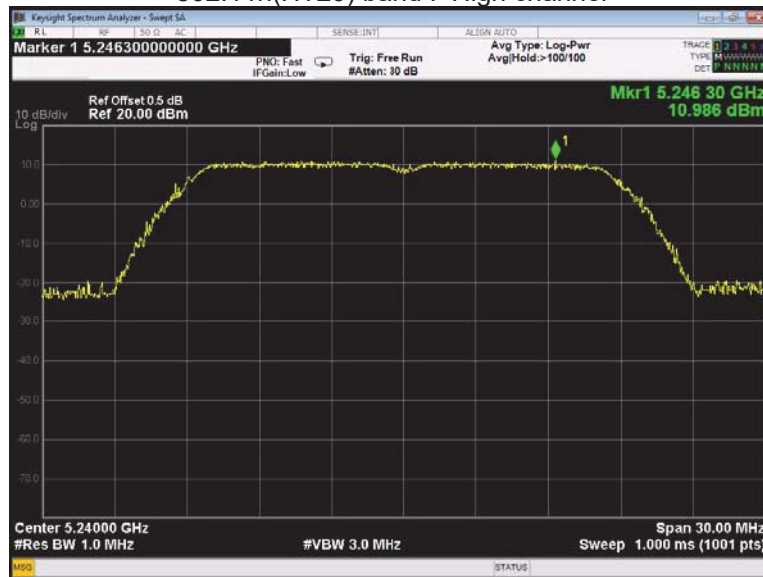




802.11n(HT40) band I Low channel

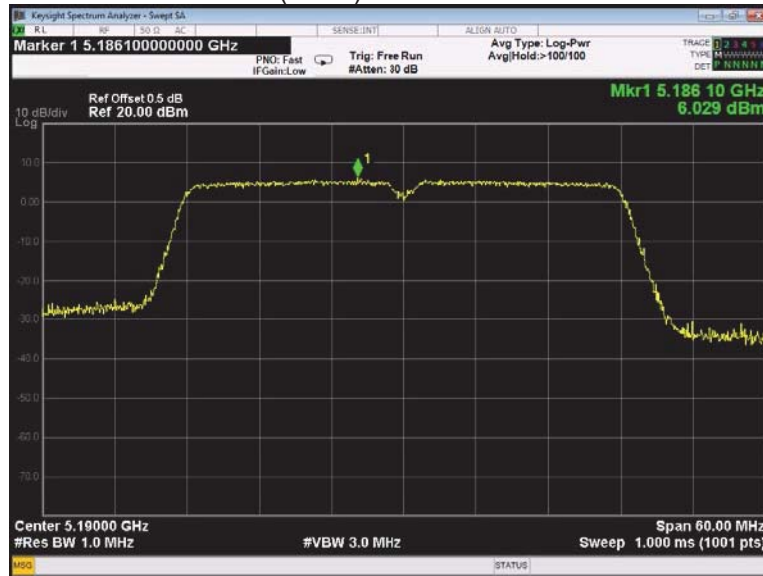


802.11n(HT40) band I High channel

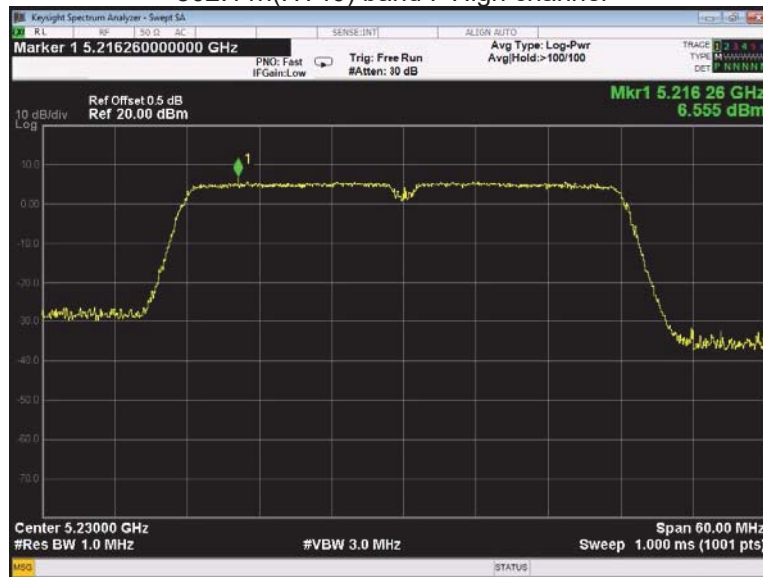



802.11ac(HT20) band I Low channel

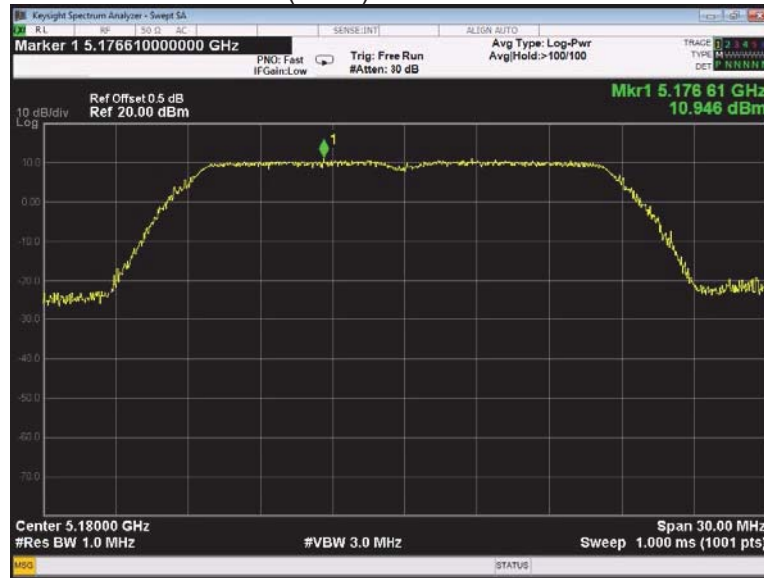


802.11ac(HT20) band I Middle channel






802.11ac(HT20) band I High channel

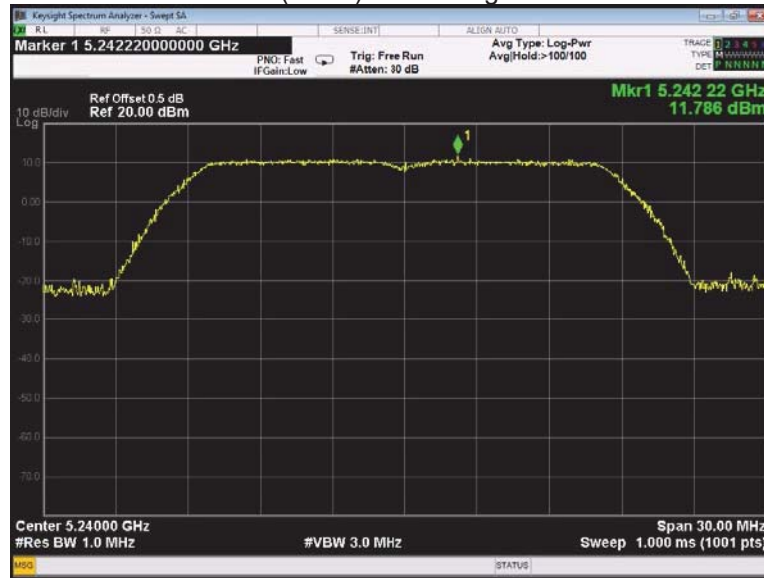


802.11ac(HT40) band I Low channel

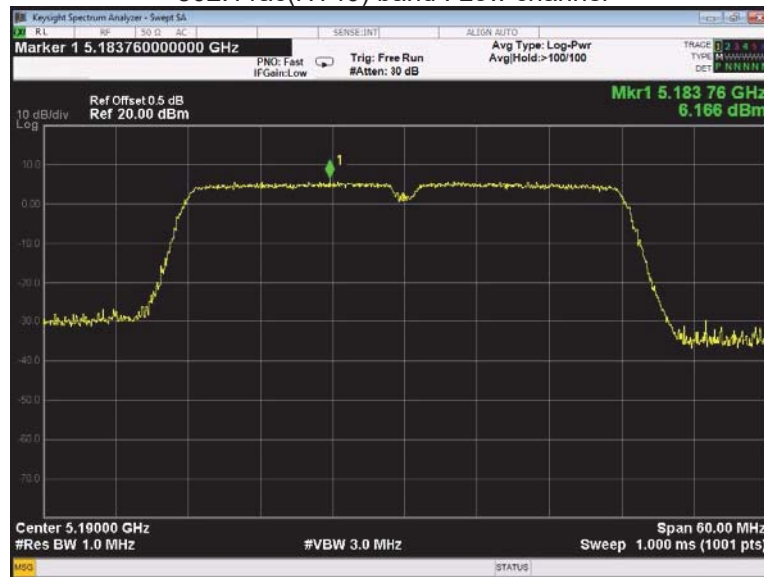



802.11n(HT40) band I High channel

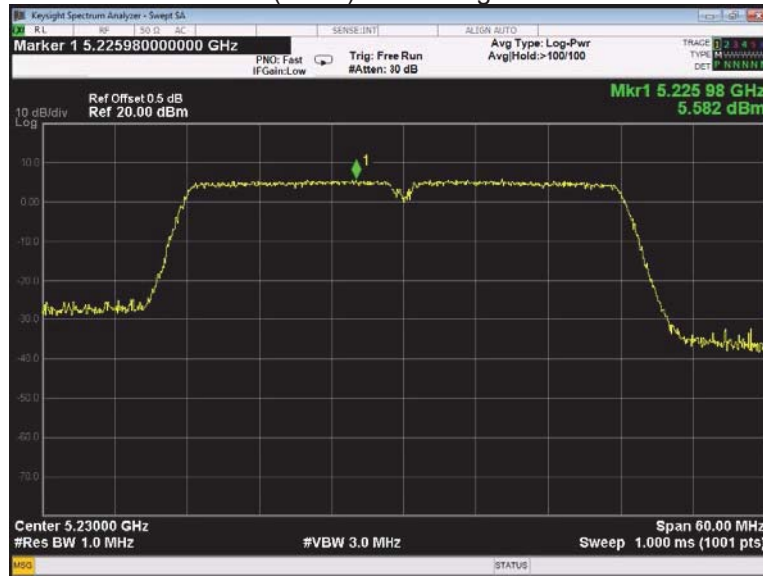


802.11ac(HT80) band I Low channel





802.11a band IV Low channel

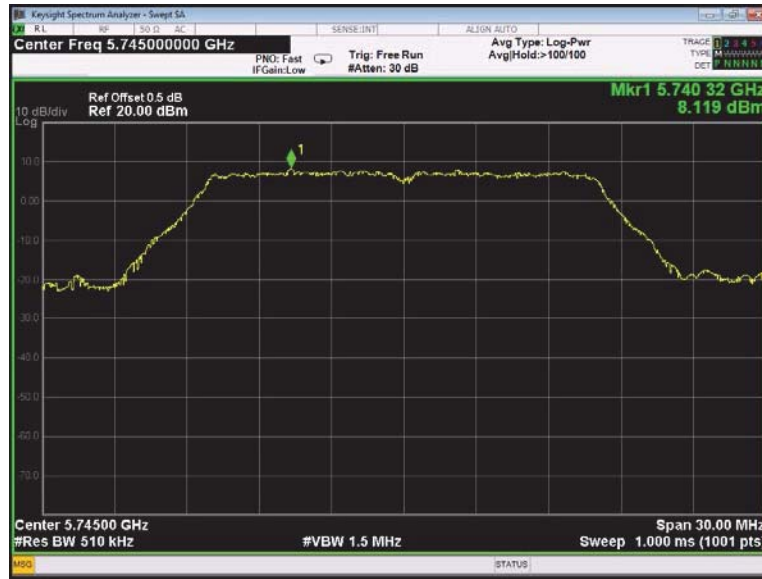


802.11a band IV Middle channel






802.11a band IV High channel

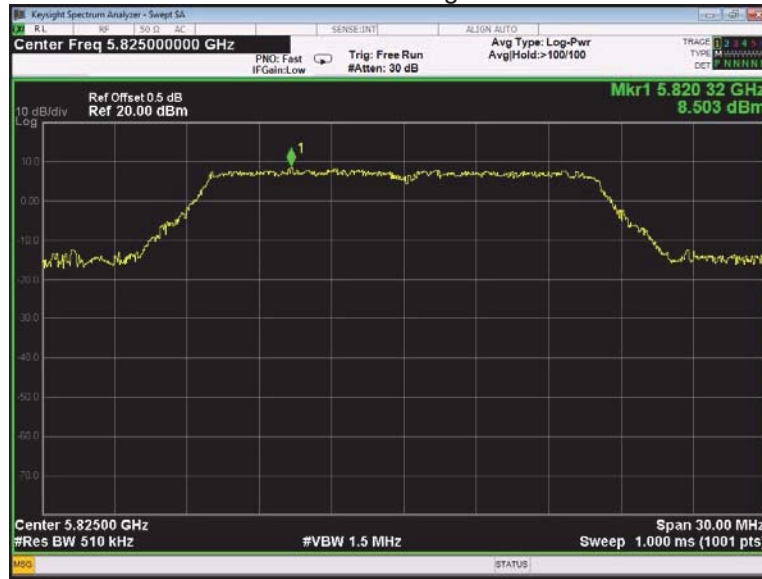


802.11n(HT20) band IV Low channel

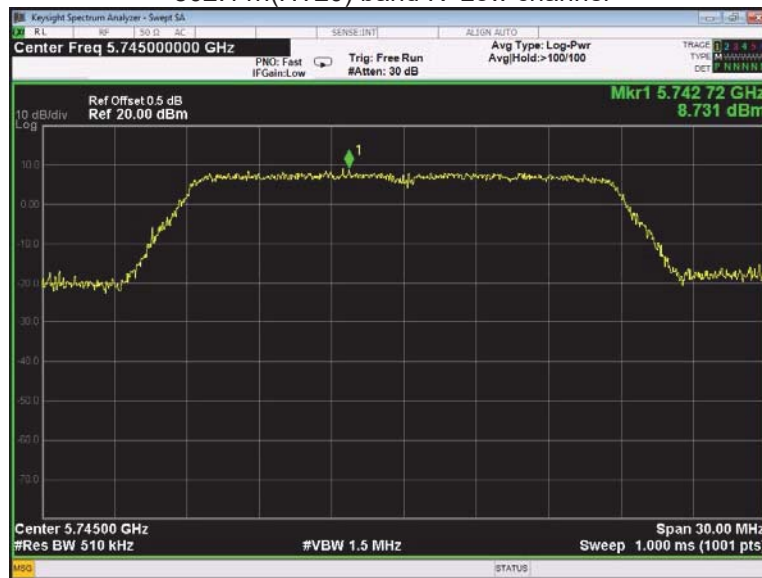




802.11n(HT20) band IV Middle channel

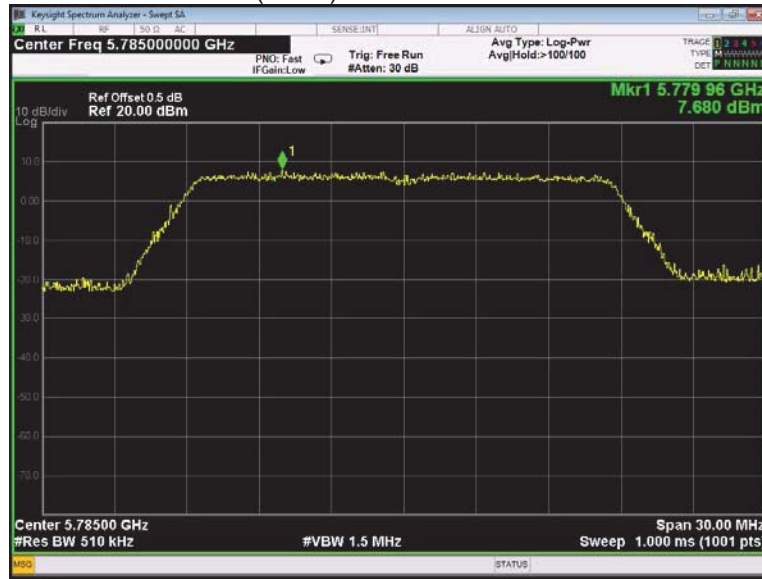

802.11n(HT20) band IV High channel

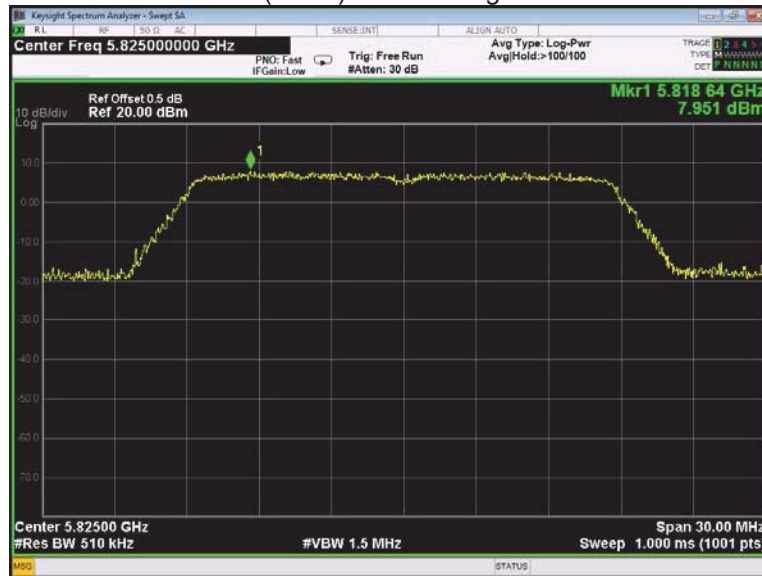




802.11n(HT40) band IV Low channel




802.11n(HT40) band IV High channel

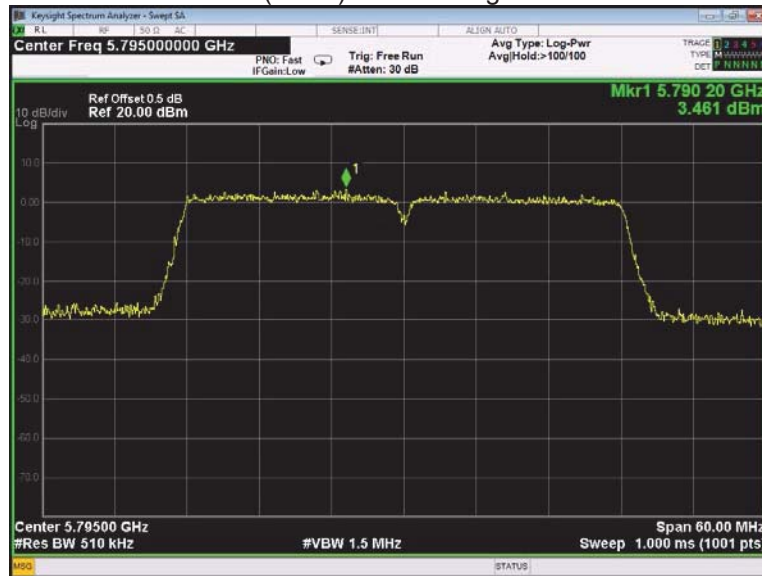




802.11ac(HT20) band IV Low channel

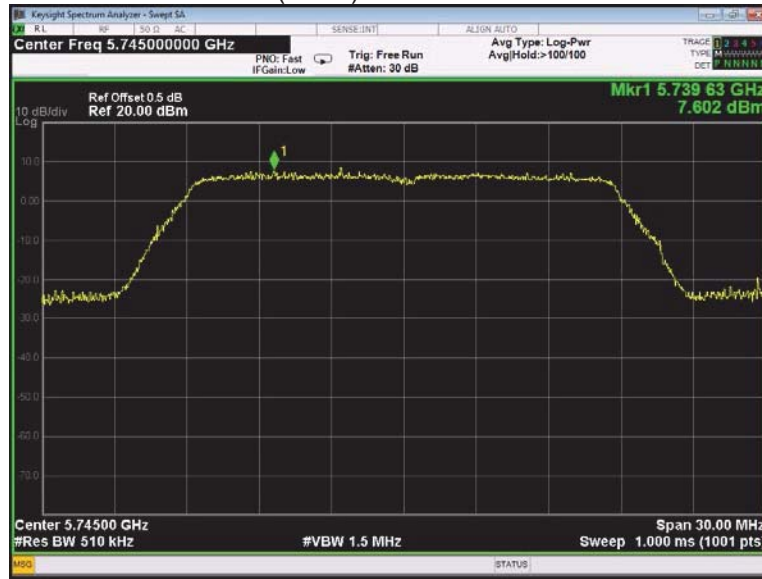


802.11ac(HT20) band IV Middle channel

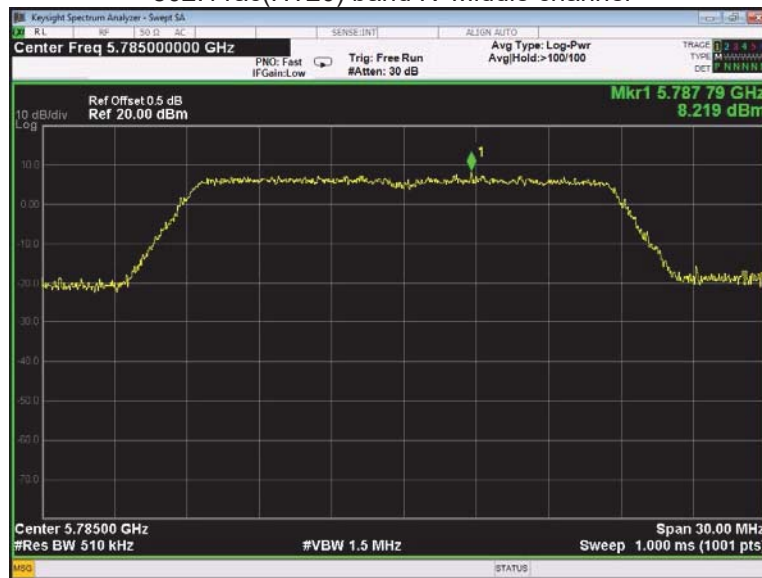




802.11ac(HT20) band IV High channel

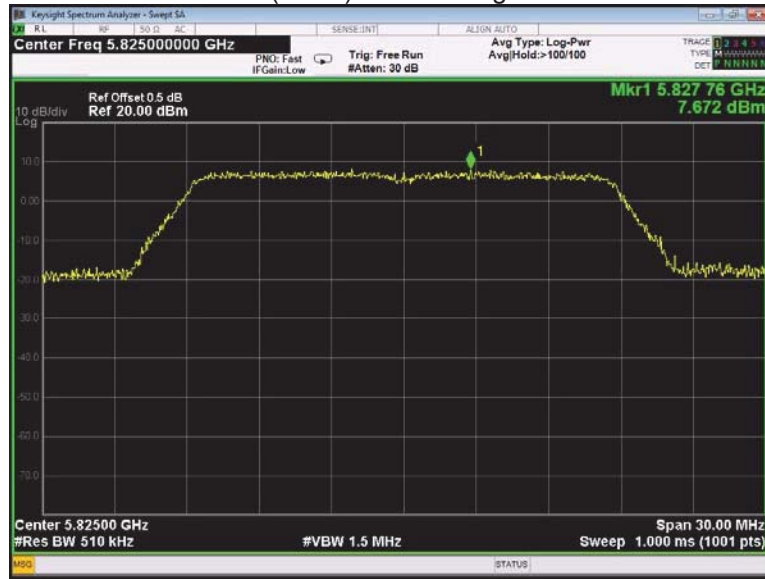

802.11ac(HT40) band IV Low channel

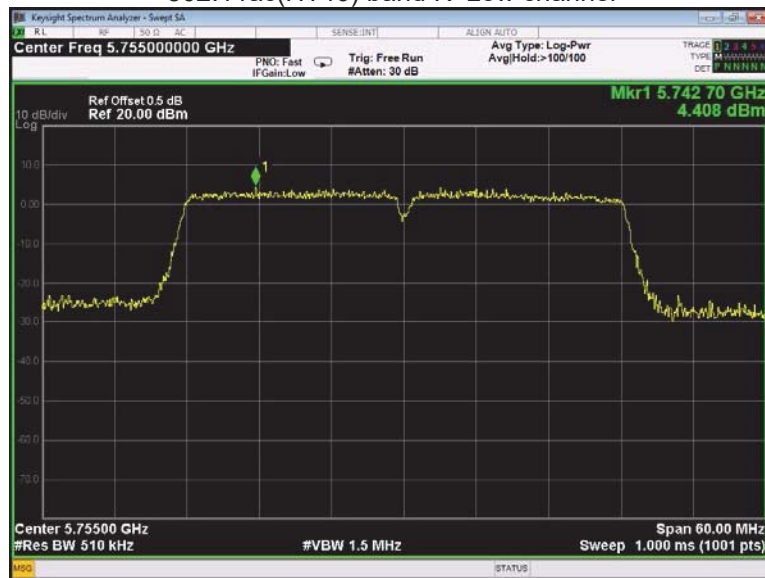




802.11n(HT40) band IV High channel




802.11ac(HT80) band IV Low channel

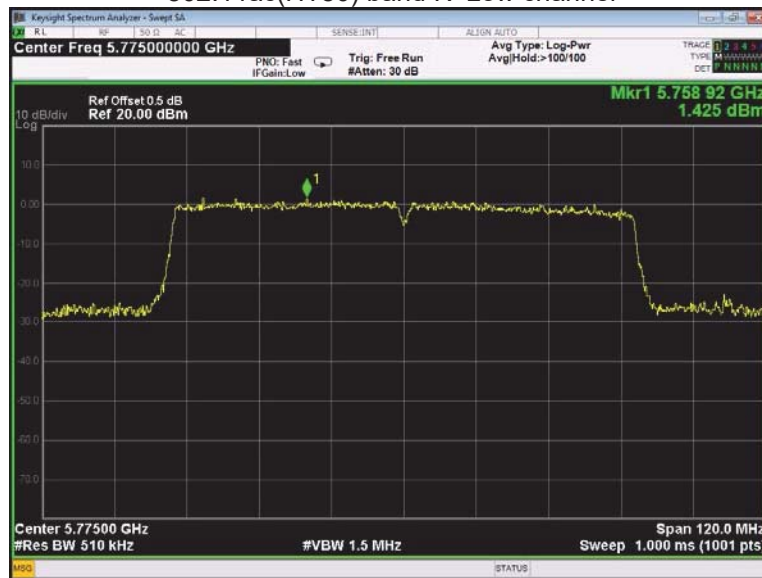

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an internal integrated antenna fulfill the requirement of this section.

Antenna

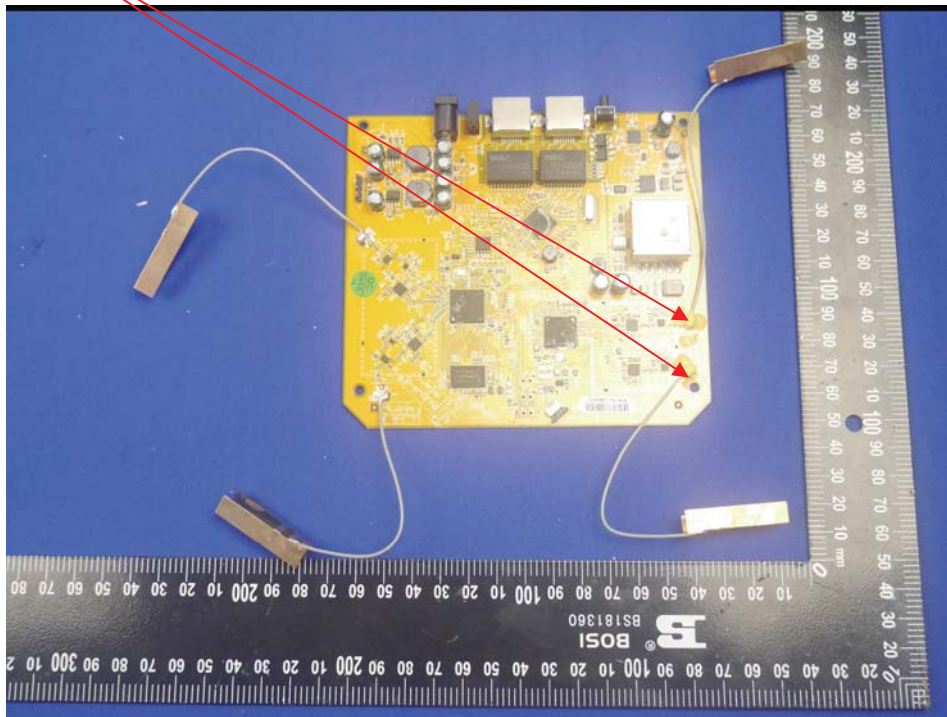

Note: The 2.4 G TX and 5.8 G TX is not transmitter at the same time.



15 RF Exposure

Test Requirement: FCC Part 1.1307
 Evaluation Method: FCC Part 2.1091

15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density



15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

5.2G

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
2.8	1.905	25.47	352.37	0.133573	1

5.8G

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
4.5	2.818	22.60	181.97	0.102028	1

====End of Report====