

FCC - TEST REPORT

Report Number : **64.790.20.00780.01** Date of Issue: October 30, 2020

Model : 0384

Product Type : Body Fat Analyzer

Applicant : Greater Goods,LLC

Address : 4427 Chouteau Ave.St.Louis, Missouri

Manufacturer : Zhongshan Transtek Electronics Co.,Ltd

Address : No. 23,Jin'an Road, Minzhong, Zhongshan ,Guangdong, China

Test Result : **Positive** **Negative**



Total pages including Appendices : 41

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

1	Table of Contents	2
2	Details about the Test Laboratory	3
3	Description of the Equipment Under Test	4
4	Summary of Test Standards	5
5	Summary of Test Results	6
6	General Remarks.....	7
7	Test Setups	8
8	Systems test configuration	9
9	Technical Requirement	10
9.1	Conducted peak output power	10
9.2	Power spectral density	11
9.3	6 dB Bandwidth	15
9.4	Spurious RF conducted emissions	19
9.5	Band edge testing.....	30
9.6	Spurious radiated emissions for transmitter	34
10	Test Equipment List	40
11	System Measurement Uncertainty	41



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
Building 12&13, Zhiheng Wisdomland Business Park,
Nantou Checkpoint Road 2, Nanshan District,
Shenzhen City, 518052,
P. R. China

Telephone: 86 755 8828 6998

Fax: 86 755 8828 5299

FCC Registration No.: 514049

IC registration number: 10320A

3 Description of the Equipment Under Test

Product:	Body Fat Analyzer
Model no.:	0384
FCC ID:	2ADUL0384
Options and accessories:	Nil
Rating Input:	DC 1.5V*4
RF Transmission Frequency:	2412MHz-2462MHz
No. of Operated Channel:	802.11b/g/n20: 11 channel
Modulation:	802.11b: CCK DSSS 802.11g: OFDM 802.11n20: OFDM
Antenna Type:	Integral Antenna
Antenna Gain:	3.22dBi
Description of the EUT:	The EUT is a Body Fat Analyzer

4 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C 10-1-2019 Edition	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to KDB558074 v05r02 and ANSI C63.10 (2013).

5 Summary of Test Results

Technical Requirements			
FCC Part 15 Subpart C			
Test Condition		Pages	Test Result
§15.207	Conducted emission AC power port	--	N/A
§15.247(b)(1)	Conducted peak output power	10	Pass
§15.247(e)	Power spectral density	11	Pass
§15.247(a)(2)	6dB bandwidth	15	Pass
§15.247(a)(1)	20dB bandwidth and 99% Occupied Bandwidth	--	N/A
§15.247(a)(1)	Carrier frequency separation	--	N/A
§15.247(a)(1)(iii)	Number of hopping frequencies	--	N/A
§15.247(a)(1)(iii)	Dwell Time	--	N/A
§15.247(d)	Spurious RF conducted emissions	19	Pass
§15.247(d)	Band edge	30	Pass
§15.247(d) & §15.209 &	Spurious radiated emissions for transmitter	34	Pass
§15.203	Antenna requirement	See note 2	Pass

Note 1: N/A=Not Applicable.

Note 2: The EUT uses a integral antenna, which gain is 3.22dBi. In accordance to §15.203, it is considered sufficiently to comply with the provisions of this section.

6 General Remarks

This submittal(s) (test report) is intended for FCC ID: 2ADUL0384 complies with Section 15.209, 15.247 of the FCC Part 15, Subpart C rules.

The EUT is Body Fat Analyzer with Wi-Fi functions. The TX and RX range is 2412MHz - 2462MHz for 2.4GHz.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: 2020-08-25

Testing Date: 2020-08-28~2020-09-17

TÜV SÜD Certification and Testing (China) Co., Ltd. Guangzhou Branch

Reviewed by:


Tony Liu

Prepared by:


Kevin Ouyang


Test by:


Louise Liu


7 Test Setups

7.1 Radiated test setups


Below 1GHz

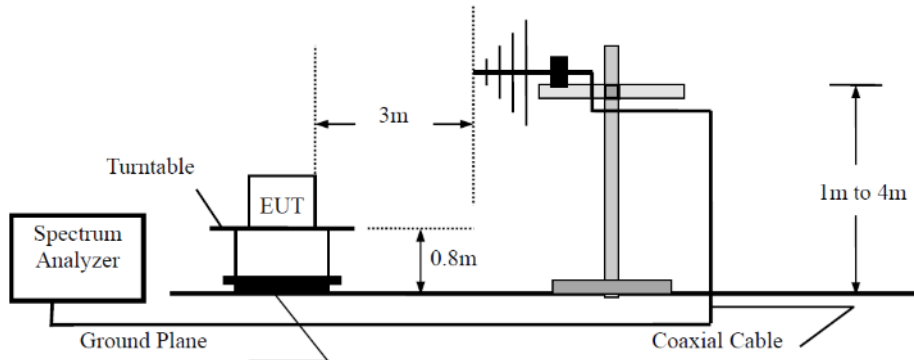

Above 1GHz

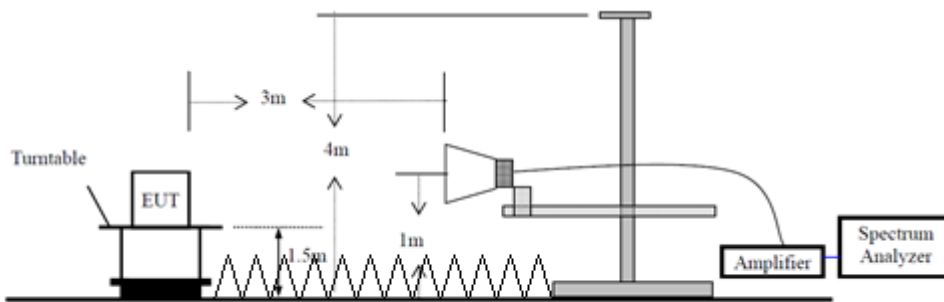

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

Test channel & mode:

The was Interactive Tablet configured using a proprietary communication interface provided by the client. The interface allows channel control required to support the evaluation.

Duty cycle during test: 100%

802.11b/802.11g/802.11n-HT20

Test mode	Channel	Frequency (MHz)
TX	1	2412
TX	6	2437
TX	11	2462

9 Technical Requirement

9.1 Conducted peak output power

Test Method

1. Connect the power meter to the EUT
 - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - b) At all times the EUT is transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Limits

According to §15.247 (b) (1), conducted peak output power limit as below:

Frequency Range MHz	Limit W	Limit dBm
2400-2483.5	≤1	≤30

Conducted peak output power

Test Mode	Antenna	Channel (MHz)	Total Power (dBm)	Limit (dBm)	Verdict
11B	Ant1	2412	0.73	30	PASS
		2437	0.54	30	PASS
		2462	2.45	30	PASS
11G	Ant1	2412	-2.34	30	PASS
		2437	-1.77	30	PASS
		2462	-2.73	30	PASS
11N20	Ant1	2412	-1.55	30	PASS
		2437	-2.77	30	PASS
		2462	-2.96	30	PASS

9.2 Power spectral density

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW≥3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
3. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
4. Repeat above procedures until other frequencies measured were completed.

Limit


Limit [dBm/3KHz]

≤ 8

Test Mode	Antenna	Channel (MHz)	PSD (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
11B	Ant1	2412	-15.96	<=8	PASS
		2437	-16.18	<=8	PASS
		2462	-7.68	<=8	PASS
11G	Ant1	2412	-16.82	<=8	PASS
		2437	-15.38	<=8	PASS
		2462	-16.44	<=8	PASS
11N20	Ant1	2412	-14.81	<=8	PASS
		2437	-16.69	<=8	PASS
		2462	-15.63	<=8	PASS


Test Graphs

11B_Ant1_2412

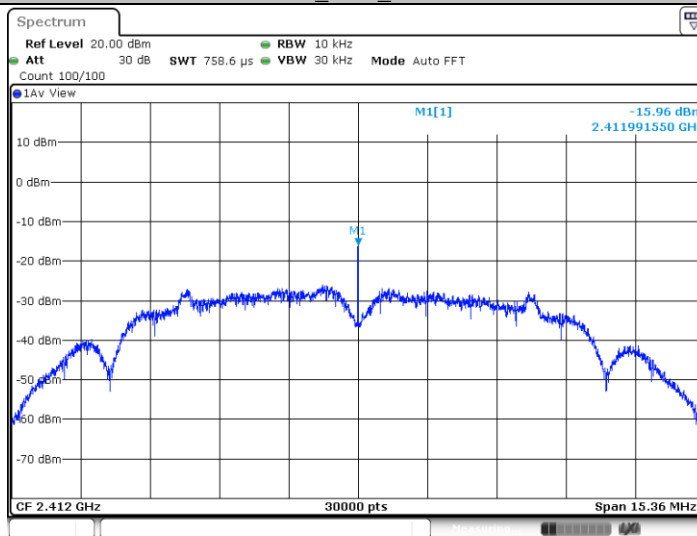


Date: 28 AUG.2020 16:03:42

11B_Ant1_2437

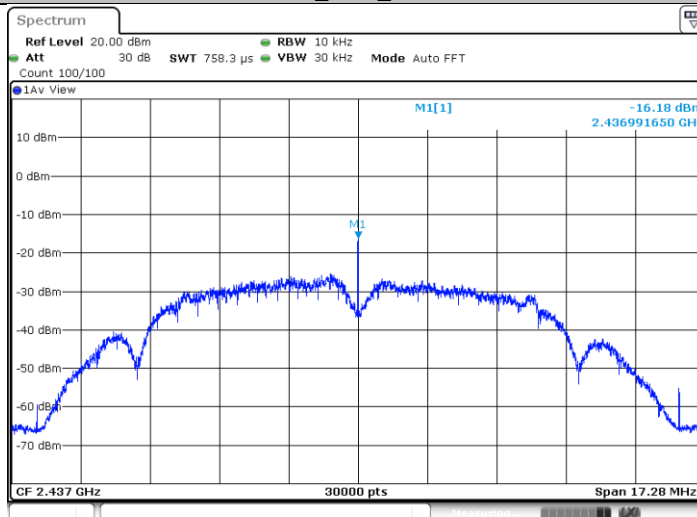


Date: 28 AUG.2020 16:05:30

11B_Ant1_2462

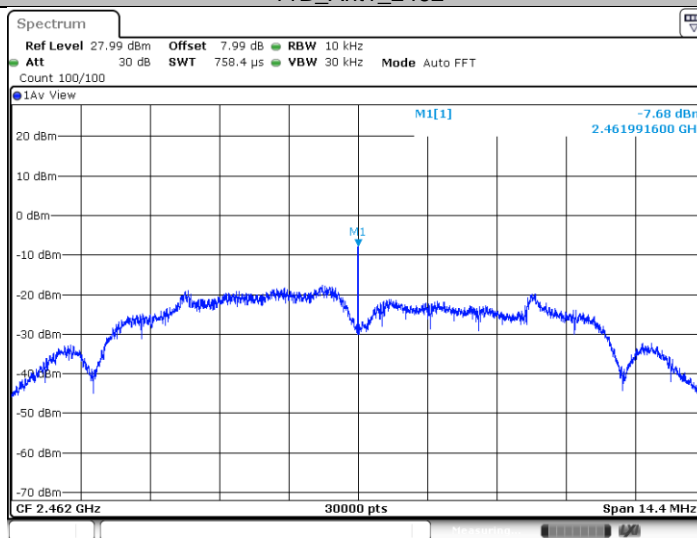


Date: 28 AUG.2020 16:07:04

11G_Ant1_2412

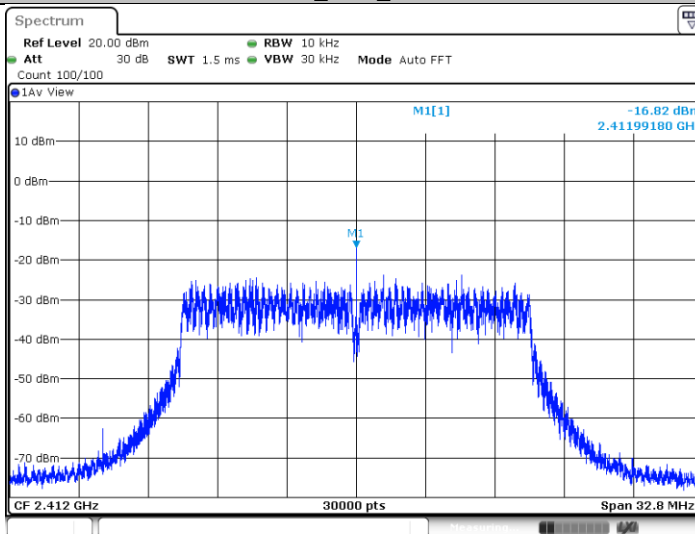


Date: 28 AUG.2020 16:11:21

11G_Ant1_2437

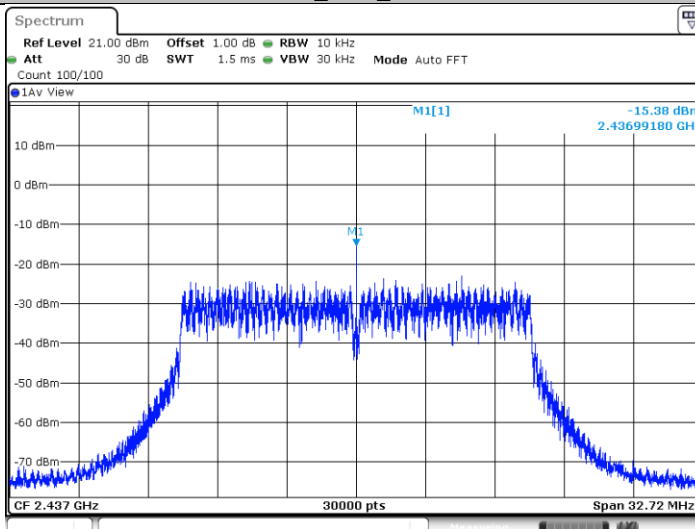


Date: 28 AUG.2020 16:14:56

11G_Ant1_2462

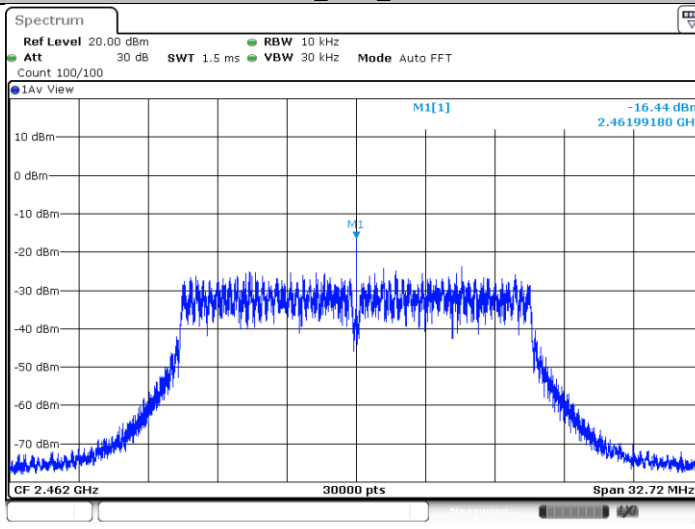


Date: 28 AUG.2020 16:17:08

11N20SISO_Ant1_2412

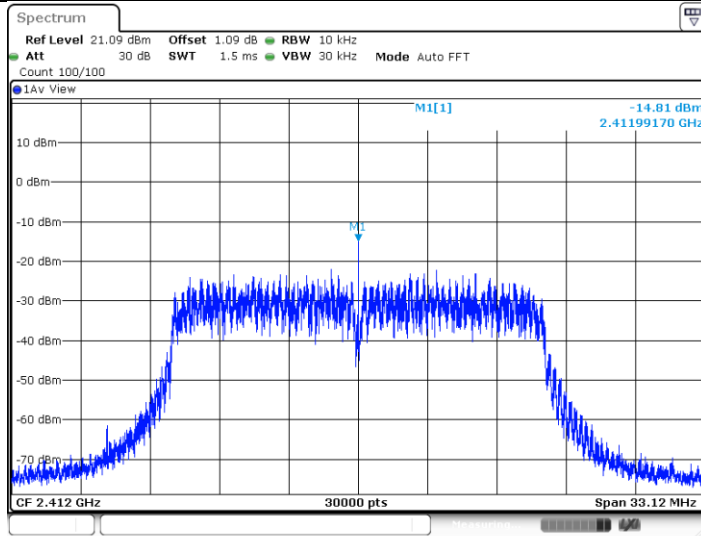


Date: 28 AUG.2020 16:18:54

11N20SISO_Ant1_2437

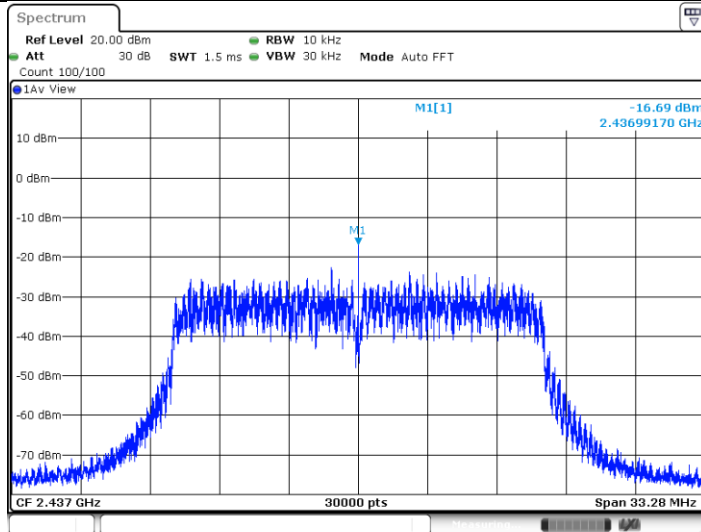

Date: 28 AUG.2020 16:20:37

11N20SISO_Ant1_2462

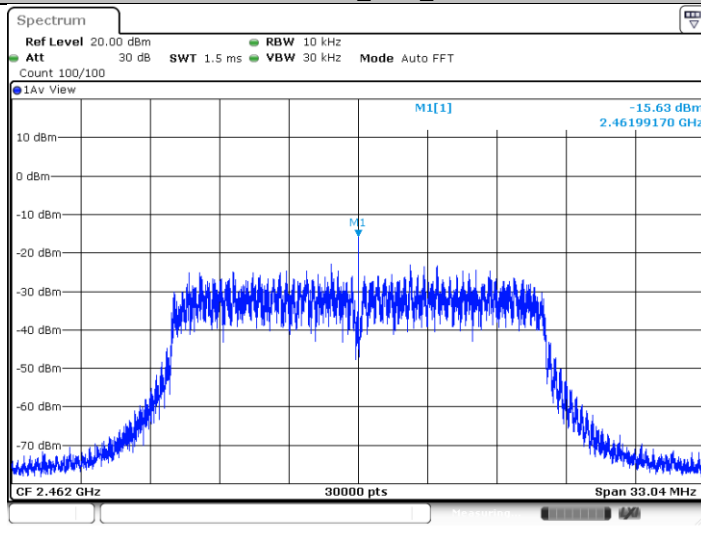

Date: 28 AUG.2020 16:22:20

9.3 6 dB Bandwidth

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Use the following spectrum analyzer settings:
Set RBW \geq 1% of the 99% bandwidth, VBW \geq RBW.
Sweep = auto, Detector function = peak, Trace = max hold
3. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
4. Allow the trace to stabilize, record the X dB Bandwidth value.


Limit


Limit [kHz]

≥ 500

Test Mode	Antenna	Channel (MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	7.680	2407.920	2415.600	PASS
		2437	8.640	2432.920	2441.560	PASS
		2462	7.200	2458.400	2465.600	PASS
11G	Ant1	2412	16.400	2403.760	2420.160	PASS
		2437	16.360	2428.800	2445.160	PASS
		2462	16.360	2453.880	2470.240	PASS
11N20	Ant1	2412	16.560	2403.960	2420.520	PASS
		2437	16.640	2428.880	2445.520	PASS
		2462	16.520	2454.000	2470.520	PASS


Test Graphs

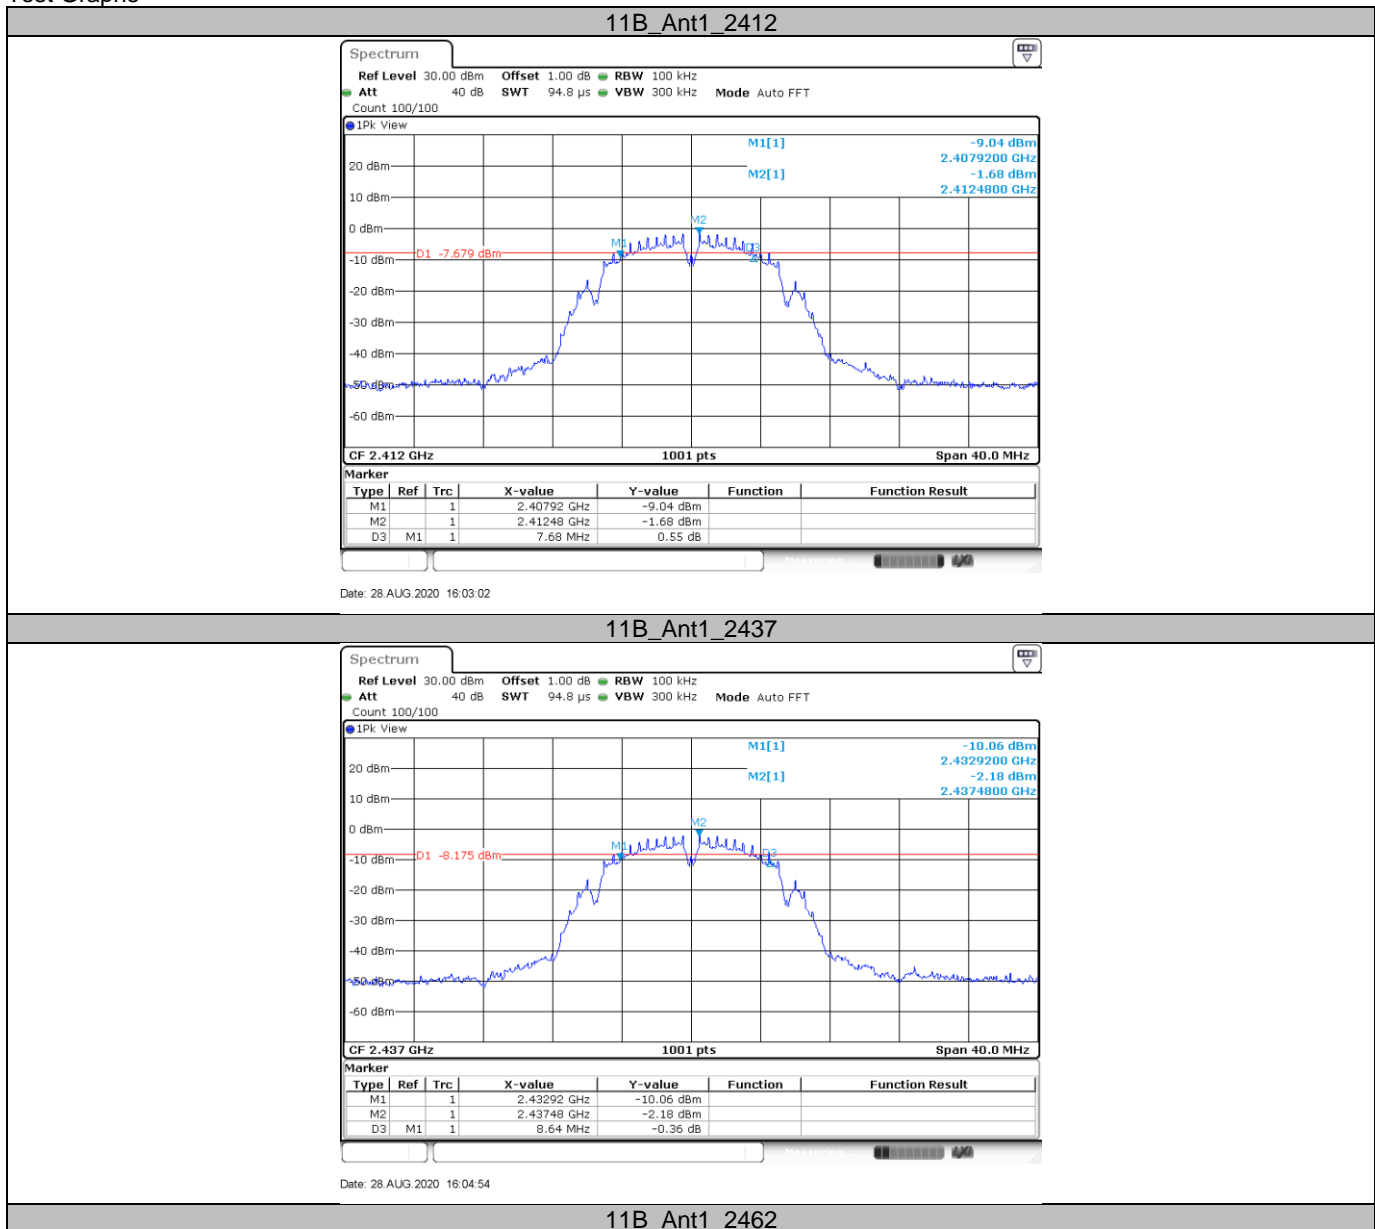

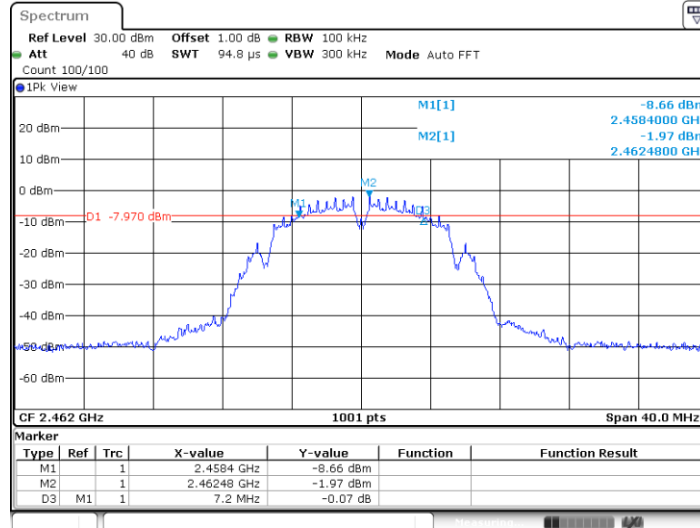


Date: 28 AUG.2020 16:06:27

11G_Ant1_2412

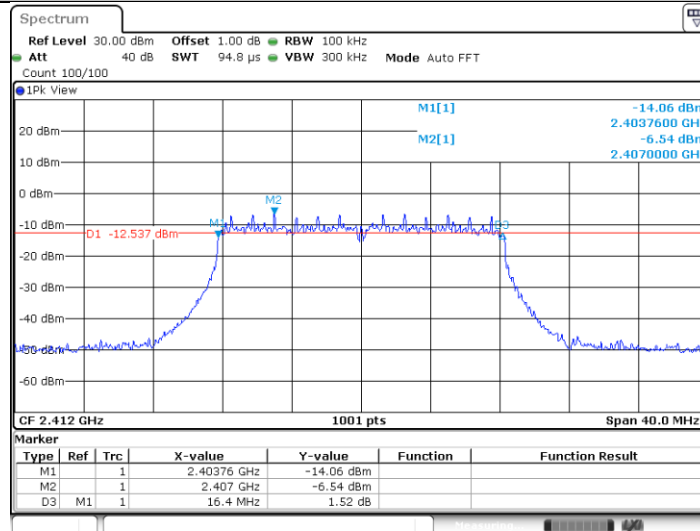


Date: 28 AUG.2020 16:10:59

11G_Ant1_2437

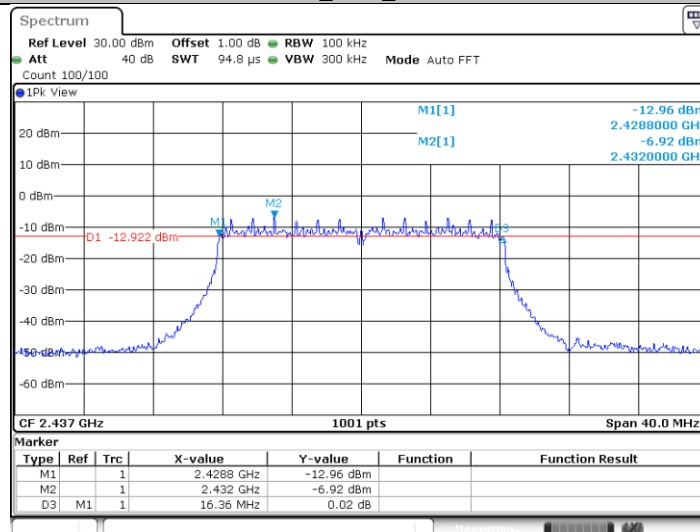


Date: 28 AUG.2020 16:14:34

11G_Ant1_2462

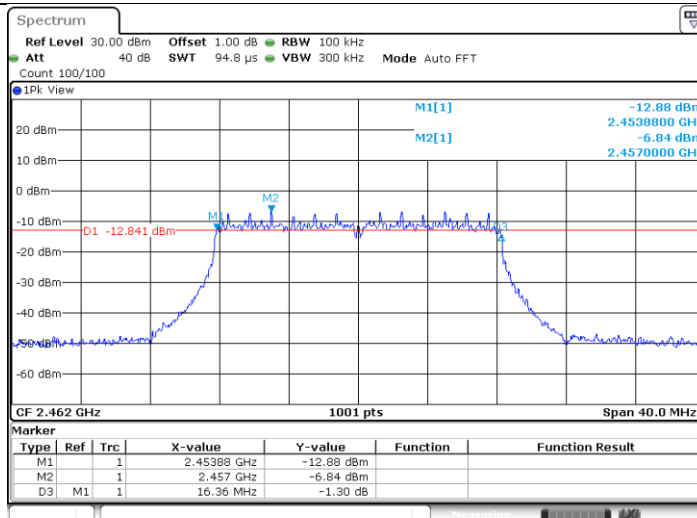


Date: 28 AUG 2020 16:16:45

11N20SISO_Ant1_2412

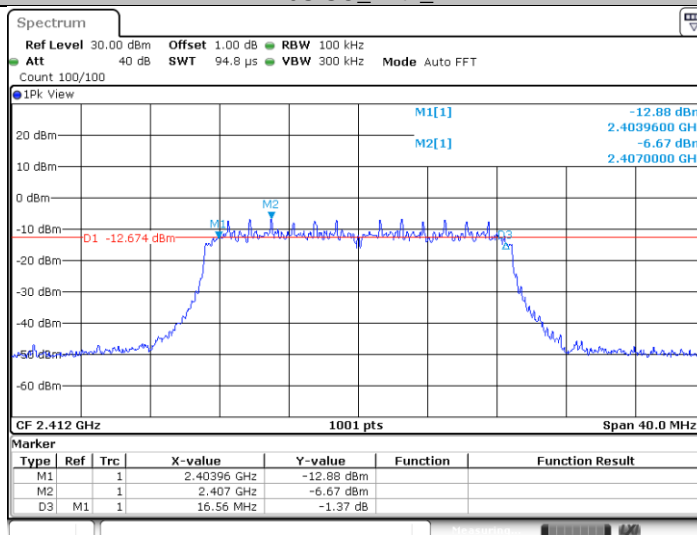


Date: 28 AUG 2020 16:18:32

11N20SISO_Ant1_2437

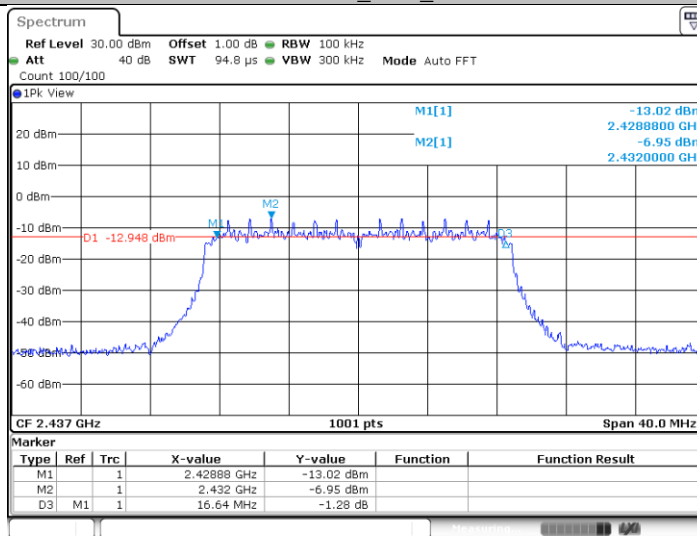

Date: 28 AUG 2020 16:20:15

11N20SISO_Ant1_2462

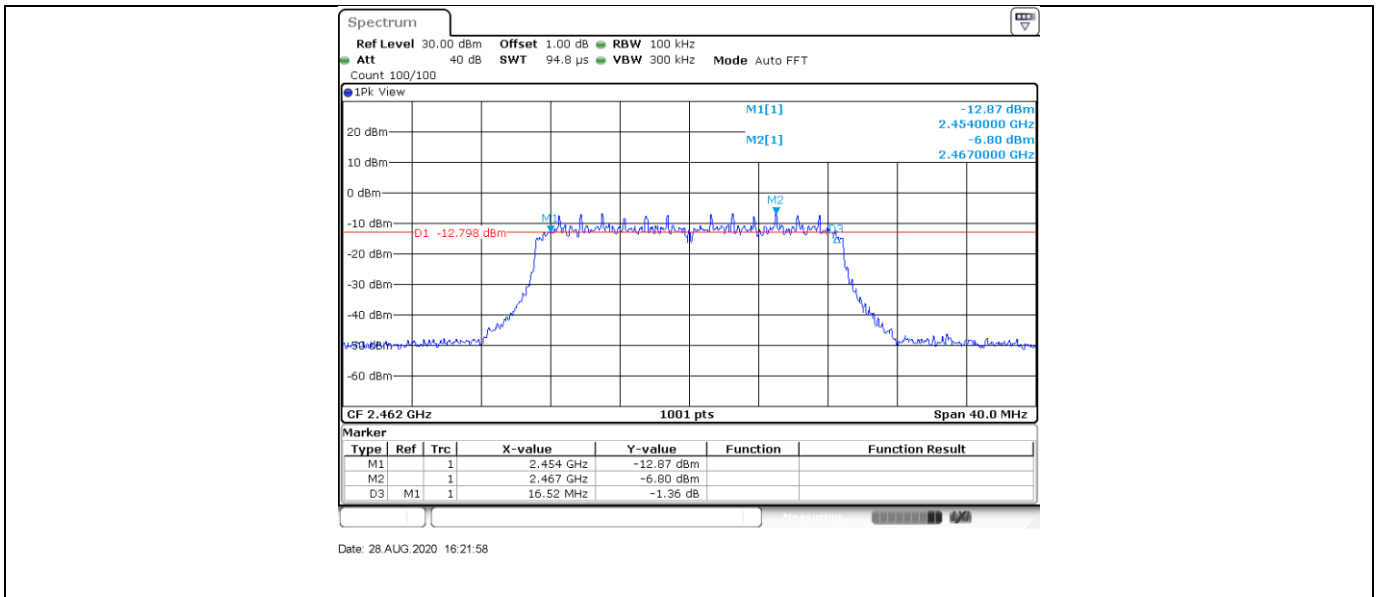

9.4 Spurious RF conducted emissions

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW≥3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
3. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
4. Repeat above procedures until other frequencies measured were completed.

Limit




Frequency Range MHz	Limit (dBc)
30-25000	-20

Spurious RF conducted emissions


Test Result

Test Mode	Antenna	Channel (MHz)	FreqRange (MHz)	RefLevel (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	2412	Reference	-1.99	-1.99	---	PASS
		2412	30~1000	-1.99	-67	<=-21.99	PASS
		2412	1000~26500	-1.99	-52.32	<=-21.99	PASS
		2437	Reference	-2.00	-2.00	---	PASS
		2437	30~1000	-2.00	-68.11	<=-22	PASS
		2437	1000~26500	-2.00	-51.95	<=-22	PASS
		2462	Reference	-2.32	-2.32	---	PASS
		2462	30~1000	-2.32	-68.34	<=-22.32	PASS
		2462	1000~26500	-2.32	-51.5	<=-22.32	PASS
11G	Ant1	2412	Reference	-6.75	-6.75	---	PASS
		2412	30~1000	-6.75	-67.49	<=-26.75	PASS
		2412	1000~26500	-6.75	-49.21	<=-26.75	PASS
		2437	Reference	-7.12	-7.12	---	PASS
		2437	30~1000	-7.12	-68.26	<=-27.12	PASS
		2437	1000~26500	-7.12	-52.17	<=-27.12	PASS
		2462	Reference	-6.74	-6.74	---	PASS
		2462	30~1000	-6.74	-67.61	<=-26.74	PASS
		2462	1000~26500	-6.74	-51.96	<=-26.74	PASS
11N20	Ant1	2412	Reference	-6.80	-6.80	---	PASS
		2412	30~1000	-6.80	-67.97	<=-26.8	PASS
		2412	1000~26500	-6.80	-47.95	<=-26.8	PASS
		2437	Reference	-7.08	-7.08	---	PASS
		2437	30~1000	-7.08	-67.98	<=-27.08	PASS
		2437	1000~26500	-7.08	-52.22	<=-27.08	PASS
		2462	Reference	-6.79	-6.79	---	PASS
		2462	30~1000	-6.79	-68.24	<=-26.79	PASS
		2462	1000~26500	-6.79	-52.46	<=-26.79	PASS

Test Graphs

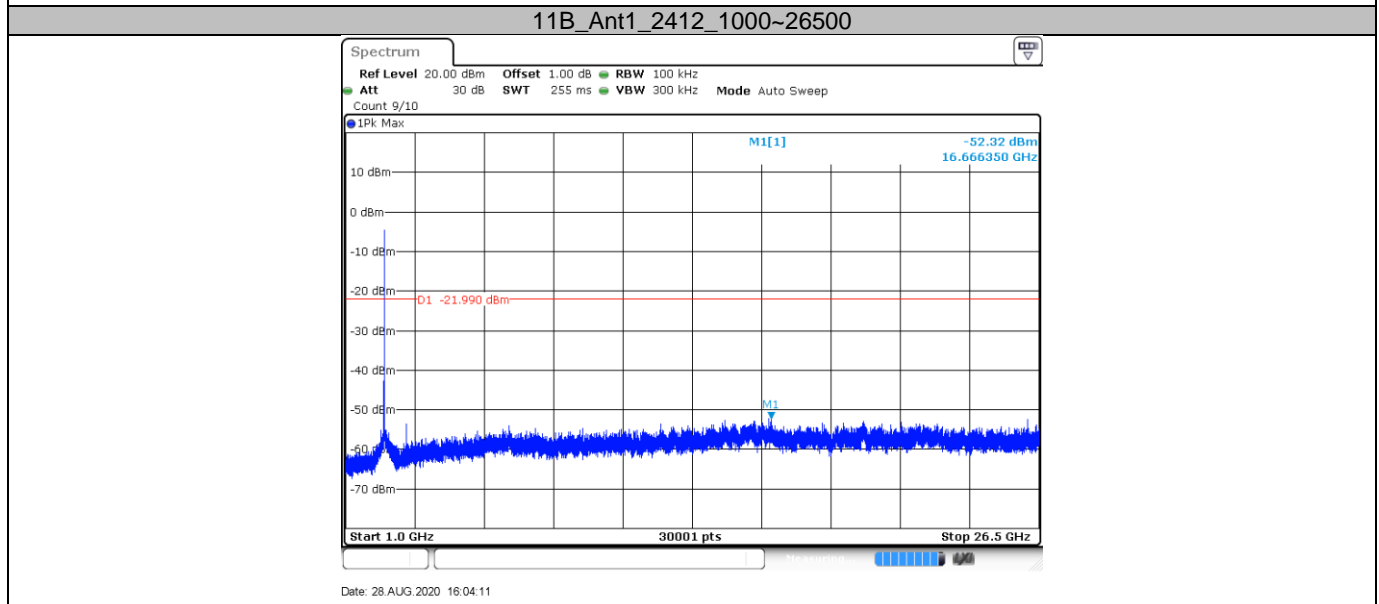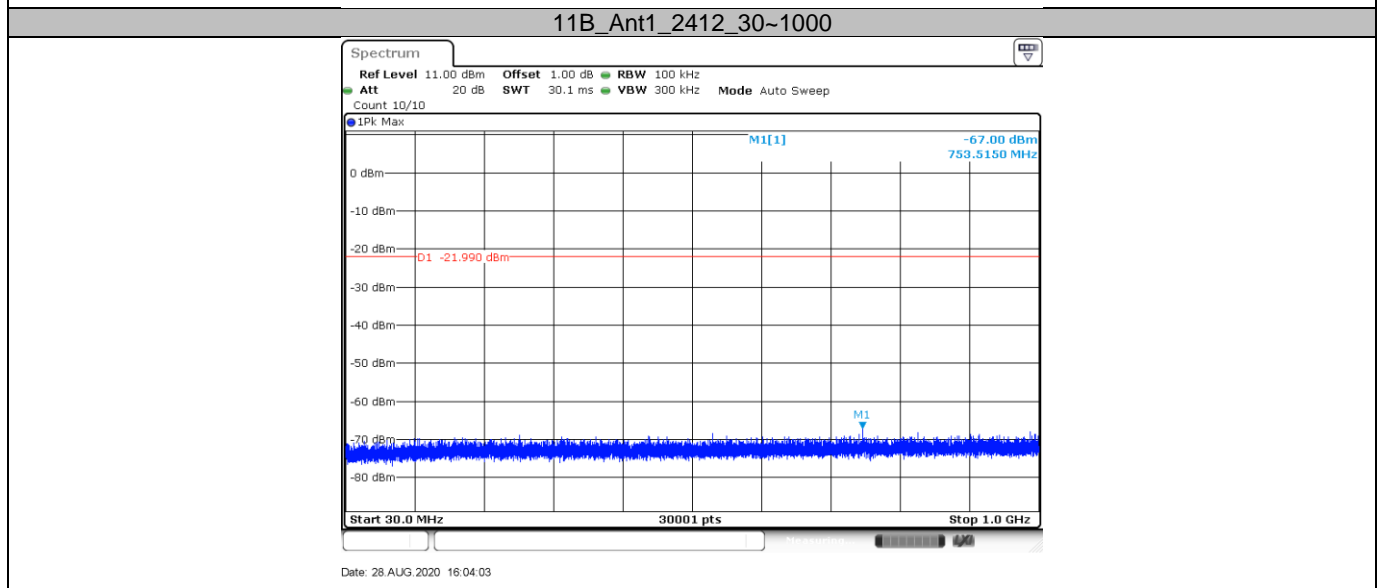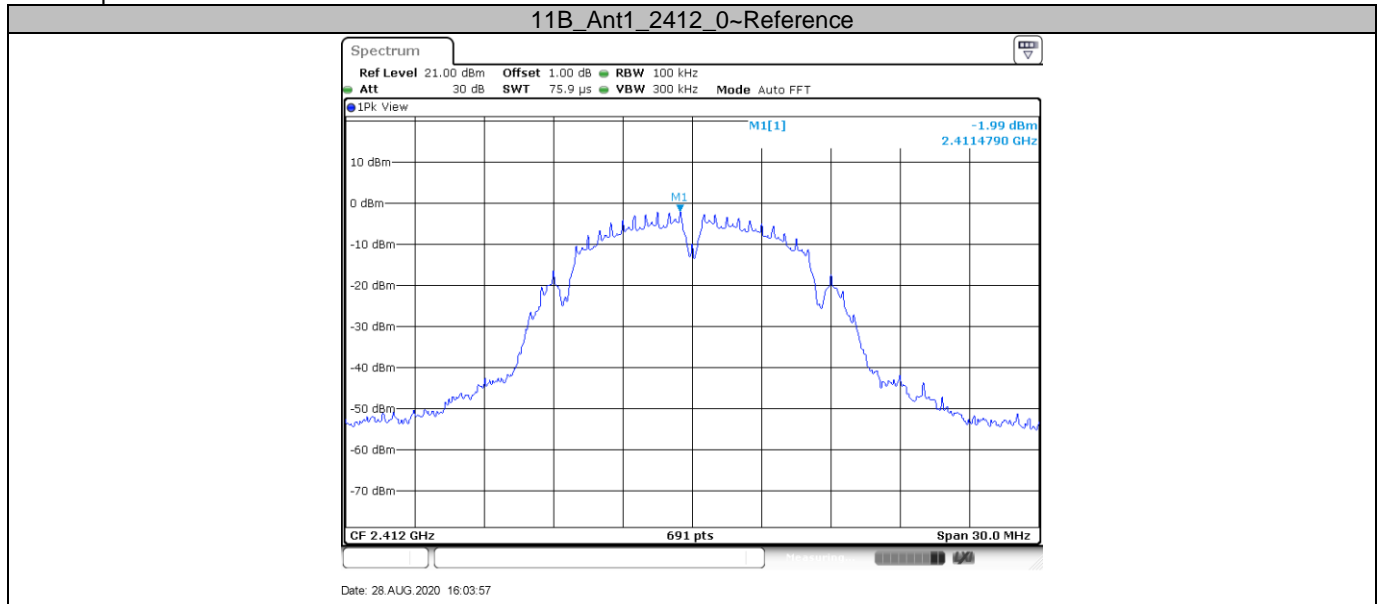


11B_Ant1_2437_0-Reference

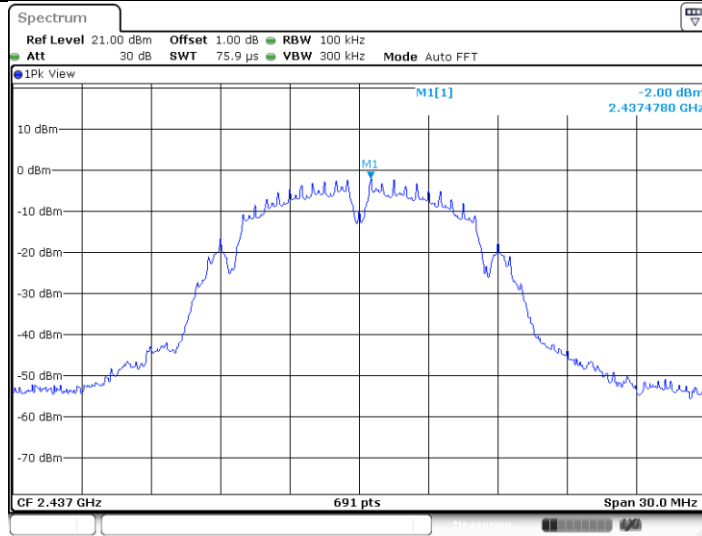


Date: 28 AUG. 2020 16:05:36

11B_Ant1_2437_30-1000

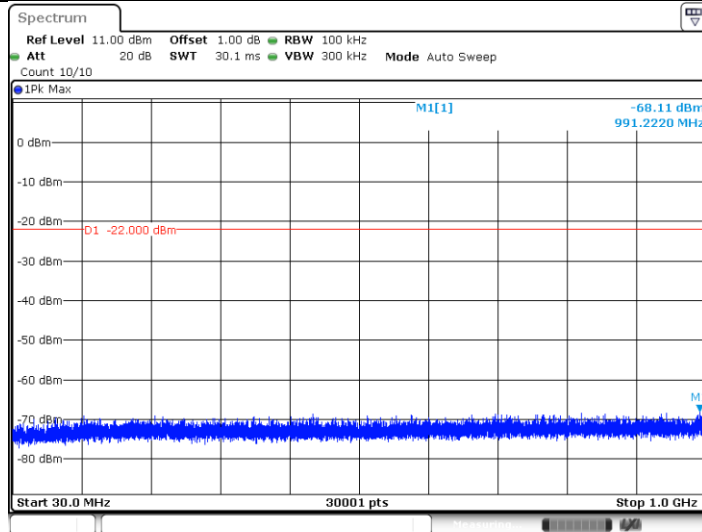


Date: 28 AUG. 2020 16:05:42

11B_Ant1_2437_1000-26500

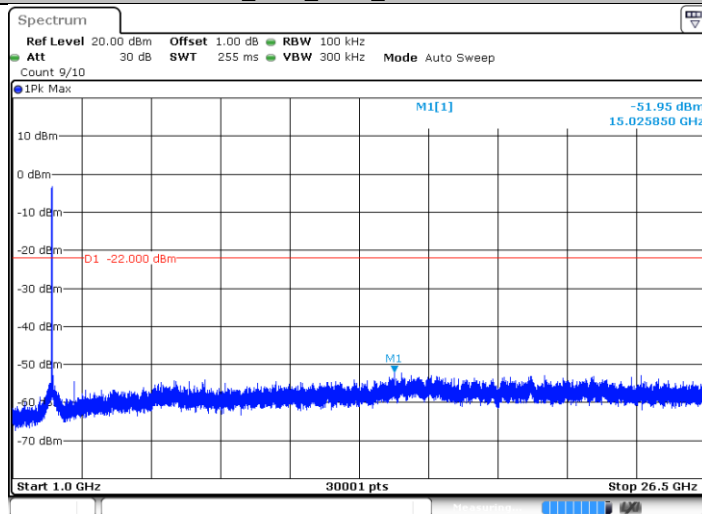


Date: 28 AUG. 2020 16:05:50

11B_Ant1_2462_0-Reference

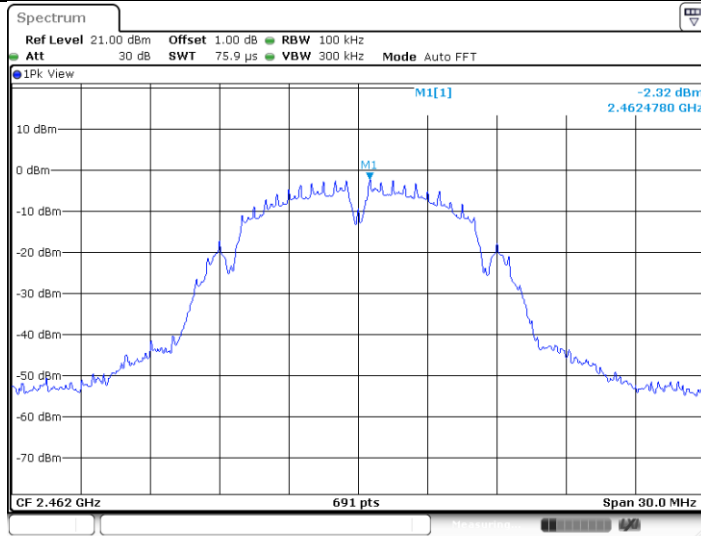


Date: 28 AUG.2020 16:07:18

11B_Ant1_2462_30-1000

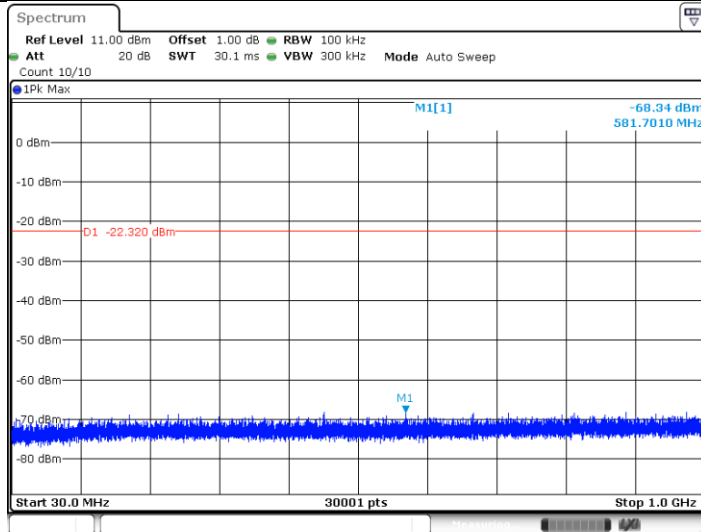


Date: 28 AUG.2020 16:07:24

11B_Ant1_2462_1000-26500

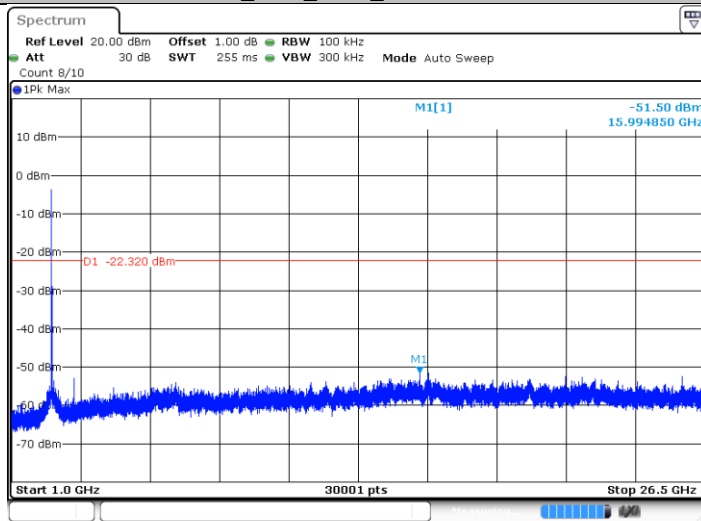


Date: 28 AUG.2020 16:07:32

11G_Ant1_2412_0~Reference

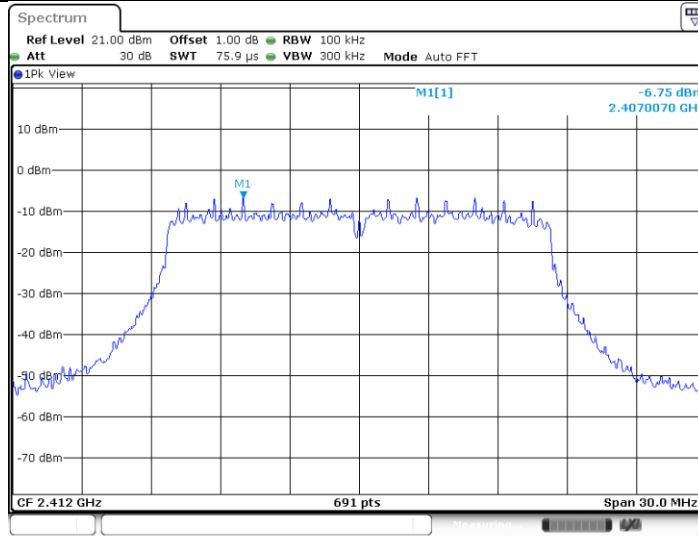


Date: 28 AUG.2020 16:11:36

11G_Ant1_2412_30~1000

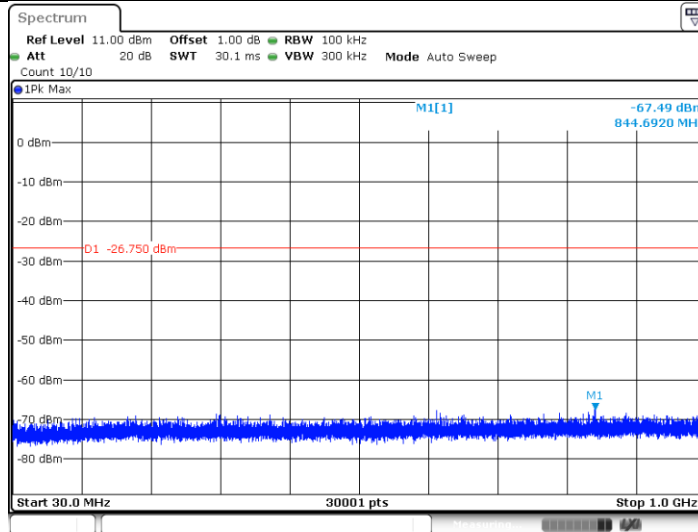


Date: 28 AUG.2020 16:11:42

11G_Ant1_2412_1000~26500

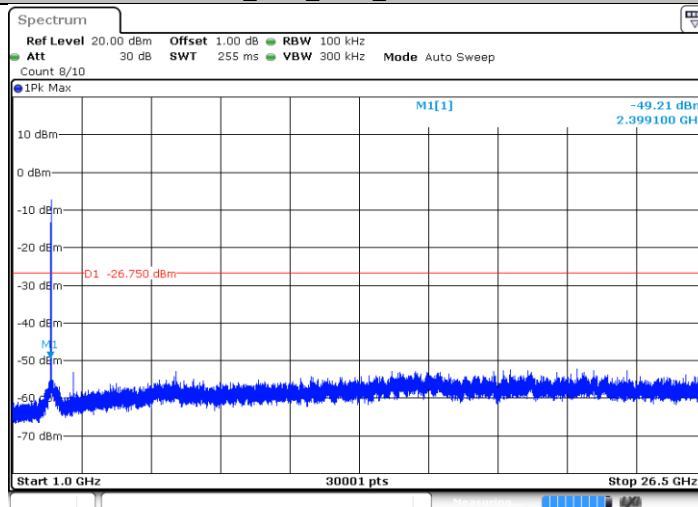


Date: 28 AUG.2020 16:11:49

11G_Ant1_2437_0~Reference

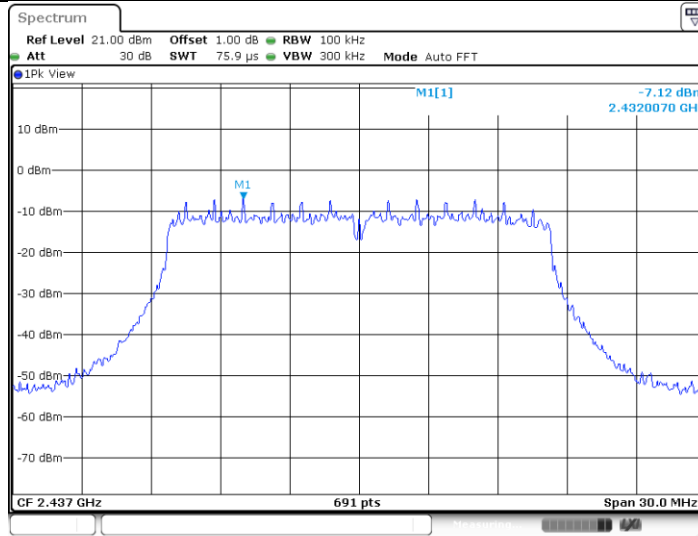


Date: 28 AUG.2020 16:15:01

11G_Ant1_2437_30~1000

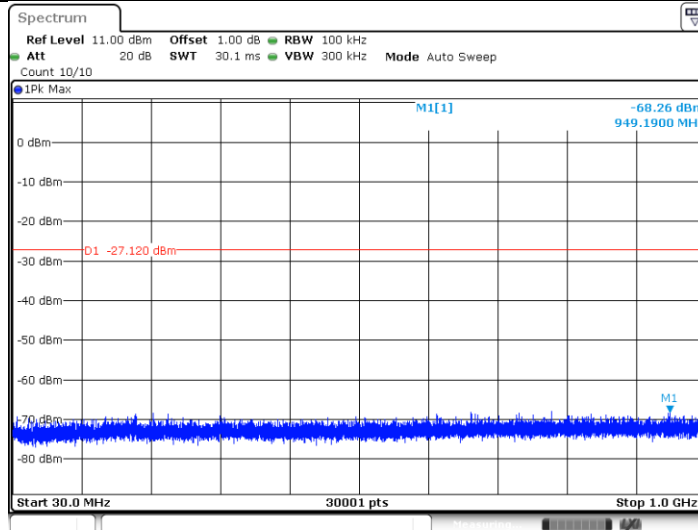


Date: 28 AUG.2020 16:15:07

11G_Ant1_2437_1000~26500

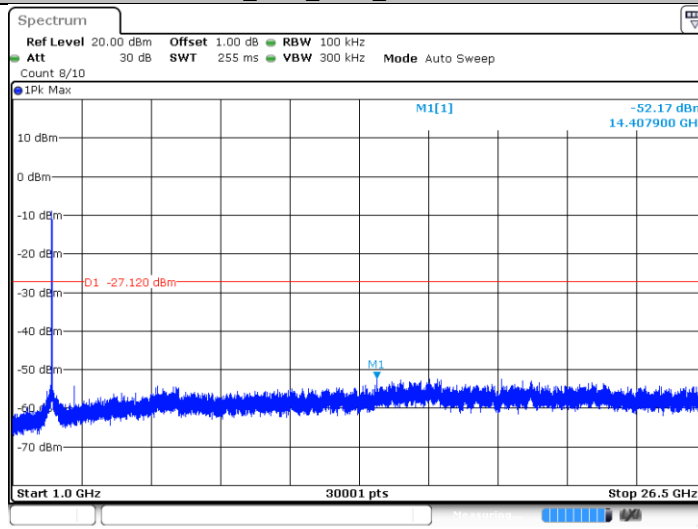


Date: 28 AUG.2020 16:15:15

11G_Ant1_2462_0~Reference

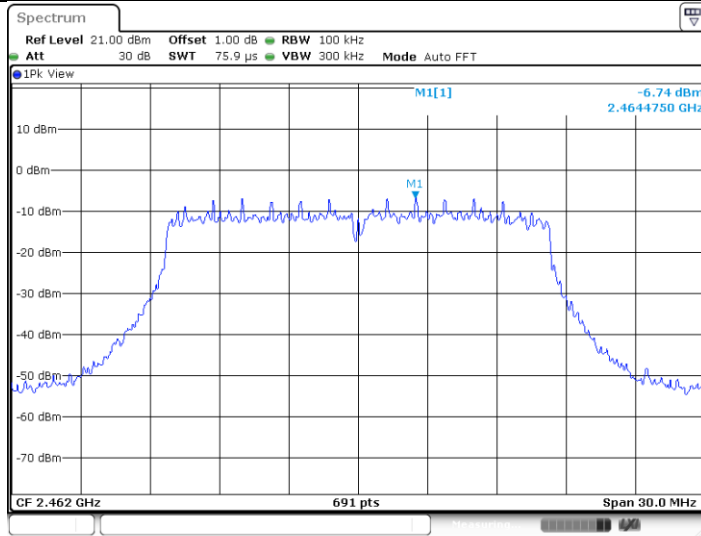


Date: 28 AUG.2020 16:17:22

11G_Ant1_2462_30~1000

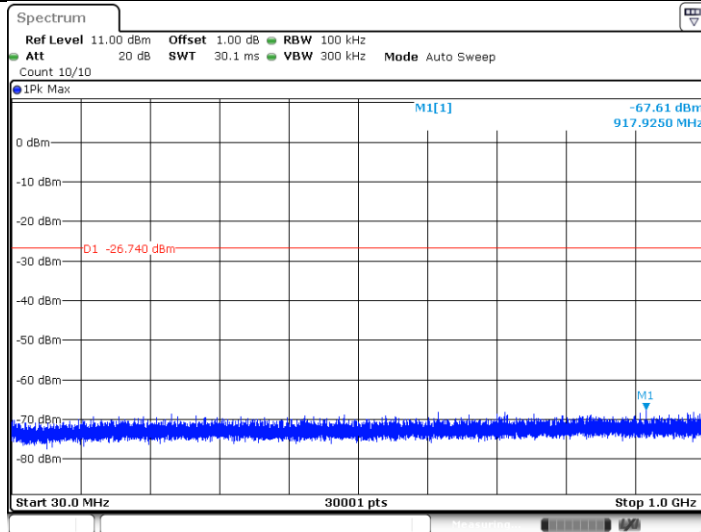


Date: 28 AUG.2020 16:17:28

11G_Ant1_2462_1000~26500

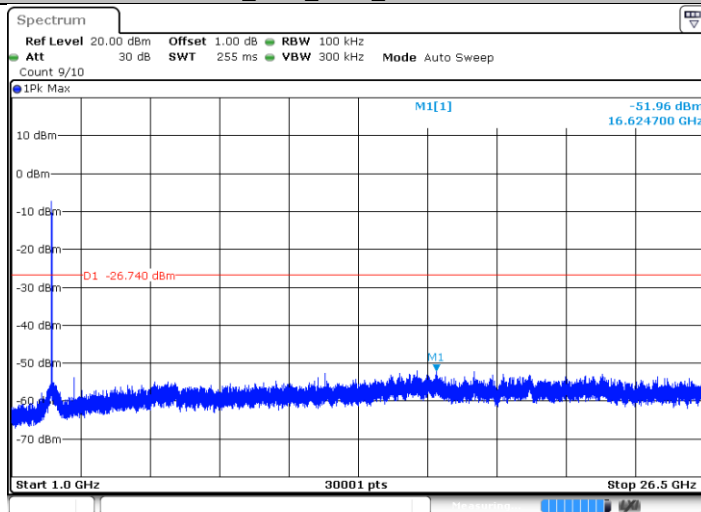


Date: 28 AUG.2020 16:17:36

11N20SISO_Ant1_2412_0~Reference

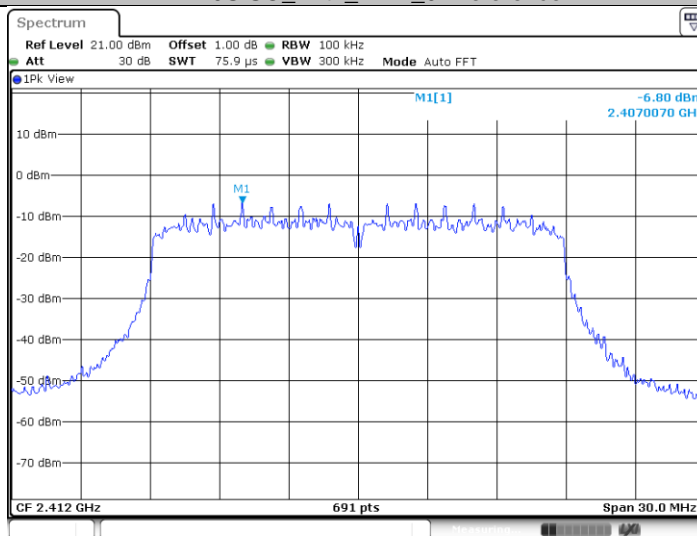


Date: 28 AUG.2020 16:19:09

11N20SISO_Ant1_2412_30~1000

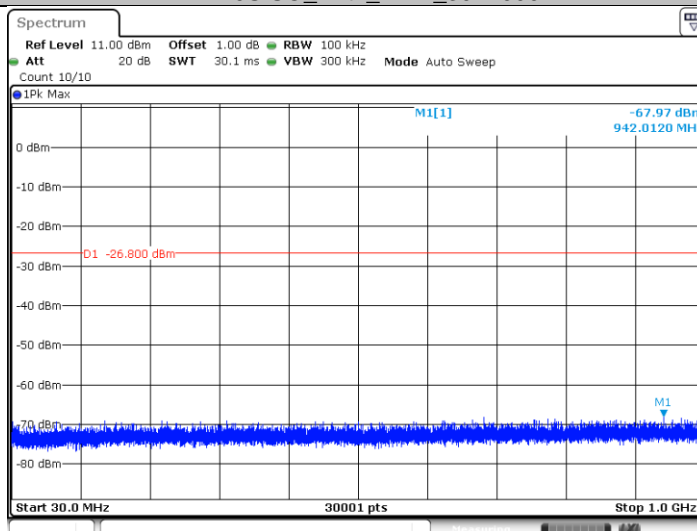


Date: 28 AUG.2020 16:19:15

11N20SISO_Ant1_2412_1000~26500

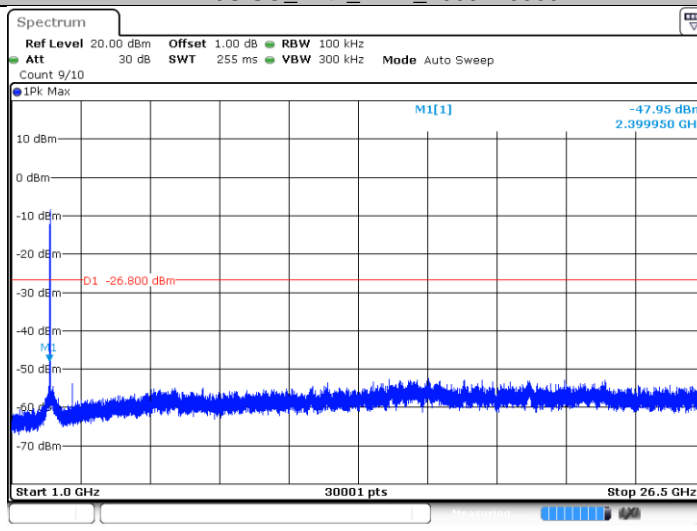


Date: 28 AUG.2020 16:19:23

11N20SISO_Ant1_2437_0~Reference

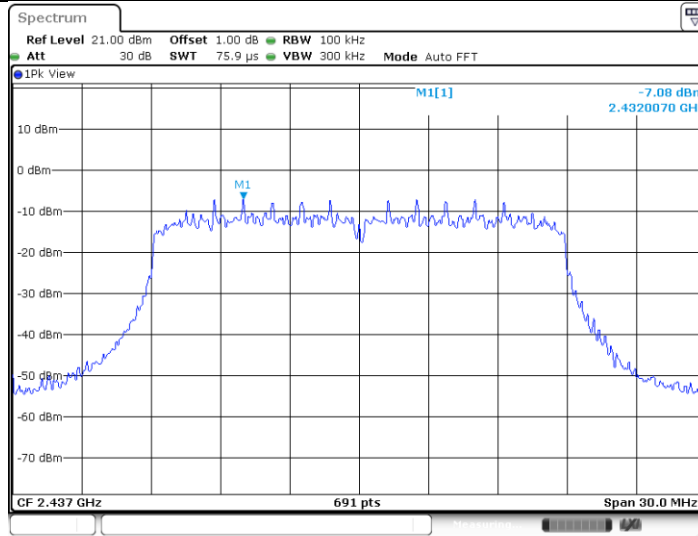


Date: 28 AUG.2020 16:20:43

11N20SISO_Ant1_2437_30~1000

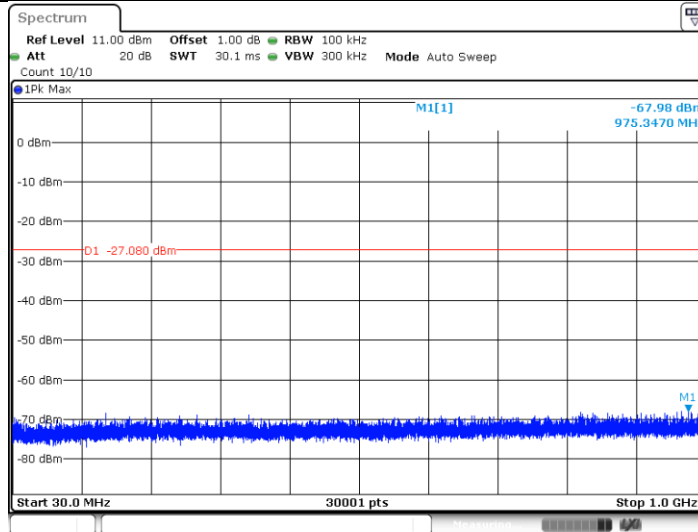


Date: 28 AUG.2020 16:20:49

11N20SISO_Ant1_2437_1000~26500

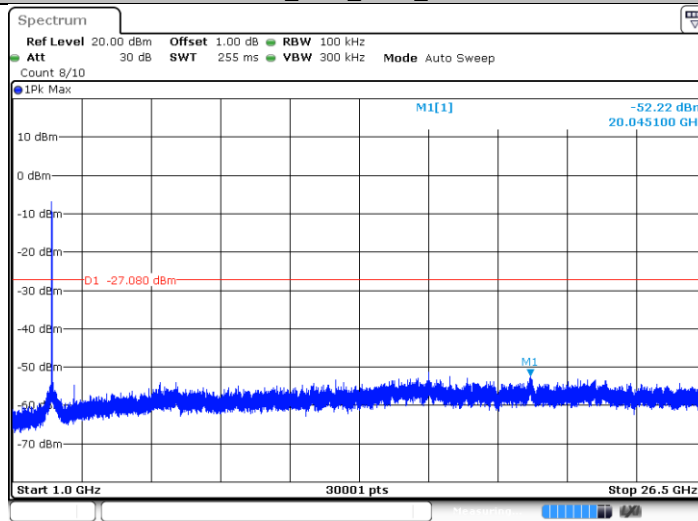


Date: 28 AUG.2020 16:20:57

11N20SISO_Ant1_2462_0~Reference

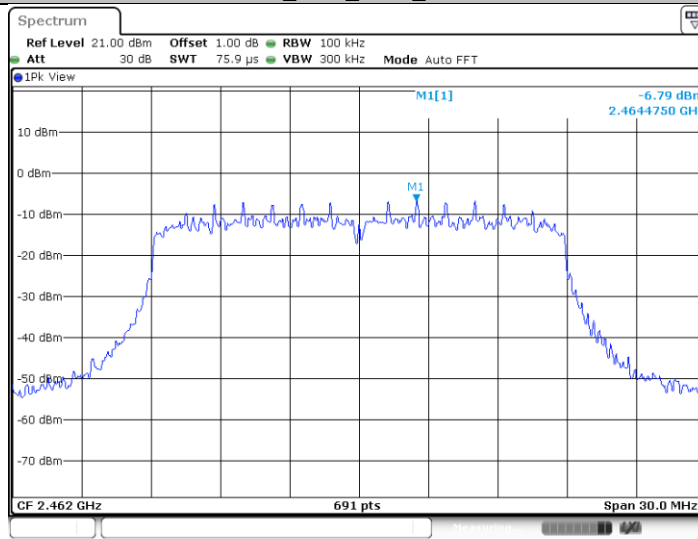


Date: 28 AUG.2020 16:22:35

11N20SISO_Ant1_2462_30~1000

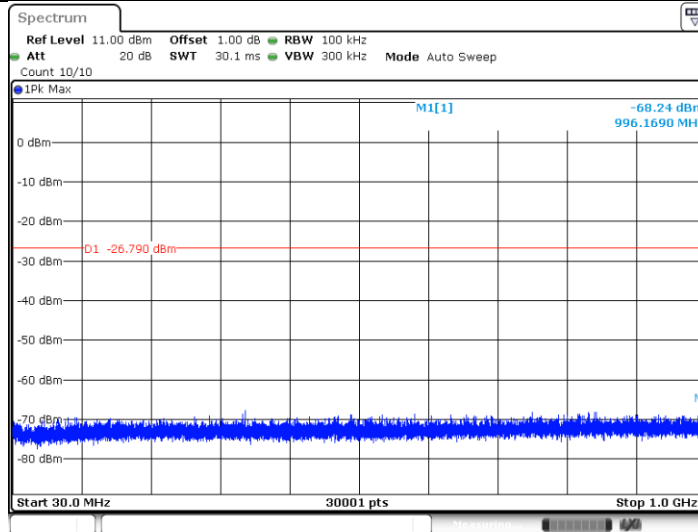

Date: 28 AUG.2020 16:22:41

11N20SISO_Ant1_2462_1000~26500

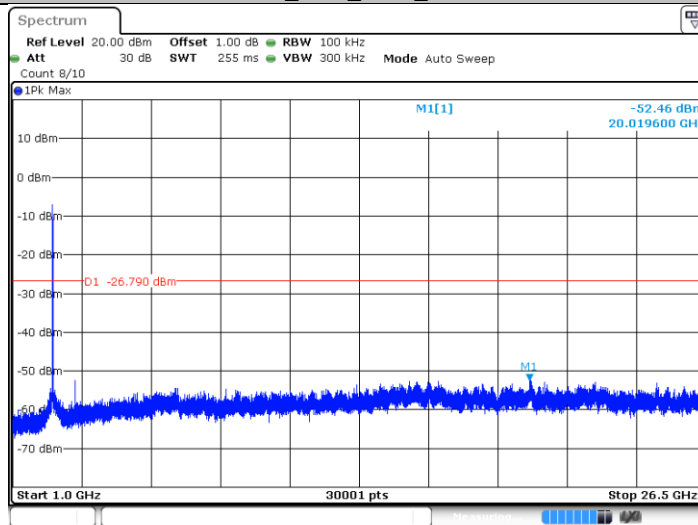

Date: 28 AUG.2020 16:22:49

9.5 Band edge testing

Test Method

1. Connect EUT test port to spectrum analyzer.
2. Set spectrum analyzer setting as below:
Set $RBW \geq 1\%$ of the span, $VBW \geq RBW$.
Set Sweep = auto. Set Detector function = peak. Allow the trace to stabilize.
Set Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
3. Repeat above procedures until all frequencies measured were complete.

Limit:

Frequency Range MHz	Limit (dBc)
30-25000	-20


Band edge testing

Test result

Test Mode	Antenna	ChName	Channel (MHz)	RefLevel (dBm)	Result (dBm)	Limit (dBm)	Verdict
11B	Ant1	Low	2412	-2.10	-51.24	<=-32.1	PASS
		High	2462	-3.05	-53.75	<=-33.05	PASS
11G	Ant1	Low	2412	-6.92	-49.29	<=-36.92	PASS
		High	2462	-6.93	-53.81	<=-36.93	PASS
11N20	Ant1	Low	2412	-6.54	-48.68	<=-36.54	PASS
		High	2462	-6.87	-53.84	<=-36.87	PASS


Test Graphs

11B_Ant1_Low_2412

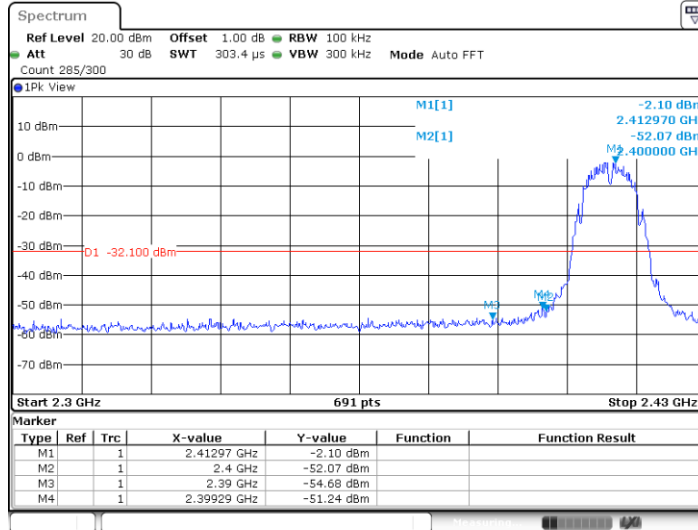


Date: 28 AUG.2020 16:03:52

11B_Ant1_High_2462

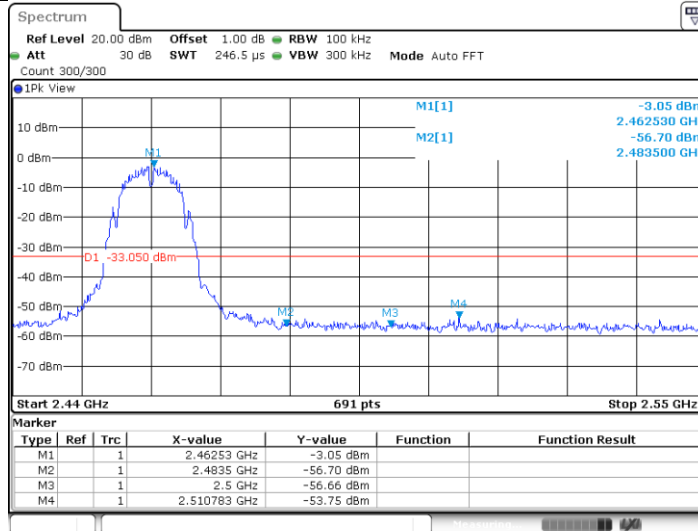


Date: 28 AUG.2020 16:07:13

11G_Ant1_Low_2412

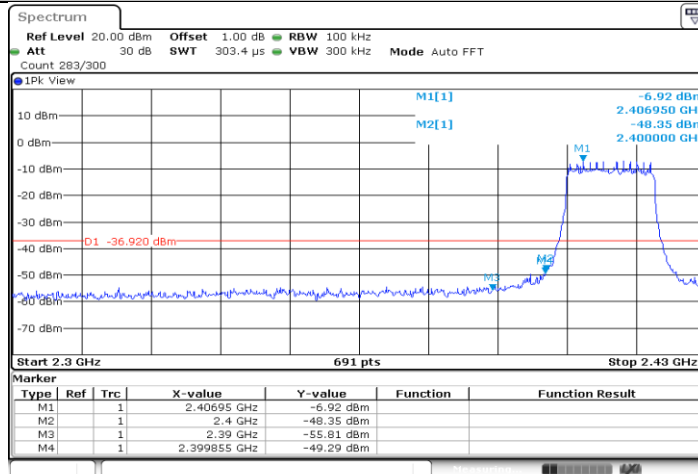


Date: 28 AUG.2020 16:11:30

11G_Ant1_High_2462

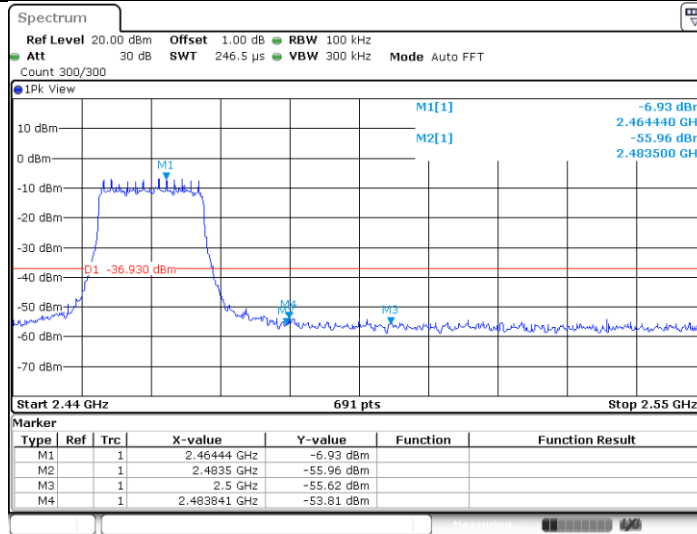


Date: 28 AUG.2020 16:17:17

11N20SISO_Ant1_Low_2412

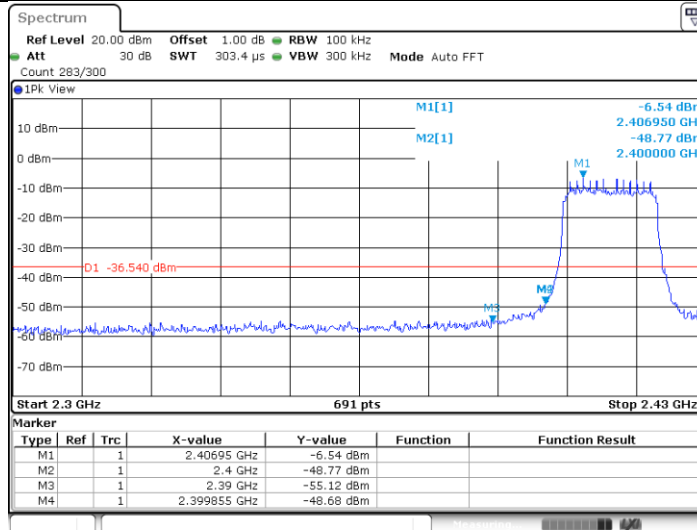

Date: 28 AUG.2020 16:19:03

11N20SISO_Ant1_High_2462

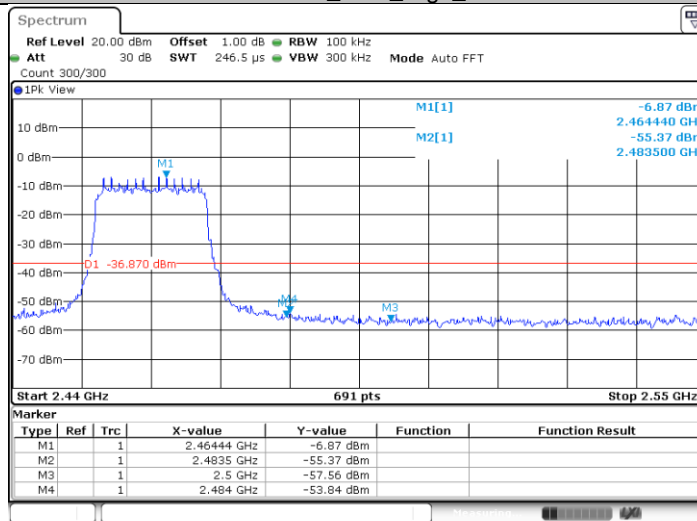

Date: 28 AUG.2020 16:22:29

9.6 Spurious radiated emissions for transmitter

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1 MHz.
- b) VBW \ [3 × RBW].
- c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:
 - 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is [10 log (1 / D)], where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

Frequency MHz	Field Strength uV/m	Field Strength dB μ V/m	Detector
30-88	100	40	QP
88-216	150	43.5	QP
216-960	200	46	QP
960-1000	500	54	QP
Above 1000	500	54	AV
Above 1000	5000	74	PK

Spurious radiated emissions for transmitter

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.


Pretest all modulation type, report the data of the worst case(802.11b).

Transmitting spurious emission test result as below:


For model: 0384

802.11b Modulation:

Emission below 1GHz

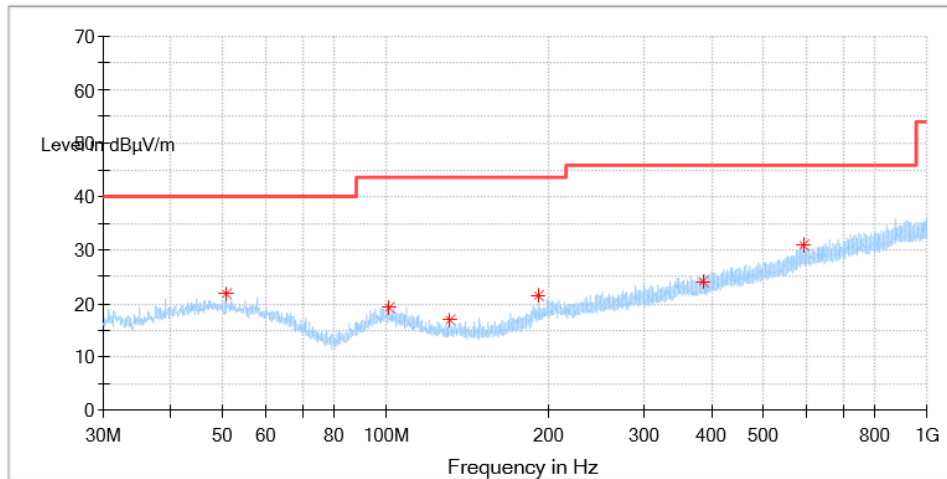


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.733750	21.97	40.00	18.03	200.0	H	0.0	18
101.416250	19.35	43.50	24.15	100.0	H	126.0	16
131.243750	16.98	43.50	26.52	100.0	H	196.0	13
191.201875	21.49	43.50	22.01	200.0	H	64.0	16
386.232500	24.16	46.00	21.84	200.0	H	134.0	21
591.508750	30.84	46.00	15.16	100.0	H	0.0	25

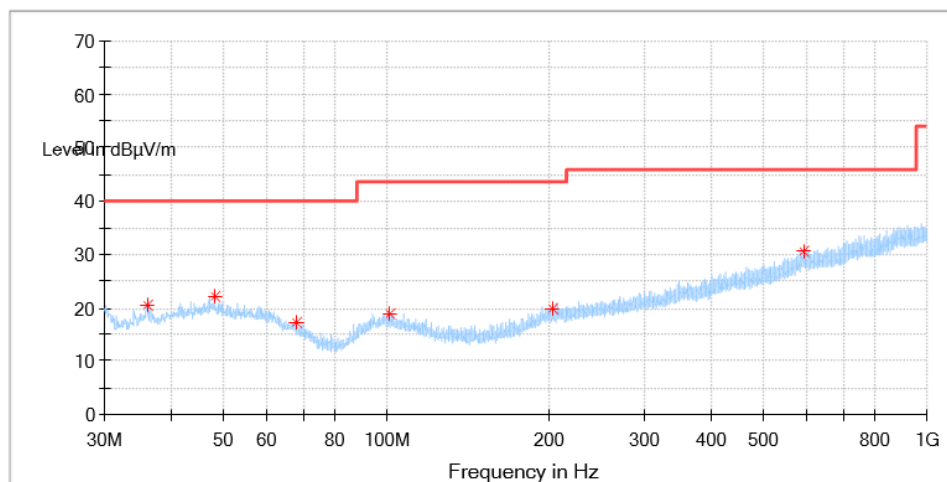


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.001875	20.49	40.00	19.51	100.0	V	148.0	15
48.066250	22.11	40.00	17.89	100.0	V	101.0	18
68.133125	17.26	40.00	22.74	200.0	V	294.0	15
101.295000	18.93	43.50	24.57	200.0	V	218.0	16
202.417500	19.73	43.50	23.77	200.0	V	345.0	17
591.387500	30.67	46.00	15.33	100.0	V	0.0	25

Emission between 1G-25GHz

802.11b Modulation:
2412MHz Test Result

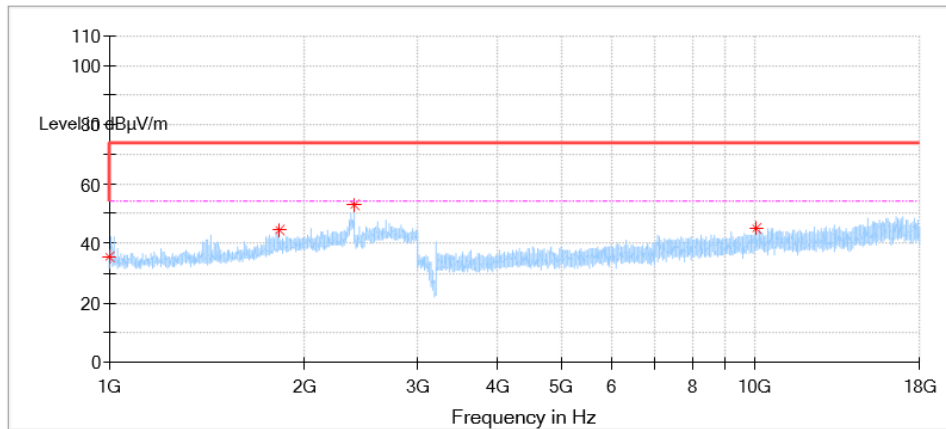


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1000.000000	35.60	54.00	38.40	150.0	H	351.0	-10.2
1835.238095	44.45	74.00	29.55	150.0	H	179.0	-5.5
2402.380952	52.90	74.00	21.10	150.0	H	269.0	-3.1
10058.500000	45.01	74.00	28.99	150.0	H	329.0	9.3

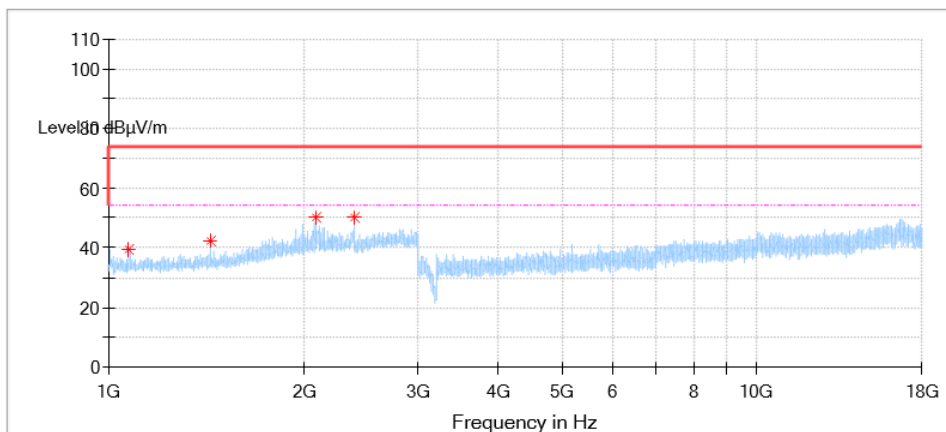


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1077.142857	39.57	74.00	34.43	150.0	V	163.0	-9.8
1440.000000	42.56	74.00	31.44	150.0	V	191.0	-8.5
2091.428571	50.13	74.00	23.87	150.0	V	185.0	-4.1
2402.380952	50.35	74.00	23.65	150.0	V	145.0	-3.1

2437MHz Test Result

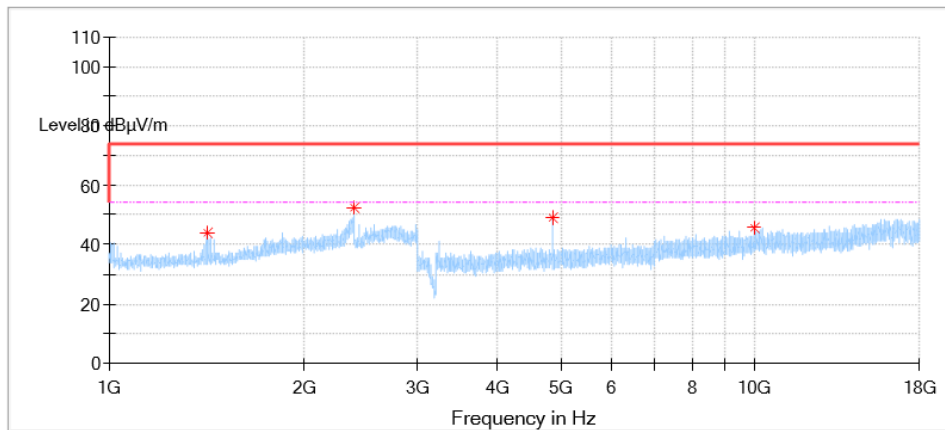


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1416.190476	43.88	74.00	30.12	150.0	H	264.0	-8.5
2402.380952	52.60	74.00	21.41	150.0	H	352.0	-3.1
4874.000000	48.83	74.00	25.17	150.0	H	276.0	1.1
9986.000000	45.54	74.00	28.46	150.0	H	179.0	8.5

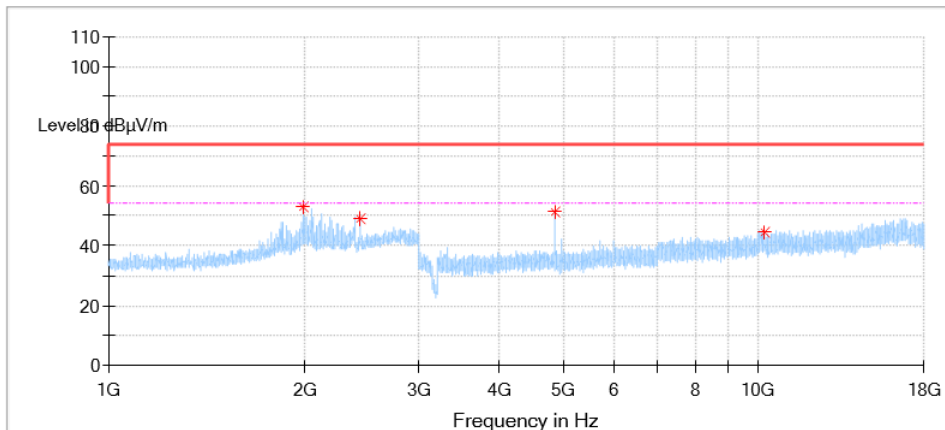


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1990.476191	52.95	74.00	21.05	150.0	V	194.0	-4.1
2443.809524	49.03	74.00	24.97	150.0	V	293.0	-3.1
4874.000000	51.54	74.00	22.46	150.0	V	238.0	1.1
10214.500000	44.80	74.00	29.20	150.0	V	182.0	9.0

2462MHz Test Result

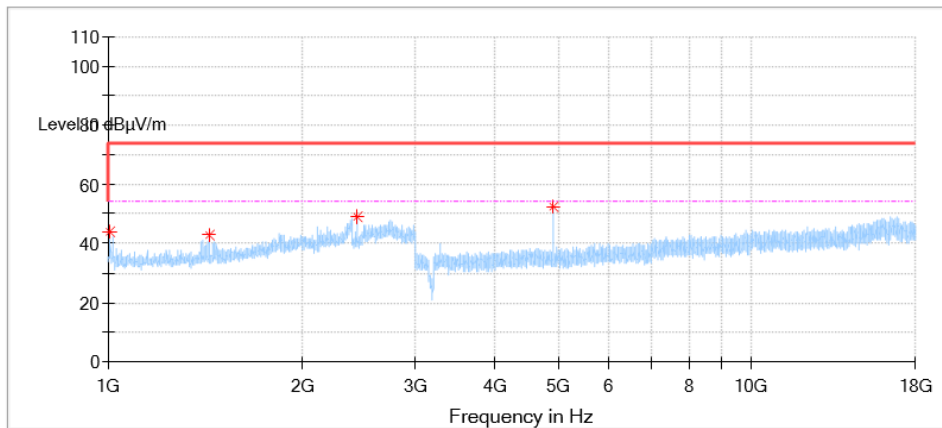

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1008.095238	44.28	74.00	29.72	150.0	H	352.0	-10.2
1440.000000	42.87	74.00	31.13	150.0	H	213.0	-8.5
2443.333333	49.24	74.00	24.76	150.0	H	220.0	-3.1
4924.000000	52.44	74.00	21.56	150.0	H	132.0	1.1

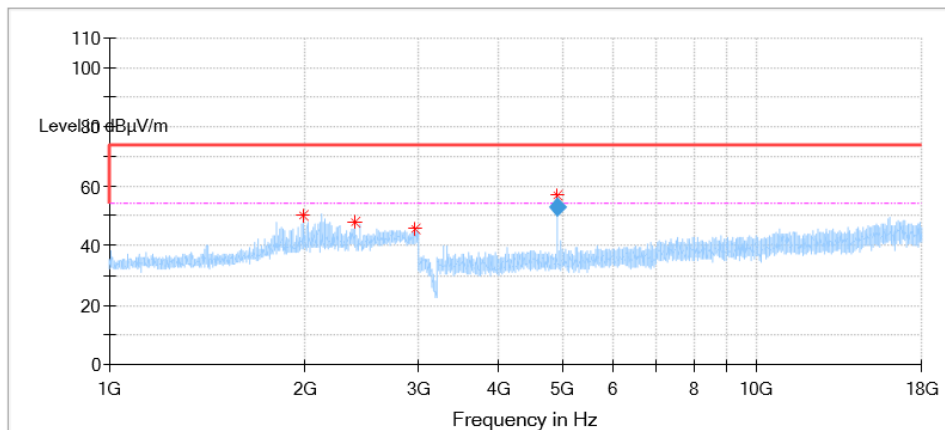

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1995.238095	50.37	74.00	23.63	150.0	V	205.0	-4.1
2402.380952	47.87	74.00	26.13	150.0	V	33.0	-3.1
2968.095238	45.43	74.00	28.57	150.0	V	190.0	-1.5
4924.000000	57.05	74.00	16.95	150.0	V	238.0	1.1
Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4924.000000	53.04	54.00	0.96	150.0	V	238.0	1.1

Remark:

- (1) Data of measurement within frequency range 18Hz-26GHz are the noise floor or attenuated more than 10dB below the permissible limits or the field strength is too small to be measured.
- (2) Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

10 Test Equipment List

List of Test Instruments

Radiated Emission Test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101031	2021-6-22
High Pass Filter (HPF)	UCL	UCL-BPF1-7G	1504005103	2021-7-3
Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9163	707	2021-8-5
Horn Antenna	Rohde & Schwarz	HF907	102295	2021-8-5
Wideband Horn Antenna	Q-PAR	QWH-SL-18-40-K-SG	12827	2021-9-2
Pre-amplifier	Rohde & Schwarz	SCU 18	102230	2021-6-21
Pre-amplifier	Rohde & Schwarz	SCU 40A	100432	2021-7-30
Attenuator	Agilent	8491A	MY39264334	2022-12-6
3m Semi-anechoic chamber	TDK	9X6X6	----	2022-12-6
Test software	Rohde & Schwarz	EMC32	Version 9.15.00	N/A

RF conducted test

DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DUE DATE
Signal Analyzer	Rohde & Schwarz	FSV40	101030	2021-6-21
RF Switch Module	Rohde & Schwarz	OSP120/OSP-B157	101226/100851	2021-6-21
Power Splitter	Weinschel	1580	SC319	2021-7-16
Vector Signal Generator	Rohde & Schwarz	SMBV100A	262825	2021-6-21
Test software	Tonscend	System for BT/WIFI	Version 2.6	N/A

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- 20dB bandwidth and 99% Occupied Bandwidth
- Carrier frequency separation
- Number of hopping frequencies
- Dwell Time
- Power spectral density
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty for Radiated Spurious Emission 25MHz-3000MHz	Horizontal: 4.80dB; Vertical: 4.87dB;
Uncertainty for Radiated Spurious Emission 3000MHz-18000MHz	Horizontal: 4.59dB; Vertical: 4.58dB;
Uncertainty for Radiated Spurious Emission 18000MHz-40000MHz	Horizontal: 5.05dB; Vertical: 5.04dB;
Uncertainty for Conducted RF test with TS 8997	RF Power Conducted: 1.16dB Frequency test involved: 0.6×10^{-7} or 1%
Uncertainty Evaluation for Power Spectral Density Conducted measurement	1.17dB
Uncertainty Evaluation for Spurious emissions Conducted measurement	1.43dB