

---

# FCC Test Report

---

Report No.: AGC03776150601FE01

**FCC ID** : 2ADUTLGPBU40  
**PRODUCT DESIGNATION** : Panda Wireless Bluetooth 4.0 USB Adapter  
**BRAND NAME** : Panda Wireless  
**MODEL NAME** : PBU40  
**CLIENT** : Panda Wireless, Inc.  
**DATE OF ISSUE** : July 29,2015  
**STANDARD(S)** : FCC Part 15 Rules  
**REPORT VERSION** : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	July 29,2015	Valid	Original Report

## TABLE OF CONTENTS


<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. SYSTEM DESCRIPTION .....</b>	<b>5</b>
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>5</b>
<b>4. PRODUCT INFORMATION .....</b>	<b>6</b>
<b>5. SUPPORT EQUIPMENT.....</b>	<b>7</b>
<b>7. FCCLINE CONDUCTED EMISSION TEST .....</b>	<b>9</b>
7.1. LIMITS OF LINE CONDUCTED EMISSION TEST .....	9
7.2. BLOCK DIAGRAM OF TEST SETUP .....	9
7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST .....	10
7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST .....	11
<b>8. FCC RADIATED EMISSION TEST.....</b>	<b>13</b>
8.1. LIMITS OF RADIATED EMISSION TEST .....	13
8.2. BLOCK DIAGRAM OF TEST SETUP .....	13
8.3. PROCEDURE OF RADIATED EMISSION TEST .....	14
8.4. TEST RESULT OF RADIATED EMISSION TEST .....	15
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>19</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT.....</b>	<b>21</b>


## 1. VERIFICATION OF CONFORMITY


<b>Applicant</b>	Panda Wireless, Inc.
<b>Address</b>	15559 Union Ave, Suite 300, Los Gatos, CA 95032, USA
<b>Manufacturer</b>	Panda Wireless, Inc.
<b>Address</b>	15559 Union Ave, Suite 300, Los Gatos, CA 95032, USA
<b>Product Designation</b>	Panda Wireless Bluetooth 4.0 USB Adapter
<b>Brand Name</b>	Panda Wireless
<b>Test Model</b>	PBU40
<b>Measurement Procedure</b>	ANSI C63.4: 2009
<b>Date of test</b>	Jul 17,2015 to Jul 18,2015
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Report Template</b>	AGCRT-US-IT/AC(2013-03-01)

The above equipment was tested by Compliance Certification Service(Shenzhen) Inc. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2009. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By   
\_\_\_\_\_  
Time Huang(Huang Nanhui) July 29,2015

Checked By   
\_\_\_\_\_  
Forrest Lei(Lei Yonggang) July 29,2015

Authorized By   
\_\_\_\_\_  
Solger Zhang(Zhang Hongyi) July 29,2015

## 2. SYSTEM DESCRIPTION

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	Normal Operation(USB)	V

Note: 1. V means EMI worst mode  
2. Only worst mode data recorded in the test report

## 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB

**4. PRODUCT INFORMATION**

<b>Housing Type</b>	Plastic and metal
<b>Power Supply</b>	DC 5V

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Number	Cable Description	Tested With
--	--	--	--

-

**5. SUPPORT EQUIPMENT**

<b>Device Type</b>	<b>Manufacturer</b>	<b>Model Name</b>	<b>Serial No.</b>	<b>Data Cable</b>	<b>Power Cable</b>
PC	LENOVO	SL410K	--	--	--

**6. TEST FACILITY**

<b>Site</b>	Compliance Certification Service(Shenzhen) Inc.
<b>Location</b>	No.10-1 Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,Baoan Distr

<b>Radiated Emission Test Site 966(2)</b>					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2015	03/01/2016
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2015	03/17/2016
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2015	03/17/2016
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	07/10/2015	07/09/2016
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/01/2015	03/01/2016
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/01/2015	03/01/2016
Loop Antenna	COM-POWER	AL-130	121044	09/27/2014	09/26/2015
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/28/2015	02/27/2016
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

<b>Conducted Emission Test Site</b>					
<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Last Calibration</b>	<b>Due Calibration</b>
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2015	03/08/2016
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	03/09/2015	03/08/2016
LISN	EMCO	3825/2	8901-1459	03/09/2015	03/08/2016
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2015	03/03/2016
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Note:” -- “means it’s not applicable.



**7. FCCLINE CONDUCTED EMISSION TEST**


**7.1. LIMITS OF LINE CONDUCTED EMISSION TEST**

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

**Note:**

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

**7.2. BLOCK DIAGRAM OF TEST SETUP**

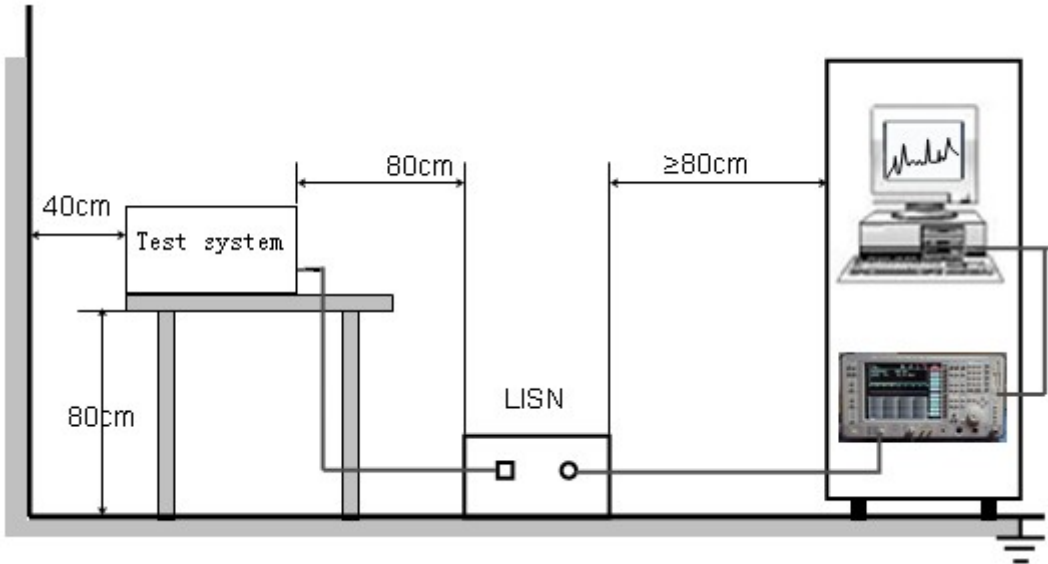


### 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC with receive 120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

### 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST LINE CONDUCTED EMISSION TEST-L

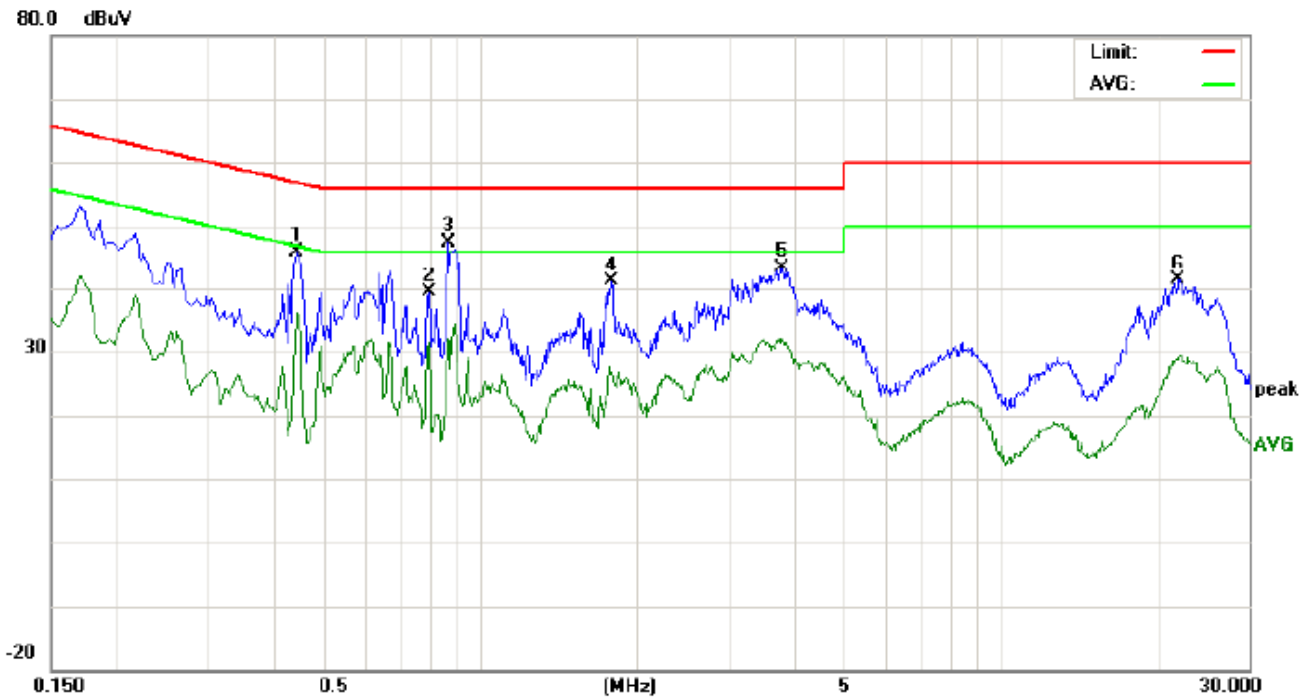


Site: Conduction Phase: **L1** Temperature: 25.3  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 51.8 %  
 EUT: Panda Wireless Bluetooth 4.0 USB Adapter  
 M/N: PBU40  
 Mode: Normal operation(USB)  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4460	35.49		25.77	10.36	45.85		36.13	56.95	46.95	-11.10	-10.82	P	
2	0.7980	29.02		21.00	10.28	39.30		31.28	56.00	46.00	-16.70	-14.72	P	
3	0.8700	37.11		21.70	10.37	47.48		32.07	56.00	46.00	-8.52	-13.93	P	
4	1.7820	30.84		16.34	10.29	41.13		26.63	56.00	46.00	-14.87	-19.37	P	
5	3.8020	32.91		21.45	10.46	43.37		31.91	56.00	46.00	-12.63	-14.09	P	
6	21.9540	31.29		18.88	10.12	41.41		29.00	60.00	50.00	-18.59	-21.00	P	

**RESULT: PASS**

LINE CONDUCTED EMISSION TEST-N

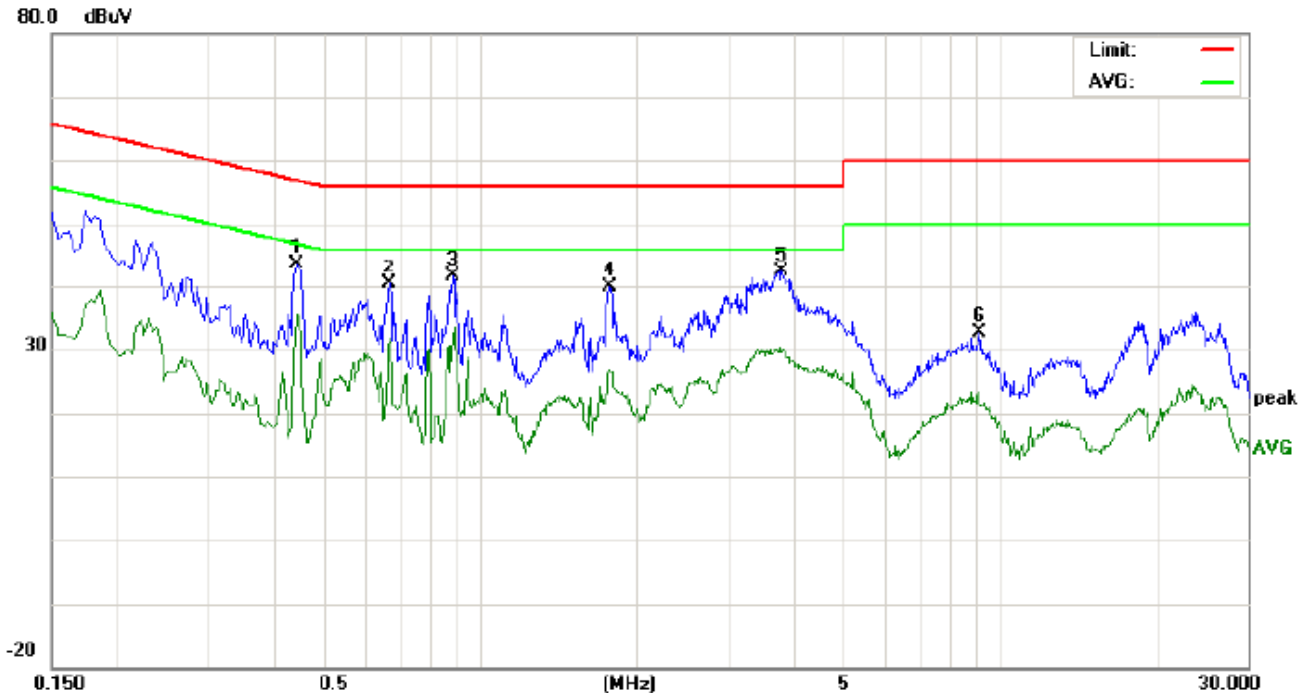

Site: Conduction Phase: **N** Temperature: 25.3  
 Limit: FCC Class B Conduction(QP) Power: Humidity: 51.8 %  
 EUT: Panda Wireless Bluetooth 4.0 USB Adapter  
 M/N: PBU40  
 Mode: Normal operation(USB)  
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4460	33.20		25.39	10.36	43.56		35.75	56.95	46.95	-13.39	-11.20	P	
2	0.6700	30.06		21.19	10.34	40.40		31.53	56.00	46.00	-15.60	-14.47	P	
3	0.8860	31.15		21.45	10.39	41.54		31.84	56.00	46.00	-14.46	-14.16	P	
4	1.7780	29.51		16.54	10.29	39.80		26.83	56.00	46.00	-16.20	-19.17	P	
5	3.8100	31.85		19.08	10.46	42.31		29.54	56.00	46.00	-13.69	-16.46	P	
6	9.1499	22.27		11.16	10.26	32.53		21.42	60.00	50.00	-27.47	-28.58	P	

RESULT: PASS

**8. FCC RADIATED EMISSION TEST**


**8.1. LIMITS OF RADIATED EMISSION TEST**

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

Note: The lower limit shall apply at the transition frequency.

**8.2. BLOCK DIAGRAM OF TEST SETUP**

System Diagram of Connections between EUT and Simulators

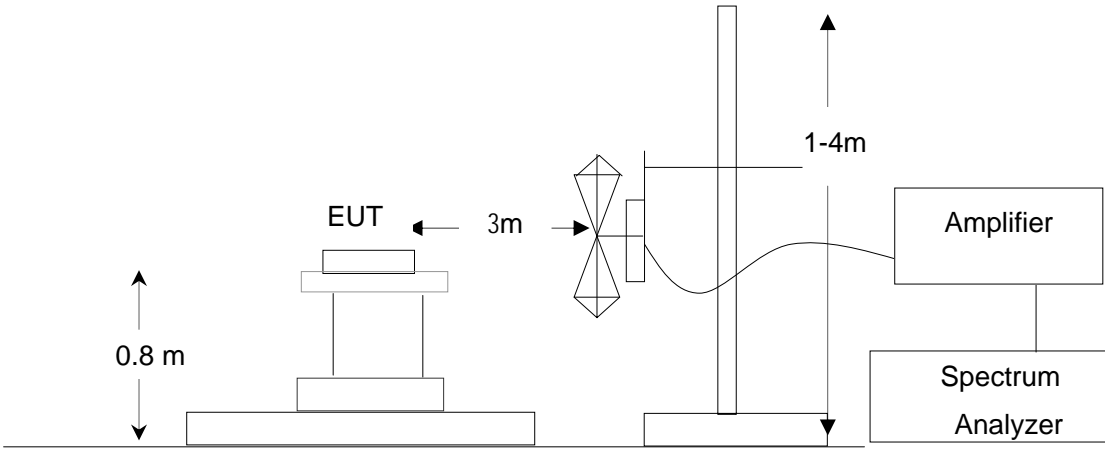

### 8.3. PROCEDURE OF RADIATED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC 5V power from PC with receive 120V/60Hz power from socket under the turntable through a LISN.
- (5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) The test mode(s) were scanned during the test:
- (8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.


The test data of the worst case condition (mode 1) was reported on the Summary Data page.







Radiated Emission Test Above 1GHz-Horizontal

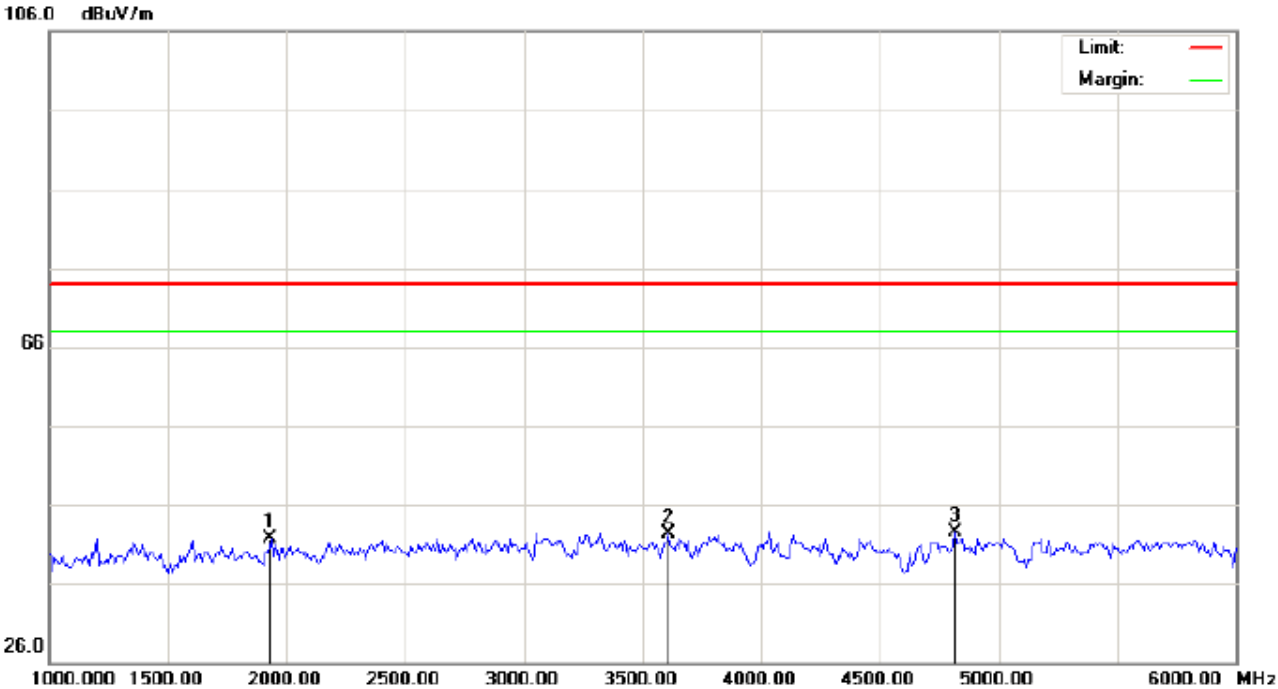

Site: site #1 Polarization: *Horizontal* Temperature: 26  
 Limit: FCC Class B 3M Radiation above 1GHZ(PK) Power: Humidity: 60 %  
 EUT: Panda Wireless Bluetooth 4.0 USB Adapter Distance:  
 M/N: PBU40  
 Mode: Normal operation(USB)  
 Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1933.333	32.59	9.18	41.77	74.00	-32.23	peak			
2		3608.333	29.50	12.78	42.28	74.00	-31.72	peak			
3	*	4816.667	34.70	7.72	42.42	74.00	-31.58	peak			


**RESULT: PASS**



**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

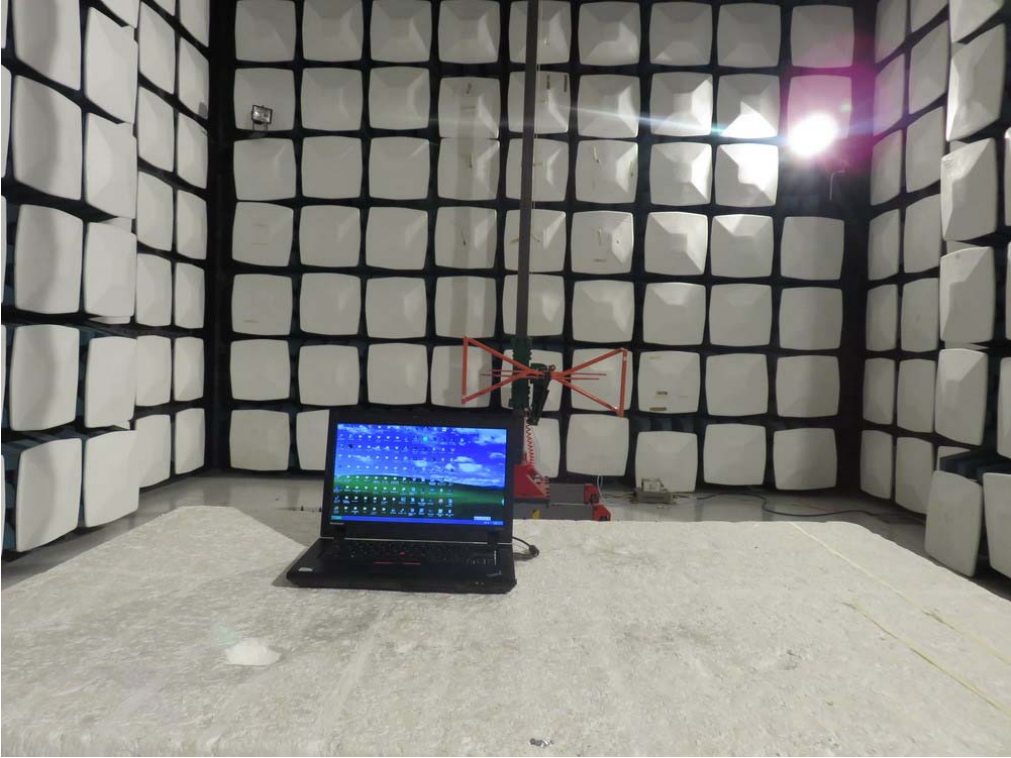





**APPENDIX B: PHOTOGRAPHS OF EUT**  
TOP VIEW OF EUT




BOTTOM VIEW OF EUT

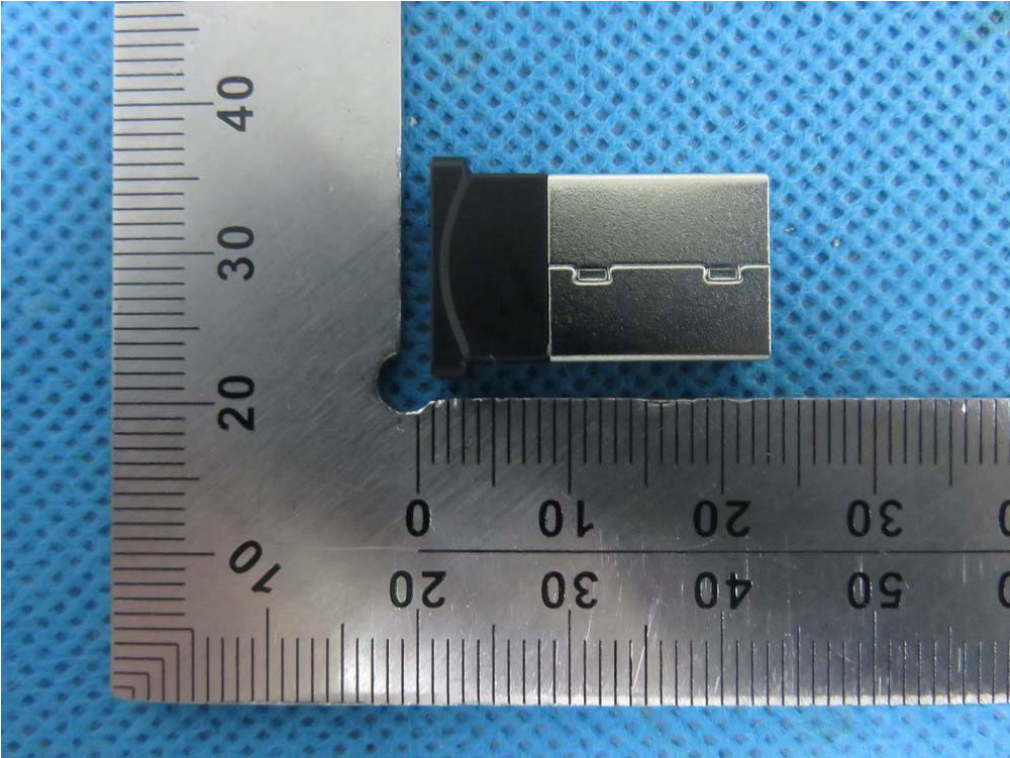

FRONT VIEW OF EUT

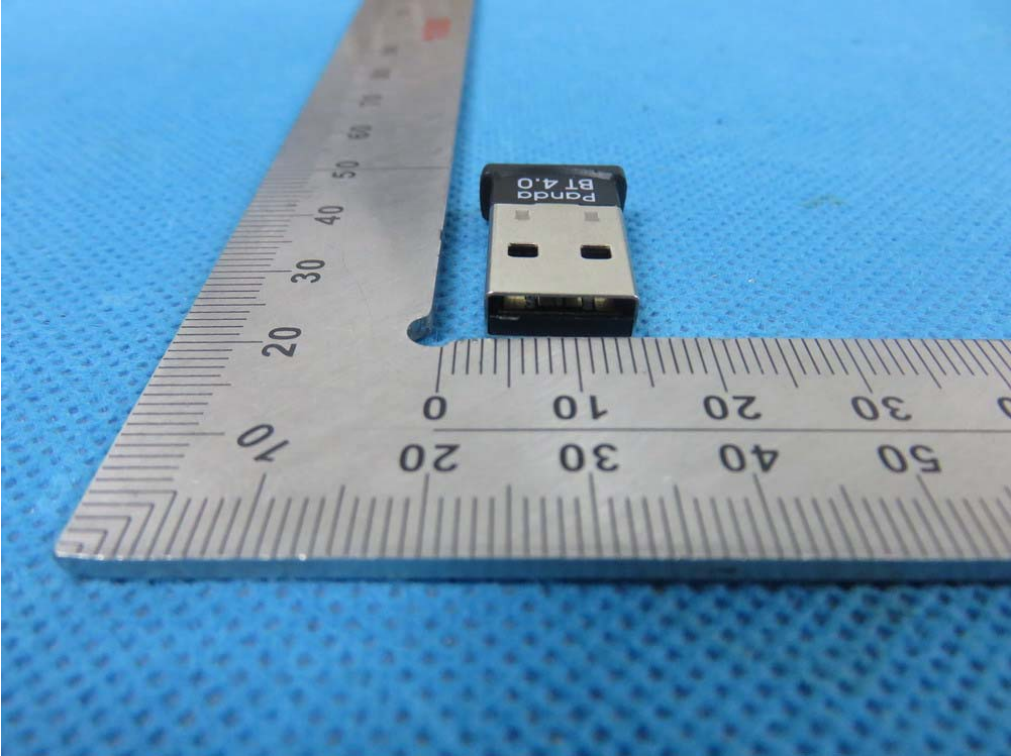


BACK VIEW OF EUT

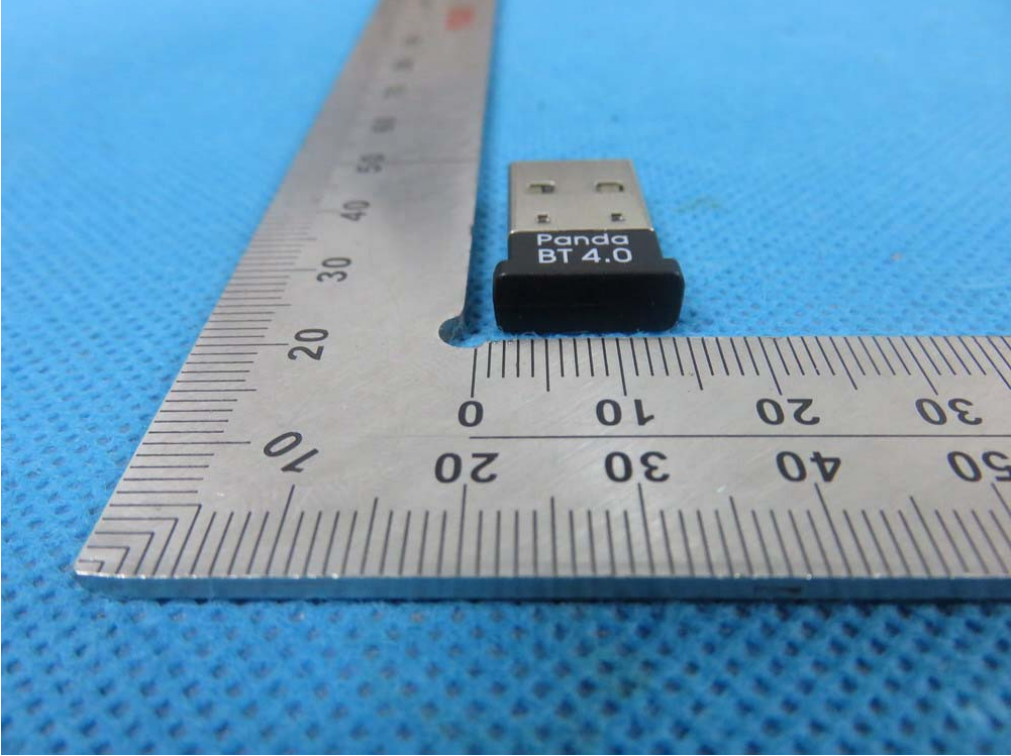





LEFT VIEW OF EUT

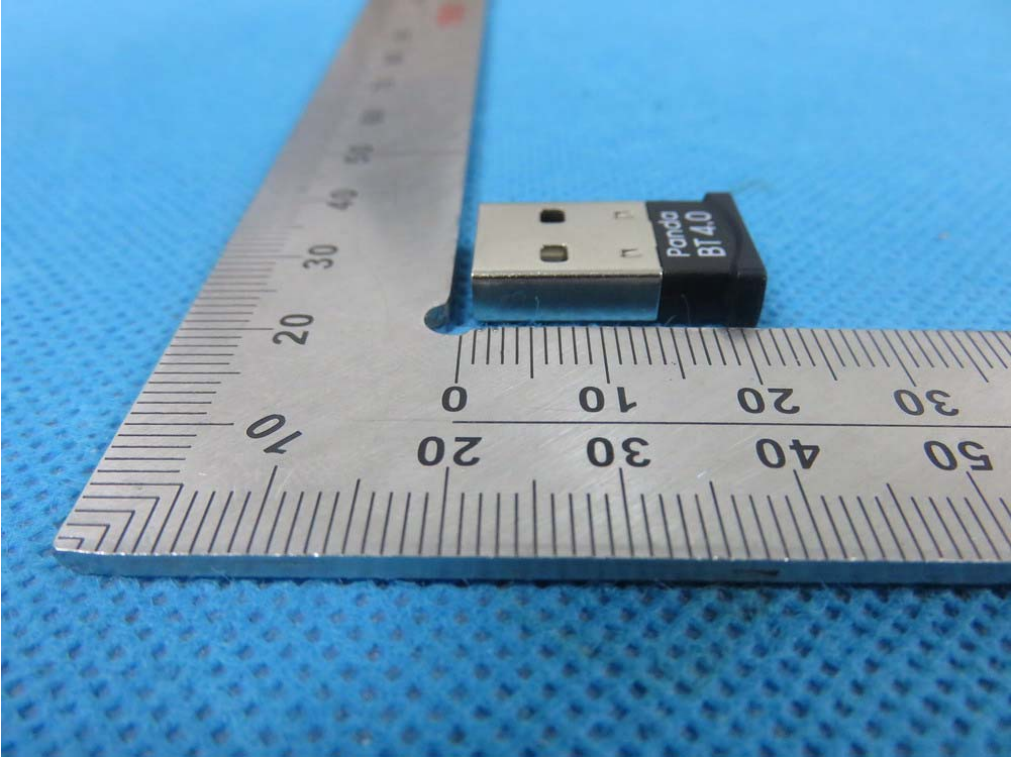


RIGHT VIEW OF EUT

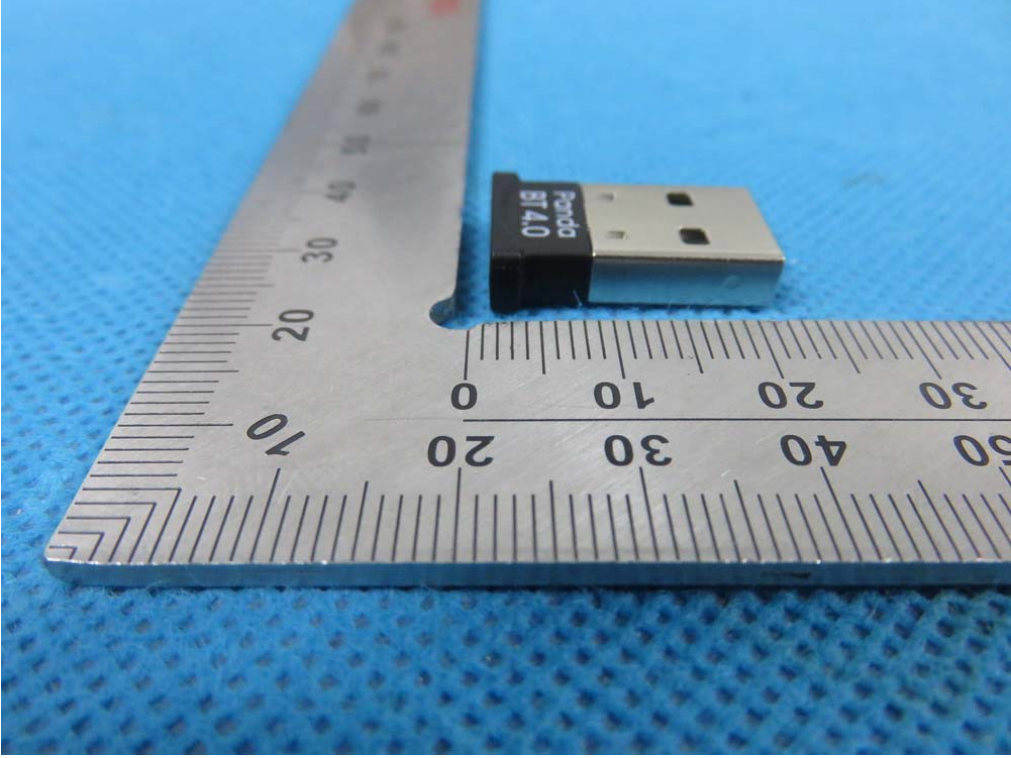

OPEN VIEW OF EUT

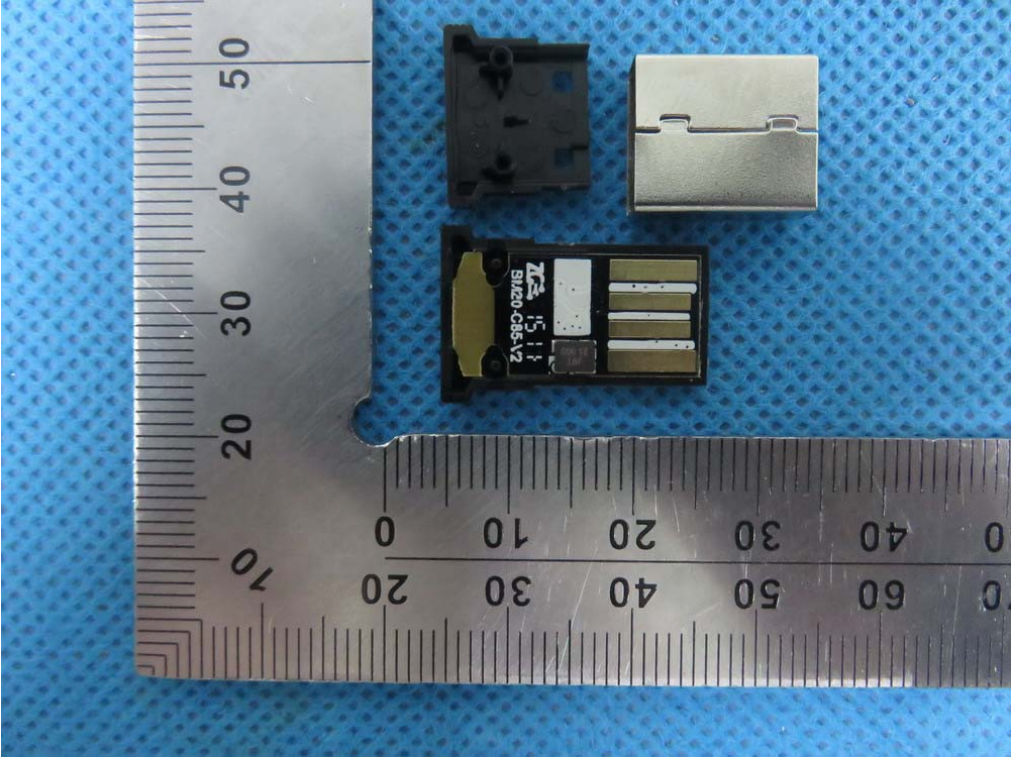


INTERNAL VIEW OF EUT-1

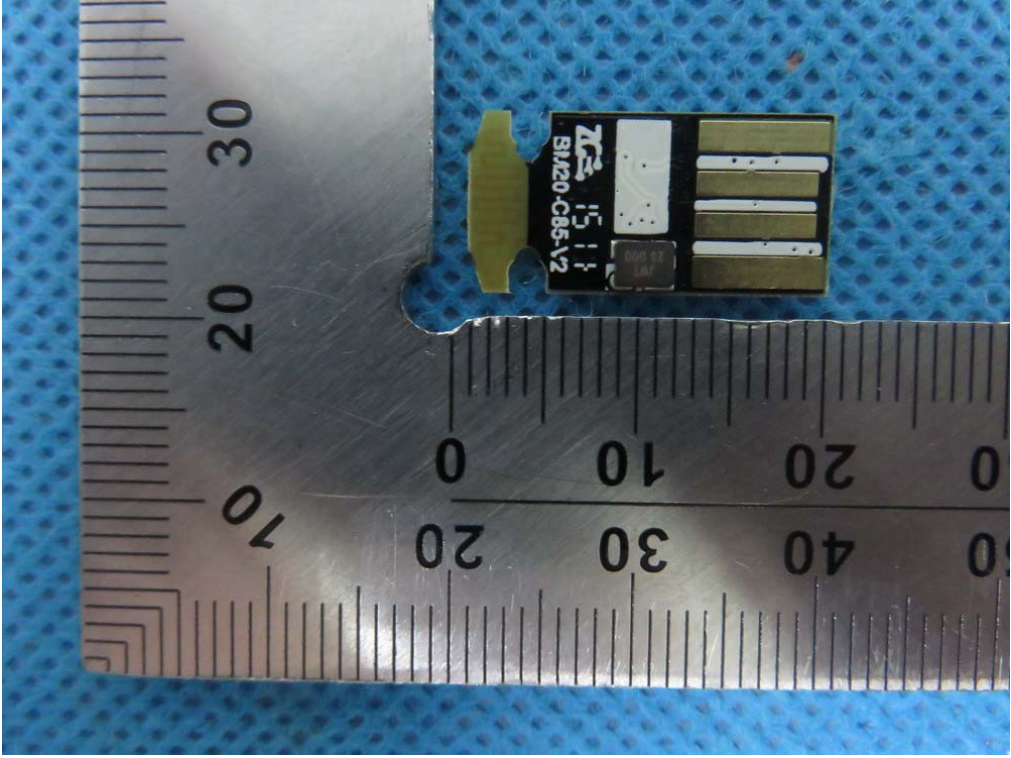




INTERNAL VIEW OF EUT-2

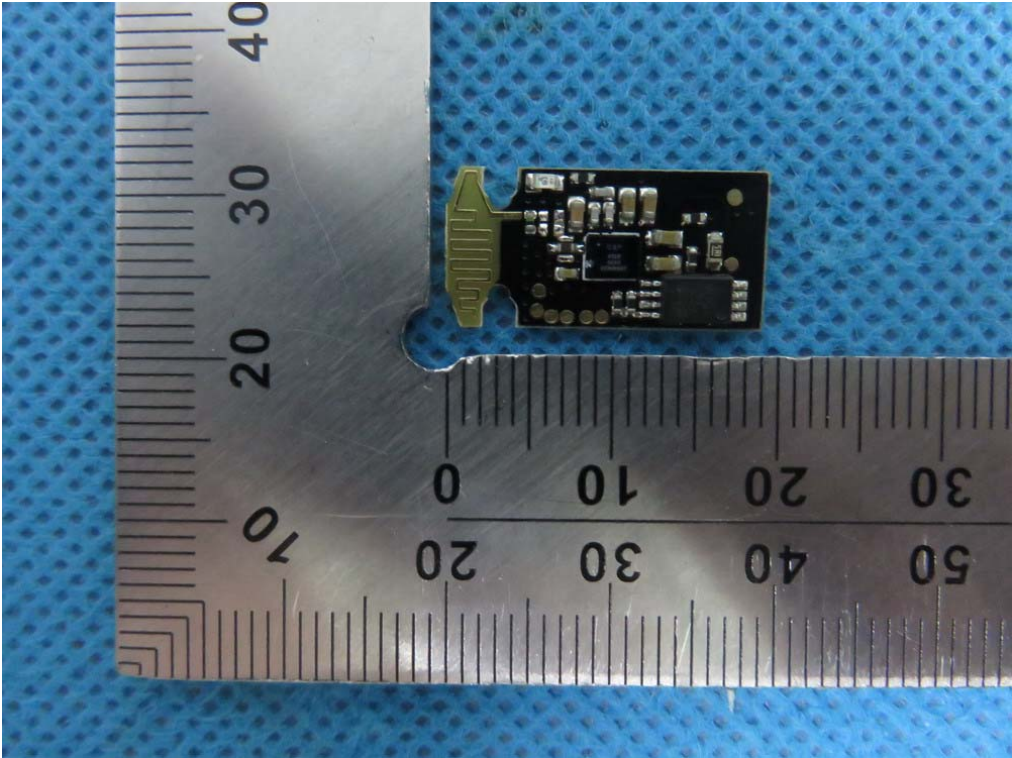

INTERNAL VIEW OF EUT-3

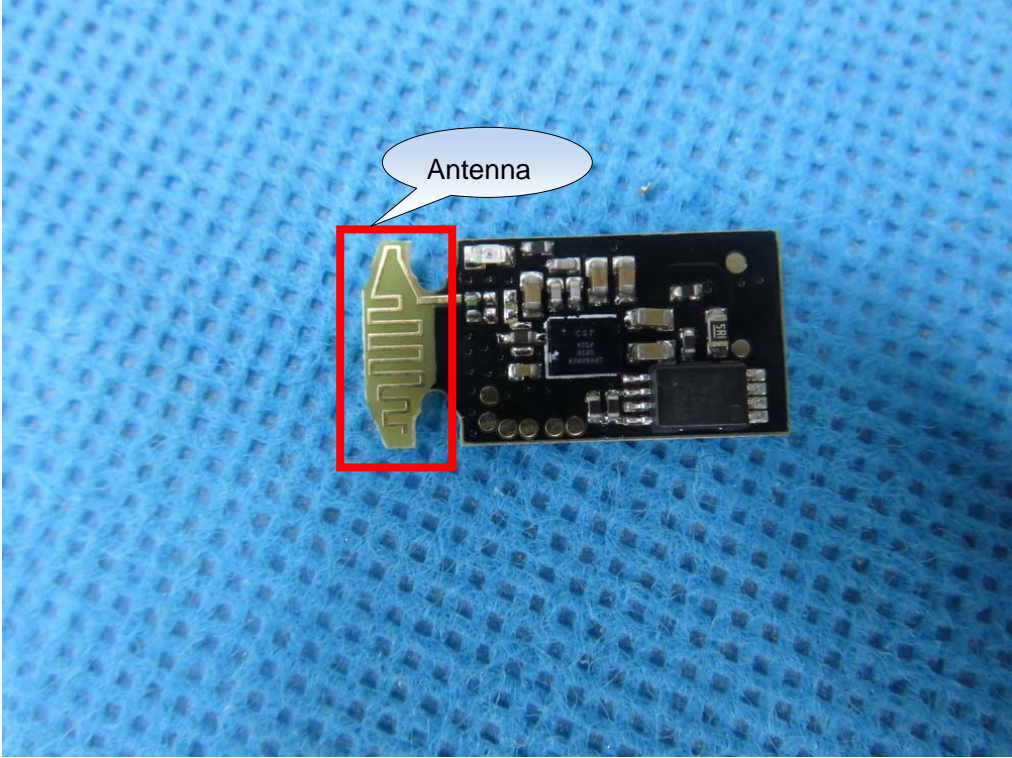

----END OF REPORT----