



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E, PART 27 MEASUREMENT AND TEST REPORT

For

XTRATECH COMPUTERS S.A.

Ciudadela Profesor Aguirre Abad, solar 40, manzana 118 Guayaquil
Ecuador

FCC ID: 2ADVA-X10MT87

Report Type: Original Report	Product Type: TABLET PC
Report Number:	<u>RDG200824010-00E</u>
Report Date:	<u>2021-01-15</u>
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 st Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
DECLARATIONS.....	6
SYSTEM TEST CONFIGURATION.....	7
JUSTIFICATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
CONFIGURATION OF TEST SETUP	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS.....	9
FCC §1.1310 & §2.1093- RF EXPOSURE	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §2.1047 - MODULATION CHARACTERISTIC	11
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50- RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH.....	28
APPLICABLE STANDARD	28
TEST PROCEDURE	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST DATA	28
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST DATA	47
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	64
APPLICABLE STANDARD	64
TEST PROCEDURE	64
TEST EQUIPMENT LIST AND DETAILS.....	65
TEST DATA	65
FCC §22.917(A) & §24.238(A) & §27.53 - BAND EDGES.....	72
APPLICABLE STANDARD	72
TEST PROCEDURE	72
TEST EQUIPMENT LIST AND DETAILS.....	72
TEST DATA	72

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	84
APPLICABLE STANDARD	84
TEST PROCEDURE	84
TEST EQUIPMENT LIST AND DETAILS.....	85
TEST DATA	85

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	TABLET PC
EUT Model:	M16Q3M-4G
Multiple Models:	M16Q3M,X10MT87
Operation modes:	GPRS Data, WCDMA(R99 (Voice+Data), HSDPA,HSUPA) FDD-LTE
Operation Frequency:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2:1850-1910 MHz(TX), 1930-1990 MHz(RX) LTE Band 4:1710-1755 MHz(TX), 2110-2155 MHz(RX)
Antenna Gain▲:	GSM850/WCDMA B5: 0 dBi(-2.15 dBd) PCS1900/WCDMA B2/LTE B2: -2.5 dBi LTE B4: -2.5 dBi
Modulation Type:	GMSK, BPSK, QPSK, 16QAM
Adapter Information	Model: GA01-0502000US-U
	Input: AC 100~240V 50/60Hz 0.5A
	Output: DC 5V 2000mA
Rated Input Voltage: DC 3.7V from battery or DC 5V from USB	
Serial Number: RDG200824010-RF-S1	
EUT Received Date: 2020-08-24	
EUT Received Status: Good	

Note: The series product, M16Q3M,X10MT87 and M16Q3M-4G are electrically identical. The different between of them please refer to the declaration letter for details. Model M16Q3M-4G was fully tested.

Objective

This report is prepared on behalf of **XTRATECH COMPUTERS S.A.** in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E, Part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ADVA-X10MT87.
FCC Part 15C DTS submissions with FCC ID: 2ADVA-X10MT87.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with:

the Code of federal Regulations Title 47, Part 2, Part 22H, Part 24E, Part 27.

ANSI C63.26-2015, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The test items were performed with the EUT operating at testing mode. The device operates on GSM Band 850/1900MHz, WCDMA Band 2/5, and LTE band 2/4, test was performed with channels as below table:

Frequency Bands	Bandwidth (MHz)	Test Frequency(MHz)		
		Low	Middle	High
GSM/GPRS 850	0.25	824.2	836.6	848.8
GSM/GPRS 1900	0.25	1850.2	1880	1909.8
WCDMA Band 2	4.2	1852.4	1880	1907.6
WCDMA Band 5	4.2	826.4	836.6	846.6
LTE Band 2	1.4	1850.7	1880	1909.3
	3	1851.5	1880	1908.5
	5	1852.5	1880	1907.5
	10	1855	1880	1905
	15	1857.5	1880	1902.5
	20	1860	1880	1900
	1.4	1710.7	1732.5	1754.3
LTE Band 4	3	1711.5	1732.5	1753.5
	5	1712.5	1732.5	1752.5
	10	1715	1732.5	1750
	15	1717.5	1732.5	1747.5
	20	1720	1732.5	1745

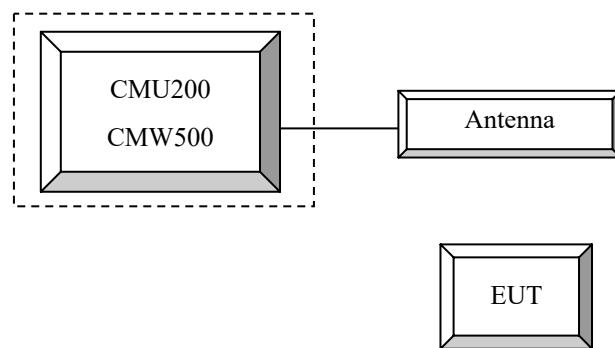
Equipment Modifications

No modification was made to the EUT.

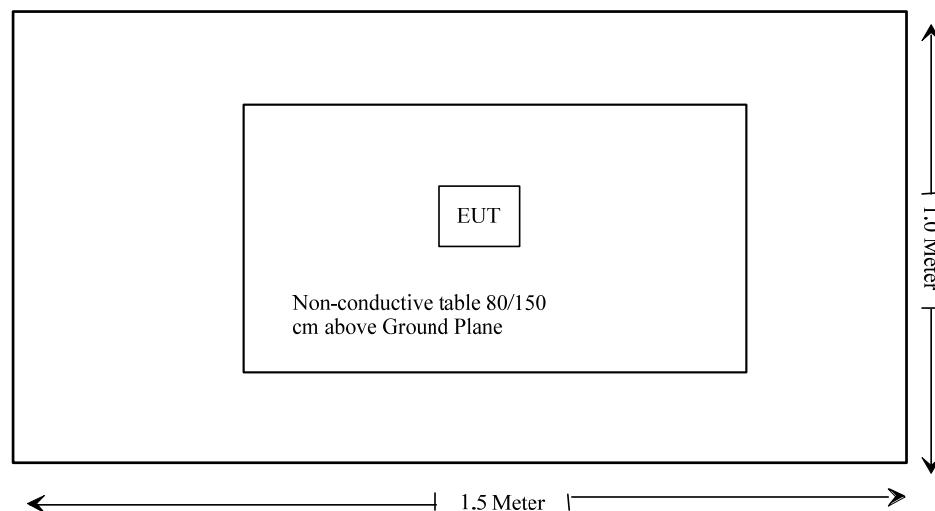
Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universial Radio Communication Tester	CMU200	106 891
R&S	Wideband Radio Communication Tester	CMW500	147473
Un-Known	ANTENNA	Un-Known	Un-Known

Configuration of Test Setup



Block Diagram of Test Setup



SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC§1.1310, §2.1093	RF Exposure	Compliance
FCC§2.1046;§ 22.913 (a); § 24.232 (c);§27.50	RF Output Power	Compliance
FCC§ 2.1047	Modulation Characteristics	Not Applicable
FCC§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
FCC§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53;	Spurious Emissions at Antenna Terminal	Compliance
FCC§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliance
FCC§ 22.917 (a); § 24.238 (a); §27.53;	Out of band emission, Band Edge	Compliance
FCC§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RDG200824010-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50- RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50

(a)(3) Mobile and portable stations. (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) (10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h),(2) Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900
 Press Connection control to choose the different menus
 Press RESET > choose all the reset all settings
 Connection Press Signal Off to turn off the signal and change settings
 Network Support > GSM + GPRS or GSM + EGSM
 Main Service > Packet Data
 Service selection > Test Mode A – Auto Slot Config. off
 MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850
 > 30 dBm for GPRS 1900
 > 27 dBm for EGPRS 850
 > 26 dBm for EGPRS 1900
 BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
 Frequency Offset > + 0 Hz
 Mode > BCCH and TCH
 BCCH Level > -85 dBm (May need to adjust if link is not stable)
 BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
 Channel Type > Off
 P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)
 Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Connection Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR(dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
$A_{hs} = \beta_{hs} / \beta_c$		30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
HSDPA Specific Settings	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
HSUPA Specific Settings	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCl	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N _{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	147473	2020-09-23	2021-09-22
R&S	Universal Radio Communication Tester	CMU200	106 891	2020-09-12	2021-09-12

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	23.8~ 29.8 °C
Relative Humidity:	32~64%
ATM Pressure:	100.6~101.9kPa
Tester:	Rita Huang
Test Date:	2020.10.16-2020.11.24

Test Result: Compliance

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)			
		GPRS 1 uplink slot	GPRS 2 uplink slot	GPRS 3 uplink slot	GPRS 4 uplink slot
Cellular	128	30.21	28.81	27.58	26.45
	190	30.14	28.77	27.66	26.57
	251	29.94	28.65	27.56	26.48
PCS	512	27.81	26.85	24.57	23.18
	661	28.12	27.69	26.14	24.53
	810	28.78	28.39	27.36	26.47

ERP/EIRP:

Band	Mode	Channel	Conducted Power	Antenna Gain	Cable Loss	Result	Limit
			(dBm)	(dBi/dBd)	(dB)	(dBm)	(dBm)
Cellular	GPRS	Low	30.21	-2.15	0.2	27.86	38.45
		Middle	30.14	-2.15	0.2	27.79	38.45
		High	29.94	-2.15	0.2	27.59	38.45
PCS	GPRS	Low	27.81	-2.5	0.4	24.91	33.00
		Middle	28.12	-2.5	0.4	25.22	33.00
		High	28.78	-2.5	0.4	25.88	33.00

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Result = Conducted Power - Cable loss + Antenna Gain
- 3) Antenna gain(dBd)= Antenna gain(dBi)-2.15

WCDMA Band 2**Conducted Output Power and PAR:**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.51	2.26	21.84	2.64	22.09	2.67
HSDPA	1	21.42	3.33	21.73	3.25	21.85	3.36
	2	21.00	3.42	21.52	3.73	21.78	3.13
	3	20.88	3.01	21.13	3.84	21.39	3.20
	4	20.67	3.99	20.74	3.64	20.97	3.70
	1	21.06	3.62	21.38	3.51	21.71	3.71
HSUPA	2	20.95	3.80	21.33	3.48	21.51	3.78
	3	20.60	3.88	21.31	4.00	21.25	3.66
	4	20.52	3.82	21.08	3.38	20.87	3.81
	5	20.36	3.99	20.97	3.54	20.58	3.08
	1	21.01	3.89	21.32	3.54	21.64	3.56
DC-HSDPA	2	20.80	3.87	21.11	3.07	21.22	3.75
	3	20.65	3.47	20.78	3.72	20.77	3.37
	4	20.35	3.71	20.48	3.93	20.32	3.41
HSPA+ (16QAM)	1	20.86	3.79	20.79	3.02	20.92	3.69

EIRP:

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Result (dBm)	Limit (dBm)
Low	21.51	-2.5	0.4	18.61	33
Middle	21.84	-2.5	0.4	18.94	33
High	22.09	-2.5	0.4	19.19	33

WCDMA Band 5**Conducted Output Power and PAR:**

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	21.56	2.64	21.63	2.49	21.64	2.72
HSDPA	1	21.46	3.83	21.53	3.22	21.47	3.86
	2	21.19	3.51	21.14	3.61	21.29	3.94
	3	20.86	3.77	20.99	3.54	21.11	3.54
	4	20.44	3.12	20.66	3.08	20.96	3.75
	1	21.12	3.07	21.21	3.74	21.11	3.19
HSUPA	2	20.95	3.98	21.16	3.43	20.85	3.04
	3	20.84	3.44	21.14	3.24	20.83	3.25
	4	20.49	3.42	20.97	3.00	20.66	3.64
	5	20.31	3.44	20.71	3.93	20.40	3.13
	1	21.05	3.53	21.14	3.90	21.03	3.73
DC-HSDPA	2	20.93	3.00	20.96	3.56	20.79	3.82
	3	20.72	3.73	20.66	3.29	20.61	3.41
	4	20.42	3.42	20.36	3.41	20.40	3.98
HSPA+ (16QAM)	1	20.62	3.45	20.59	3.87	20.33	3.73

ERP:

Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Result (dBm)	Limit (dBm)
Low	21.56	-2.15	0.2	19.21	38.45
Middle	21.63	-2.15	0.2	19.28	38.45
High	21.64	-2.15	0.2	19.29	38.45

LTE Band 2**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	21.01	21.13	21.44
		RB1#3	21.22	21.32	21.60
		RB1#5	21.00	21.18	21.47
		RB3#0	20.86	21.06	21.31
		RB3#3	20.87	21.07	21.34
		RB6#0	20.09	20.23	20.48
	16QAM	RB1#0	19.92	19.96	20.24
		RB1#3	19.95	20.11	20.39
		RB1#5	19.95	19.99	20.22
		RB3#0	19.67	20.05	20.42
		RB3#3	19.77	20.02	20.39
		RB6#0	19.02	19.10	19.38
3MHz	QPSK	RB1#0	21.08	21.16	21.41
		RB1#8	21.03	21.14	21.52
		RB1#14	20.96	21.17	21.53
		RB6#0	20.01	20.14	20.36
		RB6#9	19.91	20.15	20.41
		RB15#0	19.85	20.03	20.33
	16QAM	RB1#0	20.23	20.16	20.27
		RB1#8	20.22	20.09	20.25
		RB1#14	20.22	20.13	20.29
		RB6#0	18.93	19.08	19.29
		RB6#9	18.96	19.10	19.31
		RB15#0	18.85	19.00	19.34
5MHz	QPSK	RB1#0	20.91	21.03	21.24
		RB1#13	20.95	21.18	21.40
		RB1#24	20.86	21.11	21.34
		RB15#0	19.83	20.04	20.33
		RB15#10	19.95	20.04	20.38
		RB25#0	19.80	20.02	20.32
	16QAM	RB1#0	19.61	20.16	20.25
		RB1#13	19.69	20.26	20.35
		RB1#24	19.66	20.16	20.23
		RB15#0	18.84	19.00	19.40
		RB15#10	18.96	19.02	19.39
		RB25#0	18.83	19.00	19.34

10MHz	QPSK	RB1#0	21.06	21.06	21.24
		RB1#25	21.17	21.31	21.43
		RB1#49	20.98	21.24	21.53
		RB25#0	19.82	20.06	20.47
		RB25#25	19.91	20.11	20.38
		RB50#0	19.86	20.07	20.41
	16QAM	RB1#0	20.23	20.10	20.23
		RB1#25	20.49	20.30	20.40
		RB1#49	20.45	20.13	20.25
		RB25#0	18.81	19.04	19.60
		RB25#25	18.99	19.10	19.49
		RB50#0	18.84	19.05	19.48
15MHz	QPSK	RB1#0	20.98	20.98	21.12
		RB1#38	20.92	21.17	21.32
		RB1#74	20.87	21.18	21.44
		RB36#0	19.99	20.14	20.40
		RB36#39	19.91	20.33	20.46
		RB75#0	19.93	20.24	20.46
	16QAM	RB1#0	20.15	20.05	20.41
		RB1#38	20.48	20.14	20.65
		RB1#74	20.58	20.02	20.47
		RB36#0	18.94	19.15	19.43
		RB36#39	18.95	19.24	19.40
		RB75#0	18.91	19.18	19.43
20MHz	QPSK	RB1#0	20.76	20.84	20.87
		RB1#50	21.15	21.31	21.40
		RB1#99	20.88	21.01	21.16
		RB50#0	19.90	20.02	20.38
		RB50#50	19.81	20.21	20.19
		RB100#0	19.87	20.14	20.30
	16QAM	RB1#0	19.82	19.96	20.26
		RB1#50	20.45	20.26	20.91
		RB1#99	20.13	20.00	20.51
		RB50#0	18.92	19.06	19.39
		RB50#50	18.85	19.17	19.24
		RB100#0	18.94	19.14	19.29

PAR:

Test Modulation		Channel Bandwidth	Low Channel (dB)	Middle Channel (dB)	High Channel (dB)	Limit (dB)
QPSK	1 RB	20 MHz	3.01	4.29	5.39	13.00
	100 RB		4.64	4.26	4.96	13.00
16QAM	1 RB	20 MHz	4.20	5.25	6.46	13.00
	100 RB		5.68	5.28	5.94	13.00

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Result (dBm)	Limit (dBm)
1.4MHz	QPSK	Low	21.22	-2.5	0.4	18.32	33
		Middle	21.32	-2.5	0.4	18.42	33
		High	21.6	-2.5	0.4	18.7	33
	16QAM	Low	19.95	-2.5	0.4	17.05	33
		Middle	20.11	-2.5	0.4	17.21	33
		High	20.42	-2.5	0.4	17.52	33
3MHz	QPSK	Low	21.08	-2.5	0.4	18.18	33
		Middle	21.17	-2.5	0.4	18.27	33
		High	21.53	-2.5	0.4	18.63	33
	16QAM	Low	20.23	-2.5	0.4	17.33	33
		Middle	20.16	-2.5	0.4	17.26	33
		High	20.29	-2.5	0.4	17.39	33
5MHz	QPSK	Low	20.95	-2.5	0.4	18.05	33
		Middle	21.18	-2.5	0.4	18.28	33
		High	21.4	-2.5	0.4	18.5	33
	16QAM	Low	19.69	-2.5	0.4	16.79	33
		Middle	20.26	-2.5	0.4	17.36	33
		High	20.35	-2.5	0.4	17.45	33
10MHz	QPSK	Low	21.17	-2.5	0.4	18.27	33
		Middle	21.31	-2.5	0.4	18.41	33
		High	21.53	-2.5	0.4	18.63	33
	16QAM	Low	20.49	-2.5	0.4	17.59	33
		Middle	20.3	-2.5	0.4	17.4	33
		High	20.4	-2.5	0.4	17.5	33
15MHz	QPSK	Low	20.98	-2.5	0.4	18.08	33
		Middle	21.18	-2.5	0.4	18.28	33
		High	21.44	-2.5	0.4	18.54	33
	16QAM	Low	20.58	-2.5	0.4	17.68	33
		Middle	20.14	-2.5	0.4	17.24	33
		High	20.65	-2.5	0.4	17.75	33
20MHz	QPSK	Low	21.15	-2.5	0.4	18.25	33
		Middle	21.31	-2.5	0.4	18.41	33
		High	21.4	-2.5	0.4	18.5	33
	16QAM	Low	20.45	-2.5	0.4	17.55	33
		Middle	20.26	-2.5	0.4	17.36	33
		High	20.91	-2.5	0.4	18.01	33

LTE Band 4**Conducted Output Power:**

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	RB1#0	20.95	20.79	20.75
		RB1#3	21.10	20.93	20.95
		RB1#5	20.93	20.76	20.77
		RB3#0	20.98	20.84	20.81
		RB3#3	21.01	20.81	20.80
		RB6#0	20.05	19.92	19.91
	16QAM	RB1#0	20.00	19.95	19.75
		RB1#3	20.17	20.07	19.99
		RB1#5	19.99	19.92	19.77
		RB3#0	20.29	19.79	19.92
		RB3#3	20.29	19.86	19.92
		RB6#0	19.05	18.87	18.79
3MHz	QPSK	RB1#0	21.03	20.86	20.92
		RB1#8	21.00	20.80	20.83
		RB1#14	20.97	20.82	20.86
		RB6#0	20.01	19.89	19.86
		RB6#9	19.98	19.87	19.85
		RB15#0	20.05	19.87	19.87
	16QAM	RB1#0	20.62	20.01	19.85
		RB1#8	20.59	19.97	19.83
		RB1#14	20.58	20.01	19.81
		RB6#0	19.08	18.84	18.74
		RB6#9	18.99	18.87	18.77
		RB15#0	19.08	18.78	18.89
5MHz	QPSK	RB1#0	20.90	20.79	20.78
		RB1#13	20.99	20.83	20.85
		RB1#24	20.94	20.72	20.76
		RB15#0	20.03	19.84	19.85
		RB15#10	19.96	19.77	19.93
		RB25#0	20.02	19.81	19.90
	16QAM	RB1#0	19.91	20.07	19.87
		RB1#13	19.90	20.14	19.91
		RB1#24	19.88	20.08	19.83
		RB15#0	19.09	18.83	18.82
		RB15#10	19.01	18.76	18.90
		RB25#0	19.02	18.78	18.88
10MHz	QPSK	RB1#0	20.96	20.90	20.78
		RB1#25	21.13	21.01	21.02
		RB1#49	20.93	20.77	20.84
		RB25#0	20.11	19.90	19.95
		RB25#25	20.12	19.74	20.04
		RB50#0	20.08	19.82	20.00
	16QAM	RB1#0	20.59	20.02	19.80
		RB1#25	20.74	20.13	20.19
		RB1#49	20.59	19.98	19.97
		RB25#0	19.10	18.86	18.92
		RB25#25	19.09	18.72	19.01
		RB50#0	19.11	18.79	19.00

15MHz	QPSK	RB1#0	20.87	20.83	20.72
		RB1#38	20.99	20.86	20.86
		RB1#74	20.85	20.75	20.81
		RB36#0	20.06	19.91	19.98
		RB36#39	20.13	19.77	20.00
		RB75#0	20.10	19.85	20.05
	16QAM	RB1#0	20.52	19.97	20.16
		RB1#38	20.58	19.98	20.27
		RB1#74	20.42	19.95	20.13
		RB36#0	19.06	18.89	18.97
		RB36#39	19.11	18.82	18.92
		RB75#0	19.08	18.82	18.97
20MHz	QPSK	RB1#0	20.76	20.71	20.57
		RB1#50	21.15	21.00	20.99
		RB1#99	20.68	20.70	20.25
		RB50#0	20.03	19.79	20.25
		RB50#50	20.18	19.63	19.83
		RB100#0	20.13	19.72	20.03
	16QAM	RB1#0	20.09	19.91	19.82
		RB1#50	20.39	20.15	20.20
		RB1#99	19.97	19.92	19.38
		RB50#0	18.96	18.69	19.24
		RB50#50	19.14	18.58	18.82
		RB100#0	19.13	18.69	19.10

PAR:

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	5.10	1.70	5.45	13
	100 RB		5.39	5.10	5.57	13
16QAM	1 RB	20 MHz	6.32	5.51	6.29	13
	100 RB		6.35	6.20	6.29	13

EIRP:

Channel Bandwidth	Modulation	Channel	Conducted Power (dBm)	Antenna Gain (dBi)	Cable Loss (dB)	Result (dBm)	Limit (dBm)
1.4MHz	QPSK	Low	21.1	-2.5	0.4	18.2	30
		Middle	20.93	-2.5	0.4	18.03	30
		High	20.95	-2.5	0.4	18.05	30
	16QAM	Low	20.29	-2.5	0.4	17.39	30
		Middle	20.07	-2.5	0.4	17.17	30
		High	19.99	-2.5	0.4	17.09	30
3MHz	QPSK	Low	21.03	-2.5	0.4	18.13	30
		Middle	20.86	-2.5	0.4	17.96	30
		High	20.92	-2.5	0.4	18.02	30
	16QAM	Low	20.62	-2.5	0.4	17.72	30
		Middle	20.01	-2.5	0.4	17.11	30
		High	19.85	-2.5	0.4	16.95	30
5MHz	QPSK	Low	20.99	-2.5	0.4	18.09	30
		Middle	20.83	-2.5	0.4	17.93	30
		High	20.85	-2.5	0.4	17.95	30
	16QAM	Low	19.91	-2.5	0.4	17.01	30
		Middle	20.14	-2.5	0.4	17.24	30
		High	19.91	-2.5	0.4	17.01	30
10MHz	QPSK	Low	21.13	-2.5	0.4	18.23	30
		Middle	21.01	-2.5	0.4	18.11	30
		High	21.02	-2.5	0.4	18.12	30
	16QAM	Low	20.74	-2.5	0.4	17.84	30
		Middle	20.13	-2.5	0.4	17.23	30
		High	20.19	-2.5	0.4	17.29	30
15MHz	QPSK	Low	20.99	-2.5	0.4	18.09	30
		Middle	20.86	-2.5	0.4	17.96	30
		High	20.86	-2.5	0.4	17.96	30
	16QAM	Low	20.58	-2.5	0.4	17.68	30
		Middle	19.98	-2.5	0.4	17.08	30
		High	20.27	-2.5	0.4	17.37	30
20MHz	QPSK	Low	21.15	-2.5	0.4	18.25	30
		Middle	21	-2.5	0.4	18.1	30
		High	20.99	-2.5	0.4	18.09	30
	16QAM	Low	20.39	-2.5	0.4	17.49	30
		Middle	20.15	-2.5	0.4	17.25	30
		High	20.2	-2.5	0.4	17.3	30

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Result = Conducted Power - Cable loss + Antenna Gain
- 3) Antenna gain(dBd)= Antenna gain(dBi)-2.15

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH

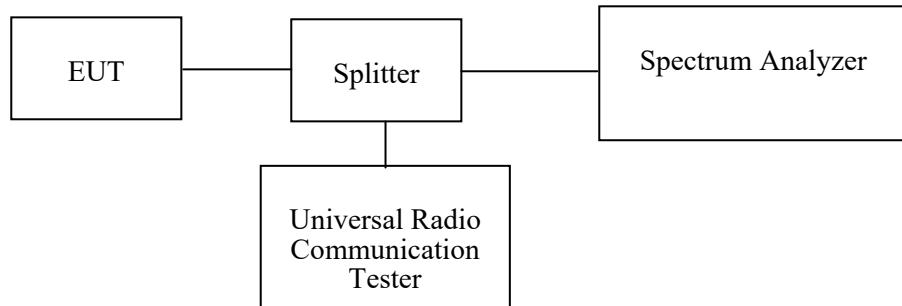
Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.8~29.8 °C
Relative Humidity:	32~64%
ATM Pressure:	100.6~101.9kPa
Tester:	Rita Huang
Test Date:	2020.10.16-2020.11.24

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.

GPRS:

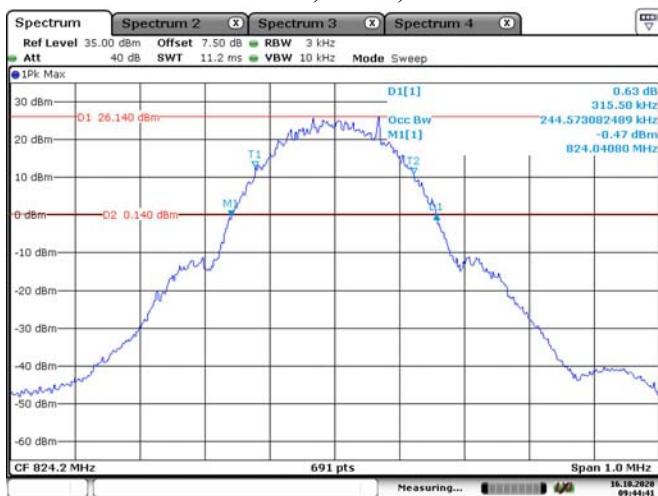
Band	Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
		Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
Cellular	GPRS	0.245	0.247	0.245	0.316	0.317	0.316
PCS	GPRS	0.246	0.245	0.245	0.310	0.313	0.313

WCDMA:

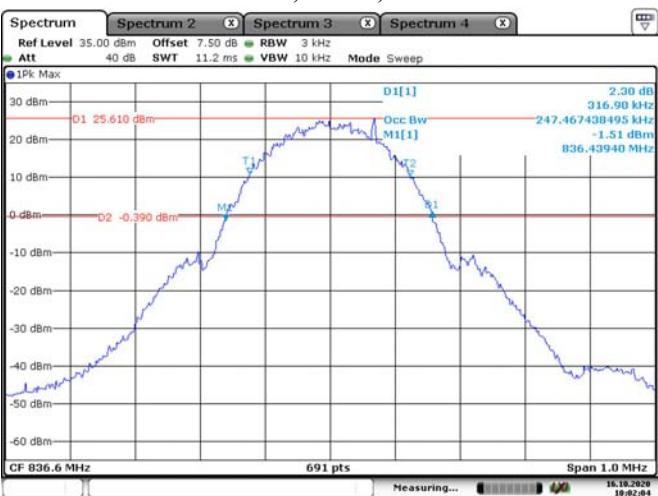
Band	Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
		Low Channel	Middle Channel	High Channel	Low Channel	Middle Channel	High Channel
Cellular	Rel 99	4.192	4.192	4.192	4.753	4.764	4.753
	HSDPA	4.192	4.192	4.232	4.719	4.759	4.784
	HSUPA	4.192	4.192	4.212	4.744	4.753	4.753
PCS	Rel 99	4.192	4.172	4.192	4.750	4.752	4.757
	HSDPA	4.172	4.213	4.192	4.730	4.755	4.750
	HSUPA	4.192	4.192	4.172	4.717	4.746	4.739

LTE Bands:

Band	Bandwidth (MHz)	Modulation mode	Low Channel		Middle Channel		High Channel	
			99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band 2	1.4 MHz	QPSK	1.108	1.368	1.114	1.338	1.108	1.315
		16QAM	1.102	1.350	1.102	1.332	1.102	1.314
	3 MHz	QPSK	2.695	2.880	2.695	2.880	2.683	2.881
		16QAM	2.695	2.892	2.683	2.892	2.683	2.907
	5 MHz	QPSK	4.531	5.260	4.531	5.240	4.531	5.280
		16QAM	4.531	5.178	4.551	5.200	4.571	5.420
	10 MHz	QPSK	8.982	10.200	8.982	10.000	8.982	10.000
		16QAM	8.942	9.760	8.982	10.040	8.982	9.920
	15 MHz	QPSK	13.473	15.180	13.533	15.540	13.533	15.240
		16QAM	13.473	15.060	13.593	15.300	13.533	15.180
LTE Band 4	20 MHz	QPSK	17.884	19.600	18.044	20.080	17.964	19.920
		16QAM	17.964	19.680	18.044	20.160	17.964	19.680
	1.4 MHz	QPSK	1.102	1.296	1.108	1.320	1.102	1.290
		16QAM	1.102	1.320	1.090	1.296	1.102	1.302
	3 MHz	QPSK	2.695	2.868	2.695	2.880	2.683	2.880
		16QAM	2.683	2.880	2.683	2.880	2.683	2.880
	5 MHz	QPSK	4.531	5.200	4.511	5.180	4.511	5.200
		16QAM	4.511	5.120	4.531	5.120	4.531	5.200
	10 MHz	QPSK	8.982	9.960	8.942	9.760	8.982	9.960
		16QAM	8.942	10.000	8.942	9.720	8.982	9.920
	15 MHz	QPSK	13.593	15.360	13.413	15.000	13.593	15.240
		16QAM	13.593	15.300	13.533	15.060	13.593	15.180
	20 MHz	QPSK	17.964	19.680	17.964	19.520	18.044	19.920
		16QAM	18.044	19.920	17.884	19.680	17.964	19.600

Cellular 850 Band, GPRS, Low Channel

Date: 16.OCT.2020 09:44:41

Cellular 850 Band, GPRS, Middle Channel

Date: 16.OCT.2020 10:02:04

Cellular 850 Band, GPRS, High Channel

Date: 16.OCT.2020 09:59:48

PCS 1900 Band, GPRS, Low Channel

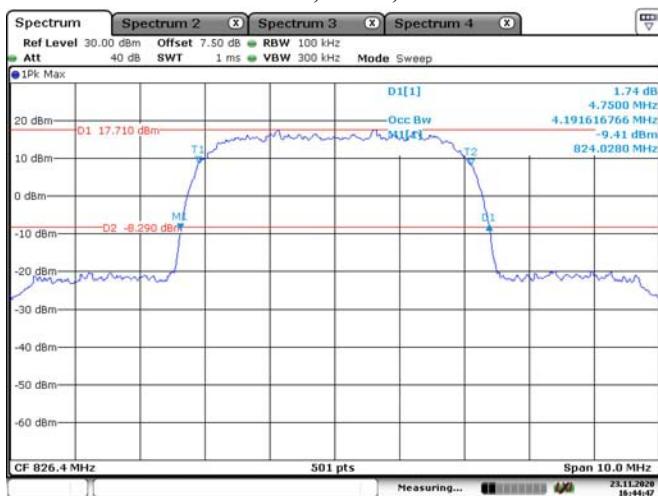
Date: 16.OCT.2020 11:02:11

PCS 1900 Band, GPRS, Middle Channel

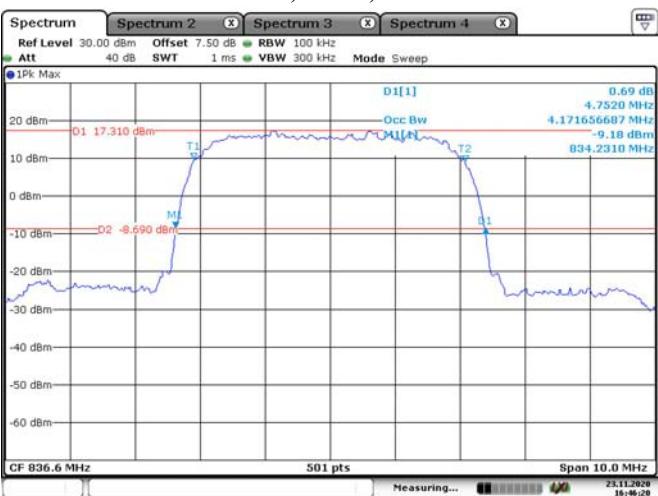
Date: 16.OCT.2020 11:11:09

PCS 1900 Band, GPRS, High Channel

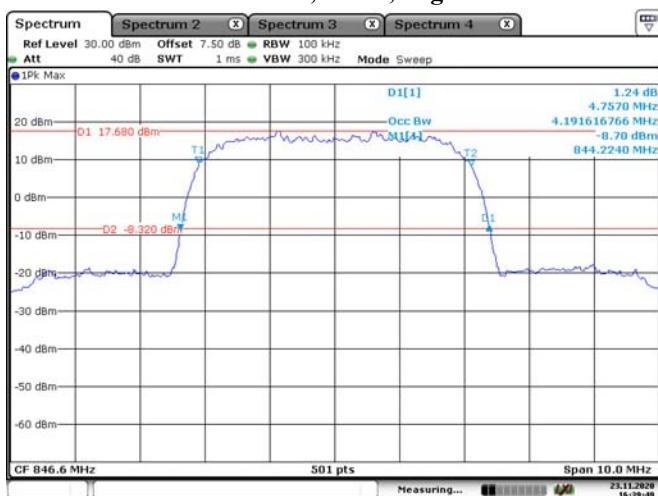
Date: 16.OCT.2020 11:09:42

WCDMA Band V, Rel99, Low Channel

Date: 23.NOV.2020 16:44:47

WCDMA Band V, Rel99, Middle Channel

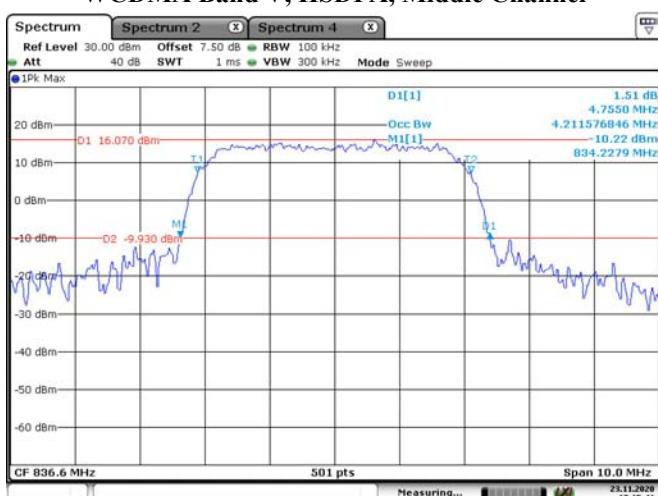
Date: 23.NOV.2020 16:46:20

WCDMA Band V, Rel99, High Channel

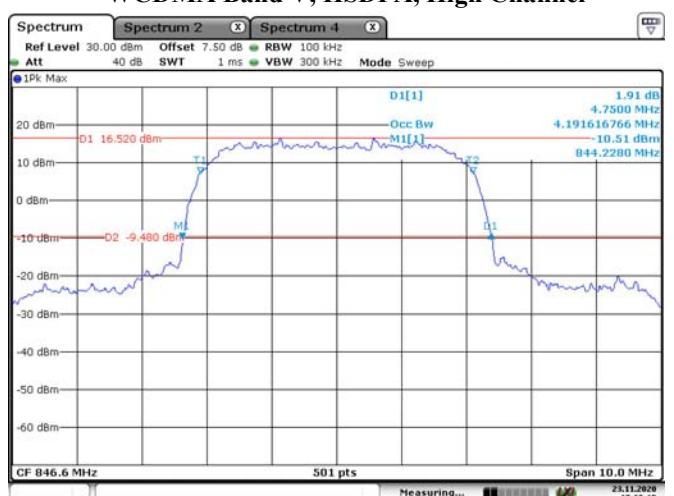
Date: 23.NOV.2020 16:39:49

WCDMA Band V, HSDPA, Low Channel

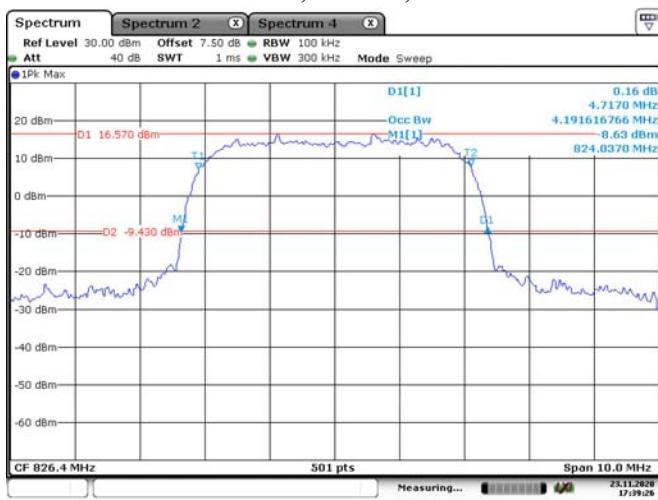
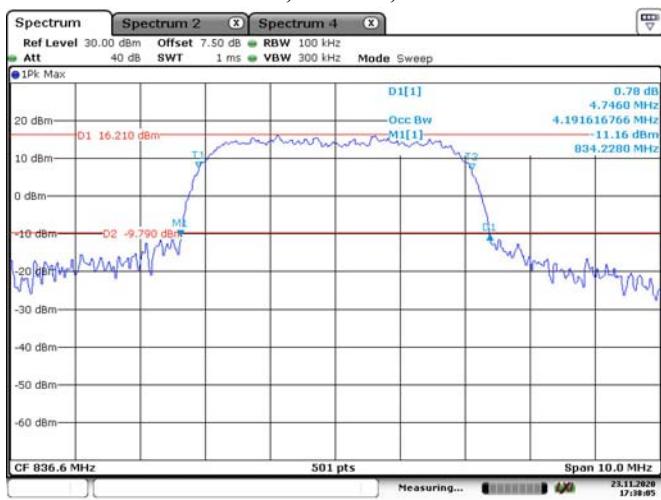
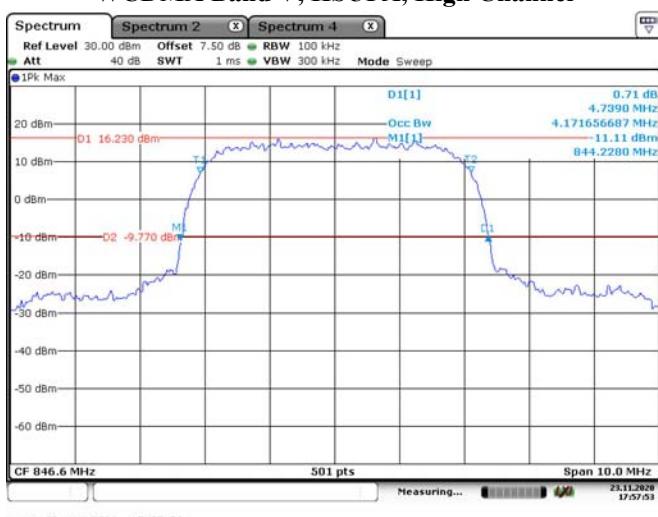
Date: 23.NOV.2020 17:17:30

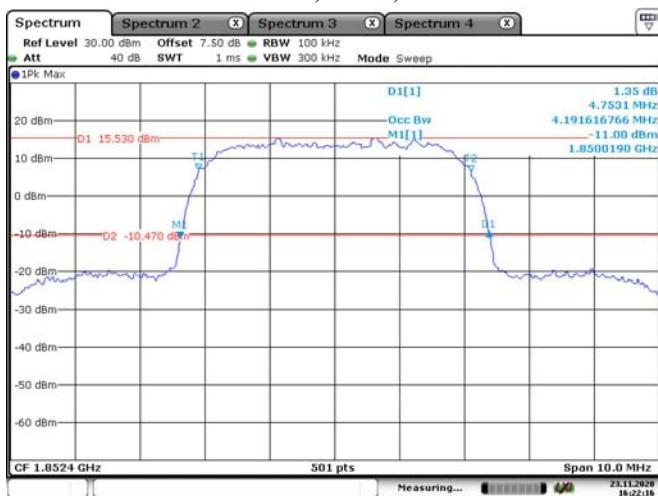
WCDMA Band V, HSDPA, Middle Channel

Date: 23.NOV.2020 17:15:41

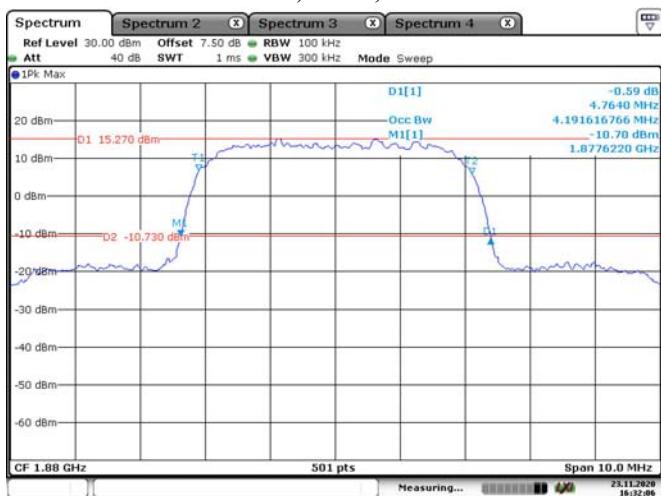
WCDMA Band V, HSDPA, High Channel

Date: 23.NOV.2020 17:20:15

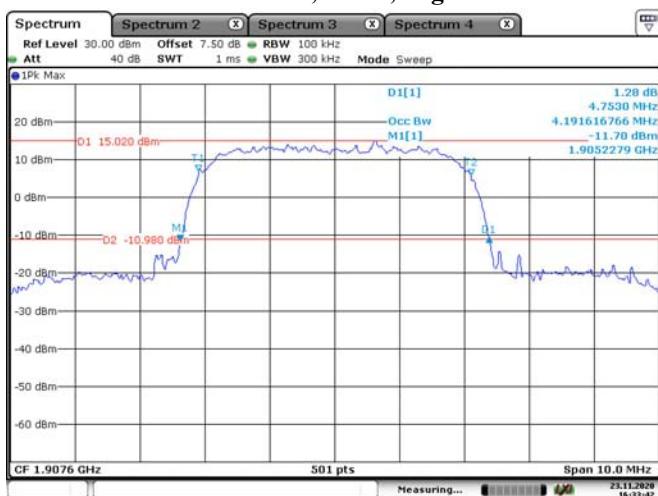
WCDMA Band V, HSUPA, Low Channel**WCDMA Band V, HSUPA, Middle Channel****WCDMA Band V, HSUPA, High Channel**

WCDMA Band II, Rel99, Low Channel

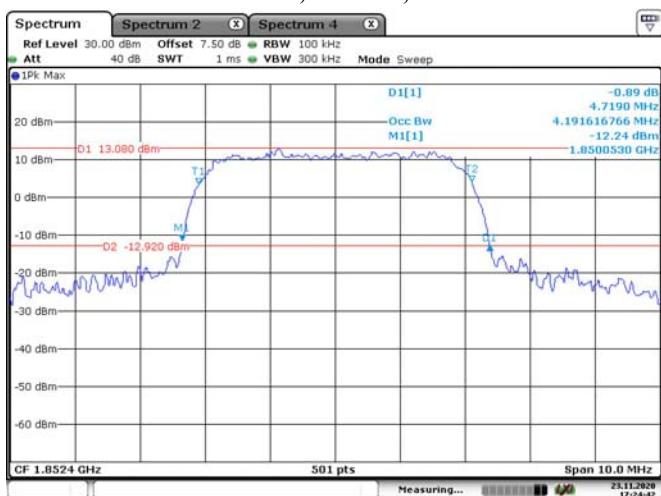
Date: 23.NOV.2020 16:22:16

WCDMA Band II, Rel99, Middle Channel

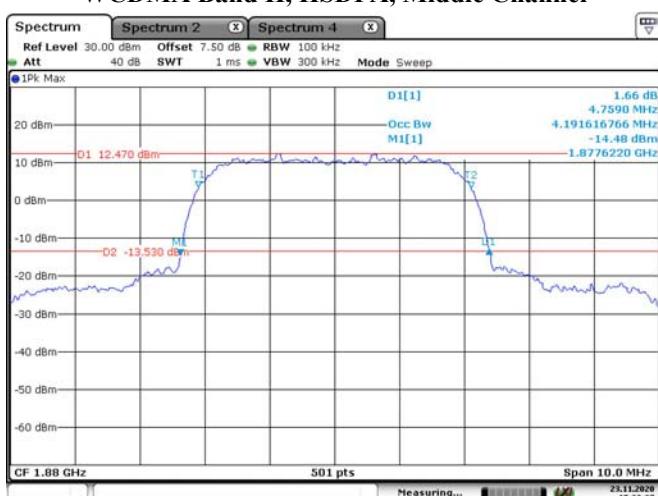
Date: 23.NOV.2020 16:32:06

WCDMA Band II, Rel99, High Channel

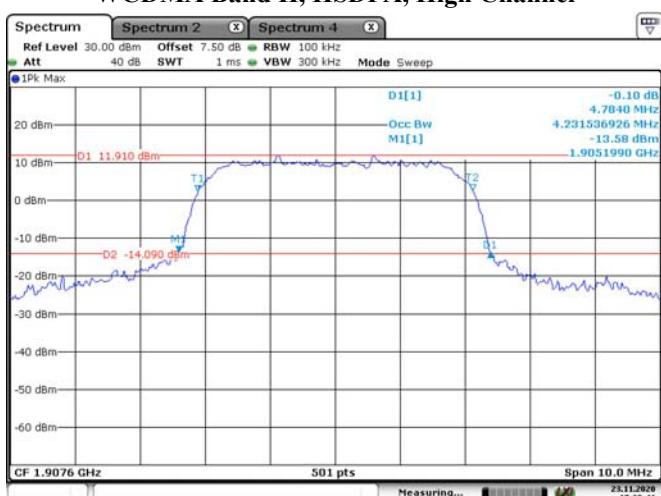
Date: 23.NOV.2020 16:33:42

WCDMA Band II, HSDPA, Low Channel

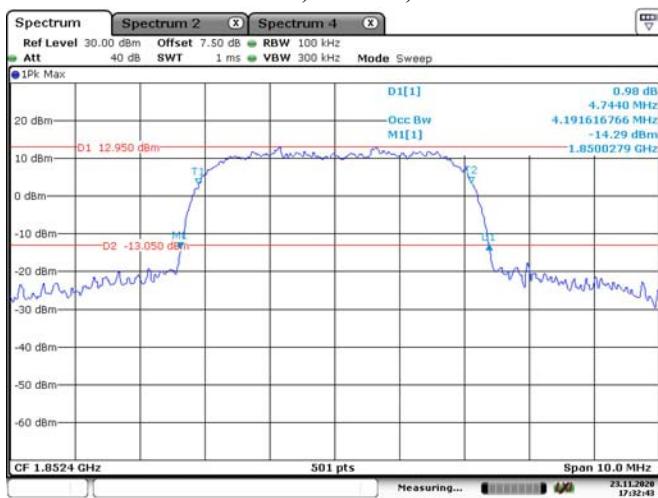
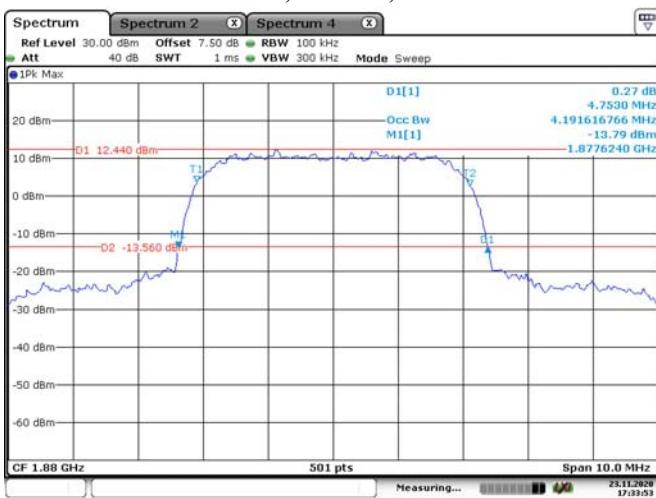
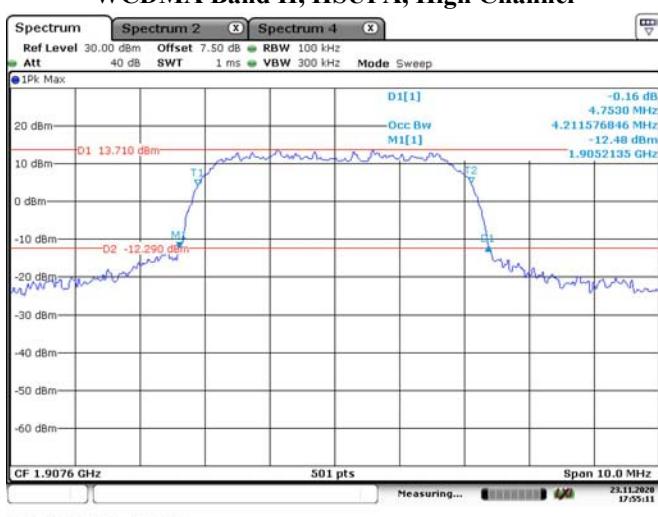
Date: 23.NOV.2020 17:24:42

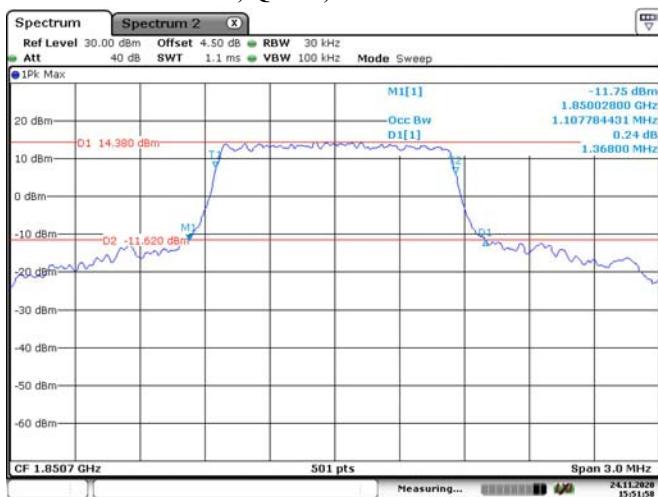
WCDMA Band II, HSDPA, Middle Channel

Date: 23.NOV.2020 17:23:37

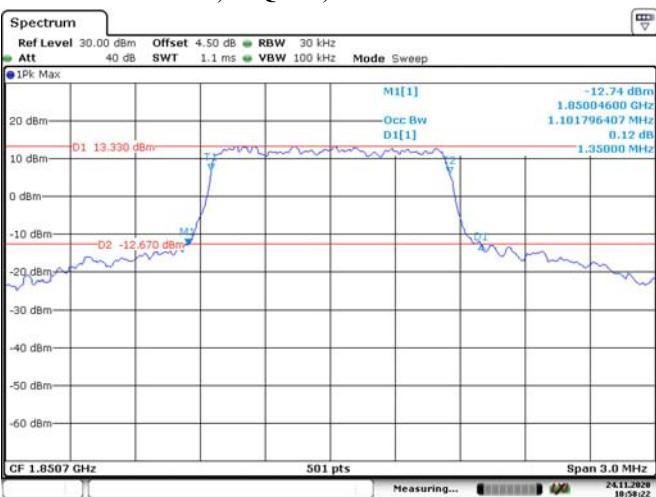
WCDMA Band II, HSDPA, High Channel

Date: 23.NOV.2020 17:28:41

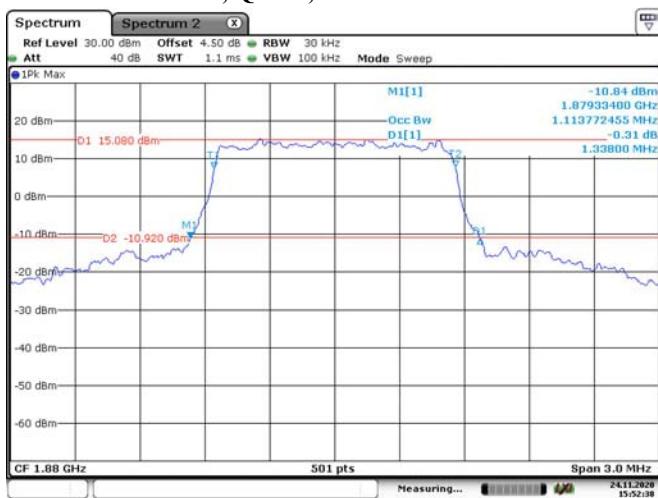
WCDMA Band II, HSUPA, Low Channel**WCDMA Band II, HSUPA, Middle Channel****WCDMA Band II, HSUPA, High Channel**

LTE Band 2**1.4M, QPSK, Low Channel**

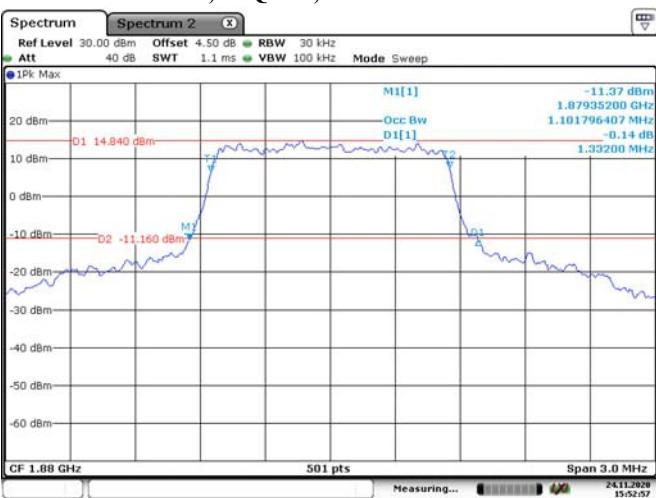
Date: 24.NOV.2020 15:51:58

1.4M, 16QAM, Low Channel

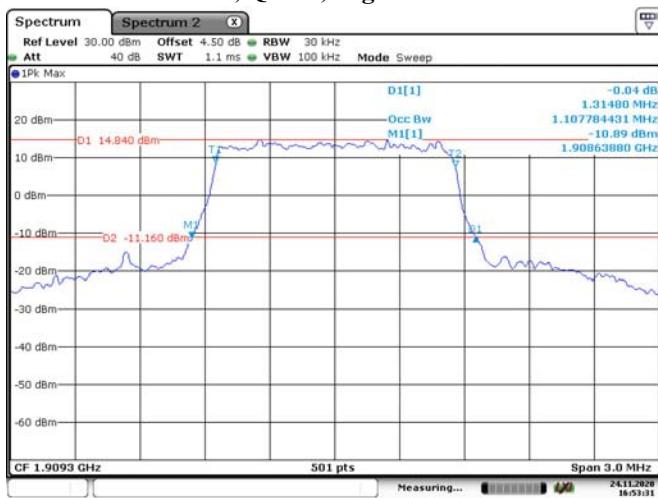
Date: 24.NOV.2020 10:58:22

1.4M, QPSK, Middle Channel

Date: 24.NOV.2020 15:52:38

1.4M, 16QAM, Middle Channel

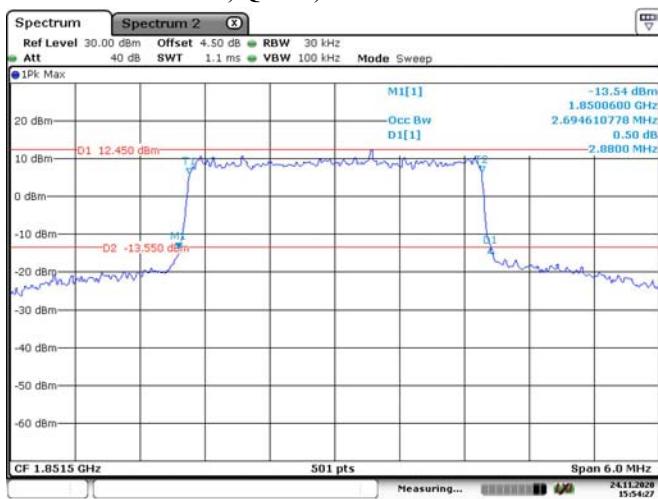
Date: 24.NOV.2020 15:52:57

1.4M, QPSK, High Channel

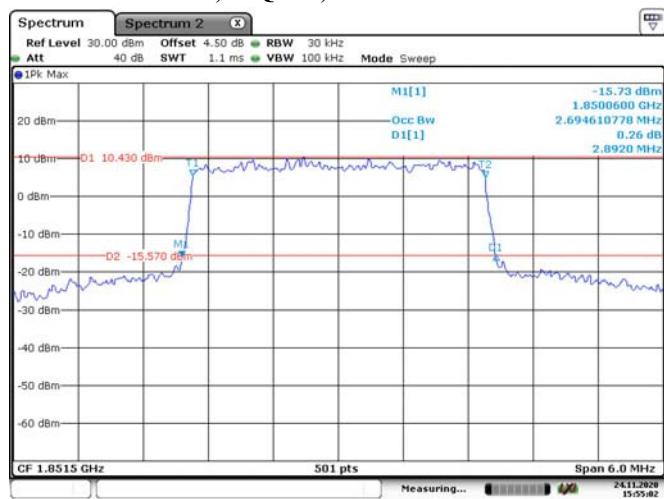
Date: 24.NOV.2020 16:53:31

1.4M, 16QAM, High Channel

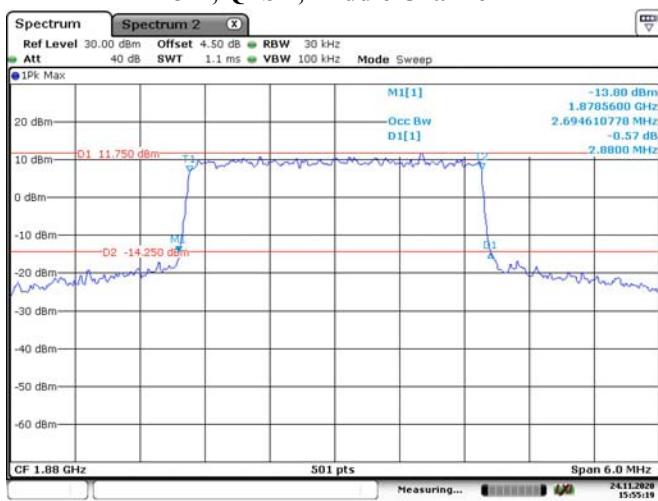
Date: 24.NOV.2020 16:55:23

3M, QPSK, Low Channel

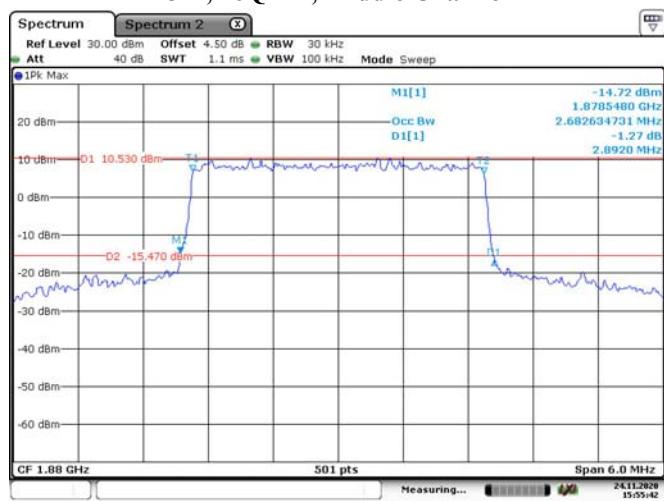
Date: 24.NOV.2020 15:54:27

3M, 16QAM, Low Channel

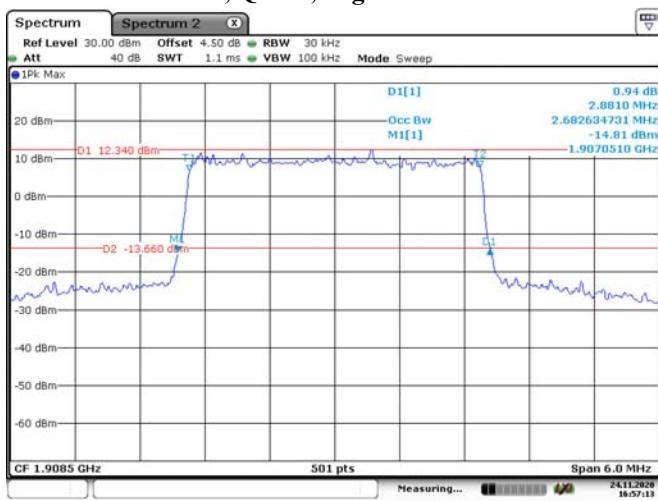
Date: 24.NOV.2020 15:55:03

3M, QPSK, Middle Channel

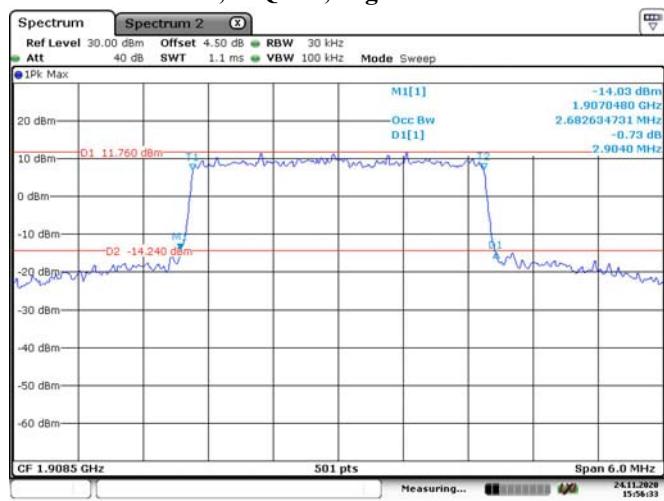
Date: 24.NOV.2020 15:55:19

3M, 16QAM, Middle Channel

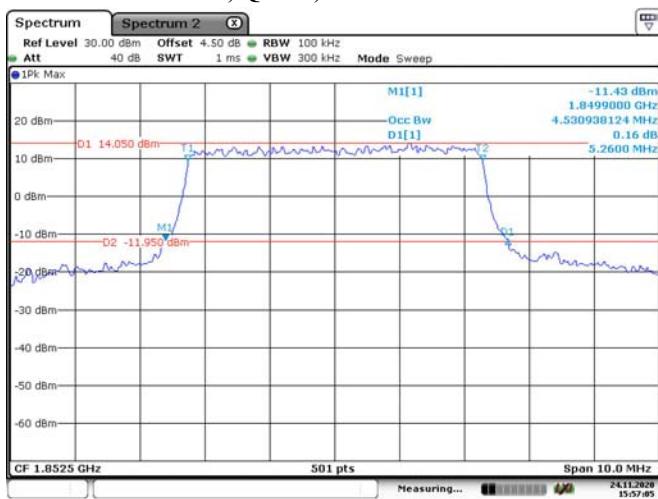
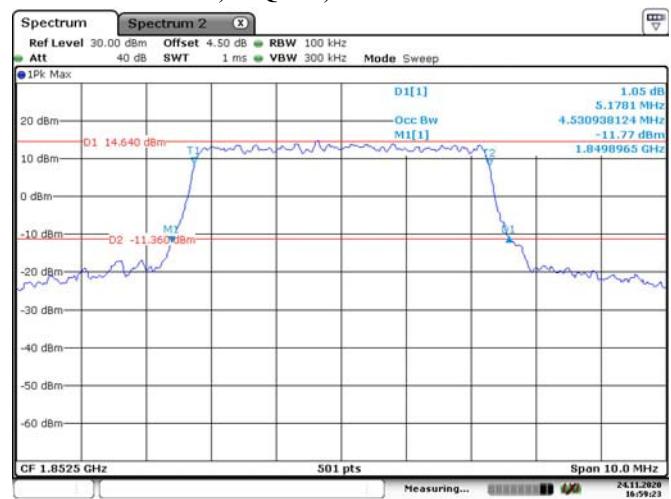
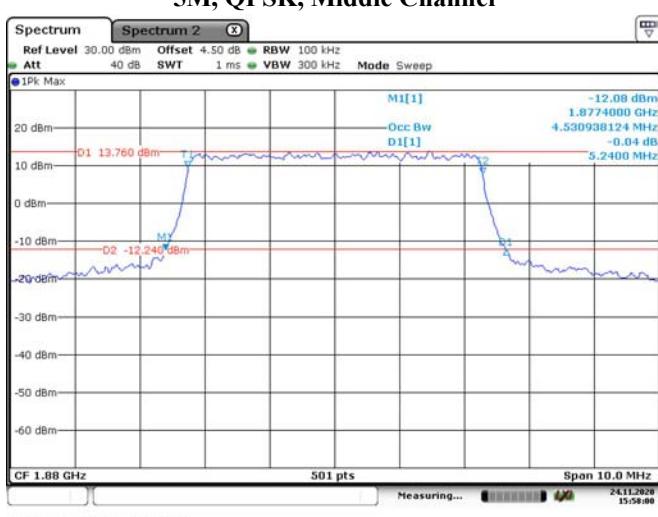
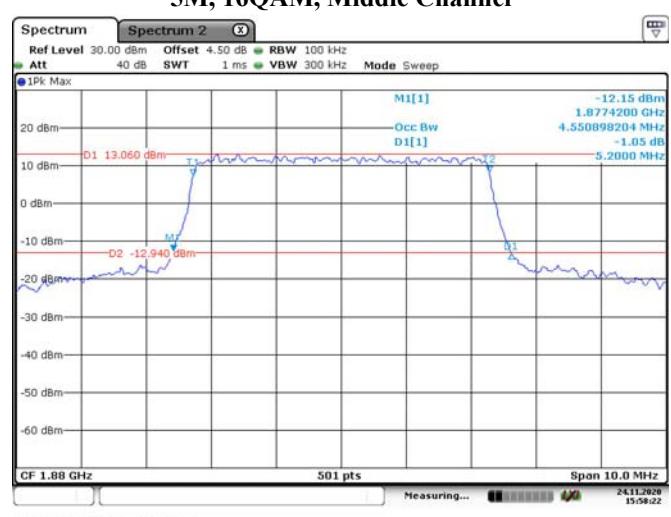
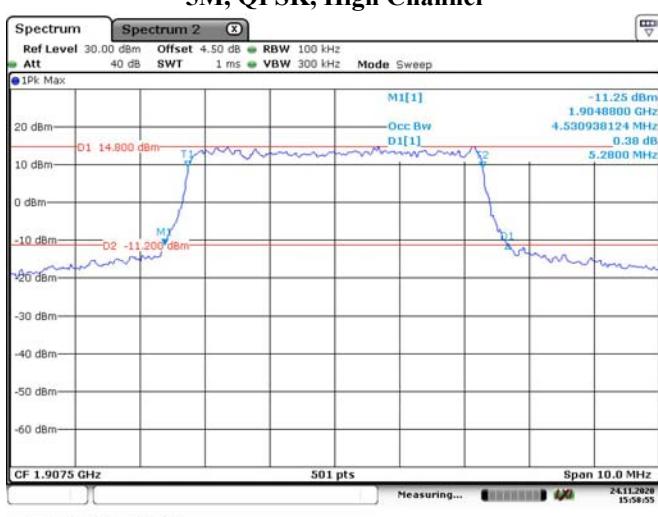
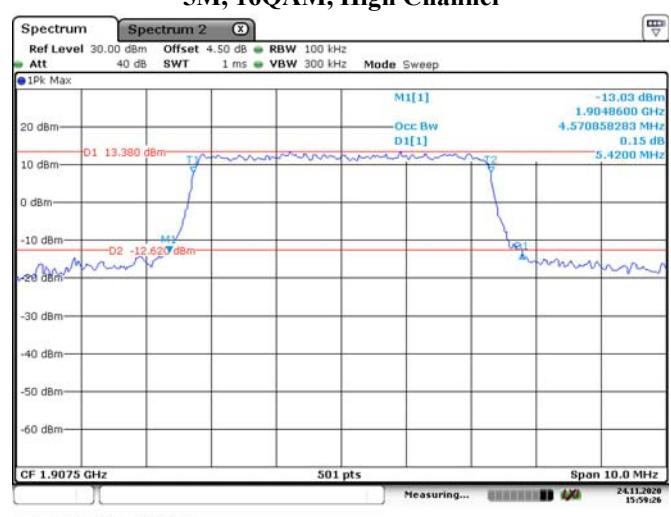
Date: 24.NOV.2020 15:55:42

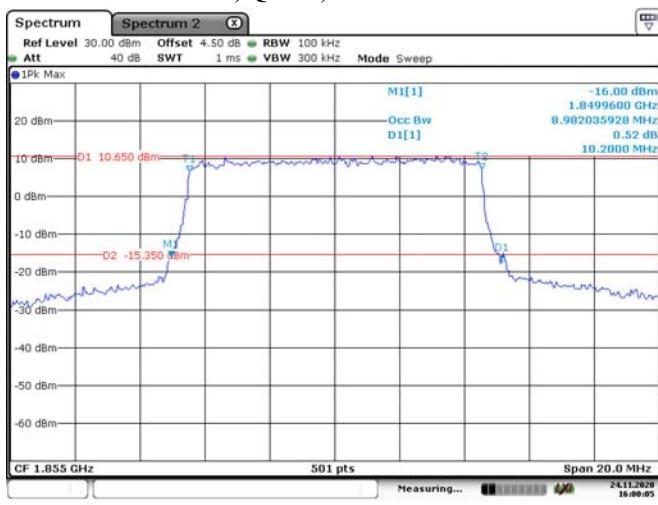
3M, QPSK, High Channel

Date: 24.NOV.2020 16:57:13

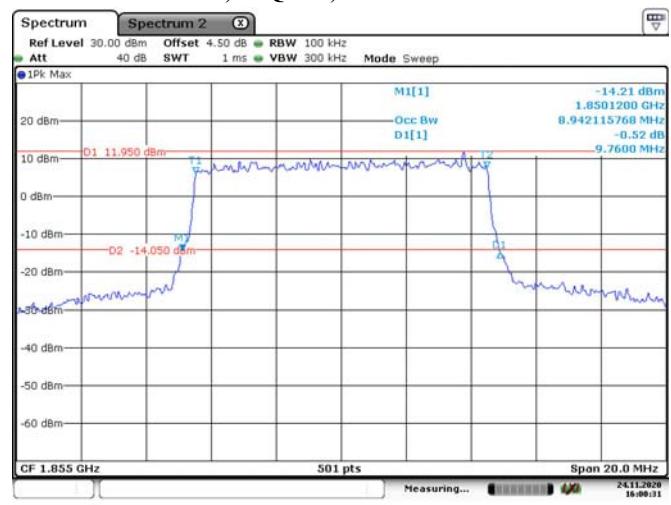
3M, 16QAM, High Channel

Date: 24.NOV.2020 16:57:34

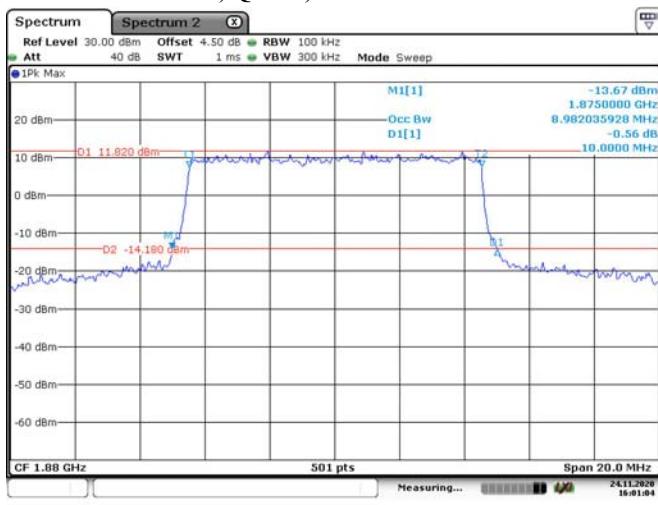
5M, QPSK, Low Channel**5M, 16QAM, Low Channel****5M, QPSK, Middle Channel****5M, 16QAM, Middle Channel****5M, QPSK, High Channel****5M, 16QAM, High Channel**

10M, QPSK, Low Channel

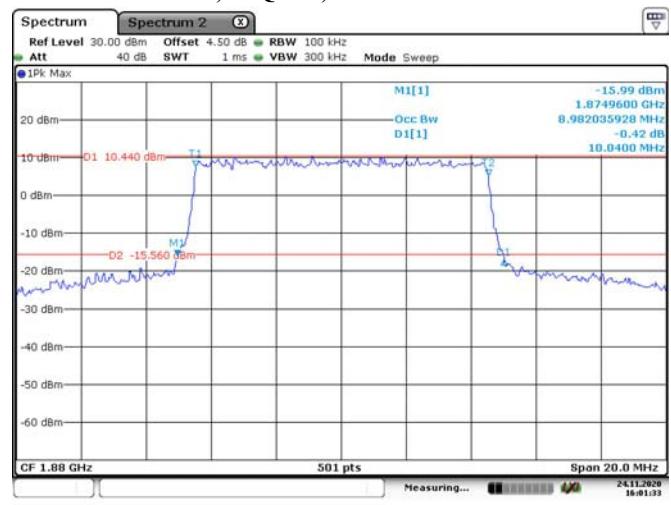
Date: 24.NOV.2020 16:00:05

10M, 16QAM, Low Channel

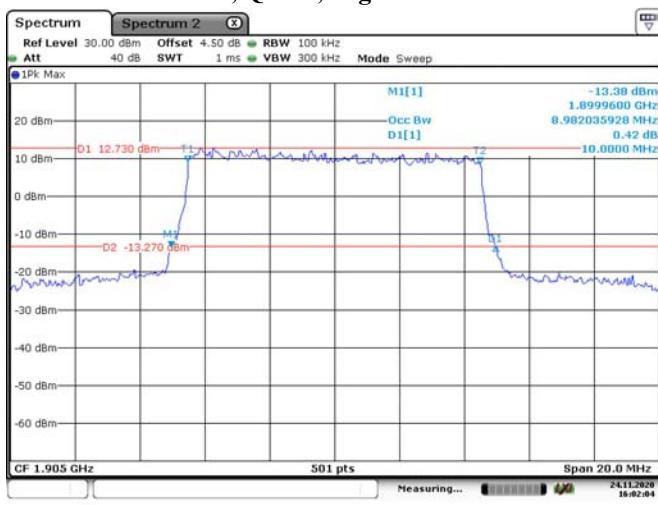
Date: 24.NOV.2020 16:00:05

10M, QPSK, Middle Channel

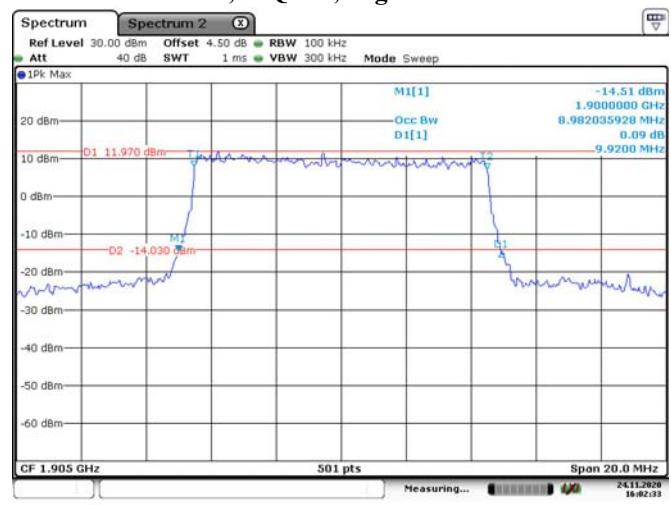
Date: 24.NOV.2020 16:01:04

10M, 16QAM, Middle Channel

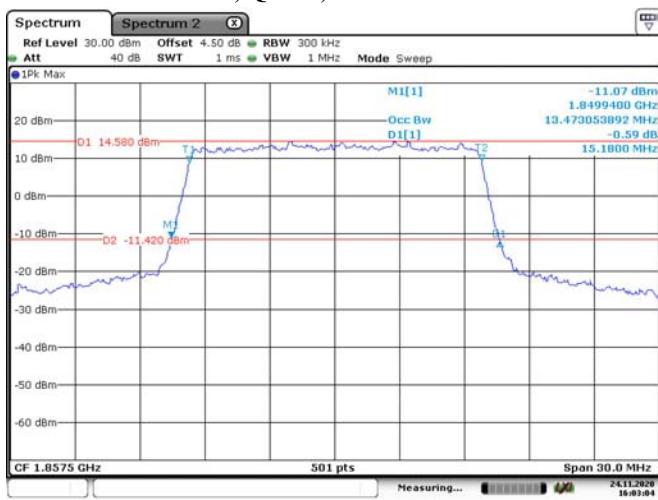
Date: 24.NOV.2020 16:01:34

10M, QPSK, High Channel

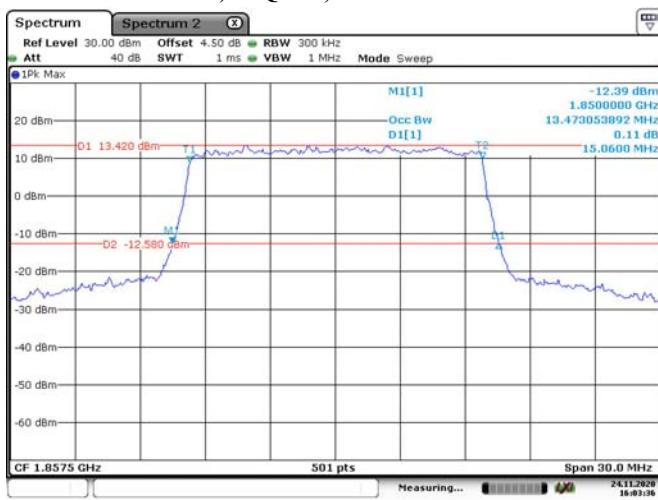
Date: 24.NOV.2020 16:02:04

10M, 16QAM, High Channel

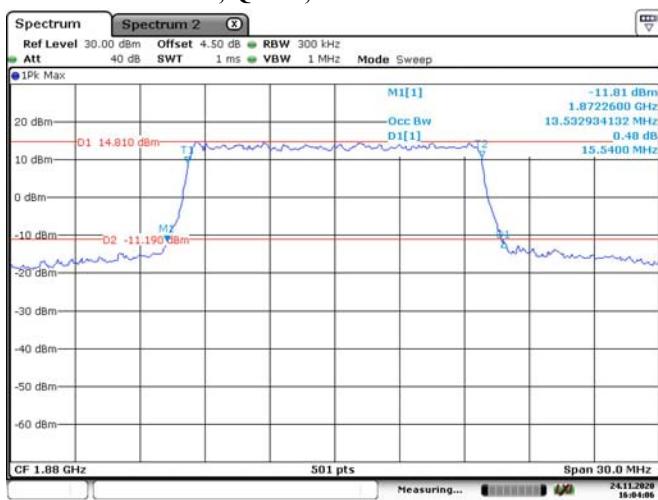
Date: 24.NOV.2020 16:02:34

15M, QPSK, Low Channel

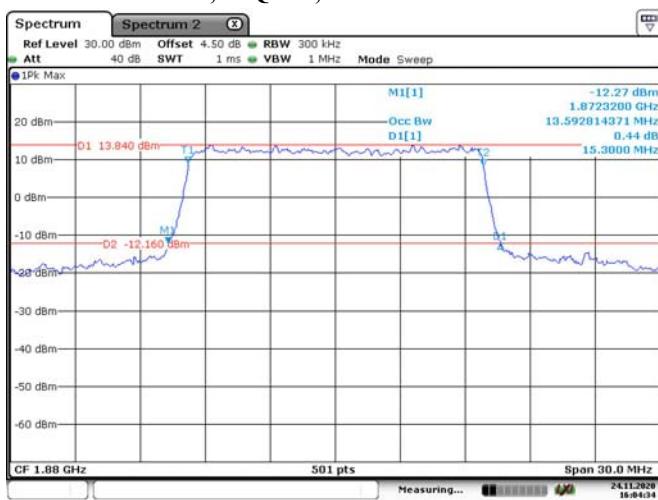
Date: 24.NOV.2020 16:03:05

15M, 16QAM, Low Channel

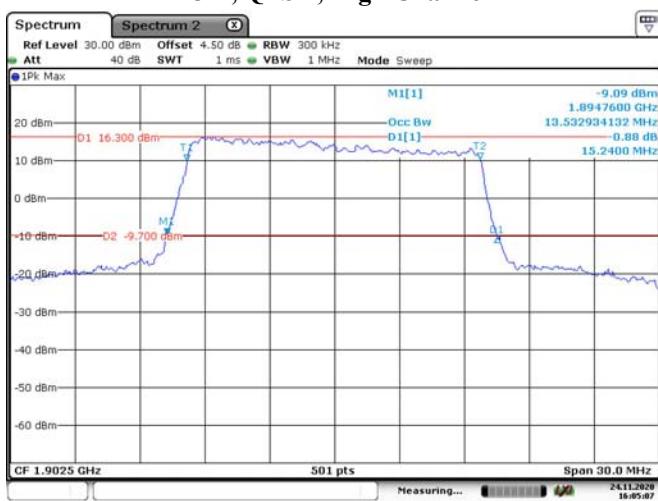
Date: 24.NOV.2020 16:03:36

15M, QPSK, Middle Channel

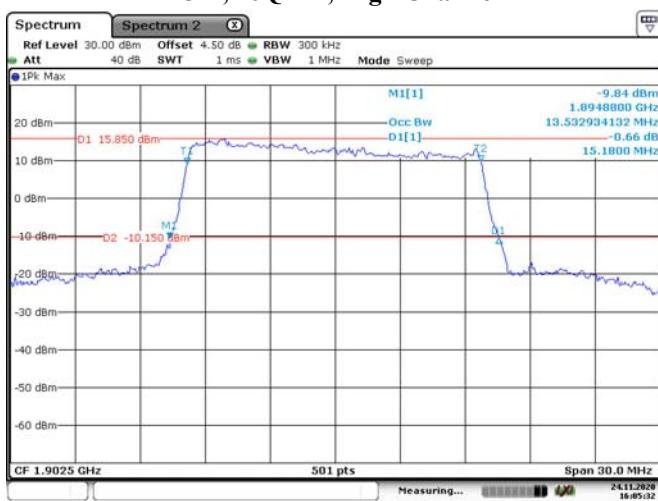
Date: 24.NOV.2020 16:04:06

15M, 16QAM, Middle Channel

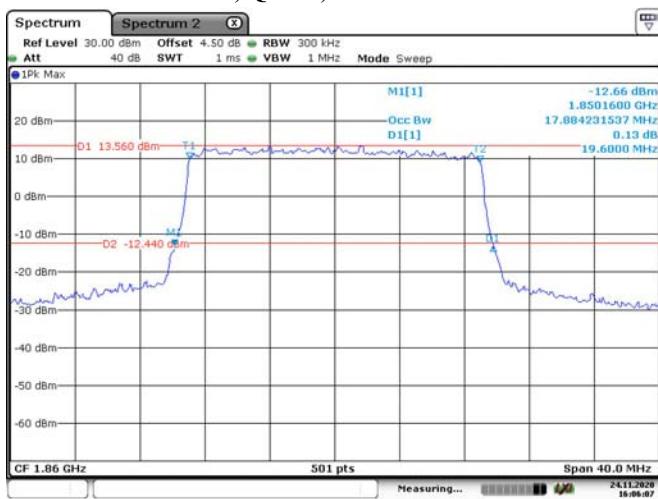
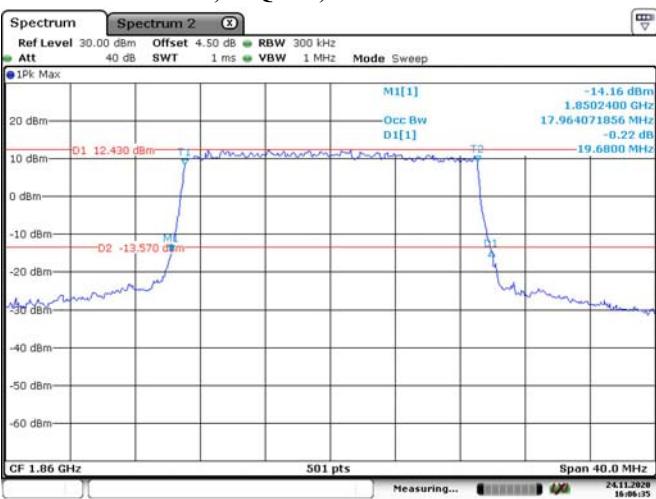
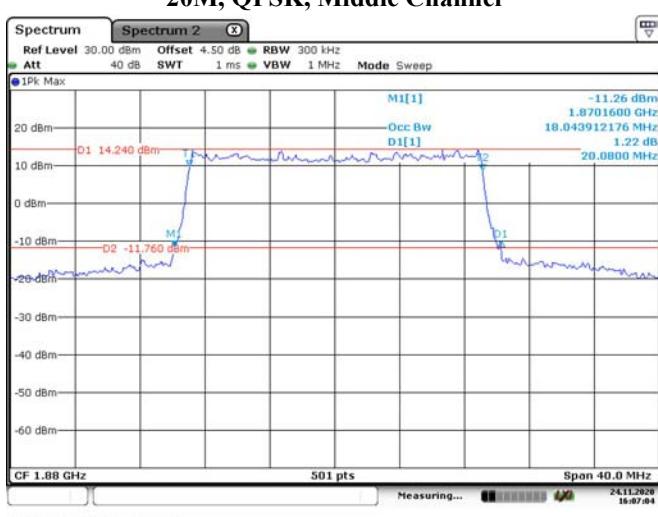
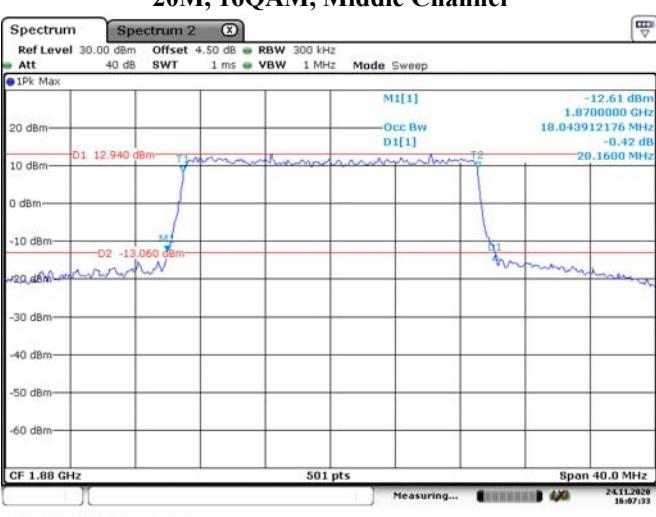
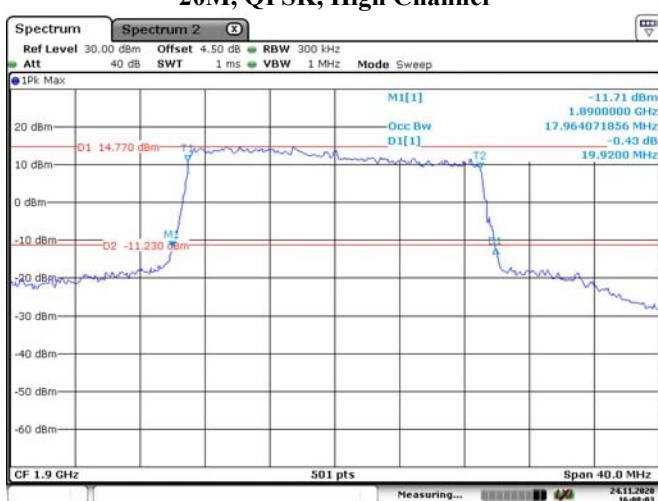
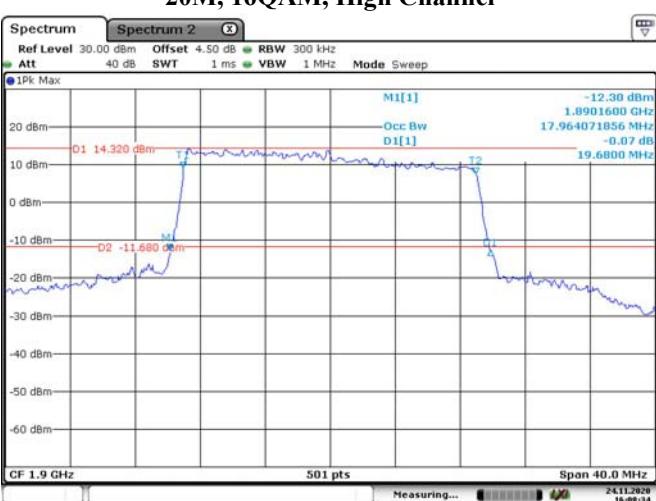
Date: 24.NOV.2020 16:04:35

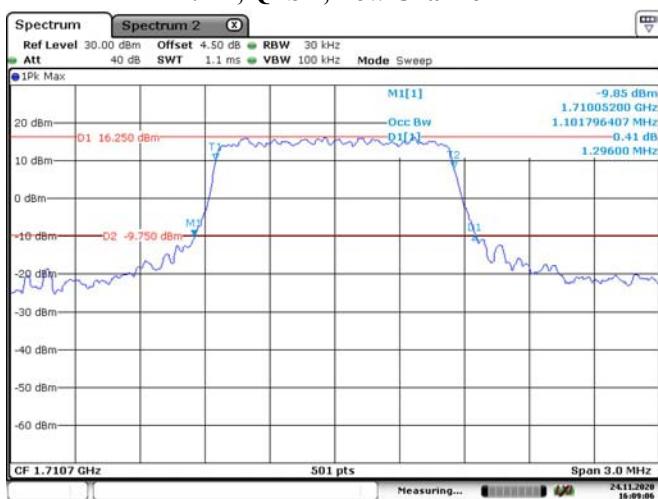
15M, QPSK, High Channel

Date: 24.NOV.2020 16:05:07

15M, 16QAM, High Channel

Date: 24.NOV.2020 16:05:32

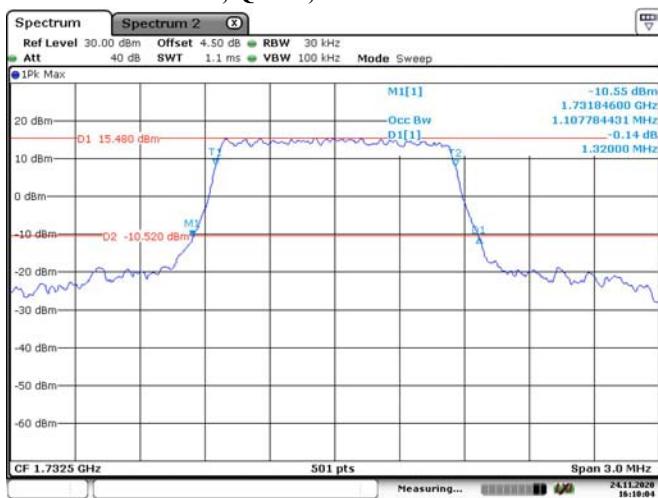
20M, QPSK, Low Channel**20M, 16QAM, Low Channel****20M, QPSK, Middle Channel****20M, 16QAM, Middle Channel****20M, QPSK, High Channel****20M, 16QAM, High Channel**

LTE Band 4:**1.4M, QPSK, Low Channel**

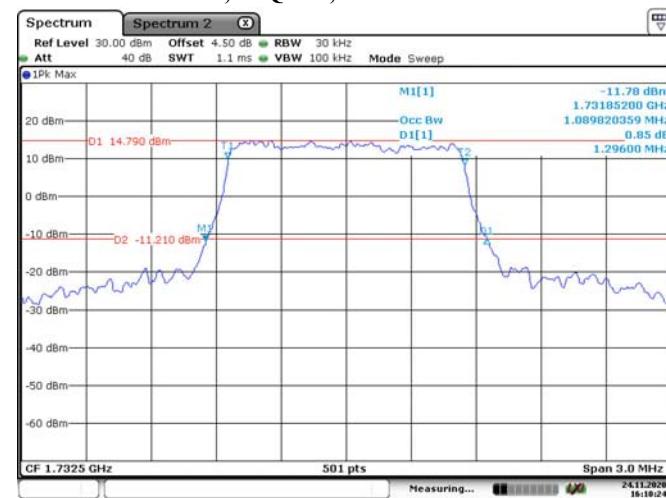
Date: 24.NOV.2020 16:09:06

1.4M, 16QAM, Low Channel

Date: 24.NOV.2020 16:09:39

1.4M, QPSK, Middle Channel

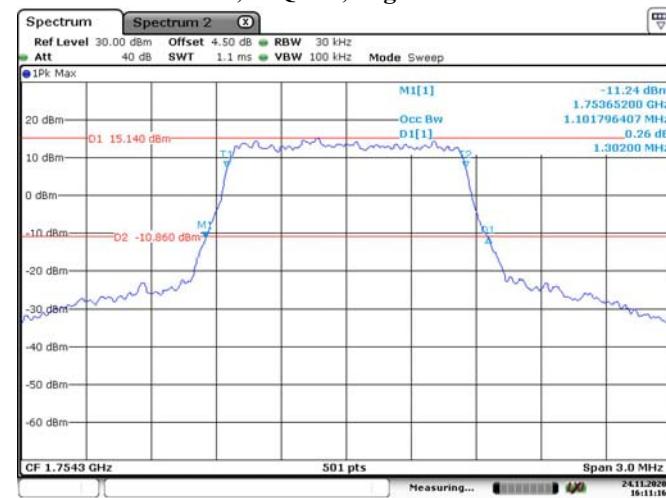
Date: 24.NOV.2020 16:10:05

1.4M, 16QAM, Middle Channel

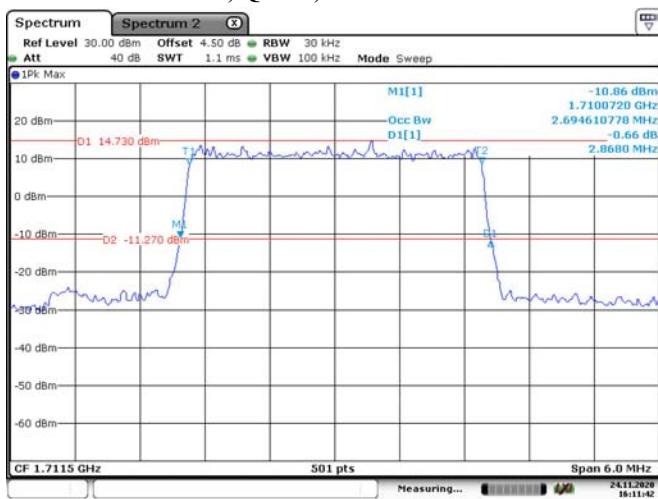
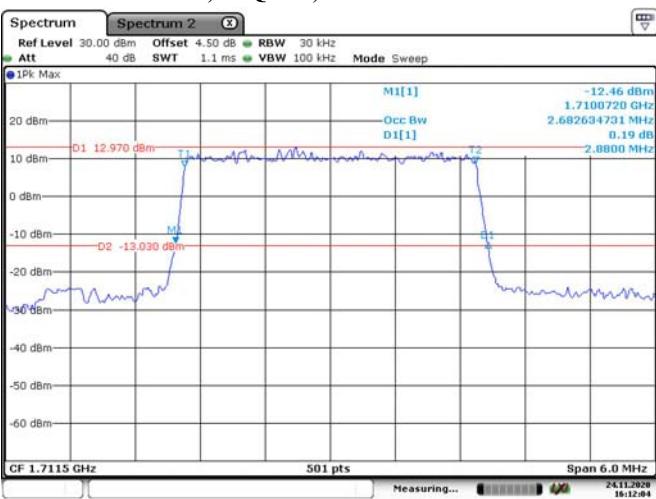
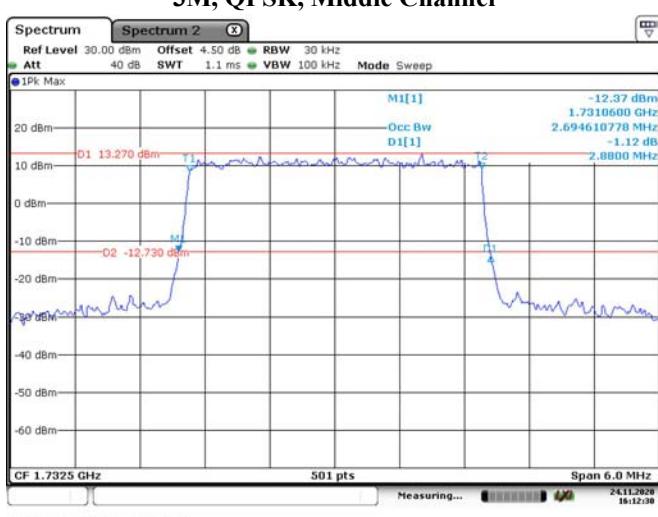
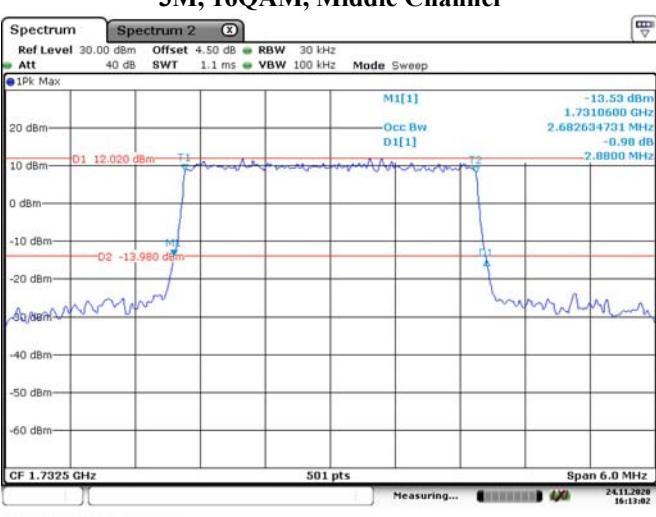
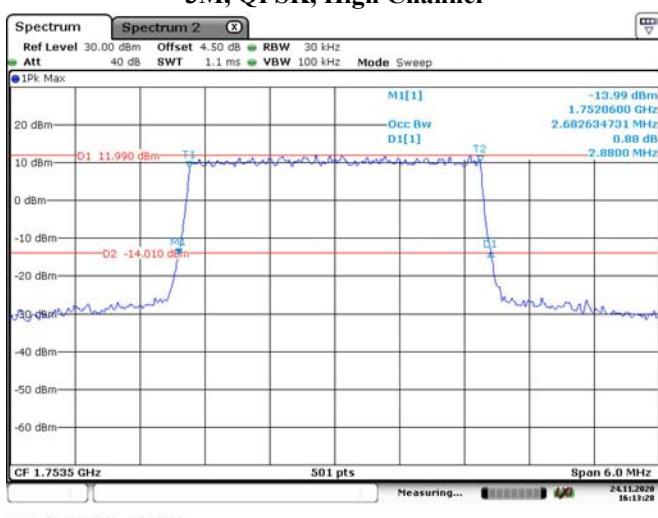
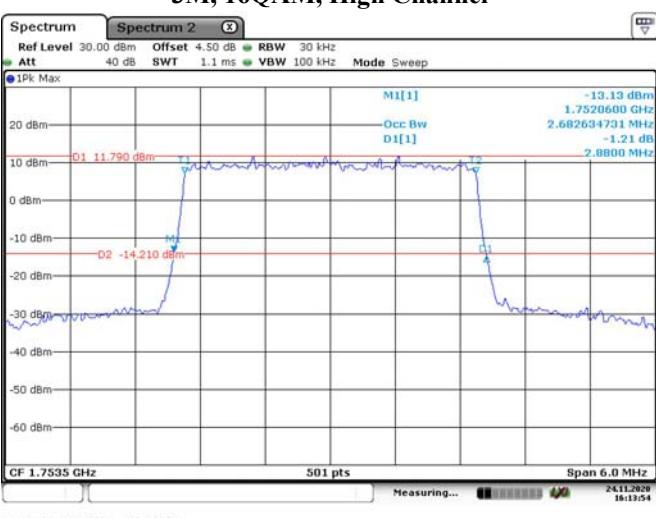
Date: 24.NOV.2020 16:10:24

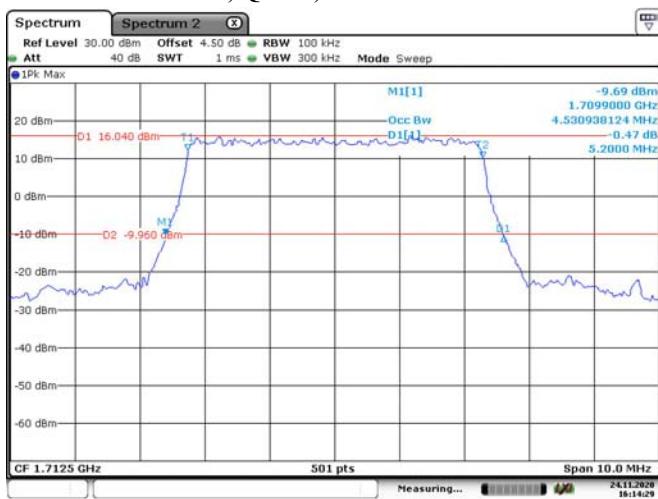
1.4M, QPSK, High Channel

Date: 24.NOV.2020 16:10:59

1.4M, 16QAM, High Channel

Date: 24.NOV.2020 16:11:16

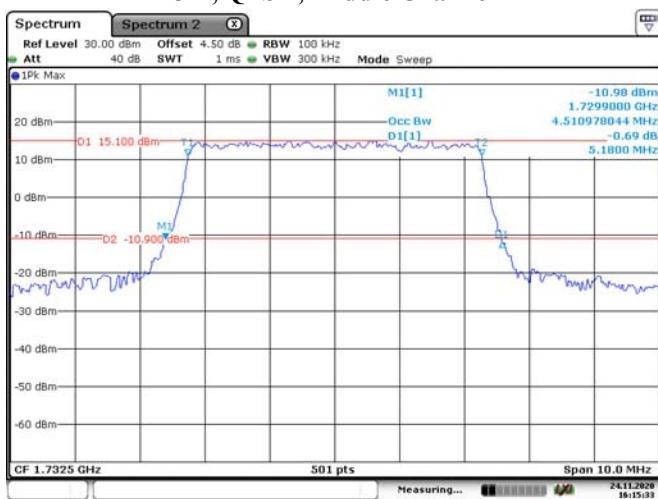
3M, QPSK, Low Channel**3M, 16QAM, Low Channel****3M, QPSK, Middle Channel****3M, 16QAM, Middle Channel****3M, QPSK, High Channel****3M, 16QAM, High Channel**

5M, QPSK, Low Channel

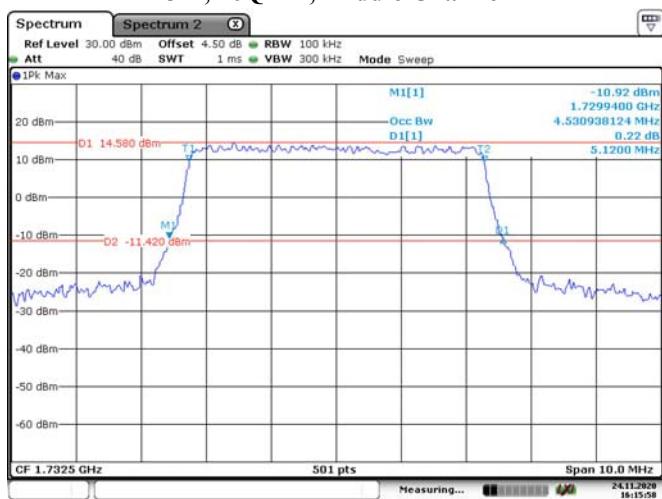
Date: 24.NOV.2020 16:14:29

5M, 16QAM, Low Channel

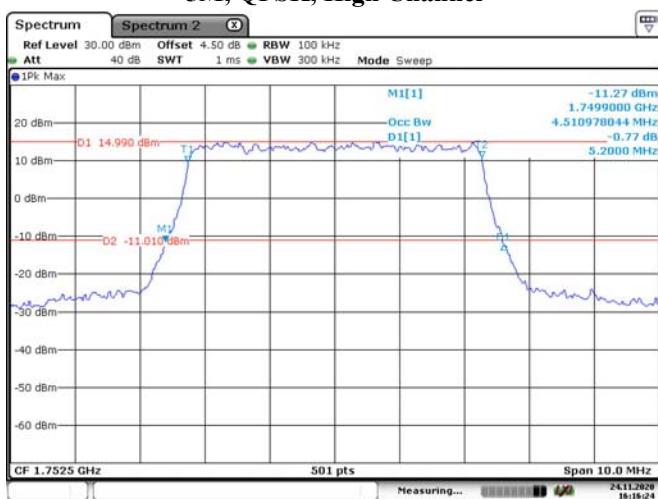
Date: 24.NOV.2020 16:14:51

5M, QPSK, Middle Channel

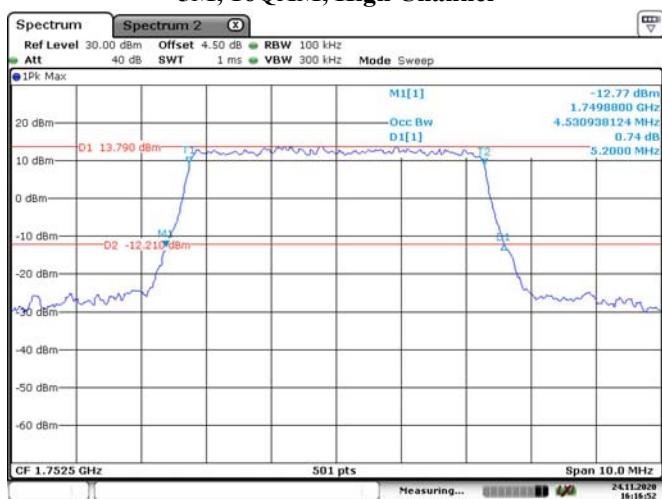
Date: 24.NOV.2020 16:15:33

5M, 16QAM, Middle Channel

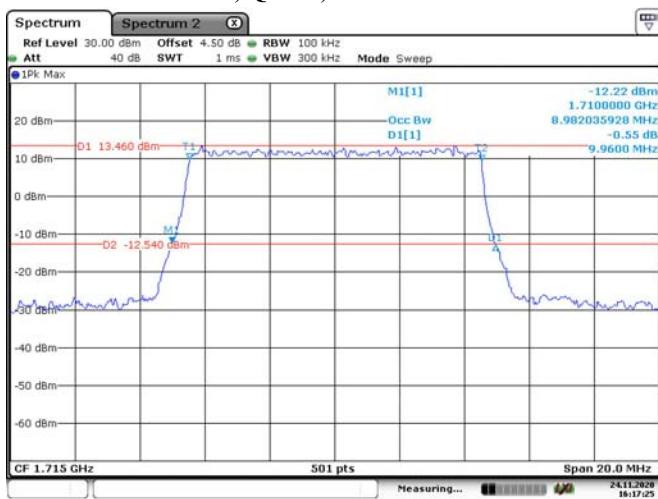
Date: 24.NOV.2020 16:15:58

5M, QPSK, High Channel

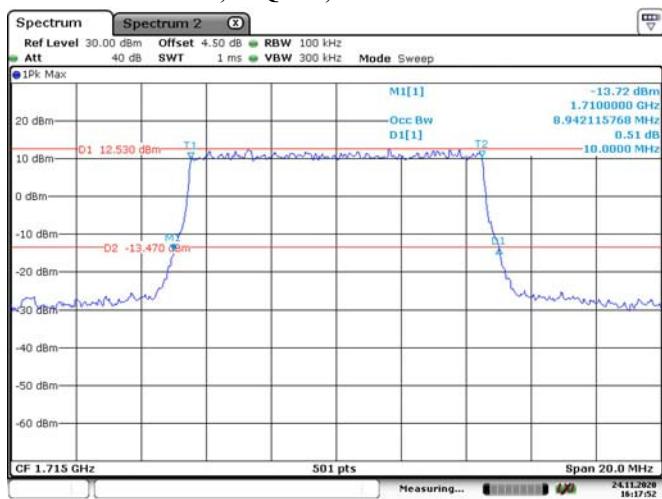
Date: 24.NOV.2020 16:16:24

5M, 16QAM, High Channel

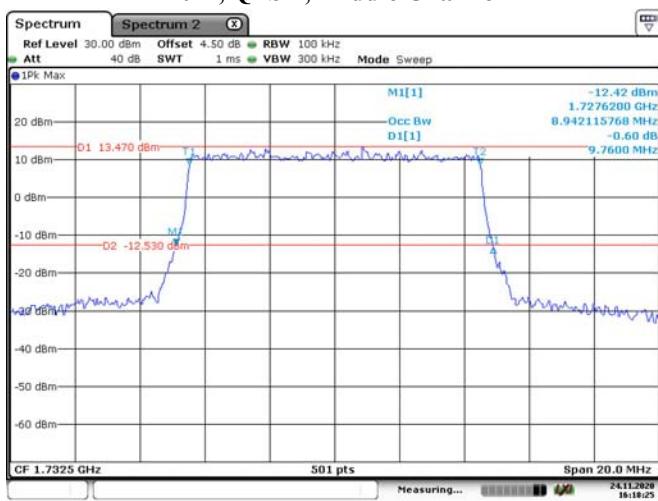
Date: 24.NOV.2020 16:16:52

10M, QPSK, Low Channel

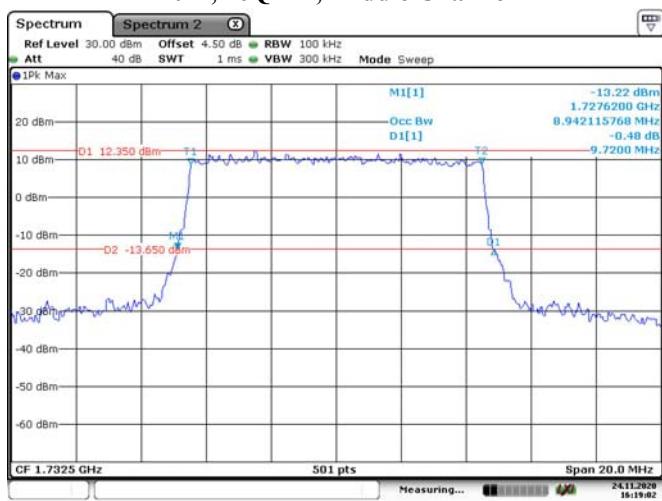
Date: 24.NOV.2020 16:17:25

10M, 16QAM, Low Channel

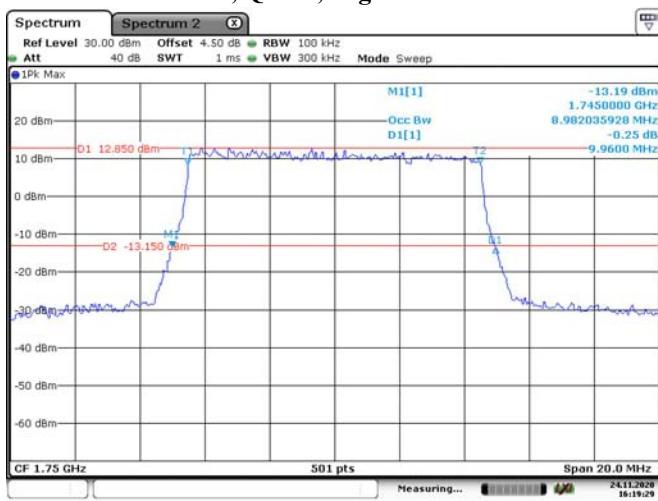
Date: 24.NOV.2020 16:17:52

10M, QPSK, Middle Channel

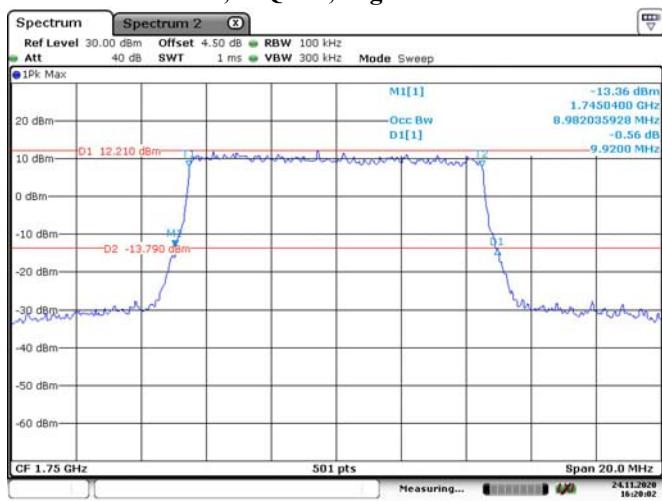
Date: 24.NOV.2020 16:18:26

10M, 16QAM, Middle Channel

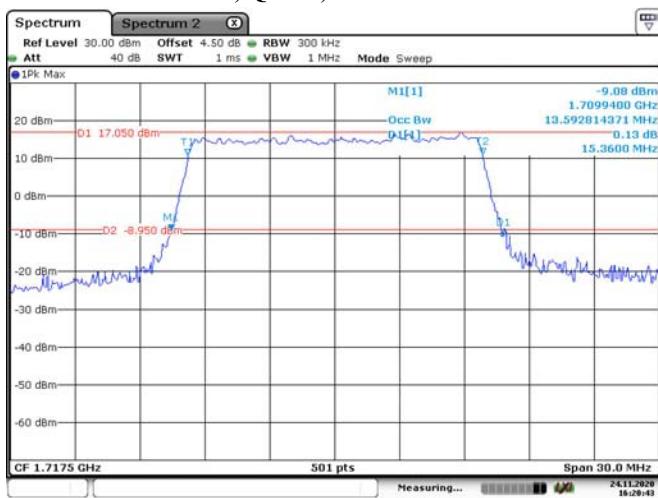
Date: 24.NOV.2020 16:19:02

10M, QPSK, High Channel

Date: 24.NOV.2020 16:19:29

10M, 16QAM, High Channel

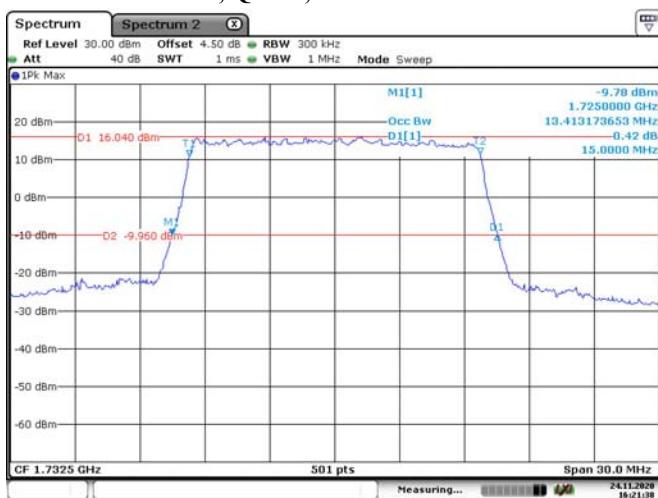
Date: 24.NOV.2020 16:20:02

15M, QPSK, Low Channel

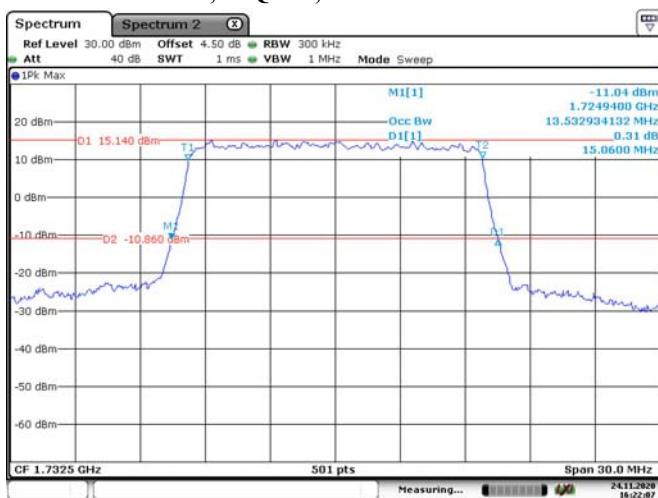
Date: 24.NOV.2020 16:20:43

15M, 16QAM, Low Channel

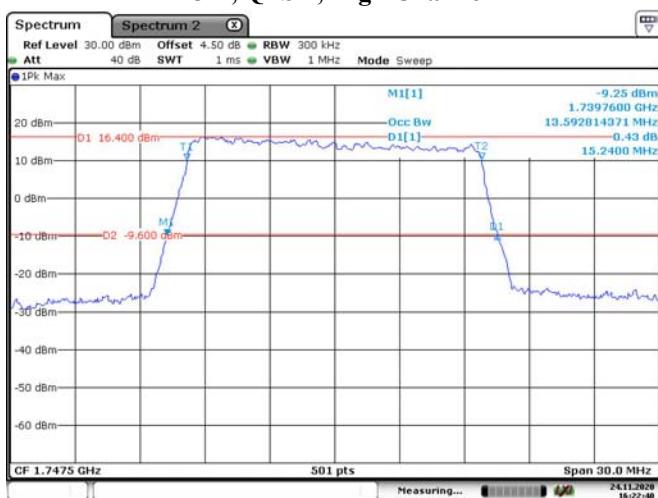
Date: 24.NOV.2020 16:21:12

15M, QPSK, Middle Channel

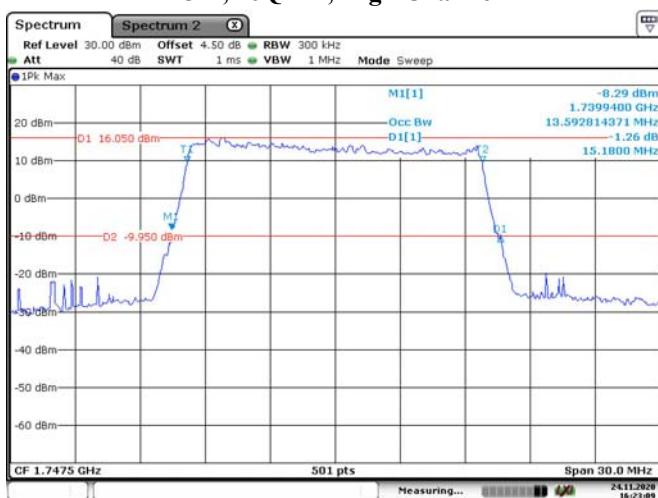
Date: 24.NOV.2020 16:21:38

15M, 16QAM, Middle Channel

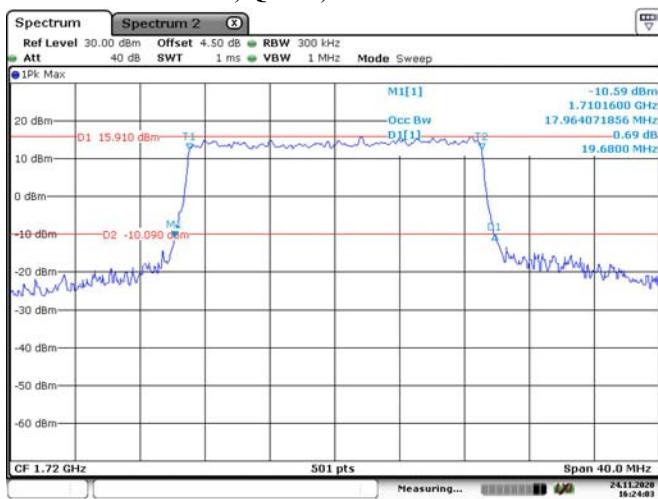
Date: 24.NOV.2020 16:22:07

15M, QPSK, High Channel

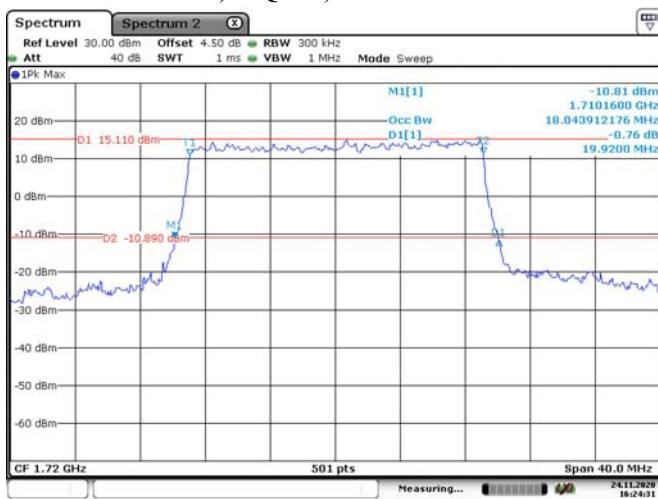
Date: 24.NOV.2020 16:22:40

15M, 16QAM, High Channel

Date: 24.NOV.2020 16:23:09

20M, QPSK, Low Channel

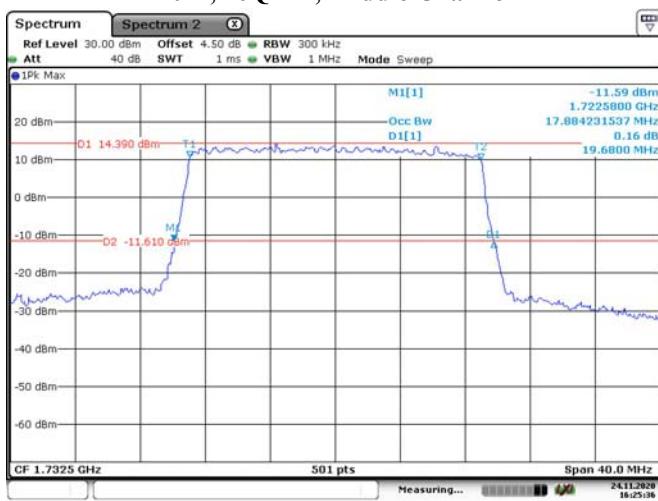
Date: 24.NOV.2020 16:24:03

20M, 16QAM, Low Channel

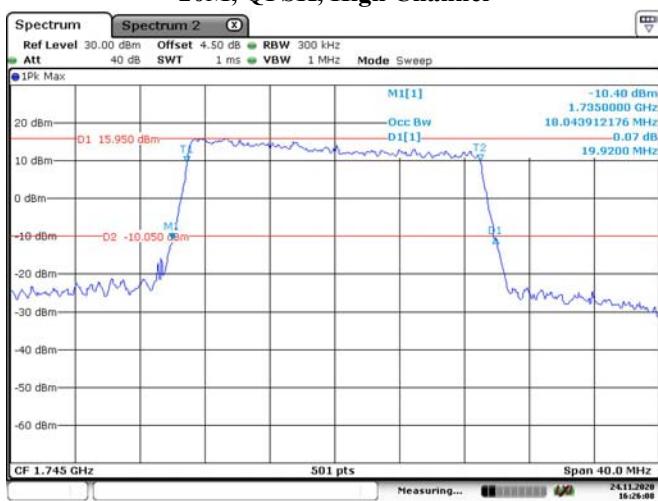
Date: 24.NOV.2020 16:24:31

20M, QPSK, Middle Channel

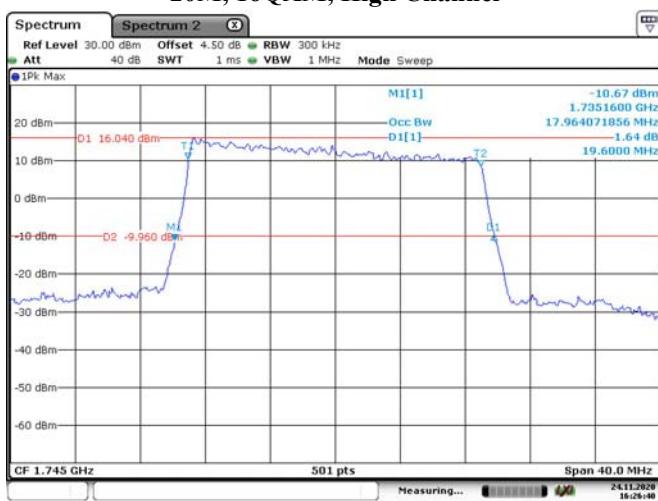
Date: 24.NOV.2020 16:25:04

20M, 16QAM, Middle Channel

Date: 24.NOV.2020 16:25:36

20M, QPSK, High Channel

Date: 24.NOV.2020 16:26:08

20M, 16QAM, High Channel

Date: 24.NOV.2020 16:26:40

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS

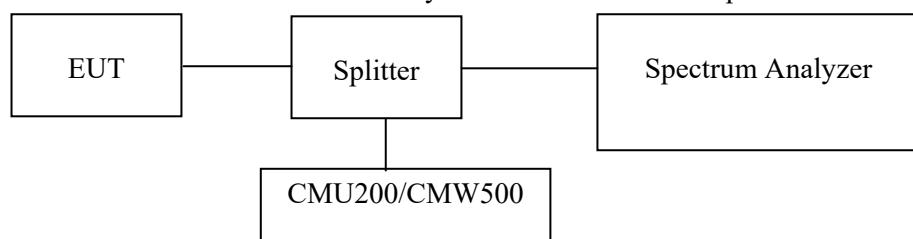
Applicable Standard

FCC §2.1051, §22.917(a), §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2020-07-07	2021-07-07
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005011	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Blocking Control	EMDCB-00036	0E01201047	Each time	N/A
Unknown	Attenuator	UNAT-3+	15529	Each time	N/A
E-Microwave	Two-way Spliter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

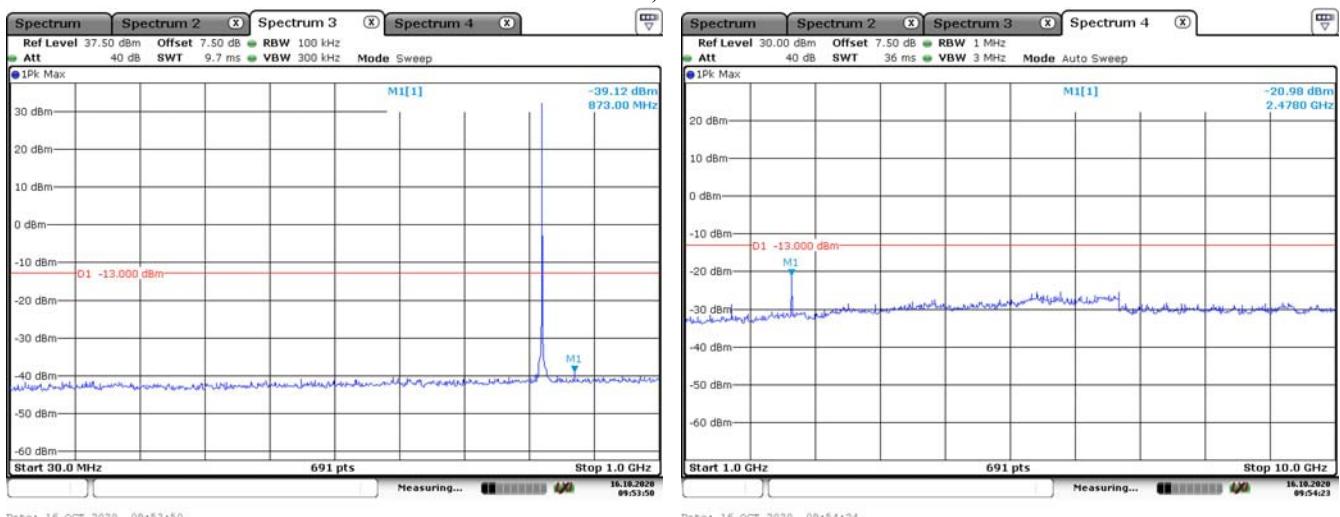
Test Data

Environmental Conditions

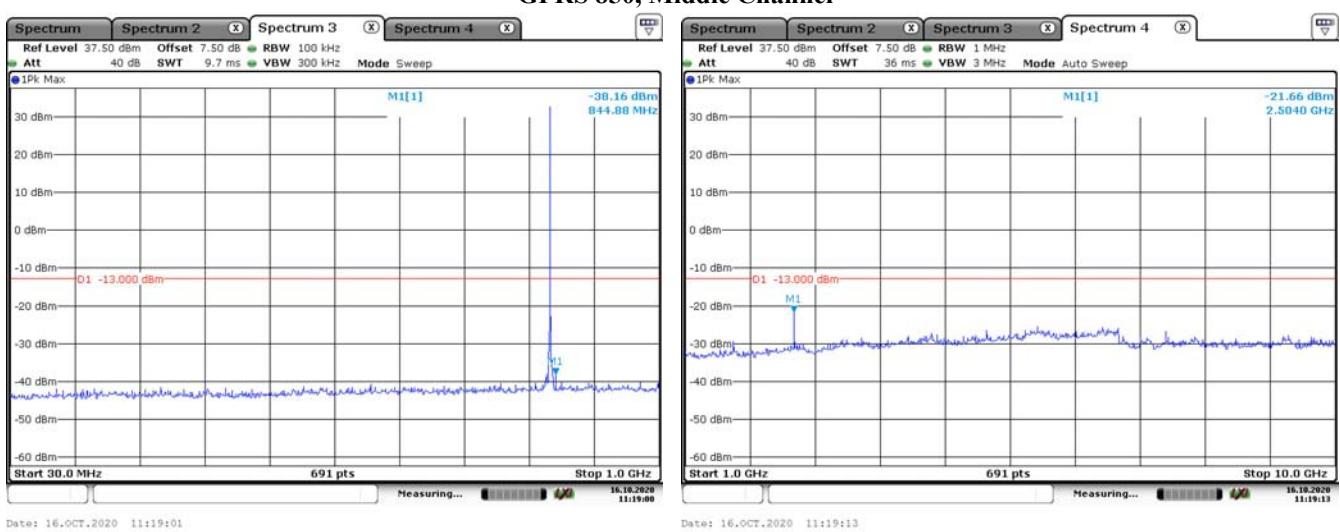
Temperature:	23.8~29.8 °C
Relative Humidity:	32~64%
ATM Pressure:	100.6~101.9kPa
Tester:	Rita Huang
Test Date:	2020.10.16-2020.11.24

Test Result: Compliance. Please refer to the following plots.

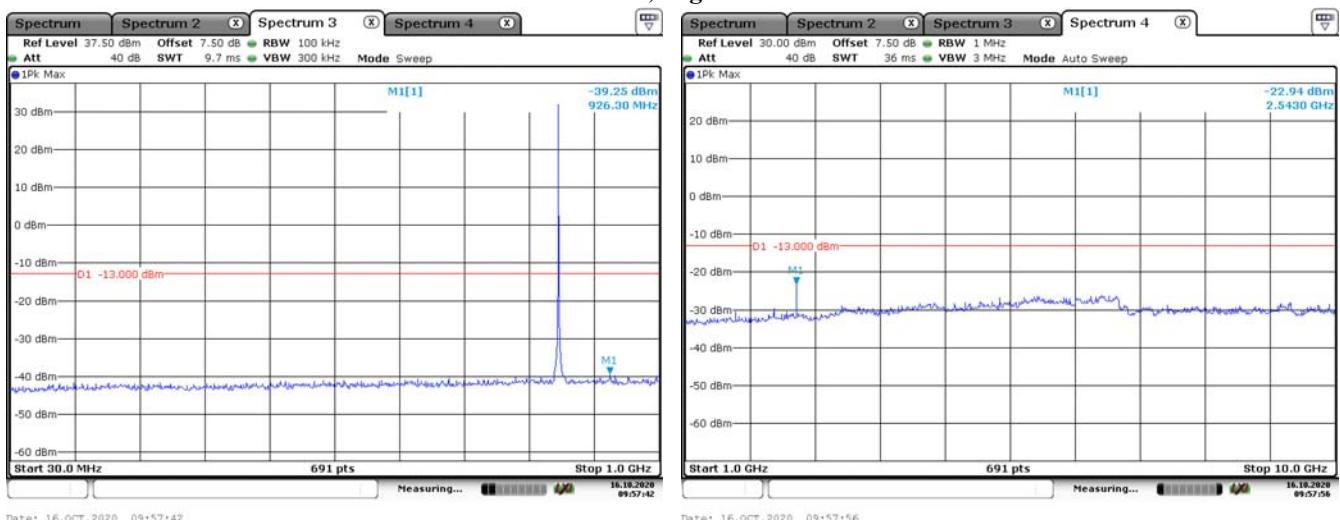
GPRS 850, Low Channel



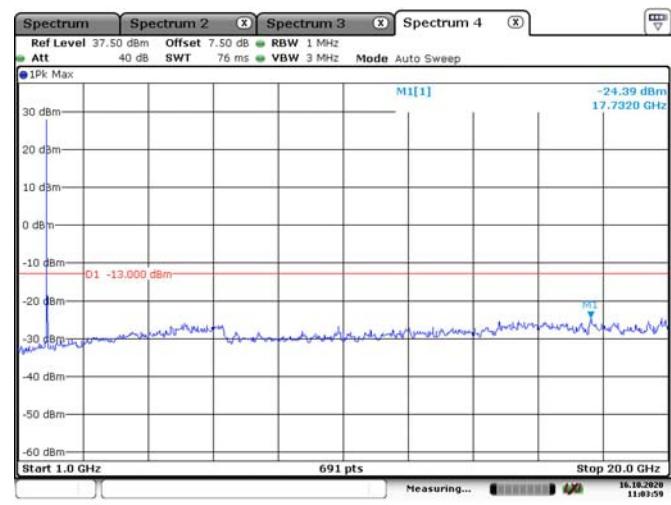
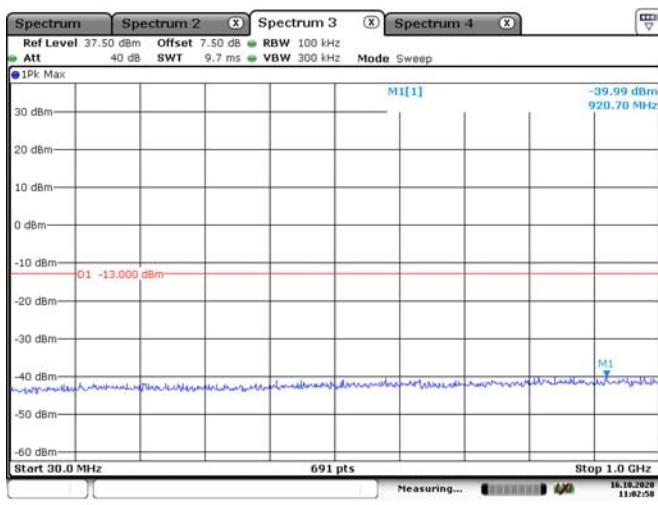
GPRS 850, Middle Channel



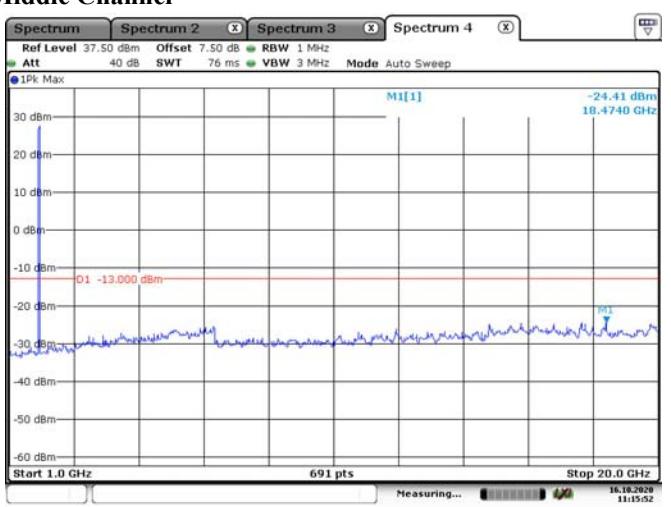
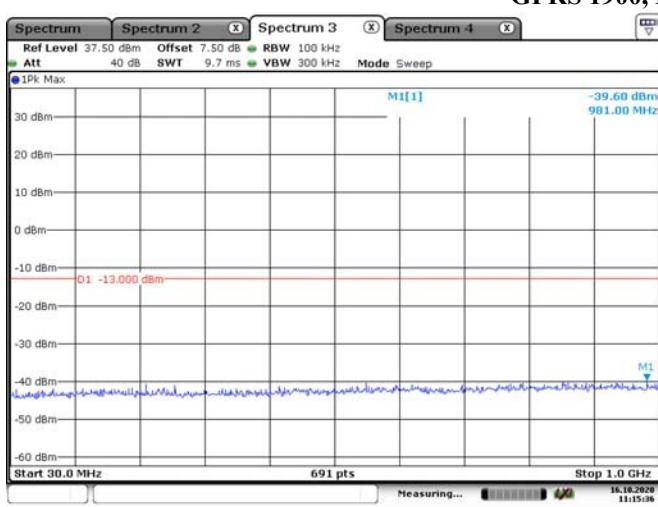
GPRS 850, High Channel



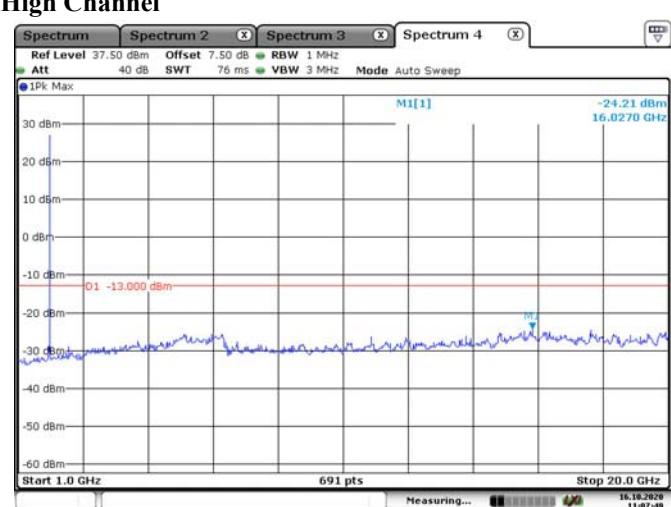
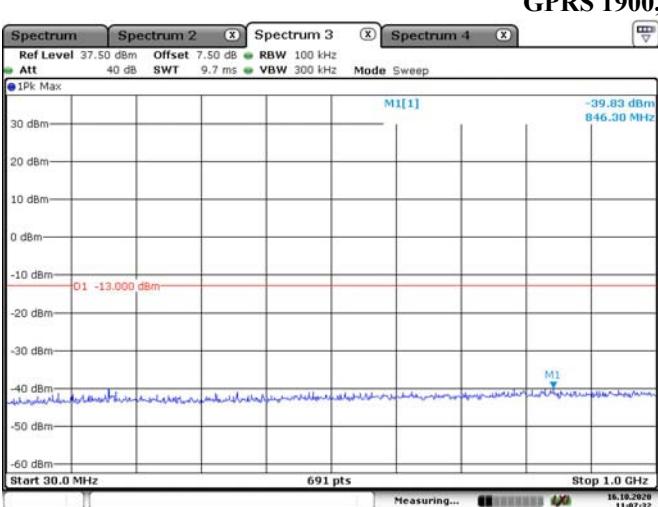
GPRS 1900, Low Channel



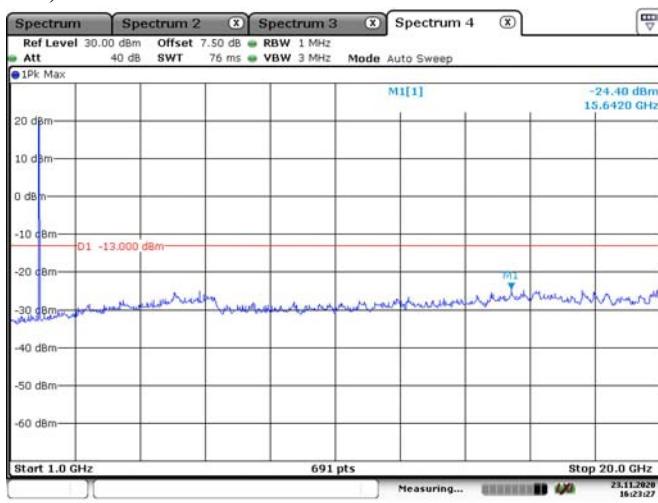
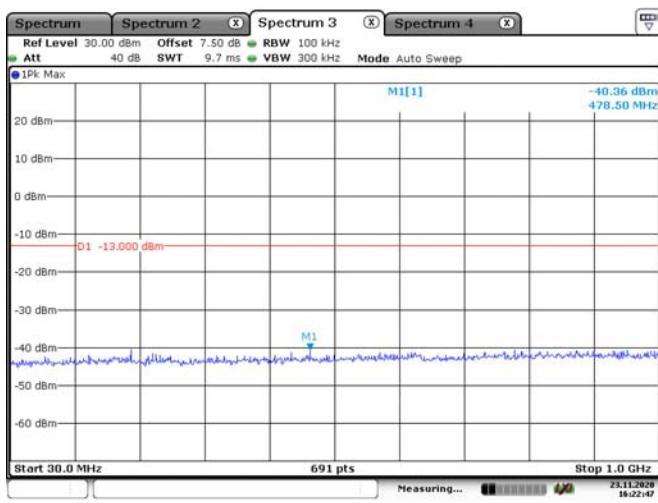
GPRS 1900, Middle Channel



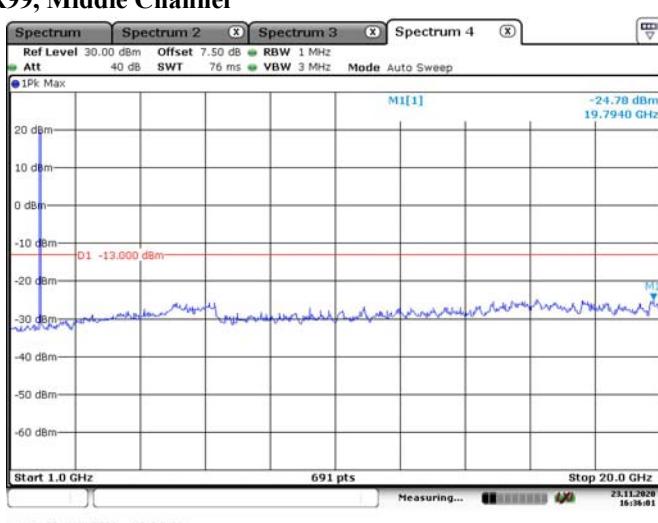
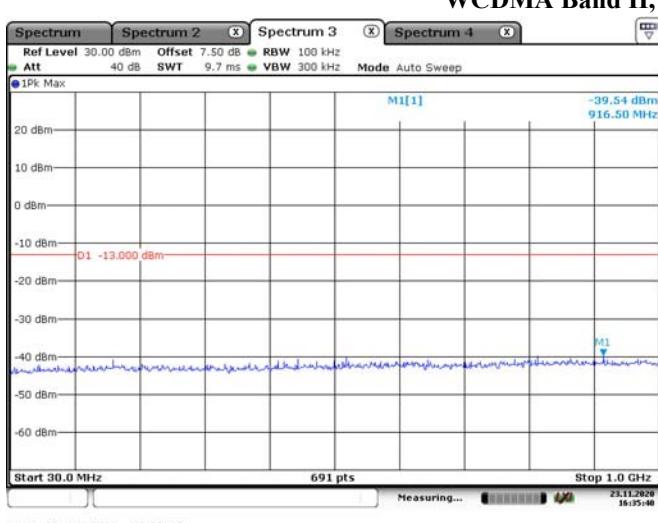
GPRS 1900, High Channel



WCDMA Band II, R99, Low Channel



WCDMA Band II, R99, Middle Channel



WCDMA Band II, R99, High Channel

