



Report No: FCC 1612187 File reference No: 2017-01-07

Applicant: Digiview Technology Limited

Product: Bluetooth Speaker

Model No: CM5301

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15 Subpart C,

Paragraph 15.247 regulations for the evaluation o

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: January 07, 2017

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1612187 Page 2 of 82

Date: 2017-01-07



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC-Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 82

Report No.: FCC1612187

Date: 2017-01-07



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample.	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	12
5.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	22
8.0	Maximum Output Power.	34
9.0	Carrier Frequency Separation.	37
10.0	Number of Hopping Channel	41
11.0	Time of Occupancy (Dwell Time)	45
12.0	Out of Band Measurement.	58
13.0	Antenna Requirement.	71
14.0	FCC ID Label	72
15.0	Photo of Test Setup and EUT View.	73

Report No.: FCC1612187 Page 4 of 82

Date: 2017-01-07



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Digiview Technology Limited

Address: 3F,Building B1, GaoXinJian Industrial Park,FuYuan 1st Road, HePing Village,FuYong

Town, Bao An District, Shen Zhen, Guang Dong, China

Telephone: +86-755-33530646

Fax: --

1.3 Description of EUT

Product: Bluetooth Speaker

Manufacturer: Digiview Technology Limited

Address: 3F,Building B1, GaoXinJian Industrial Park,FuYuan 1st Road, HePing Village,

FuYong Town, BaoAn District, ShenZhen, Guang Dong, China

Brand Name: N/A
Model Number: CM5301
Additional Model Number: N/A

Type of Modulation GFSK, 月/4D-QPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB Antenna and the maximum Gain of this antenna is 0dBi;

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1612187 Page 5 of 82

Date: 2017-01-07



1.5 Test Duration 2016-12-27 to 2017-01-06

1.6 Test Uncertainty Conducted Emissions Uncertainty =3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

Terry lang The sample tested by

Print Name: Terry Tang

Page 6 of 82

Report No.: FCC1612187

Date: 2017-01-07



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2016-08-22	2017-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2016-08-22	2017-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2016-08-22	2017-08-21
Ultra Broadband ANT	R&S	HL562	100157	2016-08-23	2017-08-22
ESDV Test Receiver	R&S	ESDV	100008	2016-08-22	2017-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2016-08-22	2017-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2016-08-23	2017-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2016-08-22	2017-08-21
3m OATS			N/A	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2016-08-24	2017-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2016-08-24	2017-08-23
Power meter	Anritsu	ML2487A	6K00003613	2016-08-22	2017-08-21
Power sensor	Anritsu	MA2491A	32263	2016-08-22	2017-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2016-08-23	2017-08-21
LISN	AFJ	LS16C	10010947251	2016-08-22	2017-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2016-08-23	2017-08-22
9*6*6 Anechoic			N/A	2016-08-24	2017-08-23
EMI Test Receiver	RS	ESCS30	100139	2016-08-22	2017-08-21

Page 7 of 82

Report No.: FCC1612187

Date: 2017-01-07



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247 and ANSI C63.4:2014 AND ANSI C63.10:2013

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 82


Report No.: FCC1612187

Date: 2017-01-07



5. **Power Line Conducted Emission Test**

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2014. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 -2014.

Test Voltage: 120V~60Hz Block diagram of Test setup

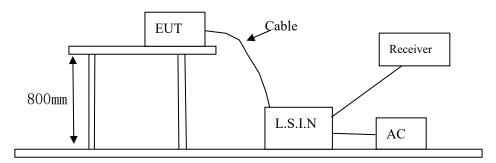

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1612187 Page 9 of 82

Date: 2017-01-07



A. EUT

Device	Device Manufacturer		FCC ID
Bluetooth Speaker	Digiview Technology Limited	CM5301	2ADWNCM5301

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Rating
Power	Smartab	TPA-9705100U1		Input: 100-240V~, 0.25A,
Supply				50/60Hz; Output: DC5V, 1A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2014.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107,15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1612187 Page 10 of 82

Date: 2017-01-07



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa


EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

80.0 dBuV

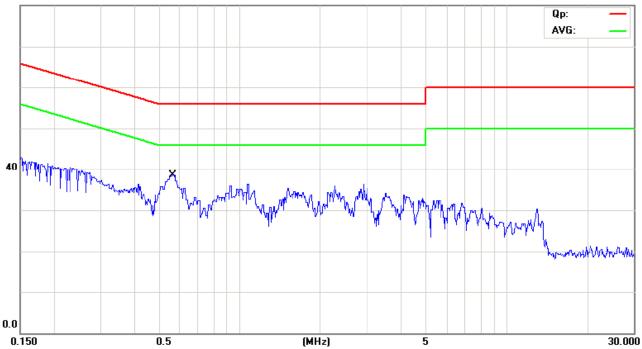

No. Mk.	Freq.	_	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.5672	26.00	10.36	36.36	56.00	-19.64	QP	
2 *	0.5672	18.90	10.36	29.26	46.00	-16.74	AVG	

Report No.: FCC1612187 Page 11 of 82

Date: 2017-01-07



B: **Conducted Emission on Neutral Terminal (150kHz to 30MHz)**

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

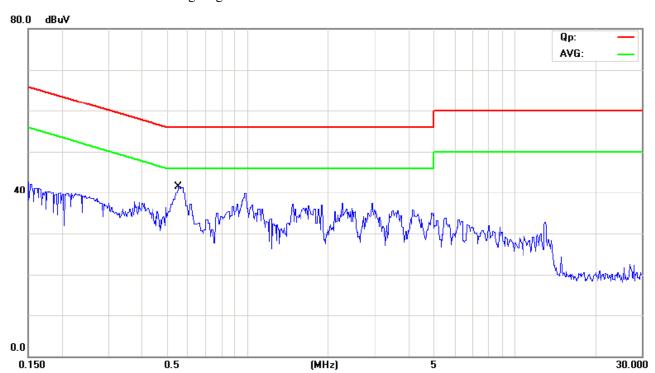

No. Mk.	Freq.	_	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.5497	26.80	10.34	37.14	56.00	-18.86	QP	
2	0.5497	13.80	10.34	24.14	46.00	-21.86	AVG	

Report No.: FCC1612187 Page 12 of 82


Date: 2017-01-07



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10–2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

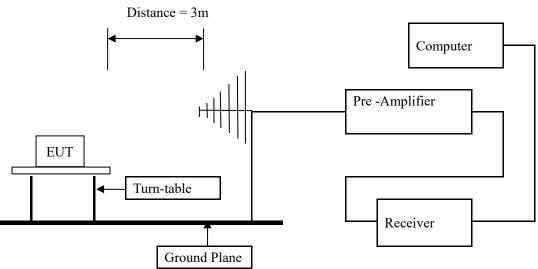

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1612187 Page 13 of 82

Date: 2017-01-07



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

	-	
Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All modulation have been tested ,GFSK was found as the worst case and only reported

Report No.: FCC1612187 Page 14 of 82

Date: 2017-01-07



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
192.040	25.61	Н	43.50
290.480	33.14	Н	46.00
258.440	29.24	Н	46.00
48.840	28.98	V	40.00
316.240	35.93	V	46.00
176.840	27.40	V	43.50


Page 15 of 82

Report No.: FCC1612187

Date: 2017-01-07



Test Figure:

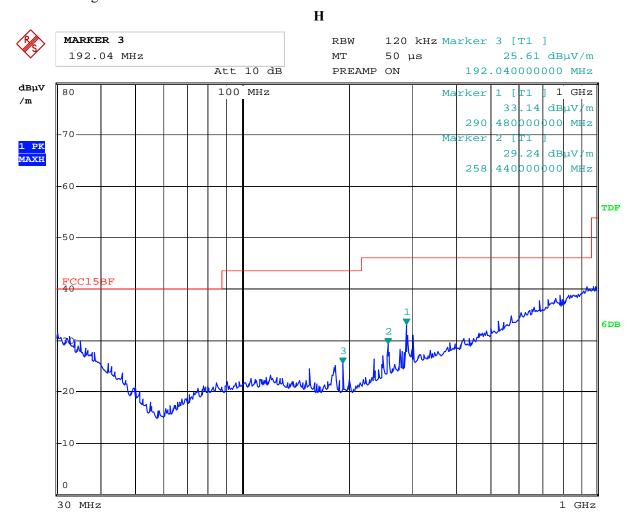

28.DEC.2016 20:48:50 Date:


Page 16 of 82

Report No.: FCC1612187

Date: 2017-01-07



Test Figure:

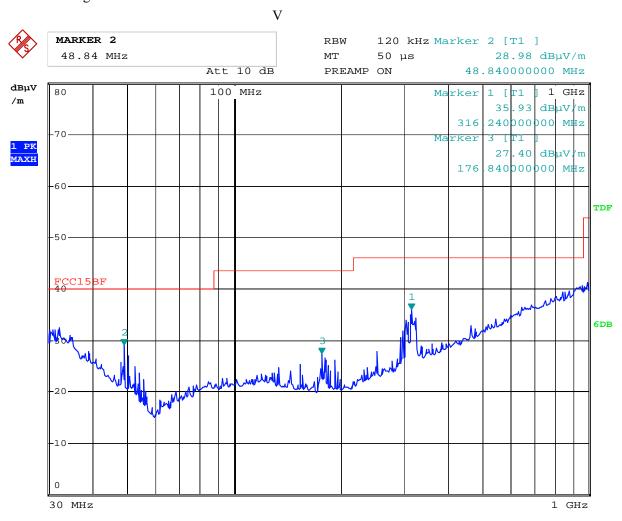

28.DEC.2016 20:58:45 Date:

Report No.: FCC1612187 Page 17 of 82

Date: 2017-01-07



Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
4804	ı	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206	1	H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412	1	H/V	74(Peak)/ 54(AV)
16814	1	H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618	1	H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882	1	Н	74(Peak)/ 54(AV)
4882	1	V	74(Peak)/ 54(AV)
7323	1	H/V	74(Peak)/ 54(AV)
9764	-	H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC1612187 Page 18 of 82

Date: 2017-01-07



Operation Mode: Transmitting under High Channel (2480MHz)

	0 0	,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured


Report No.: FCC1612187

Date: 2017-01-07




Please refer to the following test plots for details:

Low Channel: Horizontal

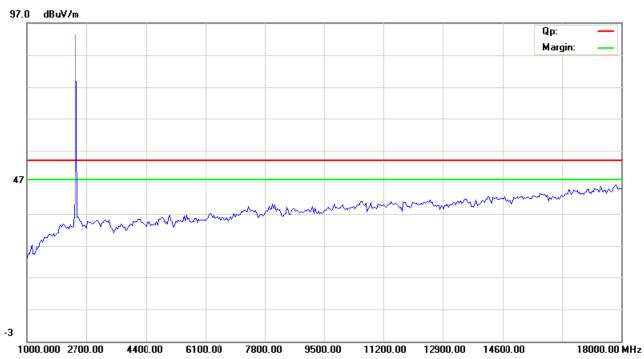

Low Channel: Vertical

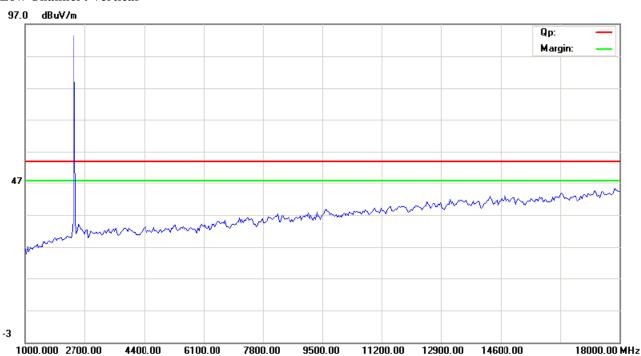

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 20 of 82

Report No.: FCC1612187


Date: 2017-01-07



Middle Channel: Horizontal

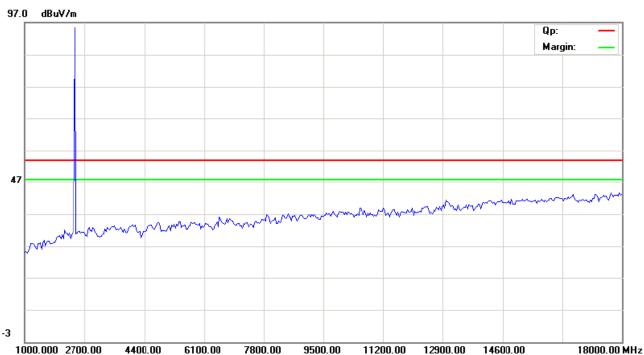

Middle Channel: Vertical

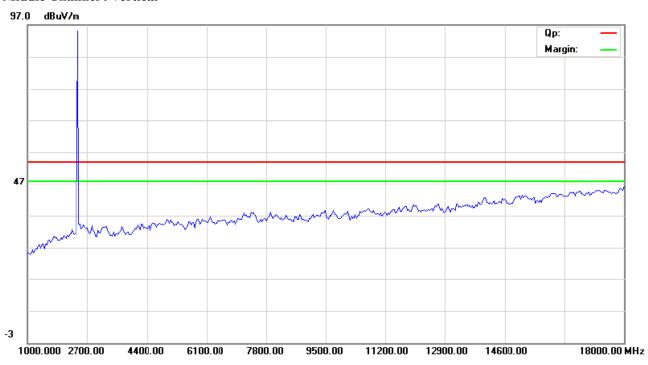

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 21 of 82

Report No.: FCC1612187


Date: 2017-01-07



High Channel: Horizontal

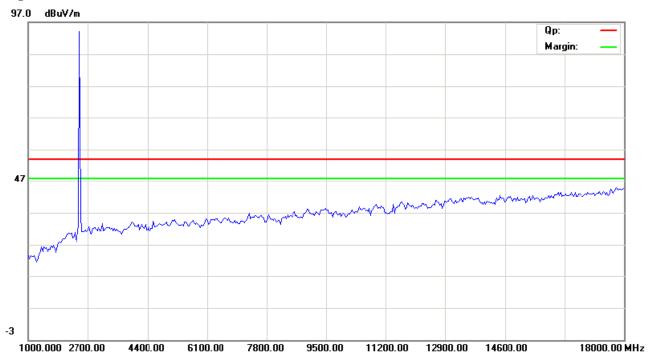

High Channel: Vertical

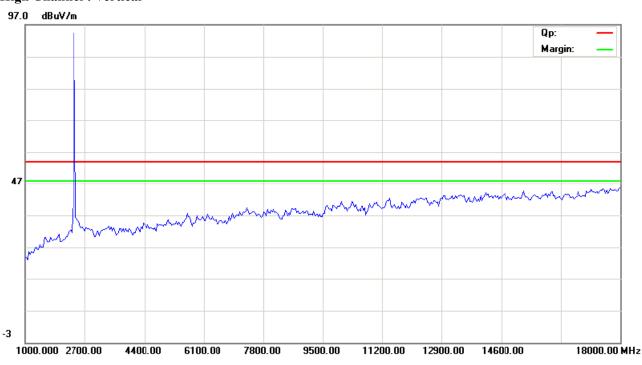

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1612187 Page 22 of 82

Date: 2017-01-07



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Froutilation. GFSK											
EUT	T Bluetooth Speaker		Model		CM5301						
Mode	9	Keep Tra	nsmitting Input		nsmitting Input Voltage			DC3.7V			
Tempera	ture	24 deg. C,		Humidity		g. C, Humidity		g. C, Humidity			56% RH
Channel	channel Frequency (MHz) 20 dB Band (kHz)			idth Maximum Limit (kHz)		Pass/ Fail					
Low		2402	110	0			Pass				
Middle		2441	110	0			Pass				
High		2480	110	0			Pass				


Report No.: FCC1612187 Page 23 of 82

Date: 2017-01-07



Test Figure:

1. Condition: Low Channel

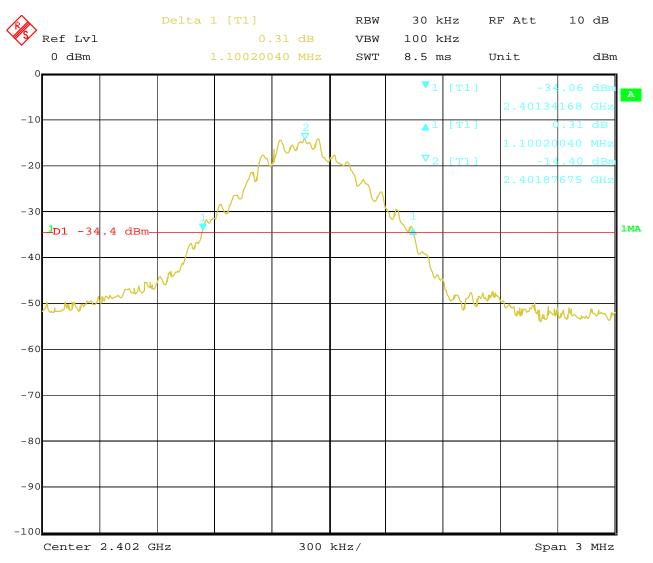


Date: 6.JAN.2017 15:49:48 Report No.: FCC1612187 Page 24 of 82

Date: 2017-01-07



2. Condition: Middle Channel

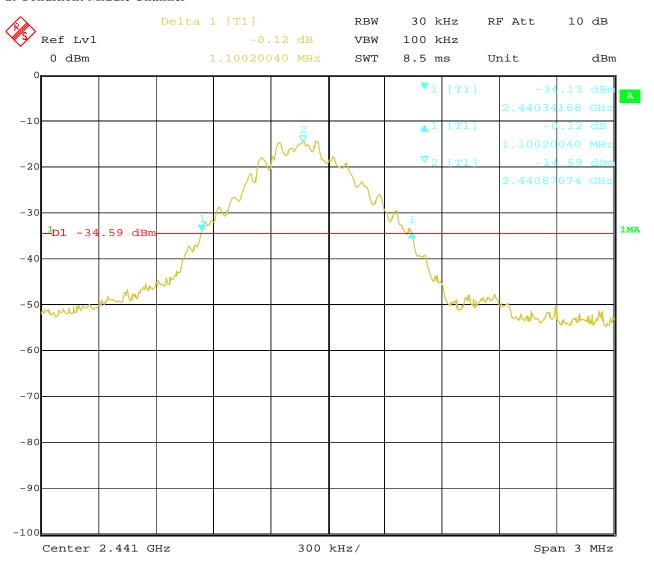


Date: 6.JAN.2017 15:47:39 Report No.: FCC1612187 Page 25 of 82

Date: 2017-01-07



3. High Channel

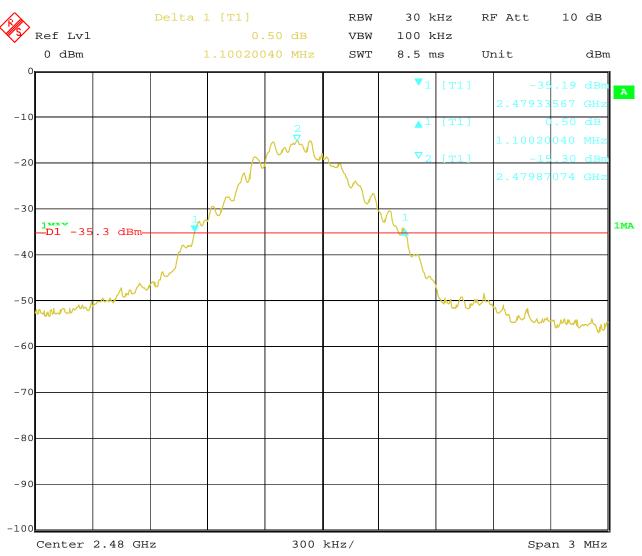

Date: 6.JAN.2017 15:45:49

Page 26 of 82 Report No.: FCC1612187

Date: 2017-01-07



Test Result

Type of Modulation: Л/4D-QPSK

EUT		Bluetooth Speaker		Model			CM5301				
Mode	;	Keep Tra	ransmitting Input Voltag		nsmitting Input Voltage		nsmitting Input Voltage		age		DC3.7V
Tempera	ture	24 de	eg. C,	Humidity			56% RH				
Channel	Cha	nnel Frequency (MHz)	20 dB Bandwidth (kHz)			num Limit kHz)	Pass/ Fail				
Low		2402	131	1311			Pass				
Middle		2441	130)5			Pass				
High		2480	131	1			Pass				


Report No.: FCC1612187 Page 27 of 82

Date: 2017-01-07



Test Figure:

1. Condition: Low Channel

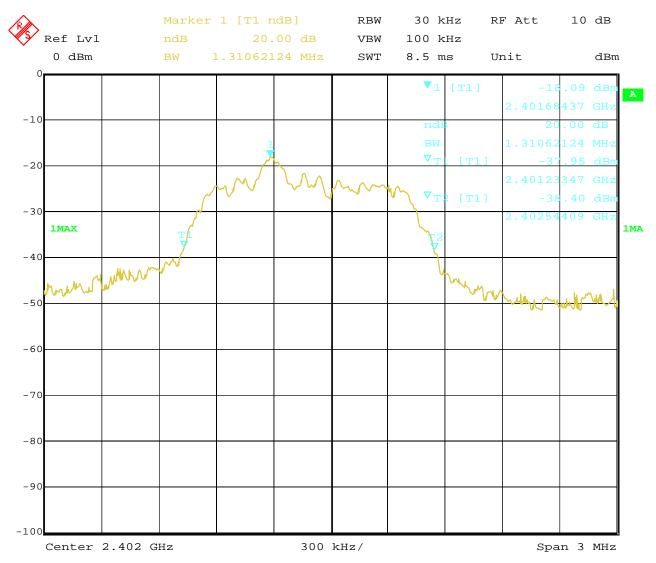

Date: 6.JAN.2017 15:53:13

Page 28 of 82 Report No.: FCC1612187

Date: 2017-01-07



2. Condition: Middle Channel

Ref Lvl		1 [T1 r			30 k		7 Att	10	dВ
0 dBm	BW	1.304609	922 MHz	SWT	8.5 m	ns Uı	nit		dBm
0					v ₁	[T1]	-1	.72	
-10							2.44069		
					ndl	3 	20	.00	
		,			BW ▽ _T	1 [T1]	1.30460	7.76	
20		MM	M	My /m	Λ.		2.44023		
		~	(•	$^{\prime}$ $^{\prime}$ $^{\perp}$	2 [T1]	-31	.05	dBm
1MAX					7.2		2.44153	808	GHz 1
	7				7				
40	MWW/V					L			
50 MIN 11 M						www	ant de		
50							A/WINAC VIV	t⁄~~W	AM,
60									
70									
80									
90									
00 Center 2.441	GH7	1	300	kHz/	I	1	Sn:	an 3	MHz


Date: 6.JAN.2017 15:55:53

Report No.: FCC1612187 Page 29 of 82

Date: 2017-01-07



3. High Channel

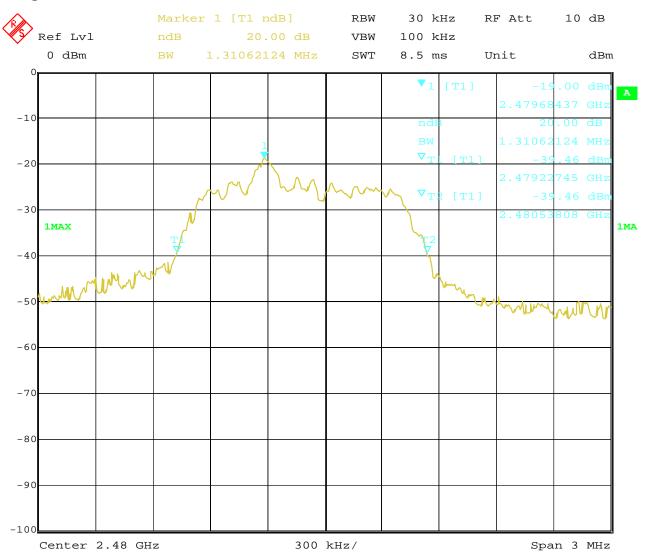

Date: 6.JAN.2017 15:57:39

Page 30 of 82 Report No.: FCC1612187

Date: 2017-01-07



Test Result

Type of Modulation: 8DPSK

EUT		Bluetooth	Bluetooth Speaker		Model		CM5301		
Mode		Keep Tran	nsmitting Input Volta		nnsmitting Input Voltage DC3.7V		Input Voltage		DC3.7V
Tempera	ture	24 de	eg. C, Humidity 569		deg. C, Humidity 56% RH		Humidity		56% RH
Channel	Cha	nnel Frequency (MHz)		20dB Bandwidth (kHz)		imum Limit (kHz)	Pass/ Fail		
Low		2402	13	1311			Pass		
Middle		2441	1311		311		Pass		
High		2480	13	305			Pass		


Report No.: FCC1612187 Page 31 of 82

Date: 2017-01-07



Test Figure:

1. Condition: Low Channel

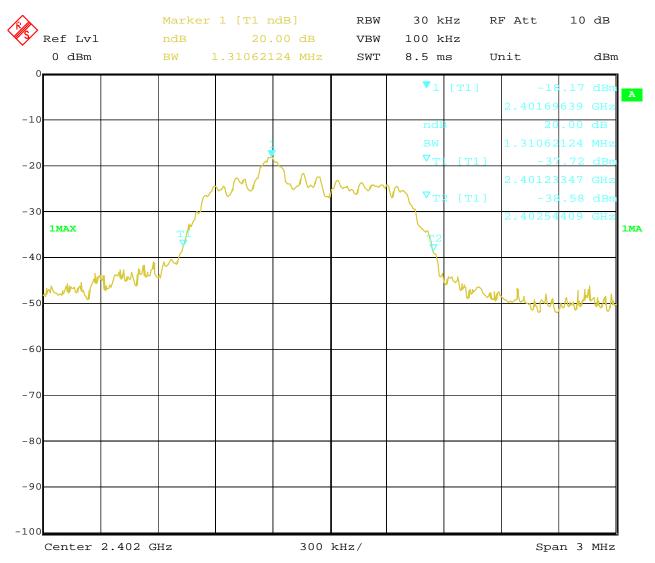

6.JAN.2017 Date: 16:05:23

Page 32 of 82 Report No.: FCC1612187

Date: 2017-01-07



2. Condition: Middle Channel

Ref Lvl		1 [T1 r			30		RF Att	10 dB
0 dBm		20.		SWT	100 8.5		Unit	dBm
0					▼1	[T1]	-1	8.51 dBm
10							2.4406	9038 GHz
10					nc		2	
					BV ∇¬			2124 MHz
20		<i>M</i>	hy 0 1		V .	<u> [T1]</u>	-3	8.81 dBm 2745 GHz
	سر ا	\sim		$\sim\sim$	√ √ ∨¬	72 [T1]		8.03 dBm
30							2.4415	
1MAX	/~				V _C :	2		
40	7				y			
	In May				'	\		
	V					Why I		
50 1/1 "						7		WW W
60								
70								
80								
90								
0.0								


Date: 6.JAN.2017 16:02:45

Report No.: FCC1612187 Page 33 of 82

Date: 2017-01-07



3. High Channel

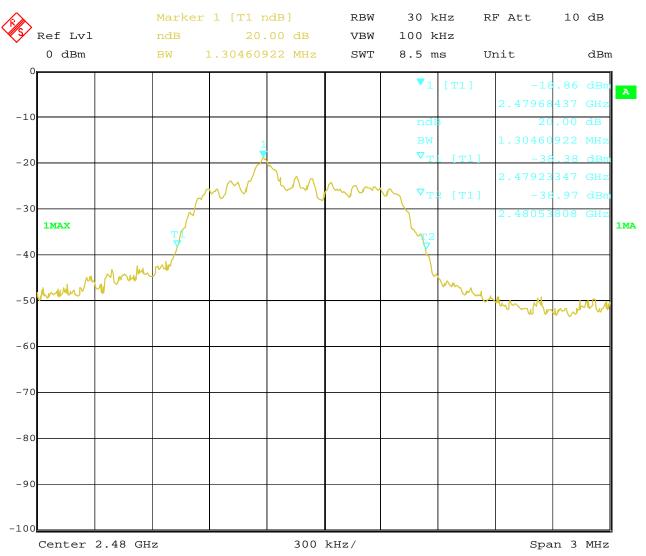

Date: 6.JAN.2017 16:01:03 Report No.: FCC1612187 Page 34 of 82

Date: 2017-01-07



8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = 10MHz, RBW=3MHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1612187 Page 35 of 82

Date: 2017-01-07



8.4Test Results

Type of Modulation: GFSK

EUT	Bluetooth Speaker		Model		CM5301		
Mode		Keep Tran	smitting	Input Vol	ltage		DC3.7V
Temperature	e	24 deg	g. C,	Humidity	midity		56% RH
Channel	Cł	nannel Frequency (MHz)	Max. Power (dBm)	10.00		er Limit Bm)	Pass/ Fail
Low		2402	-11.20		30		Pass
Middle		2441	-11.47			30	Pass
High		2480	-12.03	-12.03		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Type of Modulation: $\pi/4D$ -QPSK

EUT	Bluetooth Speaker Model			CM5301		
Mode	Keep Tra	nsmitting	Input Vo	ltage		DC3.7V
Temperature	e 24 de	eg. C, Humidity		ity		56% RH
Channel	Channel Frequency (MHz)	Max. Power (dBm)	•	Peak Power Limit (dBm)		Pass/ Fail
Low	2402	-11.32	-11.32		30	Pass
Middle	2441	-12.30		30		Pass
High	2480	-12.30	30		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 36 of 82 Report No.: FCC1612187

Date: 2017-01-07



Type of Modulation: 8DPSK

Type of Modulation, obt 51x									
EUT	Bluetooth Speaker		Model		CM5301				
Mode	Keep Tra	nsmitting	Input V	oltage		DC3.7V			
Temperature	e 24 de	eg. C, Humidity		dity		56% RH			
Channel	Channel Frequency (MHz)	Max. Power C	Output		wer Limit Bm)	Pass/ Fail			
Low	2402	-11.32		30		Pass			
Middle	2441	-11.60		30		Pass			
High	2480	-12.30		30		Pass			

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

2. The worse case was recorded

Report No.: FCC1612187

Date: 2017-01-07



Page 37 of 82

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 82

Report No.: FCC1612187

Date: 2017-01-07




9.4Test Result

Type of Modulation: GFSK

pe of Flouristians of Six						
EUT	Bluetooth Speaker		Model	CM5301		
Mode	Hopping On	Hopping On Inp		DC3.7V		
Temperature	24 deg. C,	Humidity		56% RH		
Carrier I	Frequency Separation		Limit		Pass/ Fail	
	1.0MHz ≥ 25 kHz or 2			0 dB bandwidth	Pass	

Test Plots

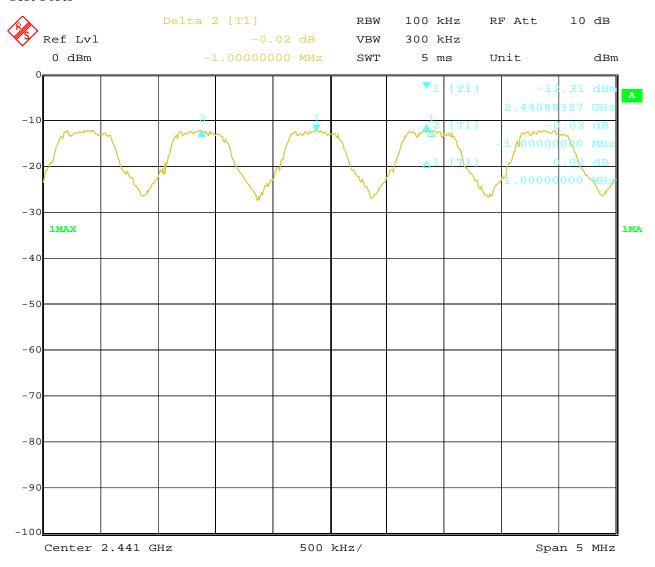

6.JAN.2017 11:35:31

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 39 of 82

Report No.: FCC1612187


Date: 2017-01-07



Type of Modulation: $\sqrt{1/4}$ D-QPSK

EUT	Bluetooth Speaker		Model	CM5	301
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.0MHz	≥	25 kHz or 2/3 of 2	0 dB bandwidth	Pass

Test Plots

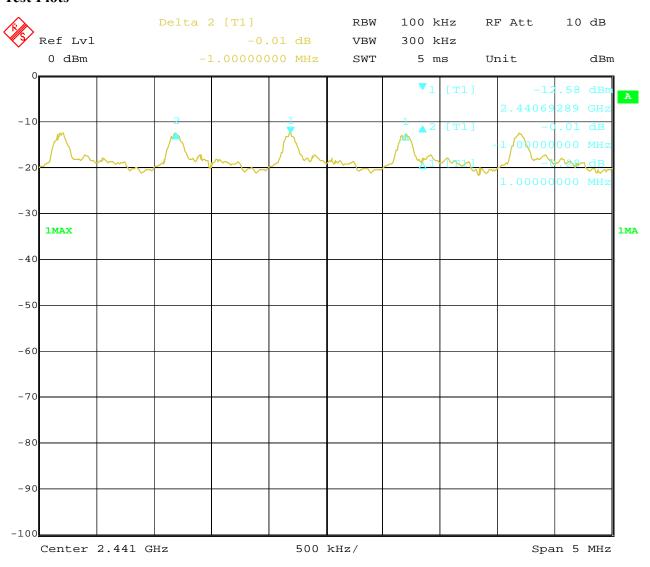

11:52:17 Date: 6.JAN.2017

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 40 of 82

Report No.: FCC1612187


Date: 2017-01-07



Type of Modulation: 8DPSK

EUT	Bluetooth Speaker	Model	CM5301		
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.0MHz	≥ 2	5 kHz or 2/3 of 2	0 dB bandwidth	Pass

Test Plots

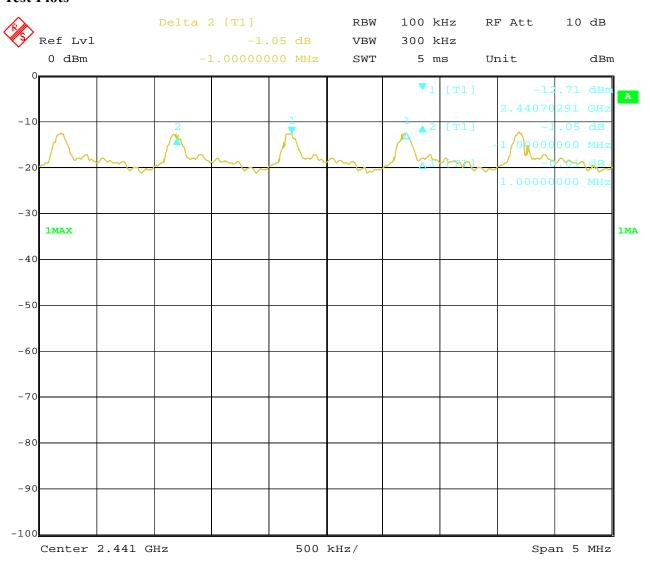

Date: 6.JAN.2017 14:20:58

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1612187 Page 41 of 82

Date: 2017-01-07



10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 42 of 82

Report No.: FCC1612187

Date: 2017-01-07




10.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Speaker		Model	CM5301	
Mode		Hopping On	Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequen	perating Frequency Number of hopping channels		oing channels	Limit	Pass/ Fail
2402-2480MHz		79		≥ 15	Pass

Test Plot

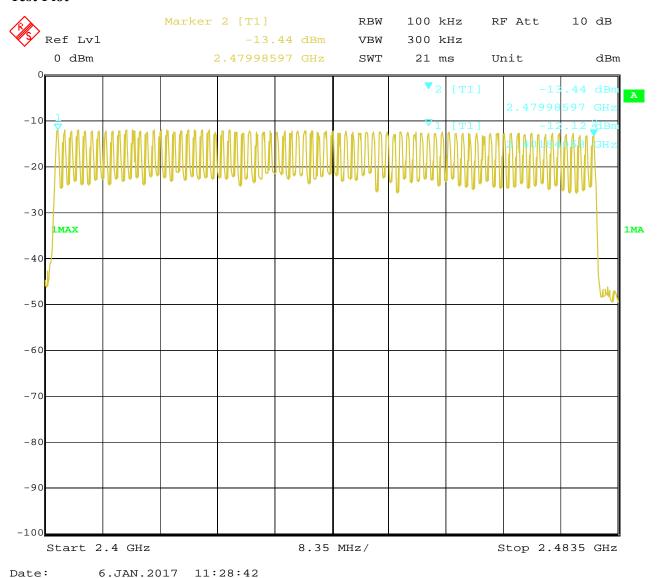

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 43 of 82

Report No.: FCC1612187


Date: 2017-01-07



Type of Modulation: $\sqrt{1/4}$ D-QPSK

EUT	Bluetooth Speaker		Model		CM5301	
Mode		Hopping On		oltage	DC3.7V	
Temperature	24 deg. C,		Humidi	ty 56%		56% RH
Operating Frequer	Number of hopp channels		oing	Liı	nit	Pass/ Fail
2402-2480MHz 79			≥	15	Pass	

Test Plot

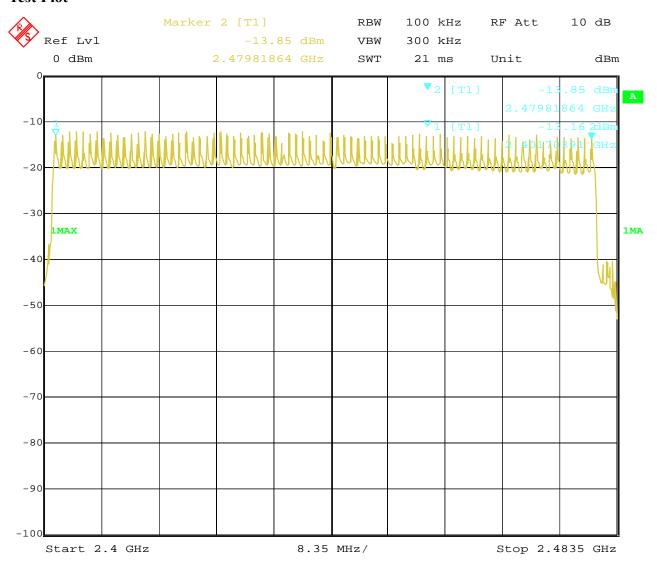

6.JAN.2017 12:04:32 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1612187 Page 44 of 82


Date: 2017-01-07



Type of Modulation: 8DPSK

EUT	Bluetooth Speaker		Model		CM5301	
Mode		Hopping On		foltage DC3.7V		DC3.7V
Temperature		24 deg. C,		ity 56% RH		56% RH
Operating Frequency		Number of hopp channels	oing	Liı	nit	Pass/ Fail
2402-2480MHz		79		≥	15	Pass

Test Plot

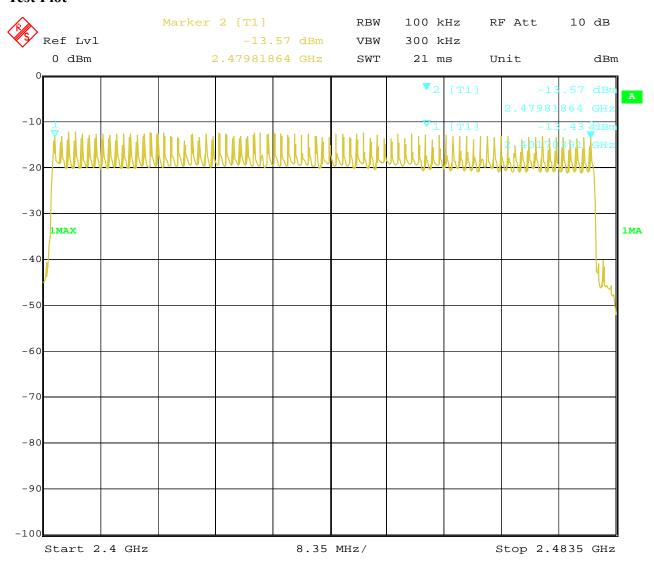

Date: 6.JAN.2017 13:59:48

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1612187

Date: 2017-01-07



Page 45 of 82

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW
- ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC1612187 Page 46 of 82

Date: 2017-01-07



11.4 Test Result

Type of Modulation: GFSK

EUT	Bluetoo	Bluetooth Speaker		(CM5301
Mode	Keep Tr	ansmitting	Input Voltage	DC3.7V	
Temperatu	re 24 d	eg. C, Humidity		56% RH	
Channel	Reading	Hopin	g Rate	Actual	Limit
High	3.01ms	266.66	7 hop/s	0.321s	0.4s
Middle	3.01ms	266.66	7 hop/s	0.321s	0.4s
Low	2.95ms	266.66	7 hop/s	0.315s	0.4s

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the worse case.

Page 47 of 82

Report No.: FCC1612187


Date: 2017-01-07



Test Plots:

DH5

High Channel:

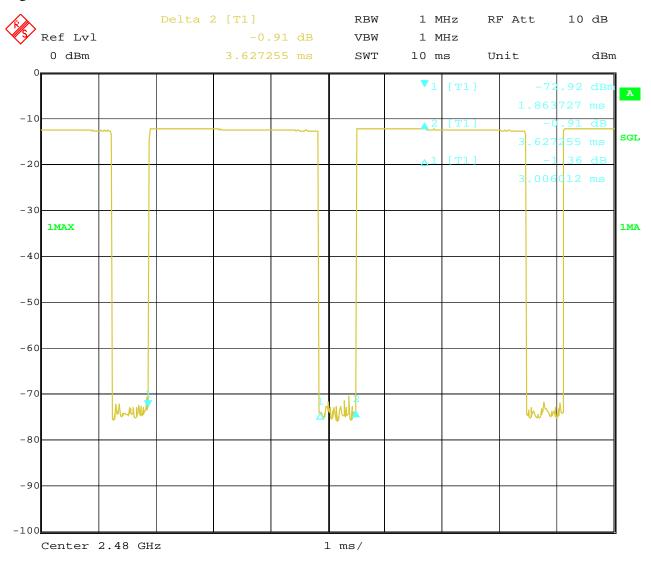

Date: 6.JAN.2017 17:02:37


Page 48 of 82

Report No.: FCC1612187

Date: 2017-01-07



DH5

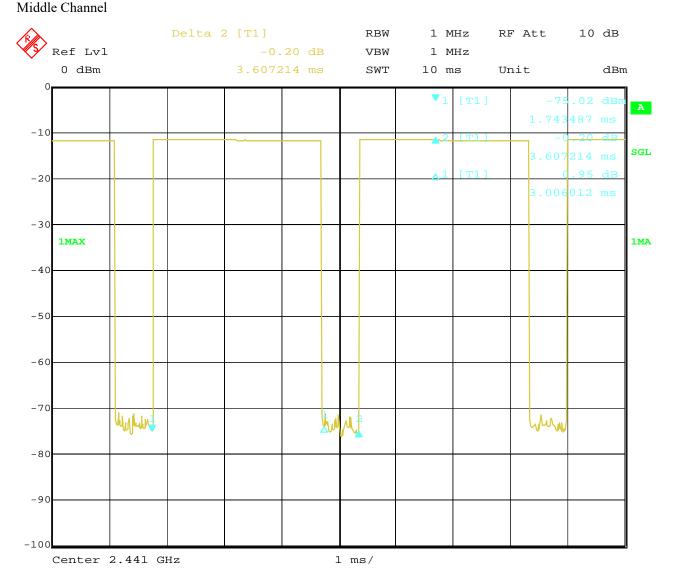

6.JAN.2017 17:05:52 Date:

Page 49 of 82


Report No.: FCC1612187

Date: 2017-01-07



DH5

Low Channel

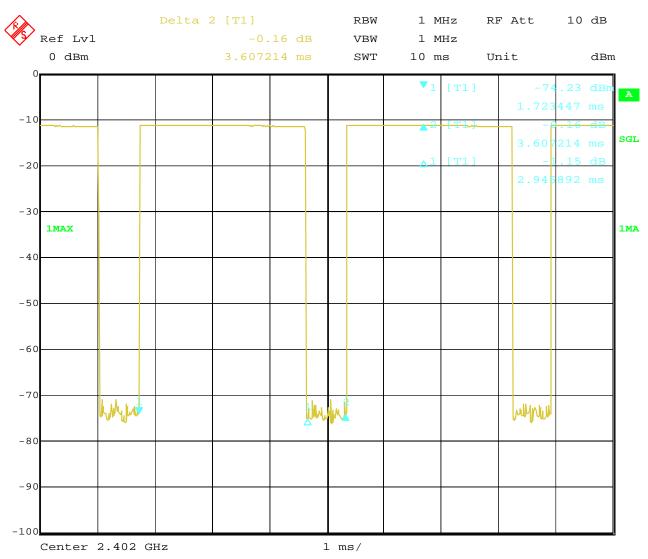

6.JAN.2017 17:08:08 Date:

Page 50 of 82 Report No.: FCC1612187

Date: 2017-01-07



Test Result

Type of Modulation: Л/4DQPSK

EUT	Bluetoot	th Speaker	Model	(CM5301	
Mode	Keep Tra	ansmitting	Input Voltage	DC3.7V		
Temperatur	re 24 d	eg. C, Humidity		5	56% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit	
High	3.05ms	266.66	7 hop/s	0.325s	0.4s	
Middle	3.09ms	266.66	7 hop/s	0.330s	0.4s	
Low	3.05ms	266.66	7 hop/s	0.325s	0.4s	

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the worse case.

Page 51 of 82 Report No.: FCC1612187


Date: 2017-01-07



Test Plots:

2DH5

High Channel

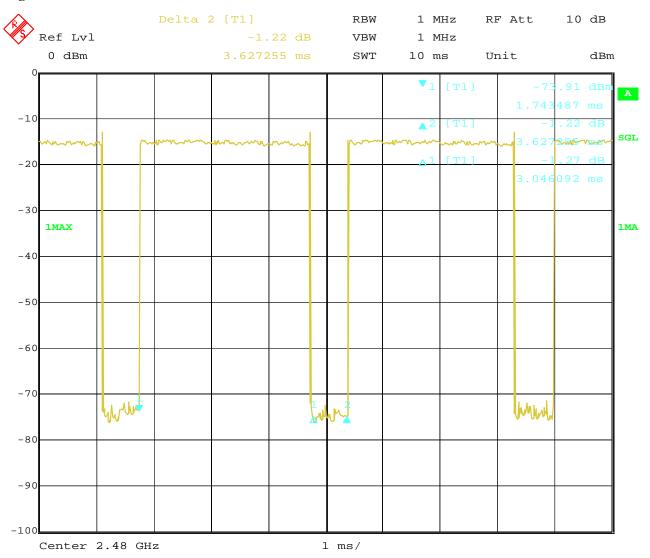


Date: 6.JAN.2017 17:17:37 Report No.: FCC1612187 Page 52 of 82

Date: 2017-01-07



2DH5 Middle Channel

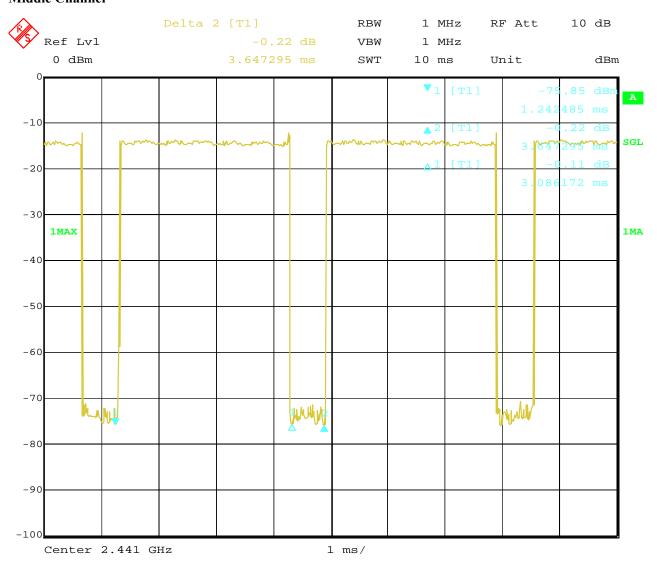

6.JAN.2017 Date: 17:14:03


Page 53 of 82 Report No.: FCC1612187

Date: 2017-01-07



2DH5

Low Channel

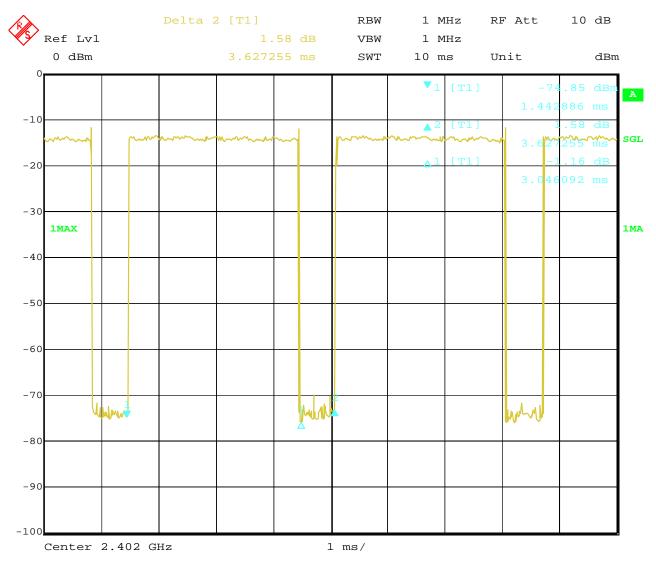

6.JAN.2017 Date: 17:11:23 Report No.: FCC1612187 Page 54 of 82

Date: 2017-01-07



Type of Modulation: 8DPSK

-J P	1) Po 01 1/10 www.01/0 02 1 0/1							
EUT	Bluetoo	Bluetooth Speaker			CM5301			
Mode	Keep Tr	ransmitting Input Voltag		DC3.7V				
Temperatur	re 24 c	eg. C, Humidity		56% RH				
Channel	Reading	Hopin	g Rate	Actual	Limit			
High	3.05ms	266.66	7 hop/s	0.325s	0.4s			
Middle	3.03ms	266.667 hop/s		0.323s	0.4s			
Low	2.95ms	266.66	7 hop/s	0.315s	0.4s			

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625µs with 79 channels.

Note: DH5 was the worse case.

Page 55 of 82

Report No.: FCC1612187


Date: 2017-01-07



Test Plots:

3DH5

High Channel

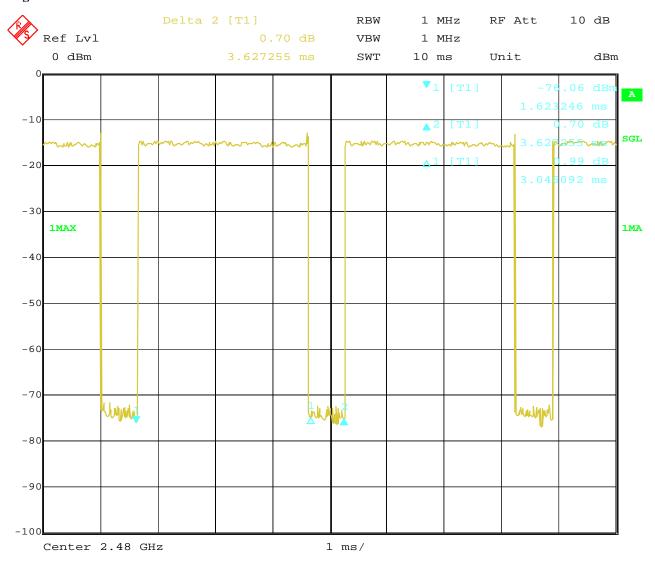


Date: 6.JAN.2017 17:19:25

Page 56 of 82 Report No.: FCC1612187

Date: 2017-01-07



3DH5 Middle Channel

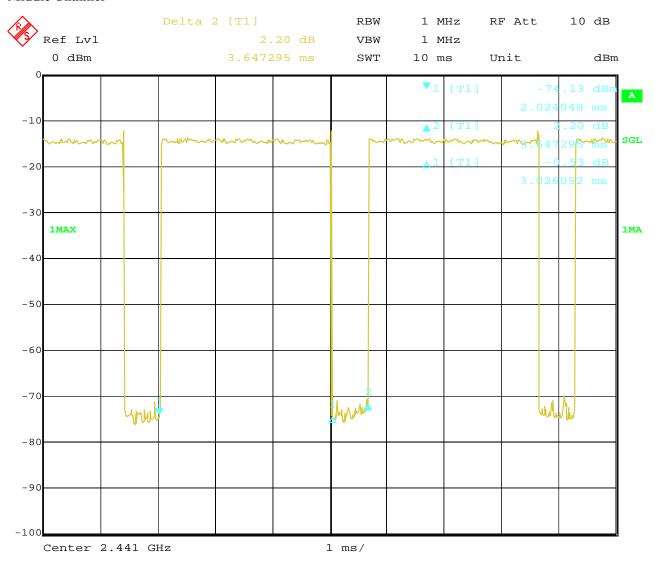


6.JAN.2017 Date: 17:27:54

Page 57 of 82 Report No.: FCC1612187

Date: 2017-01-07



3DH5

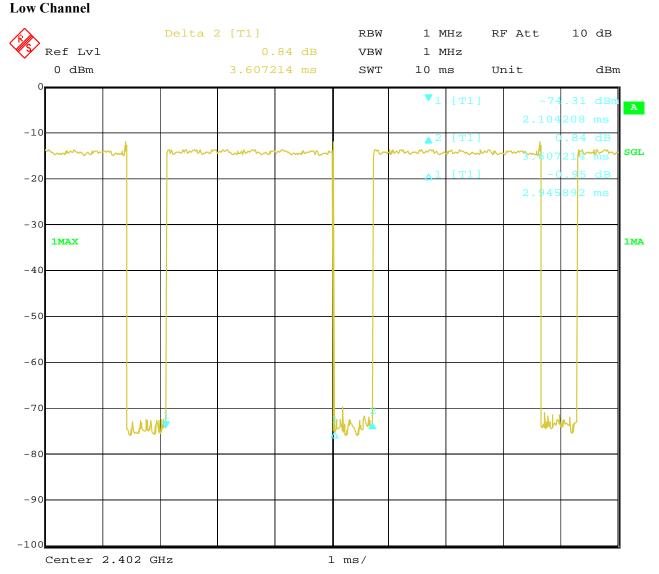

6.JAN.2017 Date: 17:30:56 Report No.: FCC1612187


Date: 2017-01-07



Page 58 of 82

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

- Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.
- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. Horizontal and Vertical Polarity were invested and only worse case was recorded.

Page 59 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	Bl	uetooth Speaker	Test Mode:	Low Channel
Mode	Kee	Keeping Transmitting		DC3.7V
Temperature		24 deg. C		56% RH
Test Result:		Pass		PK
The Max. FS in	PK (dBμV/m)	44.6		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	AV(dBμV/m)		54(dBμV/m)
2390MHz				

Test Figure:

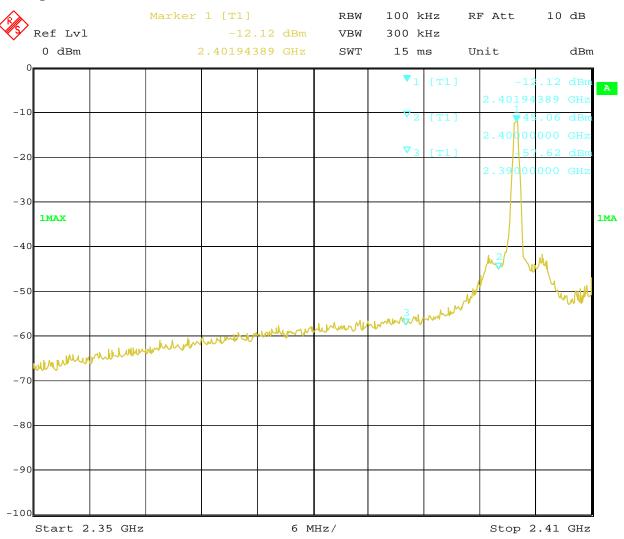

6.JAN.2017 15:13:03 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 60 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: GFSK

12.4 Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	43.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

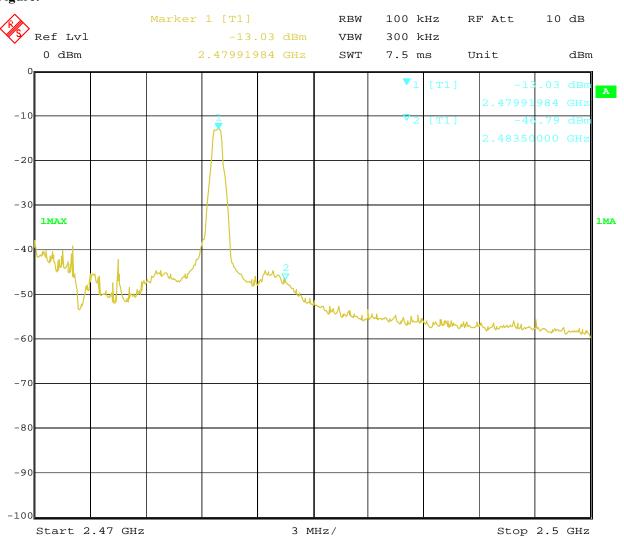

6.JAN.2017 15:22:48 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 61 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: GFSK

Out of Band Test Result

Product:	Bl	uetooth Speaker	Test Mode:	Hopping mode
Mode		Hopping On		DC3.7V
Temperature		24 deg. C,		56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	43.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)	AV(dBμV/m)		$54(dB\mu V/m)$
2390MHz				

Test Figure:

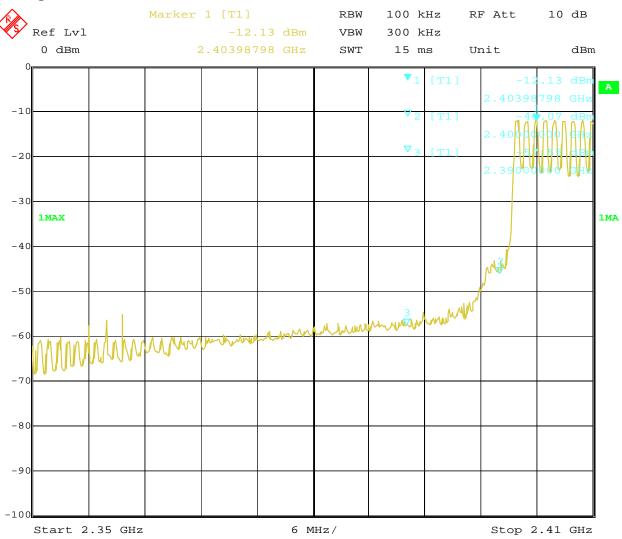

Date: 6.JAN.2017 14:42:57

Page 62 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: GFSK

Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

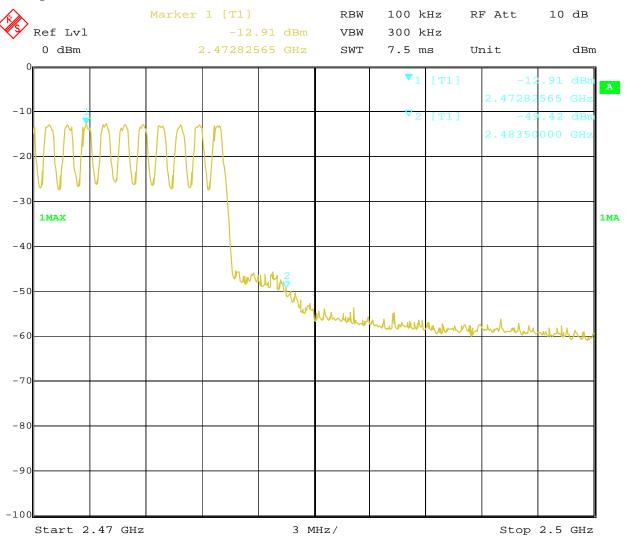

Date: 6.JAN.2017 14:38:03

Page 63 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: Л/4D-QPSK

Out of Band Test Result 12.4

Product:	Bluetooth Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.5			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

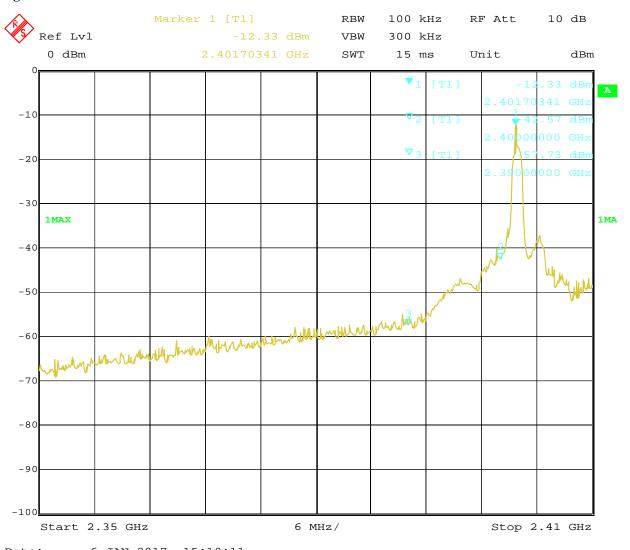

6.JAN.2017 15:10:11 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 64 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: Л/4D-QPSK

Out of Band Test Result 12.4

Product:	Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.7			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

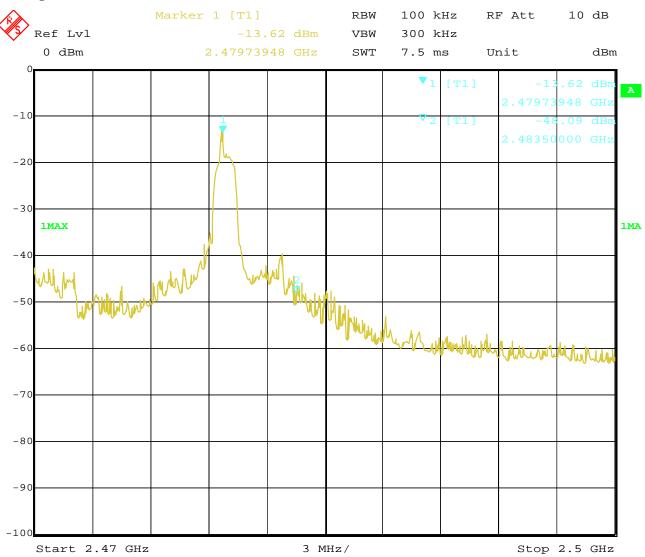

Date: 6.JAN.2017 15:06:58

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 65 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: Л/4D-QPSK

Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 44.3			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

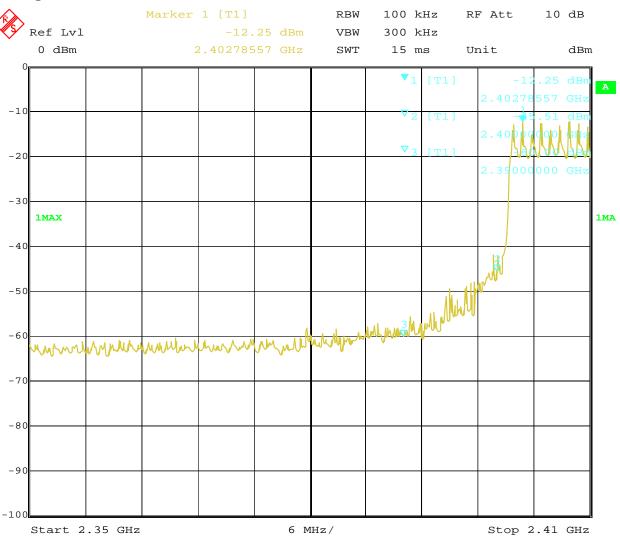

Date: 6.JAN.2017 14:48:41 Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: Л/4D-QPSK

Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	42.8		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

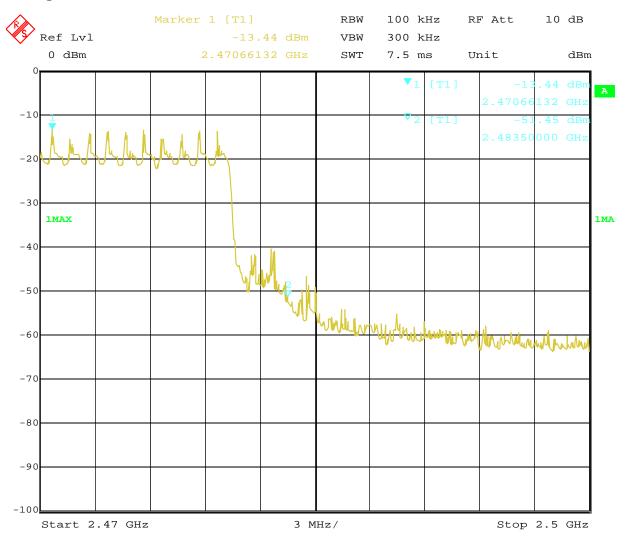

6.JAN.2017 14:34:04 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 67 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

Product:	Bluetooth Speaker		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 45.0			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

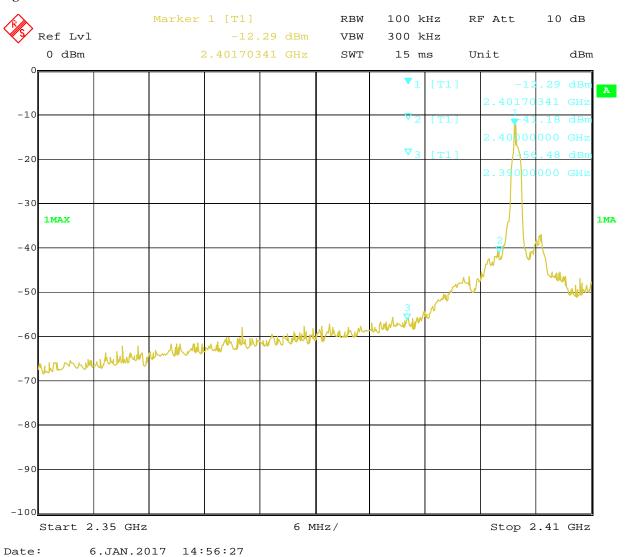

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 68 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: 8DPSK

12.4 Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.4			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz	Tr (dSp v/m)			

Test Figure:

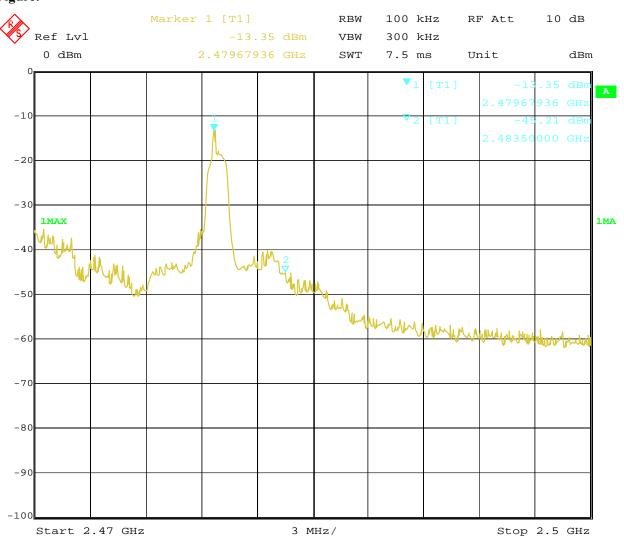

6.JAN.2017 Date: 15:02:15

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 69 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: 8DPSK

Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.6			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

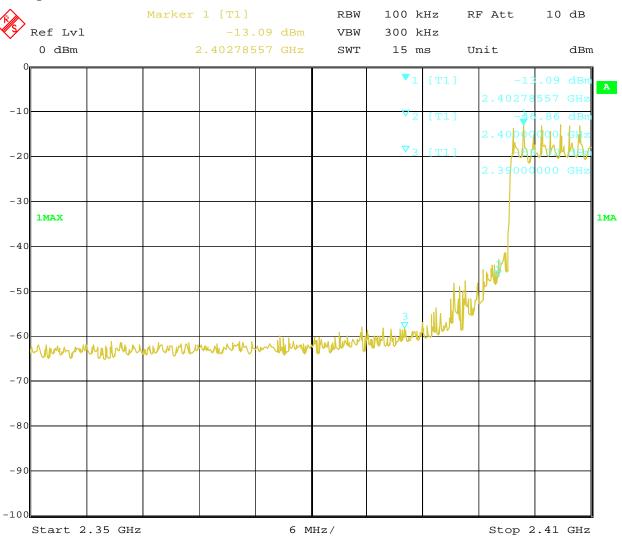

Date: 6.JAN.2017 14:52:19

Page 70 of 82

Report No.: FCC1612187

Date: 2017-01-07




Type of Modulation: 8DPSK

Out of Band Test Result

Product:	Bluetooth Speaker		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 43.3			74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

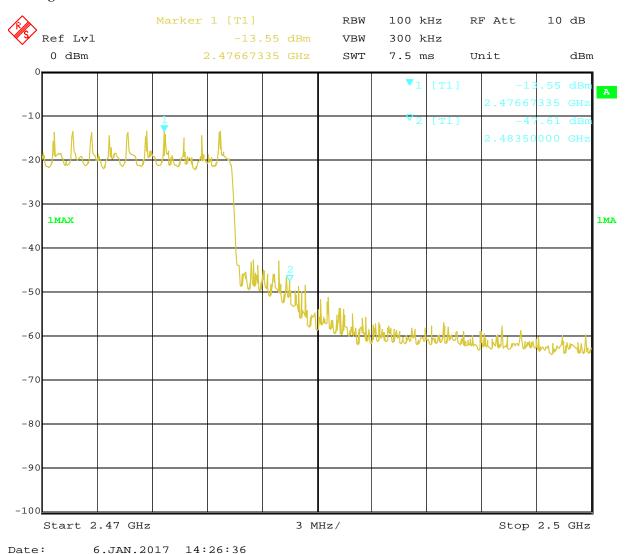

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Report No.: FCC1612187

Date: 2017-01-07



Page 71 of 82

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The maximum Gain of the antennas is 0dBi.

Report No.: FCC1612187 Page 72 of 82

Date: 2017-01-07




14.0 FCC ID Label

FCC ID: 2ADWNCM5301

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

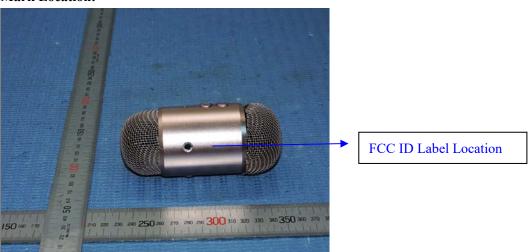

Page 73 of 82 Report No.: FCC1612187

Date: 2017-01-07



Photo of testing 15.0

Conducted Emission Test Setup:




Page 74 of 82

Report No.: FCC1612187

Date: 2017-01-07



Radiated Emission Test Setup:

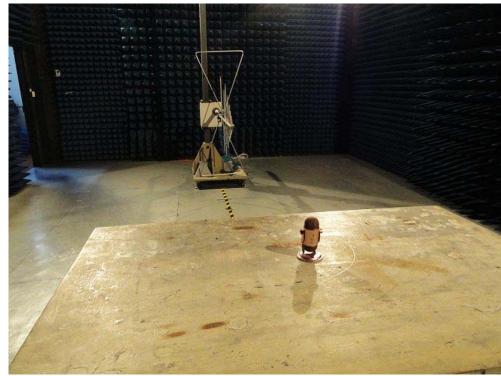



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1612187

Date: 2017-01-07



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 76 of 82

Report No.: FCC1612187

Date: 2017-01-07



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 77 of 82 Report No.: FCC1612187

Date: 2017-01-07



Outside view



Page 78 of 82

Report No.: FCC1612187

Date: 2017-01-07



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 79 of 82

Report No.: FCC1612187

Date: 2017-01-07



Inside view

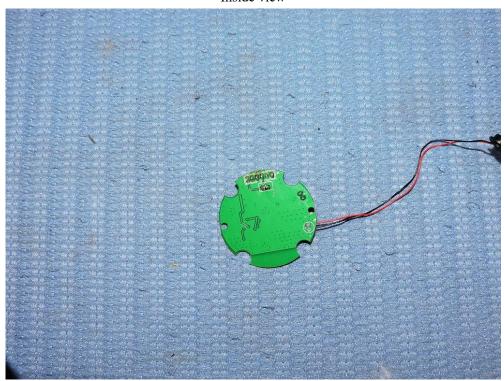



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 80 of 82


Report No.: FCC1612187

Date: 2017-01-07



Inside view

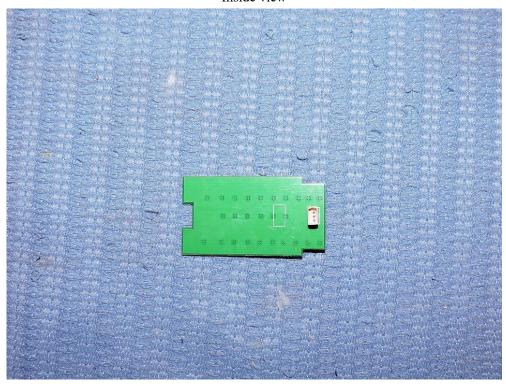

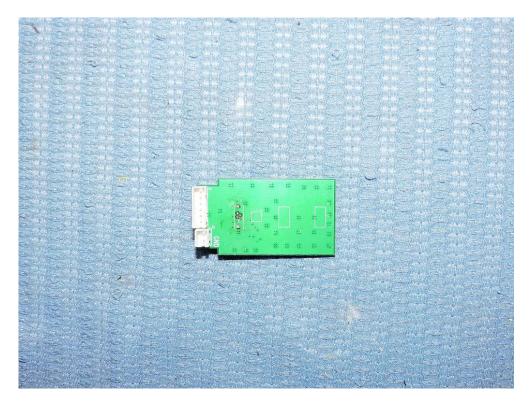

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 81 of 82

Report No.: FCC1612187

Date: 2017-01-07



Inside view

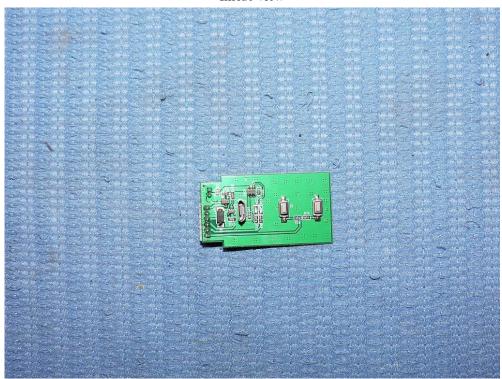



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 82 of 82 Report No.: FCC1612187

Date: 2017-01-07



Inside view



End of the report