

## TEST REPORT

**Product** : Pulse Oximeter  
**Trade mark** : N/A  
**Model/Type reference** : PO6, PO6A  
**Serial Number** : N/A  
**Report Number** : EED32M00324201  
**FCC ID** : 2ADXK-4708  
**Date of Issue** : Nov. 09, 2020  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Shenzhen Viatom Technology Co., Ltd.**  
**4E, 3#, Tingwei Industrial Park, Honglang North 2nd Road,**  
**Baoan District, Shenzhen, China.**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Compiled by:

*Sunlight Sun*

Sunlight Sun

Reviewed by:

*Ware Xin*

Ware Xin

Approved by:

*Aaron Ma*

Aaron Ma

Date:

Nov. 09, 2020



Check No.: 3970389710

## 2 Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | Nov. 09, 2020 | Original    |
|             |               |             |
|             |               |             |

### 3 Test Summary

| Test Item  | Test Requirement                                   | Test method      | Result |
|--|--|------------------|--------|
| <b>Antenna Requirement</b>   | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS   |
| <b>AC Power Line Conducted Emission</b>                                  | 47 CFR Part 15 Subpart C Section 15.207            | ANSI C63.10-2013 | PASS   |
| <b>Conducted Peak Output Power</b>                                       | 47 CFR Part 15 Subpart C Section 15.247 (b)(3)     | ANSI C63.10-2013 | PASS   |
| <b>6dB Occupied Bandwidth</b>  | 47 CFR Part 15 Subpart C Section 15.247 (a)(2)     | ANSI C63.10-2013 | PASS   |
| <b>Power Spectral Density</b>  | 47 CFR Part 15 Subpart C Section 15.247 (e)        | ANSI C63.10-2013 | PASS   |
| <b>Band-edge for RF Conducted Emissions</b>                              | 47 CFR Part 15 Subpart C Section 15.247(d)         | ANSI C63.10-2013 | PASS   |
| <b>RF Conducted Spurious Emissions</b>                                   | 47 CFR Part 15 Subpart C Section 15.247(d)         | ANSI C63.10-2013 | PASS   |
| <b>Radiated Spurious Emissions</b>                                       | 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 | PASS   |
| <b>Restricted bands around fundamental frequency (Radiated Emission)</b> | 47 CFR Part 15 Subpart C Section 15.205/15.209     | ANSI C63.10-2013 | PASS   |

**Remark:**

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

Model No.: PO6, PO6A

Only the model PO6 was tested, Their electrical circuit design, layout, components used and internal wiring are identical only the color of silicon finger-cot appearance is different.


## 4 Content

|  |           |
|--|-----------|
| <b>1 COVER PAGE</b> .....  | <b>1</b>  |
| <b>2 VERSION</b> .....   | <b>2</b>  |
| <b>3 TEST SUMMARY</b> .....  | <b>3</b>  |
| <b>4 CONTENT</b> .....   | <b>4</b>  |
| <b>5 TEST REQUIREMENT</b> .....  | <b>5</b>  |
| 5.1 TEST SETUP.....  | 5         |
| 5.1.1 For Conducted test setup.....  | 5         |
| 5.1.2 For Radiated Emissions test setup.....                               | 5         |
| 5.1.3 For Conducted Emissions test setup.....                              | 6         |
| 5.2 TEST ENVIRONMENT.....  | 6         |
| 5.3 TEST CONDITION.....  | 6         |
| <b>6 GENERAL INFORMATION</b> .....   | <b>7</b>  |
| 6.1 CLIENT INFORMATION.....  | 7         |
| 6.2 GENERAL DESCRIPTION OF EUT.....  | 7         |
| 6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....                 | 7         |
| 6.4 DESCRIPTION OF SUPPORT UNITS.....                                      | 8         |
| 6.5 TEST LOCATION.....   | 8         |
| 6.6 DEVIATION FROM STANDARDS.....  | 9         |
| 6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....                            | 9         |
| 6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....                       | 9         |
| 6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $k=2$ ).....           | 9         |
| <b>7 EQUIPMENT LIST</b> .....  | <b>10</b> |
| <b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....                  | <b>11</b> |
| Appendix A): 6dB Occupied Bandwidth.....                                   | 13        |
| Appendix B): Conducted Peak Output Power.....                              | 17        |
| Appendix C): Band-edge for RF Conducted Emissions.....                     | 19        |
| Appendix D): RF Conducted Spurious Emissions.....                          | 20        |
| Appendix E): Power Spectral Density.....                                   | 23        |
| Appendix F): Antenna Requirement.....                                      | 25        |
| Appendix G): AC Power Line Conducted Emission.....                         | 26        |
| Appendix H): Restricted bands around fundamental frequency (Radiated)..... | 29        |
| Appendix I) Radiated Spurious Emissions.....                               | 38        |
| <b>PHOTOGRAPHS OF TEST SETUP</b> .....                                     | <b>42</b> |
| <b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....                     | <b>44</b> |

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

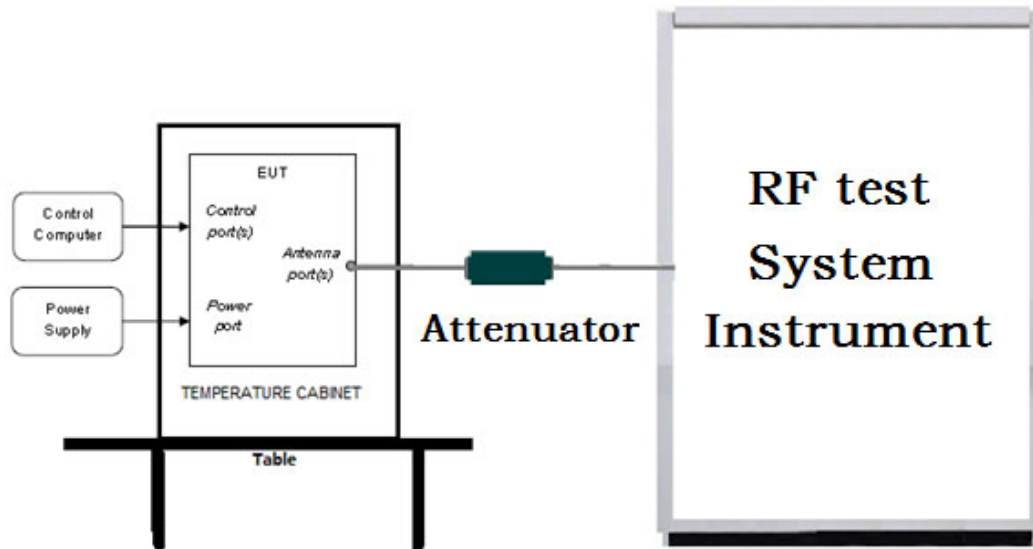

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

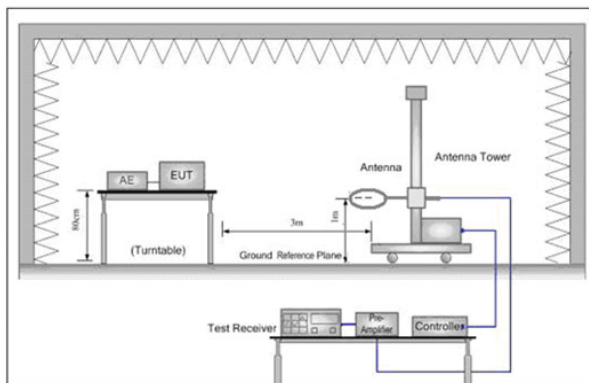


Figure 1. Below 30MHz

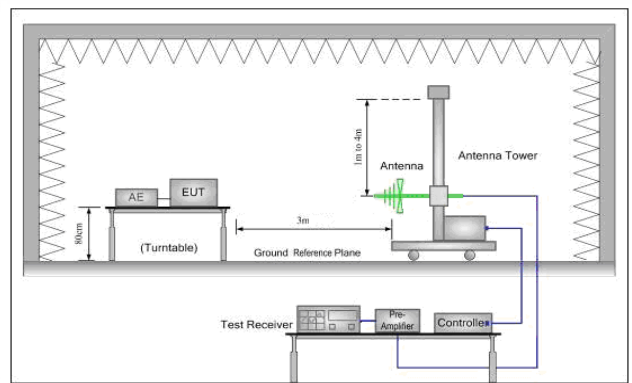


Figure 2. 30MHz to 1GHz


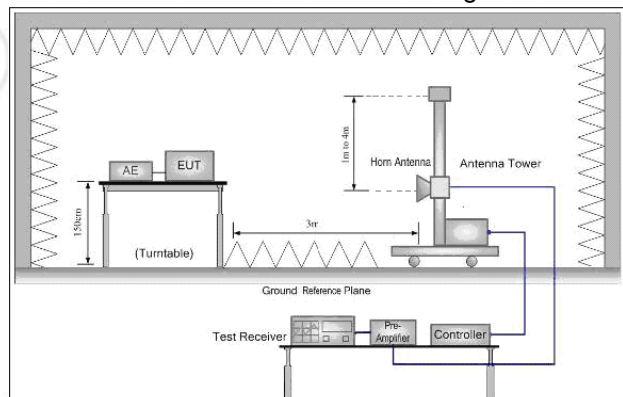


Figure 3. Above 1GHz

**5.1.3 For Conducted Emissions test setup**  
**Conducted Emissions setup**

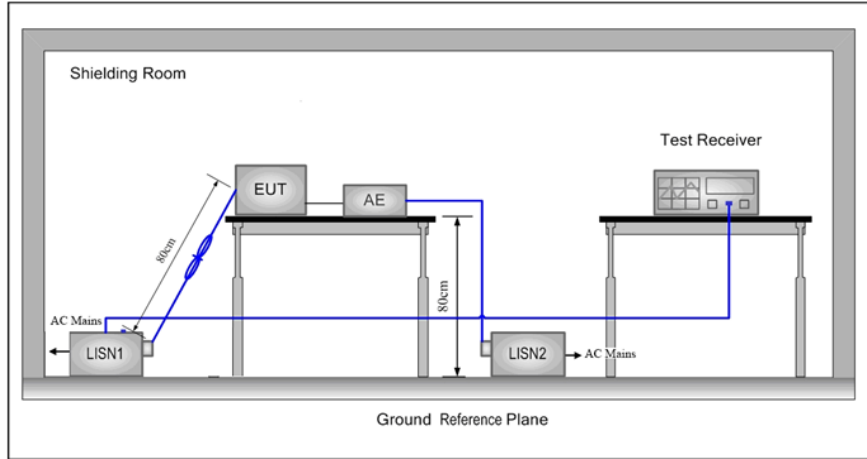

**5.2 Test Environment**

|                               |          |
|-------------------------------|----------|
| <b>Operating Environment:</b> |          |
| Temperature:                  | 23 °C    |
| Humidity:                     | 51 % RH  |
| Atmospheric Pressure:         | 1010mbar |

**5.3 Test Condition**

Test channel:

| Test Mode          | Tx/Rx  | RF Channel |            |            |
|--------------------|--|------------|------------|------------|
|                    |  | Low(L)     | Middle(M)  | High(H)    |
| GFSK               | 2402MHz ~2480 MHz  | Channel 0  | Channel 19 | Channel 39 |
|                    |  | 2402MHz    | 2440MHz    | 2480MHz    |
| Transmitting mode: | Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate. |            |            |            |

## 6 General Information

### 6.1 Client Information

|                          |  |
|--------------------------|--|
| Applicant:               | Shenzhen Viatom Technology Co., Ltd.   |
| Address of Applicant:    | 4E, 3#, Tingwei Industrial Park, Honglang North 2nd Road, Baoan District, Shenzhen, China. |
| Manufacturer:            | Shenzhen Viatom Technology Co., Ltd.   |
| Address of Manufacturer: | 4E, 3#, Tingwei Industrial Park, Honglang North 2nd Road, Baoan District, Shenzhen, China. |
| Factory:                 | Shenzhen Viatom Technology Co., Ltd.   |
| Address of Factory:      | 4E, 3#, Tingwei Industrial Park, Honglang North 2nd Road, Baoan District, Shenzhen, China. |

### 6.2 General Description of EUT

|                                  |                                |
|----------------------------------|--------------------------------|
| Product Name:                    | Pulse Oximeter                 |
| Model No.(EUT):                  | PO6, PO6A                      |
| Test Model No.:                  | PO6                            |
| Trade mark:                      | N/A                            |
| EUT Supports Radios application: | 2402MHz to 2480MHz             |
| Power Supply:                    | DC 5V                          |
| Sample Received Date:            | Oct. 22, 2020                  |
| Sample tested Date:              | Oct. 22, 2020 to Oct. 30, 2020 |

### 6.3 Product Specification subjective to this standard

|                        |                       |
|------------------------|-----------------------|
| Operation Frequency:   | 2402MHz~2480MHz       |
| Bluetooth Version:     | BLE                   |
| Modulation Technique:  | DSSS                  |
| Modulation Type:       | GFSK                  |
| Number of Channel:     | 40                    |
| Test Power Grade:      | Default               |
| Test Software of EUT:  | DTM Tester            |
| Antenna Type and Gain: | Chip antenna; 3.45dBi |
| Test Voltage:          | DC 5V                 |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                   | 2402MHz   | 10      | 2422MHz   | 20      | 2442MHz   | 30      | 2462MHz   |
| 1                                   | 2404MHz   | 11      | 2424MHz   | 21      | 2444MHz   | 31      | 2464MHz   |
| 2                                   | 2406MHz   | 12      | 2426MHz   | 22      | 2446MHz   | 32      | 2466MHz   |
| 3                                   | 2408MHz   | 13      | 2428MHz   | 23      | 2448MHz   | 33      | 2468MHz   |
| 4                                   | 2410MHz   | 14      | 2430MHz   | 24      | 2450MHz   | 34      | 2470MHz   |
| 5                                   | 2412MHz   | 15      | 2432MHz   | 25      | 2452MHz   | 35      | 2472MHz   |
| 6                                   | 2414MHz   | 16      | 2434MHz   | 26      | 2454MHz   | 36      | 2474MHz   |
| 7                                   | 2416MHz   | 17      | 2436MHz   | 27      | 2456MHz   | 37      | 2476MHz   |
| 8                                   | 2418MHz   | 18      | 2438MHz   | 28      | 2458MHz   | 38      | 2478MHz   |
| 9                                   | 2420MHz   | 19      | 2440MHz   | 29      | 2460MHz   | 39      | 2480MHz   |

## 6.4 Description of Support Units

The EUT has been tested with associated equipment below.

| Associated equipment name |          | Manufacture | model     | S/N serial number | Supplied by | Certification |
|---------------------------|----------|-------------|-----------|-------------------|-------------|---------------|
| AE                        | Notebook | DELL        | DELL 3490 | D245DX2           | DELL        | CE&FCC        |

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164



## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.

## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item                            | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1   | Radio Frequency                 | $7.9 \times 10^{-8}$    |
| 2   | RF power, conducted             | 0.46dB (30MHz-1GHz)     |
|     |                                 | 0.55dB (1GHz-18GHz)     |
| 3   | Radiated Spurious emission test | 4.3dB (30MHz-1GHz)      |
|     |                                 | 4.5dB (1GHz-12.75GHz)   |
| 4   | Conduction emission             | 3.5dB (9kHz to 150kHz)  |
|     |                                 | 3.1dB (150kHz to 30MHz) |
| 5   | Temperature test                | 0.64°C                  |
| 6   | Humidity test                   | 3.8%                    |
| 7   | DC power voltages               | 0.026%                  |

## 7 Equipment List

| 3M Semi/full-anechoic Chamber    |                  |                      |               |                          |                            |
|----------------------------------|------------------|----------------------|---------------|--------------------------|----------------------------|
| Equipment                        | Manufacturer     | Model No.            | Serial Number | Cal. date (mm-dd-yyyy)   | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber & Accessory Equipment | TDK              | SAC-3                | ---           | 05-24-2019               | 05-23-2022                 |
| TRILOG Broadband Antenna         | Schwarzbeck      | VULB9163             | 9163-618      | 05-16-2020               | 05-15-2021                 |
| Loop Antenna                     | Schwarzbeck      | FMZB 1519B           | 1519B-076     | 04-25-2018               | 04-24-2021                 |
| Receiver                         | R&S              | ESCI7                | 100938-003    | 10-21-2019<br>10-16-2020 | 10-20-2020<br>10-15-2021   |
| Multi device Controller          | matur            | NCD/070/10711<br>112 | ---           | ---                      | ---                        |
| Temperature/ Humidity Indicator  | Shanghai qixiang | HM10                 | 1804298       | 06-29-2020               | 06-28-2021                 |
| Cable line                       | Fulai(7M)        | SF106                | 5219/6A       | ---                      | ---                        |
| Cable line                       | Fulai(6M)        | SF106                | 5220/6A       | ---                      | ---                        |
| Cable line                       | Fulai(3M)        | SF106                | 5216/6A       | ---                      | ---                        |
| Cable line                       | Fulai(3M)        | SF106                | 5217/6A       | ---                      | ---                        |

| Conducted disturbance Test      |              |           |               |                        |                            |
|---------------------------------|--------------|-----------|---------------|------------------------|----------------------------|
| Equipment                       | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Receiver                        | R&S          | ESCI      | 100435        | 04-28-2020             | 04-27-2021                 |
| Temperature/ Humidity Indicator | Defu         | TH128     | /             | ---                    | ---                        |
| LISN                            | R&S          | ENV216    | 100098        | 03-05-2020             | 03-04-2021                 |
| Barometer                       | changchun    | DYM3      | 1188          | ---                    | ---                        |

## 8 Radio Technical Requirements Specification

### Reference documents for testing:


| No. | Identity         | Document Title   |
|-----|------------------|--|
| 1   | FCC Part15C      | Subpart C-Intentional Radiators                                    |
| 2   | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

### Test Results List:

| Test Requirement                  | Test method | Test item   | Verdict | Note        |
|-----------------------------------|-------------|---|---------|-------------|
| Part15C Section 15.247 (a)(2)     | ANSI C63.10 | 6dB Occupied Bandwidth  | PASS    | Appendix A) |
| Part15C Section 15.247 (b)(3)     | ANSI C63.10 | Conducted Peak Output Power                                       | PASS    | Appendix B) |
| Part15C Section 15.247(d)         | ANSI C63.10 | Band-edge for RF Conducted Emissions                              | PASS    | Appendix C) |
| Part15C Section 15.247(d)         | ANSI C63.10 | RF Conducted Spurious Emissions                                   | PASS    | Appendix D) |
| Part15C Section 15.247 (e)        | ANSI C63.10 | Power Spectral Density  | PASS    | Appendix E) |
| Part15C Section 15.203/15.247 (c) | ANSI C63.10 | Antenna Requirement   | PASS    | Appendix F) |
| Part15C Section 15.207            | ANSI C63.10 | AC Power Line Conducted Emission                                  | PASS    | Appendix G) |
| Part15C Section 15.205/15.209     | ANSI C63.10 | Restricted bands around fundamental frequency (Radiated Emission) | PASS    | Appendix H) |
| Part15C Section 15.205/15.209     | ANSI C63.10 | Radiated Spurious Emissions                                       | PASS    | Appendix I) |

**Duty cycle**

| Test Case: Duty Cycle           |   |
|---------------------------------|---|
| Mode: BLE                       | Ant: Ant1   |
| Channel: 2402                   | Voltage: VN   |
| Temperature: TN                 | <b>Result: PASS</b><br><b>Value: 15%; 0.093999999999375ms</b> |
| Start Time: 2020/10/23 22:52:46 | End Time: 2020/10/23 22:52:53                                 |

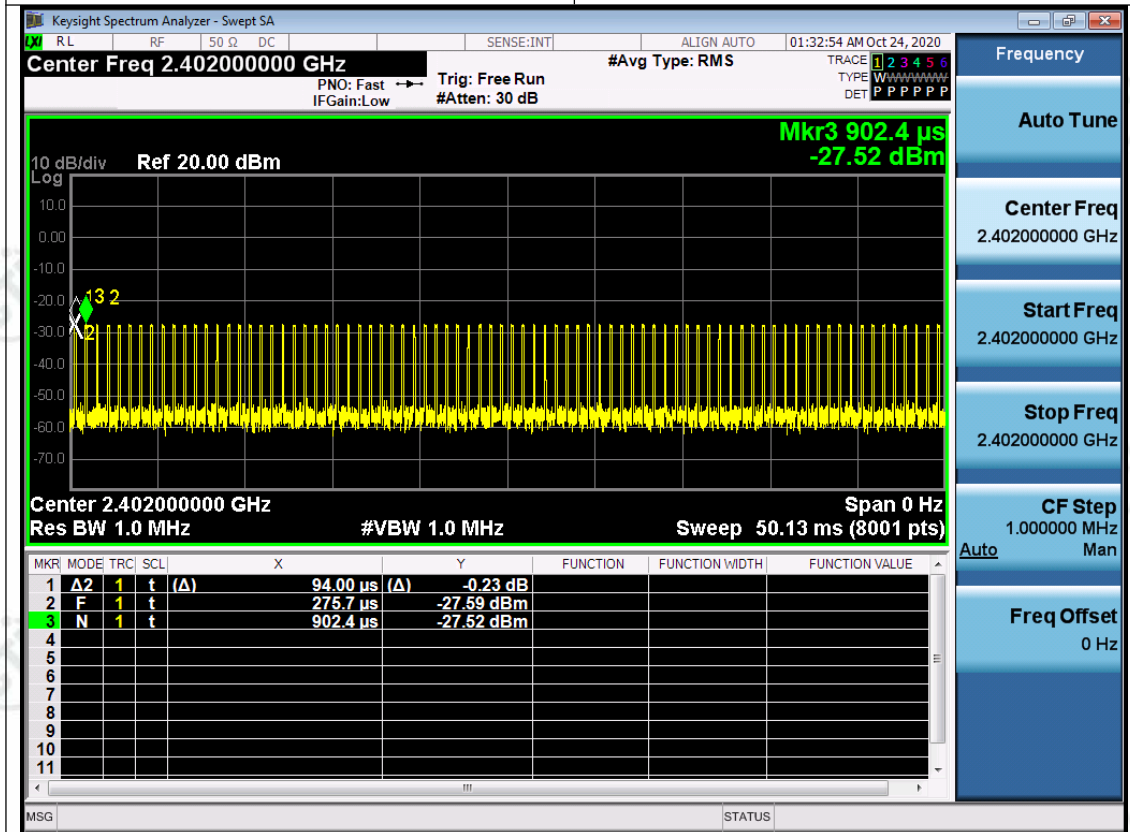


## Appendix A): 6dB Occupied Bandwidth

### Test Result

| Mode | Channel | 6dB Bandwidth [MHz] | Verdict |
|------|---------|---------------------|---------|
| BLE  | LCH     | 0.6829              | PASS    |
| BLE  | MCH     | 0.6870              | PASS    |
| BLE  | HCH     | 0.6867              | PASS    |

### Test Graphs




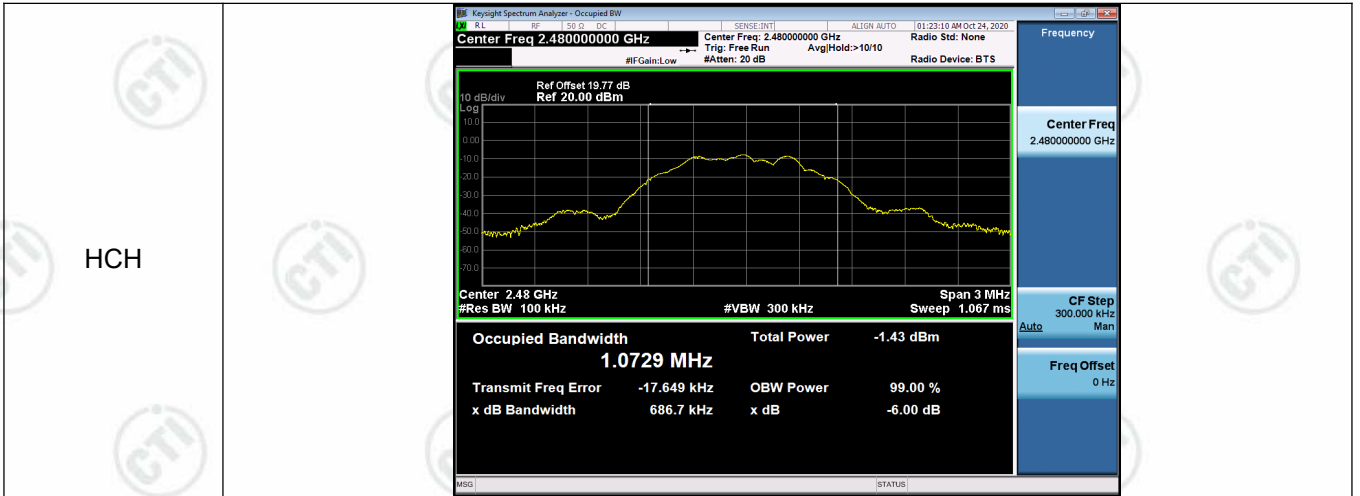

**OBD99%**

| Mode | Channel | 99% OBW[MHz] | Verdict |
|------|---------|--------------|---------|
| BLE  | LCH     | 1.0706       | PASS    |
| BLE  | MCH     | 1.0728       | PASS    |
| BLE  | HCH     | 1.0729       | PASS    |

**Test Graphs**

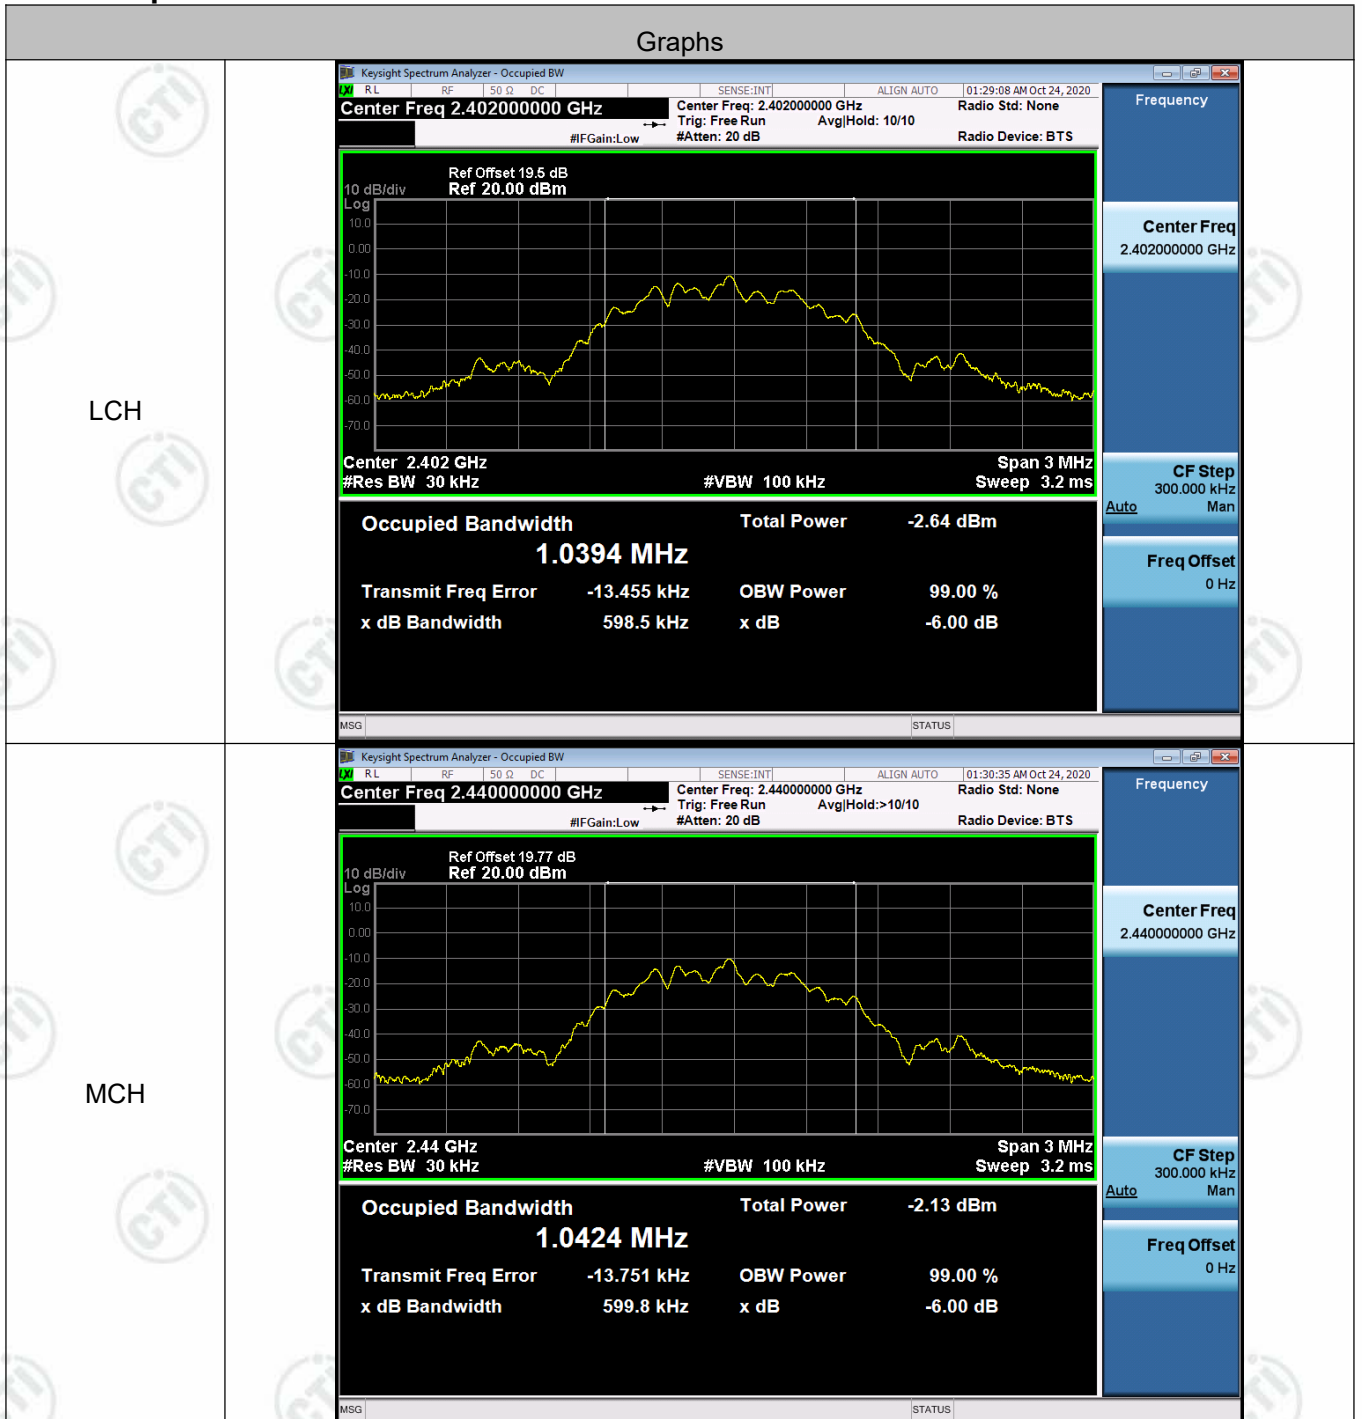







## Appendix B): Conducted Peak Output Power

### Test Result

| Mode | Channel | Conduct Peak Power[dBm] | Verdict |
|------|---------|-------------------------|---------|
| BLE  | LCH     | -8.062                  | PASS    |
| BLE  | MCH     | -7.546                  | PASS    |
| BLE  | HCH     | -7.582                  | PASS    |

### Test Graphs

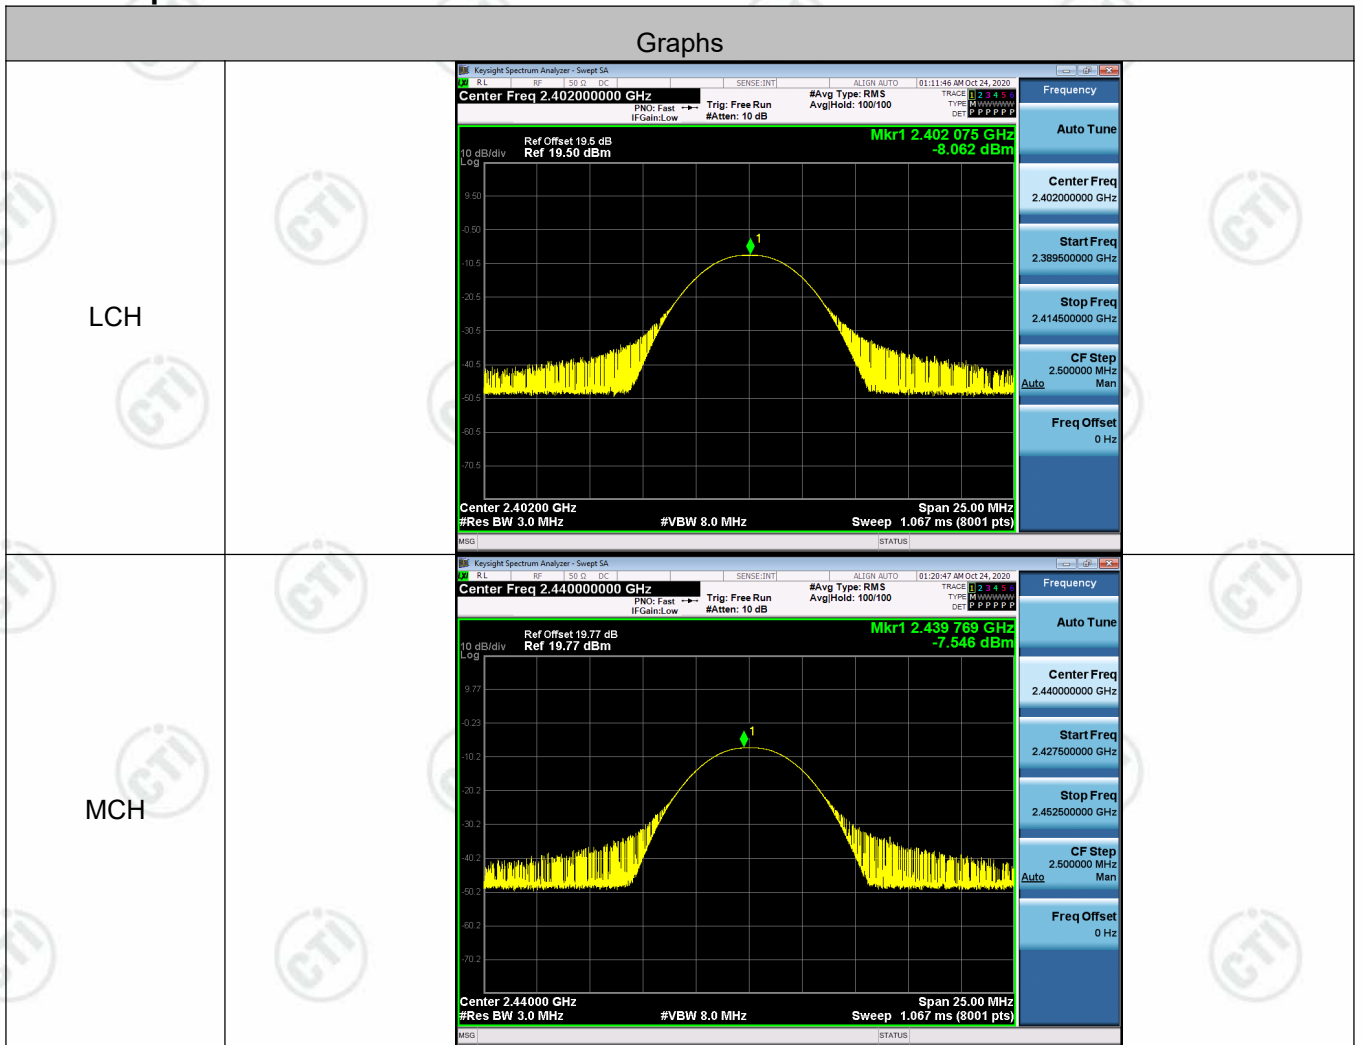

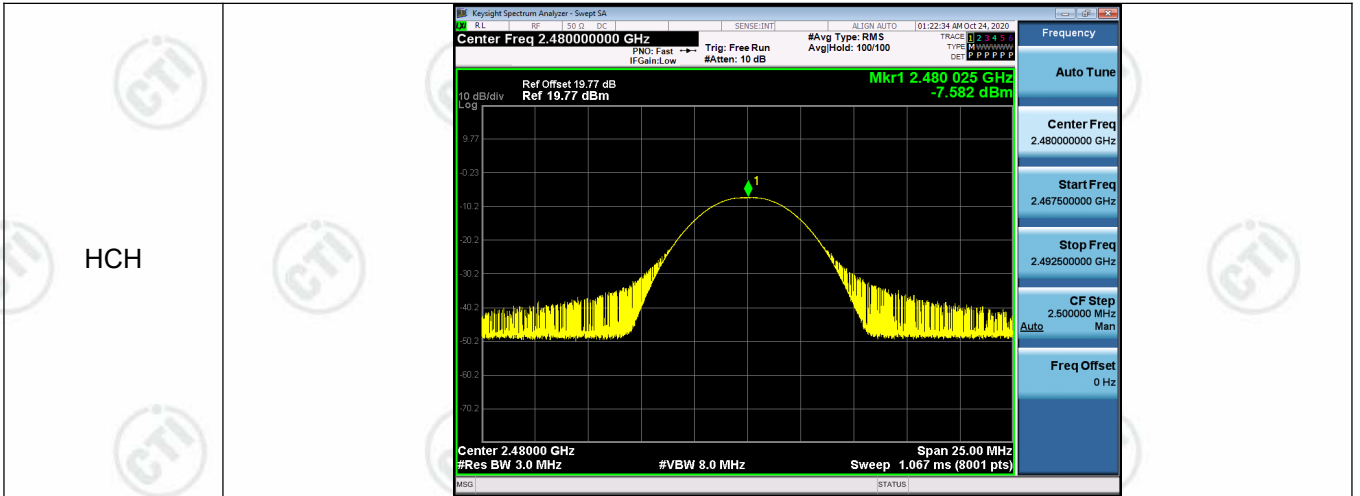


## Appendix C): Band-edge for RF Conducted Emissions

### Result Table

| Mode | Channel | Carrier Power[dBm] | Max.Spurious Level [dBm] | Limit [dBm] | Verdict |
|------|---------|--------------------|--------------------------|-------------|---------|
| BLE  | LCH     | -8.095             | -60.983                  | -28.1       | PASS    |
| BLE  | HCH     | -7.582             | -57.485                  | -27.58      | PASS    |

### Test Graphs

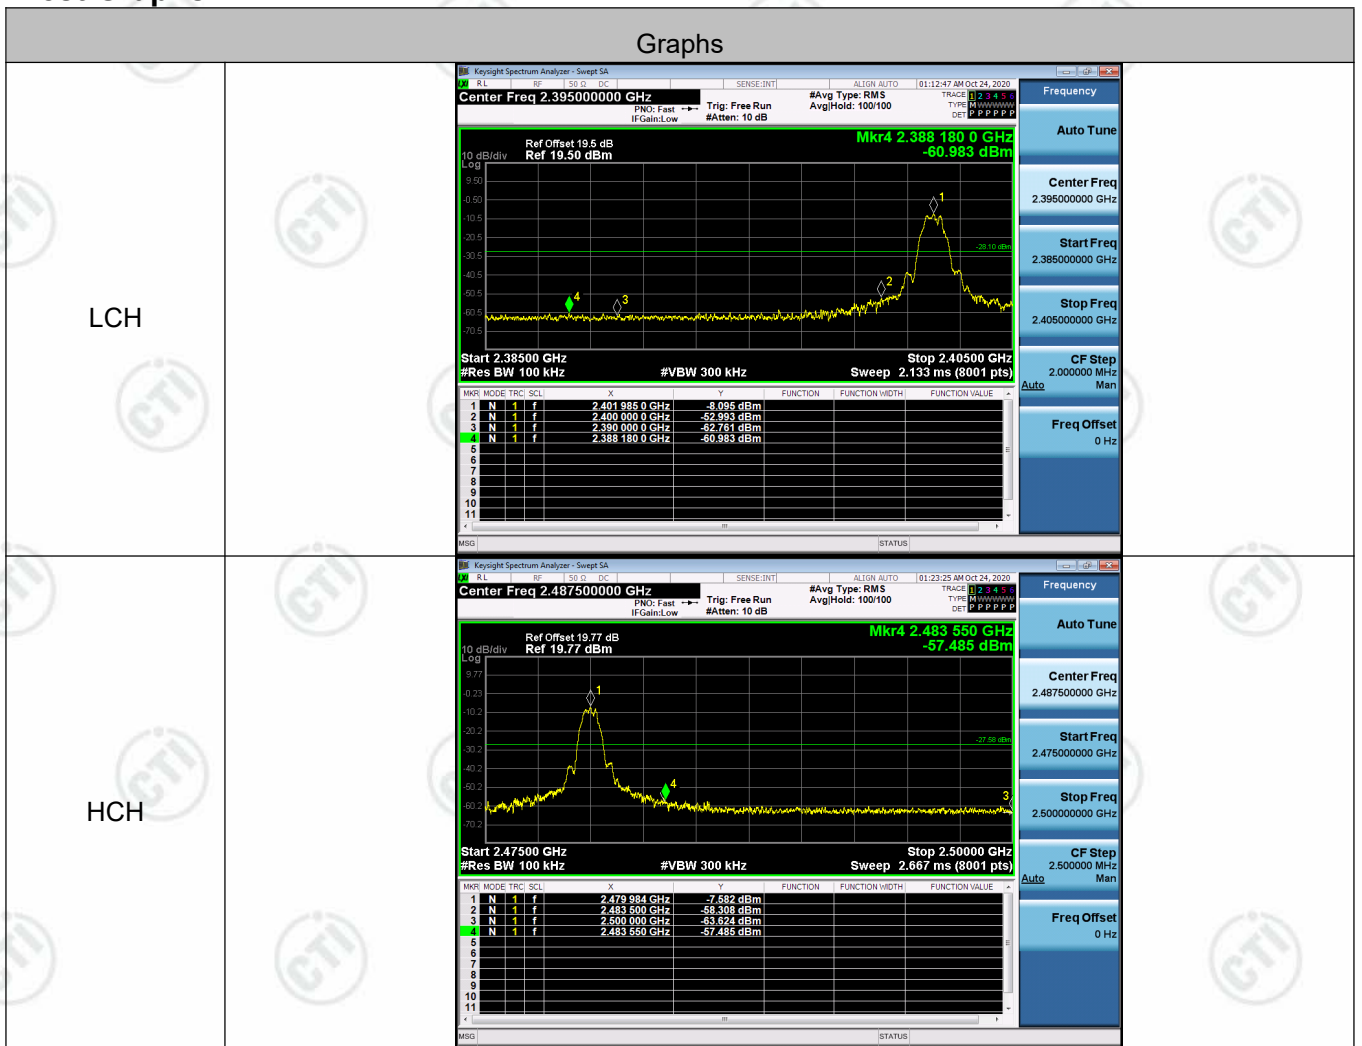



## Appendix D): RF Conducted Spurious Emissions


### Result Table

| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|------|---------|------------|----------|---------|
| BLE  | LCH     | -8.28      | <Limit   | PASS    |
| BLE  | MCH     | -7.733     | <Limit   | PASS    |
| BLE  | HCH     | -7.781     | <Limit   | PASS    |

### Test Graphs

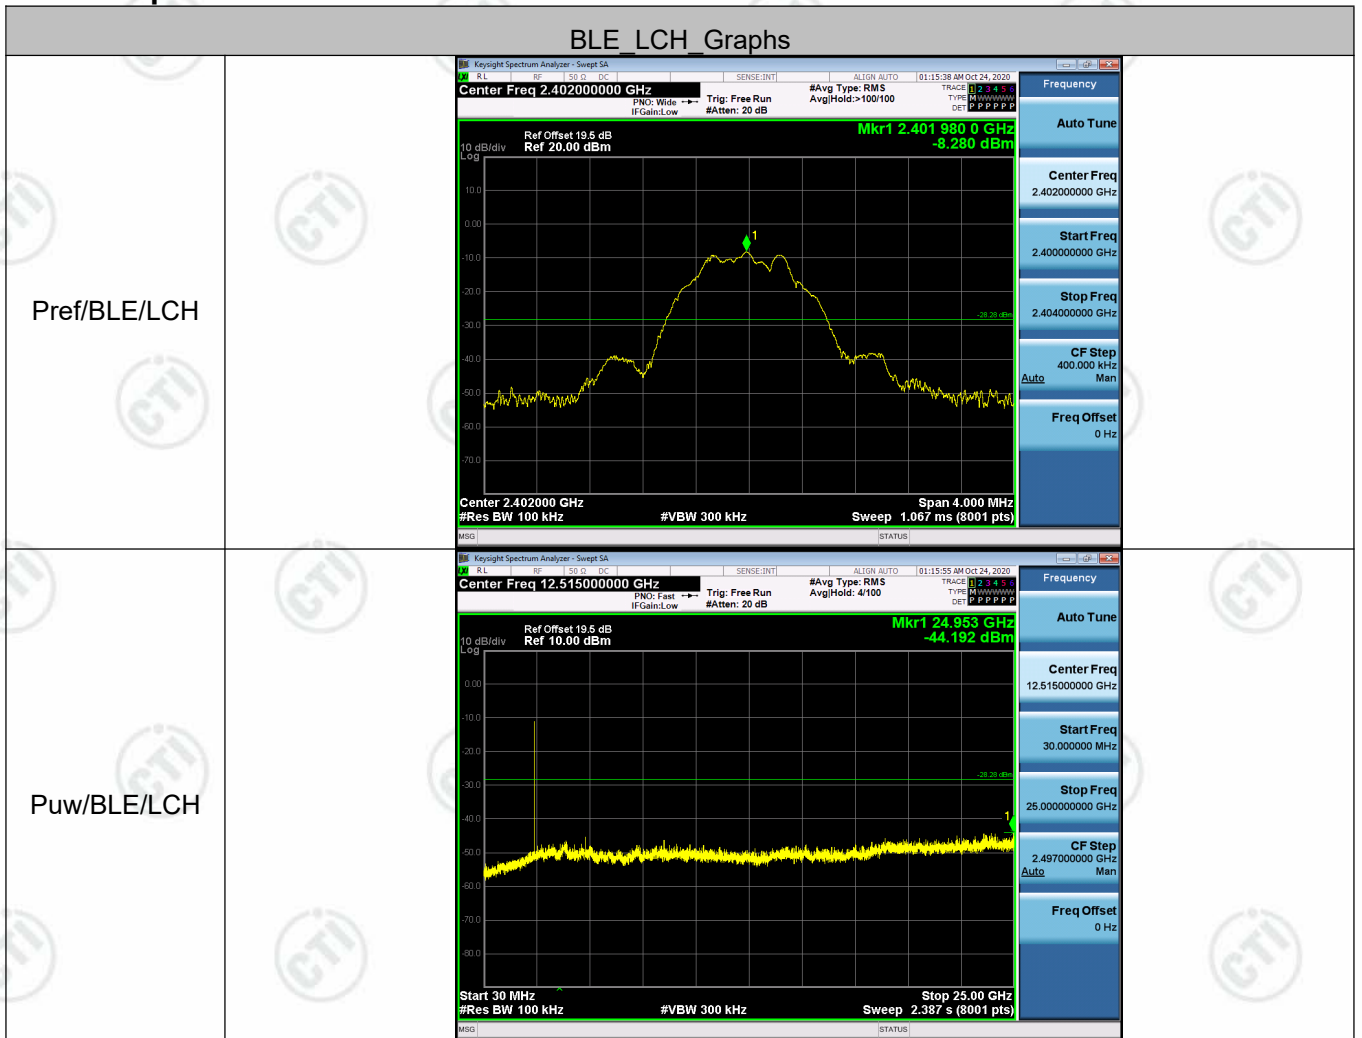

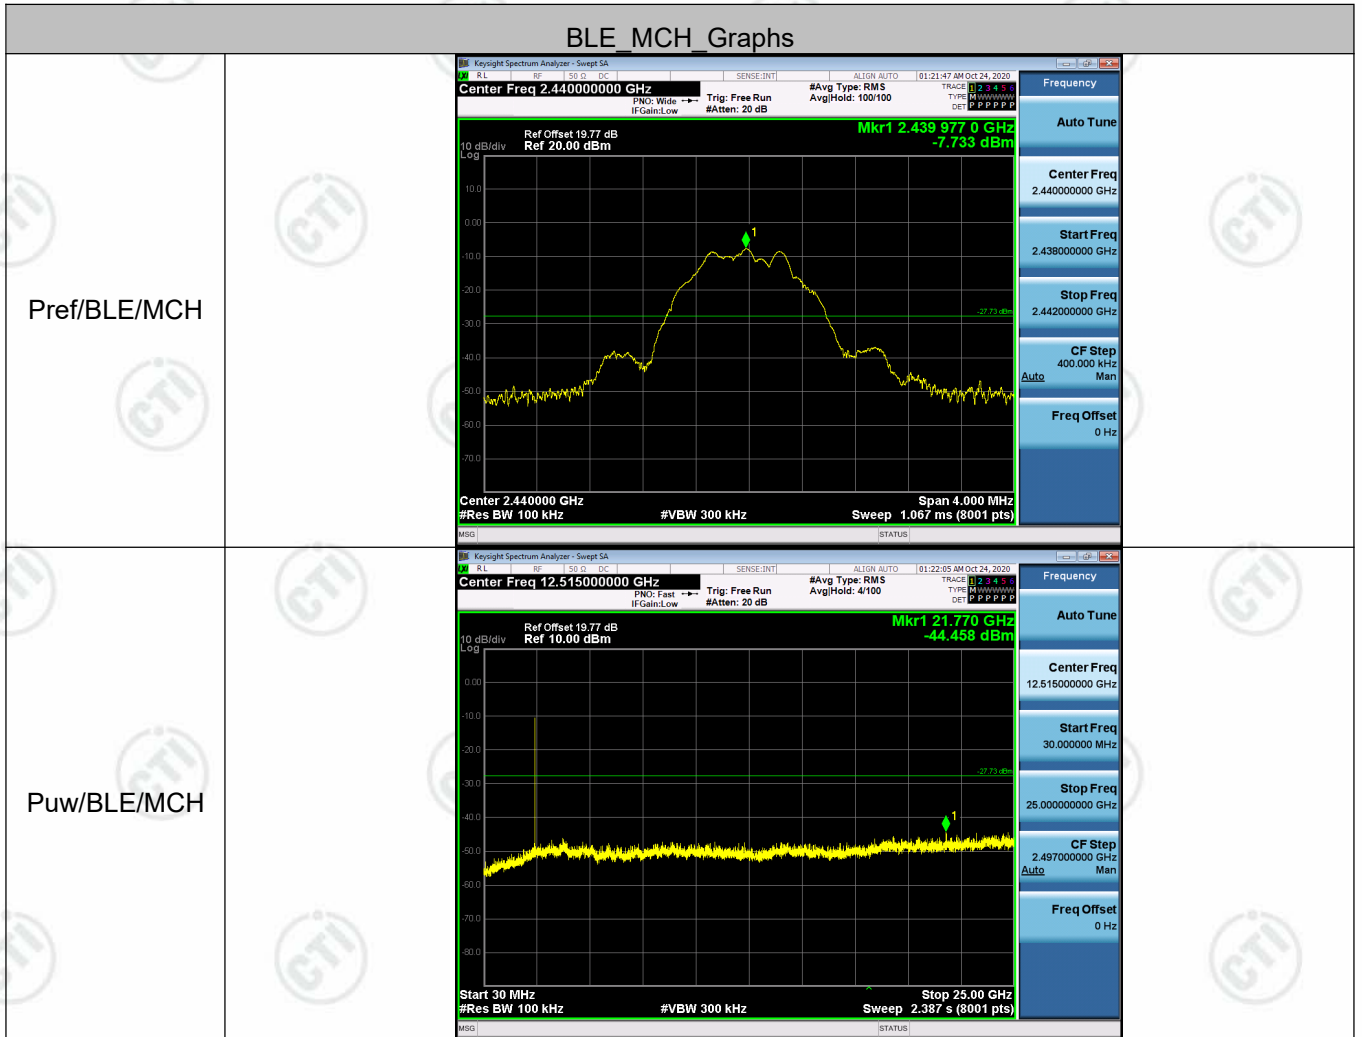

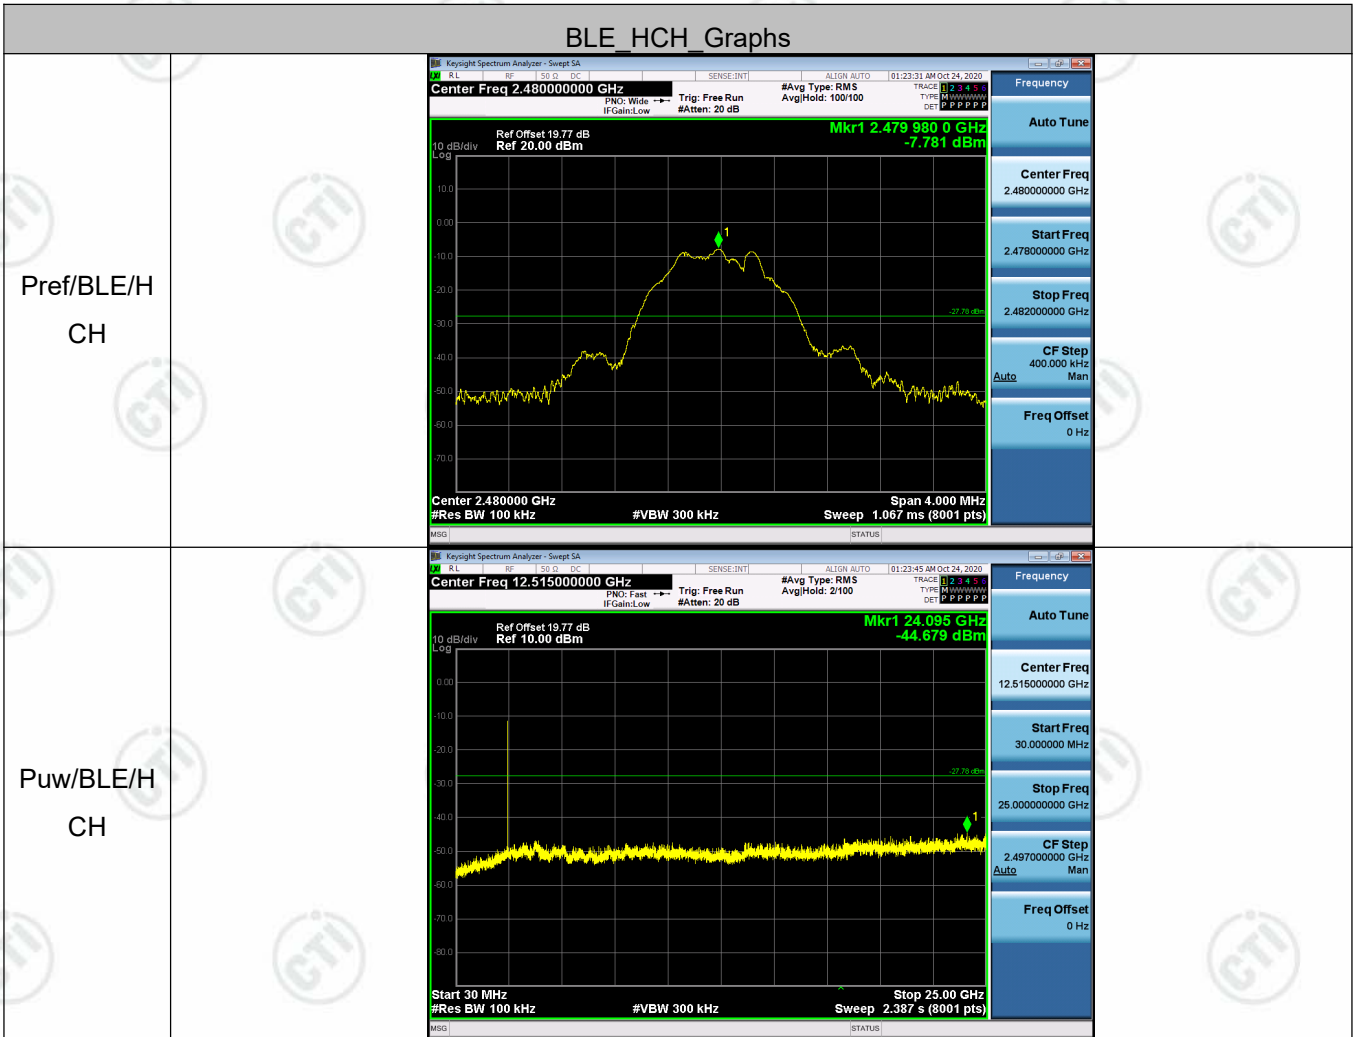


## Appendix E): Power Spectral Density

### Result Table

| Mode | Channel | PSD [dBm] | Verdict |
|------|---------|-----------|---------|
| BLE  | LCH     | -25.523   | PASS    |
| BLE  | MCH     | -25.206   | PASS    |
| BLE  | HCH     | -25.261   | PASS    |

### Test Graphs

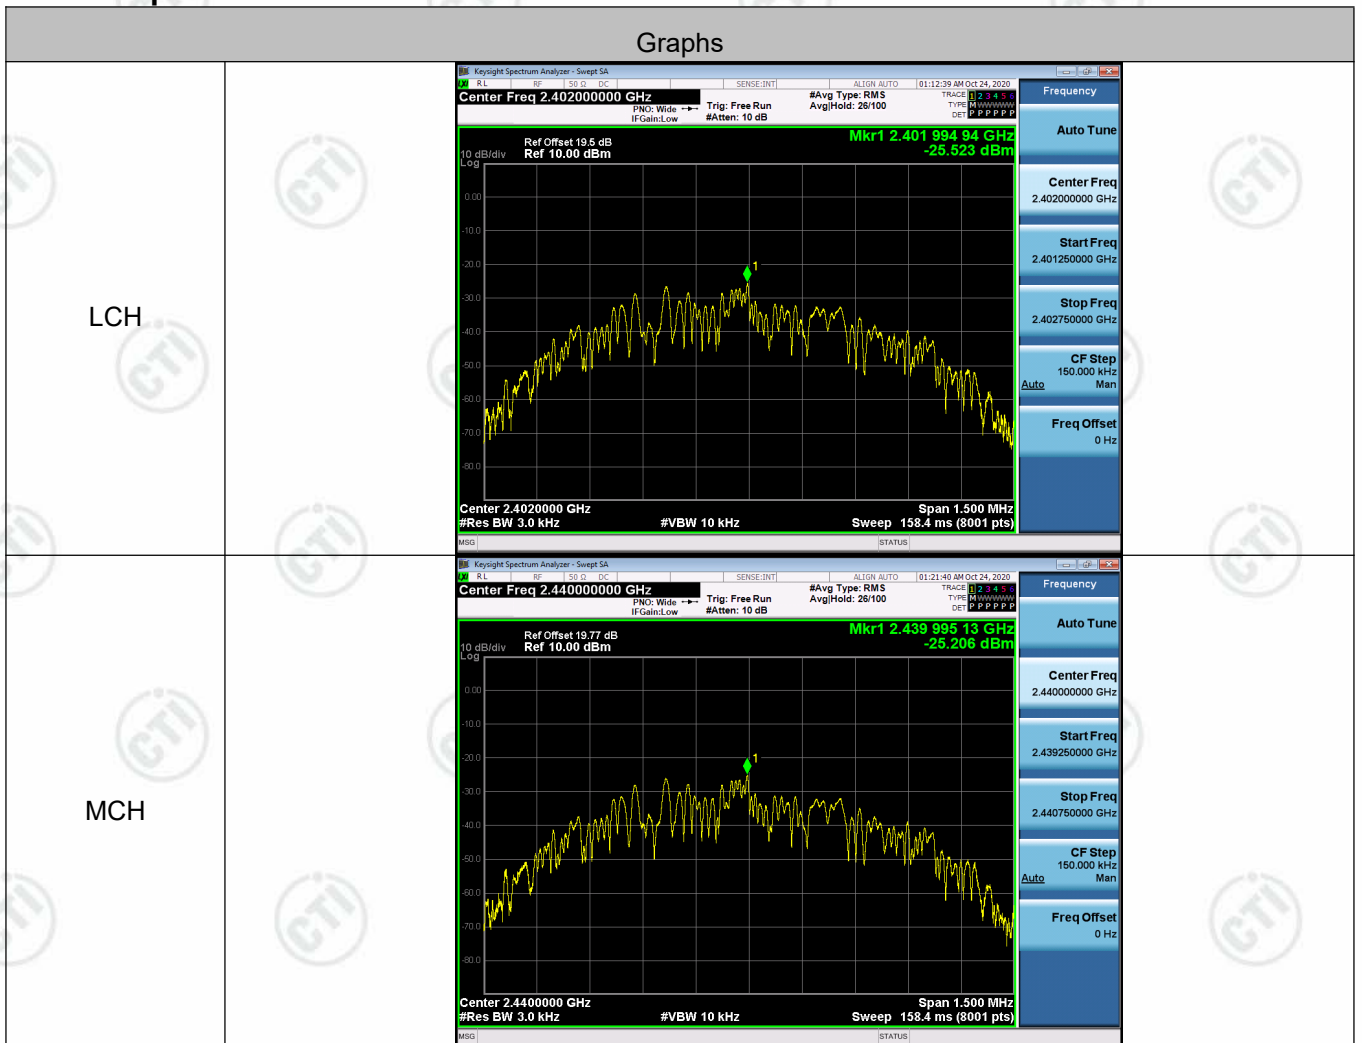





## Appendix F): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

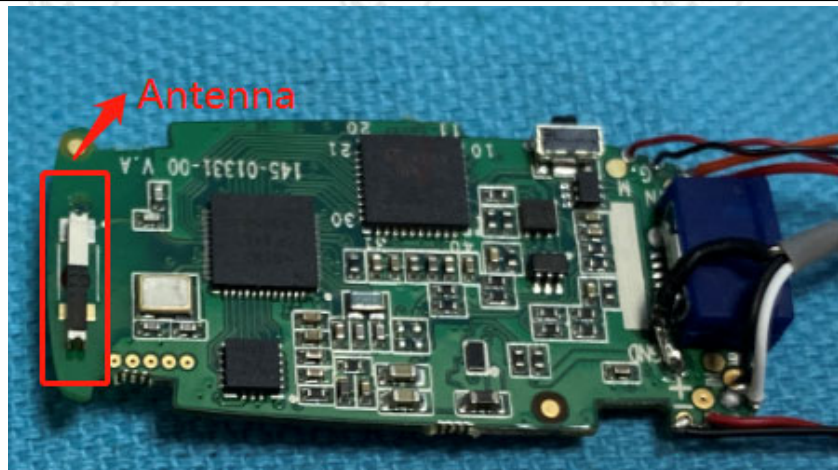

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.45dBi.

## Appendix G): AC Power Line Conducted Emission

| <p>Test Procedure:</p> | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> <li>1)The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol> |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|------------------------|---|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| <p>Limit:</p>          | <table border="1" data-bbox="497 1182 1366 1406"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.<br/>NOTE : The lower limit is applicable at the transition frequency</p>  | Frequency range (MHz) | Limit (dBμV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz)  | Limit (dBμV)  |                       |              |  |            |         |          |           |           |       |    |    |      |    |    |
|                        | Quasi-peak  | Average               |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.15-0.5               | 66 to 56*   | 56 to 46*             |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 0.5-5                  | 56  | 46                    |              |  |            |         |          |           |           |       |    |    |      |    |    |
| 5-30                   | 60  | 50                    |              |  |            |         |          |           |           |       |    |    |      |    |    |


### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


**Data**

Live line:

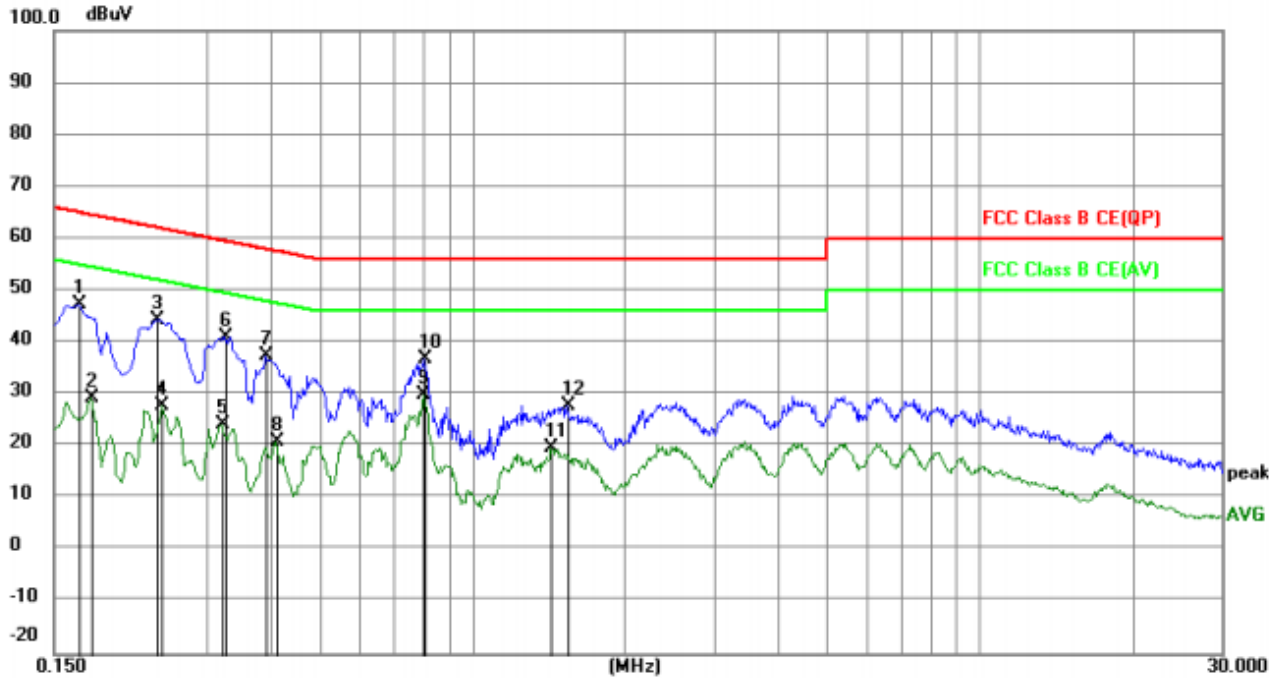

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1680       | 37.60                    | 9.87                    | 47.47                    | 65.06         | -17.59       | peak     |         |
| 2   |     | 0.1770       | 19.56                    | 9.87                    | 29.43                    | 54.63         | -25.20       | AVG      |         |
| 3   |     | 0.2400       | 34.54                    | 9.95                    | 44.49                    | 62.10         | -17.61       | peak     |         |
| 4   |     | 0.2445       | 17.92                    | 9.96                    | 27.88                    | 51.94         | -24.06       | AVG      |         |
| 5   |     | 0.3209       | 14.27                    | 10.05                   | 24.32                    | 49.68         | -25.36       | AVG      |         |
| 6   |     | 0.3255       | 31.15                    | 10.04                   | 41.19                    | 59.57         | -18.38       | peak     |         |
| 7   |     | 0.3930       | 27.33                    | 9.98                    | 37.31                    | 58.00         | -20.69       | peak     |         |
| 8   |     | 0.4110       | 10.91                    | 9.97                    | 20.88                    | 47.63         | -26.75       | AVG      |         |
| 9   | *   | 0.8025       | 19.99                    | 9.85                    | 29.84                    | 46.00         | -16.16       | AVG      |         |
| 10  |     | 0.8070       | 27.07                    | 9.85                    | 36.92                    | 56.00         | -19.08       | peak     |         |
| 11  |     | 1.4325       | 9.85                     | 9.81                    | 19.66                    | 46.00         | -26.34       | AVG      |         |
| 12  |     | 1.5405       | 18.09                    | 9.81                    | 27.90                    | 56.00         | -28.10       | peak     |         |

Neutral line:

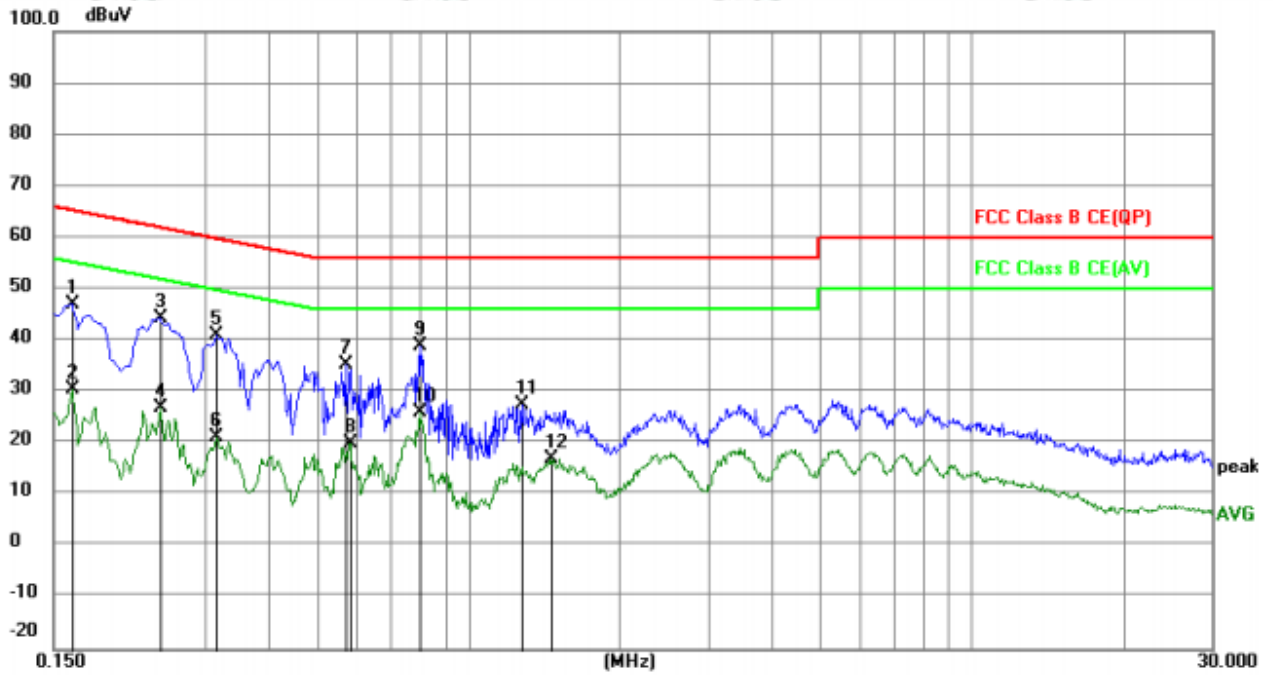

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|--------------|----------|---------|
| 1   |     | 0.1635       | 37.15                    | 9.87                    | 47.02                    | 65.28         | -18.26       | peak     |         |
| 2   |     | 0.1635       | 20.81                    | 9.87                    | 30.68                    | 55.28         | -24.60       | AVG      |         |
| 3   |     | 0.2445       | 34.45                    | 9.96                    | 44.41                    | 61.94         | -17.53       | peak     |         |
| 4   |     | 0.2445       | 17.09                    | 9.96                    | 27.05                    | 51.94         | -24.89       | AVG      |         |
| 5   |     | 0.3165       | 30.97                    | 10.05                   | 41.02                    | 59.80         | -18.78       | peak     |         |
| 6   |     | 0.3165       | 11.29                    | 10.05                   | 21.34                    | 49.80         | -28.46       | AVG      |         |
| 7   |     | 0.5730       | 25.32                    | 10.04                   | 35.36                    | 56.00         | -20.64       | peak     |         |
| 8   |     | 0.5820       | 10.14                    | 10.05                   | 20.19                    | 46.00         | -25.81       | AVG      |         |
| 9   | *   | 0.8025       | 29.19                    | 9.85                    | 39.04                    | 56.00         | -16.96       | peak     |         |
| 10  |     | 0.8025       | 16.34                    | 9.85                    | 26.19                    | 46.00         | -19.81       | AVG      |         |
| 11  |     | 1.2795       | 17.77                    | 9.82                    | 27.59                    | 56.00         | -28.41       | peak     |         |
| 12  |     | 1.4595       | 7.37                     | 9.81                    | 17.18                    | 46.00         | -28.82       | AVG      |         |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


## Appendix H): Restricted bands around fundamental frequency (Radiated)

|                 |  |                          |                  |        |            |
|-----------------|--|--------------------------|------------------|--------|------------|
| Receiver Setup: | Frequency  | Detector                 | RBW              | VBW    | Remark     |
|                 | 30MHz-1GHz   | Quasi-peak               | 120kHz           | 300kHz | Quasi-peak |
|                 | Above 1GHz   | Peak                     | 1MHz             | 3MHz   | Peak       |
|                 |  | Peak                     | 1MHz             | 10Hz   | Average    |
| Test Procedure: | <p><b>Below 1GHz test procedure as below:</b></p> <p>Test method Refer as KDB 558074 D01 v04, Section 12.1</p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol> |                          |                  |        |            |
| Limit:          | Frequency  | Limit (dB $\mu$ V/m @3m) | Remark           |        |            |
|                 | 30MHz-88MHz  | 40.0                     | Quasi-peak Value |        |            |
|                 | 88MHz-216MHz   | 43.5                     | Quasi-peak Value |        |            |
|                 | 216MHz-960MHz  | 46.0                     | Quasi-peak Value |        |            |
|                 | 960MHz-1GHz  | 54.0                     | Quasi-peak Value |        |            |
|                 | Above 1GHz   | 54.0                     | Average Value    |        |            |
| 74.0            |  | Peak Value               |                  |        |            |

**Test plot as follows:**

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK                    |          |      |


**Test Graph**

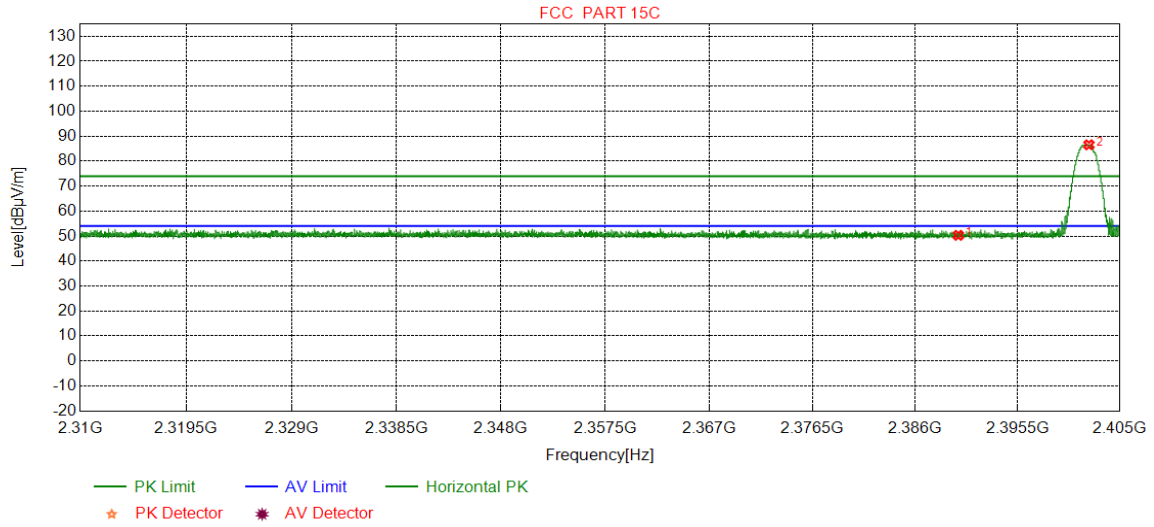

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2390.0000   | 32.25           | 13.37           | -43.12          | 47.80          | 50.30          | 74.00          | 23.70       | Pass   | Horizontal |
| 2  | 2402.1308   | 32.26           | 13.31           | -43.12          | 84.10          | 86.55          | 74.00          | -12.55      | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | PK                    |          |      |


**Test Graph**

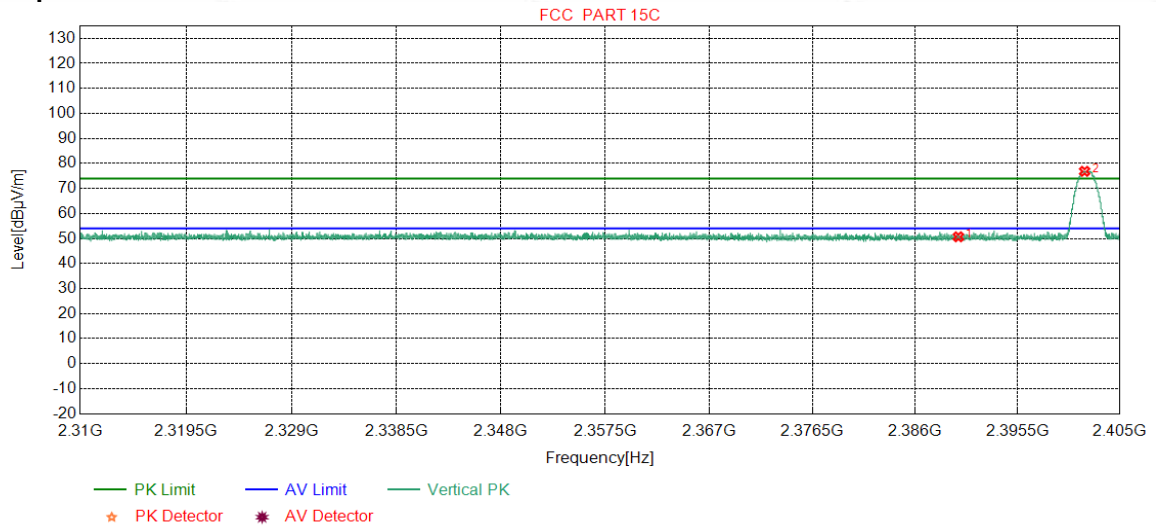

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2390.0000   | 32.25           | 13.37           | -43.12          | 48.18          | 50.68          | 74.00          | 23.32       | Pass   | Vertical |
| 2  | 2401.7254   | 32.26           | 13.31           | -43.12          | 74.40          | 76.85          | 74.00          | -2.85       | Pass   | Vertical |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV                    |          |      |

**Test Graph**

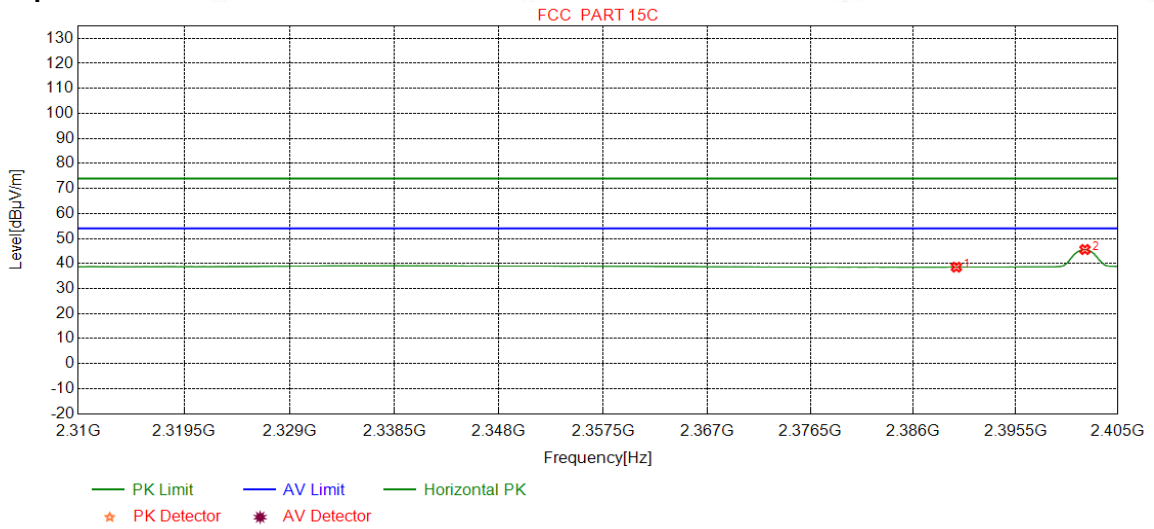


| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2390.0000   | 32.25           | 13.37           | -43.12          | 36.05          | 38.55          | 54.00          | 15.45       | Pass   | Horizontal |
| 2  | 2401.9471   | 32.26           | 13.31           | -43.12          | 43.15          | 45.60          | 54.00          | 8.40        | Pass   | Horizontal |



|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2402 |
| Remark: | AV                    |          |      |


**Test Graph**

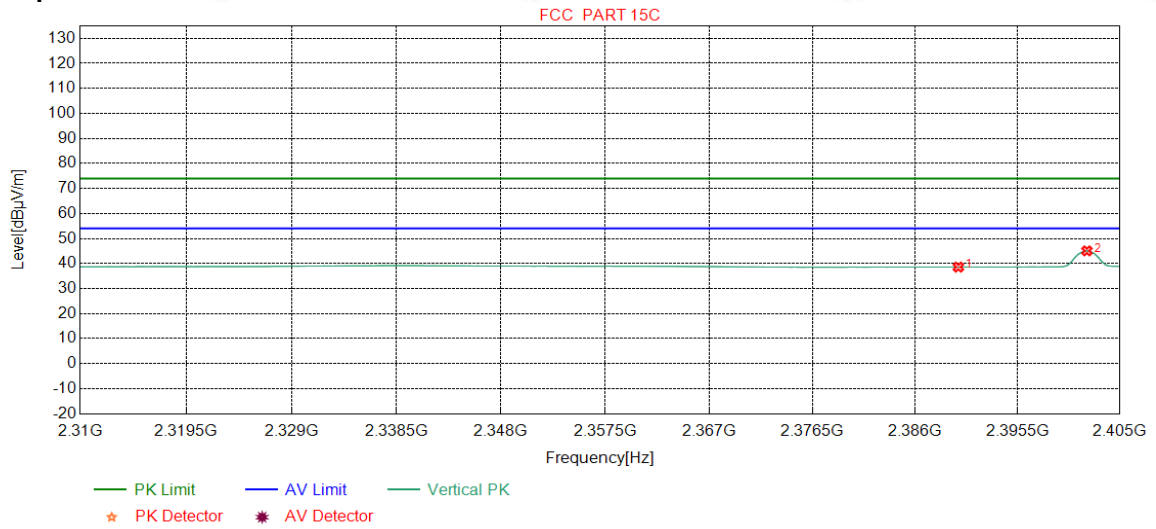

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2390.0000   | 32.25           | 13.37           | -43.12          | 36.08          | 38.58          | 54.00          | 15.42       | Pass   | Vertical |
| 2  | 2401.9408   | 32.26           | 13.31           | -43.12          | 42.60          | 45.05          | 54.00          | 8.95        | Pass   | Vertical |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK                    |          |      |


**Test Graph**

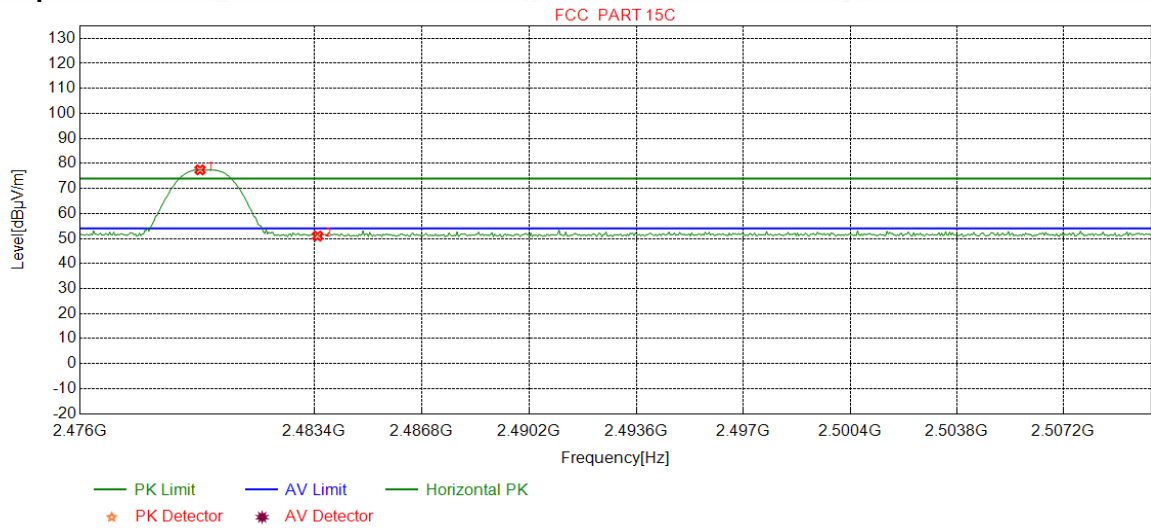

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2479.7872   | 32.37           | 13.39           | -43.10          | 74.78          | 77.44          | 74.00          | -3.44       | Pass   | Horizontal |
| 2  | 2483.5000   | 32.38           | 13.38           | -43.11          | 48.33          | 50.98          | 74.00          | 23.02       | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | PK                    |          |      |


**Test Graph**

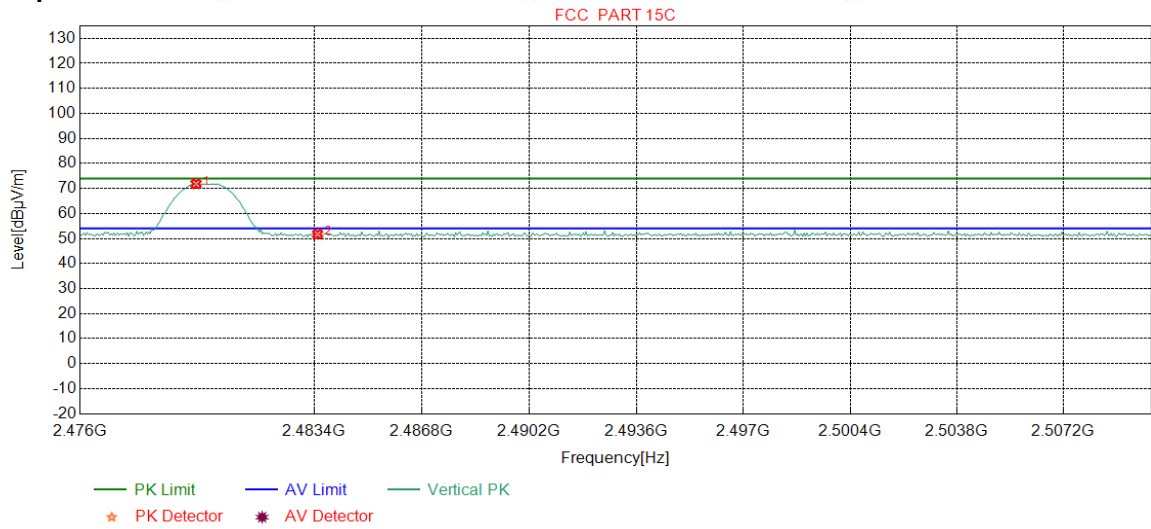

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2479.6596   | 32.37           | 13.39           | -43.10          | 69.19          | 71.85          | 74.00          | 2.15        | Pass   | Vertical |
| 2  | 2483.5000   | 32.38           | 13.38           | -43.11          | 49.09          | 51.74          | 74.00          | 22.26       | Pass   | Vertical |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV                    |          |      |


**Test Graph**

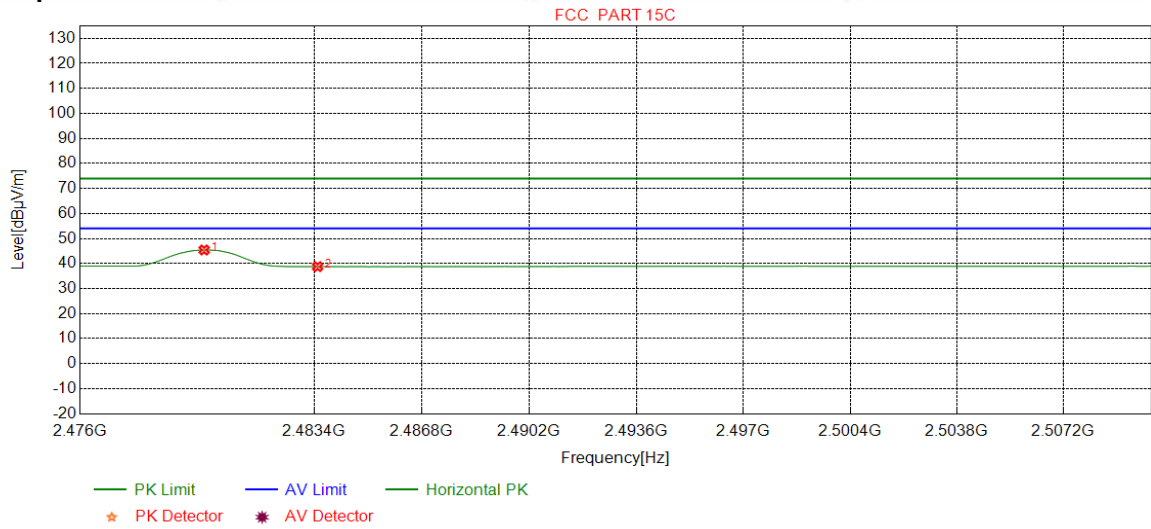

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity   |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|------------|
| 1  | 2479.9149   | 32.37           | 13.39           | -43.10          | 42.76          | 45.42          | 54.00          | 8.58        | Pass   | Horizontal |
| 2  | 2483.5000   | 32.38           | 13.38           | -43.11          | 36.12          | 38.77          | 54.00          | 15.23       | Pass   | Horizontal |

|         |                       |          |      |
|---------|-----------------------|----------|------|
| Mode:   | BLE GFSK Transmitting | Channel: | 2480 |
| Remark: | AV                    |          |      |

**Test Graph**

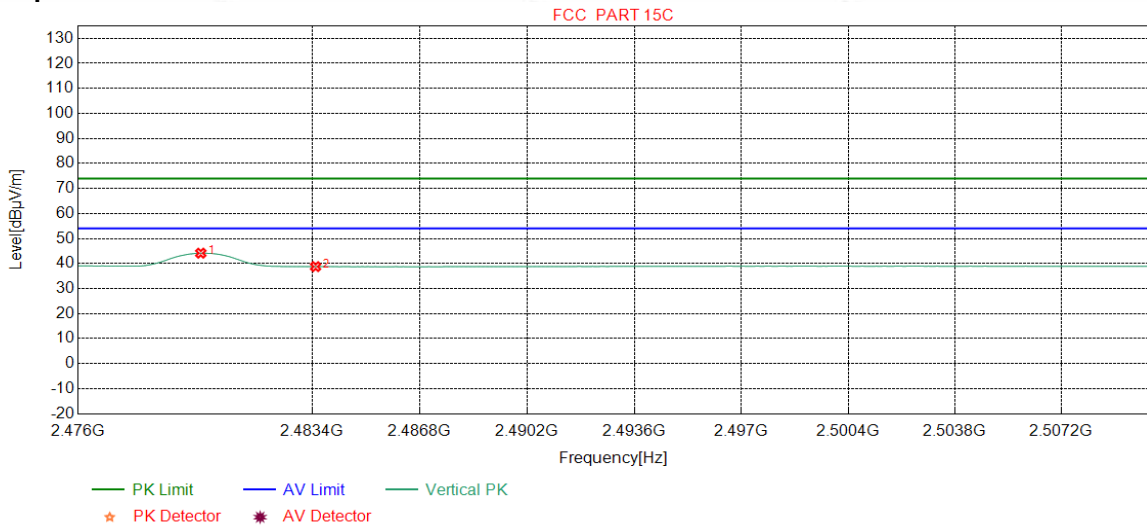

| NO | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB] | Pream gain [dB] | Reading [dBµV] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Result | Polarity |
|----|-------------|-----------------|-----------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|
| 1  | 2479.8723   | 32.37           | 13.39           | -43.10          | 41.48          | 44.14          | 54.00          | 9.86        | Pass   | Vertical |
| 2  | 2483.5000   | 32.38           | 13.38           | -43.11          | 36.11          | 38.76          | 54.00          | 15.24       | Pass   | Vertical |

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

## Appendix I) Radiated Spurious Emissions

| Receiver Setup: | Frequency         | Detector   | RBW    | VBW     | Remark     |
|-----------------|-------------------|------------|--------|---------|------------|
|                 | 0.009MHz-0.090MHz | Peak       | 10kHz  | 30kHz   | Peak       |
|                 | 0.009MHz-0.090MHz | Average    | 10kHz  | 30kHz   | Average    |
|                 | 0.090MHz-0.110MHz | Quasi-peak | 10kHz  | 30kHz   | Quasi-peak |
|                 | 0.110MHz-0.490MHz | Peak       | 10kHz  | 30kHz   | Peak       |
|                 | 0.110MHz-0.490MHz | Average    | 10kHz  | 30kHz   | Average    |
|                 | 0.490MHz -30MHz   | Quasi-peak | 10kHz  | 30kHz   | Quasi-peak |
|                 | 30MHz-1GHz        | Quasi-peak | 120kHz | 300kHz  | Quasi-peak |
|                 | Above 1GHz        | Peak       | 1MHz   | 3MHz    | Peak       |
| Peak            |                   | 1MHz       | 10Hz   | Average |            |

**Test Procedure:**

**Below 1GHz test procedure as below:**  
 Test method Refer as KDB 558074 D01 v04, Section 12.1

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel, the middle channel, the Highest channel
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

| Limit: | Frequency         | Field strength (microvolt/meter) | Limit (dB $\mu$ V/m) | Remark     | Measurement distance (m) |
|--------|-------------------|----------------------------------|----------------------|------------|--------------------------|
|        | 0.009MHz-0.490MHz | 2400/F(kHz)                      | -                    | -          | 300                      |
|        | 0.490MHz-1.705MHz | 24000/F(kHz)                     | -                    | -          | 30                       |
|        | 1.705MHz-30MHz    | 30                               | -                    | -          | 30                       |
|        | 30MHz-88MHz       | 100                              | 40.0                 | Quasi-peak | 3                        |
|        | 88MHz-216MHz      | 150                              | 43.5                 | Quasi-peak | 3                        |
|        | 216MHz-960MHz     | 200                              | 46.0                 | Quasi-peak | 3                        |
|        | 960MHz-1GHz       | 500                              | 54.0                 | Quasi-peak | 3                        |
|        | Above 1GHz        | 500                              | 54.0                 | Average    | 3                        |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

**Radiated Spurious Emissions test Data:**  
**Radiated Emission below 1GHz**

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2440     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 36.5967     | 11.21           | 0.67                  | -31.38          | 43.20          | 23.70          | 40.00          | 16.30       | Pass   | H        | PK     |
| 2     | 89.5640     | 9.30            | 1.10                  | -32.09          | 56.04          | 34.35          | 43.50          | 9.15        | Pass   | H        | PK     |
| 3     | 252.5403    | 12.25           | 1.89                  | -31.89          | 49.34          | 31.59          | 46.00          | 14.41       | Pass   | H        | PK     |
| 4     | 383.4063    | 15.03           | 2.33                  | -31.86          | 40.09          | 25.59          | 46.00          | 20.41       | Pass   | H        | PK     |
| 5     | 600.0290    | 19.00           | 2.96                  | -31.50          | 40.39          | 30.85          | 46.00          | 15.15       | Pass   | H        | PK     |
| 6     | 844.9785    | 21.44           | 3.50                  | -31.82          | 38.10          | 31.22          | 46.00          | 14.78       | Pass   | H        | PK     |
| 7     | 36.5967     | 11.21           | 0.67                  | -31.38          | 43.76          | 24.26          | 40.00          | 15.74       | Pass   | V        | PK     |
| 8     | 95.9666     | 10.35           | 1.13                  | -31.97          | 53.50          | 33.01          | 43.50          | 10.49       | Pass   | V        | PK     |
| 9     | 195.0135    | 10.43           | 1.64                  | -31.94          | 45.64          | 25.77          | 43.50          | 17.73       | Pass   | V        | PK     |
| 10    | 411.4421    | 15.58           | 2.42                  | -31.83          | 38.45          | 24.62          | 46.00          | 21.38       | Pass   | V        | PK     |
| 11    | 600.0290    | 19.00           | 2.96                  | -31.50          | 41.22          | 31.68          | 46.00          | 14.32       | Pass   | V        | PK     |
| 12    | 875.0515    | 21.80           | 3.55                  | -31.70          | 36.41          | 30.06          | 46.00          | 15.94       | Pass   | V        | PK     |

**Transmitter Emission above 1GHz**

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2402     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1993.499    | 31.66           | 3.46                  | -43.18          | 52.99          | 44.93          | 74.00          | 29.07       | Pass   | H        | PK     |
| 2     | 3181.012    | 33.27           | 4.62                  | -43.10          | 50.85          | 45.64          | 74.00          | 28.36       | Pass   | H        | PK     |
| 3     | 4804.000    | 34.50           | 4.55                  | -42.80          | 48.91          | 45.16          | 74.00          | 28.84       | Pass   | H        | PK     |
| 4     | 7206.280    | 36.31           | 5.81                  | -42.16          | 54.34          | 54.30          | 74.00          | 19.70       | Pass   | H        | PK     |
| 5     | 9608.000    | 37.64           | 6.63                  | -42.10          | 46.67          | 48.84          | 74.00          | 25.16       | Pass   | H        | PK     |
| 6     | 12010.00    | 39.31           | 7.60                  | -41.90          | 46.35          | 51.36          | 74.00          | 22.64       | Pass   | H        | PK     |
| 7     | 7205.840    | 36.31           | 5.82                  | -42.16          | 36.01          | 35.98          | 54.00          | 18.02       | Pass   | H        | AV     |
| 8     | 1990.699    | 31.64           | 3.46                  | -43.18          | 56.65          | 48.57          | 74.00          | 25.43       | Pass   | V        | PK     |
| 9     | 3794.052    | 33.64           | 4.37                  | -43.05          | 49.78          | 44.74          | 74.00          | 29.26       | Pass   | V        | PK     |
| 10    | 4804.000    | 34.50           | 4.55                  | -42.80          | 46.53          | 42.78          | 74.00          | 31.22       | Pass   | V        | PK     |
| 11    | 7205.280    | 36.31           | 5.82                  | -42.17          | 52.14          | 52.10          | 74.00          | 21.90       | Pass   | V        | PK     |
| 12    | 9608.000    | 37.64           | 6.63                  | -42.10          | 46.61          | 48.78          | 74.00          | 25.22       | Pass   | V        | PK     |
| 13    | 12010.00    | 39.31           | 7.60                  | -41.90          | 46.66          | 51.67          | 74.00          | 22.33       | Pass   | V        | PK     |

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2440     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1807.880    | 30.43           | 3.33                  | -42.73          | 51.54          | 42.57          | 74.00          | 31.43       | Pass   | H        | PK     |
| 2     | 3189.012    | 33.28           | 4.63                  | -43.10          | 50.12          | 44.93          | 74.00          | 29.07       | Pass   | H        | PK     |
| 3     | 4880.000    | 34.50           | 4.80                  | -42.80          | 47.22          | 43.72          | 74.00          | 30.28       | Pass   | H        | PK     |
| 4     | 7320.288    | 36.42           | 5.85                  | -42.14          | 55.69          | 55.82          | 74.00          | 18.18       | Pass   | H        | PK     |
| 5     | 9760.000    | 37.70           | 6.73                  | -42.10          | 48.07          | 50.40          | 74.00          | 23.60       | Pass   | H        | PK     |
| 6     | 12200.00    | 39.42           | 7.67                  | -41.90          | 48.67          | 53.86          | 74.00          | 20.14       | Pass   | H        | PK     |
| 7     | 7319.823    | 36.42           | 5.85                  | -42.14          | 36.84          | 36.97          | 54.00          | 17.03       | Pass   | V        | AV     |
| 8     | 1798.879    | 30.37           | 3.32                  | -42.71          | 56.05          | 47.03          | 74.00          | 26.97       | Pass   | V        | PK     |
| 9     | 3055.003    | 33.22           | 4.82                  | -43.10          | 50.90          | 45.84          | 74.00          | 28.16       | Pass   | V        | PK     |
| 10    | 4880.000    | 34.50           | 4.80                  | -42.80          | 47.02          | 43.52          | 74.00          | 30.48       | Pass   | V        | PK     |
| 11    | 7320.000    | 36.42           | 5.85                  | -42.14          | 52.03          | 52.16          | 74.00          | 21.84       | Pass   | V        | PK     |
| 12    | 9760.000    | 37.70           | 6.73                  | -42.10          | 47.32          | 49.65          | 74.00          | 24.35       | Pass   | V        | PK     |
| 13    | 12200.00    | 39.42           | 7.67                  | -41.90          | 45.75          | 50.94          | 74.00          | 23.06       | Pass   | V        | PK     |



| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2480     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 1470.847    | 28.37           | 2.97                  | -42.98          | 51.51          | 39.87          | 74.00          | 34.13       | Pass   | H        | PK     |
| 2     | 1996.499    | 31.68           | 3.47                  | -43.20          | 52.23          | 44.18          | 74.00          | 29.82       | Pass   | H        | PK     |
| 3     | 4960.000    | 34.50           | 4.82                  | -42.80          | 49.25          | 45.77          | 74.00          | 28.23       | Pass   | H        | PK     |
| 4     | 7440.296    | 36.54           | 5.85                  | -42.11          | 53.45          | 53.73          | 74.00          | 20.27       | Pass   | H        | PK     |
| 5     | 9920.000    | 37.77           | 6.79                  | -42.10          | 46.12          | 48.58          | 74.00          | 25.42       | Pass   | H        | PK     |
| 6     | 12400.00    | 39.54           | 7.86                  | -41.90          | 48.14          | 53.64          | 74.00          | 20.36       | Pass   | H        | PK     |
| 7     | 1800.480    | 30.38           | 3.32                  | -42.71          | 53.86          | 44.85          | 74.00          | 29.15       | Pass   | V        | PK     |
| 8     | 3842.056    | 33.67           | 4.36                  | -43.03          | 50.48          | 45.48          | 74.00          | 28.52       | Pass   | V        | PK     |
| 9     | 4960.000    | 34.50           | 4.82                  | -42.80          | 49.53          | 46.05          | 74.00          | 27.95       | Pass   | V        | PK     |
| 10    | 7440.296    | 36.54           | 5.85                  | -42.11          | 54.53          | 54.81          | 74.00          | 19.19       | Pass   | V        | PK     |
| 11    | 9920.000    | 37.77           | 6.79                  | -42.10          | 45.69          | 48.15          | 74.00          | 25.85       | Pass   | V        | PK     |
| 12    | 12400.00    | 39.54           | 7.86                  | -41.90          | 47.14          | 52.64          | 74.00          | 21.36       | Pass   | V        | PK     |
| 13    | 7439.830    | 36.54           | 5.85                  | -42.11          | 36.70          | 36.98          | 54.00          | 17.02       | Pass   | V        | AV     |

### Transmitter Emission above 18GHz

| Mode: |             |                 | BLE GFSK Transmitting |                 |                |                |                | Channel:    |        | 2440     |        |
|-------|-------------|-----------------|-----------------------|-----------------|----------------|----------------|----------------|-------------|--------|----------|--------|
| NO    | Freq. [MHz] | Ant Factor [dB] | Cable loss [dB]       | Pream gain [dB] | Reading [dBμV] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Result | Polarity | Remark |
| 1     | 18311.93    | 37.74           | 0.00                  | -64.02          | 70.25          | 43.97          | 74.00          | 30.03       | Pass   | H        | PK     |
| 2     | 19473.69    | 38.96           | 0.00                  | -62.90          | 68.90          | 44.96          | 74.00          | 29.04       | Pass   | H        | PK     |
| 3     | 21260.45    | 38.54           | 0.00                  | -63.24          | 68.48          | 43.78          | 74.00          | 30.22       | Pass   | H        | PK     |
| 4     | 22488.29    | 38.57           | 0.00                  | -62.95          | 69.97          | 45.59          | 74.00          | 28.41       | Pass   | H        | PK     |
| 5     | 23763.19    | 39.86           | 0.00                  | -60.97          | 66.34          | 45.23          | 74.00          | 28.77       | Pass   | H        | PK     |
| 6     | 24589.50    | 40.49           | 0.00                  | -60.34          | 64.77          | 44.92          | 74.00          | 29.08       | Pass   | H        | PK     |
| 7     | 18627.50    | 38.30           | 0.00                  | -63.83          | 70.14          | 44.61          | 74.00          | 29.39       | Pass   | V        | PK     |
| 8     | 19902.67    | 38.97           | 0.00                  | -62.30          | 68.42          | 45.09          | 74.00          | 28.91       | Pass   | V        | PK     |
| 9     | 20995.83    | 38.62           | 0.00                  | -63.39          | 68.94          | 44.17          | 74.00          | 29.83       | Pass   | V        | PK     |
| 10    | 22174.68    | 38.40           | 0.00                  | -63.15          | 69.18          | 44.43          | 74.00          | 29.57       | Pass   | V        | PK     |
| 11    | 23595.18    | 39.63           | 0.00                  | -61.51          | 66.97          | 45.09          | 74.00          | 28.91       | Pass   | V        | PK     |
| 12    | 24817.15    | 40.61           | 0.00                  | -60.41          | 65.21          | 45.41          | 74.00          | 28.59       | Pass   | V        | PK     |

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.