



RF REPORT

Report Reference No..... : **TRE1707019801** R/C.....:91635

FCC ID..... : 2ADYL-JPD200S

IC : 23061-JPD200S

Applicant's name : Shenzhen Jumper Medical Equipment Co., Ltd.

Address..... : D Building, No. 71, Xintian Road, Fuyong Street, Baoan, Shenzhen, Guangdong, P.R.China.

Manufacturer..... : Shenzhen Jumper Medical Equipment Co., Ltd.

Address..... : D Building, No. 71, Xintian Road, Fuyong Street, Baoan, Shenzhen, Guangdong, P.R.China.

Test item description..... : Fetal Doppler

Trade Mark : Jumper

Model/Type reference : JPD-200S

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247

RSS-247: Issue 2, February 2017 / RSS-GEN: Issue 4, November 2014

Date of receipt of test sample..... : Nov. 11, 2016

Date of testing..... : Jun. 21, 2017 - Jul. 05, 2017

Date of issue..... : Jul. 06, 2017

Result..... : **Pass**

Compiled by (position+printed name+signature) :	File administrators Shayne Zhu	
Supervised by (position+printed name+signature) :	Project Engineer Lion Cai	
Approved by (position+printed name+signature) :	Manager Hans Hu	
Testing Laboratory Name :	Shenzhen Huatongwei International Inspection Co., Ltd.	
Address..... :	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1. EUT Description	3
1.2. Test Standards and Results.....	4
1.3. Description of test environment test modes	5
1.4. Facilities and Accreditations	7
2. 47 CFR PART 15C REQUIREMENTS.....	8
2.1. Antenna requirement.....	8
2.2. Peak Output Power.....	9
2.3. 6dB& 99% Bandwidth	10
2.4. Conducted Band Edges and Spurious Emissions.....	12
2.5. Power spectral density (PSD)	14
2.6. Conducted Emission	16
2.7. Radiated Band Edge and Spurious Emission.....	20
3. LIST OF MEASURING EQUIPMENT	29

APPENDIX A: TEST RESULT OF CONDUCTED TEST

Change History		
Issue	Date	Reason for change
1.0	2017.07.06	First edition



1. General Information

1.1. EUT Description

EUT Type	Fetal Doppler
Hardware Version	R3
Software Version	V1.0.3
EUT supports Radios application	Bluetooth V4.0 BLE
Frequency Range	2402MHz~2480MHz
Channel Number	40
Bit Rate of Transmitter	2Mbps
Modulation Type	GFSK
Antenna Type	Internal Antenna
Antenna Gain	-2dBi
Battery	9V DC,

Note 1: The EUT is a Fetal Doppler, it contain Bluetooth 4.0 BLE chipset operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 BLE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19(2440MHz) and 39 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: The EUT was programmed to be in continuously transmitting mode via software (provide by manufacturer) and the transmit duty cycle is not less than 98%.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC / IC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2017	Radio Frequency Devices
2	ANSI C63.10 2013	American National Standard for Testing Unlicensed Wireless Devices
3	RSS-GEN: Issue 4, November 2014	General Requirements and Information for the Certification of Radio Apparatus
4	RSS-247: Issue 2, February 2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Standard(s) Section		Description	Result
	FCC	IC		
1	15.203	8.3	Antenna Requirement	PASS
2	15.247(b)(3)	RSS-247 Issue2 - 5.4(4)	Peak Output Power	PASS
3	15.247(a)(2)	RSS-247 Issue2 - 5.2(1)	Bandwidth– 6dB bandwidth	PASS
4	/	RSS Gen clause - 4.6.1	99% Occupied Bandwidth	PASS
5	15.247(d)	RSS-247 Issue2 - 5.5	Conducted Spurious Emission	PASS
6	15.247(e)	RSS-247 Issue2 - 5.2(2)	Power spectral density (PSD)	PASS
7	15.205 15.247(d)	RSS-247 Issue2 - 5.5 RSS - Gen	Band Edge	PASS
8	15.209(a)	RSS-GEN	Spurious emissions radiated below 30MHz	PASS
9	15.247(d) 15.109	RSS-247 Issue2 - 5.5 RSS-Gen	Spurious emissions radiated 30 MHz to 1GHz and above 1GHz	PASS
10	15.207(a), 15.20(c)	RSS-GEN	Conducted Emission	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 V04.

The device use a 9V battery, there is no USB/DC port, cannot charging. So no Part 15.207 conduct emission was required.



1.3. Description of test environment test modes

40 channels are provided for Bluetooth LE 4.0

Channel	Frequency(MHz)	Channel	Frequency(MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of this EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX CH 0
Mode 2	TX CH 19
Mode 3	TX CH 39
Mode 4	Normal operating mode

For Conducted Emission	
Final Test Mode	Description
Mode 4	Normal operating mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX CH 0
Mode 2	TX CH 19
Mode 3	TX CH 39

Note1: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

Note2: Fully-charged battery was used during test.



1.4. Facilities and Accreditations

1.4.1. Facilities

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories

(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 12, 2017.

IC-Registration No.: 5377B

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

1.4.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: Internal antenna, can't be removed.

Antenna General Information:

No.	EUT	Ant. Type	Gain(dBi)
1	Fetal Doppler	Internal	-2

2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup



2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB 558074D01 v04.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The pathloss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

2.2.5. Test Result

Channel	Frequency (MHz)	RF Power(dBm)	Limit (dBm)	Verdict
		GFSK/1Mbps		
0	2402	-0.51	30	PASS
19	2440	-1.24		PASS
39	2480	-2.29		PASS

2.3. 6dB & 99% Bandwidth


2.3.1. Limit of 6dB & 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

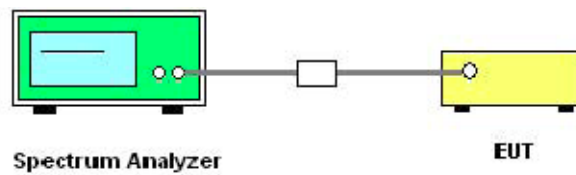

2.3.4. Test Procedures

1. The testing follows FCC KDB 558074D01 v04.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.

Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.

5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30 kHz and set the Video bandwidth (VBW) = 100 kHz.

6. Measure and record the results in the test report.

2.3.5. Test Results of 6dB and 99% Bandwidth

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limits (MHz)	Result
0	2402	0.647	1.063	≥ 0.5	PASS
19	2440	0.657	1.369	≥ 0.5	PASS
39	2480	0.664	1.604	≥ 0.5	PASS



2.3.6. Test plots of 6dB and 99% Bandwidth

Please refer to Appendix A for detail

2.4. Conducted Band Edges and Spurious Emissions


2.4.1. Limit of Conducted Band Edges and Spurious Emissions

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

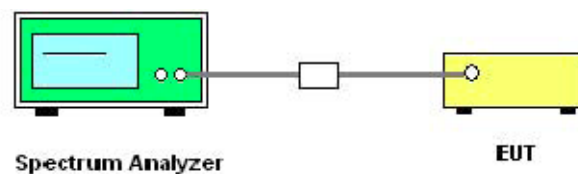

2.4.4. Test Procedure

1. The testing follows FCC KDB 558074D01 v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



2.4.5. Test Results of Conducted Band Edges and Spurious Emissions

Please refer to Appendix A for detail

2.5. Power spectral density (PSD)


2.5.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

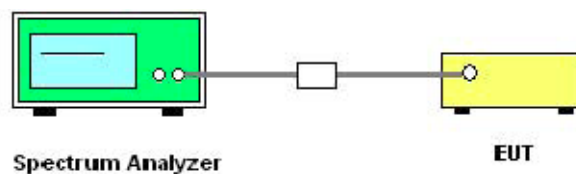

2.5.4. Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB 558074D01 v04.

2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

3. Set to the maximum power setting and enable the EUT transmit continuously.

4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz.

Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5times DTS Channel Bandwidth. (6dB BW)

5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.

6. Measure and record the results in the test report.

7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.



2.5.5. Test Results of Power spectral density

Spectral power density (dBm)				
Channel	Frequency (MHz)	PSD/3kHz (dBm)	Limit (dBm/3kHz)	Verdict
0	2402	-12.890	8	PASS
19	2440	-15.840	8	PASS
39	2480	-17.190	8	PASS
Measurement uncertainty: ± 1.3 dB				

Note:

1. Measured power density (dBm) has offset with cable loss.

2.5.6. Test plots of Power spectral density

Please refer to Appendix A for detail

2.6. Conducted Emission

2.6.1. Limit of Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

2.6.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup

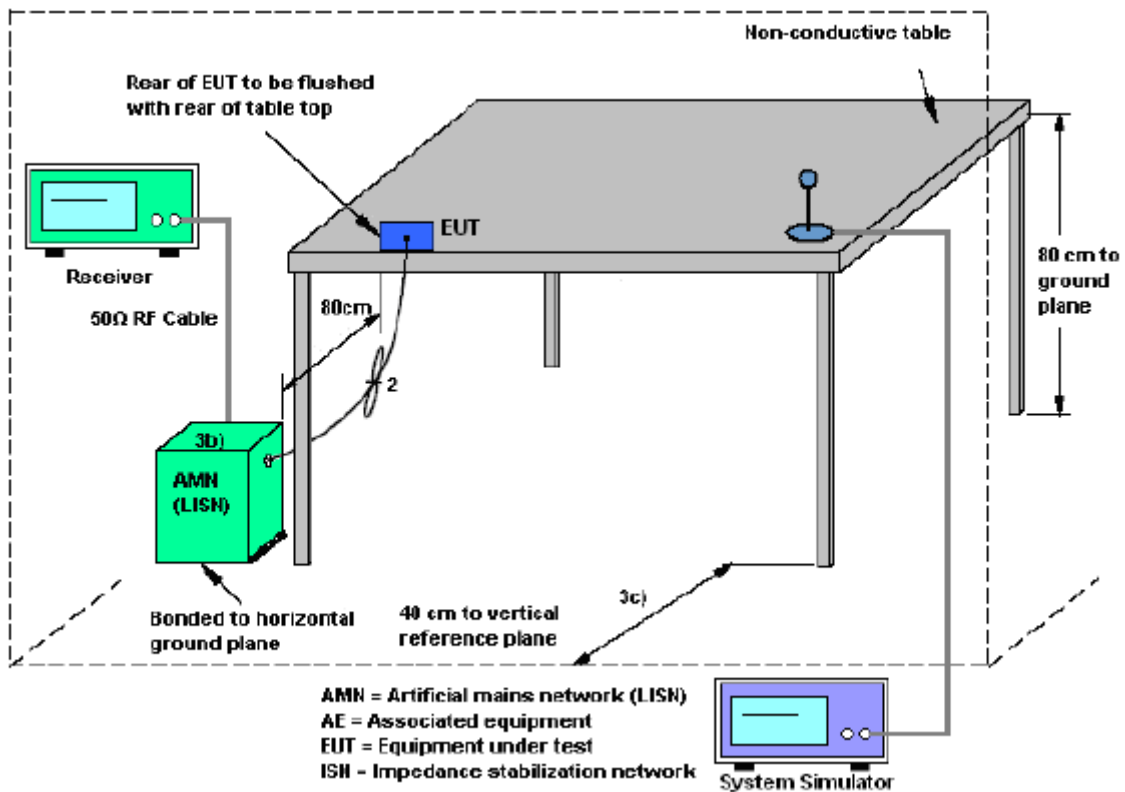




2.6.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.6.5. Test Results of Conducted Emission


The EUT configuration of the emission tests is Bluetooth Link + Cell phone + Adapter.

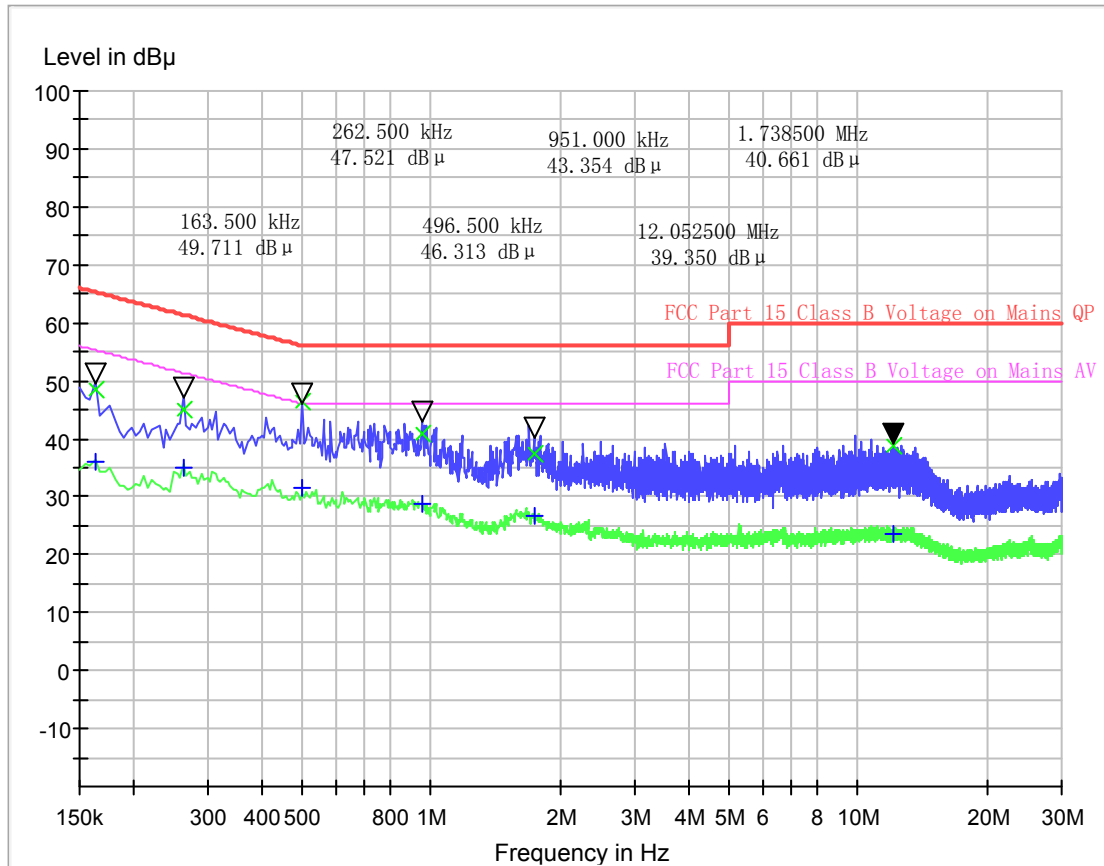

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals					
L Test Data					
QP			AV		
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)
0.163500	65.3	48.30	0.163500	55.3	35.93
0.262500	61.4	45.10	0.262500	51.4	35.12
0.496500	56.1	46.29	0.496500	46.1	31.57
0.951000	56.0	40.70	0.951000	46.0	28.68
1.738500	56.0	37.50	1.738500	46.0	26.72
12.052500	60.0	38.95	12.052500	50.0	23.44

L Test Curve

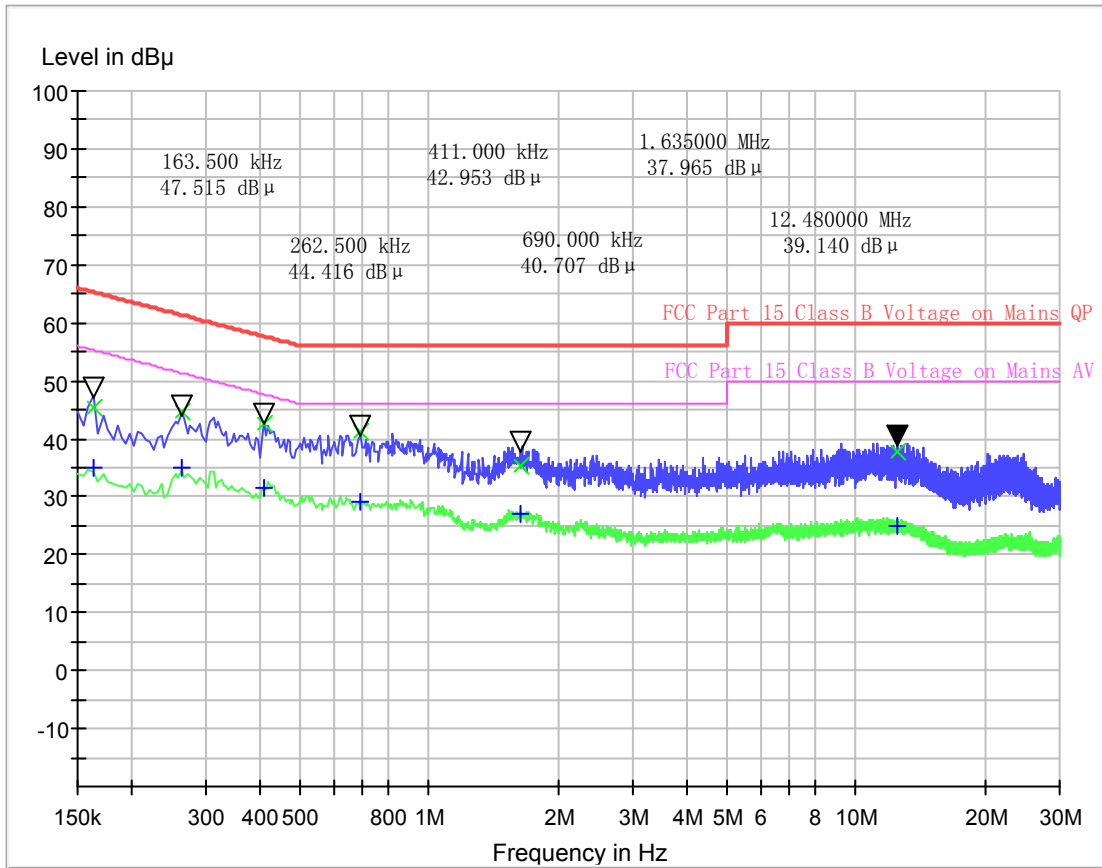

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals					
N Test Data					
QP			AV		
Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)	Frequency (MHz)	Limits (dBµV)	Measurement Value (dBµV)
0.163500	65.3	45.50	0.163500	55.3	34.96
0.262500	61.4	44.84	0.262500	51.4	35.15
0.411000	57.6	42.67	0.411000	47.6	31.54
0.690000	56.0	41.13	0.690000	46.0	29.16
1.635000	56.0	35.43	1.635000	46.0	27.09
12.480000	60.0	37.76	12.480000	50.0	24.92

N Test Curve

Test Result: PASS

2.7. Radiated Band Edge and Spurious Emission

2.7.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Note: Wireless charger configuration was evaluated.


Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

2.7.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup


For radiated emissions from 9kHz to 30MHz

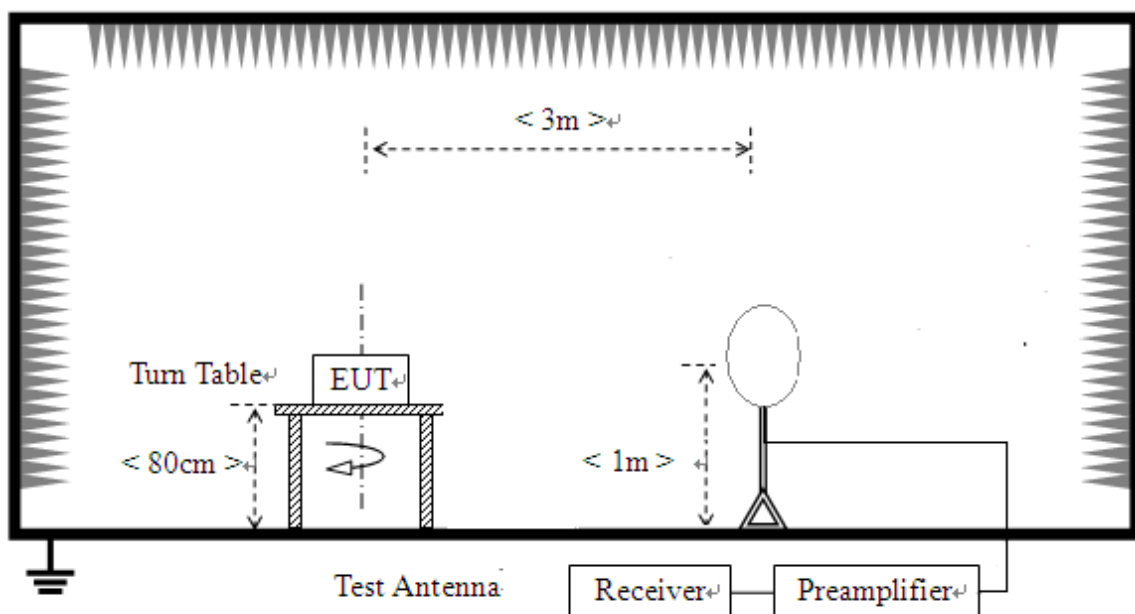

For radiated emissions from 30MHz to 1GHz

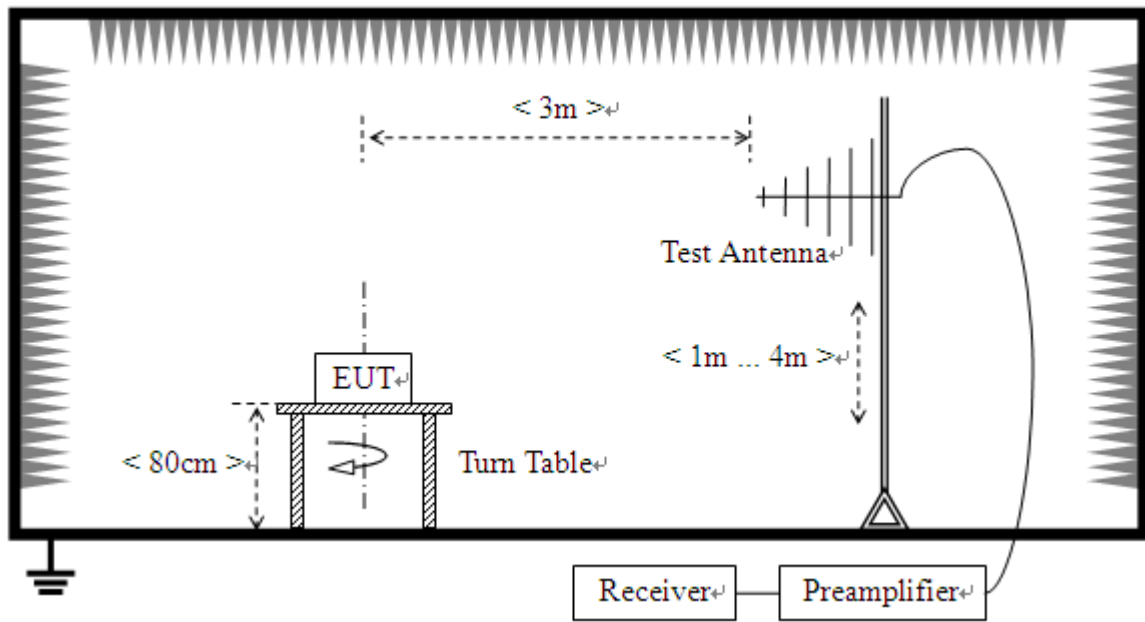

For radiated emissions above 1GHz

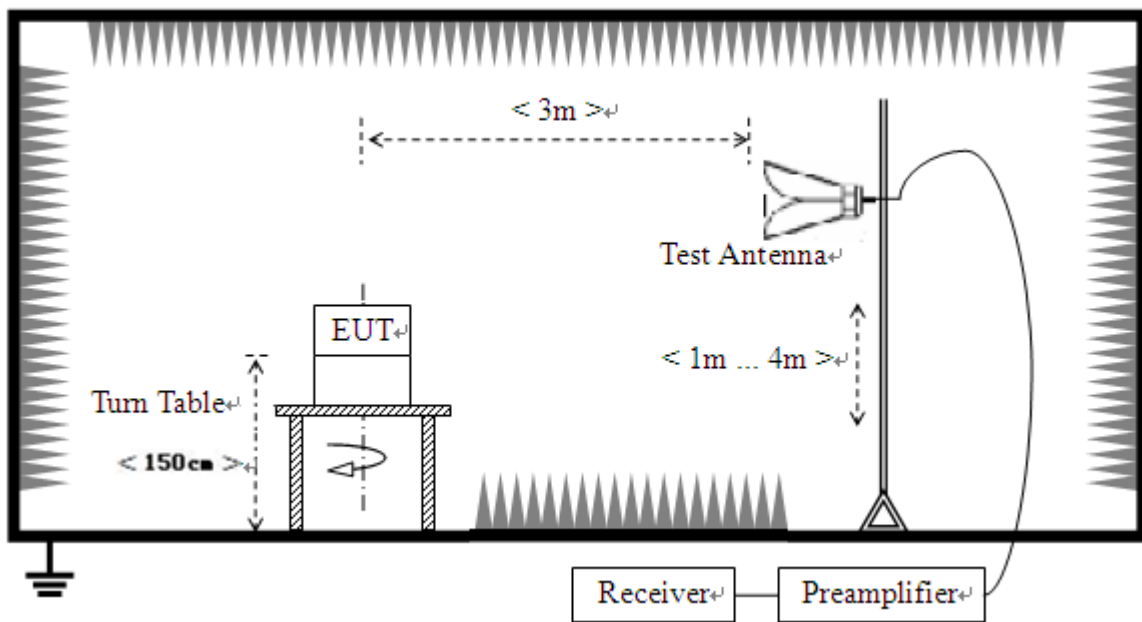



2.7.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported.

Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.



NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.




2.7.5. Test Results of Radiated Band Edge and Spurious Emission

For 9KHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

For 30MHz to 1000 MHz

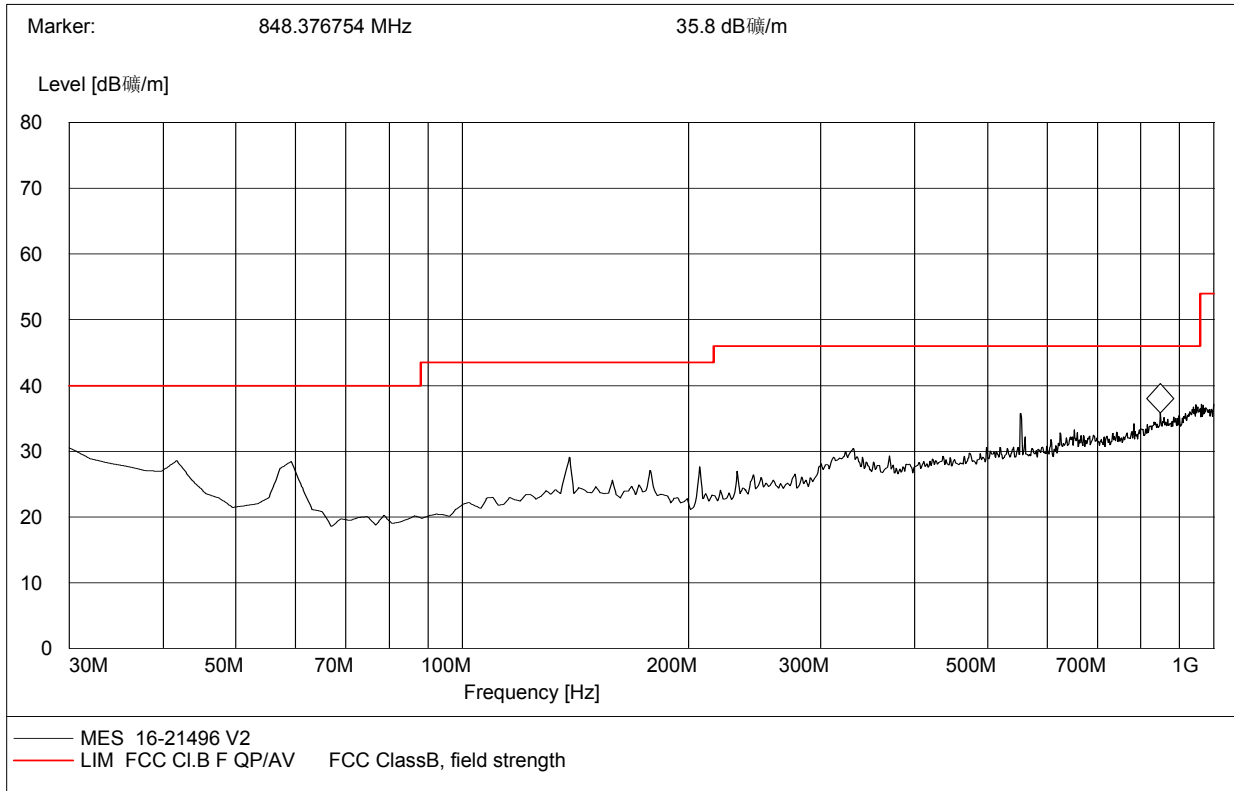

Plot A: 30MHz to 1GHz, Antenna Vertical

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
30.25	28.15	120.000	100.0	40.0	Vertical	Pass
60.16	26.33	120.000	100.0	40.0	Vertical	Pass
139.10	27.08	120.000	100.0	43.5	Vertical	Pass
207.43	25.46	120.000	100.0	43.5	Vertical	Pass
553.13	33.84	120.000	100.0	46.0	Vertical	Pass
848.64	33.69	120.000	100.0	46.0	Vertical	Pass

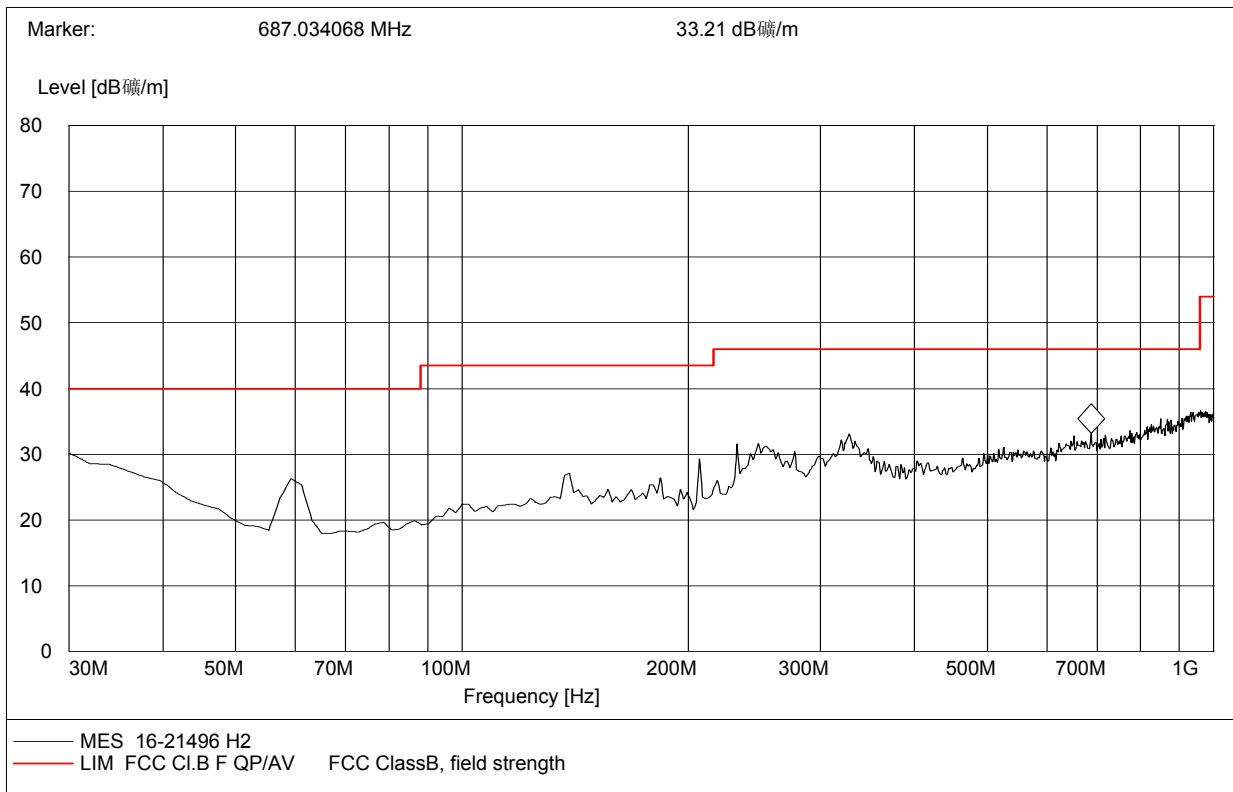

Plot B: 30MHz to 1GHz, Antenna Horizontal

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
30.160000	28.46	120.000	100.0	40.0	Horizontal	Pass
60.150000	23.89	120.000	100.0	40.0	Horizontal	Pass
207.480000	29.44	120.000	100.0	43.5	Horizontal	Pass
232.540000	29.66	120.000	100.0	46.0	Horizontal	Pass
327.770000	31.55	120.000	100.0	46.0	Horizontal	Pass
687.810000	31.54	120.000	100.0	46.0	Horizontal	Pass



For 1GHz to 25GHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (0CH_2402MHz)

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1001.94	44.86	PK	74.00	-29.14	1.35 H	36	45.66	1.5	29.6	31.9	-0.8
2	1001.94	34.14	AV	54.00	-19.86	1.41 H	36	34.94	1.5	29.6	31.9	-0.8
3	2390.18	48.21	PK	74.00	-25.79	1.52 H	52	46.91	5.2	28.6	32.5	1.3
4	2390.18	36.56	AV	54.00	-17.44	1.49 H	52	35.26	5.2	28.6	32.5	1.3
5	4804.0	47.75	PK	74.00	-26.25	1.44 H	60	41.35	7.4	30.4	31.4	6.4
6	4804.0	36.35	AV	54.00	-17.65	1.62 H	60	29.95	7.4	30.4	31.4	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (0CH_2402MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1001.94	45.12	PK	74.00	-28.88	1.36 V	45	45.92	1.5	29.6	31.9	-0.8
2	1001.94	34.37	AV	54.00	-19.63	1.45 V	45	35.17	1.5	29.6	31.9	-0.8
3	2390.18	48.85	PK	74.00	-25.15	1.56 V	33	47.55	5.2	28.6	32.5	1.3
4	2390.18	38.56	AV	54.00	-15.44	1.52 V	33	37.26	5.2	28.6	32.5	1.3
5	4804.0	48.29	PK	74.00	-25.71	1.48 V	50	41.89	7.4	30.4	31.4	6.4
6	4804.0	36.35	AV	54.00	-17.65	1.55 V	50	29.95	7.4	30.4	31.4	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (19CH_2440MHz)

No.	Fre. (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1197.45	45.18	PK	74.00	-28.82	1.51 H	25	45.78	1.8	29.5	31.9	-0.6
2	1197.45	34.31	AV	54.00	-19.69	1.52 H	25	34.91	1.8	29.5	31.9	-0.6
3	2997.63	46.84	PK	74.00	-27.16	1.52 H	34	42.09	6.2	30.05	31.5	4.75
4	2997.63	35.72	AV	54.00	-18.28	1.48 H	34	30.97	6.2	30.05	31.5	4.75
5	4880.01	48.65	PK	74.00	-25.35	1.36 H	30	42.25	6.7	31.2	31.5	6.4
6	4880.01	36.61	AV	54.00	-17.39	1.45 H	30	30.21	6.7	31.2	31.5	6.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (19CH_2440MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	1197.45	45.31	PK	74.00	-28.69	1.50V	32	45.91	1.8	29.5	31.9	-0.6
2	1197.45	34.52	AV	54.00	-19.48	1.52V	32	35.12	1.8	29.5	31.9	-0.6
3	2997.63	47.03	PK	74.00	-26.97	1.51V	40	42.28	6.2	30.05	31.5	4.75
4	2997.63	35.96	AV	54.00	-18.04	1.50V	40	31.21	6.2	30.05	31.5	4.75
5	4880.01	48.85	PK	74.00	-25.15	1.36V	40	42.45	6.7	31.2	31.5	6.4
6	4880.01	37.01	AV	54.00	-16.99	1.48V	40	30.61	6.7	31.2	31.5	6.4



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (39CH_2480MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	50.46	PK	74.00	-23.54	1.42H	30	47.86	5.7	28.7	31.8	2.6
2	2483.37	37.87	AV	54.00	-16.13	1.44H	30	35.27	5.7	28.7	31.8	2.6
3	4960.1	47.60	PK	74.00	-26.40	1.50H	45	40.90	7	31.2	31.5	6.7
4	4960.1	37.06	AV	54.00	-16.94	1.51H	45	30.36	7	31.2	31.5	6.7
5	11152.50	53.16	PK	74.00	-20.84	1.50H	50	38.26	16	30.9	32	14.9
6	11152.50	41.27	AV	54.00	-12.73	1.53H	50	26.37	16	30.9	32	14.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (39CH_2480MHz)

No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Cab. Loss (dB)	Ant. Factor (dB)	Pre. Amp. (dB)	Cor. Factor (dB/m)
1	2483.37	48.81	PK	74.00	-25.19	1.35V	38	46.21	5.7	28.7	31.8	2.6
2	2483.37	37.39	AV	54.00	-16.61	1.39V	38	34.79	5.7	28.7	31.8	2.6
3	4960.1	49.11	PK	74.00	-24.89	1.52V	52	42.41	7	31.2	31.5	6.7
4	4960.1	37.07	AV	54.00	-16.93	1.51V	52	30.37	7	31.2	31.5	6.7
5	11152.50	53.84	PK	74.00	-20.16	1.52V	40	38.94	16	30.9	32	14.9
6	11152.50	41.06	AV	54.00	-12.94	1.45V	40	26.16	16	30.9	32	14.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level - Limit value



3. List of measuring equipment

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	11/13/2016
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	11/13/2016
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	11/13/2016
8	Amplifer	Sonoma	310N	E009-13	11/13/2016
9	JS amplifer	Rohde&Schwarz	JS4-00101800-2 8-5A	F201504	11/13/2016
10	High pass filter	Compliance Direction systems	BSU-6	34202	11/13/2016
11	HORNANTENNA	ShwarzBeck	9120D	1012	11/13/2016
12	Amplifer	Compliance Direction systems	PAP1-4060	120	11/13/2016
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	11/13/2016
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	11/13/2016
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	11/13/2016

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSV-40	101008	05/04/2017
2	SwitchUnit withOSP-B157	Rohde&Schwarz	OSP120	101130	05/04/2017
2	Power Meter	Anritsu	ML2480B	100798	11/13/2016
3	Power Sensor	Anritsu	MA2411B	100258	11/13/2016

Conducted Emission


Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI TEST RECEIVER	Rohde& Schwarz	ESCI	100106	11/13/2016
2	ARTIFICIAL MAINS	Rohde& Schwarz	ESH2-Z5	100028	11/13/2016
3	PULSE LIMITER	Rohde& Schwarz	ESHSZ2	100044	11/13/2016
4	EMI TEST SOFTWARE	Rohde& Schwarz	ES-K1	N/A	N/A



Appendix A: Test result of Conducted test


6dB Bandwidth

Test Graphs

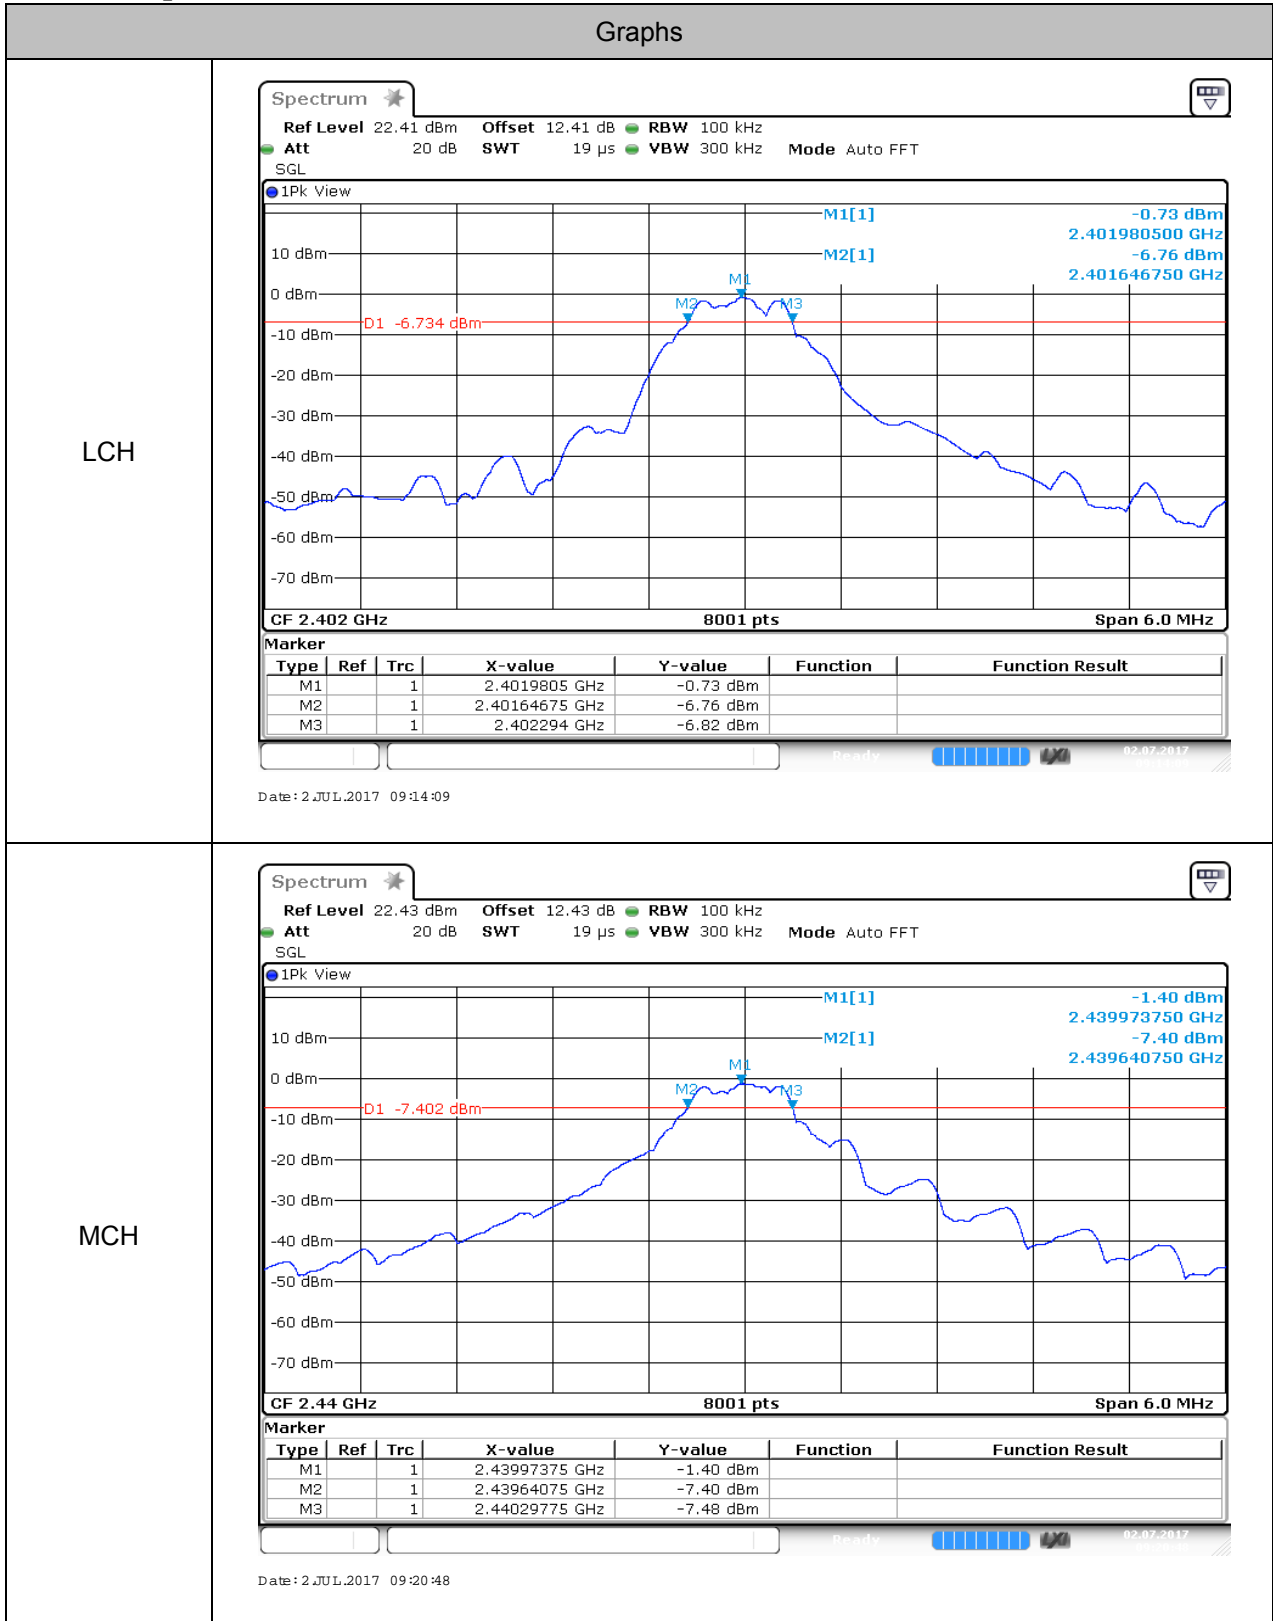



HCH

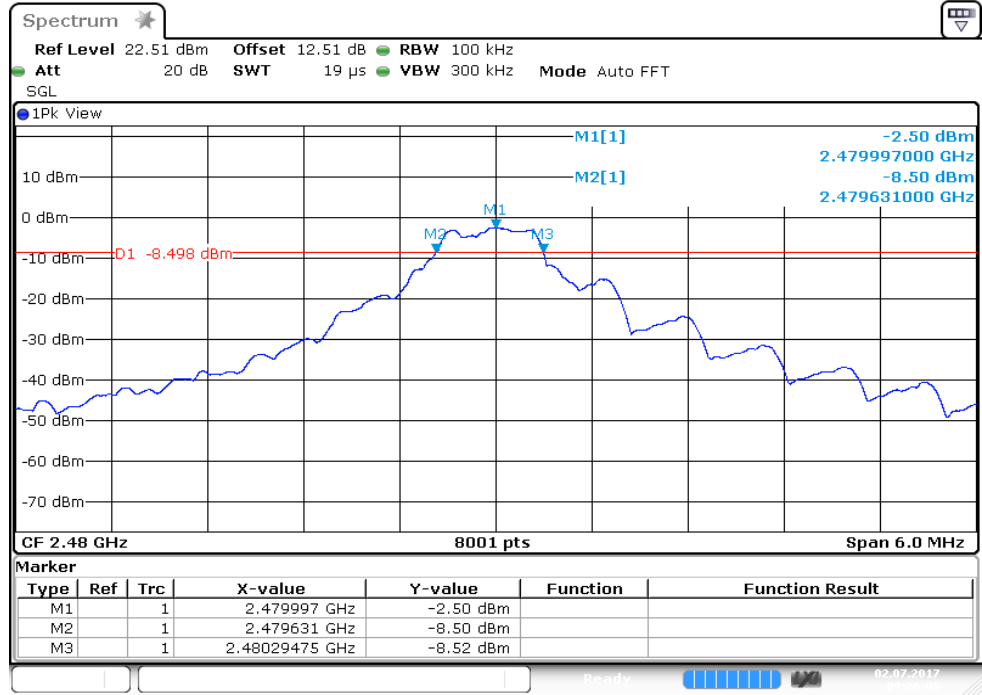


Date: 2 JUL 2017 09:26:05

99% Occupied Bandwidth

Test Graphs

Graphs


LCH

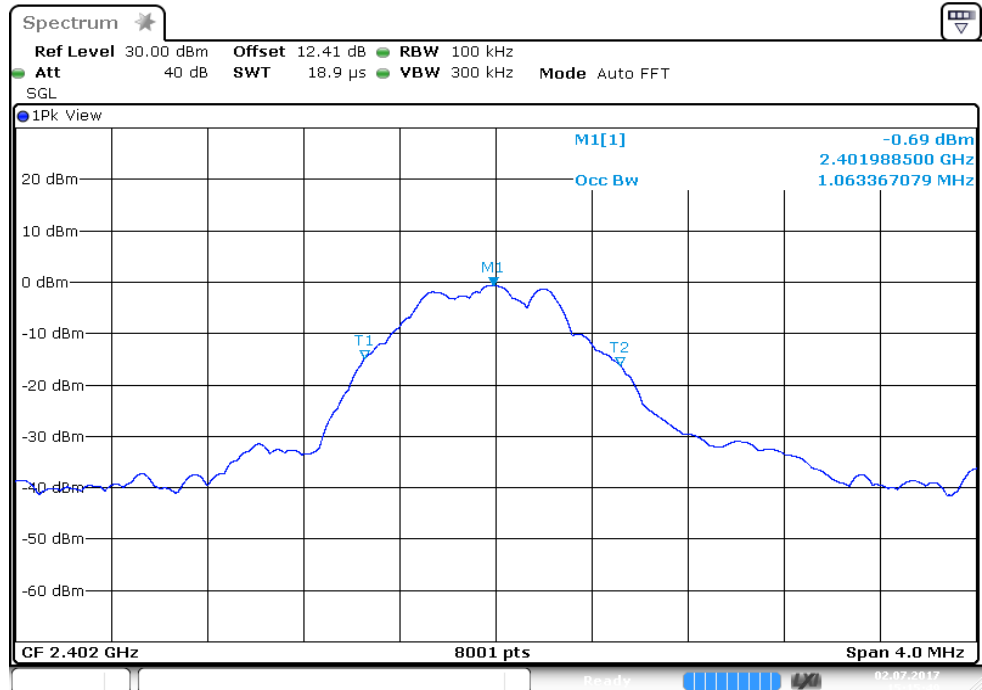

Date: 2 JUL 2017 15:15:49




MCH

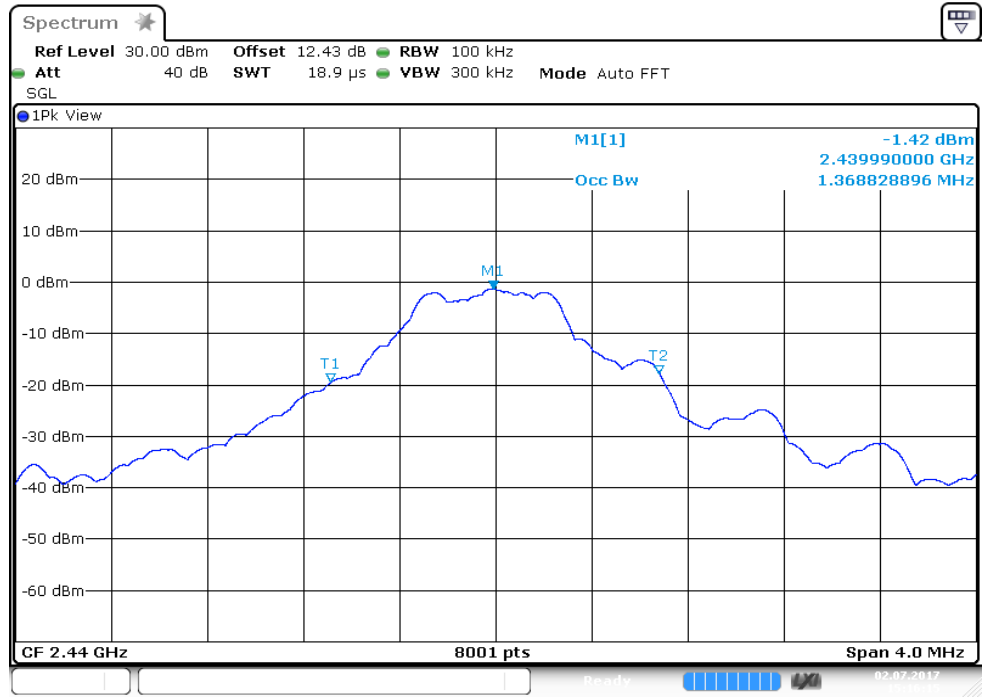

Date: 2 JUL 2017 15:16:15

HCH

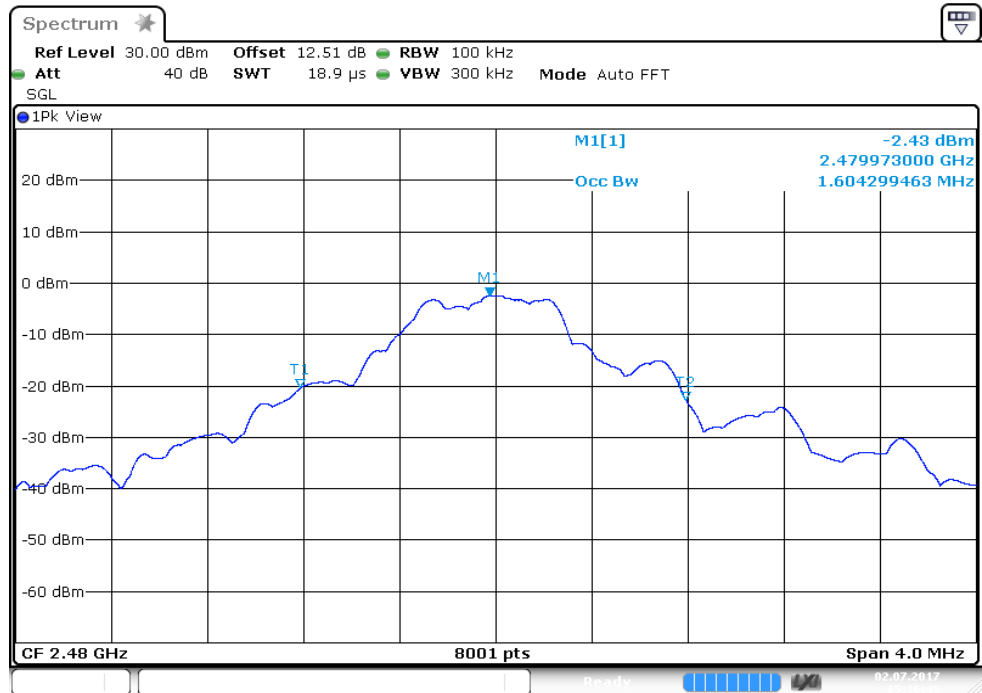


Date: 2 JUL 2017 15:16:45




Band-edge for RF Conducted Emissions

Test Graphs

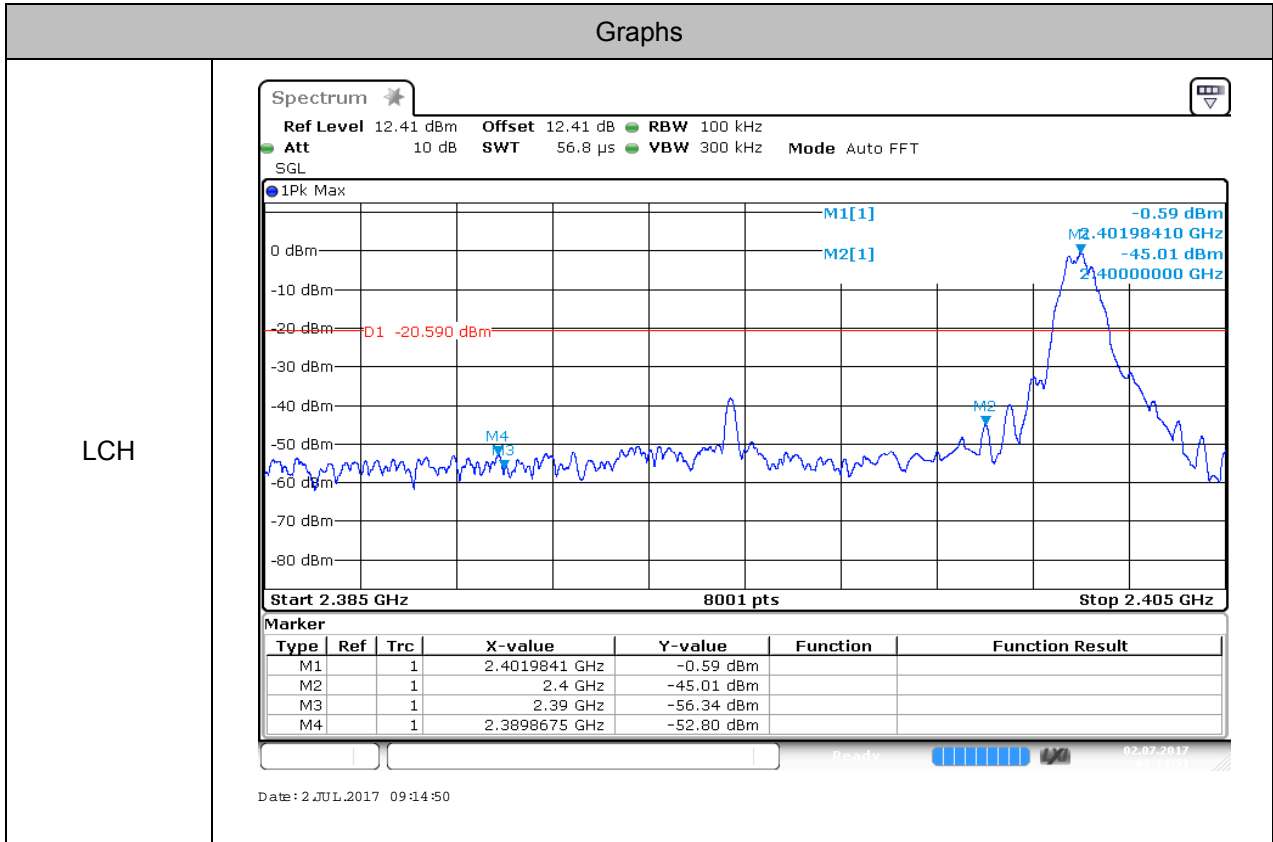

LCH


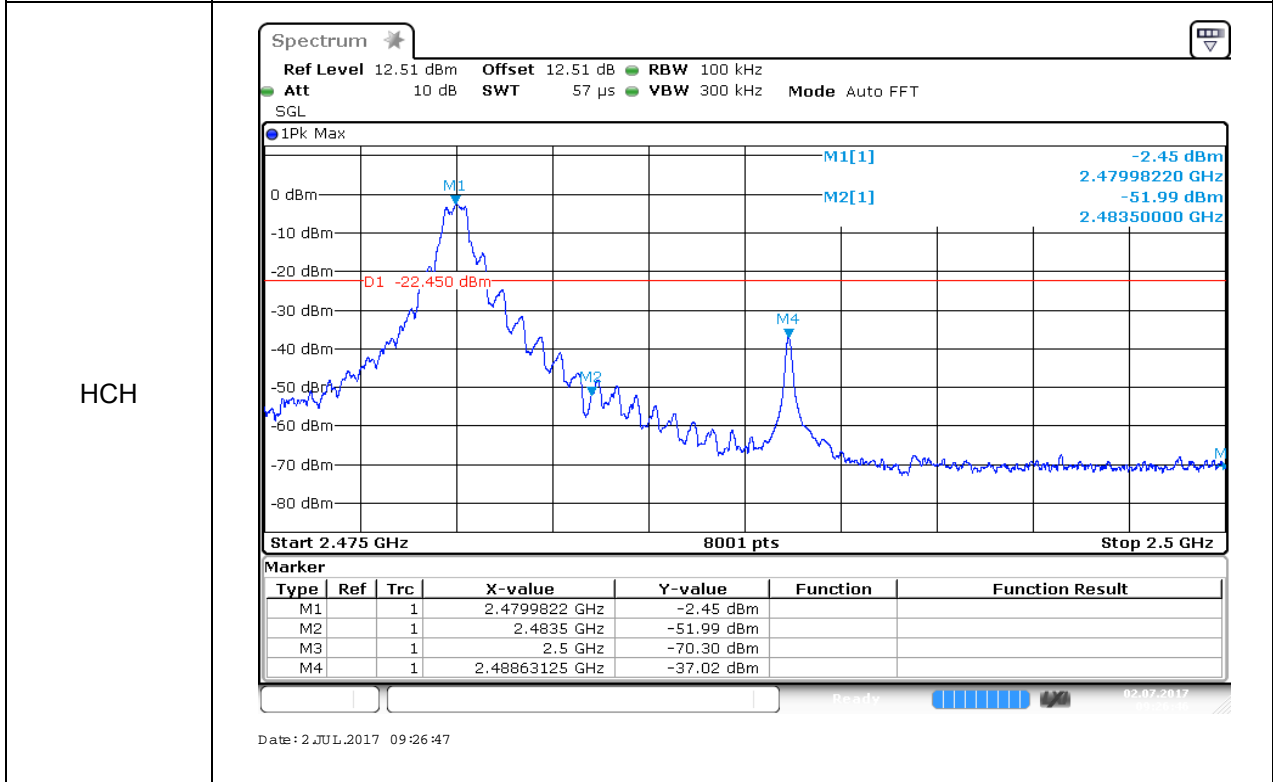



HCH



RF Conducted Spurious Emissions

Test Graphs Test Graphs

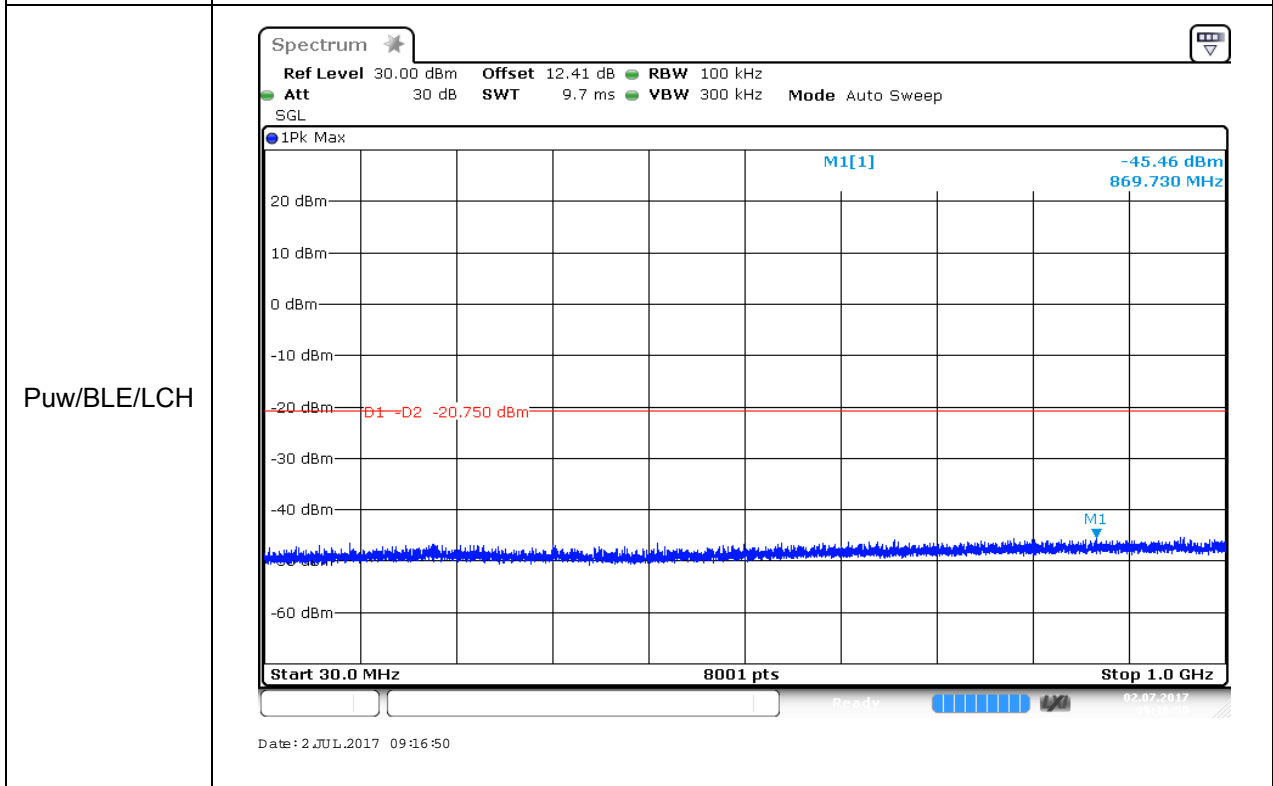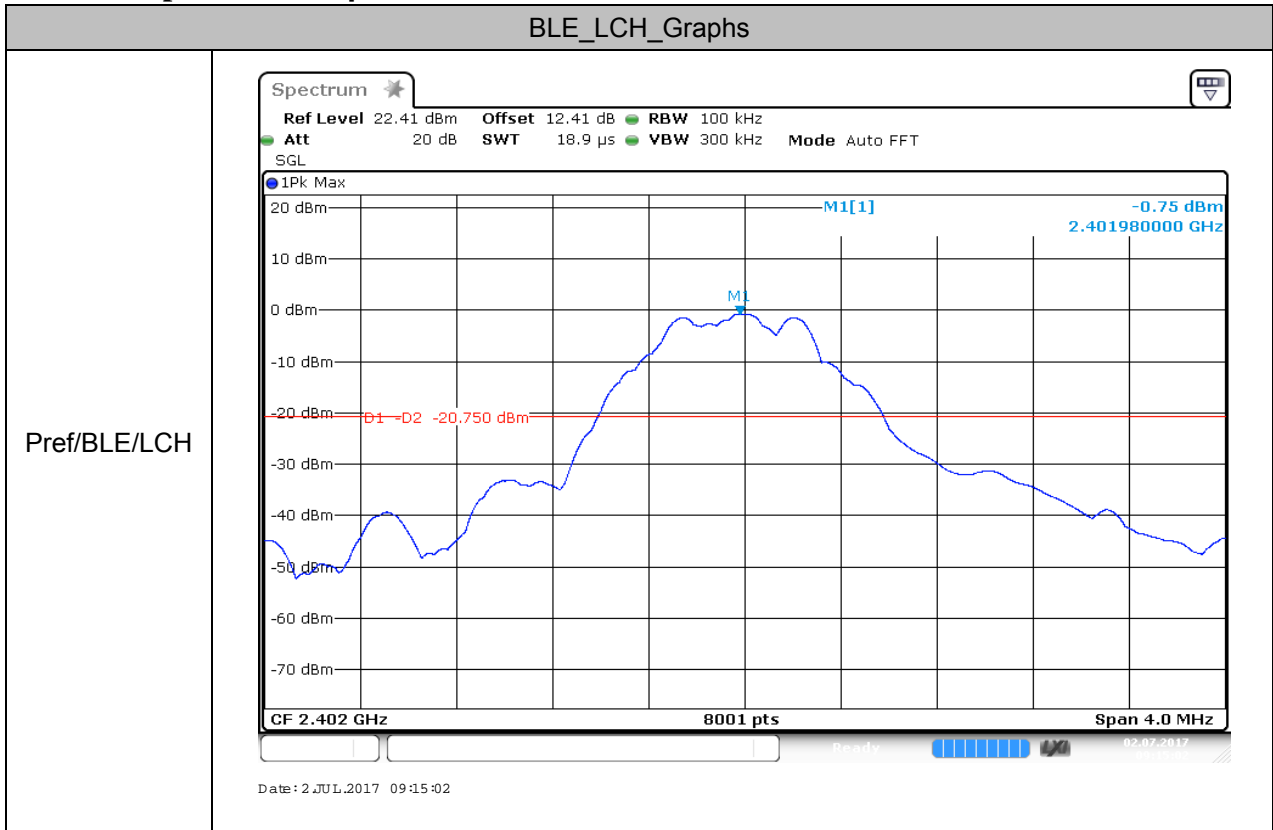


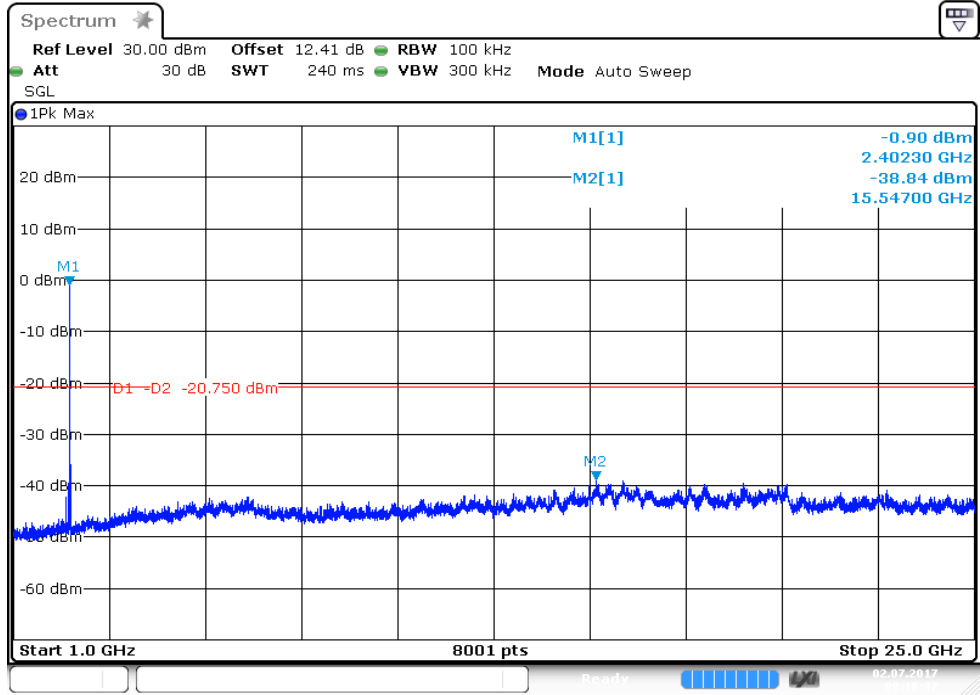

Date: 2 JUL 2017 09:18:37

BLE_MCH_Graphs


Pref/BLE/MCH

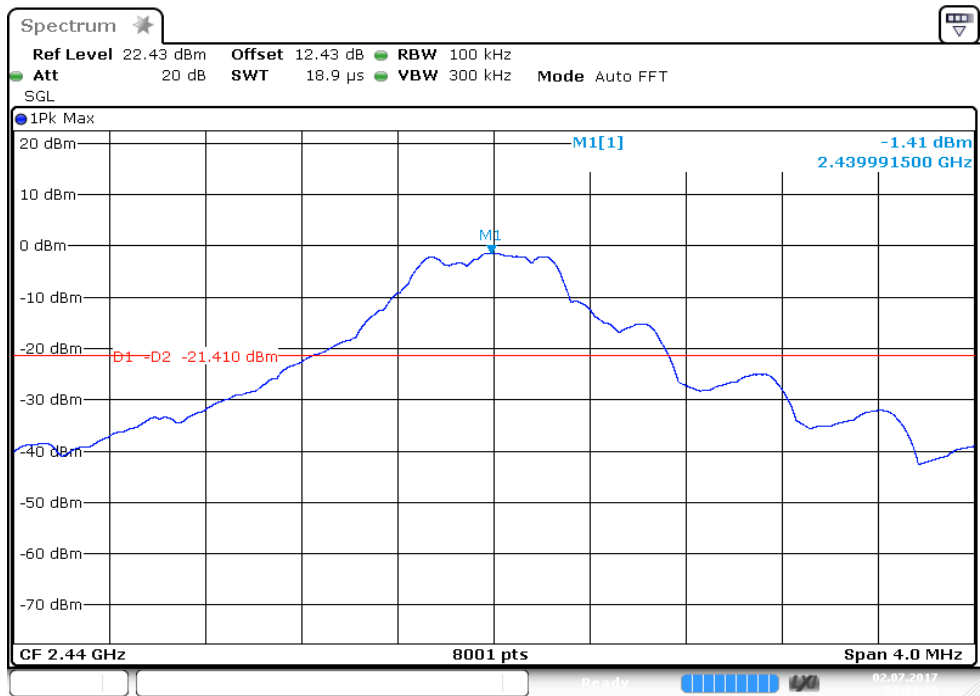


Date: 2 JUL 2017 09:21:30



Puw/BLE/MCH

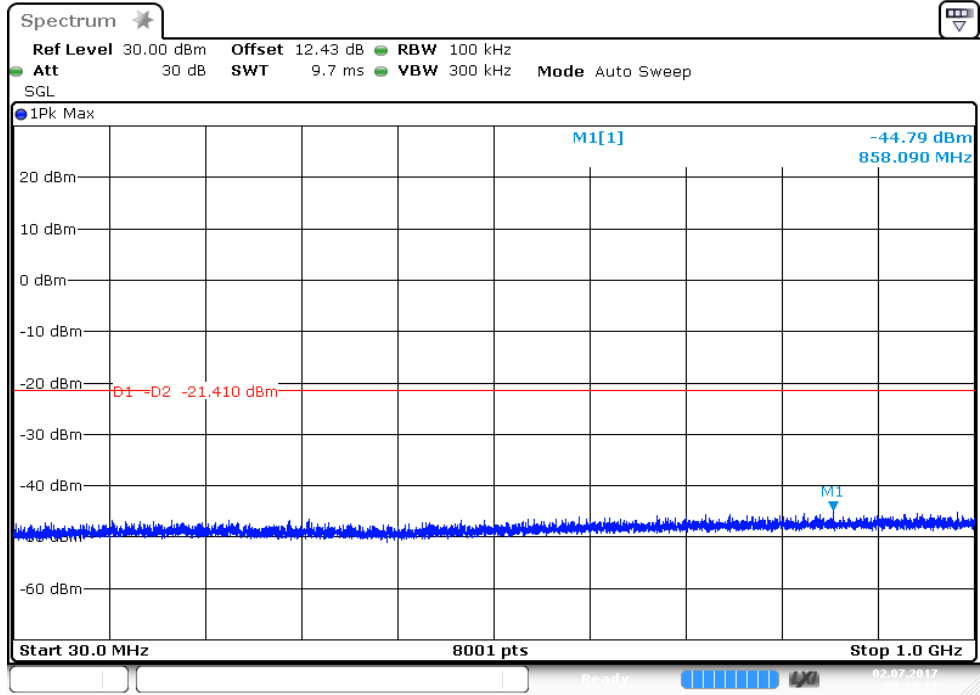

Date: 2 JUL.2017 09:23:18

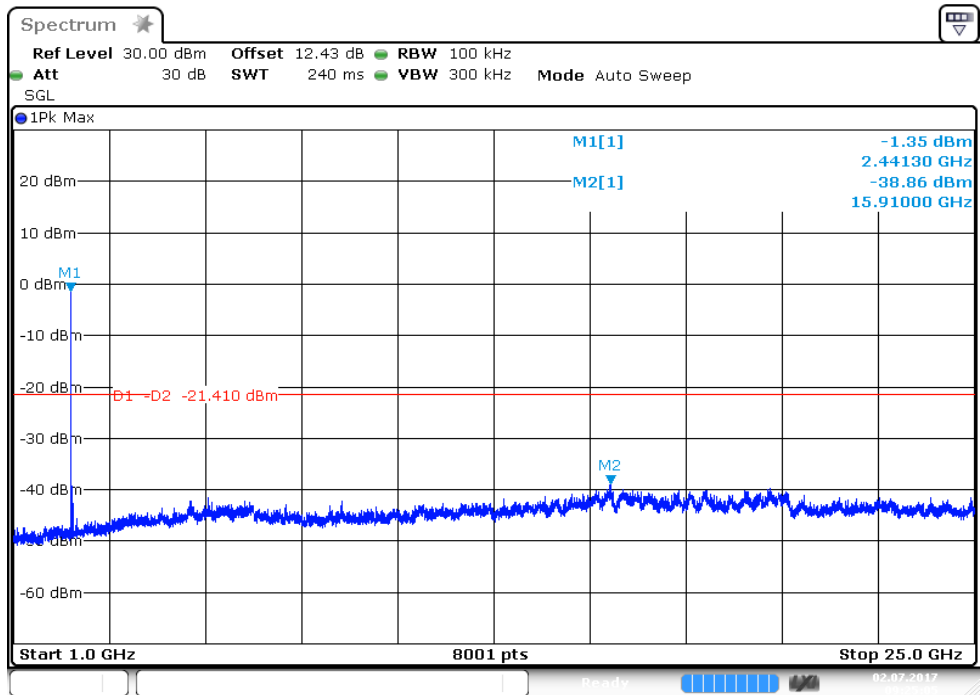


Date: 2 JUL.2017 09:25:05




BLE_HCH_Graphs

Pref/BLE/HCH

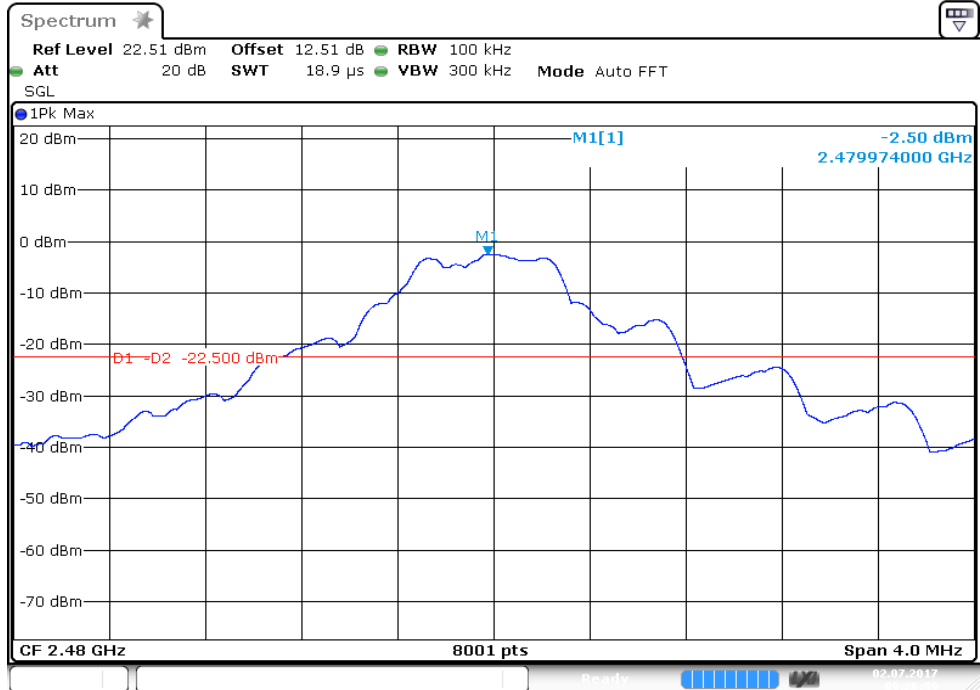


Date: 2 JUL 2017 09:26:59

Puw/BLE/HCH

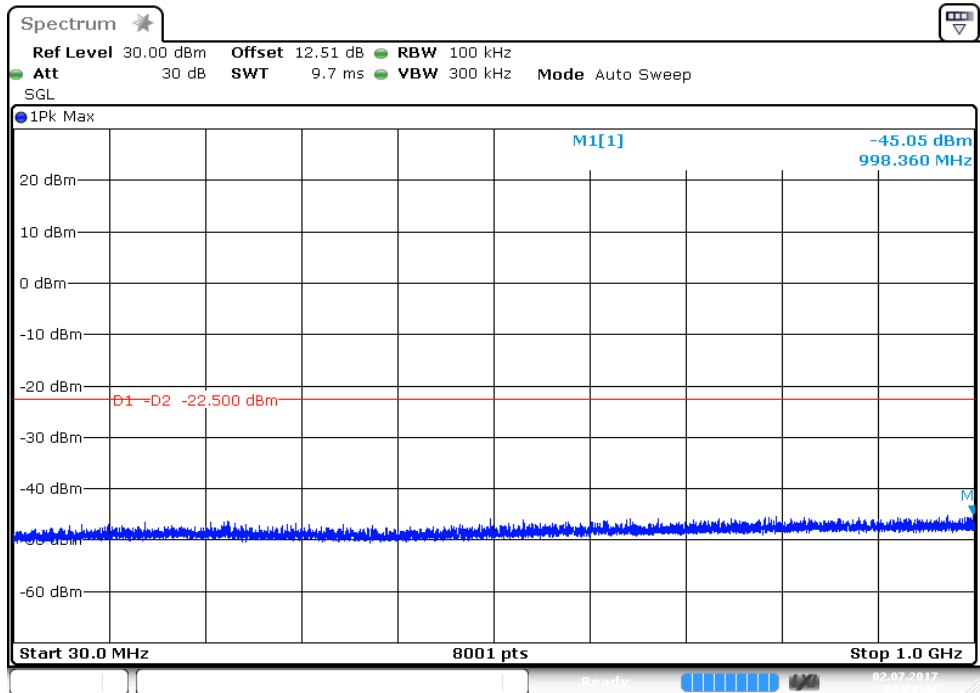

Date: 2 JUL 2017 09:28:47

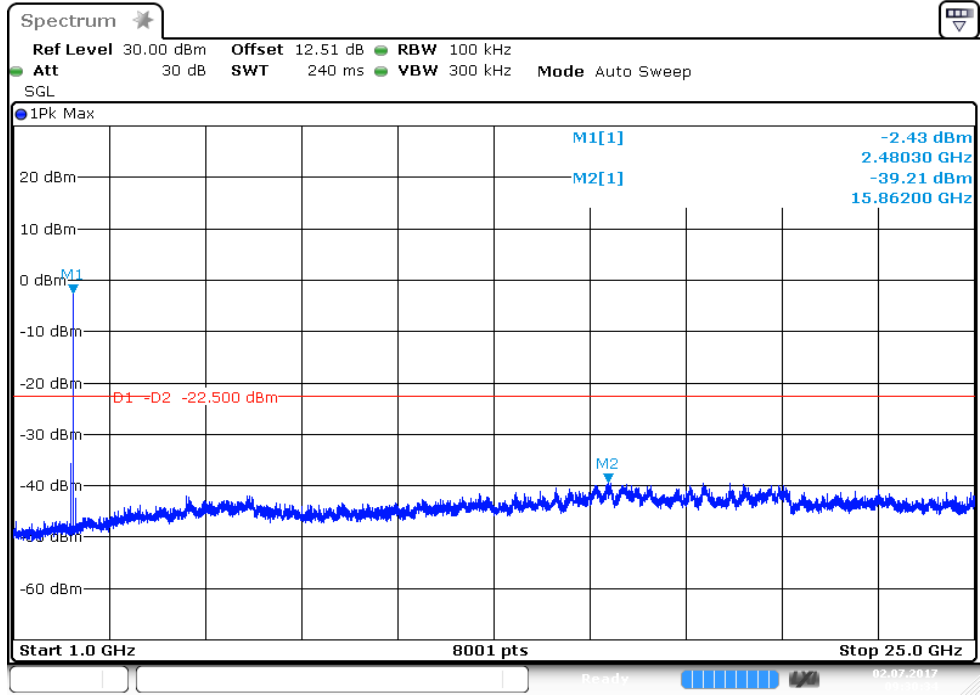

Date: 2 JUL 2017 09:30:34




Power Spectral Density

Test Graphs


Graphs

LCH

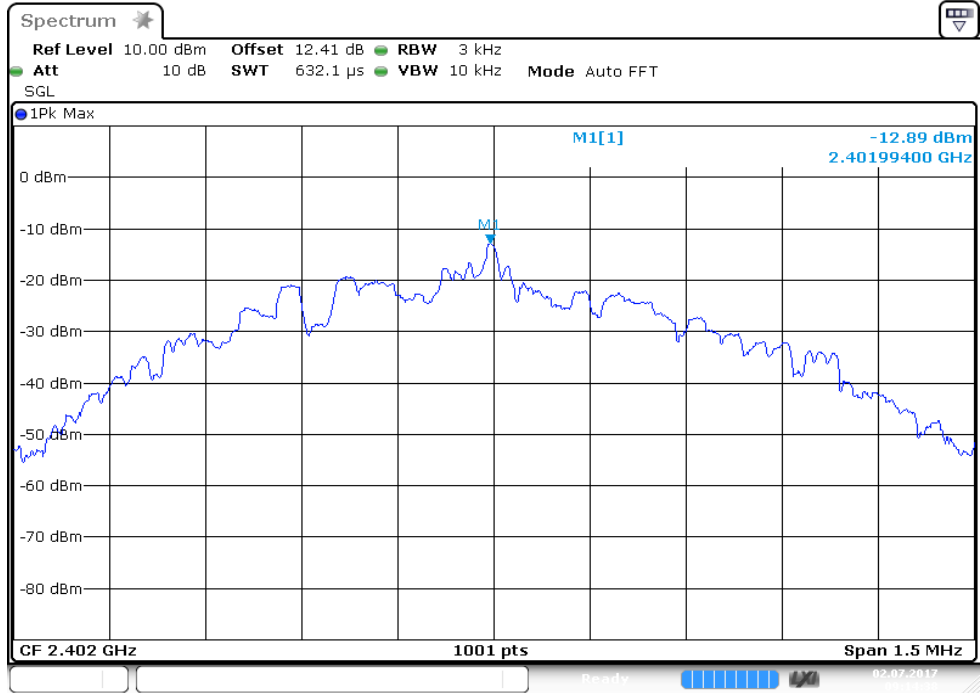

Date: 2 JUL 2017 09:14:39


MCH

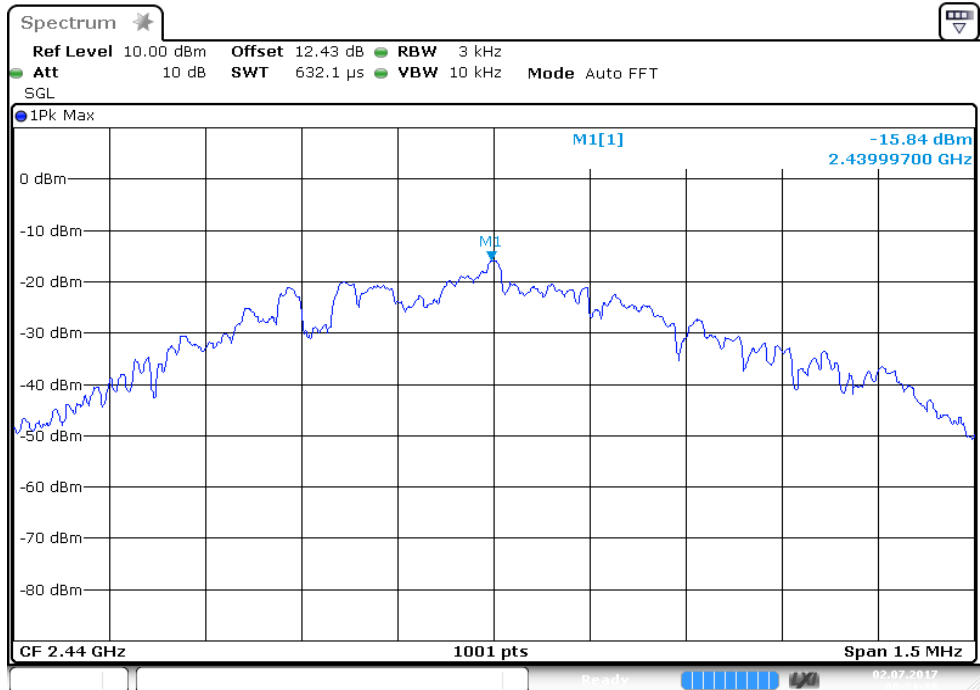

Date: 2 JUL 2017 09:21:18



HCH

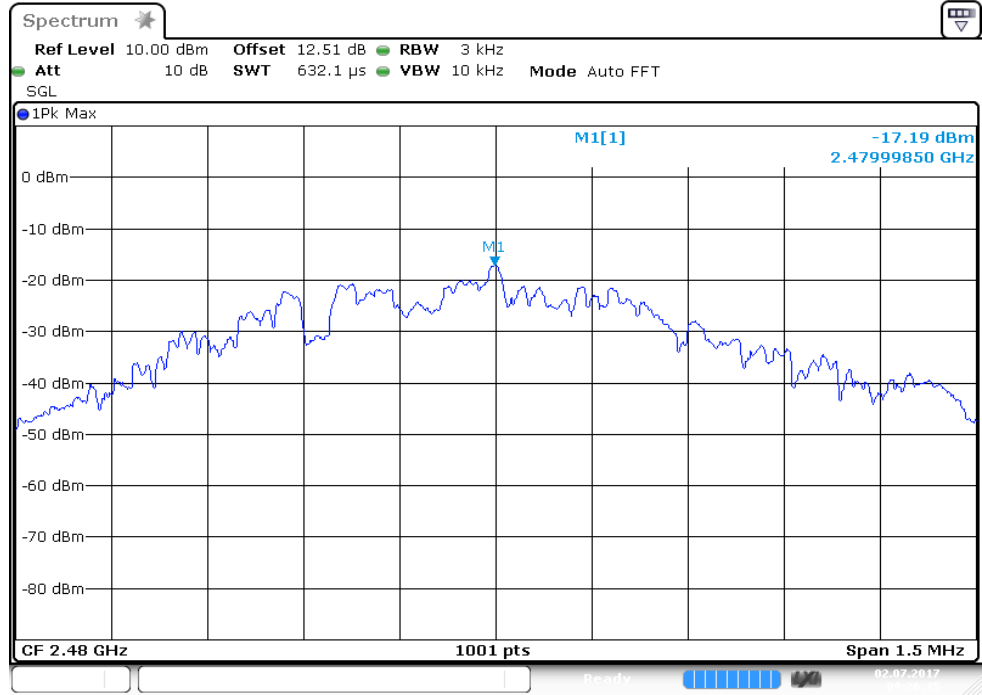

Date: 2 JUL 2017 09:26:35

** END OF REPORT **