

FCC SAR REPORT

Report No.: JYTSZ-R14-2400021

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE
19-25 SHAN MEI STREET FOTAN NT HONGKONG

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: AE11



Trade mark: TECNO

FCC ID: 2ADYY-AE11

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 30 Mar., 2024 ~ 24 May., 2024

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 1.159 Body: 1.189 Hotspot: 1.189

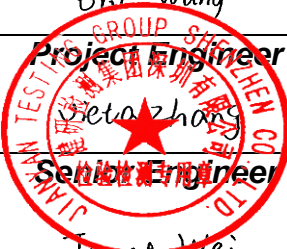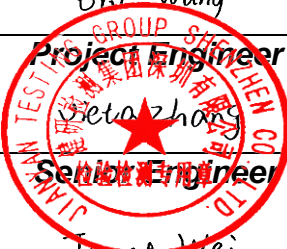Project by:	<u>Eric Wang</u> 	Date:	<u>30 May, 2024</u>
Reviewed by:	<u>Detazhang</u> 	Date:	<u>30 May, 2024</u>
Approved by:	<u>Janet Wei</u> Manager	Date:	<u>30 May, 2024</u>

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
<i>00</i>	<i>30 May, 2024</i>	<i>Original</i>

3 Contents

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY	5
5	GENERAL INFORMATION	8
5.1	CLIENT INFORMATION.....	8
5.2	GENERAL DESCRIPTION OF EUT	8
5.3	MAXIMUM RF OUTPUT POWER	11
5.4	ENVIRONMENT OF TEST SITE	14
5.5	TEST SAMPLE PLAN	14
5.6	LABORATORY FACILITY.....	14
5.7	TEST LOCATION	14
6	INTRODUCTION	15
6.1	INTRODUCTION	15
6.2	SAR DEFINITION.....	15
7	RF EXPOSURE LIMITS	16
7.1	UNCONTROLLED ENVIRONMENT.....	16
7.2	CONTROLLED ENVIRONMENT	16
7.3	RF EXPOSURE LIMITS	16
8	SAR MEASUREMENT SYSTEM	17
8.1	E-FIELD PROBE.....	18
8.2	DATA ACQUISITION ELECTRONICS (DAE).....	18
8.3	ROBOT	19
8.4	MEASUREMENT SERVER	19
8.5	LIGHT BEAM UNIT.....	19
8.6	PHANTOM.....	20
8.7	DEVICE HOLDER.....	21
8.8	DATA STORAGE AND EVALUATION	22
8.9	TEST EQUIPMENT LIST	24
9	TISSUE SIMULATING LIQUIDS	26
10	SAR SYSTEM VERIFICATION	28
11	EUT TESTING POSITION	30
11.1	HANDSET REFERENCE POINTS	30
11.2	POSITIONING FOR CHEEK / TOUCH	31
11.3	POSITIONING FOR EAR / 150 TILT.....	31
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	32
11.5	BODY WORN ACCESSORY CONFIGURATIONS	32
11.6	WIRELESS ROUTER (HOTSPOT) CONFIGURATIONS	33
12	MEASUREMENT PROCEDURES	34
12.1	SPATIAL PEAK SAR EVALUATION	34
12.2	POWER REFERENCE MEASUREMENT.....	35
12.3	AREA & ZOOM SCAN PROCEDURES.....	35
12.4	VOLUME SCAN PROCEDURES	36
12.5	SAR AVERAGED METHODS	36
12.6	POWER DRIFT MONITORING	36
13	CONDUCTED RF OUTPUT POWER	37
13.1	GSM 850 CONDUCTED POWER	37
13.2	GSM 1900 CONDUCTED POWER.....	37
13.3	WCDMA CONDUCTED POWER	38
13.4	LTE CONDUCTED POWER	41
13.5	NR CONDUCTED POWER.....	44
13.6	WLAN 2.4 GHz BAND CONDUCTED POWER	44
13.7	WLAN 5.2GHz BAND CONDUCTED POWER	44
13.8	WLAN 5.3GHz BAND CONDUCTED POWER	44
13.9	WLAN 5.6GHz BAND CONDUCTED POWER	45

13.10	WLAN 5.8GHZ BAND CONDUCTED POWER	45
13.11	BLUETOOTH CONDUCTED POWER	45
13.12	NFC CONDUCTED POWER	45
14	EXPOSURE POSITIONS CONSIDERATION	46
14.1	EUT ANTENNA LOCATIONS.....	46
14.2	TEST POSITIONS CONSIDERATION	48
15	SAR TEST RESULTS SUMMARY	49
15.1	STANDALONE HEAD SAR DATA.....	49
15.2	STANDALONE BODY SAR	57
15.3	BODY SAR IN HOTSPOT MODE	67
15.4	PRODUCT SPECIFIC 10G SAR	82
15.5	REPEATED SAR MEASUREMENT.....	83
15.6	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS.....	84
15.7	SAR SIMULTANEOUS TRANSMISSION ANALYSIS.....	86
15.8	MEASUREMENT UNCERTAINTY.....	91
15.9	MEASUREMENT CONCLUSION	92
16	REFERENCE.....	93
APPENDIX A: PLOTS OF SAR SYSTEM CHECK		94
APPENDIX B: PLOTS OF SAR TEST DATA		109

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as below:
 <Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.170	PCE	1.159
	PCS 1900	0.869		
	WCDMA Band II	0.710		
	WCDMA Band IV	0.723		
	WCDMA Band V	0.123		
	LTE Band 2	0.655		
	LTE Band 5	0.194		
	LTE Band 7	0.448		
	LTE Band 12 & Band17	0.163		
	LTE Band 13	0.175		
	LTE Band 41 & Band 38	0.485		
	LTE Band 42	0.818		
	LTE Band 66 & Band 4	0.850		
	NR n5	0.176		
	NR n7	1.159		
	NR n12	0.109		
	NR n41&n38	1.017		
	NR n66	0.568		
	NR n77 (3450MHz~3550MHz) &n78 (3450MHz~3550MHz)	0.319		
	NR n77 (3550MHz~3700MHz) &n78 (3550MHz~3700MHz)	0.320		
NRn77 (3700MHz~3980MHz) &n78 (3700MHz~3800MHz)	0.452			
WLAN 2.4 GHz	0.260	DTS		
Bluetooth	0.011	DSS		
WLAN 5.2 GHz	0.173	NII		
WLAN 5.3 GHz	0.086			
WLAN 5.6 GHz	0.119			
WLAN 5.8 GHz	0.212			
Body (10 mm Gap)	GSM 850	1.189	PCE	1.189
	PCS 1900	0.673		
	WCDMA Band II	0.163		
	WCDMA Band IV	0.159		
	WCDMA Band V	0.631		
	LTE Band 2	0.182		
	LTE Band 5	0.680		
	LTE Band 7	0.138		
	LTE Band 12 & Band17	0.535		
	LTE Band 13	0.511		
	LTE Band 41	0.173		

	& Band 38				
	LTE Band 42	0.329			
	LTE Band 66 & Band 4	0.216			
	NR n5	0.643			
	NR n7	0.340			
	NR n12	0.485			
	NR n41&n38	0.368			
	NR n66	0.193			
	NR n77 (3450MHz~3550MHz) &n78 (3450MHz~3550MHz)	0.110			
	NR n77 (3550MHz~3700MHz) &n78 (3550MHz~3700MHz)	0.081			
	NRn77 (3700MHz~3980MHz) &n78 (3700MHz~3800MHz)	0.099			
	WLAN 2.4GHz	0.329			DTS
	Bluetooth	0.007			DSS
	WLAN 5.2 GHz	0.036			NII
	WLAN 5.3 GHz	0.019			
WLAN 5.6 GHz	0.043				
WLAN 5.8 GHz	0.048				
Hotspot (10 mm Gap)	GSM 850	1.189	PCE	1.189	
	PCS 1900	0.933			
	WCDMA Band II	0.271			
	WCDMA Band IV	0.275			
	WCDMA Band V	0.631			
	LTE Band 2	0.524			
	LTE Band 5	0.680			
	LTE Band 7	0.689			
	LTE Band 12 & Band17	0.535			
	LTE Band 13	0.511			
	LTE Band 41 & Band 38	0.310			
	LTE Band 42	0.329			
	LTE Band 66 & Band 4	0.310			
	NR n5	0.643			
	NR n7	1.057			
	NR n12	0.485			
	NR n41&n38	1.097			
	NR n66	0.331			
	NR n77 (3450MHz~3550MHz) &n78 (3450MHz~3550MHz)	0.110			
	NR n77 (3550MHz~3700MHz) &n78 (3550MHz~3700MHz)	0.090			
NRn77	0.136				

	(3700MHz~3980MHz) &n78			
	(3700MHz~3800MHz)			
	WLAN 2.4 GHz	0.329	DTS	
	Bluetooth	0.010	DSS	
	WLAN 5.2 GHz	0.063	NII	
WLAN 5.8 GHz	0.124			

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Right Cheek	EN-DC7A_n41A	1.308	PCE	1.582
	2.4G MIMO	0.274	DTS	
	NFC	0.000	DXX	

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEC/IEEE 62209-1528:2020.
3. For DFS operation type is slaver device without radar detection function, 5.3GHz WLAN and 5.6GHz WLAN does not support hotspot mode.
4. For FDD-LTE Band 17 is full covered by FDD-LTE Band 12, so only FDD-LTE Band 12 was tested.
5. For FDD-LTE Band 4 is full covered by FDD-LTE Band 66, so only FDD-LTE Band 66 was tested.
6. For TDD-LTE Band 38 is full covered by TDD-LTE Band 41, so only FDD-LTE Band 41 was tested.
7. For NR n38 is full covered by NR n41, so only NR n41 was tested.
8. For NR n78 is full covered by NR n77, so only NR n77 was tested.

5 General Information

5.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address of Applicant:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address of Manufacturer:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address of Factory:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

5.2 General Description of EUT

Product Name:	Mobile Phone			
Model No.:	AE11			
Category of device	Portable device			
Operation Frequency:	GSM:	GSM850: 824.2~848.8 MHz	PCS 1900: 1850.2~1909.8 MHz	
	WCDMA:	Band II: 1852.4~1907.6 MHz	Band V: 826.4~846.6 MHz	
		Band IV: 1712.4~1752.6 MHz		
	LTE:	Band 2:1850MHz~1910MHz	Band 4:1710MHz~1755MHz	
		Band 5:824MHz~849MHz	Band 7: 2500MHz~2570MHz	
		Band 12: 699MHz~716MHz	Band 13: 777MHz~787MHz	
		Band 17: 704MHz~716MHz	Band 38: 2570MHz~2620MHz	
		Band 41: 2496MHz~2690MHz	Band 42:3450MHz~3550MHz	
		Band 66:1710MHz~1780MHz		
	5G NR	n5: 824MHz~849MHz	n7: 2500MHz~2570MHz	
		n12: 699-716MHz	n38: 2570MHz~2620MHz	
		n41: 2496MHz~2690MHz	n66:1710MHz~1780MHz	
		n77: 3450MHz~3550MHz	n77: 35500MHz~3700MHz	
		n77: 3700MHz~3980MHz	n78: 3450MHz~3550MHz	
		n78: 3550MHz~3700MHz	n78: 3700MHz~3800MHz	
	Wi-Fi:	2412MHz~2462MHz	5150MHz-5250MHz	
		5250MHz-5350MHz	5470MHz-5725MHz	
5725MHz-5850MHz				
Bluetooth: 2402 MHz ~ 2480 MHz				
NFC:13.56MHz				
Modulation technology:	GSM:	<input checked="" type="checkbox"/> Voice(GMSK)	<input checked="" type="checkbox"/> GPRS(GMSK)	<input checked="" type="checkbox"/> EGPRS(GMSK, 8PSK)
	WCDMA:	<input checked="" type="checkbox"/> RMC(QPSK)	<input checked="" type="checkbox"/> HSUPA(QPSK)	<input checked="" type="checkbox"/> HSDPA(QPSK, 16QAM)
	LTE:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input checked="" type="checkbox"/> 64QAM
	5G NR:	<input checked="" type="checkbox"/> CP-OFDM(QPSK, 16QAM, 64QAM, 256QAM)		
		<input checked="" type="checkbox"/> DFT-s-OFDM($\pi/2$ -BPSK, QPSK, 16QAM, 64QAM, 256QAM)		
Wi-Fi:	<input checked="" type="checkbox"/> 802.11b(DSSS)	<input checked="" type="checkbox"/> 802.11a/g/n/ac/ax (OFDM)		

	Bluetooth:	<input checked="" type="checkbox"/> BDR(GFSK)	<input checked="" type="checkbox"/> EDR($\pi/4$ -DQPSK, 8DPSK)	<input checked="" type="checkbox"/> LE(GFSK)
	NFC:	<input checked="" type="checkbox"/> ASK		
	SA: NR n5, n7,n12, n38, n41,n66, n77, n78			
	CA: CA_N78C, CA_n78A_n78A, CA_N41C, CA_N41A_N41A, CA_N41A_N78A (Only supports downlink CA)			
	NSA(EN-DC): DC_2A_n7A, DC_5A_n7A, DC_7A_n7A, DC_66A_n7A, DC_7A_n5A, DC_4A_n38A, DC_5A_n38A, DC_66A_n38A, DC_4A_n41A, DC_5A_n41A, DC_41A_n41A, DC_66A_n41A EN-DC with LTE 2CA: DC_7C_n78A, DC_41C_n78A, DC_7C_n77A, DC_41C_n77A, DC_41C_n41A, , DC_7A-7A_n78A, DC_2A-7A_n78, DC_2A-66A_n78, DC_5A-7A_n78A, (LTE Band 7C and 41C only supports downlink) EN-DC with LTE 3CA: DC_2A-7C_n78 (LTE Band 7C only supports downlink)			
Antenna Type:	Internal Antenna			
Antenna Gain:	GSM 850:	ANT3 Unflip: 7.03 dBi	ANT3 Flip: -11.78 dBi	
	PCS1900:	ANT5 Unflip: -2.10 dBi	ANT5 Flip: -6.81 dBi	
	WCDMA band II:	ANT5 Unflip: -0.3 dBi	ANT5 Flip: -6.13 dBi	
	WCDMA band IV:	ANT5 Unflip: -0.3 dBi	ANT5 Flip: -6.13 dBi	
	WCDMA band V:	ANT3 Unflip: -7.03 dBi	ANT3 Flip: -11.78 dBi	
	LTE band 2:	ANT5 Unflip: -0.3 dBi	ANT5 Flip: -6.13 dBi	
		EN-DC ANT0 Unflip: -4.63 dBi	EN-DC ANT0 Flip: -6.93 dBi	
	LTE band 4:	ANT5 Unflip: -0.3 dBi	ANT5 Flip: -6.13 dBi	
		EN-DC ANT0 Unflip: -4.63 dBi	EN-DC ANT0 Flip: -6.93 dBi	
	LTE band 5:	ANT3 Unflip: -7.03 dBi	ANT3 Flip: -11.78 dBi	
	LTE band 7:	ANT5 Unflip: -3.0 dBi	ANT5 Flip: -3.19 dBi	
		EN-DC ANT0 Unflip: -2.97 dBi	EN-DC ANT0 Flip: -4.29 dBi	
	LTE band 12:	ANT3 Unflip: -4.93 dBi	ANT3 Flip: -11.17 dBi	
	LTE band 13:	ANT3 Unflip: -5.73 dBi	ANT3 Flip: -10.88 dBi	
	LTE band 17:	ANT3 Unflip: -4.93 dBi	ANT3 Flip: -11.17 dBi	
	LTE band 38:	ANT5 Unflip: -3.0 dBi	ANT5 Flip: -3.19 dBi	
		EN-DC ANT0 Unflip: -2.97 dBi	EN-DC ANT0 Flip: -4.29 dBi	
	LTE band 41:	ANT5 Unflip: -3.0 dBi	ANT5 Flip: -3.19 dBi	
EN-DC ANT0 Unflip: -2.97 dBi		EN-DC ANT0 Flip: -4.29 dBi		
LTE band 42:	ANT6 Unflip: -1.10 dBi	ANT6 Flip: -0.91 dBi		
LTE band 66:	ANT5 Unflip: -0.3 dBi	ANT5 Flip: -6.13 dBi		

		EN-DC ANT0 Unflip: -4.63 dBi	EN-DC ANT0 Flip: -6.93 dBi
	n5:	ANT3 Unflip: -7.03 dBi	ANT3 Flip: -11.78 dBi
	n7:	ANT5 Unflip: -3.00 dBi	ANT5 Flip: -3.19 dBi
	n12:	ANT3 Unflip: -4.93 dBi	ANT3 Flip: -11.17 dBi
	n38:	ANT5 Unflip: -3.00 dBi	ANT5 Flip: -3.19 dBi
	n41:	ANT5 Unflip: -3.00 dBi	ANT5 Flip: -3.19 dBi
	n66:	ANT5 Unflip: -0.30 dBi	ANT5 Flip: -6.13 dBi
	n77:	ANT6 Unflip: -1.10 dBi	ANT6 Flip: -0.91 dBi
	n78:	ANT6 Unflip: -1.10 dBi	ANT6 Flip: -0.91 dBi
	2.4G Wi-Fi:	ANT 4 Unflip: -1.59 dB	ANT 4 Flip: -3.15 dBi
		ANT 12 Unflip: -3.6 dBi	ANT 12 Flip: -4.0 dBi
	5G Wi-Fi:	ANT 4 Unflip : -3.47 dB	ANT 4 Flip : -3.13 dBi
		ANT 12 Unflip : -0.32 dBi	ANT 12 Flip : -3.13 dBi
Bluetooth:	ANT 12 Unflip:-3.6 dBi	ANT 12 Flip: -4.0 dBi	
(E)GPRS Class:	(E)GPRS Class: 12		
DFS Operation Type:	<input type="checkbox"/> Master Device <input type="checkbox"/> Slaver Device with Radar detection function <input checked="" type="checkbox"/> Slaver Device without Radar detection function		
Dimensions (L*W*H):	Unflip: 170 mm (L)× 74 mm (W)× 8 mm (H) Flip: 85 mm (L)× 74 mm (W)×16 mm (H)		
Accessories information:	Adapter: Model: U700TSA Input: AC100-240V, 50/60Hz, 2.0A Output: DC 5.0V, 3.0A 15.0W or 5.0-10.0V, 7.0A MAX or 11.0V, 6.4A MAX or 4.0-20.0V, 3.5A 70.0W MAX		Rechargeable Li-ion Polymer Battery DC3.91V, 3410mAh & Rechargeable Li-ion Polymer Battery DC3.91V, 1180mAh
			Headset: Support headset

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	PCS 1900
GSM (Voice)	32.59	29.45
GPRS (1 TX Slot)	32.51	29.42
GPRS (2 TX Slots)	31.79	28.68
GPRS (3 TX Slots)	30.08	26.85
GPRS (4 TX Slots)	29.03	25.81
EGPRS (1 TX Slot)	27.17	25.94
EGPRS (2 TX Slots)	26.12	24.91
EGPRS (3 TX Slots)	23.94	22.69
EGPRS (4 TX Slots)	22.82	21.52

Mode	Average Power (dBm)		
	WCDMA Band II	WCDMA Band IV	WCDMA Band V
AMR 12.2 kbps	22.37	22.69	23.07
RMC 12.2 kbps	22.33	22.65	23.04
HSDPA Sub-test 1	22.35	22.68	23.08
HSDPA Sub-test 2	21.80	22.15	22.57
HSDPA Sub-test 3	21.83	22.20	22.61
HSDPA Sub-test 4	21.80	22.15	22.58
HSUPA Sub-test 1	20.28	20.83	21.06
HSUPA Sub-test 2	20.80	21.33	21.56
HSUPA Sub-test 3	21.33	21.64	22.10
HSUPA Sub-test 4	20.35	20.86	21.10
HSUPA Sub-test 5	22.34	22.66	23.08

Mode	Average Power (dBm)							
	LTE Band 2	LTE Band 5	LTE Band 7	LTE Band 12	LTE Band 13	LTE Band 41	LTE Band 42	LTE Band 66
BW/1.4 MHz	22.87	23.53	/	23.58	/	/	/	23.06
BW/3.0 MHz	23.01	23.63	/	23.65	/	/	/	23.15
BW/5.0 MHz	23.15	23.76	22.37	23.79	23.51	22.48	22.65	23.32
BW/10 MHz	23.04	23.67	22.24	23.65	23.44	22.43	22.47	23.19
BW/15 MHz	23.00	/	22.23	/	/	22.39	22.39	23.14
BW/20 MHz	23.02	/	22.29	/	/	22.38	22.37	23.24

ENDC ANT 0:

Mode	Average Power (dBm)			
	LTE Band 2	LTE Band 7	LTE Band 41	LTE Band 66
BW/1.4 MHz	19.99	/	/	20.20
BW/3.0 MHz	19.91	/	/	20.08
BW/5.0 MHz	20.01	19.31	19.71	20.31
BW/10 MHz	19.80	19.16	19.61	20.17
BW/15 MHz	19.80	19.07	19.57	20.09
BW/20 MHz	19.79	19.14	19.48	20.20

Mode	Average Power (dBm)							
	NR n5	NR n7	NR n12	NR n41	NR n66	NR Band n77 3450-3550	NR Band n77 3550-3700	NR Band n77 3700-3980
BW/10MHz	23.13	22.61	23.31	25.68	22.90	26.43	26.28	26.30
BW/15MHz	23.16	22.58	23.25	25.61	22.89	26.44	26.21	26.24
BW/20MHz	23.10	22.59	/	25.65	22.92	26.56	26.20	26.23
BW/30MHz	/	/	/	25.62	22.88	26.52	26.29	26.32
BW/40MHz	/	/	/	25.57	/	26.47	26.10	26.38
BW/50MHz	/	/	/	25.61	/	26.57	26.21	26.43
BW/60MHz	/	/	/	25.58	/	26.48	26.21	26.39
BW/80MHz	/	/	/	25.61	/	26.48	26.39	26.50
BW/90MHz	/	/	/	25.58	/	26.35	26.38	26.40
BW/100MHz	/	/	/	25.51	/	26.27	26.26	26.36

ANT 12:

WLAN 2.4 GHz Band Average Power (dBm)					
Mode/Band	b	g	n (HT-20)	ax20	ax40
WLAN 2.4GHz	16.64	13.88	14.22	11.18	11.05

ANT 4:

WLAN 2.4 GHz Band Average Power (dBm)					
Mode/Band	b	g	n (HT-20)	ax20	ax40
WLAN 2.4GHz	16.64	13.59	12.75	9.42	9.31

ANT12:

WLAN 5.2 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.2GHz	12.55	13.21	10.98	10.56	11.20	11.05	10.75	13.61	14.11

ANT4:

WLAN 5.2 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.2GHz	12.40	11.93	9.62	9.06	9.90	9.72	9.39	12.41	12.50

ANT12:

WLAN 5.3 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.3GHz	13.13	12.86	11.06	11.06	10.73	10.58	11.02	13.74	13.48

ANT4:

WLAN 5.3 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.3GHz	12.30	11.93	9.84	10.37	10.31	9.94	10.45	13.23	12.74

ANT12:

WLAN 5.6 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.6GHz	12.40	11.71	9.87	9.64	9.51	10.01	10.82	12.75	13.07

ANT4:

WLAN 5.6 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.6GHz	13.12	13.05	10.59	11.39	11.01	10.74	11.69	14.03	13.59

ANT12:

WLAN 5.8 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.8GHz	12.61	11.39	9.48	9.18	9.32	9.67	9.37	12.39	12.22

ANT4:

WLAN 5.8 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ac 40	ac 80	ax20	ax40	ax80	n 20	n 40
WLAN 5.8GHz	12.94	13.15	11.32	11.14	11.41	11.60	11.22	14.4	13.86

Bluetooth Average Power (dBm)							
Mode/Band	1 Mbps (GFSK)	2 Mbps ($\pi/4$ DQPSK)	3 Mbps (8DPSK)	BLE PHY 1M	BLE PHY 2M	BLE Coded PHY S=2	BLE Coded PHY S=8
Bluetooth	8.25	7.80	8.18	3.34	3.31	3.40	3.34

NFC Band Average Power (dBm)	
Mode/Band	ASK
NFC	-57.67

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
SZR142400021-2	SAR
<i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i>	

5.6 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

5.7 Test Location

<p>JianYan Testing Group Shenzhen Co., Ltd. No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community,Xinqiao Street, Bao'an District, Shenzhen, Guangdong,People's Republic of China. Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info-JYTee@lets.com, Website: http://jyt.lets.com</p>
--

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

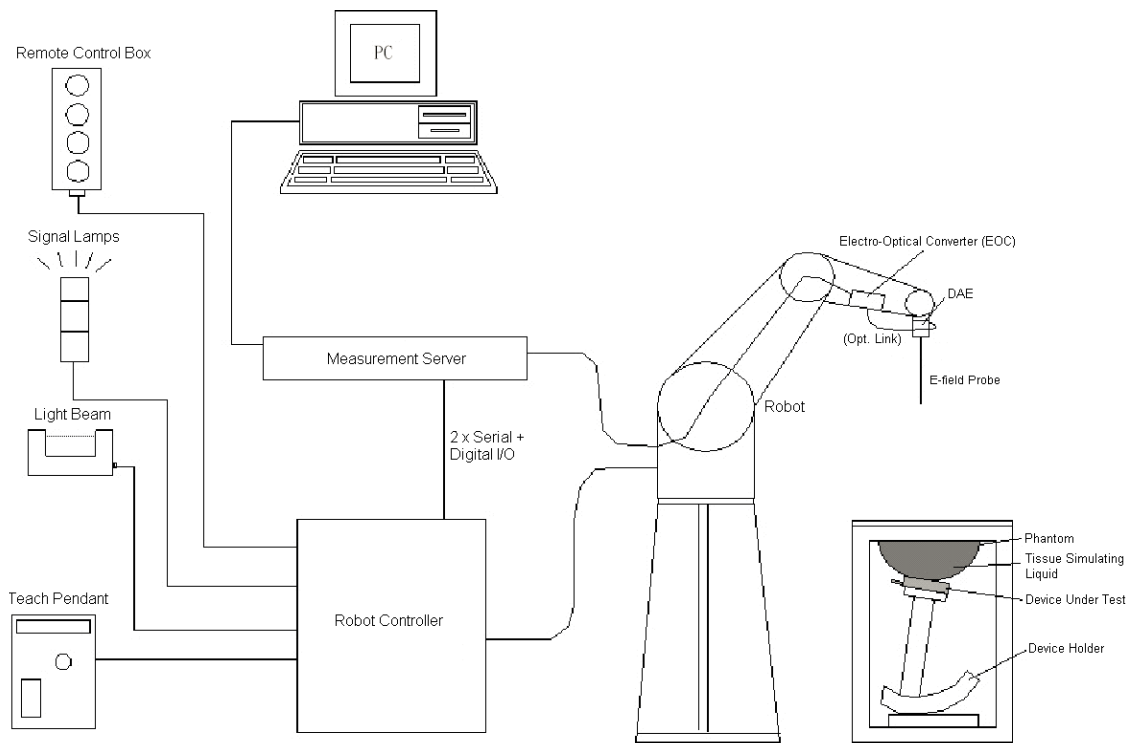


Fig. 8.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in the following sub-sections.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ **E-Field Probe Specification**
<EX3DV4 Probe>


Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency Directivity	10 MHz to 6 GHz; Linearity: ± 0.2 dB ± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 µW/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
Dimensions	Overall length: 330 mm (Tip: 20mm) Tip diameter: 2.5 mm (Body: 12mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig. 8.2 Photo of E-Field Probe

➤ **E-Field Probe Calibration**

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (Norm X, Norm Y and Norm Z), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix E of this report.

8.2 Data Acquisition Electronics (DAE)

The Data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.




Fig. 8.3 Photo of DAE

8.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60L) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; nobelt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Fig. 8.4 Photo of Robot

8.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY 5: 400MHz, Intel Celeron), chip-disk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig. 8.5 Photo of Server for DASY5

8.5 Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 8.6 Photo of Light Beam

8.6 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume Dimensions	Approx. 25 liters Length: 1000mm; Width: 500mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat phantom



Fig. 8.7 Photo of SAM Twin Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom >

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

ELI4 has been optimized regarding its performance and can be integrated into a SPEAG standard phantom table. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom can be used with the following tissue simulating liquids:

- Water-sugar based liquids can be left permanently in the phantom. Always cover the liquid if the system is not in use; otherwise the parameters will change due to water evaporation.
- DGBE based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the phantom resistiveness

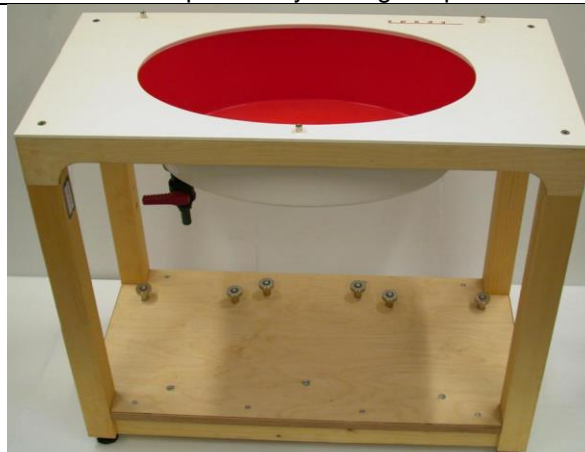


Fig.8.8 Photo of ELI4 Phantom

8.7 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards. The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The DASY device holder is constructed of low-low POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig. 8.9 Photo of Device Holder

8.8 Data storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verifications of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe Parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion	ConvF _i
	- Diode compression point	dcp _i
Device Parameters:	- Frequency	f
	- Crest	cf
Media Parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E- Field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-Field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency (GHz)
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

With SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in (mho/m) or (Siemens/m)
 ρ = equipment tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

8.9 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	WXJ023	05.18.2023	05.17.2026
SPEAG	835MHz System Validation Kit	D835V2	WXJ023-1	06.08.2022	06.07.2025
SPEAG	1750MHz System Validation Kit	D1750V2	WXJ023-6	01.17.2024	01.16.2027
SPEAG	1900MHz System Validation Kit	D1900V2	WXJ023-2	06.07.2022	06.06.2025
SPEAG	2450MHz System Validation Kit	D2450V2	WXJ023-3	06.06.2022	06.05.2025
SPEAG	2600MHz System Validation Kit	D2600V2	WXJ023-4	10.28.2021	10.27.2024
SPEAG	3500MHz System Validation Kit	D3500V2	WXJ023-8	01.22.2024	01.21.2027
SPEAG	3700MHz System Validation Kit	D3700V2	WXJ023-9	01.17.2024	01.16.2027
SPEAG	3900MHz System Validation Kit	D3900V2	WXJ023-10	01.22.2024	01.21.2027
SPEAG	5GHz System Validation Kit	D5GHzV2	WXJ023-14	01.16.2024	01.15.2027
SPEAG	Data Acquisition Electronics	DAE4	WXJ021-1	03.26.2024	03.25.2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	WXJ022	03.20.2024	03.19.2025
SPEAG	DASY 52 Measurement Software	DASY 52	Version 52.10.4.1527	N.C.R	N.C.R
SPEAG	DASY 52 File Conversion Software	SEMCAD X	Version 14.6.14 (7501)	N.C.R	N.C.R
SPEAG	Robot Controller	CS8Cspeag-TX60	WXG021-1	N.C.R	N.C.R
SPEAG	Phantom	Twin SAM Phantom	WXG021-4	N.C.R	N.C.R
SPEAG	Phantom	ELI V5.0	WXG021-5	N.C.R	N.C.R
SPEAG	Phone Positioner	N/A	WXG021-6	N.C.R	N.C.R
St?ubli	Robot	TX60Lspeag	WXG021-3	N.C.R	N.C.R
KEYSIGHT	UXM 5G Wireless Test Platform	E7515B	WXJ008-6	09.25.2023	09.24.2024
R&S	Broadband radio communication tester	CMW500	WXJ008-3	06.13.2023	06.12.2024
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-5	01.10.2023	01.09.2025
R&S	Universal Radio Communication Tester	CMU200	WXJ008-2	12.27.2023	12.26.2025
KEYSIGHT	Network Analyzer	E5071C	WXJ091	12.27.2023	12.26.2024
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	06.13.2023	06.12.2024
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	06.13.2023	06.12.2024
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	06.13.2023	06.12.2024
KEYSIGHT	Signal Generator	N5173B	WXJ006-3	09.25.2023	09.24.2024
Huber Suhner	RF Cable	SUCOFLEX	WXG008-13	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-14	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-15	See Note 3	
Weinschel	Attenuator	23-3-34	WXG008-16	See Note 3	
Anritsu	Directional Coupler	MP654A	WXG008-17	See Note 3	
SPEAG	Dielectric Assessment Kit	3.5 Probe	WXG008-7	See Note 4	
SPEAG	DAK Measurement Software	DAK	Version: DAK 3.5	N.C.R	
TXC	Broadband Amplifier	BBA018000	WXG008-11	See Note 5	

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.

4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
5. In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
7. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASy, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.



Fig. 9.1 Photo of Liquid Height for Head SAR

Fig. 9.2 Photo of Liquid Height for Body SAR

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
3000	38.5	2.40
5800	35.3	5.27

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The dielectric parameters of liquids were verified prior to the SAR evaluation using a Speag Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
750	21.9	0.89	41.16	0.89	41.90	0.00	-1.77	±5	03.30.2024
835	22.1	0.91	40.92	0.90	41.50	1.11	-1.40	±5	04.03.2024
835	22.0	0.90	40.87	0.90	41.50	0.00	-1.52	±5	05.16.2024
1750	22.4	1.36	39.03	1.37	40.10	-1.09	-2.67	±5	04.07.2024
1900	22.8	1.44	38.86	1.40	40.00	2.86	-2.85	±5	04.10.2024
2450	22.1	1.82	38.03	1.80	39.20	1.11	-2.98	±5	04.14.2024
2600	22.3	1.94	37.79	1.96	39.00	-1.02	-3.10	±5	04.17.2024
3500	22.4	2.89	37.15	2.91	37.90	-0.69	-1.97	±5	04.20.2024
3700	22.1	3.09	36.92	3.12	37.70	-0.96	-2.07	±5	04.24.2024
3900	22.1	3.30	36.70	3.32	37.50	-0.72	-2.13	±5	04.24.2024
5200	22.3	4.62	36.76	4.67	35.74	-1.07	2.85	±5	05.18.2024
5300	22.5	4.72	36.65	4.76	35.90	-0.84	2.08	±5	05.20.2024
5600	22.3	5.03	36.30	5.06	35.50	-0.63	2.25	±5	05.22.2024
5800	22.2	5.23	36.08	5.27	35.30	-0.76	2.20	±5	05.24.2024

10 SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

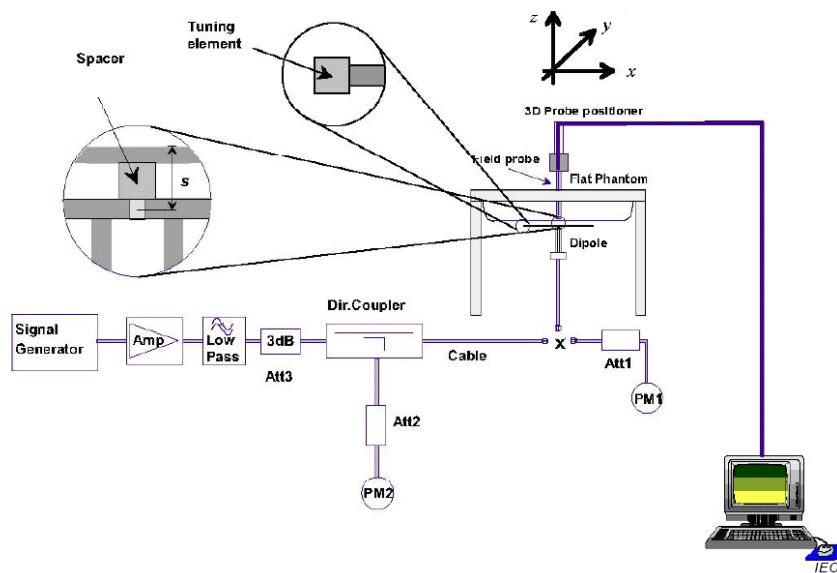


Fig.10.1 System Verification Setup Diagram

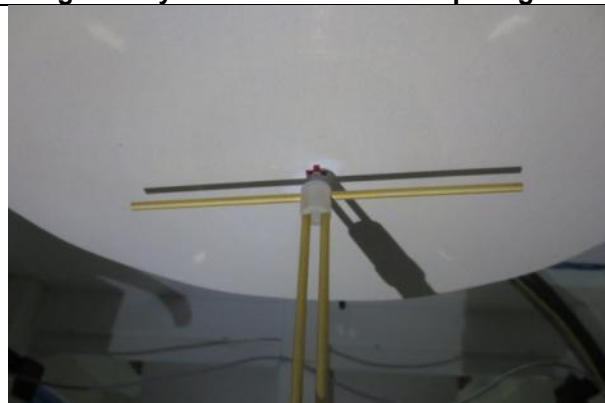


Fig.10.2 Photo of Dipole setup

➤

➤ **System Verification Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
03.30.2024	750	80	0.712	8.90	8.55	4.09
04.03.2024	835	80	0.811	10.14	9.6	5.63
05.16.2024	835	80	0.796	9.95	9.6	3.65
04.07.2024	1750	40	1.450	36.25	36.5	-0.68
04.10.2024	1900	40	1.610	40.25	39.9	0.88
04.14.2024	2450	40	2.070	51.75	53.4	-3.09
04.17.2024	2600	40	2.230	55.75	55.3	0.81
04.20.2024	3500	40	2.610	65.25	66.2	-1.44
04.24.2024	3700	40	2.710	67.75	66.5	1.88
04.24.2024	3900	40	2.760	69.00	68.0	1.47
05.18.2024	5200	40	3.020	75.50	77.00	-1.95
05.20.2024	5300	40	3.110	77.75	79.20	-1.83
05.22.2024	5600	40	3.310	82.75	81.90	1.04
05.24.2024	5800	40	3.270	81.75	78.90	3.61

11 EUT Testing Position

This EUT was tested in sixteen different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/Left Side/Right Side/Top Side/Bottom Side of the unflip EUT with phantom 10 mm gap, Front/Back/Left Side/Right Side/Top Side/Bottom Side of the flip EUT with phantom 5 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

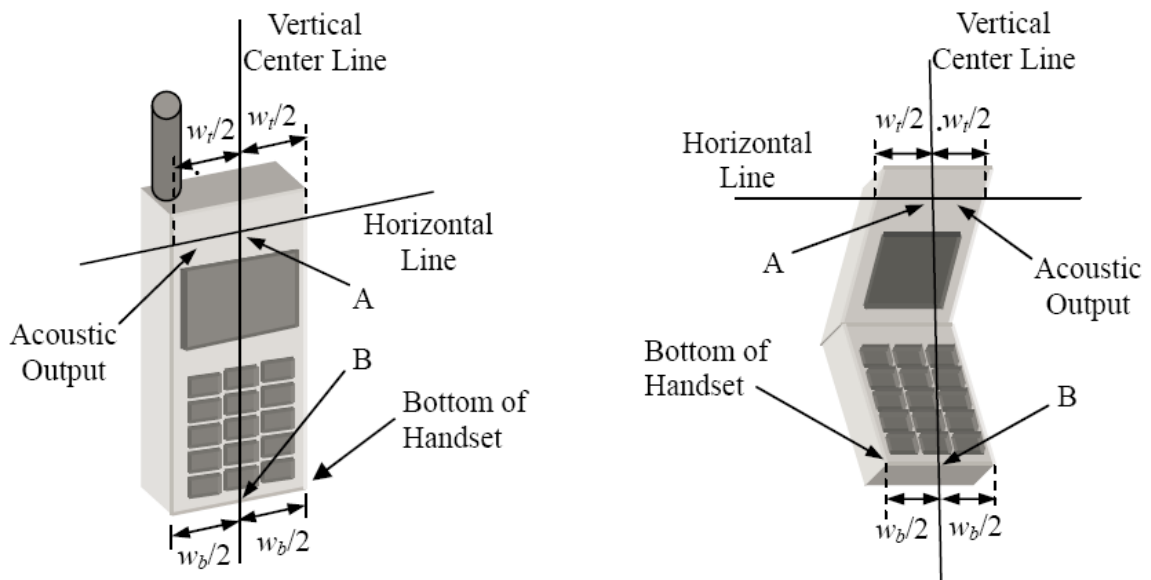


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15o Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

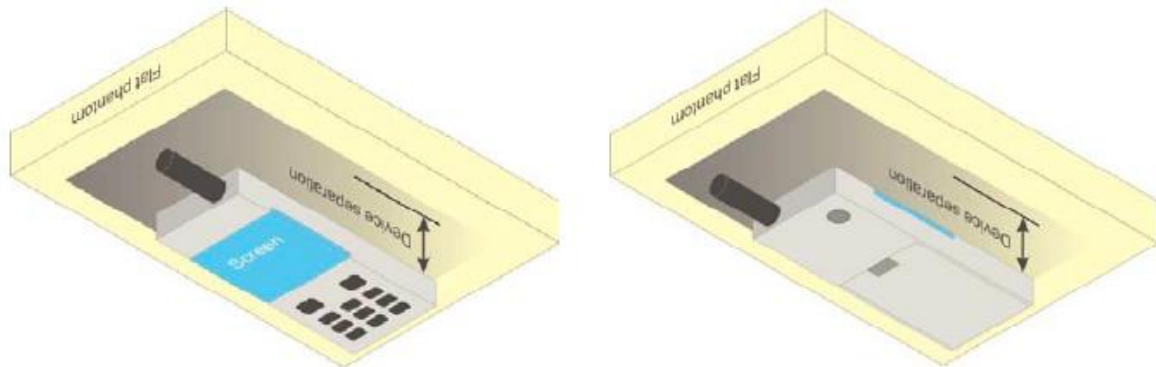


Fig.11.5 Illustration for Body Worn Position

11.6 Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

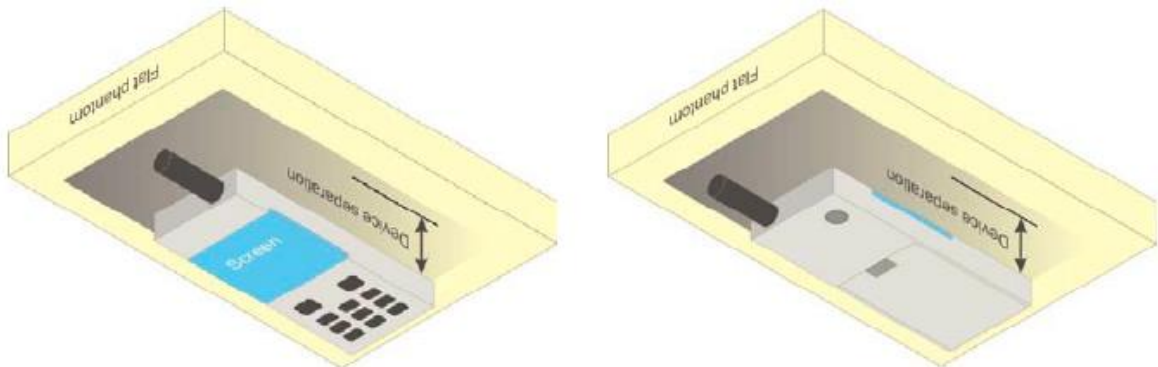


Fig.11.6 Illustration for Hotspot Position

12 Measurement Procedures

The measurement procedures are as below:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the DASY software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remains in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans are completed, the software, SEMCAD post-processor scans combine and subsequently superpose these measurement data to calculate the multiband SAR.

12.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT with a full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

The detailed conducted power table can refer to JYTSZ-R14-2400021 Appendix D Conducted RF Output Power.

13.1 GSM 850 Conducted Power

Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle “x” of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

1. For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
2. For Body worn SAR testing and Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
3. For GPRS multi time slots SAR measurement, when the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
4. Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.

13.2 GSM 1900 Conducted Power

Remark:

3. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle “x” of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
4. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

1. For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in PCS 1900 Voice mode.
2. For Body worn SAR testing and Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
3. Per KDB447498 D04v01, the maximum output power channel is used for SAR testing and for further SAR test reduction.

13.3 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:**Note:**

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.
3. AMR, HSDPA RF power will not be larger than RMC 12.2kbps, detailed information is included in Tune-up Procure exhibit.

13.4 LTE Conducted Power

13.4.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.⁸ When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.⁹

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> ?$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.4.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> ?$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

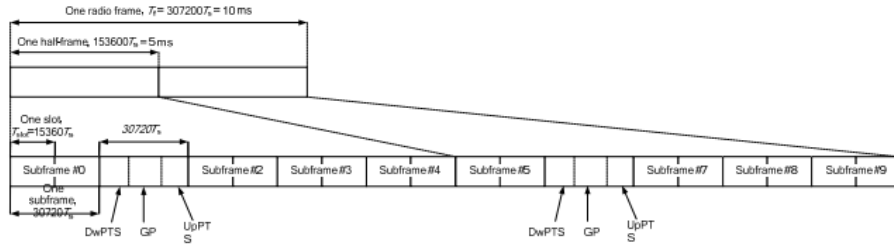


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_f=37200 T_s = 10$ ms consists of two half-frames of length $153600 T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3ms + 0.143ms)/5ms=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3ms + 0.167ms)/5ms=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

Note:

1. Per KDB 447498 D04v01 section 3.1.6, the required test channels number is 5 for LTE Band 41.

13.5 NR Conducted Power

Note:

1. 5G NR n7/n38/n41/n77/n78 supports NSA; n5/n7/n12/n38/n41/n66/n77/n78 supports SA.
2. 5G NR n41/n77/n78 supports HPUE.
3. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure.
5. QPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not 1/2 dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
6. Smaller bandwidth output power for each RB allocation configuration for this device will not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is less than 1.45 W/kg, smaller bandwidth SAR testing is no required for this device.

13.6 WLAN 2.4 GHz Band Conducted Power

Note:

1. SAR test of WLAN 2.4GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - 2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
4. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
5. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.7 WLAN 5.2GHz Band Conducted Power

Note:

1. SAR test of WLAN 5.2GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.8 WLAN 5.3GHz Band Conducted Power

Note:

1. SAR test of WLAN 5.2GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.9 WLAN 5.6GHz Band Conducted Power**Note:**

1. SAR test of WLAN 5.2GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.10 WLAN 5.8GHz Band Conducted Power**Note:**

1. SAR test of WLAN 5.8GHz is performed.
2. Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
3. The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
4. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.11 Bluetooth Conducted Power**Note:**

1. SAR test of Bluetooth is performed and the mode with highest average power is selected for SAR testing.
2. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
3. Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle is 100%, so the duty cycle factor is 1.

13.12 NFC Conducted Power**Note:**

1. Per KDB 447498 D04v01 section 2.1.2: 1-mW Test Exemption, SAR test for NFC is not required.

dBm	mW
-57.67	0.000002

2. The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

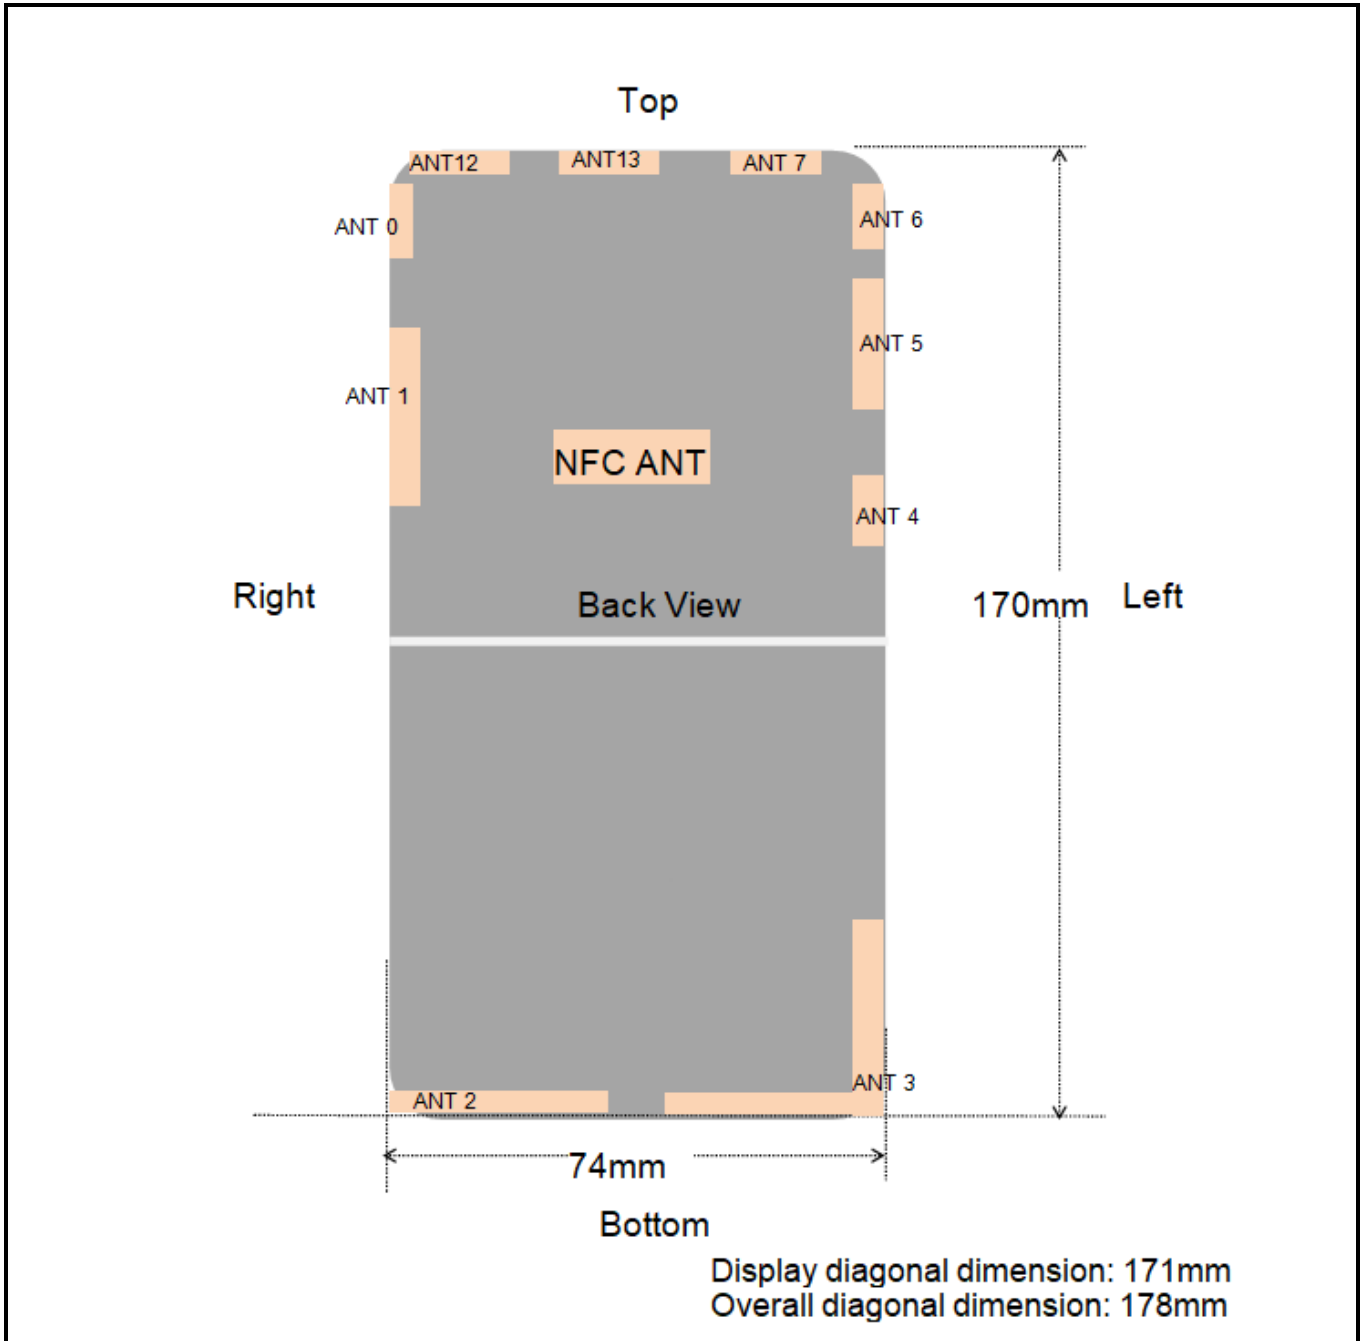


Fig.14.1 EUT Unflip Antenna Locations

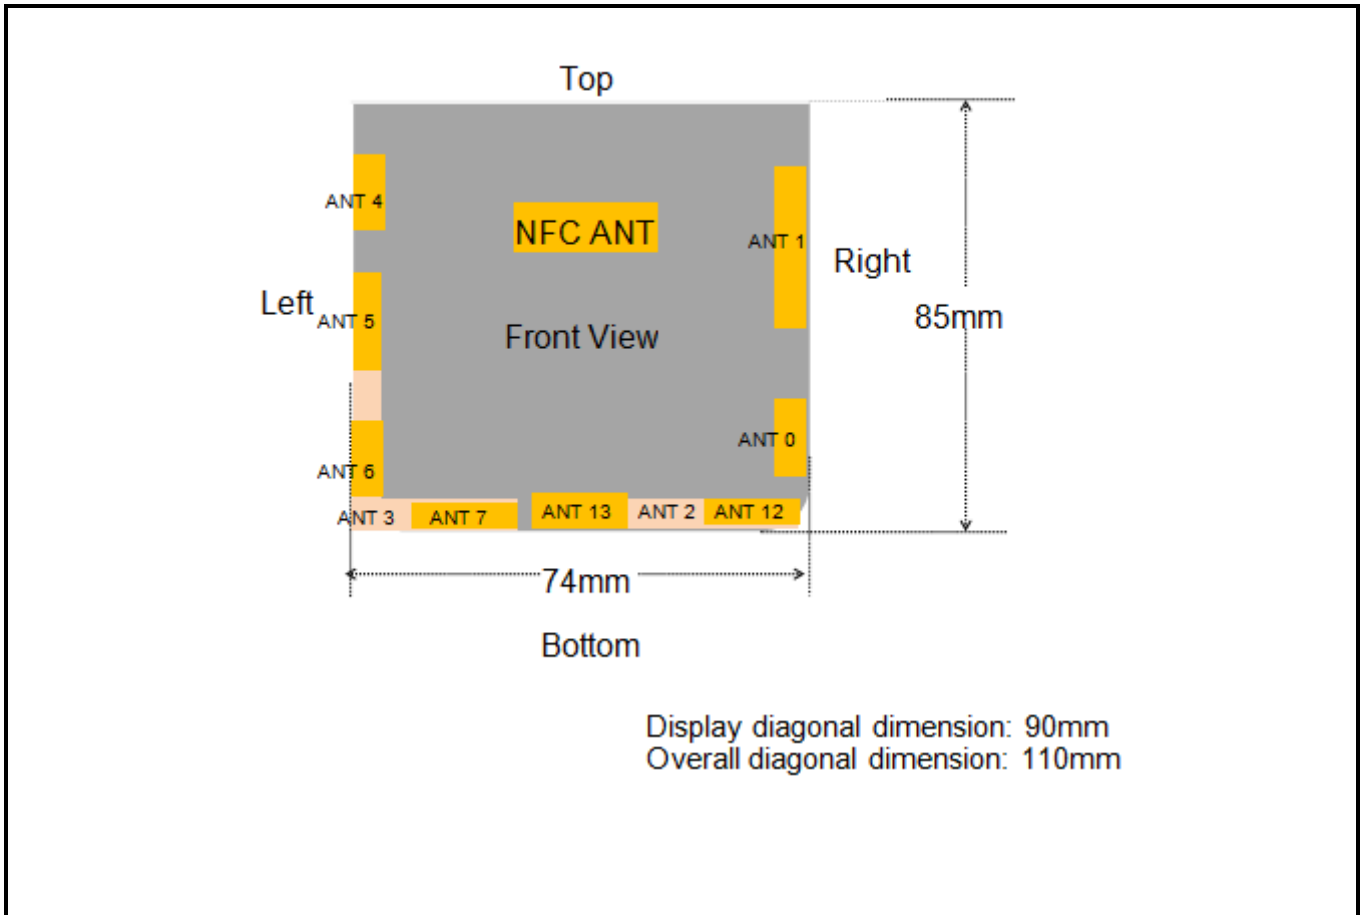


Fig.14.1 EUT Flip Antenna Locations

Note:

1. ANT 0: ENDC LTE Above 1GHz Band PRX(TX)
2. ANT 1: Below 1GHz Band DRX& 5G NR N77/N78 DRX(RX only)
3. ANT 2: Above 1GHz Band DRX(RX only)
4. ANT 3: Below 1GHz Band PRX(TX)
5. ANT 4: 2.4G&5GWiFi MIMO+N77/78 DRX(RX only)
6. ANT 5: Above 1GHz Band PRX
7. ANT 6: N77/N78 PRX(TX)
8. ANT 7: Above 1GHz Band DRX MIMO+N77/N78PRX MIMO (RX only)
9. ANT 12: BT/2.4&5GHz WIFI MIMO &GPS L1 ANT.
10. ANT 13: GPS L5

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

EUT Unflip Mode Antenna Location:

Distance of Antennas to EUT edge/surface Test distance: 10mm						
Antennas	Front	Back	Left	Right	Top	Bottom
ANT0	<25mm	<25mm	73mm	<25mm	<25mm	152mm
ANT3	<25mm	<25mm	<25mm	47mm	111mm	<25mm
ANT4	<25mm	<25mm	<25mm	73mm	46mm	57mm
ANT5	<25mm	<25mm	<25mm	73mm	<25mm	109mm
ANT6	<25mm	<25mm	<25mm	73mm	<25mm	152mm
ANT12	<25mm	<25mm	47mm	<25mm	<25mm	169mm

Test Positions Test distance: 10mm						
Antennas	Front	Back	Left	Right	Top	Bottom
ANT0	Yes	Yes		Yes	Yes	
ANT3	Yes	Yes	Yes			Yes
ANT4	Yes	Yes	Yes			
ANT5	Yes	Yes	Yes		Yes	
ANT6	Yes	Yes		Yes	Yes	
ANT12	Yes	Yes		Yes	Yes	

EUT Flip Mode Antenna Location:

Distance of Antennas to EUT edge/surface Test distance: 5mm						
Antennas	Front	Back	Left	Right	Top	Bottom
ANT0	<25mm	<25mm	73mm	<25mm	<25mm	66mm
ANT3	<25mm	<25mm	<25mm	47mm	26mm	<25mm
ANT4	<25mm	<25mm	<25mm	73mm	<25mm	46mm
ANT5	<25mm	<25mm	<25mm	73mm	<25mm	26mm
ANT6	<25mm	<25mm	<25mm	73mm	<25mm	66mm
ANT12	<25mm	<25mm	47mm	<25mm	<25mm	84mm

Test Positions Test distance: 5mm						
Antennas	Front	Back	Left	Right	Top	Bottom
ANT0	Yes	Yes		Yes	Yes	
ANT3	Yes	Yes	Yes			Yes
ANT4	Yes	Yes	Yes		Yes	
ANT5	Yes	Yes	Yes		Yes	
ANT6	Yes	Yes	Yes		Yes	
ANT12	Yes	Yes		Yes	Yes	

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D04v01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for unflip hotspot SAR, and 10 mm for unflip body-worn SAR, 5 mm for flip hotspot SAR, and 5 mm for flip body-worn SAR.
4. Per KDB 648474 D04 v01r03, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg

15 SAR Test Results Summary

15.1 Standalone Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GSM850/Voice	3	Right Cheek	128	824.2	Unflip	32.59	-0.04	33.0	0.126	1.099	0.138
	GSM850/Voice	3	Right Tilted	128	824.2	Unflip	32.59	-0.14	33.0	0.054	1.099	0.060
1	GSM850/Voice	3	Left Cheek	128	824.2	Unflip	32.59	-0.16	33.0	0.155	1.099	0.170
	GSM850/Voice	3	Left Tilted	128	824.2	Unflip	32.59	-0.02	33.0	0.055	1.099	0.061
2	PCS1900/Voice	5	Right Cheek	512	1850.2	Unflip	29.45	0.15	29.5	0.859	1.012	0.869
	PCS1900/Voice	5	Right Tilted	512	1850.2	Unflip	29.45	0.07	29.5	0.237	1.012	0.240
	PCS1900/Voice	5	Left Cheek	512	1850.2	Unflip	29.45	0.01	29.5	0.314	1.012	0.318
	PCS1900/Voice	5	Left Tilted	512	1850.2	Unflip	29.45	0.06	29.5	0.087	1.012	0.088
	PCS1900/Voice	5	Right Cheek	661	1880	Unflip	29.41	0.03	29.5	0.775	1.021	0.791
	PCS1900/Voice	5	Right Cheek	810	1909.8	Unflip	29.21	0.06	29.5	0.664	1.069	0.710
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ WCDMA Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
3	Band II/RMC	5	Right Cheek	9400	1880	Unflip	22.33	0.13	22.5	0.683	1.04	0.710
	Band II/RMC	5	Right Tilted	9400	1880	Unflip	22.33	0.03	22.5	0.185	1.04	0.192
	Band II/RMC	5	Left Cheek	9400	1880	Unflip	22.33	-0.09	22.5	0.228	1.04	0.237
	Band II/RMC	5	Left Tilted	9400	1880	Unflip	22.33	-0.05	22.5	0.071	1.04	0.074
4	Band IV/RMC	5	Right Cheek	1413	1732.6	Unflip	22.65	0.13	23.0	0.667	1.084	0.723
	Band IV/RMC	5	Right Tilted	1413	1732.6	Unflip	22.65	0.03	23.0	0.129	1.084	0.140
	Band IV/RMC	5	Left Cheek	1413	1732.6	Unflip	22.65	0.19	23.0	0.022	1.084	0.024
	Band IV/RMC	5	Left Tilted	1413	1732.6	Unflip	22.65	-0.16	23.0	0.066	1.084	0.072
	Band V/RMC	3	Right Cheek	4132	826.4	Unflip	23.04	-0.17	23.5	0.104	1.112	0.116
	Band V/RMC	3	Right Tilted	4132	826.4	Unflip	23.04	0.12	23.5	0.042	1.112	0.047
5	Band V/RMC	3	Left Cheek	4132	826.4	Unflip	23.04	-0.09	23.5	0.111	1.112	0.123
	Band V/RMC	3	Left Tilted	4132	826.4	Unflip	23.04	-0.03	23.5	0.048	1.112	0.053
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 2(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
6	Band2/1RB#49	5	Right Cheek	18700	1860	Unflip	23.02	-0.10	23.5	0.586	1.117	0.655
	Band2/1RB#49	5	Right Tilted	18700	1860	Unflip	23.02	0.00	23.5	0.137	1.117	0.153
	Band2/1RB#49	5	Left Cheek	18700	1860	Unflip	23.02	0.12	23.5	0.244	1.117	0.273
	Band2/1RB#49	5	Left Tilted	18700	1860	Unflip	23.02	0.02	23.5	0.067	1.117	0.075
	Band2/50%RB#0	5	Right Cheek	18900	1880	Unflip	21.91	-0.16	22.0	0.486	1.021	0.496
	Band2/50%RB#0	5	Right Tilted	18900	1880	Unflip	21.91	-0.06	22.0	0.131	1.021	0.134
	Band2/50%RB#0	5	Left Cheek	18900	1880	Unflip	21.91	-0.01	22.0	0.213	1.021	0.217
	Band2/50%RB#0	5	Left Tilted	18900	1880	Unflip	21.91	-0.18	22.0	0.058	1.021	0.059
	Band2/1RB#49	0	Right Cheek	18700	1860	Unflip	19.79	0.06	20.0	0.018	1.05	0.018
	Band2/1RB#49	0	Right Tilted	18700	1860	Unflip	19.79	-0.02	20.0	0.004	1.05	0.004
	Band2/1RB#49	0	Left Cheek	18700	1860	Unflip	19.79	0.01	20.0	0.051	1.05	0.054
	Band2/1RB#49	0	Left Tilted	18700	1860	Unflip	19.79	0.05	20.0	0.030	1.05	0.032
	Band2/50%RB#0	0	Right Cheek	19100	1900	Unflip	18.71	-0.03	19.0	0.015	1.069	0.016
	Band2/50%RB#0	0	Right Tilted	19100	1900	Unflip	18.71	-0.07	19.0	0.003	1.069	0.003
	Band2/50%RB#0	0	Left Cheek	19100	1900	Unflip	18.71	-0.02	19.0	0.045	1.069	0.048
	Band2/50%RB#0	0	Left Tilted	19100	1900	Unflip	18.71	-0.12	19.0	0.026	1.069	0.028
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 5(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	3	Right Cheek	20450	829	Unflip	23.67	-0.20	24.0	0.138	1.079	0.149
	Band5/1RB#24	3	Right Tilted	20450	829	Unflip	23.67	-0.11	24.0	0.050	1.079	0.054
7	Band5/1RB#24	3	Left Cheek	20450	829	Unflip	23.67	0.06	24.0	0.180	1.079	0.194
	Band5/1RB#24	3	Left Tilted	20450	829	Unflip	23.67	-0.08	24.0	0.064	1.079	0.069
	Band5/50%RB#24	3	Right Cheek	20450	829	Unflip	22.49	0.03	22.5	0.121	1.002	0.121
	Band5/50%RB#24	3	Right Tilted	20450	829	Unflip	22.49	-0.07	22.5	0.045	1.002	0.045
	Band5/50%RB#24	3	Left Cheek	20450	829	Unflip	22.49	0.09	22.5	0.169	1.002	0.169
	Band5/50%RB#24	3	Left Tilted	20450	829	Unflip	22.49	0.15	22.5	0.053	1.002	0.053
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
8	Band7/1RB#49	5	Right Cheek	20850	2510	Unflip	22.29	0.16	22.5	0.427	1.05	0.448
	Band7/1RB#49	5	Right Tilted	20850	2510	Unflip	22.29	-0.03	22.5	0.219	1.05	0.230
	Band7/1RB#49	5	Left Cheek	20850	2510	Unflip	22.29	0.20	22.5	0.074	1.05	0.078
	Band7/1RB#49	5	Left Tilted	20850	2510	Unflip	22.29	0.04	22.5	0.032	1.05	0.033
	Band7/50%RB#24	5	Right Cheek	20850	2510	Unflip	21.21	0.01	21.5	0.312	1.069	0.334
	Band7/50%RB#24	5	Right Tilted	20850	2510	Unflip	21.21	-0.10	21.5	0.203	1.069	0.217
	Band7/50%RB#24	5	Left Cheek	20850	2510	Unflip	21.21	-0.12	21.5	0.066	1.069	0.071
	Band7/50%RB#24	5	Left Tilted	20850	2510	Unflip	21.21	-0.11	21.5	0.021	1.069	0.022
	Band7/1RB#49	0	Right Cheek	20850	2510	Unflip	19.14	0.12	19.5	0.136	1.086	0.148
	Band7/1RB#49	0	Right Tilted	20850	2510	Unflip	19.14	0.01	19.5	0.099	1.086	0.107
	Band7/1RB#49	0	Left Cheek	20850	2510	Unflip	19.14	-0.04	19.5	0.220	1.086	0.239
	Band7/1RB#49	0	Left Tilted	20850	2510	Unflip	19.14	0.07	19.5	0.315	1.086	0.342
	Band7/50%RB#0	0	Right Cheek	21350	2560	Unflip	18.03	0.20	18.5	0.118	1.114	0.131
	Band7/50%RB#0	0	Right Tilted	21350	2560	Unflip	18.03	-0.15	18.5	0.086	1.114	0.096
	Band7/50%RB#0	0	Left Cheek	21350	2560	Unflip	18.03	-0.14	18.5	0.192	1.114	0.214
	Band7/50%RB#0	0	Left Tilted	21350	2560	Unflip	18.03	-0.08	18.5	0.274	1.114	0.305
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 12(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#0	3	Right Cheek	23060	704	Unflip	23.65	-0.05	24.0	0.120	1.084	0.130
	Band12/1RB#0	3	Right Tilted	23060	704	Unflip	23.65	-0.08	24.0	0.045	1.084	0.049
9	Band12/1RB#0	3	Left Cheek	23060	704	Unflip	23.65	0.02	24.0	0.150	1.084	0.163
	Band12/1RB#0	3	Left Tilted	23060	704	Unflip	23.65	0.04	24.0	0.055	1.084	0.060
	Band12/50%RB#24	3	Right Cheek	23060	704	Unflip	22.55	-0.06	23.0	0.114	1.109	0.126
	Band12/50%RB#24	3	Right Tilted	23060	704	Unflip	22.55	-0.14	23.0	0.039	1.109	0.043
	Band12/50%RB#24	3	Left Cheek	23060	704	Unflip	22.55	0.08	23.0	0.135	1.109	0.150
	Band12/50%RB#24	3	Left Tilted	23060	704	Unflip	22.55	0.13	23.0	0.051	1.109	0.057
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ FDD-LTE Band 13(10MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#49	3	Right Cheek	23230	782	Unflip	23.44	-0.05	23.5	0.136	1.014	0.138
	Band13/1RB#49	3	Right Tilted	23230	782	Unflip	23.44	-0.05	23.5	0.046	1.014	0.047
10	Band13/1RB#49	3	Left Cheek	23230	782	Unflip	23.44	0.09	23.5	0.173	1.014	0.175
	Band13/1RB#49	3	Left Tilted	23230	782	Unflip	23.44	0.10	23.5	0.048	1.014	0.049
	Band13/50%RB#24	3	Right Cheek	23230	782	Unflip	22.36	0.00	22.5	0.123	1.033	0.127
	Band13/50%RB#24	3	Right Tilted	23230	782	Unflip	22.36	-0.03	22.5	0.036	1.033	0.037
	Band13/50%RB#24	3	Left Cheek	23230	782	Unflip	22.36	0.09	22.5	0.152	1.033	0.157
	Band13/50%RB#24	3	Left Tilted	23230	782	Unflip	22.36	-0.06	22.5	0.044	1.033	0.045
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g						

➤ TDD-LTE Band41(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#99	5	Right Cheek	41490	2680	Unflip	22.38	0.03	22.5	0.270	1.028	1.008	0.280
11	Band41/1RB#99	5	Right Tilted	41490	2680	Unflip	22.38	0.15	22.5	0.372	1.028	1.008	0.385
	Band41/1RB#99	5	Left Cheek	41490	2680	Unflip	22.38	0.02	22.5	0.087	1.028	1.008	0.090
	Band41/1RB#99	5	Left Tilted	41490	2680	Unflip	22.38	-0.08	22.5	0.096	1.028	1.008	0.099
	Band41/50%RB#49	5	Right Cheek	41490	2680	Unflip	21.36	-0.15	21.5	0.265	1.033	1.008	0.276
	Band41/50%RB#49	5	Right Tilted	41490	2680	Unflip	21.36	-0.17	21.5	0.331	1.033	1.008	0.345
	Band41/50%RB#49	5	Left Cheek	41490	2680	Unflip	21.36	0.08	21.5	0.075	1.033	1.008	0.078
	Band41/50%RB#49	5	Left Tilted	41490	2680	Unflip	21.36	-0.01	21.5	0.086	1.033	1.008	0.090
	Band41/1RB#49	0	Right Cheek	40620	2593	Unflip	19.48	0.20	19.5	0.064	1.005	1.008	0.065
	Band41/1RB#49	0	Right Tilted	40620	2593	Unflip	19.48	-0.11	19.5	0.057	1.005	1.008	0.058
	Band41/1RB#49	0	Left Cheek	40620	2593	Unflip	19.48	0.18	19.5	0.142	1.005	1.008	0.144
	Band41/1RB#49	0	Left Tilted	40620	2593	Unflip	19.48	0.00	19.5	0.119	1.005	1.008	0.121
	Band41/50%RB#49	0	Right Cheek	41490	2680	Unflip	18.50	0.04	19.0	0.056	1.122	1.008	0.063
	Band41/50%RB#49	0	Right Tilted	41490	2680	Unflip	18.50	0.18	19.0	0.049	1.122	1.008	0.055
	Band41/50%RB#49	0	Left Cheek	41490	2680	Unflip	18.50	0.06	19.0	0.124	1.122	1.008	0.140
	Band41/50%RB#49	0	Left Tilted	41490	2680	Unflip	18.50	-0.20	19.0	0.104	1.122	1.008	0.118
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ TDD-LTE Band42(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
12	Band42/1RB#49	6	Right Cheek	42990	3540	Unflip	22.37	0.06	22.5	0.788	1.03	1.008	0.818
	Band42/1RB#49	6	Right Tilted	42990	3540	Unflip	22.37	0.05	22.5	0.366	1.03	1.008	0.380
	Band42/1RB#49	6	Left Cheek	42990	3540	Unflip	22.37	0.07	22.5	0.230	1.03	1.008	0.239
	Band42/1RB#49	6	Left Tilted	42990	3540	Unflip	22.37	0.16	22.5	0.216	1.03	1.008	0.224
	Band42/1RB#49	6	Right Cheek	42190	3460	Unflip	22.26	-0.04	22.5	0.734	1.057	1.008	0.782
	Band42/1RB#49	6	Right Cheek	42590	3500	Unflip	22.25	-0.09	22.5	0.751	1.059	1.008	0.802
	Band42/50%RB#49	6	Right Cheek	42990	3540	Unflip	21.34	-0.08	21.5	0.756	1.038	1.008	0.791
	Band42/50%RB#49	6	Right Tilted	42990	3540	Unflip	21.34	-0.15	21.5	0.361	1.038	1.008	0.378
	Band42/50%RB#49	6	Left Cheek	42990	3540	Unflip	21.34	0.02	21.5	0.210	1.038	1.008	0.220
	Band42/50%RB#49	6	Left Tilted	42990	3540	Unflip	21.34	0.07	21.5	0.194	1.038	1.008	0.203
	Band42/100%RB#0	6	Right Cheek	42990	3540	Unflip	21.33	-0.08	21.5	0.719	1.04	1.008	0.754
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)							
Spatial Peak													
Uncontrolled Exposure/General Population													

➤ FDD-LTE Band 66(20MHz) QPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
13	Band66/1RB#49	5	Right Cheek	132072	1720	Unflip	23.24	0.10	23.5	0.800	1.062	0.850	
	Band66/1RB#49	5	Right Tilted	132072	1720	Unflip	23.24	0.02	23.5	0.221	1.062	0.235	
	Band66/1RB#49	5	Left Cheek	132072	1720	Unflip	23.24	-0.03	23.5	0.324	1.062	0.344	
	Band66/1RB#49	5	Left Tilted	132072	1720	Unflip	23.24	-0.15	23.5	0.107	1.062	0.114	
	Band66/1RB#49	5	Right Cheek	132322	1745	Unflip	23.07	-0.09	23.5	0.715	1.104	0.789	
	Band66/1RB#49	5	Right Cheek	132572	1770	Unflip	22.93	0.00	23.5	0.690	1.14	0.787	
	Band66/1RB#49	5	Right Cheek	132072	1720	Unflip	23.24	0.03	23.5	0.762	1.062	0.809	
	Band66/50%RB#0	5	Right Cheek	132072	1720	Unflip	22.23	0.20	22.5	0.714	1.064	0.760	
	Band66/50%RB#0	5	Right Tilted	132072	1720	Unflip	22.23	0.06	22.5	0.203	1.064	0.216	
	Band66/50%RB#0	5	Left Cheek	132072	1720	Unflip	22.23	-0.11	22.5	0.293	1.064	0.312	
	Band66/50%RB#0	5	Left Tilted	132072	1720	Unflip	22.23	0.09	22.5	0.088	1.064	0.094	
	Band66/100%RB#0	5	Right Cheek	132322	1745	Unflip	22.08	0.00	22.5	0.683	1.102	0.753	
	Band66/1RB#49	0	Right Cheek	132322	1745	Unflip	20.20	0.10	20.5	0.101	1.072	0.108	
	Band66/1RB#49	0	Right Tilted	132322	1745	Unflip	20.20	0.00	20.5	0.057	1.072	0.061	
	Band66/1RB#49	0	Left Cheek	132322	1745	Unflip	20.20	0.00	20.5	0.117	1.072	0.125	
	Band66/1RB#49	0	Left Tilted	132322	1745	Unflip	20.20	-0.12	20.5	0.069	1.072	0.074	
	Band66/50%RB#49	0	Right Cheek	132572	1770	Unflip	19.11	-0.15	19.5	0.088	1.094	0.096	
	Band66/50%RB#49	0	Right Tilted	132572	1770	Unflip	19.11	0.11	19.5	0.050	1.094	0.055	
	Band66/50%RB#49	0	Left Cheek	132572	1770	Unflip	19.11	0.04	19.5	0.100	1.094	0.109	
	Band66/50%RB#49	0	Left Tilted	132572	1770	Unflip	19.11	-0.06	19.5	0.059	1.094	0.065	
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)							
Spatial Peak													
Uncontrolled Exposure/General Population													

➤ n5(20MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	NR n5/1@49	3	Right Cheek	167800	839	Unflip	22.92	0.01	23.0	0.082	1.019	0.084	
	NR n5/1@49	3	Right Tilted	167800	839	Unflip	22.92	0.18	23.0	0.039	1.019	0.040	
	NR n5/1@49	3	Left Cheek	167800	839	Unflip	22.92	0.00	23.0	0.107	1.019	0.109	
	NR n5/1@49	3	Left Tilted	167800	839	Unflip	22.92	-0.11	23.0	0.051	1.019	0.052	
	NR n5/25@12	3	Right Cheek	167800	839	Unflip	23.05	0.19	23.5	0.131	1.109	0.145	
	NR n5/25@12	3	Right Tilted	167800	839	Unflip	23.05	0.03	23.5	0.061	1.109	0.068	
14	NR n5/25@12	3	Left Cheek	167800	839	Unflip	23.05	0.08	23.5	0.159	1.109	0.176	
	NR n5/25@12	3	Left Tilted	167800	839	Unflip	23.05	-0.09	23.5	0.078	1.109	0.087	
ANSI / IEEE C95.1 – SAFETY LIMIT						1.6 W/kg (mW/g)							
Spatial Peak													
Uncontrolled Exposure/General Population													

➤ NR n7(20MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n7/1 @49	5	Right Cheek	512000	2560	Unflip	22.47	-0.04	23.0	0.941	1.130	1.063
	NR n7/1 @49	5	Right Tilted	512000	2560	Unflip	22.47	0.16	23.0	0.482	1.130	0.545
	NR n7/1 @49	5	Left Cheek	512000	2560	Unflip	22.47	-0.14	23.0	0.165	1.130	0.186
	NR n7/1 @49	5	Left Tilted	512000	2560	Unflip	22.47	0.02	23.0	0.064	1.130	0.072
	NR n7/1 @49	5	Right Cheek	502000	2510	Unflip	22.31	-0.01	23.0	0.896	1.172	1.050
	NR n7/1 @1	5	Right Cheek	507000	2535	Unflip	22.28	0.17	23.0	0.872	1.180	1.029
15	NR n7/25 @12	5	Right Cheek	512000	2560	Unflip	22.89	0.16	23.0	1.130	1.026	1.159
	NR n7/25 @12	5	Right Tilted	512000	2560	Unflip	22.89	0.18	23.0	0.656	1.026	0.673
	NR n7/25 @12	5	Left Cheek	512000	2560	Unflip	22.89	0.14	23.0	0.295	1.026	0.303
	NR n7/25 @12	5	Left Tilted	512000	2560	Unflip	22.89	0.18	23.0	0.176	1.026	0.181
	NR n7/25 @12	5	Right Cheek	502000	2510	Unflip	22.39	0.13	23.0	0.984	1.151	1.133
	NR n7/25 @12	5	Right Cheek	507000	2535	Unflip	22.40	0.02	23.0	1.007	1.148	1.156
	NR n7/25 @12	5	Right Cheek	512000	2560	Unflip	22.89	-0.04	23.0	1.057	1.026	1.084
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n12(20MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n12/1 @36	3	Right Cheek	141500	707.5	Unflip	23.15	-0.05	23.50	0.055	1.084	0.060
	NR n12/1 @36	3	Right Tilted	141500	707.5	Unflip	23.15	0.01	23.50	0.023	1.084	0.025
	NR n12/1 @36	3	Left Cheek	141500	707.5	Unflip	23.15	0.08	23.50	0.067	1.084	0.073
	NR n12/1 @36	3	Left Tilted	141500	707.5	Unflip	23.15	0.04	23.50	0.026	1.084	0.028
	NR n12/18 @9	3	Right Cheek	141300	706.5	Unflip	23.24	0.09	23.50	0.084	1.062	0.089
	NR n12/18 @9	3	Right Tilted	141300	706.5	Unflip	23.24	0.09	23.50	0.029	1.062	0.031
16	NR n12/18 @9	3	Left Cheek	141300	706.5	Unflip	23.24	-0.05	23.50	0.103	1.062	0.109
	NR n12/18 @9	3	Left Tilted	141300	706.5	Unflip	23.24	0.14	23.50	0.030	1.062	0.032
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n41(100MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n41/1 @271	5	Right Cheek	509202	2546.01	Unflip	24.76	0.09	25.0	0.702	1.057	0.742
	NR n41/1 @271	5	Right Tilted	509202	2546.01	Unflip	24.76	-0.11	25.0	0.518	1.057	0.548
	NR n41/1 @271	5	Left Cheek	509202	2546.01	Unflip	24.76	0.05	25.0	0.131	1.057	0.138
	NR n41/1 @271	5	Left Tilted	509202	2546.01	Unflip	24.76	0.09	25.0	0.106	1.057	0.112
17	NR n41/135 @67	5	Right Cheek	518598	2592.99	Unflip	25.51	-0.05	26.0	0.909	1.119	1.017
	NR n41/135 @67	5	Right Tilted	518598	2592.99	Unflip	25.51	0.19	26.0	0.673	1.119	0.753
	NR n41/135 @67	5	Left Cheek	518598	2592.99	Unflip	25.51	-0.18	26.0	0.170	1.119	0.190
	NR n41/135 @67	5	Left Tilted	518598	2592.99	Unflip	25.51	0.00	26.0	0.134	1.119	0.150
	NR n41/135 @67	5	Right Cheek	509202	2546.01	Unflip	25.16	0.05	26.0	0.823	1.213	0.998
	NR n41/135 @67	5	Right Cheek	528000	2640	Unflip	25.34	0.18	26.0	0.851	1.164	0.991
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n66(40MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n66/1 @104	5	Right Cheek	349000	1745	Unflip	22.61	0.06	23.0	0.457	1.094	0.500
	NR n66/1 @104	5	Right Tilted	349000	1745	Unflip	22.61	-0.01	23.0	0.108	1.094	0.118
	NR n66/1 @104	5	Left Cheek	349000	1745	Unflip	22.61	0.20	23.0	0.192	1.094	0.210
	NR n66/1 @104	5	Left Tilted	349000	1745	Unflip	22.61	-0.14	23.0	0.053	1.094	0.058
18	NR n66/50@25	5	Right Cheek	346000	1730	Unflip	22.88	-0.13	23.0	0.553	1.028	0.568
	NR n66/50@25	5	Right Tilted	346000	1730	Unflip	22.88	-0.04	23.0	0.144	1.028	0.148
	NR n66/50@25	5	Left Cheek	346000	1730	Unflip	22.88	-0.08	23.0	0.262	1.028	0.269
	NR n66/50@25	5	Left Tilted	346000	1730	Unflip	22.88	-0.20	23.0	0.074	1.028	0.076
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3450MHz~3550MHz) (100MHz)DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1 @1	6	Right Cheek	633334	3500.01	Unflip	25.58	0.13	26.0	0.258	1.102	0.284
	NR n77/1 @1	6	Right Tilted	633334	3500.01	Unflip	25.58	-0.06	26.0	0.118	1.102	0.130
	NR n77/1 @1	6	Left Cheek	633334	3500.01	Unflip	25.58	-0.07	26.0	0.182	1.102	0.201
	NR n77/1 @1	6	Left Tilted	633334	3500.01	Unflip	25.58	0.01	26.0	0.074	1.102	0.082
19	NR n77/135@67	6	Right Cheek	633334	3500.01	Unflip	26.27	0.08	26.5	0.303	1.054	0.319
	NR n77/135@67	6	Right Tilted	633334	3500.01	Unflip	26.27	-0.10	26.5	0.135	1.054	0.142
	NR n77/135@67	6	Left Cheek	633334	3500.01	Unflip	26.27	0.19	26.5	0.222	1.054	0.234
	NR n77/135@67	6	Left Tilted	633334	3500.01	Unflip	26.27	0.15	26.5	0.087	1.054	0.092
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3550MHz~3700MHz) (100MHz)DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1 @1	6	Right Cheek	643332	3649.98	Unflip	25.47	-0.03	25.5	0.259	1.007	0.261
	NR n77/1 @1	6	Right Tilted	643332	3649.98	Unflip	25.47	-0.11	25.5	0.113	1.007	0.114
	NR n77/1 @1	6	Left Cheek	643332	3649.98	Unflip	25.47	0.19	25.5	0.185	1.007	0.186
	NR n77/1 @1	6	Left Tilted	643332	3649.98	Unflip	25.47	0.13	25.5	0.074	1.007	0.075
20	NR n77/135@67	6	Right Cheek	640000	3600	Unflip	26.21	-0.06	26.5	0.299	1.069	0.320
	NR n77/135@67	6	Right Tilted	640000	3600	Unflip	26.21	-0.11	26.5	0.133	1.069	0.142
	NR n77/135@67	6	Left Cheek	640000	3600	Unflip	26.21	-0.15	26.5	0.216	1.069	0.231
	NR n77/135@67	6	Left Tilted	640000	3600	Unflip	26.21	0.07	26.5	0.085	1.069	0.091
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3700MHz~3980MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1 @271	6	Right Cheek	662000	3930	Unflip	25.48	-0.14	25.5	0.375	1.005	0.377
	NR n77/1 @271	6	Right Tilted	662000	3930	Unflip	25.48	-0.02	25.5	0.169	1.005	0.170
	NR n77/1 @271	6	Left Cheek	662000	3930	Unflip	25.48	0.09	25.5	0.274	1.005	0.275
	NR n77/1 @271	6	Left Tilted	662000	3930	Unflip	25.48	0.12	25.5	0.106	1.005	0.107
21	NR n77/135@67	6	Right Cheek	650000	3750	Unflip	26.36	-0.08	26.5	0.438	1.033	0.452
	NR n77/135@67	6	Right Tilted	650000	3750	Unflip	26.36	0.08	26.5	0.195	1.033	0.201
	NR n77/135@67	6	Left Cheek	650000	3750	Unflip	26.36	0.02	26.5	0.317	1.033	0.327
	NR n77/135@67	6	Left Tilted	650000	3750	Unflip	26.36	-0.01	26.5	0.124	1.033	0.128
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	12	Right Cheek	11	2462	Unflip	16.64	0.18	17.0	0.099	1.086	1.000	0.107
	2.4GHz/802.11b	12	Right Tilted	11	2462	Unflip	16.64	0.01	17.0	0.123	1.086	1.000	0.134
	2.4GHz/802.11b	12	Left Cheek	11	2462	Unflip	16.64	-0.16	17.0	0.223	1.086	1.000	0.242
22	2.4GHz/802.11b	12	Left Tilted	11	2462	Unflip	16.64	0.04	17.0	0.239	1.086	1.000	0.260
	2.4GHz/802.11b	4	Right Cheek	6	2437	Unflip	16.64	-0.01	17.0	0.102	1.086	1.000	0.111
	2.4GHz/802.11b	4	Right Tilted	6	2437	Unflip	16.64	0.07	17.0	0.011	1.086	1.000	0.012
	2.4GHz/802.11b	4	Left Cheek	6	2437	Unflip	16.64	0.16	17.0	0.201	1.086	1.000	0.218
	2.4GHz/802.11b	4	Left Tilted	6	2437	Unflip	16.64	0.01	17.0	0.003	1.086	1.000	0.003
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ WLAN 5.2 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n40	12	Right Cheek	38	5190	Unflip	14.11	-0.09	14.5	0.066	1.094	1.000	0.072
	5.2GHz/802.11n40	12	Right Tilted	38	5190	Unflip	14.11	0.06	14.5	0.069	1.094	1.000	0.075
23	5.2GHz/802.11n40	12	Left Cheek	38	5190	Unflip	14.11	-0.09	14.5	0.158	1.094	1.000	0.173
	5.2GHz/802.11n40	12	Left Tilted	38	5190	Unflip	14.11	-0.02	14.5	0.142	1.094	1.000	0.155
	5.2GHz/802.11a	4	Right Cheek	40	5200	Unflip	12.40	-0.18	12.5	0.081	1.023	1.000	0.083
	5.2GHz/802.11a	4	Right Tilted	40	5200	Unflip	12.40	-0.04	12.5	0.012	1.023	1.000	0.012
	5.2GHz/802.11a	4	Left Cheek	40	5200	Unflip	12.40	-0.08	12.5	0.131	1.023	1.000	0.134
	5.2GHz/802.11a	4	Left Tilted	40	5200	Unflip	12.40	0.10	12.5	0.012	1.023	1.000	0.012
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ WLAN 5.3 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.3GHz/802.11a	12	Right Cheek	64	5320	Unflip	13.13	0.06	13.5	0.020	1.089	1.000	0.022
	5.3GHz/802.11a	12	Right Tilted	64	5320	Unflip	13.13	-0.08	13.5	0.002	1.089	1.000	0.002
	5.3GHz/802.11a	12	Left Cheek	64	5320	Unflip	13.13	-0.11	13.5	0.071	1.089	1.000	0.077
	5.3GHz/802.11a	12	Left Tilted	64	5320	Unflip	13.13	-0.02	13.5	0.004	1.089	1.000	0.004
	5.3GHz/802.11n20	4	Right Cheek	52	5260	Unflip	13.23	0.01	13.5	0.035	1.064	1.000	0.037
	5.3GHz/802.11n20	4	Right Tilted	52	5260	Unflip	13.23	0.00	13.5	0.003	1.064	1.000	0.003
24	5.3GHz/802.11n20	4	Left Cheek	52	5260	Unflip	13.23	0.00	13.5	0.081	1.064	1.000	0.086
	5.3GHz/802.11n20	4	Left Tilted	52	5260	Unflip	13.23	0.01	13.5	0.006	1.064	1.000	0.006
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ WLAN 5.6 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.6GHz/802.11n40	12	Right Cheek	102	5510	Unflip	13.07	-0.18	13.5	0.044	1.104	1.000	0.049
	5.6GHz/802.11n40	12	Right Tilted	102	5510	Unflip	13.07	-0.03	13.5	0.004	1.104	1.000	0.004
	5.6GHz/802.11n40	12	Left Cheek	102	5510	Unflip	13.07	-0.04	13.5	0.099	1.104	1.000	0.109
	5.6GHz/802.11n40	12	Left Tilted	102	5510	Unflip	13.07	-0.02	13.5	0.008	1.104	1.000	0.009
	5.6GHz/802.11n20	4	Right Cheek	140	5700	Unflip	14.03	0.20	14.5	0.074	1.114	1.000	0.082
	5.6GHz/802.11n20	4	Right Tilted	140	5700	Unflip	14.03	0.16	14.5	0.009	1.114	1.000	0.010
25	5.6GHz/802.11n20	4	Left Cheek	140	5700	Unflip	14.03	0.00	14.5	0.107	1.114	1.000	0.119
	5.6GHz/802.11n20	4	Left Tilted	140	5700	Unflip	14.03	0.20	14.5	0.012	1.114	1.000	0.013
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ WLAN 5.8 GHz Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	12	Right Cheek	149	5745	Unflip	12.61	-0.05	13.0	0.104	1.094	1.000	0.114
	5.8GHz/802.11a	12	Right Tilted	149	5745	Unflip	12.61	0.13	13.0	0.003	1.094	1.000	0.003
26	5.8GHz/802.11a	12	Left Cheek	149	5745	Unflip	12.61	0.16	13.0	0.194	1.094	1.000	0.212
	5.8GHz/802.11a	12	Left Tilted	149	5745	Unflip	12.61	-0.05	13.0	0.139	1.094	1.000	0.152
	5.8GHz/802.11n20	4	Right Cheek	165	5825	Unflip	14.40	0.06	14.5	0.095	1.023	1.000	0.097
	5.8GHz/802.11n20	4	Right Tilted	165	5825	Unflip	14.40	0.12	14.5	0.006	1.023	1.000	0.006
	5.8GHz/802.11n20	4	Left Cheek	165	5825	Unflip	14.40	0.07	14.5	0.159	1.023	1.000	0.163
	5.8GHz/802.11n20	4	Left Tilted	165	5825	Unflip	14.40	0.17	14.5	0.012	1.023	1.000	0.012
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ Bluetooth Head SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	12	Right Cheek	39	2441	Unflip	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
	BT/GFSK	12	Right Tilted	39	2441	Unflip	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
	BT/GFSK	12	Left Cheek	39	2441	Unflip	8.25	0.00	8.5	0.005	1.059	1.000	0.005
27	BT/GFSK	12	Left Tilted	39	2441	Unflip	8.25	0.09	8.5	0.011	1.059	1.000	0.011
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Per KDB 447498 D04v01, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- Per KDB 248227 D01v02r02, for 802.11b DSSS, when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
- Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. Cuz the maximum output power specified for OFDM and DSSS are 25.12mW(14.0dBm) and 50.12 mW(17.0dBm), the scaled SAR would be $0.260 \times (25.12/50.12) = 0.130 \text{ W/Kg} < 1.2 \text{ W/kg}$, therefore, SAR is not required for OFDM.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination
- Highlight part of test data means repeated test.
- *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show “<0.001 W/Kg” in the report.

15.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/4 slots	3	Front	128	824.2	Unflip	10mm	29.43	-0.16	29.5	0.472	1.016	0.480
	GPRS850/4 slots	3	Back	128	824.2	Unflip	10mm	29.43	0.03	29.5	0.596	1.016	0.606
	GPRS1900/4 slots	5	Front	661	1880	Unflip	10mm	25.81	0.15	26.0	0.415	1.045	0.434
	GPRS1900/4 slots	5	Back	661	1880	Unflip	10mm	25.81	0.02	26.0	0.424	1.045	0.443
	GPRS850/4 slots	3	Front	128	824.2	Flip	5mm	29.43	-0.10	29.5	0.220	1.016	0.224
28	GPRS850/4 slots	3	Back	128	824.2	Flip	5mm	29.43	-0.16	29.5	1.170	1.016	1.189
	GPRS850/4 slots	3	Back	190	836.6	Flip	5mm	28.93	-0.02	29.5	0.959	1.140	1.093
	GPRS850/4 slots	3	Back	251	848.8	Flip	5mm	28.81	0.05	29.5	0.982	1.172	1.151
	GPRS850/4 slots	3	Back	128	824.2	Flip	5mm	29.43	-0.14	29.5	1.065	1.016	1.082
29	GPRS1900/4 slots	5	Front	661	1880	Flip	5mm	25.81	-0.05	26.0	0.644	1.045	0.673
	GPRS1900/4 slots	5	Back	661	1880	Flip	5mm	25.81	0.15	26.0	0.186	1.045	0.194
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)						
Spatial Peak							Averaged over 1g						
Uncontrolled Exposure/General Population													

➤ WCDMA Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	5	Front	9400	1880	Unflip	10mm	22.33	0.11	22.5	0.091	1.040	0.095
	Band II/RMC	5	Back	9400	1880	Unflip	10mm	22.33	0.08	22.5	0.094	1.040	0.098
	Band IV/RMC	5	Front	1413	1732.6	Unflip	10mm	22.65	-0.19	23.0	0.095	1.084	0.103
	Band IV/RMC	5	Back	1413	1732.6	Unflip	10mm	22.65	0.20	23.0	0.100	1.084	0.108
	Band V/RMC	3	Front	4132	826.4	Unflip	10mm	23.04	-0.11	23.5	0.254	1.112	0.282
	Band V/RMC	3	Back	4132	826.4	Unflip	10mm	23.04	0.10	23.5	0.323	1.112	0.359
30	Band II/RMC	5	Front	9400	1880	Flip	5mm	22.33	-0.07	22.5	0.157	1.040	0.163
	Band II/RMC	5	Back	9400	1880	Flip	5mm	22.33	0.00	22.5	0.045	1.040	0.047
31	Band IV/RMC	5	Front	1413	1732.6	Flip	5mm	22.65	-0.06	23.0	0.147	1.084	0.159
	Band IV/RMC	5	Back	1413	1732.6	Flip	5mm	22.65	-0.11	23.0	0.043	1.084	0.047
	Band V/RMC	3	Front	4132	826.4	Flip	5mm	23.04	-0.08	23.5	0.145	1.112	0.161
32	Band V/RMC	3	Back	4132	826.4	Flip	5mm	23.04	-0.03	23.5	0.567	1.112	0.631
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)						
Spatial Peak							Averaged over 1g						
Uncontrolled Exposure/General Population													

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	5	Front	18700	1860	Unflip	10mm	23.02	-0.02	23.5	0.088	1.117	0.098
	Band2/1RB#49	5	Back	18700	1860	Unflip	10mm	23.02	0.04	23.5	0.069	1.117	0.077
	Band2/50%RB#0	5	Front	18900	1880	Unflip	10mm	21.91	-0.10	22.0	0.072	1.021	0.074
	Band2/50%RB#0	5	Back	18900	1880	Unflip	10mm	21.91	-0.17	22.0	0.055	1.021	0.056
	Band2/1RB#49	0	Front	18700	1860	Unflip	10mm	19.79	-0.09	20.0	0.006	1.050	0.007
	Band2/1RB#49	0	Back	18700	1860	Unflip	10mm	19.79	0.04	20.0	0.007	1.050	0.007
	Band2/50%RB#0	0	Front	19100	1900	Unflip	10mm	18.71	0.03	19.0	0.005	1.069	0.005
	Band2/50%RB#0	0	Back	19100	1900	Unflip	10mm	18.71	0.16	19.0	0.006	1.069	0.006
33	Band2/1RB#49	5	Front	18700	1860	Flip	5mm	23.02	-0.18	23.5	0.163	1.117	0.182
	Band2/1RB#49	5	Back	18700	1860	Flip	5mm	23.02	0.12	23.5	0.048	1.117	0.053
	Band2/50%RB#0	5	Front	18900	1880	Flip	5mm	21.91	-0.20	22.0	0.142	1.021	0.145
	Band2/50%RB#0	5	Back	18900	1880	Flip	5mm	21.91	0.05	22.0	0.041	1.021	0.042
	Band2/1RB#49	0	Front	18700	1860	Flip	5mm	19.79	0.01	20.0	0.031	1.050	0.032
	Band2/1RB#49	0	Back	18700	1860	Flip	5mm	19.79	0.17	20.0	0.002	1.050	0.002
	Band2/50%RB#0	0	Front	19100	1900	Flip	5mm	18.71	0.11	19.0	0.027	1.069	0.029
	Band2/50%RB#0	0	Back	19100	1900	Flip	5mm	18.71	-0.15	19.0	0.010	1.069	0.011
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	3	Front	20450	829	Unflip	10mm	23.67	-0.05	24.0	0.272	1.079	0.293
	Band5/1RB#24	3	Back	20450	829	Unflip	10mm	23.67	-0.14	24.0	0.300	1.079	0.324
	Band5/50%RB#24	3	Front	20450	829	Unflip	10mm	22.49	0.03	22.5	0.230	1.002	0.230
	Band5/50%RB#24	3	Back	20450	829	Unflip	10mm	22.49	-0.05	22.5	0.291	1.002	0.292
	Band5/1RB#24	3	Front	20450	829	Flip	5mm	23.67	-0.07	24.0	0.118	1.079	0.127
34	Band5/1RB#24	3	Back	20450	829	Flip	5mm	23.67	-0.03	24.0	0.630	1.079	0.680
	Band5/50%RB#24	3	Front	20450	829	Flip	5mm	22.49	0.02	22.5	0.103	1.002	0.103
	Band5/50%RB#24	3	Back	20450	829	Flip	5mm	22.49	0.10	22.5	0.544	1.002	0.545
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	5	Front	20850	2510	Unflip	10mm	22.29	0.00	22.5	0.055	1.050	0.058
	Band7/1RB#49	5	Back	20850	2510	Unflip	10mm	22.29	-0.02	22.5	0.066	1.050	0.070
	Band7/50%RB#24	5	Front	20850	2510	Unflip	10mm	21.21	-0.04	21.5	0.049	1.069	0.052
	Band7/50%RB#24	5	Back	20850	2510	Unflip	10mm	21.21	-0.02	21.5	0.062	1.069	0.066
	Band7/1RB#49	0	Front	20850	2510	Unflip	10mm	19.14	0.07	20.0	0.098	1.219	0.119
	Band7/1RB#49	0	Back	20850	2510	Unflip	10mm	19.14	0.15	20.0	0.127	1.219	0.155
	Band7/50%RB#0	0	Front	21350	2560	Unflip	10mm	18.03	0.08	18.5	0.084	1.114	0.094
	Band7/50%RB#0	0	Back	21350	2560	Unflip	10mm	18.03	0.07	18.5	0.109	1.114	0.121
	Band7/1RB#49	5	Front	20850	2510	Flip	5mm	22.29	0.17	22.5	0.131	1.050	0.138
	Band7/1RB#49	5	Back	20850	2510	Flip	5mm	22.29	-0.13	22.5	0.023	1.050	0.024
	Band7/50%RB#24	5	Front	20850	2510	Flip	5mm	21.21	0.11	21.5	0.116	1.069	0.124
	Band7/50%RB#24	5	Back	20850	2510	Flip	5mm	21.21	0.03	21.5	0.021	1.069	0.022
35	Band7/1RB#49	0	Front	20850	2510	Flip	5mm	19.14	0.07	20.0	0.199	1.219	0.243
	Band7/1RB#49	0	Back	20850	2510	Flip	5mm	19.14	0.07	20.0	0.114	1.219	0.139
	Band7/50%RB#0	0	Front	21350	2560	Flip	5mm	18.03	0.15	18.5	0.174	1.114	0.194
	Band7/50%RB#0	0	Back	21350	2560	Flip	5mm	18.03	0.08	18.5	0.099	1.114	0.110
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#0	3	Front	23060	704	Unflip	10mm	23.65	-0.06	24.0	0.237	1.084	0.257
	Band12/1RB#0	3	Back	23060	704	Unflip	10mm	23.65	0.03	24.0	0.317	1.084	0.344
	Band12/50%RB#24	3	Front	23060	704	Unflip	10mm	22.55	0.07	23.0	0.224	1.109	0.248
	Band12/50%RB#24	3	Back	23060	704	Unflip	10mm	22.55	0.02	23.0	0.031	1.109	0.034
	Band12/1RB#0	3	Front	23060	704	Flip	5mm	23.65	-0.03	24.0	0.071	1.084	0.077
36	Band12/1RB#0	3	Back	23060	704	Flip	5mm	23.65	0.03	24.0	0.494	1.084	0.535
	Band12/50%RB#24	3	Front	23060	704	Flip	5mm	22.55	0.05	23.0	0.062	1.109	0.069
	Band12/50%RB#24	3	Back	23060	704	Flip	5mm	22.55	-0.16	23.0	0.433	1.109	0.480
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 13(10MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#49	3	Front	23230	782	Unflip	10mm	23.44	0.00	23.5	0.235	1.014	0.238
	Band13/1RB#49	3	Back	23230	782	Unflip	10mm	23.44	0.02	23.5	0.311	1.014	0.315
	Band13/50%RB#24	3	Front	23230	782	Unflip	10mm	22.36	0.11	22.5	0.213	1.033	0.220
	Band13/50%RB#24	3	Back	23230	782	Unflip	10mm	22.36	0.19	22.5	0.296	1.033	0.306
	Band13/1RB#49	3	Front	23230	782	Flip	5mm	23.44	-0.05	23.5	0.092	1.014	0.093
37	Band13/1RB#49	3	Back	23230	782	Flip	5mm	23.44	0.11	23.5	0.504	1.014	0.511
	Band13/50%RB#24	3	Front	23230	782	Flip	5mm	22.36	0.06	22.5	0.083	1.033	0.086
	Band13/50%RB#24	3	Back	23230	782	Flip	5mm	22.36	-0.07	22.5	0.456	1.033	0.471
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#99	5	Front	41490	2680	Unflip	10mm	22.38	0.16	22.5	0.044	1.028	1.008	0.045
	Band41/1RB#99	5	Back	41490	2680	Unflip	10mm	22.38	0.00	22.5	0.058	1.028	1.008	0.060
	Band41/50%RB#49	5	Front	41490	2680	Unflip	10mm	21.36	-0.03	21.5	0.036	1.033	1.008	0.037
	Band41/50%RB#49	5	Back	41490	2680	Unflip	10mm	21.36	0.16	21.5	0.047	1.033	1.008	0.049
	Band41/1RB#99	0	Front	40620	2593	Unflip	10mm	19.48	0.10	19.5	0.019	1.005	1.008	0.019
	Band41/1RB#99	0	Back	40620	2593	Unflip	10mm	19.48	0.09	19.5	0.023	1.005	1.008	0.023
	Band41/50%RB#49	0	Front	41490	2680	Unflip	10mm	18.50	0.10	19.0	0.016	1.122	1.008	0.018
	Band41/50%RB#49	0	Back	41490	2680	Unflip	10mm	18.50	0.12	19.0	0.020	1.122	1.008	0.023
38	Band41/1RB#99	5	Front	41490	2680	Flip	5mm	22.38	0.06	22.5	0.133	1.028	1.008	0.138
	Band41/1RB#99	5	Back	41490	2680	Flip	5mm	22.38	-0.02	22.5	0.025	1.028	1.008	0.026
	Band41/50%RB#49	5	Front	41490	2680	Flip	5mm	21.36	-0.04	21.5	0.118	1.033	1.008	0.123
	Band41/50%RB#49	5	Back	41490	2680	Flip	5mm	21.36	0.02	21.5	0.022	1.033	1.008	0.023
	Band41/1RB#99	0	Front	40620	2593	Flip	5mm	19.48	0.04	19.5	0.061	1.005	1.008	0.062
	Band41/1RB#99	0	Back	40620	2593	Flip	5mm	19.48	-0.18	19.5	0.031	1.005	1.008	0.031
	Band41/50%RB#49	0	Front	41490	2680	Flip	5mm	18.50	0.09	19.0	0.052	1.122	1.008	0.059
	Band41/50%RB#49	0	Back	41490	2680	Flip	5mm	18.50	0.02	19.0	0.027	1.122	1.008	0.031
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g							

➤ TDD-LTE Band 42(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band42/1RB#49	6	Front	42990	3540	Unflip	10mm	22.37	0.20	22.5	0.132	1.03	1.008	0.137
	Band42/1RB#49	6	Back	42990	3540	Unflip	10mm	22.37	0.12	22.5	0.171	1.03	1.008	0.178
	Band42/50%RB#49	6	Front	42990	3540	Unflip	10mm	21.34	0.06	21.5	0.114	1.038	1.008	0.119
	Band42/50%RB#49	6	Back	42990	3540	Unflip	10mm	21.34	-0.18	21.5	0.148	1.038	1.008	0.155
39	Band42/1RB#49	6	Front	42990	3540	Flip	5mm	22.37	-0.08	22.5	0.317	1.03	1.008	0.329
	Band42/1RB#49	6	Back	42990	3540	Flip	5mm	22.37	0.00	22.5	0.182	1.03	1.008	0.189
	Band42/50%RB#49	6	Front	42990	3540	Flip	5mm	21.34	0.08	21.5	0.277	1.038	1.008	0.290
	Band42/50%RB#49	6	Back	42990	3540	Flip	5mm	21.34	0.07	21.5	0.159	1.038	1.008	0.166
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g							

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	5	Front	132072	1720	Unflip	10mm	23.24	-0.20	23.5	0.121	1.062	0.129
	Band66/1RB#49	5	Back	132072	1720	Unflip	10mm	23.24	-0.03	23.5	0.098	1.062	0.104
	Band66/50%RB#0	5	Front	132072	1720	Unflip	10mm	22.23	-0.10	22.50	0.111	1.064	0.118
	Band66/50%RB#0	5	Back	132072	1720	Unflip	10mm	22.23	-0.20	22.50	0.082	1.064	0.087
	Band66/1RB#49	0	Front	132322	1745	Unflip	10mm	20.20	-0.02	20.5	0.014	1.072	0.015
	Band66/1RB#49	0	Back	132322	1745	Unflip	10mm	20.20	0.04	20.5	0.017	1.072	0.018
	Band66/50%RB#49	0	Front	132572	1770	Unflip	10mm	19.11	-0.09	19.5	0.012	1.094	0.013
	Band66/50%RB#49	0	Back	132572	1770	Unflip	10mm	19.11	0.01	19.5	0.015	1.094	0.016
40	Band66/1RB#49	5	Front	132072	1720	Flip	5mm	23.24	-0.15	23.5	0.203	1.062	0.216
	Band66/1RB#49	5	Back	132072	1720	Flip	5mm	23.24	-0.06	23.5	0.053	1.062	0.056
	Band66/50%RB#0	5	Front	132072	1720	Flip	5mm	22.23	-0.09	22.5	0.178	1.064	0.189
	Band66/50%RB#0	5	Back	132072	1720	Flip	5mm	22.23	-0.16	22.5	0.046	1.064	0.049
	Band66/1RB#49	0	Front	132322	1745	Flip	5mm	20.20	0.09	20.5	0.060	1.072	0.064
	Band66/1RB#49	0	Back	132322	1745	Flip	5mm	20.20	0.02	20.5	0.011	1.072	0.011
	Band66/50%RB#49	0	Front	132572	1770	Flip	5mm	19.11	0.01	19.5	0.052	1.094	0.057
	Band66/50%RB#49	0	Back	132572	1770	Flip	5mm	19.11	-0.16	19.5	0.009	1.094	0.010
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ NR n5(20MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n5/1 @49	3	Front	167800	839	Unflip	10mm	22.92	0.05	23.0	0.177	1.019	0.180
	NR n5/1 @49	3	Back	167800	839	Unflip	10mm	22.92	-0.14	23.0	0.237	1.019	0.242
	NR n5/25 @12	3	Front	167800	839	Unflip	10mm	23.05	0.05	23.5	0.300	1.109	0.333
	NR n5/25 @12	3	Back	167800	839	Unflip	10mm	23.05	0.00	23.5	0.349	1.109	0.387
	NR n5/1 @49	3	Front	167800	839	Flip	5mm	22.92	-0.05	23.0	0.084	1.019	0.086
	NR n5/1 @49	3	Back	167800	839	Flip	5mm	22.92	-0.02	23.0	0.453	1.019	0.462
	NR n5/25 @12	3	Front	167800	839	Flip	5mm	23.05	-0.05	23.5	0.144	1.109	0.160
41	NR n5/25 @12	3	Back	167800	839	Flip	5mm	23.05	0.03	23.5	0.580	1.109	0.643
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ NR n7(20MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n7/1 @49	5	Front	512000	2560	Unflip	10mm	22.47	0.08	22.5	0.091	1.007	0.092
	NR n7/1 @49	5	Back	512000	2560	Unflip	10mm	22.47	-0.11	22.5	0.109	1.007	0.110
	NR n7/25 @12	5	Front	512000	2560	Unflip	10mm	22.59	0.20	23.0	0.109	1.099	0.120
	NR n7/25 @12	5	Back	512000	2560	Unflip	10mm	22.59	0.10	23.0	0.143	1.099	0.157
	NR n7/1 @49	5	Front	512000	2560	Flip	5mm	22.47	-0.12	22.5	0.275	1.007	0.277
	NR n7/1 @49	5	Back	512000	2560	Flip	5mm	22.47	0.00	22.5	0.049	1.007	0.049
42	NR n7/25 @12	5	Front	512000	2560	Flip	5mm	22.59	0.02	23.0	0.331	1.099	0.364
	NR n7/25 @12	5	Back	512000	2560	Flip	5mm	22.59	-0.11	23.0	0.062	1.099	0.068
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g							

➤ NR n12(20MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n12/1@36	3	Front	141500	707.5	Unflip	10mm	23.15	-0.10	23.5	0.102	1.084	0.111
	NR n12/1@36	3	Back	141500	707.5	Unflip	10mm	23.15	0.05	23.5	0.154	1.084	0.167
	NR n12/18@9	3	Front	141300	706.5	Unflip	10mm	23.24	-0.10	23.5	0.158	1.062	0.168
	NR n12/18@9	3	Back	141300	706.5	Unflip	10mm	23.24	0.06	23.5	0.214	1.062	0.227
	NR n12/1@36	3	Front	141500	707.5	Flip	5mm	23.15	-0.10	23.5	0.073	1.084	0.079
	NR n12/1@36	3	Back	141500	707.5	Flip	5mm	23.15	-0.08	23.5	0.401	1.084	0.435
	NR n12/18@9	3	Front	141300	706.5	Flip	5mm	23.24	-0.14	23.5	0.081	1.062	0.086
43	NR n12/18@9	3	Back	141300	706.5	Flip	5mm	23.24	0.01	23.5	0.457	1.062	0.485
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n41(100MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n41/1@271	5	Front	509202	2546.01	Unflip	10mm	24.76	0.12	25.0	0.076	1.057	0.080
	NR n41/1@271	5	Back	509202	2546.01	Unflip	10mm	24.76	-0.08	25.0	0.103	1.057	0.109
	NR n41/135@67	5	Front	518598	2592.99	Unflip	10mm	25.51	0.05	26.0	0.113	1.119	0.126
	NR n41/135@67	5	Back	518598	2592.99	Unflip	10mm	25.51	-0.02	26.0	0.133	1.119	0.149
	NR n41/1@271	5	Front	509202	2546.01	Flip	5mm	24.76	-0.17	25.0	0.263	1.057	0.278
	NR n41/1@271	5	Back	509202	2546.01	Flip	5mm	24.76	0.13	25.0	0.049	1.057	0.052
44	NR n41/135@67	5	Front	518598	2592.99	Flip	5mm	25.51	-0.03	26.0	0.329	1.119	0.368
	NR n41/135@67	5	Back	518598	2592.99	Flip	5mm	25.51	-0.09	26.0	0.066	1.119	0.074
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n66(40MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n66/1@104	5	Front	349000	1745	Unflip	10mm	22.61	0.14	23.0	0.071	1.094	0.078
	NR n66/1@104	5	Back	349000	1745	Unflip	10mm	22.61	0.01	23.0	0.079	1.094	0.086
	NR n66/50@25	5	Front	346000	1730	Unflip	10mm	22.88	-0.05	23.0	0.089	1.028	0.092
	NR n66/50@25	5	Back	346000	1730	Unflip	10mm	22.88	0.04	23.0	0.099	1.028	0.102
	NR n66/1@104	5	Front	349000	1745	Flip	5mm	22.61	0.03	23.0	0.136	1.094	0.149
	NR n66/1@104	5	Back	349000	1745	Flip	5mm	22.61	0.12	23.0	0.054	1.094	0.059
45	NR n66/50@25	5	Front	346000	1730	Flip	5mm	22.88	-0.08	23.0	0.188	1.028	0.193
	NR n66/50@25	5	Back	346000	1730	Flip	5mm	22.88	-0.09	23.0	0.074	1.028	0.076
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n77(3450MHz~3550MHz) (100MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@1	6	Front	633334	3500.01	Unflip	10mm	25.58	-0.03	26.0	0.020	1.102	0.022
	NR n77/1@1	6	Back	633334	3500.01	Unflip	10mm	25.58	-0.16	26.0	0.038	1.102	0.042
	NR n77/135@67	6	Front	633334	3500.01	Unflip	10mm	26.27	0.08	27.0	0.030	1.183	0.035
	NR n77/135@67	6	Back	633334	3500.01	Unflip	10mm	26.27	0.19	27.0	0.056	1.183	0.066
	NR n77/1@1	6	Front	633334	3500.01	Flip	5mm	25.58	-0.16	26.0	0.061	1.102	0.067
	NR n77/1@1	6	Back	633334	3500.01	Flip	5mm	25.58	-0.01	26.0	0.011	1.102	0.012
46	NR n77/135@67	6	Front	633334	3500.01	Flip	5mm	26.27	0.00	27.0	0.093	1.183	0.110
	NR n77/135@67	6	Back	633334	3500.01	Flip	5mm	26.27	0.14	27.0	0.016	1.183	0.019
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3550MHz~3700MHz) (100MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@1	6	Front	643332	3649.98	Unflip	10mm	25.47	0.12	25.5	0.018	1.007	0.018
	NR n77/1@1	6	Back	643332	3649.98	Unflip	10mm	25.47	0.03	25.5	0.031	1.007	0.031
	NR n77/135@67	6	Front	640000	3600	Unflip	10mm	26.21	0.05	26.5	0.022	1.069	0.024
	NR n77/135@67	6	Back	640000	3600	Unflip	10mm	26.21	0.04	26.5	0.036	1.069	0.038
	NR n77/1@1	6	Front	643332	3649.98	Flip	5mm	25.47	0.02	25.5	0.049	1.007	0.049
	NR n77/1@1	6	Back	643332	3649.98	Flip	5mm	25.47	-0.19	25.5	0.008	1.007	0.008
47	NR n77/135@67	6	Front	640000	3600	Flip	5mm	26.21	0.00	26.5	0.076	1.069	0.081
	NR n77/135@67	6	Back	640000	3600	Flip	5mm	26.21	0.00	26.5	0.013	1.069	0.014
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3700MHz~3980MHz)(100MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@271	6	Front	662000	3930	Unflip	10mm	25.48	0.02	25.5	0.008	1.005	0.008
	NR n77/1@271	6	Back	662000	3930	Unflip	10mm	25.48	-0.04	25.5	0.011	1.005	0.011
	NR n77/135@67	6	Front	650000	3750	Unflip	10mm	26.36	-0.01	27.0	0.012	1.159	0.014
	NR n77/135@67	6	Back	650000	3750	Unflip	10mm	26.36	0.08	27.0	0.016	1.159	0.018
	NR n77/1@271	6	Front	662000	3930	Flip	5mm	25.48	-0.02	25.5	0.063	1.005	0.063
	NR n77/1@271	6	Back	662000	3930	Flip	5mm	25.48	0.06	25.5	0.012	1.005	0.012
48	NR n77/135@67	6	Front	650000	3750	Flip	5mm	26.36	0.00	27.0	0.085	1.159	0.099
	NR n77/135@67	6	Back	650000	3750	Flip	5mm	26.36	-0.18	27.0	0.016	1.159	0.019
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ WLAN 2.4GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	12	Front	11	2462	Unflip	10mm	16.64	-0.09	17.0	0.019	1.086	1.000	0.021
	2.4GHz/802.11b	12	Back	11	2462	Unflip	10mm	16.64	0.00	17.0	0.022	1.086	1.000	0.023
	2.4GHz/802.11b	4	Front	6	2437	Unflip	10mm	16.64	0.01	17.0	0.060	1.086	1.000	0.065
	2.4GHz/802.11b	4	Back	6	2437	Unflip	10mm	16.64	0.08	17.0	0.031	1.086	1.000	0.034
	2.4GHz/802.11b	12	Front	11	2462	Flip	5mm	16.64	-0.01	17.0	0.046	1.086	1.000	0.050
	2.4GHz/802.11b	12	Back	11	2462	Flip	5mm	16.64	0.00	17.0	0.010	1.086	1.000	0.011
49	2.4GHz/802.11b	4	Front	6	2437	Flip	5mm	16.64	-0.07	17.0	0.303	1.086	1.000	0.329
	2.4GHz/802.11b	4	Back	6	2437	Flip	5mm	16.64	0.10	17.0	0.072	1.086	1.000	0.078
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)							
Spatial Peak														
Uncontrolled Exposure/General Population							Averaged over 1g							

➤ WLAN 5.2GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n40	12	Front	38	5190	Unflip	10mm	14.11	-0.11	14.5	0.024	1.094	1.000	0.026
	5.2GHz/802.11n40	12	Back	38	5190	Unflip	10mm	14.11	0.13	14.5	0.011	1.094	1.000	0.012
50	5.2GHz/802.11a	4	Front	40	5200	Unflip	10mm	12.40	-0.01	12.5	0.035	1.023	1.000	0.036
	5.2GHz/802.11a	4	Back	40	5200	Unflip	10mm	12.40	0.19	12.5	0.003	1.023	1.000	0.003
	5.2GHz/802.11n40	12	Front	38	5190	Flip	5mm	14.11	-0.04	14.5	0.032	1.094	1.000	0.035
	5.2GHz/802.11n40	12	Back	38	5190	Flip	5mm	14.11	0.12	14.5	0.002	1.094	1.000	0.002
	5.2GHz/802.11a	4	Front	40	5200	Flip	5mm	12.40	0.19	12.5	0.020	1.023	1.000	0.020
	5.2GHz/802.11a	4	Back	40	5200	Flip	5mm	12.40	-0.17	12.5	0.004	1.023	1.000	0.004
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)							
Spatial Peak														
Uncontrolled Exposure/General Population							Averaged over 1g							

➤ WLAN 5.3GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.3GHz/802.11a	12	Front	64	5320	Unflip	10mm	13.13	-0.13	13.5	0.016	1.089	1.000	0.017
	5.3GHz/802.11a	12	Back	64	5320	Unflip	10mm	13.13	-0.01	13.5	0.009	1.089	1.000	0.010
	5.3GHz/802.11n20	4	Front	52	5260	Unflip	10mm	13.23	0.13	13.5	0.015	1.064	1.000	0.016
	5.3GHz/802.11n20	4	Back	52	5260	Unflip	10mm	13.23	-0.13	13.5	0.001	1.064	1.000	0.001
51	5.3GHz/802.11a	12	Front	64	5320	Flip	5mm	13.13	0.00	13.5	0.017	1.089	1.000	0.019
	5.3GHz/802.11a	12	Back	64	5320	Flip	5mm	13.13	0.10	13.5	0.002	1.089	1.000	0.002
	5.3GHz/802.11n20	4	Front	52	5260	Flip	5mm	13.23	-0.11	13.5	0.007	1.064	1.000	0.007
	5.3GHz/802.11n20	4	Back	52	5260	Flip	5mm	13.23	0.04	13.5	0.001	1.064	1.000	0.001
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)							
Spatial Peak														
Uncontrolled Exposure/General Population							Averaged over 1g							

➤ WLAN 5.6GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.6GHz/802.11n40	12	Front	102	5510	Unflip	10mm	13.07	0.19	13.5	0.026	1.104	1.000	0.029
	5.6GHz/802.11n40	12	Back	102	5510	Unflip	10mm	13.07	-0.16	13.5	0.013	1.104	1.000	0.014
	5.6GHz/802.11n20	4	Front	140	5700	Unflip	10mm	14.03	-0.02	14.5	0.020	1.114	1.000	0.022
	5.6GHz/802.11n20	4	Back	140	5700	Unflip	10mm	14.03	-0.17	14.5	0.003	1.114	1.000	0.003
52	5.6GHz/802.11n40	12	Front	102	5510	Flip	5mm	13.07	0.17	13.5	0.039	1.104	1.000	0.043
	5.6GHz/802.11n40	12	Back	102	5510	Flip	5mm	13.07	-0.11	13.5	0.004	1.104	1.000	0.004
	5.6GHz/802.11n20	4	Front	140	5700	Flip	5mm	14.03	0.06	14.5	0.013	1.114	1.000	0.014
	5.6GHz/802.11n20	4	Back	140	5700	Flip	5mm	14.03	-0.08	14.5	0.003	1.114	1.000	0.003
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 5.8GHz Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	12	Front	149	5745	Unflip	10mm	12.61	0.05	13.0	0.025	1.094	1.000	0.027
	5.8GHz/802.11a	12	Back	149	5745	Unflip	10mm	12.61	0.19	13.0	0.011	1.094	1.000	0.012
	5.8GHz/802.11n20	4	Front	165	5825	Unflip	10mm	14.40	-0.09	14.5	0.021	1.023	1.000	0.021
	5.8GHz/802.11n20	4	Back	165	5825	Unflip	10mm	14.40	0.08	14.5	0.002	1.023	1.000	0.002
53	5.8GHz/802.11a	12	Front	149	5745	Flip	5mm	12.61	-0.04	13.0	0.044	1.094	1.000	0.048
	5.8GHz/802.11a	12	Back	149	5745	Flip	5mm	12.61	0.10	13.0	0.006	1.094	1.000	0.007
	5.8GHz/802.11n20	4	Front	165	5825	Flip	5mm	14.40	-0.20	14.5	0.011	1.023	1.000	0.011
	5.8GHz/802.11n20	4	Back	165	5825	Flip	5mm	14.40	0.17	14.5	0.001	1.023	1.000	0.001
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g						

➤ Bluetooth Body SAR

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
54	BT/GFSK	12	Front	39	2441	Unflip	10mm	8.25	0.08	8.5	0.006	1.059	1.000	0.007
	BT/GFSK	12	Back	39	2441	Unflip	10mm	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
	BT/GFSK	12	Front	39	2441	Flip	5mm	8.25	-0.09	8.5	0.005	1.059	1.000	0.005
	BT/GFSK	12	Back	39	2441	Flip	5mm	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g						

Note:

- Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
- Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call is selected to be tested.
- Per KDB 648474 D04v01r03, when the *Reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
- Per KDB 447498 D04v01, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure

configuration, wireless mode and frequency band combination.

10. Highlight part of test data means repeated test.
11. *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show "<0.001 W/Kg" in the report.

15.3 Body SAR in Hotspot Mode

➤ GSM Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/4 slots	3	Front	128	824.2	Unflip	10mm	29.43	-0.16	29.5	0.472	1.016	0.480
	GPRS850/4 slots	3	Back	128	824.2	Unflip	10mm	29.43	0.03	29.5	0.596	1.016	0.606
	GPRS850/4 slots	3	Left	128	824.2	Unflip	10mm	29.43	-0.09	29.5	0.240	1.016	0.244
	GPRS850/4 slots	3	Bottom	128	824.2	Unflip	10mm	29.43	-0.07	29.5	0.247	1.016	0.251
	GPRS1900/4 slots	5	Front	661	1880	Unflip	10mm	25.81	0.15	26.0	0.415	1.045	0.434
	GPRS1900/4 slots	5	Back	661	1880	Unflip	10mm	25.81	0.02	26.0	0.424	1.045	0.443
	GPRS1900/4 slots	5	Left	661	1880	Unflip	10mm	25.81	0.01	26.0	0.647	1.045	0.676
	GPRS1900/4 slots	5	Top	661	1880	Unflip	10mm	25.81	-0.11	26.0	0.206	1.045	0.215
	GPRS850/4 slots	3	Front	128	824.2	Flip	5mm	29.43	-0.10	29.5	0.220	1.016	0.224
28	GPRS850/4 slots	3	Back	128	824.2	Flip	5mm	29.43	-0.16	29.5	1.170	1.016	1.189
	GPRS850/4 slots	3	Left	128	824.2	Flip	5mm	29.43	-0.09	29.5	0.773	1.016	0.785
	GPRS850/4 slots	3	Bottom	128	824.2	Flip	5mm	29.43	-0.17	29.5	0.431	1.016	0.438
	GPRS850/4 slots	3	Back	190	836.6	Flip	5mm	28.93	-0.02	29.5	0.959	1.140	1.093
	GPRS850/4 slots	3	Back	251	848.8	Flip	5mm	28.81	0.05	29.5	0.982	1.172	1.151
	GPRS850/4 slots	3	Back	128	824.2	Flip	5mm	29.43	-0.14	29.5	1.065	1.016	1.082
	GPRS1900/4 slots	5	Front	661	1880	Flip	5mm	25.81	-0.05	26.0	0.644	1.045	0.673
	GPRS1900/4 slots	5	Back	661	1880	Flip	5mm	25.81	0.15	26.0	0.186	1.045	0.194
55	GPRS1900/4 slots	5	Left	661	1880	Flip	5mm	25.81	0.05	26.0	0.893	1.045	0.933
	GPRS1900/4 slots	5	Bottom	661	1880	Flip	5mm	25.81	0.14	26.0	0.332	1.045	0.347
	GPRS1900/4 slots	5	Left	512	1850.2	Flip	5mm	25.79	0.03	26.0	0.724	1.050	0.760
	GPRS1900/4 slots	5	Left	810	1909.8	Flip	5mm	25.67	0.14	26.0	0.815	1.079	0.879
	GPRS1900/4 slots	5	Left	661	1880	Flip	5mm	25.81	0.11	26.0	0.862	1.045	0.901
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

> WCDMA Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band II/RMC	5	Front	9400	1880	Unflip	10mm	22.33	0.11	22.5	0.091	1.040	0.095
	Band II/RMC	5	Back	9400	1880	Unflip	10mm	22.33	0.08	22.5	0.094	1.040	0.098
	Band II/RMC	5	Left	9400	1880	Unflip	10mm	22.33	0.10	22.5	0.130	1.040	0.135
	Band II/RMC	5	Top	9400	1880	Unflip	10mm	22.33	0.17	22.5	0.043	1.040	0.045
	Band IV/RMC	5	Front	1413	1732.6	Unflip	10mm	22.65	-0.19	23.0	0.095	1.084	0.103
	Band IV/RMC	5	Back	1413	1732.6	Unflip	10mm	22.65	0.20	23.0	0.100	1.084	0.108
	Band IV/RMC	5	Left	1413	1732.6	Unflip	10mm	22.65	0.13	23.0	0.136	1.084	0.147
	Band IV/RMC	5	Top	1413	1732.6	Unflip	10mm	22.65	0.06	23.0	0.051	1.084	0.055
	Band V/RMC	3	Front	4132	826.4	Unflip	10mm	23.04	-0.11	23.5	0.254	1.112	0.282
	Band V/RMC	3	Back	4132	826.4	Unflip	10mm	23.04	0.10	23.5	0.323	1.112	0.359
	Band V/RMC	3	Left	4132	826.4	Unflip	10mm	23.04	0.01	23.5	0.142	1.112	0.158
	Band V/RMC	3	Bottom	4132	826.4	Unflip	10mm	23.04	0.02	23.5	0.115	1.112	0.128
	Band II/RMC	5	Front	9400	1880	Flip	5mm	22.33	-0.07	22.5	0.157	1.040	0.163
	Band II/RMC	5	Back	9400	1880	Flip	5mm	22.33	0.00	22.5	0.045	1.040	0.047
56	Band II/RMC	5	Left	9400	1880	Flip	5mm	22.33	0.07	22.5	0.261	1.040	0.271
	Band II/RMC	5	Bottom	9400	1880	Flip	5mm	22.33	0.14	22.5	0.099	1.040	0.103
	Band IV/RMC	5	Front	1413	1732.6	Flip	5mm	22.65	-0.06	23.0	0.147	1.084	0.159
	Band IV/RMC	5	Back	1413	1732.6	Flip	5mm	22.65	-0.11	23.0	0.043	1.084	0.047
57	Band IV/RMC	5	Left	1413	1732.6	Flip	5mm	22.65	0.03	23.0	0.254	1.084	0.275
	Band IV/RMC	5	Bottom	1413	1732.6	Flip	5mm	22.65	-0.16	23.0	0.078	1.084	0.085
	Band V/RMC	3	Front	4132	826.4	Flip	5mm	23.04	-0.08	23.5	0.145	1.112	0.161
32	Band V/RMC	3	Back	4132	826.4	Flip	5mm	23.04	-0.03	23.5	0.567	1.112	0.631
	Band V/RMC	3	Left	4132	826.4	Flip	5mm	23.04	-0.15	23.5	0.288	1.112	0.320
	Band V/RMC	3	Bottom	4132	826.4	Flip	5mm	23.04	-0.14	23.5	0.339	1.112	0.377
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	5	Front	18700	1860	Unflip	10mm	23.02	-0.02	23.5	0.088	1.117	0.098
	Band2/1RB#49	5	Back	18700	1860	Unflip	10mm	23.02	0.04	23.5	0.069	1.117	0.077
	Band2/1RB#49	5	Left	18700	1860	Unflip	10mm	23.02	-0.09	23.5	0.120	1.117	0.134
	Band2/1RB#49	5	Top	18700	1860	Unflip	10mm	23.02	0.06	23.5	0.018	1.117	0.020
	Band2/50%RB#0	5	Front	18900	1880	Unflip	10mm	21.91	-0.10	22.0	0.072	1.021	0.074
	Band2/50%RB#0	5	Back	18900	1880	Unflip	10mm	21.91	-0.17	22.0	0.055	1.021	0.056
	Band2/50%RB#0	5	Left	18900	1880	Unflip	10mm	21.91	0.19	22.0	0.112	1.021	0.114
	Band2/50%RB#0	5	Top	18900	1880	Unflip	10mm	21.91	0.03	22.0	0.013	1.021	0.013
	Band2/1RB#49	0	Front	18700	1860	Unflip	10mm	19.79	-0.09	20.0	0.006	1.050	0.007
	Band2/1RB#49	0	Back	18700	1860	Unflip	10mm	19.79	0.04	20.0	0.007	1.050	0.007
	Band2/1RB#49	0	Right	18700	1860	Unflip	10mm	19.79	-0.16	20.0	0.009	1.050	0.010
	Band2/1RB#49	0	Top	18700	1860	Unflip	10mm	19.79	-0.04	20.0	0.003	1.050	0.003
	Band2/50%RB#0	0	Front	19100	1900	Unflip	10mm	18.71	0.03	19.0	0.005	1.069	0.005
	Band2/50%RB#0	0	Back	19100	1900	Unflip	10mm	18.71	0.16	19.0	0.006	1.069	0.006
	Band2/50%RB#0	0	Right	19100	1900	Unflip	10mm	18.71	0.18	19.0	0.007	1.069	0.007
	Band2/50%RB#0	0	Top	19100	1900	Unflip	10mm	18.71	0.04	19.0	0.003	1.069	0.003
	Band2/1RB#49	5	Front	18700	1860	Flip	5mm	23.02	-0.18	23.5	0.163	1.117	0.182
	Band2/1RB#49	5	Back	18700	1860	Flip	5mm	23.02	0.12	23.5	0.048	1.117	0.053
58	Band2/1RB#49	5	Left	18700	1860	Flip	5mm	23.02	0.04	23.5	0.469	1.117	0.524
	Band2/1RB#49	5	Bottom	18700	1860	Flip	5mm	23.02	0.11	23.5	0.035	1.117	0.039
	Band2/50%RB#0	5	Front	18900	1880	Flip	5mm	21.91	-0.20	22.0	0.142	1.021	0.145
	Band2/50%RB#0	5	Back	18900	1880	Flip	5mm	21.91	0.05	22.0	0.041	1.021	0.042
	Band2/50%RB#0	5	Left	18900	1880	Flip	5mm	21.91	-0.16	22.0	0.409	1.021	0.418
	Band2/50%RB#0	5	Bottom	18900	1880	Flip	5mm	21.91	0.10	22.0	0.030	1.021	0.031
	Band2/1RB#49	0	Front	18700	1860	Flip	5mm	19.79	0.01	20.0	0.031	1.050	0.032
	Band2/1RB#49	0	Back	18700	1860	Flip	5mm	19.79	0.17	20.0	0.002	1.050	0.002
	Band2/1RB#49	0	Right	18700	1860	Flip	5mm	19.79	0.01	20.0	0.030	1.050	0.031
	Band2/1RB#49	0	Bottom	18700	1860	Flip	5mm	19.79	0.00	20.0	0.016	1.050	0.017
	Band2/50%RB#0	0	Front	19100	1900	Flip	5mm	18.71	0.11	19.0	0.027	1.069	0.029
	Band2/50%RB#0	0	Back	19100	1900	Flip	5mm	18.71	-0.15	19.0	0.010	1.069	0.011
	Band2/50%RB#0	0	Right	19100	1900	Flip	5mm	18.71	0.03	19.0	0.026	1.069	0.028
	Band2/50%RB#0	0	Bottom	19100	1900	Flip	5mm	18.71	-0.02	19.0	0.014	1.069	0.015
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)						
Spatial Peak							Averaged over 1g						
Uncontrolled Exposure/General Population													

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	3	Front	20450	829	Unflip	10mm	23.67	-0.05	24.0	0.272	1.079	0.293
	Band5/1RB#24	3	Back	20450	829	Unflip	10mm	23.67	-0.14	24.0	0.300	1.079	0.324
	Band5/1RB#24	3	Left	20450	829	Unflip	10mm	23.67	0.16	24.0	0.154	1.079	0.166
	Band5/1RB#24	3	Bottom	20450	829	Unflip	10mm	23.67	0.20	24.0	0.147	1.079	0.159
	Band5/50%RB#24	3	Front	20450	829	Unflip	10mm	22.49	0.03	22.5	0.230	1.002	0.230
	Band5/50%RB#24	3	Back	20450	829	Unflip	10mm	22.49	-0.05	22.5	0.291	1.002	0.292
	Band5/50%RB#24	3	Left	20450	829	Unflip	10mm	22.49	-0.17	22.5	0.145	1.002	0.145
	Band5/50%RB#24	3	Bottom	20450	829	Unflip	10mm	22.49	0.11	22.5	0.121	1.002	0.121
	Band5/1RB#24	3	Front	20450	829	Flip	5mm	23.67	-0.07	24.0	0.118	1.079	0.127
34	Band5/1RB#24	3	Back	20450	829	Flip	5mm	23.67	-0.03	24.0	0.630	1.079	0.680
	Band5/1RB#24	3	Left	20450	829	Flip	5mm	23.67	-0.07	24.0	0.237	1.079	0.256
	Band5/1RB#24	3	Bottom	20450	829	Flip	5mm	23.67	-0.05	24.0	0.220	1.079	0.237
	Band5/50%RB#24	3	Front	20450	829	Flip	5mm	22.49	0.02	22.5	0.103	1.002	0.103
	Band5/50%RB#24	3	Back	20450	829	Flip	5mm	22.49	0.10	22.5	0.544	1.002	0.545
	Band5/50%RB#24	3	Left	20450	829	Flip	5mm	22.49	0.08	22.5	0.211	1.002	0.211
	Band5/50%RB#24	3	Bottom	20450	829	Flip	5mm	22.49	-0.16	22.5	0.191	1.002	0.191
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)						
Spatial Peak							Averaged over 1g						
Uncontrolled Exposure/General Population													

> FDD-LTE Band 7(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	5	Front	20850	2510	Unflip	10mm	22.29	0.00	22.5	0.055	1.050	0.058
	Band7/1RB#49	5	Back	20850	2510	Unflip	10mm	22.29	-0.02	22.5	0.066	1.050	0.070
	Band7/1RB#49	5	Left	20850	2510	Unflip	10mm	22.29	-0.02	22.5	0.136	1.050	0.143
	Band7/1RB#49	5	Top	20850	2510	Unflip	10mm	22.29	0.08	22.5	0.024	1.050	0.025
	Band7/50%RB#24	5	Front	20850	2510	Unflip	10mm	21.21	-0.04	21.5	0.049	1.069	0.052
	Band7/50%RB#24	5	Back	20850	2510	Unflip	10mm	21.21	-0.02	21.5	0.062	1.069	0.066
	Band7/50%RB#24	5	Left	20850	2510	Unflip	10mm	21.21	0.11	21.5	0.118	1.069	0.126
	Band7/50%RB#24	5	Top	20850	2510	Unflip	10mm	21.21	-0.19	21.5	0.020	1.069	0.021
	Band7/1RB#49	0	Front	20850	2510	Unflip	10mm	19.14	0.07	20.0	0.098	1.219	0.119
	Band7/1RB#49	0	Back	20850	2510	Unflip	10mm	19.14	0.15	20.0	0.127	1.219	0.155
	Band7/1RB#49	0	Right	20850	2510	Unflip	10mm	19.14	-0.18	20.0	0.153	1.219	0.187
	Band7/1RB#49	0	Top	20850	2510	Unflip	10mm	19.14	-0.12	20.0	0.057	1.219	0.069
	Band7/50%RB#0	0	Front	21350	2560	Unflip	10mm	18.03	0.08	18.5	0.084	1.114	0.094
	Band7/50%RB#0	0	Back	21350	2560	Unflip	10mm	18.03	0.07	18.5	0.109	1.114	0.121
	Band7/50%RB#0	0	Right	21350	2560	Unflip	10mm	18.03	-0.10	18.5	0.132	1.114	0.147
	Band7/50%RB#0	0	Top	21350	2560	Unflip	10mm	18.03	0.02	18.5	0.049	1.114	0.055
	Band7/1RB#49	5	Front	20850	2510	Flip	5mm	22.29	0.17	22.5	0.131	1.050	0.138
	Band7/1RB#49	5	Back	20850	2510	Flip	5mm	22.29	-0.13	22.5	0.023	1.050	0.024
59	Band7/1RB#49	5	Left	20850	2510	Flip	5mm	22.29	0.08	22.5	0.656	1.050	0.689
	Band7/1RB#49	5	Bottom	20850	2510	Flip	5mm	22.29	-0.03	22.5	0.062	1.050	0.065
	Band7/50%RB#24	5	Front	20850	2510	Flip	5mm	21.21	0.11	21.5	0.116	1.069	0.124
	Band7/50%RB#24	5	Back	20850	2510	Flip	5mm	21.21	0.03	21.5	0.021	1.069	0.022
	Band7/50%RB#24	5	Left	20850	2510	Flip	5mm	21.21	-0.19	21.5	0.578	1.069	0.618
	Band7/50%RB#24	5	Bottom	20850	2510	Flip	5mm	21.21	-0.05	21.5	0.053	1.069	0.057
	Band7/1RB#49	0	Front	20850	2510	Flip	5mm	19.14	0.07	20.0	0.199	1.219	0.243
	Band7/1RB#49	0	Back	20850	2510	Flip	5mm	19.14	0.07	20.0	0.114	1.219	0.139
	Band7/1RB#49	5	Right	20850	2510	Flip	5mm	19.14	-0.09	20.0	0.412	1.219	0.502
	Band7/1RB#49	5	Bottom	20850	2510	Flip	5mm	19.14	-0.12	20.0	0.082	1.219	0.100
	Band7/50%RB#0	0	Front	21350	2560	Flip	5mm	18.03	0.15	18.5	0.174	1.114	0.194
	Band7/50%RB#0	0	Back	21350	2560	Flip	5mm	18.03	0.08	18.5	0.099	1.114	0.110
	Band7/50%RB#0	5	Right	21350	2560	Flip	5mm	18.03	-0.10	18.5	0.359	1.114	0.400
	Band7/50%RB#0	5	Bottom	21350	2560	Flip	5mm	18.03	-0.19	18.5	0.071	1.114	0.079
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)						
Spatial Peak							Averaged over 1g						
Uncontrolled Exposure/General Population													

➤ FDD-LTE Band 12(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band12/1RB#0	3	Front	23060	704	Unflip	10mm	23.65	-0.06	24.0	0.237	1.084	0.257
	Band12/1RB#0	3	Back	23060	704	Unflip	10mm	23.65	0.03	24.0	0.317	1.084	0.344
	Band12/1RB#0	3	Left	23060	704	Unflip	10mm	23.65	0.00	24.0	0.208	1.084	0.225
	Band12/1RB#0	3	Bottom	23060	704	Unflip	10mm	23.65	-0.03	24.0	0.126	1.084	0.137
	Band12/50%RB#24	3	Front	23060	704	Unflip	10mm	22.55	0.07	23.0	0.224	1.109	0.248
	Band12/50%RB#24	3	Back	23060	704	Unflip	10mm	22.55	0.02	23.0	0.031	1.109	0.034
	Band12/50%RB#24	3	Left	23060	704	Unflip	10mm	22.55	0.00	23.0	0.019	1.109	0.021
	Band12/50%RB#24	3	Bottom	23060	704	Unflip	10mm	22.55	0.11	23.0	0.012	1.109	0.013
	Band12/1RB#0	3	Front	23060	704	Flip	5mm	23.65	-0.03	24.0	0.071	1.084	0.077
36	Band12/1RB#0	3	Back	23060	704	Flip	5mm	23.65	0.03	24.0	0.494	1.084	0.535
	Band12/1RB#0	3	Left	23060	704	Flip	5mm	23.65	0.00	24.0	0.386	1.084	0.418
	Band12/1RB#0	3	Bottom	23060	704	Flip	5mm	23.65	-0.12	24.0	0.125	1.084	0.136
	Band12/50%RB#24	3	Front	23060	704	Flip	5mm	22.55	0.05	23.0	0.062	1.109	0.069
	Band12/50%RB#24	3	Back	23060	704	Flip	5mm	22.55	-0.16	23.0	0.433	1.109	0.480
	Band12/50%RB#24	3	Left	23060	704	Flip	5mm	22.55	0.02	23.0	0.339	1.109	0.376
	Band12/50%RB#24	3	Bottom	23060	704	Flip	5mm	22.55	-0.09	23.0	0.111	1.109	0.123
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ FDD-LTE Band 13(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band13/1RB#49	3	Front	23230	782	Unflip	10mm	23.44	0.00	23.5	0.235	1.014	0.238
	Band13/1RB#49	3	Back	23230	782	Unflip	10mm	23.44	0.02	23.5	0.311	1.014	0.315
	Band13/1RB#49	3	Left	23230	782	Unflip	10mm	23.44	-0.16	23.5	0.216	1.014	0.219
	Band13/1RB#49	3	Bottom	23230	782	Unflip	10mm	23.44	-0.01	23.5	0.099	1.014	0.100
	Band13/50%RB#24	3	Front	23230	782	Unflip	10mm	22.36	0.11	22.5	0.213	1.033	0.220
	Band13/50%RB#24	3	Back	23230	782	Unflip	10mm	22.36	0.19	22.5	0.296	1.033	0.306
	Band13/50%RB#24	3	Left	23230	782	Unflip	10mm	22.36	0.03	22.5	0.193	1.033	0.199
	Band13/50%RB#24	3	Bottom	23230	782	Unflip	10mm	22.36	-0.14	22.5	0.086	1.033	0.089
	Band13/1RB#49	3	Front	23230	782	Flip	5mm	23.44	-0.05	23.5	0.092	1.014	0.093
37	Band13/1RB#49	3	Back	23230	782	Flip	5mm	23.44	0.11	23.5	0.504	1.014	0.511
	Band13/1RB#49	3	Left	23230	782	Flip	5mm	23.44	-0.04	23.5	0.433	1.014	0.439
	Band13/1RB#49	3	Bottom	23230	782	Flip	5mm	23.44	-0.12	23.5	0.161	1.014	0.163
	Band13/50%RB#24	3	Front	23230	782	Flip	5mm	22.36	0.06	22.5	0.083	1.033	0.086
	Band13/50%RB#24	3	Back	23230	782	Flip	5mm	22.36	-0.07	22.5	0.456	1.033	0.471
	Band13/50%RB#24	3	Left	23230	782	Flip	5mm	22.36	0.14	22.5	0.391	1.033	0.404
	Band13/50%RB#24	3	Bottom	23230	782	Flip	5mm	22.36	0.11	22.5	0.145	1.033	0.150
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#99	5	Front	41490	2680	Unflip	10mm	22.38	0.16	22.5	0.044	1.028	1.008	0.045
	Band41/1RB#99	5	Back	41490	2680	Unflip	10mm	22.38	0.00	22.5	0.058	1.028	1.008	0.060
	Band41/1RB#99	5	Left	41490	2680	Unflip	10mm	22.38	0.08	22.5	0.068	1.028	1.008	0.070
	Band41/1RB#99	5	Top	41490	2680	Unflip	10mm	22.38	-0.13	22.5	0.027	1.028	1.008	0.028
	Band41/50%RB#49	5	Front	41490	2680	Unflip	10mm	21.36	-0.03	21.5	0.036	1.033	1.008	0.037
	Band41/50%RB#49	5	Back	41490	2680	Unflip	10mm	21.36	0.16	21.5	0.047	1.033	1.008	0.049
	Band41/50%RB#49	5	Left	41490	2680	Unflip	10mm	21.36	0.00	21.5	0.059	1.033	1.008	0.061
	Band41/50%RB#49	5	Top	41490	2680	Unflip	10mm	21.36	-0.05	21.5	0.025	1.033	1.008	0.026
	Band41/1RB#99	0	Front	40620	2593	Unflip	10mm	19.48	0.10	19.5	0.019	1.005	1.008	0.019
	Band41/1RB#99	0	Back	40620	2593	Unflip	10mm	19.48	0.09	19.5	0.023	1.005	1.008	0.023
	Band41/1RB#99	0	Right	40620	2593	Unflip	10mm	19.48	0.04	19.5	0.030	1.005	1.008	0.030
	Band41/1RB#99	0	Top	40620	2593	Unflip	10mm	19.48	-0.02	19.5	0.012	1.005	1.008	0.012
	Band41/50%RB#49	0	Front	41490	2680	Unflip	10mm	18.50	0.10	19.0	0.016	1.122	1.008	0.018
	Band41/50%RB#49	0	Back	41490	2680	Unflip	10mm	18.50	0.12	19.0	0.020	1.122	1.008	0.023
	Band41/50%RB#49	0	Right	41490	2680	Unflip	10mm	18.50	-0.13	19.0	0.026	1.122	1.008	0.029
	Band41/50%RB#49	0	Top	41490	2680	Unflip	10mm	18.50	-0.03	19.0	0.010	1.122	1.008	0.011
	Band41/1RB#99	5	Front	41490	2680	Flip	5mm	22.38	0.06	22.5	0.133	1.028	1.008	0.138
	Band41/1RB#99	5	Back	41490	2680	Flip	5mm	22.38	-0.02	22.5	0.025	1.028	1.008	0.026
60	Band41/1RB#99	5	Left	41490	2680	Flip	5mm	22.38	0.00	22.5	0.238	1.028	1.008	0.247
	Band41/1RB#99	5	Bottom	41490	2680	Flip	5mm	22.38	-0.10	22.5	0.063	1.028	1.008	0.065
	Band41/50%RB#49	5	Front	41490	2680	Flip	5mm	21.36	-0.04	21.5	0.118	1.033	1.008	0.123
	Band41/50%RB#49	5	Back	41490	2680	Flip	5mm	21.36	0.02	21.5	0.022	1.033	1.008	0.023
	Band41/50%RB#49	5	Left	41490	2680	Flip	5mm	21.36	0.18	21.5	0.214	1.033	1.008	0.223
	Band41/50%RB#49	5	Bottom	41490	2680	Flip	5mm	21.36	-0.07	21.5	0.056	1.033	1.008	0.058
	Band41/1RB#99	0	Front	40620	2593	Flip	5mm	19.48	0.04	19.5	0.061	1.005	1.008	0.062
	Band41/1RB#99	0	Back	40620	2593	Flip	5mm	19.48	-0.18	19.5	0.031	1.005	1.008	0.031
	Band41/1RB#99	0	Right	40620	2593	Flip	5mm	19.48	-0.04	19.5	0.052	1.005	1.008	0.053
	Band41/1RB#99	0	Bottom	40620	2593	Flip	5mm	19.48	0.03	19.5	0.025	1.005	1.008	0.025
	Band41/50%RB#49	0	Front	41490	2680	Flip	5mm	18.50	0.09	19.0	0.052	1.122	1.008	0.059
	Band41/50%RB#49	0	Back	41490	2680	Flip	5mm	18.50	0.02	19.0	0.027	1.122	1.008	0.031
	Band41/50%RB#49	0	Right	41490	2680	Flip	5mm	18.50	-0.18	19.0	0.046	1.122	1.008	0.052
	Band41/50%RB#49	0	Bottom	41490	2680	Flip	5mm	18.50	0.11	19.0	0.022	1.122	1.008	0.025
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g						

➤ TDD-LTE Band 42(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band42/1RB#49	6	Front	42990	3540	Unflip	10mm	22.37	0.20	22.5	0.132	1.03	1.008	0.137
	Band42/1RB#49	6	Back	42990	3540	Unflip	10mm	22.37	0.12	22.5	0.171	1.03	1.008	0.178
	Band42/1RB#49	6	Left	42990	3540	Unflip	10mm	22.37	-0.08	22.5	0.063	1.03	1.008	0.065
	Band42/1RB#49	6	Top	42990	3540	Unflip	10mm	22.37	0.02	22.5	0.074	1.03	1.008	0.077
	Band42/50%RB#49	6	Front	42990	3540	Unflip	10mm	21.34	0.06	21.5	0.114	1.038	1.008	0.119
	Band42/50%RB#49	6	Back	42990	3540	Unflip	10mm	21.34	-0.18	21.5	0.148	1.038	1.008	0.155
	Band42/50%RB#49	6	Left	42990	3540	Unflip	10mm	21.34	0.01	21.5	0.055	1.038	1.008	0.058
	Band42/50%RB#49	6	Top	42990	3540	Unflip	10mm	21.34	0.16	21.5	0.063	1.038	1.008	0.066
39	Band42/1RB#49	6	Front	42990	3540	Flip	5mm	22.37	-0.08	22.5	0.317	1.03	1.008	0.329
	Band42/1RB#49	6	Back	42990	3540	Flip	5mm	22.37	0.00	22.5	0.182	1.03	1.008	0.189
	Band42/1RB#49	6	Left	42990	3540	Flip	5mm	22.37	0.02	22.5	0.140	1.03	1.008	0.145
	Band42/1RB#49	6	Bottom	42990	3540	Flip	5mm	22.37	-0.11	22.5	0.165	1.03	1.008	0.171
	Band42/50%RB#49	6	Front	42990	3540	Flip	5mm	21.34	0.08	21.5	0.277	1.038	1.008	0.290
	Band42/50%RB#49	6	Back	42990	3540	Flip	5mm	21.34	0.07	21.5	0.159	1.038	1.008	0.166
	Band42/50%RB#49	6	Left	42990	3540	Flip	5mm	21.34	0.03	21.5	0.122	1.038	1.008	0.128
	Band42/50%RB#49	6	Bottom	42990	3540	Flip	5mm	21.34	0.18	21.5	0.144	1.038	1.008	0.151
ANSI / IEEE C95.1 – SAFETY LIMIT														
Spatial Peak														
Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g								

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	5	Front	132072	1720	Unflip	10mm	23.24	-0.20	23.5	0.121	1.062	0.129
	Band66/1RB#49	5	Back	132072	1720	Unflip	10mm	23.24	-0.03	23.5	0.098	1.062	0.104
	Band66/1RB#49	5	Left	132072	1720	Unflip	10mm	23.24	0.03	23.5	0.200	1.062	0.212
	Band66/1RB#49	5	Top	132072	1720	Unflip	10mm	23.24	0.01	23.5	0.059	1.062	0.063
	Band66/50%RB#0	5	Front	132072	1720	Unflip	10mm	22.23	-0.10	22.50	0.111	1.064	0.118
	Band66/50%RB#0	5	Back	132072	1720	Unflip	10mm	22.23	-0.20	22.50	0.082	1.064	0.087
	Band66/50%RB#0	5	Left	132072	1720	Unflip	10mm	22.23	0.12	22.50	0.183	1.064	0.195
	Band66/50%RB#0	5	Top	132072	1720	Unflip	10mm	22.23	0.03	22.50	0.051	1.064	0.054
	Band66/1RB#49	0	Front	132322	1745	Unflip	10mm	20.20	-0.02	20.5	0.014	1.072	0.015
	Band66/1RB#49	0	Back	132322	1745	Unflip	10mm	20.20	0.04	20.5	0.017	1.072	0.018
	Band66/1RB#49	0	Right	132322	1745	Unflip	10mm	20.20	0.06	20.5	0.023	1.072	0.024
	Band66/1RB#49	0	Top	132322	1745	Unflip	10mm	20.20	-0.01	20.5	0.014	1.072	0.015
	Band66/50%RB#49	0	Front	132572	1770	Unflip	10mm	19.11	-0.09	19.5	0.012	1.094	0.013
	Band66/50%RB#49	0	Back	132572	1770	Unflip	10mm	19.11	0.01	19.5	0.015	1.094	0.016
	Band66/50%RB#49	0	Right	132572	1770	Unflip	10mm	19.11	0.03	19.5	0.020	1.094	0.022
	Band66/50%RB#49	0	Top	132572	1770	Unflip	10mm	19.11	-0.17	19.5	0.012	1.094	0.013
	Band66/1RB#49	5	Front	132072	1720	Flip	5mm	23.24	-0.15	23.5	0.203	1.062	0.216
	Band66/1RB#49	5	Back	132072	1720	Flip	5mm	23.24	-0.06	23.5	0.053	1.062	0.056
61	Band66/1RB#49	5	Left	132072	1720	Flip	5mm	23.24	0.05	23.5	0.292	1.062	0.310
	Band66/1RB#49	5	Bottom	132072	1720	Flip	5mm	23.24	0.17	23.5	0.124	1.062	0.132
	Band66/50%RB#0	5	Front	132072	1720	Flip	5mm	22.23	-0.09	22.5	0.178	1.064	0.189
	Band66/50%RB#0	5	Back	132072	1720	Flip	5mm	22.23	-0.16	22.5	0.046	1.064	0.049
	Band66/50%RB#0	5	Left	132072	1720	Flip	5mm	22.23	-0.01	22.5	0.256	1.064	0.272
	Band66/50%RB#0	5	Bottom	132072	1720	Flip	5mm	22.23	0.02	22.5	0.109	1.064	0.116
	Band66/1RB#49	0	Front	132322	1745	Flip	5mm	20.20	0.09	20.5	0.060	1.072	0.064
	Band66/1RB#49	0	Back	132322	1745	Flip	5mm	20.20	0.02	20.5	0.011	1.072	0.011
	Band66/1RB#49	0	Right	132322	1745	Flip	5mm	20.20	0.02	20.5	0.050	1.072	0.054
	Band66/1RB#49	0	Bottom	132322	1745	Flip	5mm	20.20	0.05	20.5	0.008	1.072	0.009
	Band66/50%RB#49	0	Front	132572	1770	Flip	5mm	19.11	0.01	19.5	0.052	1.094	0.057
	Band66/50%RB#49	0	Back	132572	1770	Flip	5mm	19.11	-0.16	19.5	0.009	1.094	0.010
	Band66/50%RB#49	0	Right	132572	1770	Flip	5mm	19.11	0.08	19.5	0.044	1.094	0.048
	Band66/50%RB#49	0	Bottom	132572	1770	Flip	5mm	19.11	0.05	19.5	0.007	1.094	0.008
ANSI / IEEE C95.1 – SAFETY LIMIT													
Spatial Peak						1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population						Averaged over 1g							

➤ NR n5(20MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n5/1 @49	3	Front	167800	839	Unflip	10mm	22.92	0.05	23.0	0.177	1.019	0.180
	NR n5/1 @49	3	Back	167800	839	Unflip	10mm	22.92	-0.14	23.0	0.237	1.019	0.242
	NR n5/1 @49	3	Left	167800	839	Unflip	10mm	22.92	0.12	23.0	0.156	1.019	0.159
	NR n5/1 @49	3	Bottom	167800	839	Unflip	10mm	22.92	0.07	23.0	0.095	1.019	0.097
	NR n5/25@12	3	Front	167800	839	Unflip	10mm	23.05	0.05	23.5	0.300	1.109	0.333
	NR n5/25@12	3	Back	167800	839	Unflip	10mm	23.05	0.00	23.5	0.349	1.109	0.387
	NR n5/25@12	3	Left	167800	839	Unflip	10mm	23.05	-0.13	23.5	0.257	1.109	0.285
	NR n5/25@12	3	Bottom	167800	839	Unflip	10mm	23.05	0.11	23.5	0.141	1.109	0.156
	NR n5/1 @49	3	Front	167800	839	Flip	5mm	22.92	-0.05	23.0	0.084	1.019	0.086
	NR n5/1 @49	3	Back	167800	839	Flip	5mm	22.92	-0.02	23.0	0.453	1.019	0.462
	NR n5/1 @49	3	Left	167800	839	Flip	5mm	22.92	0.04	23.0	0.391	1.019	0.398
	NR n5/1 @49	3	Bottom	167800	839	Flip	5mm	22.92	-0.12	23.0	0.145	1.019	0.148
	NR n5/25@12	3	Front	167800	839	Flip	5mm	23.05	-0.05	23.5	0.144	1.109	0.160
41	NR n5/25@12	3	Back	167800	839	Flip	5mm	23.05	0.03	23.5	0.580	1.109	0.643
	NR n5/25@12	3	Left	167800	839	Flip	5mm	23.05	0.09	23.5	0.509	1.109	0.564
	NR n5/25@12	3	Bottom	167800	839	Flip	5mm	23.05	0.10	23.5	0.195	1.109	0.216
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n7(20MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n7/1 @49	5	Front	512000	2560	Unflip	10mm	22.47	0.08	22.5	0.091	1.007	0.092
	NR n7/1 @49	5	Back	512000	2560	Unflip	10mm	22.47	-0.11	22.5	0.109	1.007	0.110
	NR n7/1 @49	5	Left	512000	2560	Unflip	10mm	22.47	-0.03	22.5	0.224	1.007	0.226
	NR n7/1 @49	5	Top	512000	2560	Unflip	10mm	22.47	0.04	22.5	0.039	1.007	0.039
	NR n7/25@12	5	Front	512000	2560	Unflip	10mm	22.59	0.20	23.0	0.109	1.099	0.120
	NR n7/25@12	5	Back	512000	2560	Unflip	10mm	22.59	0.10	23.0	0.143	1.099	0.157
	NR n7/25@12	5	Left	512000	2560	Unflip	10mm	22.59	-0.01	23.0	0.264	1.099	0.290
	NR n7/25@12	5	Top	512000	2560	Unflip	10mm	22.59	0.01	23.0	0.055	1.099	0.060
	NR n7/1 @49	5	Front	512000	2560	Flip	5mm	22.47	-0.12	22.5	0.275	1.007	0.277
	NR n7/1 @49	5	Back	512000	2560	Flip	5mm	22.47	0.00	22.5	0.049	1.007	0.049
	NR n7/1 @49	5	Left	512000	2560	Flip	5mm	22.47	-0.08	22.5	0.888	1.007	0.894
	NR n7/1 @49	5	Bottom	512000	2560	Flip	5mm	22.47	-0.03	22.5	0.139	1.007	0.140
	NR n7/1 @49	5	Left	502000	2510	Flip	5mm	22.31	-0.06	22.5	0.782	1.045	0.817
	NR n7/1 @1	5	Left	512000	2560	Flip	5mm	22.28	-0.12	22.5	0.819	1.052	0.862
	NR n7/1 @49	5	Left	512000	2560	Flip	5mm	22.47	-0.19	22.5	0.833	1.007	0.839
	NR n7/25@12	5	Front	512000	2560	Flip	5mm	22.59	0.02	23.0	0.331	1.099	0.364
	NR n7/25@12	5	Back	512000	2560	Flip	5mm	22.59	-0.11	23.0	0.062	1.099	0.068
62	NR n7/25@12	5	Left	512000	2560	Flip	5mm	22.59	0.08	23.0	0.962	1.099	1.057
	NR n7/25@12	5	Bottom	512000	2560	Flip	5mm	22.59	-0.05	23.0	0.166	1.099	0.182
	NR n7/25@12	5	Left	502000	2510	Flip	5mm	22.39	0.18	23.0	0.908	1.151	1.045
	NR n7/25@12	5	Left	512000	2560	Flip	5mm	22.40	-0.06	23.0	0.917	1.148	1.053
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n12(20MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n12/1@36	3	Front	141500	707.5	Unflip	10mm	23.15	-0.10	23.50	0.102	1.084	0.111
	NR n12/1@36	3	Back	141500	707.5	Unflip	10mm	23.15	0.05	23.50	0.154	1.084	0.167
	NR n12/1@36	3	Left	141500	707.5	Unflip	10mm	23.15	0.17	23.50	0.127	1.084	0.138
	NR n12/1@36	3	Bottom	141500	707.5	Unflip	10mm	23.15	0.03	23.50	0.047	1.084	0.051
	NR n12/18@9	3	Front	141300	706.5	Unflip	10mm	23.24	-0.10	23.50	0.158	1.062	0.168
	NR n12/18@9	3	Back	141300	706.5	Unflip	10mm	23.24	0.06	23.50	0.214	1.062	0.227
	NR n12/18@9	3	Left	141300	706.5	Unflip	10mm	23.24	0.00	23.50	0.199	1.062	0.211
	NR n12/18@9	3	Bottom	141300	706.5	Unflip	10mm	23.24	-0.09	23.50	0.068	1.062	0.072
	NR n12/1@36	3	Front	141500	707.5	Flip	5mm	23.15	-0.10	23.5	0.073	1.084	0.079
	NR n12/1@36	3	Back	141500	707.5	Flip	5mm	23.15	-0.08	23.5	0.401	1.084	0.435
	NR n12/1@36	3	Left	141500	707.5	Flip	5mm	23.15	-0.13	23.5	0.344	1.084	0.373
	NR n12/1@36	3	Bottom	141500	707.5	Flip	5mm	23.15	0.10	23.5	0.128	1.084	0.139
	NR n12/18@9	3	Front	141300	706.5	Flip	5mm	23.24	-0.14	23.5	0.081	1.062	0.086
43	NR n12/18@9	3	Back	141300	706.5	Flip	5mm	23.24	0.01	23.5	0.457	1.062	0.485
	NR n12/18@9	3	Left	141300	706.5	Flip	5mm	23.24	-0.06	23.5	0.298	1.062	0.316
	NR n12/18@9	3	Bottom	141300	706.5	Flip	5mm	23.24	-0.12	23.5	0.288	1.062	0.306
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n41(100MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n41/1@271	5	Front	509202	2546.01	Unflip	10mm	24.76	0.12	25.0	0.076	1.057	0.080
	NR n41/1@271	5	Back	509202	2546.01	Unflip	10mm	24.76	-0.08	25.0	0.103	1.057	0.109
	NR n41/1@271	5	Left	509202	2546.01	Unflip	10mm	24.76	0.06	25.0	0.190	1.057	0.201
	NR n41/1@271	5	Top	509202	2546.01	Unflip	10mm	24.76	0.03	25.0	0.041	1.057	0.043
	NR n41/135@67	5	Front	518598	2592.99	Unflip	10mm	25.51	0.05	26.0	0.113	1.119	0.126
	NR n41/135@67	5	Back	518598	2592.99	Unflip	10mm	25.51	-0.02	26.0	0.133	1.119	0.149
	NR n41/135@67	5	Left	518598	2592.99	Unflip	10mm	25.51	0.05	26.0	0.257	1.119	0.288
	NR n41/135@67	5	Top	518598	2592.99	Unflip	10mm	25.51	0.04	26.0	0.051	1.119	0.057
	NR n41/1@271	5	Front	509202	2546.01	Flip	5mm	24.76	-0.17	25.0	0.263	1.057	0.278
	NR n41/1@271	5	Back	509202	2546.01	Flip	5mm	24.76	0.13	25.0	0.049	1.057	0.052
	NR n41/1@271	5	Left	509202	2546.01	Flip	5mm	24.76	0.06	25.0	0.850	1.057	0.898
	NR n41/1@271	5	Bottom	509202	2546.01	Flip	5mm	24.76	0.12	25.0	0.131	1.057	0.138
	NR n41/1@271	5	Left	509202	2546.01	Flip	5mm	24.65	0.04	25.0	0.731	1.084	0.792
	NR n41/1@271	5	Left	528000	2640	Flip	5mm	24.66	-0.07	25.0	0.760	1.081	0.822
	NR n41/1@271	5	Left	509202	2546.01	Flip	5mm	24.76	0.00	25.0	0.831	1.057	0.878
	NR n41/135@67	5	Front	518598	2592.99	Flip	5mm	25.51	-0.03	26.0	0.329	1.119	0.368
	NR n41/135@67	5	Back	518598	2592.99	Flip	5mm	25.51	-0.09	26.0	0.066	1.119	0.074
63	NR n41/135@67	5	Left	518598	2592.99	Flip	5mm	25.51	0.02	26.0	0.980	1.119	1.097
	NR n41/135@67	5	Bottom	518598	2592.99	Flip	5mm	25.51	-0.06	26.0	0.169	1.119	0.189
	NR n41/135@67	5	Left	509202	2546.01	Flip	5mm	25.16	0.19	26.0	0.901	1.213	1.093
	NR n41/135@67	5	Left	528000	2640	Flip	5mm	25.34	0.08	26.0	0.912	1.164	1.062
	NR n41/135@67	5	Left	518598	2592.99	Flip	5mm	25.51	-0.07	26.0	0.947	1.119	1.060
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n66(40MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n66/1@104	5	Front	349000	1745	Unflip	10mm	22.61	0.14	23.0	0.071	1.094	0.078
	NR n66/1@104	5	Back	349000	1745	Unflip	10mm	22.61	0.01	23.0	0.079	1.094	0.086
	NR n66/1@104	5	Left	349000	1745	Unflip	10mm	22.61	0.08	23.0	0.142	1.094	0.155
	NR n66/1@104	5	Top	349000	1745	Unflip	10mm	22.61	-0.05	23.0	0.043	1.094	0.047
	NR n66/50@25	5	Front	346000	1730	Unflip	10mm	22.88	-0.05	23.0	0.089	1.028	0.092
	NR n66/50@25	5	Back	346000	1730	Unflip	10mm	22.88	0.04	23.0	0.099	1.028	0.102
	NR n66/50@25	5	Left	346000	1730	Unflip	10mm	22.88	-0.04	23.0	0.175	1.028	0.180
	NR n66/50@25	5	Top	346000	1730	Unflip	10mm	22.88	-0.08	23.0	0.051	1.028	0.052
	NR n66/1@104	5	Back	349000	1745	Flip	5mm	22.61	0.12	23.0	0.054	1.094	0.059
	NR n66/1@104	5	Left	349000	1745	Flip	5mm	22.61	-0.05	23.0	0.239	1.094	0.261
	NR n66/1@104	5	Bottom	349000	1745	Flip	5mm	22.61	-0.01	23.0	0.072	1.094	0.079
	NR n66/50@25	5	Front	346000	1730	Flip	5mm	22.88	-0.08	23.0	0.188	1.028	0.193
	NR n66/50@25	5	Back	346000	1730	Flip	5mm	22.88	-0.09	23.0	0.074	1.028	0.076
64	NR n66/50@25	5	Left	346000	1730	Flip	5mm	22.88	0.01	23.0	0.322	1.028	0.331
	NR n66/50@25	5	Bottom	346000	1730	Flip	5mm	22.88	-0.11	23.0	0.099	1.028	0.102
	NR n66/1@104	5	Back	349000	1745	Flip	5mm	22.61	0.12	23.0	0.054	1.094	0.059
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3450MHz~3550MHz) (100MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@1	6	Front	633334	3500.01	Unflip	10mm	25.58	-0.03	26.0	0.020	1.102	0.022
	NR n77/1@1	6	Back	633334	3500.01	Unflip	10mm	25.58	-0.16	26.0	0.038	1.102	0.042
	NR n77/1@1	6	Left	633334	3500.01	Unflip	10mm	25.58	0.02	26.0	0.010	1.102	0.011
	NR n77/1@1	6	Top	633334	3500.01	Unflip	10mm	25.58	0.13	26.0	0.006	1.102	0.007
	NR n77/135@67	6	Front	633334	3500.01	Unflip	10mm	26.27	0.08	27.0	0.030	1.183	0.035
	NR n77/135@67	6	Back	633334	3500.01	Unflip	10mm	26.27	0.19	27.0	0.056	1.183	0.066
	NR n77/135@67	6	Left	633334	3500.01	Unflip	10mm	26.27	0.00	27.0	0.012	1.183	0.014
	NR n77/135@67	6	Top	633334	3500.01	Unflip	10mm	26.27	0.03	27.0	0.011	1.183	0.013
	NR n77/1@1	6	Front	633334	3500.01	Flip	5mm	25.58	-0.16	26.0	0.061	1.102	0.067
	NR n77/1@1	6	Back	633334	3500.01	Flip	5mm	25.58	-0.01	26.0	0.011	1.102	0.012
	NR n77/1@1	6	Left	633334	3500.01	Flip	5mm	25.58	-0.08	26.0	0.039	1.102	0.043
	NR n77/1@1	6	Bottom	633334	3500.01	Flip	5mm	25.58	0.10	26.0	0.015	1.102	0.017
46	NR n77/135@67	6	Front	633334	3500.01	Flip	5mm	26.27	0.00	27.0	0.093	1.183	0.110
	NR n77/135@67	6	Back	633334	3500.01	Flip	5mm	26.27	0.14	27.0	0.016	1.183	0.019
	NR n77/135@67	6	Left	633334	3500.01	Flip	5mm	26.27	0.12	27.0	0.060	1.183	0.071
	NR n77/135@67	6	Bottom	633334	3500.01	Flip	5mm	26.27	0.11	27.0	0.023	1.183	0.027
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3550MHz~3700MHz) (100MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@1	6	Front	643332	3649.98	Unflip	10mm	25.47	0.12	25.5	0.018	1.007	0.018
	NR n77/1@1	6	Back	643332	3649.98	Unflip	10mm	25.47	0.03	25.5	0.031	1.007	0.031
	NR n77/1@1	6	Left	643332	3649.98	Unflip	10mm	25.47	0.05	25.5	0.007	1.007	0.007
	NR n77/1@1	6	Top	643332	3649.98	Unflip	10mm	25.47	0.10	25.5	0.005	1.007	0.005
	NR n77/135@67	6	Front	640000	3600	Unflip	10mm	26.21	0.05	26.5	0.022	1.069	0.024
	NR n77/135@67	6	Back	640000	3600	Unflip	10mm	26.21	0.04	26.5	0.036	1.069	0.038
	NR n77/135@67	6	Left	640000	3600	Unflip	10mm	26.21	0.00	26.5	0.015	1.069	0.016
	NR n77/135@67	6	Top	640000	3600	Unflip	10mm	26.21	-0.17	26.5	0.010	1.069	0.011
	NR n77/1@1	6	Front	643332	3649.98	Flip	5mm	25.47	0.02	25.5	0.049	1.007	0.049
	NR n77/1@1	6	Back	643332	3649.98	Flip	5mm	25.47	-0.19	25.5	0.008	1.007	0.008
	NR n77/1@1	6	Left	643332	3649.98	Flip	5mm	25.47	-0.18	25.5	0.055	1.007	0.055
	NR n77/1@1	6	Bottom	643332	3649.98	Flip	5mm	25.47	0.13	25.5	0.012	1.007	0.012
	NR n77/135@67	6	Front	640000	3600	Flip	5mm	26.21	0.00	26.5	0.076	1.069	0.081
	NR n77/135@67	6	Back	640000	3600	Flip	5mm	26.21	0.00	26.5	0.013	1.069	0.014
65	NR n77/135@67	6	Left	640000	3600	Flip	5mm	26.21	0.11	26.5	0.085	1.069	0.090
	NR n77/135@67	6	Bottom	640000	3600	Flip	5mm	26.21	0.09	26.5	0.018	1.069	0.019
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ NR n77(3700MHz~3980MHz)(100MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	NR n77/1@271	6	Front	662000	3930	Unflip	10mm	25.48	0.02	25.5	0.008	1.005	0.008
	NR n77/1@271	6	Back	662000	3930	Unflip	10mm	25.48	-0.04	25.5	0.011	1.005	0.011
	NR n77/1@271	6	Left	662000	3930	Unflip	10mm	25.48	0.10	25.5	0.027	1.005	0.027
	NR n77/1@271	6	Top	662000	3930	Unflip	10mm	25.48	0.09	25.5	0.006	1.005	0.006
	NR n77/135@67	6	Front	650000	3750	Unflip	10mm	26.36	-0.01	27.0	0.012	1.159	0.014
	NR n77/135@67	6	Back	650000	3750	Unflip	10mm	26.36	0.08	27.0	0.016	1.159	0.018
	NR n77/135@67	6	Left	650000	3750	Unflip	10mm	26.36	0.08	27.0	0.032	1.159	0.037
	NR n77/135@67	6	Top	650000	3750	Unflip	10mm	26.36	-0.05	27.0	0.012	1.159	0.014
	NR n77/1@271	6	Front	662000	3930	Flip	5mm	25.48	-0.02	25.5	0.063	1.005	0.063
	NR n77/1@271	6	Back	662000	3930	Flip	5mm	25.48	0.06	25.5	0.012	1.005	0.012
	NR n77/1@271	6	Left	662000	3930	Flip	5mm	25.48	-0.04	25.5	0.087	1.005	0.087
	NR n77/1@271	6	Bottom	662000	3930	Flip	5mm	25.48	-0.08	25.5	0.016	1.005	0.016
	NR n77/135@67	6	Front	650000	3750	Flip	5mm	26.36	0.00	27.0	0.085	1.159	0.099
	NR n77/135@67	6	Back	650000	3750	Flip	5mm	26.36	-0.18	27.0	0.016	1.159	0.019
66	NR n77/135@67	6	Left	650000	3750	Flip	5mm	26.36	0.03	27.0	0.117	1.159	0.136
	NR n77/135@67	6	Bottom	650000	3750	Flip	5mm	26.36	-0.03	27.0	0.021	1.159	0.024
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g						

➤ WLAN 2.4GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b	12	Front	11	2462	Unflip	10mm	16.64	-0.09	17.0	0.019	1.086	1.000	0.021
	2.4GHz/802.11b	12	Back	11	2462	Unflip	10mm	16.64	0.00	17.0	0.022	1.086	1.000	0.023
	2.4GHz/802.11b	12	Right	11	2462	Unflip	10mm	16.64	0.03	17.0	0.004	1.086	1.000	0.004
	2.4GHz/802.11b	12	Top	11	2462	Unflip	10mm	16.64	0.16	17.0	0.042	1.086	1.000	0.046
	2.4GHz/802.11b	4	Front	6	2437	Unflip	10mm	16.64	0.01	17.0	0.060	1.086	1.000	0.065
	2.4GHz/802.11b	4	Back	6	2437	Unflip	10mm	16.64	0.08	17.0	0.031	1.086	1.000	0.034
	2.4GHz/802.11b	4	Left	6	2437	Unflip	10mm	16.64	0.04	17.0	0.057	1.086	1.000	0.062
	2.4GHz/802.11b	4	Top	6	2437	Unflip	10mm	16.64	-0.19	17.0	0.016	1.086	1.000	0.017
	2.4GHz/802.11b	12	Front	11	2462	Flip	5mm	16.64	-0.01	17.0	0.046	1.086	1.000	0.050
	2.4GHz/802.11b	12	Back	11	2462	Flip	5mm	16.64	0.00	17.0	0.010	1.086	1.000	0.011
	2.4GHz/802.11b	12	Right	11	2462	Flip	5mm	16.64	-0.11	17.0	0.016	1.086	1.000	0.017
	2.4GHz/802.11b	12	Bottom	11	2462	Flip	5mm	16.64	-0.15	17.0	0.199	1.086	1.000	0.216
49	2.4GHz/802.11b	4	Front	6	2437	Flip	5mm	16.64	-0.07	17.0	0.303	1.086	1.000	0.329
	2.4GHz/802.11b	4	Back	6	2437	Flip	5mm	16.64	0.10	17.0	0.072	1.086	1.000	0.078
	2.4GHz/802.11b	4	Left	6	2437	Flip	5mm	16.64	0.18	17.0	0.211	1.086	1.000	0.229
	2.4GHz/802.11b	4	Top	6	2437	Flip	5mm	16.64	-0.20	17.0	0.135	1.086	1.000	0.147
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g							

➤ WLAN 5.2GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n40	12	Front	38	5190	Unflip	10mm	14.11	-0.11	14.5	0.024	1.094	1.000	0.026
	5.2GHz/802.11n40	12	Back	38	5190	Unflip	10mm	14.11	0.13	14.5	0.011	1.094	1.000	0.012
	5.2GHz/802.11n40	12	Right	38	5190	Unflip	10mm	14.11	-0.02	14.5	0.004	1.094	1.000	0.004
	5.2GHz/802.11n40	12	Top	38	5190	Unflip	10mm	14.11	0.05	14.5	0.005	1.094	1.000	0.005
	5.2GHz/802.11a	4	Front	40	5200	Unflip	10mm	12.40	-0.01	12.5	0.035	1.023	1.000	0.036
	5.2GHz/802.11a	4	Back	40	5200	Unflip	10mm	12.40	0.19	12.5	0.003	1.023	1.000	0.003
	5.2GHz/802.11a	4	Left	40	5200	Unflip	10mm	12.40	-0.04	12.5	0.028	1.023	1.000	0.029
	5.2GHz/802.11a	4	Top	40	5200	Unflip	10mm	12.40	0.02	12.5	0.002	1.023	1.000	0.002
	5.2GHz/802.11n40	12	Front	38	5190	Flip	5mm	14.11	-0.04	14.5	0.032	1.094	1.000	0.035
	5.2GHz/802.11n40	12	Back	38	5190	Flip	5mm	14.11	0.12	14.5	0.002	1.094	1.000	0.002
	5.2GHz/802.11n40	12	Right	38	5190	Flip	5mm	14.11	0.14	14.5	0.005	1.094	1.000	0.005
	5.2GHz/802.11n40	12	Bottom	38	5190	Flip	5mm	14.11	0.15	14.5	0.013	1.094	1.000	0.014
	5.2GHz/802.11a	4	Front	40	5200	Flip	5mm	12.40	0.19	12.5	0.020	1.023	1.000	0.020
	5.2GHz/802.11a	4	Back	40	5200	Flip	5mm	12.40	-0.17	12.5	0.004	1.023	1.000	0.004
67	5.2GHz/802.11a	4	Left	40	5200	Flip	5mm	12.40	0.01	12.5	0.062	1.023	1.000	0.063
	5.2GHz/802.11a	4	Top	40	5200	Flip	5mm	12.40	-0.16	12.5	0.018	1.023	1.000	0.018
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g							

> WLAN 5.8GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11a	12	Front	149	5745	Unflip	10mm	12.61	0.05	13.0	0.025	1.094	1.000	0.027
	5.8GHz/802.11a	12	Back	149	5745	Unflip	10mm	12.61	0.19	13.0	0.011	1.094	1.000	0.012
	5.8GHz/802.11a	12	Right	149	5745	Unflip	10mm	12.61	0.07	13.0	0.007	1.094	1.000	0.008
	5.8GHz/802.11a	12	Top	149	5745	Unflip	10mm	12.61	0.02	13.0	0.009	1.094	1.000	0.010
	5.8GHz/802.11n20	4	Front	165	5825	Unflip	10mm	14.40	-0.09	14.5	0.021	1.023	1.000	0.021
	5.8GHz/802.11n20	4	Back	165	5825	Unflip	10mm	14.40	0.08	14.5	0.002	1.023	1.000	0.002
	5.8GHz/802.11n20	4	Left	165	5825	Unflip	10mm	14.40	0.01	14.5	0.016	1.023	1.000	0.016
	5.8GHz/802.11n20	4	Top	165	5825	Unflip	10mm	14.40	-0.11	14.5	0.001	1.023	1.000	0.001
	5.8GHz/802.11a	12	Front	149	5745	Flip	5mm	12.61	-0.04	13.0	0.044	1.094	1.000	0.048
	5.8GHz/802.11a	12	Back	149	5745	Flip	5mm	12.61	0.10	13.0	0.006	1.094	1.000	0.007
	5.8GHz/802.11a	12	Right	149	5745	Flip	5mm	12.61	0.12	13.0	0.009	1.094	1.000	0.010
	5.8GHz/802.11a	12	Bottom	149	5745	Flip	5mm	12.61	0.13	13.0	0.025	1.094	1.000	0.027
	5.8GHz/802.11n20	4	Front	165	5825	Flip	5mm	14.40	-0.20	14.5	0.011	1.023	1.000	0.011
	5.8GHz/802.11n20	4	Back	165	5825	Flip	5mm	14.40	0.17	14.5	0.001	1.023	1.000	0.001
68	5.8GHz/802.11n20	4	Left	165	5825	Flip	5mm	14.40	0.09	14.5	0.121	1.023	1.000	0.124
	5.8GHz/802.11n20	4	Top	165	5825	Flip	5mm	14.40	0.04	14.5	0.007	1.023	1.000	0.007
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g) Averaged over 1g							
Uncontrolled Exposure/General Population														

> Bluetooth Body SAR in Hotspot mode

Plot No.	Band/Mode	ANT	Test Position	CH.	Freq. (MHz)	Form Factor	Spacing	Ave. Power (dBm)	Power Drift (dB)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	BT/GFSK	12	Front	39	2441	Unflip	10mm	8.25	0.08	8.5	0.006	1.059	1.000	0.007
	BT/GFSK	12	Back	39	2441	Unflip	10mm	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
	BT/GFSK	12	Right	39	2441	Unflip	10mm	8.25	-0.06	8.5	0.004	1.059	1.000	0.004
	BT/GFSK	12	Top	39	2441	Unflip	10mm	8.25	0.02	8.5	0.003	1.059	1.000	0.003
	BT/GFSK	12	Front	39	2441	Flip	5mm	8.25	-0.09	8.5	0.005	1.059	1.000	0.005
	BT/GFSK	12	Back	39	2441	Flip	5mm	8.25	0.00	8.5	<0.001*	1.059	1.000	<0.001*
	BT/GFSK	12	Right	39	2441	Flip	5mm	8.25	0.02	8.5	0.005	1.059	1.000	0.005
69	BT/GFSK	12	Bottom	39	2441	Flip	5mm	8.25	-0.02	8.5	0.009	1.059	1.000	0.010
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g) Averaged over 1g							
Uncontrolled Exposure/General Population														

Note:

- Per KDB 447498 D04v01, for each exposure position, if the highest output channel Reported SAR ≤ 0.8W/kg, other channels SAR testing is not necessary.
- Additional WLAN SAR testing was performed for simultaneous transmission analysis.
- For Hotspot SAR testing, per KDB 941225 D06v02r01, for EUT dimension ≥ 9cm*5cm, the test distance is 10mm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is < 0.25dB higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA SAR evaluation can be excluded.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8W/kg.
- Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.
- *: Due the antenna location and antenna performance results the SAR value lower than the lowest system limit, then we show “<0.001 W/Kg” in the report.

15.4 Product specific 10g SAR

Extremity SAR measurement is not required.

15.5 Repeated SAR measurement

Band/ Mode	Test Position	CH.	Freq. (MHz)	Measured SAR (W/kg)				
				Original	1 st Repeated		2 nd Repeated	
					Value	Ratio	Value	Ratio
Band66/1RB#49	Right Cheek	132072	1720	0.800	0.762	1.04	/	/
NR n7 /25@12	Right Cheek	512000	2560	1.130	1.057	1.06	/	/
GPRS850/4 slots	Back	128	824.2	1.170	1.065	1.09	/	/
GPRS1900/4 slots	Left	661	1880	0.893	0.862	1.03	/	/
NR n41/135@67	Left	518598	2592.99	0.980	0.947	1.03	/	/
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1g				

Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r04, if the ratio of *original* and *repeated* is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

15.6 Multi-Band Simultaneous Transmission Considerations

➤ **Simultaneous Transmission Capabilities**

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

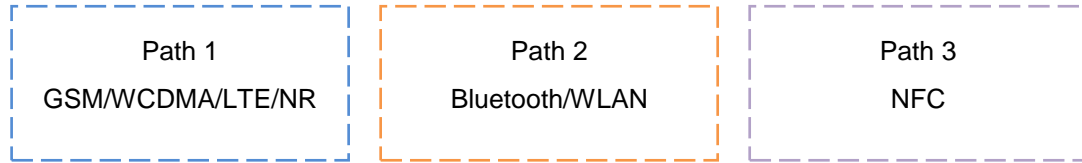


Fig.15.1 Simultaneous Transmission Paths

➤ **Simultaneous Transmission Procedures**

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D04v01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D04v01 Appendix E, E.1), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$SAR_{est} = 1.6 \cdot P_{ant} / P_{th} [W/kg].$$

Mode	Max. Power (dBm)	Max. Power (mW)	Exposure Position	Estimated SAR (W/kg)
NFC	-57.67	0.000002	Head	0.000
			Body	0.000
			Hotspot	0.000

Note:

- Per KDB 447498 D04v01 section 2.1.2: 1-mW Test Exemption, $P_{th}=1mW$.

➤ **Multi-Band simultaneous Transmission Consideration**

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	WWAN (Voice) + WLAN 2.4 GHz+ NFC
		WWAN (Voice) + 5.2GHz/5.3GHz/5.6GHz/5.8GHz + Bluetooth+ NFC
	Body	WWAN (Data) + WLAN 2.4 GHz+ NFC
		WWAN (Data) + 5.2GHz/5.3GHz/5.6GHz/5.8GHz + Bluetooth+ NFC
	Hotspot	WWAN (Data) + WLAN 2.4 GHz+ NFC
WWAN (Data) + 5.2GHz//5.8GHz + Bluetooth+ NFC		

Note:

- WLAN 2.4GHz Band and Bluetooth cannot transmit simultaneously.
- WLAN 2.4GHz Band and WLAN 5.2GHz Band, WLAN 5.3GHz Band, WLAN 5.6GHz Band, WLAN 5.8GHz Band cannot transmit simultaneously
- GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- For 5G NR EN-DC mode, the simultaneous transmission analysis is used standalone SAR at total power level to show compliance.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D04v01, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. \text{ separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the

- extrapolated peak SAR locations in the zoom scan If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary
- iii. Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg