


EMC TEST REPORT



Report No.: 17070659-FCC-E

Supersede Report No: N/A

| | | |
|--|--|---|
| Applicant | TECNO MOBILE LIMITED | |
| Product Name | Mobile phone | |
| Model No. | AX8 | |
| Serial No. | N/A | |
| Test Standard | FCC Part 15 Subpart B Class B:2016, ANSI C63.4: 2014 | |
| Test Date | July 29 to September 14, 2017 | |
| Issue Date | September 15, 2017 | |
| Test Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail | |
| Equipment complied with the specification | <input checked="" type="checkbox"/> | |
| Equipment did not comply with the specification | <input type="checkbox"/> | |
| <i>Evans He</i> | <i>David Huang</i> |  |
| Evans He Test Engineer | David Huang Checked By | |
| This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only | | |

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

| Country/Region | Scope |
|----------------|------------------------------------|
| USA | EMC, RF/Wireless, SAR, Telecom |
| Canada | EMC, RF/Wireless, SAR, Telecom |
| Taiwan | EMC, RF, Telecom, SAR, Safety |
| Hong Kong | RF/Wireless, SAR, Telecom |
| Australia | EMC, RF, Telecom, SAR, Safety |
| Korea | EMI, EMS, RF, SAR, Telecom, Safety |
| Japan | EMI, RF/Wireless, SAR, Telecom |
| Singapore | EMC, RF, SAR, Telecom |
| Europe | EMC, RF, SAR, Telecom, Safety |

| | |
|-------------|----------------|
| Test Report | 17070659-FCC-E |
| Page | 3 of 39 |

This page has been left blank intentionally.

CONTENTS

| | |
|--|----|
| 1. REPORT REVISION HISTORY | 5 |
| 2. CUSTOMER INFORMATION | 5 |
| 3. TEST SITE INFORMATION | 6 |
| 4. EQUIPMENT UNDER TEST (EUT) INFORMATION | 7 |
| 5. TEST SUMMARY | 10 |
| 6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 11 |
| 6.1 AC POWER LINE CONDUCTED EMISSIONS..... | 11 |
| 6.2 RADIATED EMISSIONS..... | 17 |
| ANNEX A. TEST INSTRUMENT..... | 22 |
| ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS..... | 23 |
| ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT..... | 35 |
| ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST | 38 |
| ANNEX E. DECLARATION OF SIMILARITY..... | 39 |

1. Report Revision History

| Report No. | Report Version | Description | Issue Date |
|----------------|----------------|-------------|--------------------|
| 17070659-FCC-E | NONE | Original | September 15, 2017 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

2. Customer information

| | |
|------------------|--|
| Applicant Name | TECNO MOBILE LIMITED |
| Applicant Add | ROOMS 05-15, 13A/F., SOUTH TOWER, WORLD FINANCE CENTRE, HARBOUR CITY, 17 CANTON ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG |
| Manufacturer | SHENZHEN TECNO TECHNOLOGY CO.,LTD. |
| Manufacturer Add | 1-4th Floor,3rd Building,Pacific Industrial Park,No.2088,Shenyan Road,Yantian District,Shenzhen,Guangdong,China |

3. Test site information

Test Lab A:

| | |
|----------------------|--|
| Lab performing tests | SIEMIC (Shenzhen-China) LABORATORIES |
| Lab Address | Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108 |
| FCC Test Site No. | 535293 |
| IC Test Site No. | 4842E-1 |
| Test Software | Radiated Emission Program-To Shenzhen v2.0 |

Test Lab B:

| | |
|----------------------|---|
| Lab performing tests | SIEMIC (Nanjing-China) Laboratories |
| Lab Address | 2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China |
| FCC Test Site No. | 694825 |
| IC Test Site No. | 4842B-1 |
| Test Software | EZ_EMV(ver.lcp-03A1) |

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

| | |
|----------------------|---|
| Description of EUT: | Mobile phone |
| Main Model: | AX8 |
| Serial Model: | N/A |
| Antenna Gain: | <p>GSM850: -2.53dBi PCS1900: -1.31dBi UMTS-FDD Band V: -2dBi UMTS-FDD Band II: -1.74dBi LTE Band II: -1.31dBi LTE Band IV: -2.64dBi LTE Band V: -2.14dBi LTE Band VII: -0.27dBi WIFI(2.4G): -0.87 dBi WIFI(5150-5250MHz): -5.3 dBi WIFI(5250-5350MHz): -5.3 dBi WIFI(5725-5850MHz): -5.3 dBi Bluetooth/BLE: -0.87dBi GPS: -1.47dBi</p> |
| Antenna Type: | IFA Antenna |
| Input Power: | <p>Adapter: Model: CQ-18KX Input: AC100-240V~50/60Hz,400mA Output: DC 5V-9V,2A DC9V-12V,1.5A</p> <p>Battery: Model: BL-35AT Rating: 3.85V, 3500mAh/3600mAh(min/typ) 13.47Wh/13.86Wh(min/typ) Limited charge voltage: 4.4V</p> |
| Equipment Category : | JBP |

| | |
|-------------------------------|---|
| Type of Modulation: | <p>GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b: DSSS 802.11a/g/n20/n40: OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS: BPSK</p> |
| RF Operating Frequency (ies): | <p>GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz; RX: 1932.4 ~ 1987.6 MHz LTE Band II TX: 1850.7 ~ 1909.3MHz; RX : 1930.7 ~ 1989.3 MHz LTE Band IV TX: 1710.7 ~ 1754.3 MHz; RX : 2110.7~ 2154.3 MHz LTE Band V TX: 824.7~ 848.3 MHz; RX : 869.7 ~ 893.3MHz LTE Band VII TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz 802.11b/g: 2412-2462 MHz (TX/RX) 802.11n20: 2412-2462MHz ; 5180-5240 MHz; 5260-5320 MHz; 5745-5825 MHz; (TX/RX) 802.11n40: 2422-2452 MHz (TX/RX); 5190-5230 MHz; 5270-5310 MHz; 5755-5795 MHz; (TX/RX) 802.11 a: 5180-5240 MHz; 5260-5320 MHz; 5745-5825 MHz (TX/RX) Bluetooth& BLE: 2402-2480 MHz GPS: 1575.42 MHz</p> |
| Number of Channels: | <p>GSM 850: 124CH PCS1900: 299CH UMTS-FDD Band V : 102CH UMTS-FDD Band II : 277CH WIFI :802.11b/g: 11CH WIFI :802.11a: 24CH WIFI :802.11n20: 11CH(2.4GHz); 24CH(5GHz) WIFI :802.11n40: 7CH(2.4GHz); 12CH(5GHz) Bluetooth: 79CH BLE: 40CH GPS:1CH</p> |



| | |
|-------------|----------------|
| Test Report | 17070659-FCC-E |
| Page | 9 of 39 |

Port: USB Port, Earphone Port

Trade Name : TECNO

FCC ID: 2ADYY-AX8

Date EUT received: July 28, 2017

Test Date(s): July 29 to September 14, 2017

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

| FCC Rules | Description of Test | Result |
|---------------------------|-----------------------------------|------------|
| §15.107; ANSI C63.4: 2014 | AC Power Line Conducted Emissions | Compliance |
| §15.109; ANSI C63.4: 2014 | Radiated Emissions | Compliance |

Measurement Uncertainty

| Parameter | Uncertainty |
|---|-------------|
| AC Power Line Conducted Emissions (150kHz~30MHz) | ±3.11dB |
| Radiated Emission(30MHz~1GHz) | ±5.12dB |
| Radiated Emission(1GHz~6GHz) | ±5.34dB |


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

| | |
|----------------------|--------------------|
| Temperature | 23°C |
| Relative Humidity | 54% |
| Atmospheric Pressure | 1014mbar |
| Test date : | September 11, 2017 |
| Tested By : | Evans He |

Requirement(s):

| Spec | Item | Requirement | Applicable | | | | | | | | | | | | | | |
|------------------------|--------------|--|------------------------|--------------|--|----|---------|------------|---------|---------|---------|----|----|--------|----|----|-------------------------------------|
| 47CFR§15.107 | a) | <p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency ranges (MHz) | Limit (dBµV) | | QP | Average | 0.15 ~ 0.5 | 66 – 56 | 56 – 46 | 0.5 ~ 5 | 56 | 46 | 5 ~ 30 | 60 | 50 | <input checked="" type="checkbox"/> |
| Frequency ranges (MHz) | Limit (dBµV) | | | | | | | | | | | | | | | | |
| | QP | Average | | | | | | | | | | | | | | | |
| 0.15 ~ 0.5 | 66 – 56 | 56 – 46 | | | | | | | | | | | | | | | |
| 0.5 ~ 5 | 56 | 46 | | | | | | | | | | | | | | | |
| 5 ~ 30 | 60 | 50 | | | | | | | | | | | | | | | |
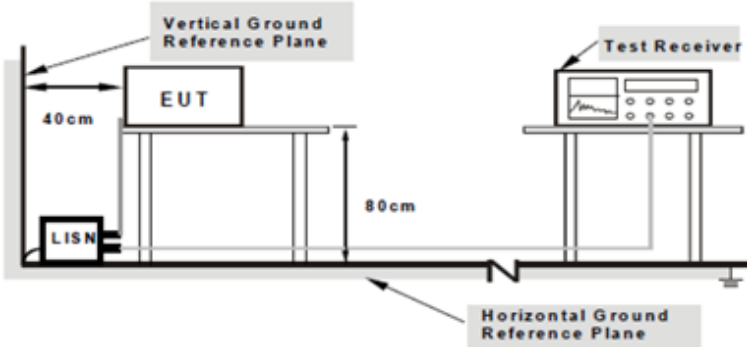
| | |
|------------|---|
| Test Setup |  <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p> |
|------------|---|

| | |
|-----------|--|
| Procedure | <ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50Ω /50mH EUT LISN, connected to filtered mains. |
|-----------|--|


| | |
|-------------|----------------|
| Test Report | 17070659-FCC-E |
| Page | 12 of 39 |

| | |
|--------|--|
| | <ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power). |
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : USB Mode

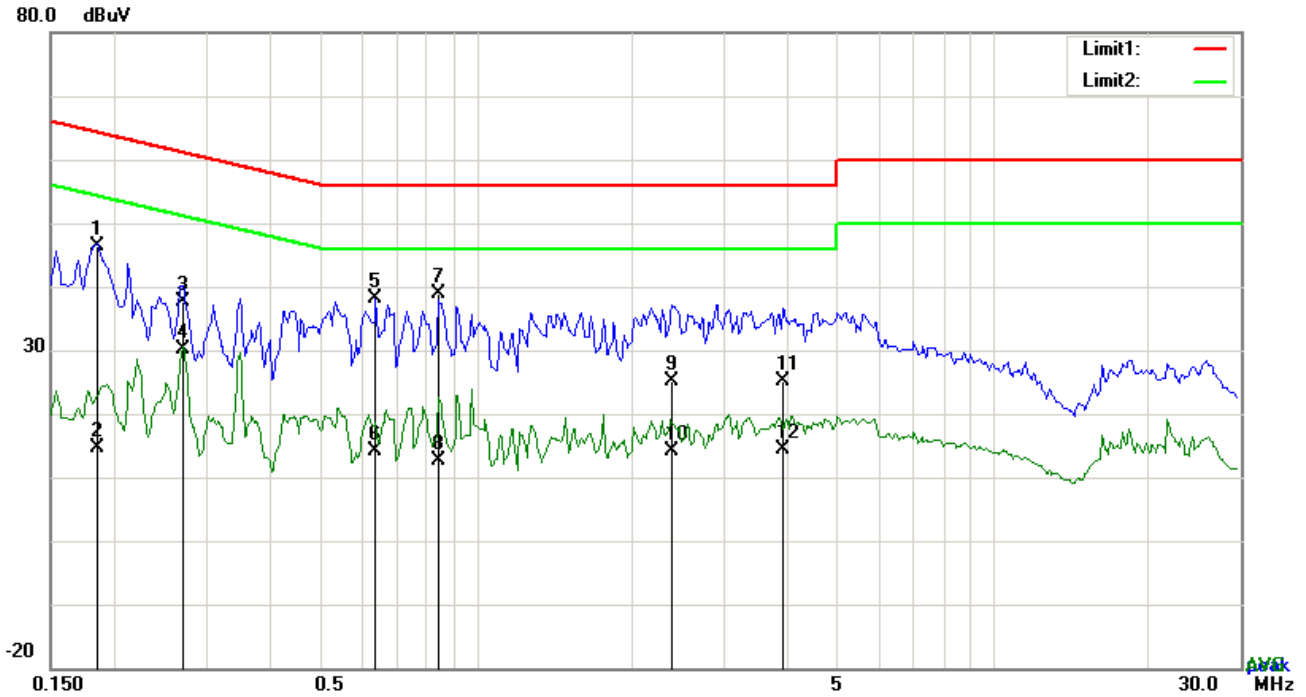


Test Data

Phase Line Plot at 120Vac, 60Hz

| No. | P/L | Frequency | Reading | Detector | Corrected | Result | Limit | Margin |
|-----|-----|-----------|---------|----------|-----------|--------|--------|--------|
| | | (MHz) | (dBuV) | | (dB) | (dBuV) | (dBuV) | (dB) |
| 1 | L1 | 0.1851 | 36.30 | QP | 10.03 | 46.33 | 64.25 | -17.92 |
| 2 | L1 | 0.1851 | 4.49 | AVG | 10.03 | 14.52 | 54.25 | -39.73 |
| 3 | L1 | 0.2709 | 27.69 | QP | 10.03 | 37.72 | 61.09 | -23.37 |
| 4 | L1 | 0.2709 | 20.13 | AVG | 10.03 | 30.16 | 51.09 | -20.93 |
| 5 | L1 | 0.6375 | 28.09 | QP | 10.03 | 38.12 | 56.00 | -17.88 |
| 6 | L1 | 0.6375 | 4.18 | AVG | 10.03 | 14.21 | 46.00 | -31.79 |
| 7 | L1 | 0.8481 | 28.81 | QP | 10.03 | 38.84 | 56.00 | -17.16 |
| 8 | L1 | 0.8481 | 2.71 | AVG | 10.03 | 12.74 | 46.00 | -33.26 |
| 9 | L1 | 2.3925 | 15.17 | QP | 10.05 | 25.22 | 56.00 | -30.78 |
| 10 | L1 | 2.3925 | 4.20 | AVG | 10.05 | 14.25 | 46.00 | -31.75 |
| 11 | L1 | 3.9165 | 15.18 | QP | 10.07 | 25.25 | 56.00 | -30.75 |
| 12 | L1 | 3.9165 | 4.40 | AVG | 10.07 | 14.47 | 46.00 | -31.53 |

| | |
|-------------------|-----------------|
| Test Mode: | USB Mode |
|-------------------|-----------------|

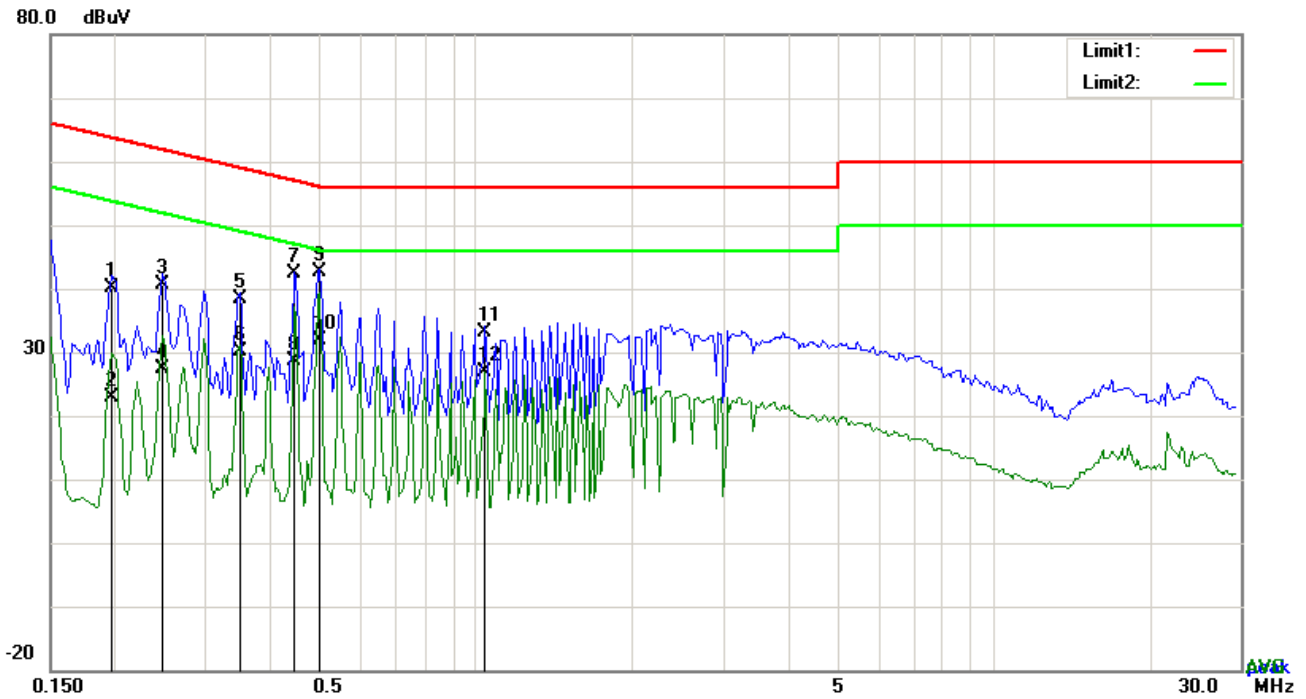


Test Data

Phase Neutral Plot at 120Vac, 60Hz

| No. | P/L | Frequency | Reading | Detector | Corrected | Result | Limit | Margin |
|-----|-----|-----------|---------|----------|-----------|--------|--------|--------|
| | | (MHz) | (dBuV) | | (dB) | (dBuV) | (dBuV) | (dB) |
| 1 | N | 0.1968 | 30.21 | QP | 10.02 | 40.23 | 63.74 | -23.51 |
| 2 | N | 0.1968 | 12.80 | AVG | 10.02 | 22.82 | 53.74 | -30.92 |
| 3 | N | 0.2475 | 30.65 | QP | 10.02 | 40.67 | 61.84 | -21.17 |
| 4 | N | 0.2475 | 17.29 | AVG | 10.02 | 27.31 | 51.84 | -24.53 |
| 5 | N | 0.3489 | 28.32 | QP | 10.02 | 38.34 | 58.99 | -20.65 |
| 6 | N | 0.3489 | 20.04 | AVG | 10.02 | 30.06 | 48.99 | -18.93 |
| 7 | N | 0.4464 | 32.42 | QP | 10.02 | 42.44 | 56.94 | -14.50 |
| 8 | N | 0.4464 | 18.62 | AVG | 10.02 | 28.64 | 46.94 | -18.30 |
| 9 | N | 0.4971 | 32.63 | QP | 10.02 | 42.65 | 56.05 | -13.40 |
| 10 | N | 0.4971 | 21.91 | AVG | 10.02 | 31.93 | 46.05 | -14.12 |
| 11 | N | 1.0392 | 23.06 | QP | 10.03 | 33.09 | 56.00 | -22.91 |
| 12 | N | 1.0392 | 16.83 | AVG | 10.03 | 26.86 | 46.00 | -19.14 |

| | |
|--------------------|-----------------|
| Test Mode : | USB Mode |
|--------------------|-----------------|

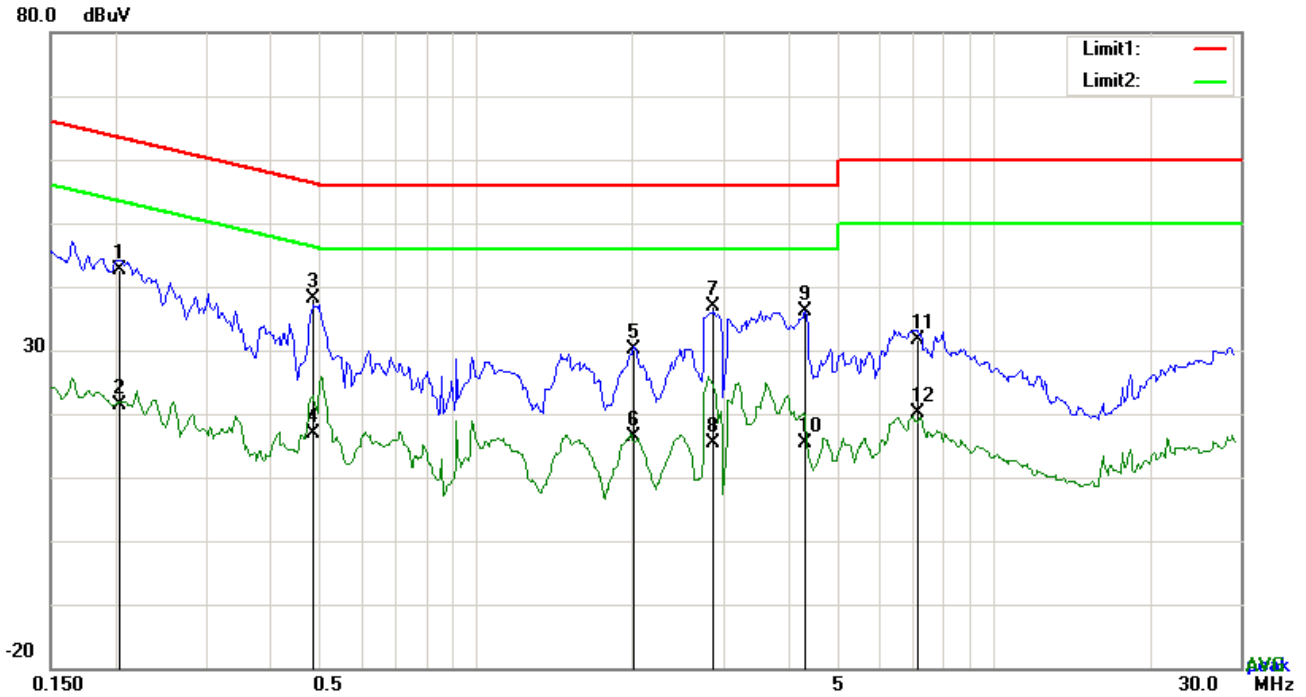


Test Data

Phase Line Plot at 240Vac, 60Hz

| No. | P/L | Frequency | Reading | Detector | Corrected | Result | Limit | Margin |
|-----|-----|-----------|---------|----------|-----------|--------|--------|--------|
| | | (MHz) | (dBuV) | | (dB} | (dBuV) | (dBuV) | (dB) |
| 1 | L1 | 0.2046 | 32.52 | QP | 10.03 | 42.55 | 63.42 | -20.87 |
| 2 | L1 | 0.2046 | 11.23 | AVG | 10.03 | 21.26 | 53.42 | -32.16 |
| 3 | L1 | 0.4815 | 28.10 | QP | 10.03 | 38.13 | 56.31 | -18.18 |
| 4 | L1 | 0.4815 | 6.92 | AVG | 10.03 | 16.95 | 46.31 | -29.36 |
| 5 | L1 | 2.0181 | 20.04 | QP | 10.04 | 30.08 | 56.00 | -25.92 |
| 6 | L1 | 2.0181 | 6.44 | AVG | 10.04 | 16.48 | 46.00 | -29.52 |
| 7 | L1 | 2.8605 | 26.78 | QP | 10.05 | 36.83 | 56.00 | -19.17 |
| 8 | L1 | 2.8605 | 5.45 | AVG | 10.05 | 15.50 | 46.00 | -30.50 |
| 9 | L1 | 4.3299 | 25.95 | QP | 10.07 | 36.02 | 56.00 | -19.98 |
| 10 | L1 | 4.3299 | 5.28 | AVG | 10.07 | 15.35 | 46.00 | -30.65 |
| 11 | L1 | 7.1652 | 21.57 | QP | 10.11 | 31.68 | 60.00 | -28.32 |
| 12 | L1 | 7.1652 | 10.13 | AVG | 10.11 | 20.24 | 50.00 | -29.76 |

| | |
|--------------------|-----------------|
| Test Mode : | USB Mode |
|--------------------|-----------------|

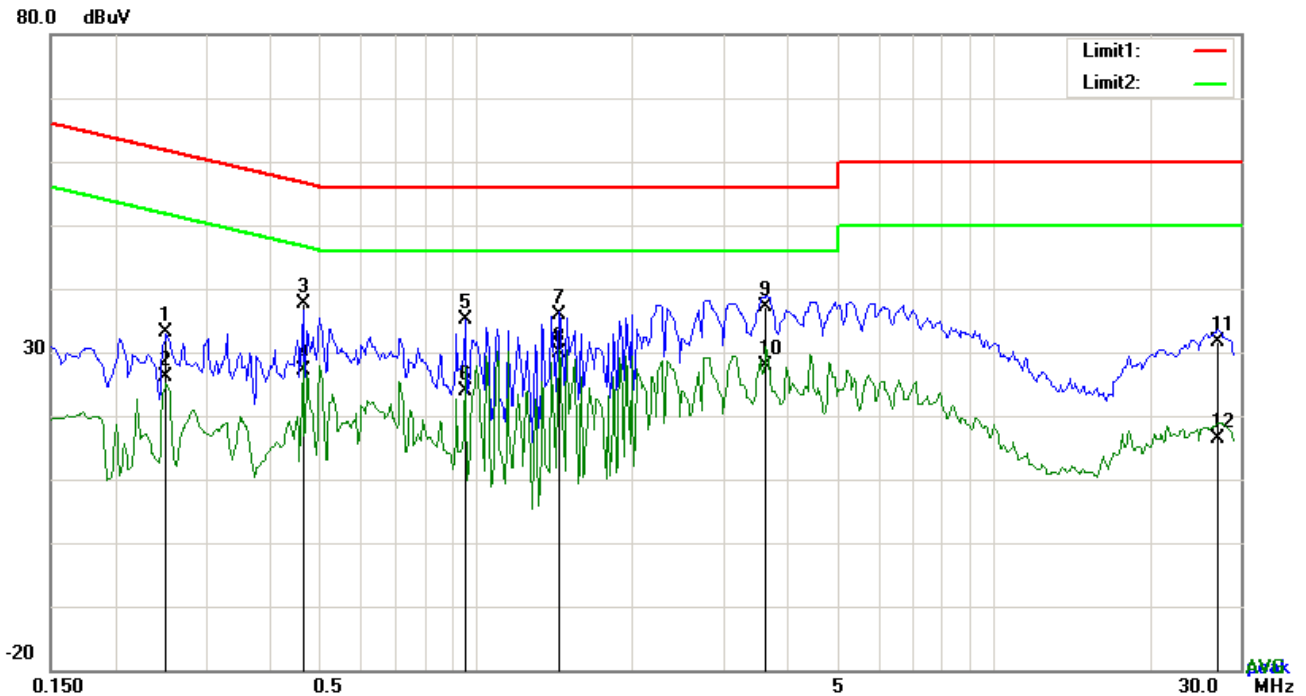

Test Data

Phase Neutral Plot at 240Vac, 60Hz


| No. | P/L | Frequency | Reading | Detector | Corrected | Result | Limit | Margin |
|-----|-----|-----------|---------|----------|-----------|--------|--------|--------|
| | | (MHz) | (dBuV) | | (dB} | (dBuV) | (dBuV) | (dB) |
| 1 | N | 0.2514 | 23.05 | QP | 10.02 | 33.07 | 61.71 | -28.64 |
| 2 | N | 0.2514 | 16.05 | AVG | 10.02 | 26.07 | 51.71 | -25.64 |
| 3 | N | 0.4620 | 27.71 | QP | 10.02 | 37.73 | 56.66 | -18.93 |
| 4 | N | 0.4620 | 17.05 | AVG | 10.02 | 27.07 | 46.66 | -19.59 |
| 5 | N | 0.9495 | 24.98 | QP | 10.03 | 35.01 | 56.00 | -20.99 |
| 6 | N | 0.9495 | 13.90 | AVG | 10.03 | 23.93 | 46.00 | -22.07 |
| 7 | N | 1.4448 | 25.90 | QP | 10.03 | 35.93 | 56.00 | -20.07 |
| 8 | N | 1.4448 | 19.75 | AVG | 10.03 | 29.78 | 46.00 | -16.22 |
| 9 | N | 3.6318 | 27.15 | QP | 10.06 | 37.21 | 56.00 | -18.79 |
| 10 | N | 3.6318 | 17.71 | AVG | 10.06 | 27.77 | 46.00 | -18.23 |
| 11 | N | 27.1137 | 21.29 | QP | 10.37 | 31.66 | 60.00 | -28.34 |
| 12 | N | 27.1137 | 6.03 | AVG | 10.37 | 16.40 | 50.00 | -33.60 |

6.2 Radiated Emissions

| | |
|----------------------|--------------------|
| Temperature | 23°C |
| Relative Humidity | 54% |
| Atmospheric Pressure | 1014mbar |
| Test date : | September 11, 2017 |
| Tested By : | Evans He |

Requirement(s):

| Spec | Item | Requirement | Applicable | | | | | | | | | | |
|-----------------|------|---|-------------------------------------|---|---|---------|-----|----------|-----|-----------|-----|-----------|-----|
| 47CFR§15.109(d) | a) | Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges | <input checked="" type="checkbox"/> | | | | | | | | | | |
| | | <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 - 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> | | Frequency range (MHz) | Field Strength ($\mu\text{V}/\text{m}$) | 30 – 88 | 100 | 88 – 216 | 150 | 216 - 960 | 200 | Above 960 | 500 |
| | | Frequency range (MHz) | | Field Strength ($\mu\text{V}/\text{m}$) | | | | | | | | | |
| | | 30 – 88 | | 100 | | | | | | | | | |
| | | 88 – 216 | | 150 | | | | | | | | | |
| 216 - 960 | 200 | | | | | | | | | | | | |
| Above 960 | 500 | | | | | | | | | | | | |

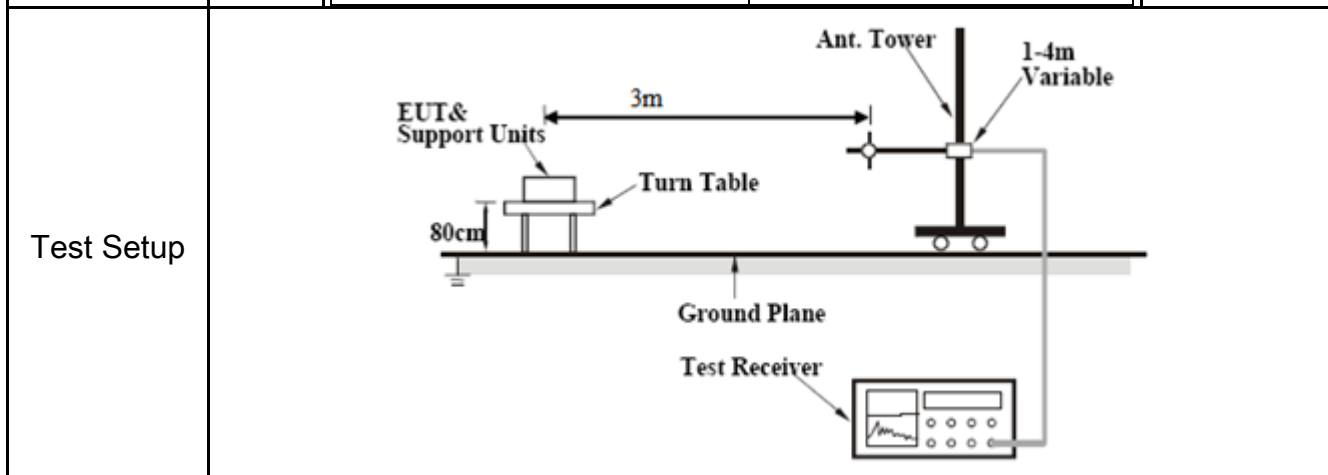

| | |
|-----------|---|
| Procedure | <ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level |
|-----------|---|

| | |
|--------|--|
| | <p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <ul style="list-style-type: none"> ■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%) <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p> |
| Remark | |
| Result | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail |


Test Data Yes N/A

Test Plot Yes (See below) N/A

| | |
|--------------------|-----------------|
| Test Mode : | USB Mode |
|--------------------|-----------------|

Below 1GHz

80.0 dBuV/m

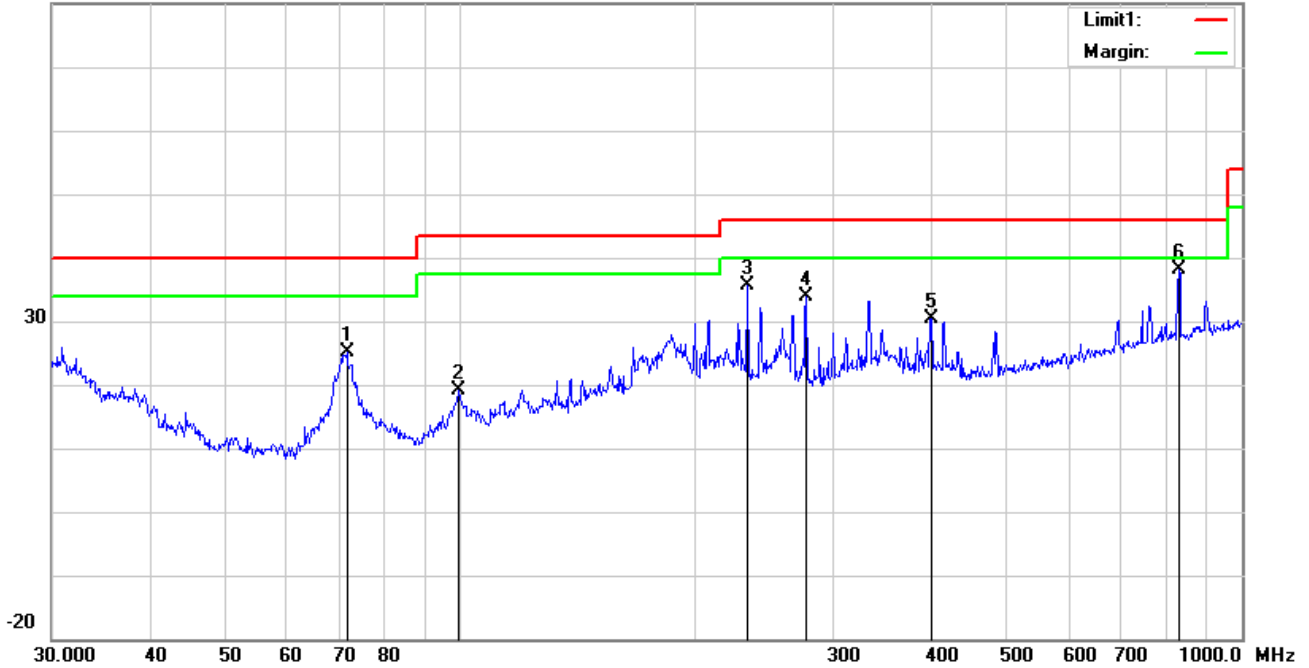


Test Data

Horizontal Polarity Plot @3m

| No. | P/L | Frequency (MHz) | Reading (dBuV/m) | Detector | Ant_F (dB/m) | PA_G (dB) | Cab_L (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) |
|-----|-----|--------------------|---------------------|----------|-----------------|--------------|---------------|--------------------|-------------------|----------------|----------------|---------------|
| 1 | H | 71.5806 | 38.67 | peak | 7.77 | 22.39 | 0.97 | 25.02 | 40.00 | -14.98 | 200 | 292 |
| 2 | H | 99.5281 | 29.94 | peak | 10.29 | 22.32 | 1.11 | 19.02 | 43.50 | -24.48 | 100 | 32 |
| 3 | H | 233.3487 | 44.57 | peak | 11.63 | 22.32 | 1.65 | 35.53 | 46.00 | -10.47 | 100 | 165 |
| 4 | H | 277.0935 | 41.74 | peak | 12.59 | 22.29 | 1.75 | 33.79 | 46.00 | -12.21 | 100 | 110 |
| 5 | H | 400.4319 | 34.60 | peak | 15.71 | 22.01 | 2.01 | 30.31 | 46.00 | -15.69 | 100 | 148 |
| 6 | H | 830.4002 | 34.47 | peak | 21.73 | 21.07 | 2.91 | 38.04 | 46.00 | -7.96 | 100 | 275 |

Below 1GHz

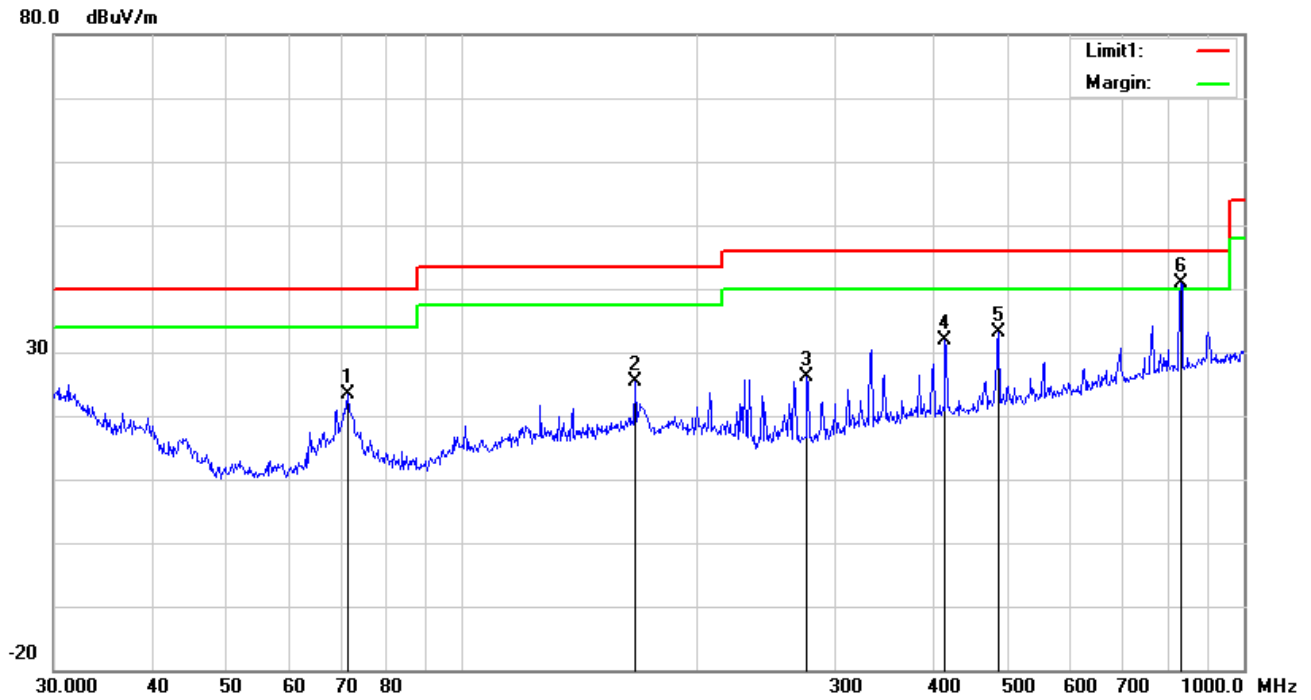

Test Data

Vertical Polarity Plot @3m

| No. | P/L | Frequency | Reading | Detector | Ant_F | PA_G | Cab_L | Result | Limit | Margin | Height | Degree |
|-----|-----|-----------|----------|----------|--------|-------|-------|----------|----------|--------|--------|--------|
| | | (MHz) | (dBuV/m) | | (dB/m) | (dB) | (dB) | (dBuV/m) | (dBuV/m) | (dB) | (cm) | (°) |
| 1 | V | 71.3300 | 37.01 | peak | 7.77 | 22.39 | 0.97 | 23.36 | 40.00 | -16.64 | 100 | 11 |
| 2 | V | 166.6514 | 34.17 | peak | 12.07 | 22.26 | 1.37 | 25.35 | 43.50 | -18.15 | 100 | 291 |
| 3 | V | 276.1236 | 34.16 | peak | 12.55 | 22.29 | 1.75 | 26.17 | 46.00 | -19.83 | 100 | 202 |
| 4 | V | 414.7223 | 35.79 | peak | 15.99 | 21.98 | 2.05 | 31.85 | 46.00 | -14.15 | 100 | 32 |
| 5 | V | 485.6093 | 35.11 | peak | 17.41 | 21.84 | 2.34 | 33.02 | 46.00 | -12.98 | 100 | 145 |
| 6 | V | 830.4002 | 37.39 | QP | 21.73 | 21.07 | 2.91 | 40.96 | 46.00 | -5.04 | 100 | 34 |

Above 1GHz

| Frequency (MHz) | Read_level (dB μ V/m) | Azimuth | Height (cm) | Polarity (H/V) | Level (dB μ V/m) | Factors (dB) | Limit (dB μ V/m) | Margin (dB) | Detector (PK/AV) |
|--------------------|------------------------------|---------|----------------|-------------------|-------------------------|-----------------|-------------------------|----------------|---------------------|
| 1629.7 | 62.89 | 165 | 100 | V | -17.76 | 45.13 | 74 | -28.87 | PK |
| 1754.3 | 63.11 | 234 | 100 | V | -16.74 | 46.37 | 74 | -27.63 | PK |
| 2298.5 | 59.1 | 314 | 100 | V | -14.19 | 44.91 | 74 | -29.09 | PK |
| 1433.5 | 66.13 | 102 | 100 | H | -18.95 | 47.18 | 74 | -26.82 | PK |
| 1824.9 | 62.9 | 116 | 100 | H | -19.39 | 43.51 | 74 | -30.49 | PK |
| 2425.1 | 67.38 | 45 | 100 | H | -17.81 | 49.57 | 74 | -24.43 | PK |

*Note1: The highest frequency of the EUT is 5320 MHz, so the testing has been conformed to 5*5320MHz=26,600MHz.*

Note2: The frequency that above 3GHz is mainly from the environment noise.

Note3: The AV measurement performed, more than 20dB below limit so AV test data was not presented.

Note4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.


Annex A. TEST INSTRUMENT

| Instrument | Model | Serial # | Cal Date | Cal Due | In use |
|---|----------|------------|------------|------------|-------------------------------------|
| AC Line Conducted Emissions | | | | | |
| EMI test receiver | ESCS30 | 8471241027 | 09/16/2016 | 09/15/2017 | <input checked="" type="checkbox"/> |
| Line Impedance Stabilization Network | LI-125A | 191106 | 09/24/2016 | 09/23/2017 | <input checked="" type="checkbox"/> |
| Line Impedance Stabilization Network | LI-125A | 191107 | 09/24/2016 | 09/23/2017 | <input checked="" type="checkbox"/> |
| ISN | ISN T800 | 34373 | 09/24/2016 | 09/23/2017 | <input type="checkbox"/> |
| Transient Limiter | LIT-153 | 531118 | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |
| Radiated Emissions | | | | | |
| EMI test receiver | ESL6 | 100262 | 09/16/2016 | 09/15/2017 | <input checked="" type="checkbox"/> |
| OPT 010 AMPLIFIER (0.1-1300MHz) | 8447E | 2727A02430 | 08/30/2017 | 08/29/2018 | <input checked="" type="checkbox"/> |
| Horn Antenna | BBHA9170 | 3145226D1 | 09/28/2016 | 09/27/2017 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (1 ~ 26.5GHz) | 8449B | 3008A02402 | 03/23/2017 | 03/22/2018 | <input checked="" type="checkbox"/> |
| Bilog Antenna (30MHz~6GHz) | JB6 | A110712 | 09/20/2016 | 09/19/2017 | <input checked="" type="checkbox"/> |
| Double Ridge Horn Antenna | AH-118 | 71259 | 09/23/2016 | 09/22/2017 | <input checked="" type="checkbox"/> |

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo


Whole Package View

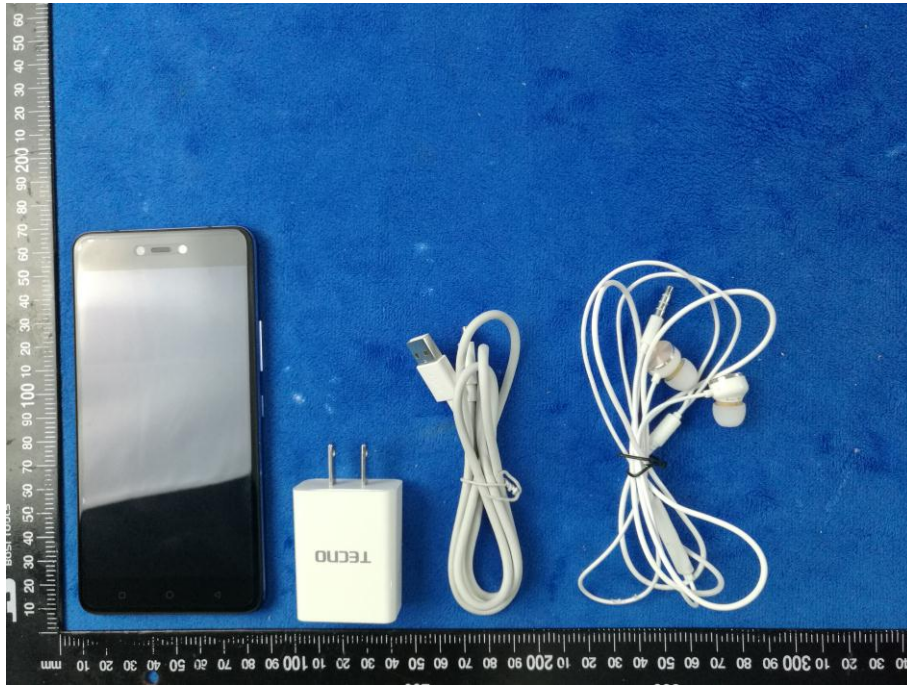


Adapter - Label View



EUT - Front View

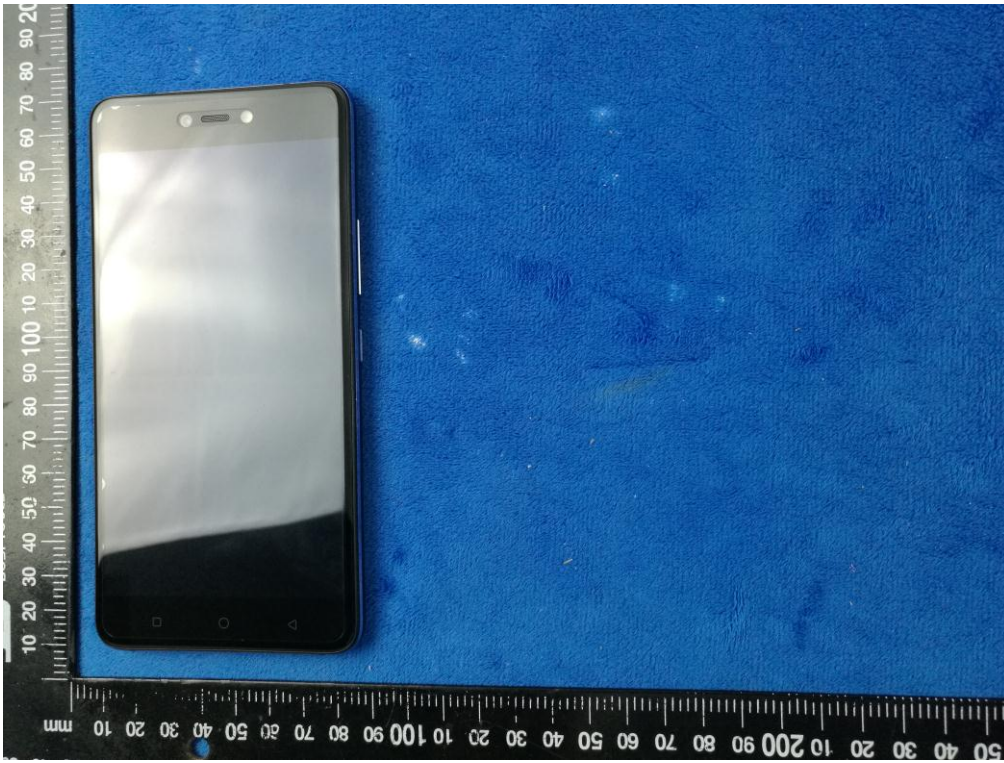

EUT - Rear View

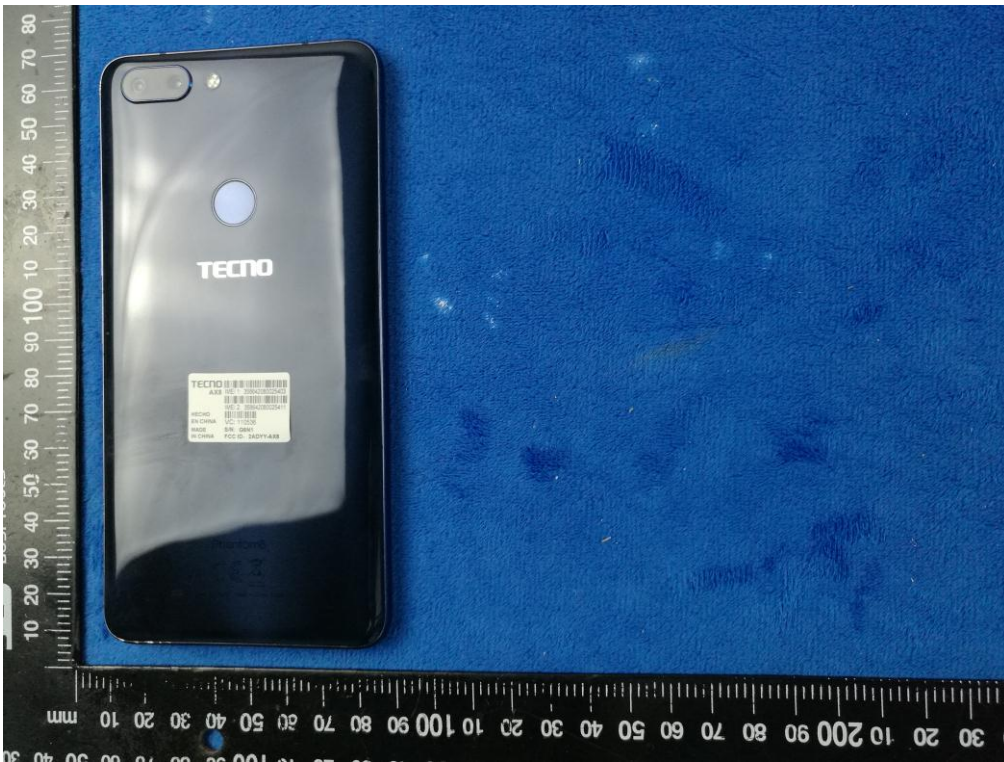


EUT - Top View



EUT - Bottom View



EUT - Left View

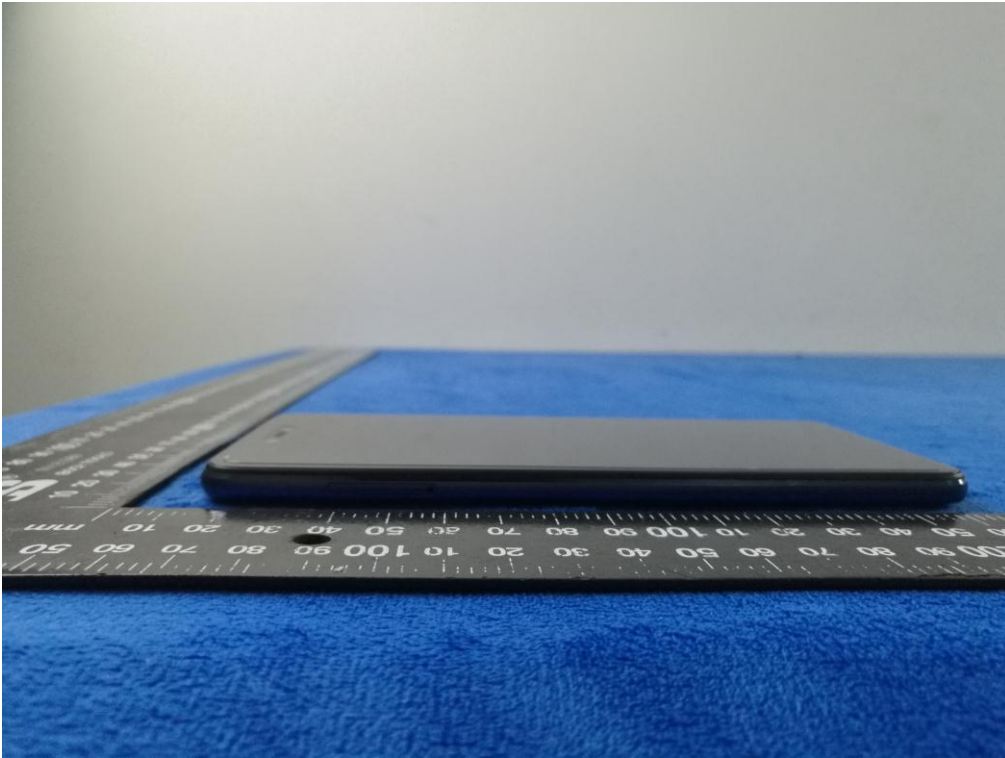

EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

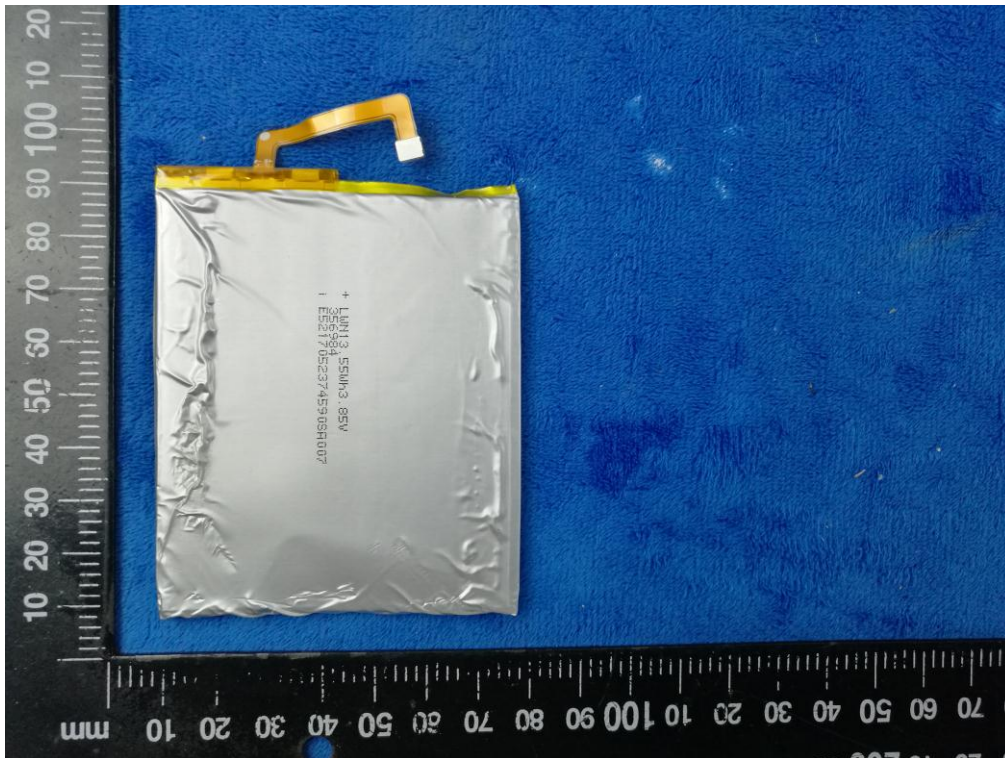

Mainboard with Shielding - Front View

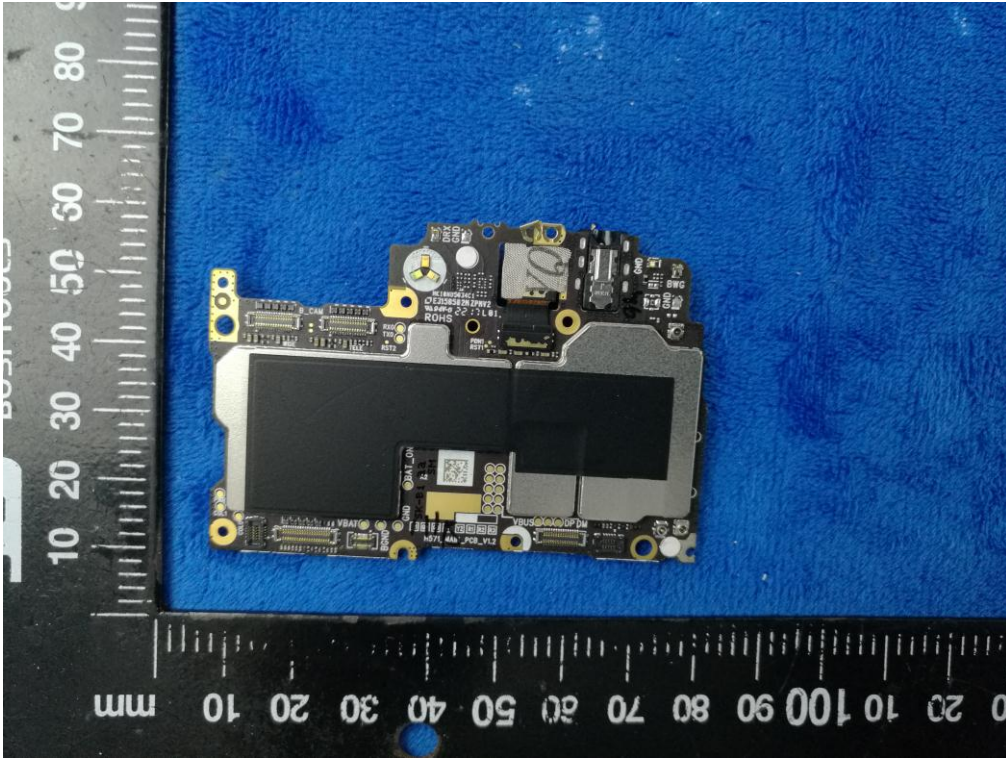


Mainboard without Shielding - Front View

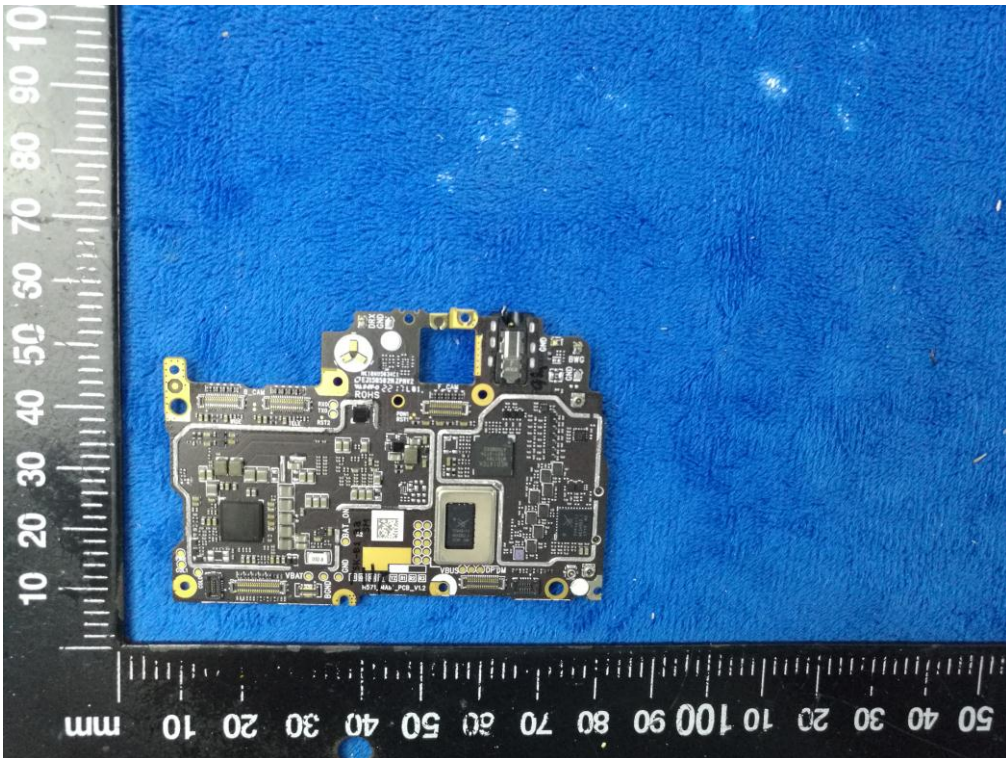

Mainboard with Shielding- Rear View




Mainboard without Shielding- Rear View

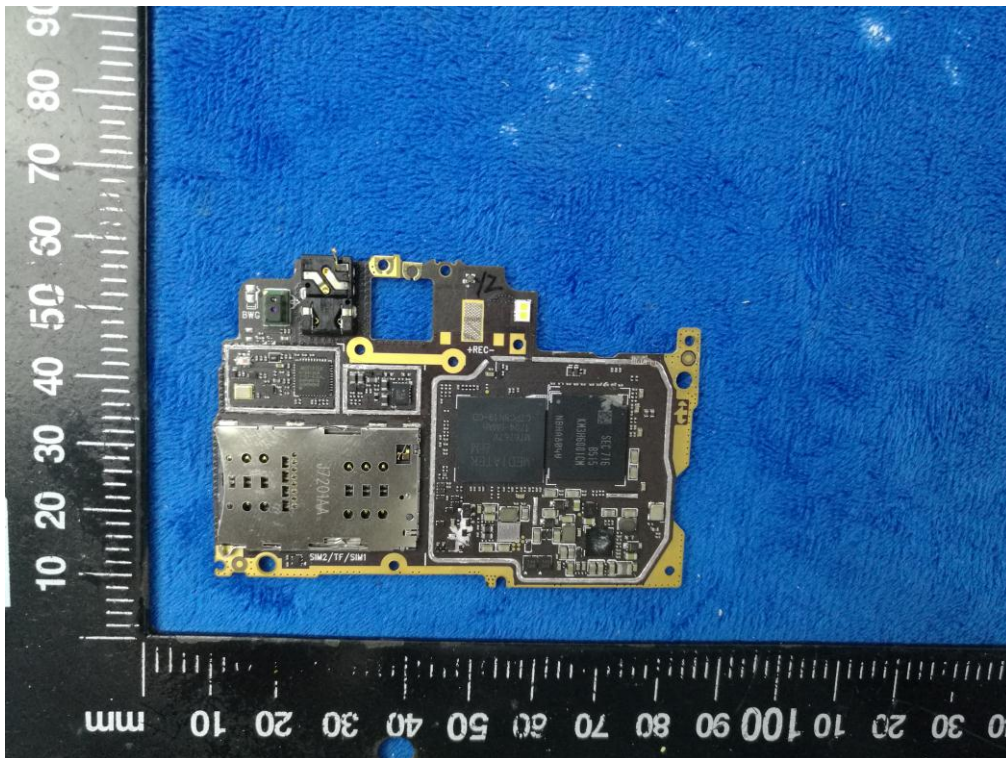

LCD – Front View



LCD – Rear View

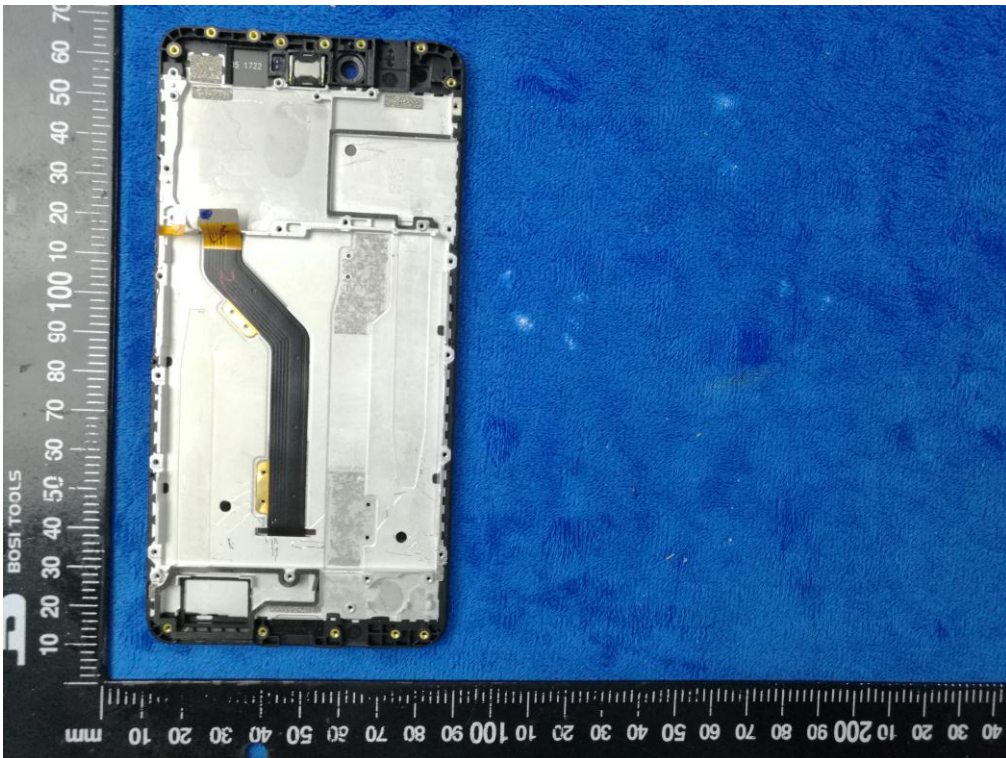

GSM/PCS/UMTS-FDD Antenna View



2.4WIFI/5G WIFI/BT/BLE/GPS - Antenna View




LTE - Antenna View



Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup – Front View

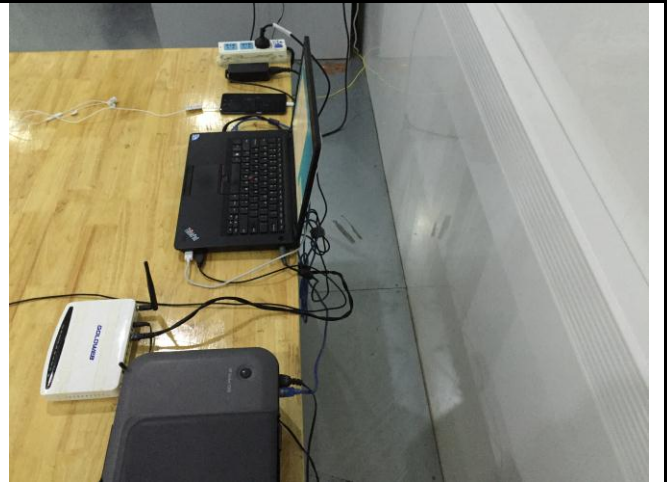

Conducted Emissions Test Setup – Side View



Radiated Emissions Test Setup Below 1GHz




Radiated Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

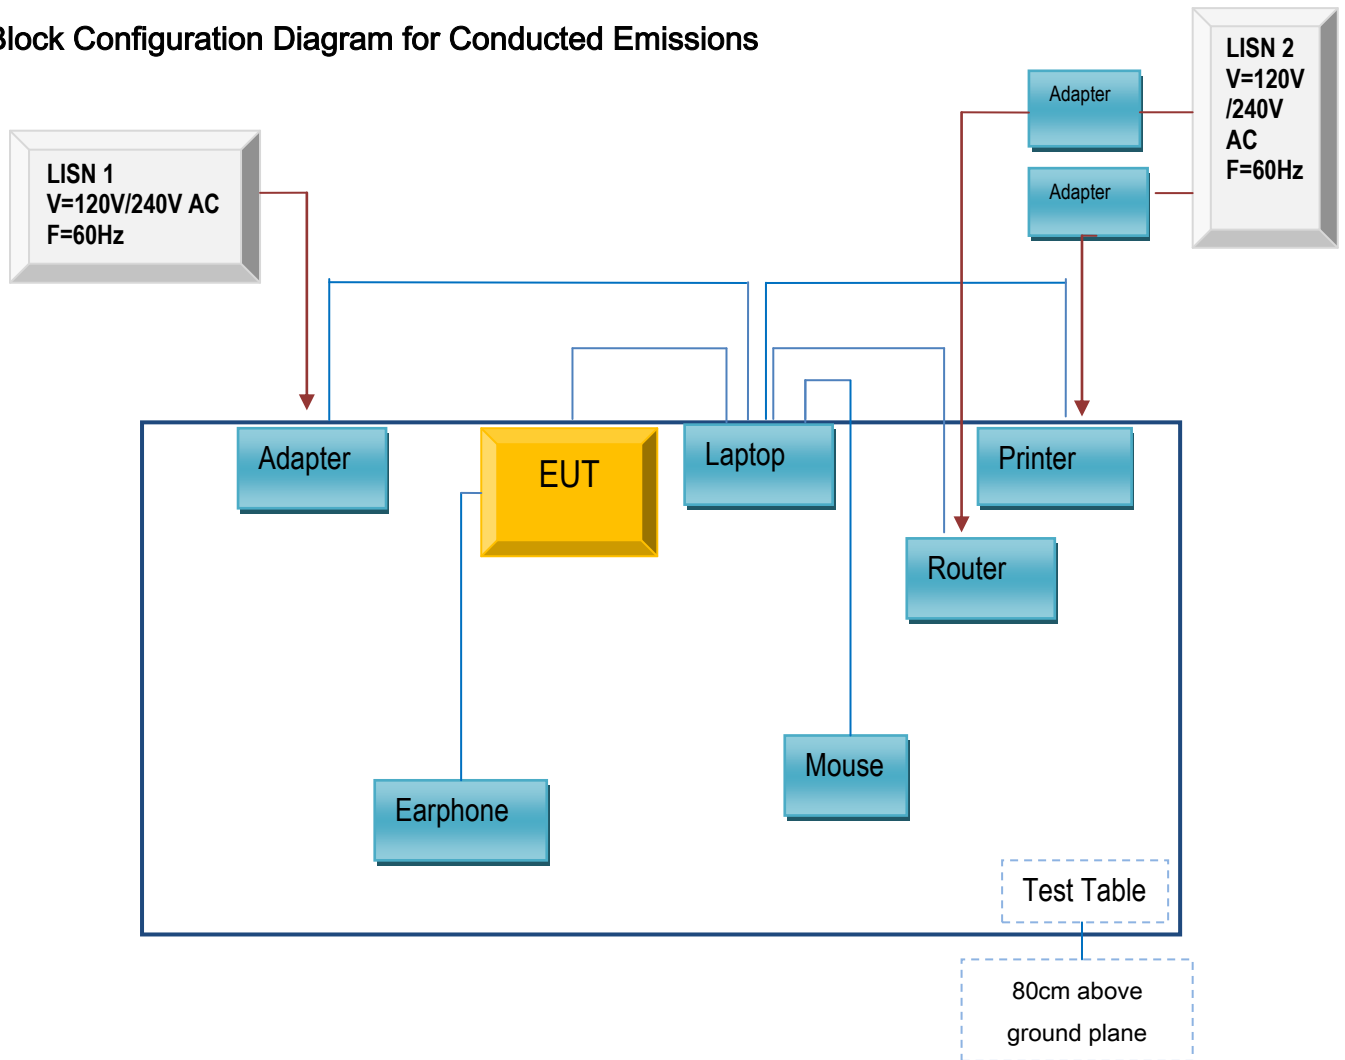

Block Configuration Diagram for Radiated Emissions

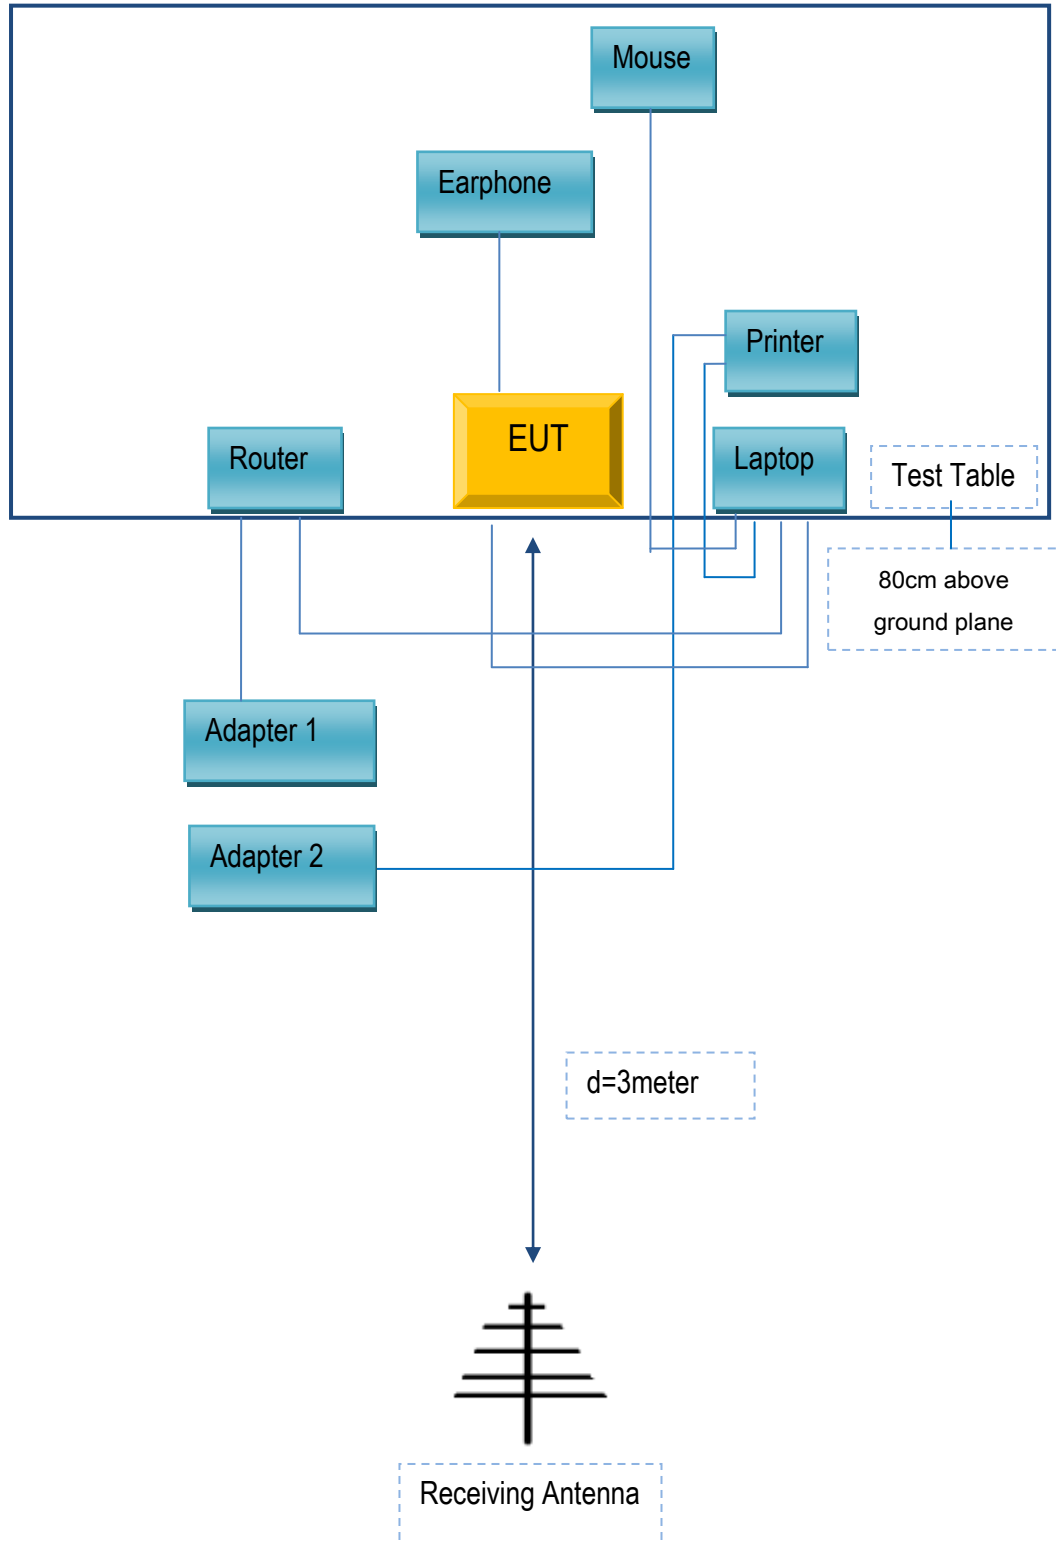

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

| Manufacturer | Equipment Description | Model | Serial No |
|----------------------|-----------------------|------------|---------------|
| Lenovo | Laptop | E40 | LR-1EHRX |
| GOLDWEB | Router | R102 | 1202032094 |
| Lenovo | AC Adapter | 42T4416 | 21D9JU |
| HP | Printer | VCVRA-1003 | CN36M19JWX |
| DELL | Mouse | E100 | 912NMTUT41481 |
| BULL | Socket | GN-403 | GN201203 |
| TECNO MOBILE LIMITED | Earphone | AX8 | N/A |

Supporting Cable:

| Cable type | Shield Type | Ferrite Core | Length | Serial No |
|---------------------|--------------|--------------|--------|--------------|
| USB Cable | Un-shielding | No | 2m | JX120051274 |
| USB Cable | Un-shielding | No | 2m | CBA3000AH0C1 |
| RJ45 Cable | Un-shielding | No | 2m | KX156327541 |
| Router Power cable | Un-shielding | No | 2m | 13274630Z |
| Printer Power cable | Un-shielding | No | 2m | 127581031 |
| Power Cable | Un-shielding | No | 0.8m | GT211032 |

| | |
|-------------|----------------|
| Test Report | 17070659-FCC-E |
| Page | 38 of 39 |

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

| | |
|-------------|----------------|
| Test Report | 17070659-FCC-E |
| Page | 39 of 39 |

Annex E. DECLARATION OF SIMILARITY

N/A