




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-6.534	30	Pass
NVNT	BLE	2442	Ant1	-4.948	30	Pass
NVNT	BLE	2480	Ant1	-3.973	30	Pass



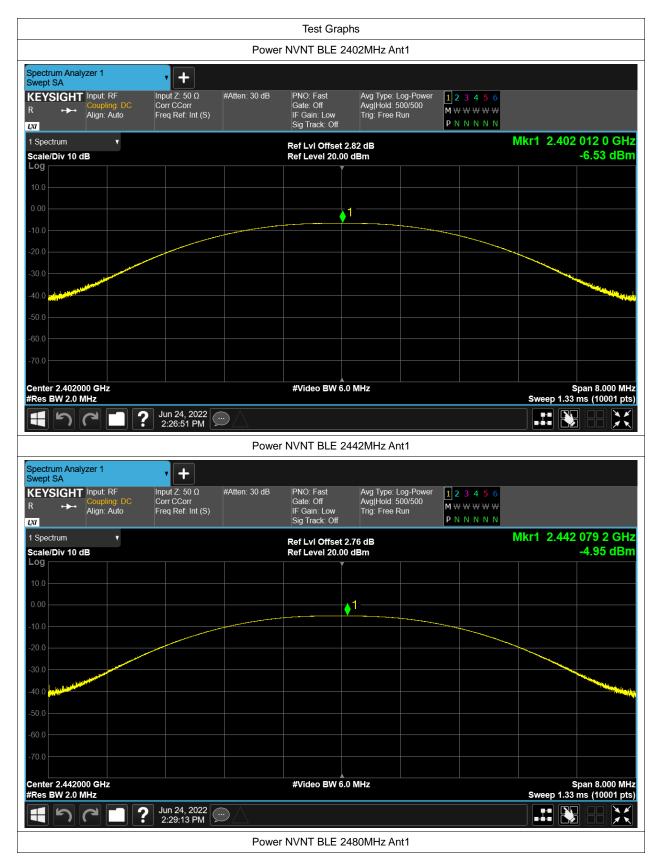









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.684	0.5	Pass
NVNT	BLE	2442	Ant1	0.684	0.5	Pass
NVNT	BLE	2480	Ant1	0.684	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.058806976	
NVNT	BLE	2442	Ant1	1.056737202	
NVNT	BLE	2480	Ant1	1.058468076	

Project No.: JYTSZR2206051













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-12.992	8	Pass
NVNT	BLE	2442	Ant1	-11.385	8	Pass
NVNT	BLE	2480	Ant1	-10.371	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.24	-20	Pass
NVNT	BLE	2480	Ant1	-43.78	-20	Pass



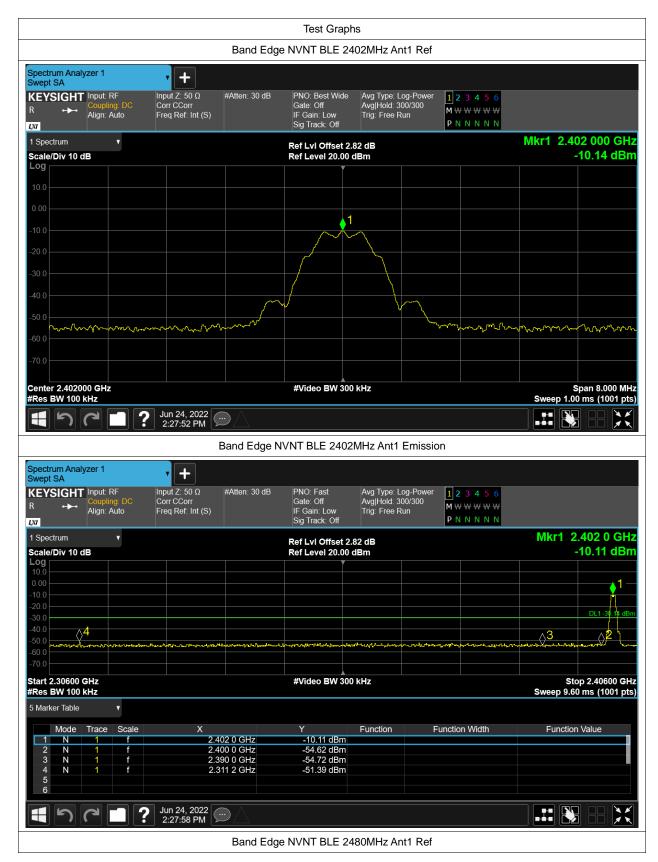



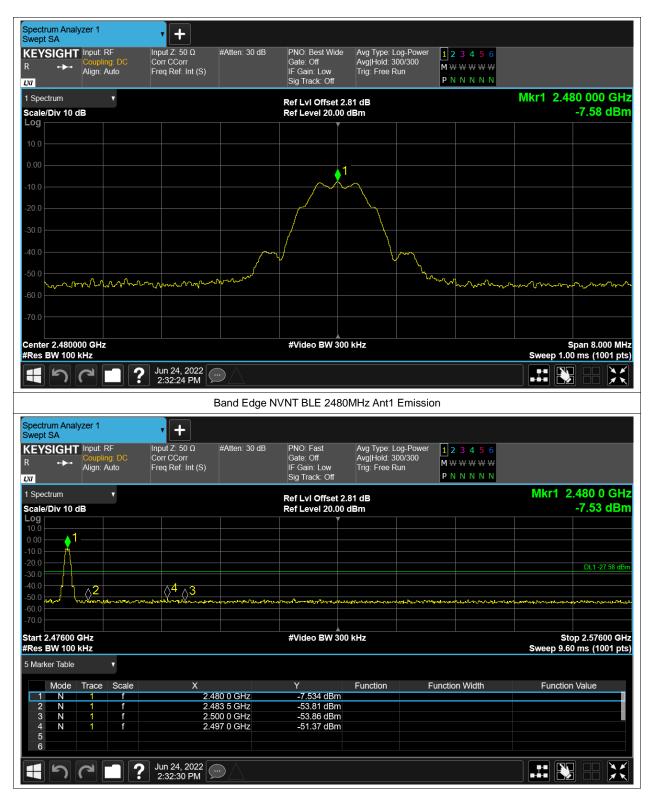





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-37.12	-20	Pass
NVNT	BLE	2442	Ant1	-38.59	-20	Pass
NVNT	BLE	2480	Ant1	-39.49	-20	Pass







