

TEST REPORT

Reference No. : WTS20S03007917W006 V1
FCC ID..... : 2ADYY-CD7
Applicant..... : TECNO MOBILE LIMITED
Address..... : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR
HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong
Manufacturer : SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Address : 101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng
Street, Longhua District, Shenzhen City, P.R. China
Product Name : Mobile Phone
Model No. : CD7
Brand..... : TECNO
Standards..... : FCC CFR47 Part 15 E Section 15.407: 2018
Date of Receipt sample..... : 2020-03-09
Date of Test..... : 2020-03-10 to 2020-03-19
Date of Issue : 2020-03-25
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

Ford Wang



Philip Zhang

Ford Wang / Project Engineer

Philip Zhang / Manager

2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 REVISION HISTORY	4
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST MODE DESCRIPTION:.....	7
4.5 TEST FACILITY	9
5 EQUIPMENT USED DURING TEST	10
5.1 EQUIPMENTS LIST	10
5.2 DESCRIPTION OF SUPPORT UNITS	11
5.3 MEASUREMENT UNCERTAINTY	11
5.4 TEST EQUIPMENT CALIBRATION	11
6 TEST SUMMARY	12
7 CONDUCTED EMISSION	13
7.1 E.U.T. OPERATION	13
7.2 EUT SETUP.....	13
7.3 MEASUREMENT DESCRIPTION	13
7.4 CONDUCTED EMISSION TEST RESULT	14
8 RADIATED EMISSIONS	16
8.1 EUT OPERATION.....	16
8.2 TEST SETUP	17
8.3 SPECTRUM ANALYZER SETUP	18
8.4 TEST PROCEDURE	19
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
8.6 SUMMARY OF TEST RESULTS	20
9 DUTY CYCLE	36
9.1 SUMMARY OF TEST RESULTS	36
10 BAND EDGE	43
10.1 TEST PRODUCE	43
10.2 TEST RESULT	44
11 6 DB BANDWIDTH	56
11.1 TEST PROCEDURE:.....	56
11.2 TEST RESULT:	56
12 26 DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	64
12.1 TEST PROCEDURE:.....	64
12.2 TEST RESULT:	65
13 CONDUCTED OUTPUT POWER	80
13.1 TEST PROCEDURE:.....	80
13.2 TEST RESULT :	81
14 POWER SPECTRAL DENSITY	96
14.1 TEST PROCEDURE:.....	96
14.2 TEST RESULT:	97
15 FREQUENCY STABILITY	112

15.1	TEST PROCEDURE:.....	112
15.2	TEST RESULT:	113
16	ANTENNA REQUIREMENT	114
17	RF EXPOSURE.....	115
18	PHOTOGRAPHS OF TEST SETUP AND EUT.....	116

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS20S03007 917W006	2020-03-09	2020-03-10 to 2020-03- 19	2020-03-20	original	-	Replaced
WTS20S03007 917W006 V1	2020-03-09	2020-03-10 to 2020-03- 19	2020-03-25	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Mobile Phone
Model(s):	CD7
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	V1.1
Software Version:	CD7-H6214AB-Q-191219V317
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	802.11a/ n(HT20/40)/ac(HT20/40/80): 5150MHz to 5250MHz 802.11a/ n(HT20/40)/ac(HT20/40/80): 5725MHz to 5850MHz
Max. RF output power:	U-NII-1: 8.18dBm U-NII-3: 10.68dBm
Type of Modulation:	OFDM
Antenna installation:	internal permanent antenna
Antenna Gain:	U-NII-1: 3.07dBi U-NII-3: 3.07dBi
Ratings:	Battery DC 3.85V, 4900mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.35A)
Adapter:	Manufacturer: Dongguan Aohai Power Technology CO.,LTD Model No.: A8A-050200U-US1

4.3 Channel List

U-NII-1 (5.15-5.25GHz)		U-NII-3 (5.725-5.85GHz)	
channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	155	5785
44	5220	157	5785
46	5230	159	5795
48	5240	161	5805
		165	5825

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11a/n(HT20)/ac(HT20):

channel	Frequency(MHz)	channel	Frequency(MHz)
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11 n(HT40)/ac(HT40):

channel	Frequency(MHz)	channel	Frequency(MHz)
38	5190	151	5755
46	5230	159	5795

For 802.11 ac(HT80):

channel	Frequency(MHz)	channel	Frequency(MHz)
42	5210	155	5775

4.4 Test Mode Description:

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is no less 98%.

The software is installed in operation system, named "RFTestTool.apk" ,Version 1,date 20160518.

Test Items	Mode	Data Rate	Channel	TX/RX
Radiated Emissions	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Duty Cycle	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Band Edge	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX

6dB Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
26dB Bandwidth and 99% Occupied Bandwidth	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Conducted Output Power	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Power Spectral Density	802.11a	6 Mbps	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX
	802.11n(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT20)	MCS0	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

	802.11ac(HT40)	MCS0	U-NII-1 38/46 U-NII-3 151/159	TX
	802.11ac(HT80)	MCS0	U-NII-1 42 U-NII-3 155	TX
Frequency Stability	Un-modulation	/	U-NII-1 36/40/48 U-NII-3 149/155/165	TX

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-14	2020-09-13
2.	LISN	R&S	ENV216	101215	2019-09-14	2020-09-13
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-14	2020-09-13
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-14	2020-09-13
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-14	2020-09-13
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-14	2020-09-13
4.	Cable	LARGE	RF300	-	2019-09-14	2020-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	2019-09-14	2020-09-13
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2019-09-14	2020-09-13
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2019-09-14	2020-09-13
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-14	2020-09-13
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-09-14	2020-09-13
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2019-09-14	2020-09-13
7	Broadband Pre-amplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-09-14	2020-09-13
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2019-09-14	2020-09-13
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2019-09-14	2020-09-13
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-09-14	2020-09-13
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2019-09-14	2020-09-13
4	Cable	HUBER+SUHNER	CBL2	525178	2019-09-14	2020-09-13

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-09-14	2020-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2019-09-14	2020-09-13
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2019-09-14	2020-09-13

5.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207(a)	PASS
Radiated Emissions	15.407(a) 15.205(a) 15.209(a)	PASS
Duty Cycle	KDB 789033	--
6dB Bandwidth	15.407(a)	PASS
26 dB Emission Bandwidth & 99% Occupied Bandwidth	15.407(a)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Restricted bands around fundamental frequency	15.407(a)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

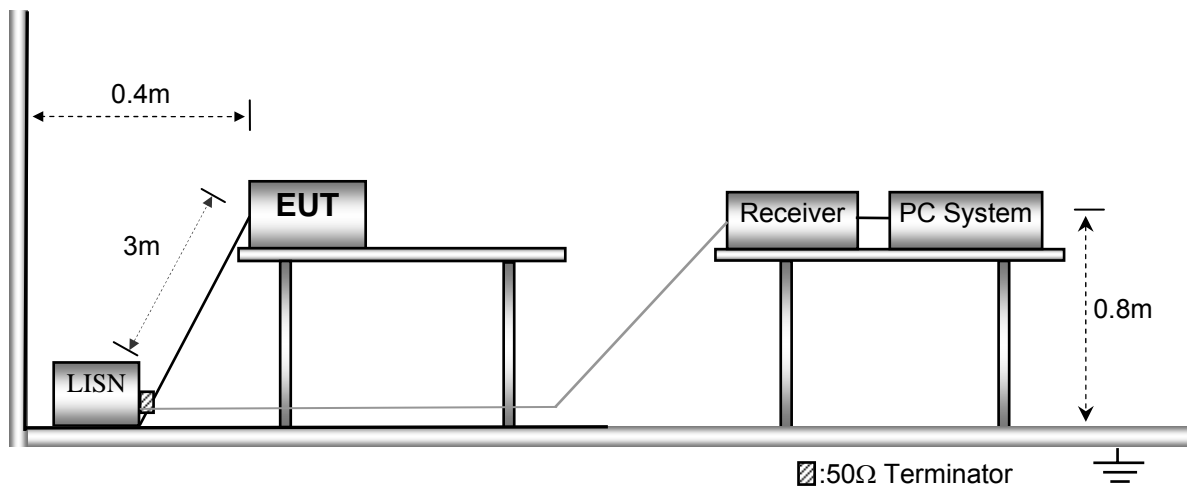


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

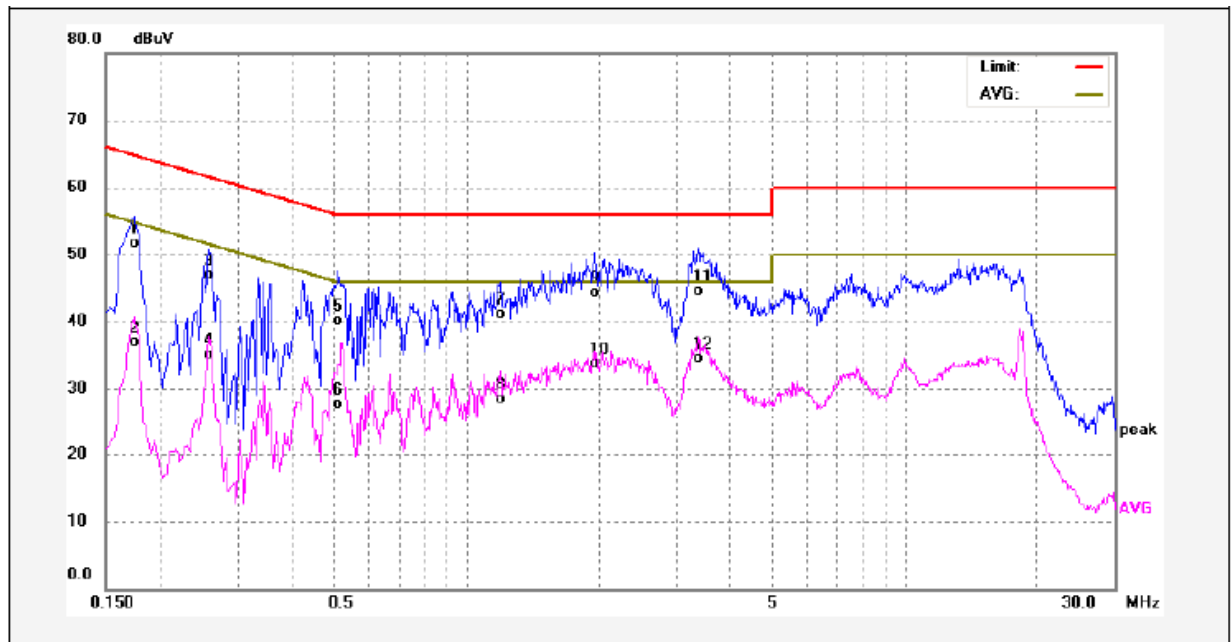

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1740	41.85	9.78	51.63	64.76	-13.13	QP	
2	0.1740	27.20	9.78	36.98	54.76	-17.78	AVG	
3	0.2580	37.11	9.77	46.88	61.49	-14.61	QP	
4	0.2580	25.43	9.77	35.20	51.49	-16.29	AVG	
5	0.5100	30.25	9.81	40.06	56.00	-15.94	QP	
6	0.5100	17.98	9.81	27.79	46.00	-18.21	AVG	
7	1.1940	31.28	9.90	41.18	56.00	-14.82	QP	
8	1.1940	18.56	9.90	28.46	46.00	-17.54	AVG	
9	1.9580	34.27	9.95	44.22	56.00	-11.78	QP	
10	1.9580	23.79	9.95	33.74	46.00	-12.26	AVG	
11	3.3660	34.67	9.93	44.60	56.00	-11.40	QP	
12	3.3660	24.59	9.93	34.52	46.00	-11.48	AVG	

Neutral line:

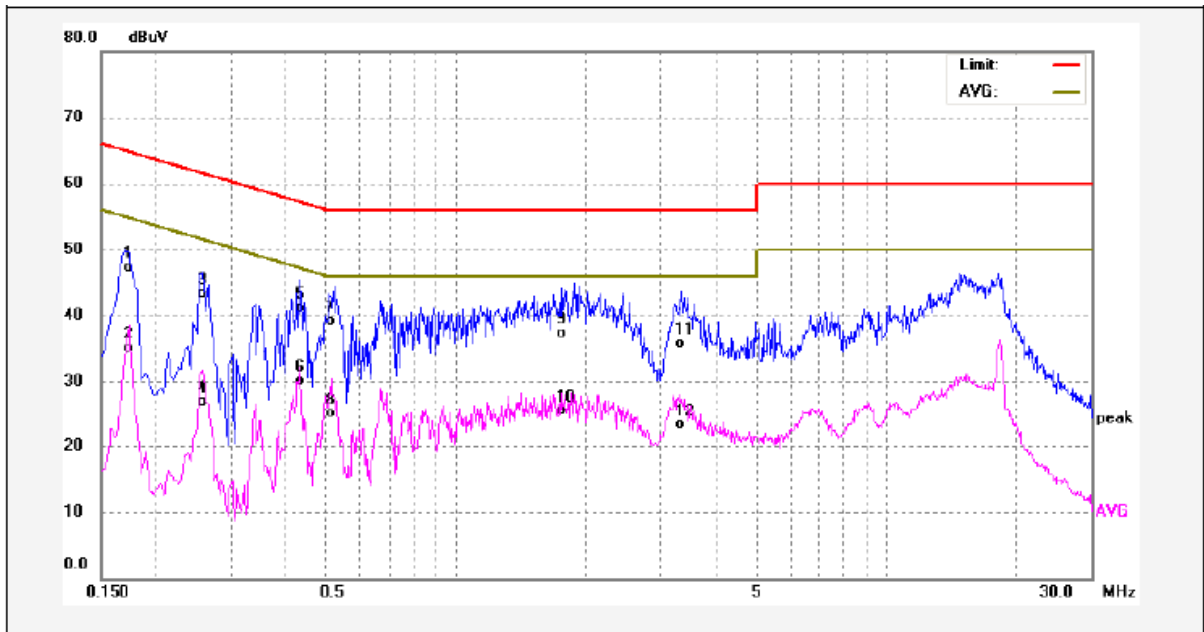

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1740	37.48	9.78	47.26	64.76	-17.50	QP	
2	0.1740	25.42	9.78	35.20	54.76	-19.56	AVG	
3	0.2580	33.46	9.77	43.23	61.49	-18.26	QP	
4	0.2580	17.12	9.77	26.89	51.49	-24.60	AVG	
5	0.4340	31.25	9.82	41.07	57.18	-16.11	QP	
6	0.4340	20.26	9.82	30.08	47.18	-17.10	AVG	
7	0.5140	29.21	9.81	39.02	56.00	-16.98	QP	
8	0.5140	15.24	9.81	25.05	46.00	-20.95	AVG	
9	1.7620	27.34	9.93	37.27	56.00	-18.73	QP	
10	1.7620	15.60	9.93	25.53	46.00	-20.47	AVG	
11	3.3300	25.79	9.93	35.72	56.00	-20.28	QP	
12	3.3300	13.39	9.93	23.32	46.00	-22.68	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.407

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Distance	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

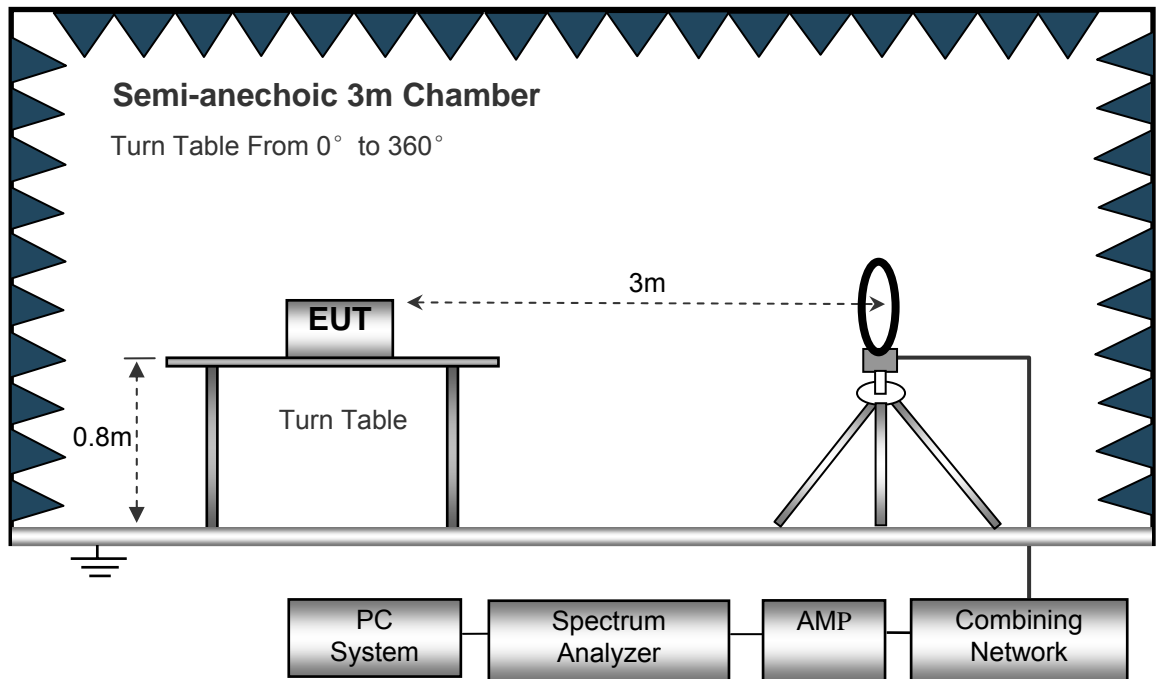

The test setup for emission measurement from 30 MHz to 1 GHz.

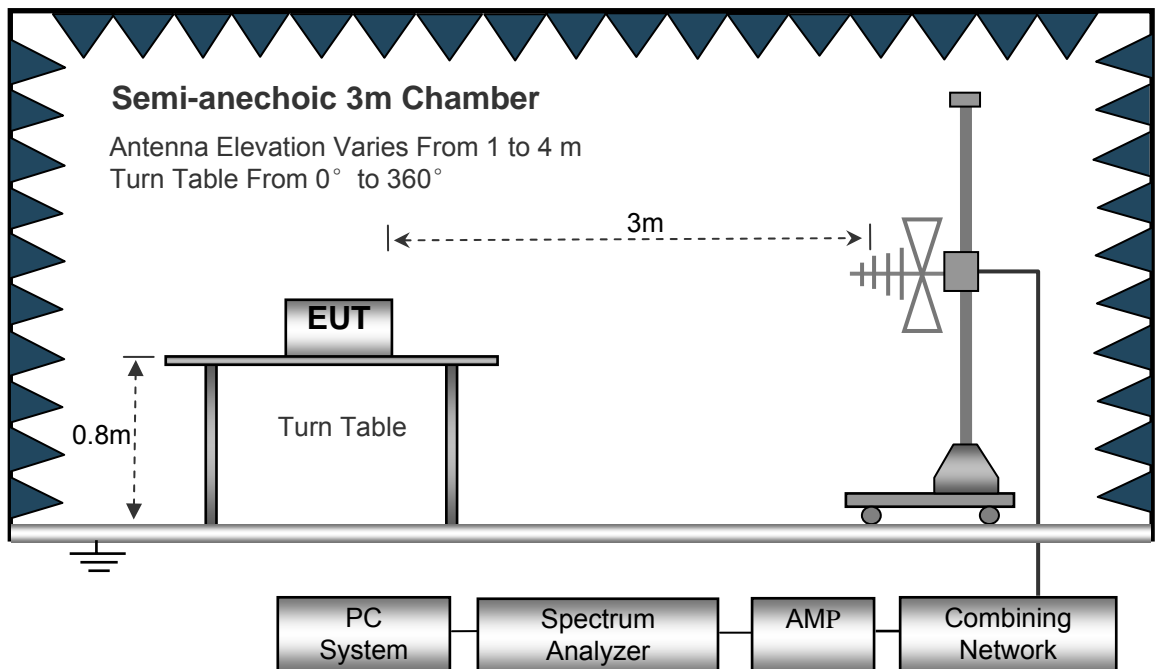

The test setup for emission measurement above 1 GHz.

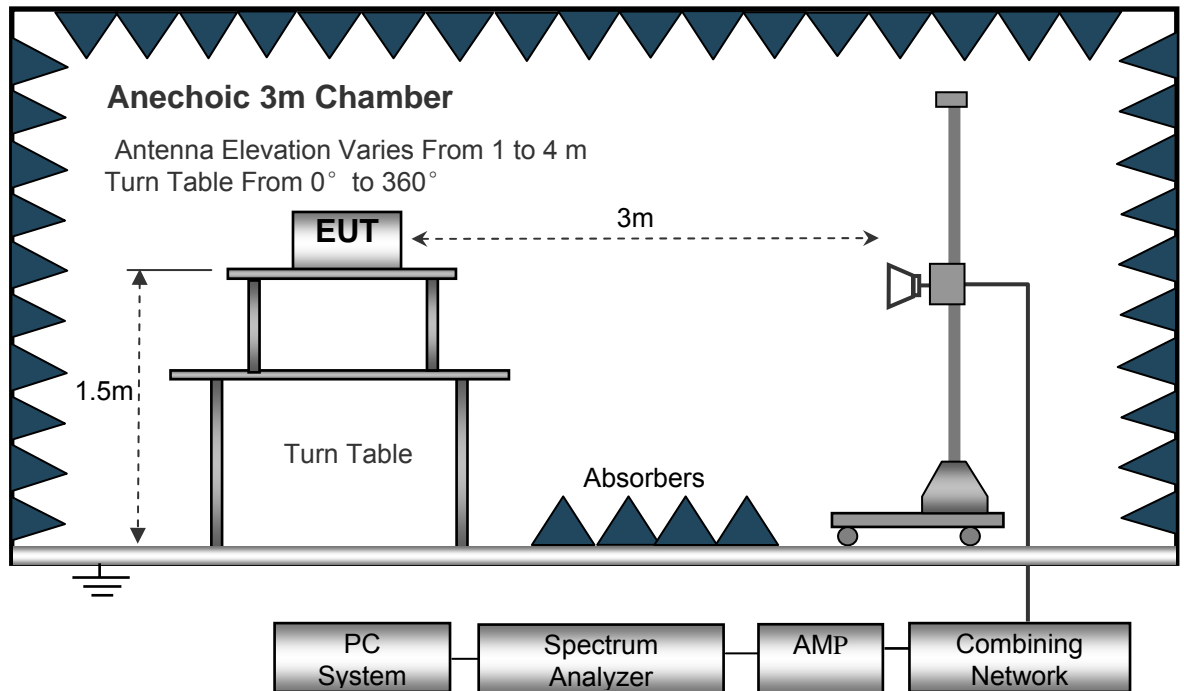

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9KHz~30MHz

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-1:802.11a 5180MHz							
6.021	25.30	QP	21.84	40.00	7.14	29.54	-22.40
15.730	24.56	QP	21.35	40.00	5.91	29.54	-23.63
25.680	25.81	QP	20.67	40.00	6.48	29.54	-23.06
U-NII-1:802.11n20 5180MHz							
6.021	24.71	QP	21.84	40.00	6.55	29.54	-22.99
15.730	25.26	QP	21.35	40.00	6.61	29.54	-22.93
25.680	24.33	QP	20.67	40.00	5.00	29.54	-24.54
U-NII-1:802.11ac 20 5180MHz							
6.021	25.10	QP	21.84	40.00	6.94	29.54	-22.60
15.730	24.23	QP	21.35	40.00	5.58	29.54	-23.96
25.680	25.85	QP	20.67	40.00	6.52	29.54	-23.02
U-NII-1:802.11n40 5190MHz							
6.021	25.78	QP	21.84	40.00	7.62	29.54	-21.92
15.730	24.91	QP	21.35	40.00	6.26	29.54	-23.28
25.680	25.80	QP	20.67	40.00	6.47	29.54	-23.07
U-NII-1:802.11ac40 5190MHz							
6.021	25.41	QP	21.84	40.00	7.25	29.54	-22.29
15.730	25.66	QP	21.35	40.00	7.01	29.54	-22.53
25.680	24.22	QP	20.67	40.00	4.89	29.54	-24.65
U-NII-1:802.11ac80 5210MHz							
6.021	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.730	24.63	QP	21.35	40.00	5.98	29.54	-23.56
25.680	25.82	QP	20.67	40.00	6.49	29.54	-23.05

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
U-NII-3 802.11a 5745MHz							
6.021	25.03	QP	21.84	40.00	6.87	29.54	-22.67
15.730	24.56	QP	21.35	40.00	5.91	29.54	-23.63
25.680	25.33	QP	20.67	40.00	6.00	29.54	-23.54
U-NII-3 802.11n20 5745MHz							
6.021	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.730	25.43	QP	21.35	40.00	6.78	29.54	-22.76
25.680	24.58	QP	20.67	40.00	5.25	29.54	-24.29
U-NII-3 802.11ac 5745MHz							
6.021	25.08	QP	21.84	40.00	6.92	29.54	-22.62
15.730	24.87	QP	21.35	40.00	6.22	29.54	-23.32
25.680	25.34	QP	20.67	40.00	6.01	29.54	-23.53
U-NII-3 802.11n40 5755MHz							
6.021	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.730	24.36	QP	21.35	40.00	5.71	29.54	-23.83
25.680	25.80	QP	20.67	40.00	6.47	29.54	-23.07
U-NII-3 802.11ac40 5755MHz							
6.021	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.730	24.53	QP	21.35	40.00	5.88	29.54	-23.66
25.680	25.89	QP	20.67	40.00	6.56	29.54	-22.98
U-NII-3 802.11ac80 5775MHz							
6.021	25.22	QP	21.84	40.00	7.06	29.54	-22.48
15.730	24.76	QP	21.35	40.00	6.11	29.54	-23.43
25.680	25.93	QP	20.67	40.00	6.60	29.54	-22.94

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-1 Low Channel 5180MHz									
223.45	40.91	QP	246	1.2	H	-11.62	29.29	46.00	-16.71
223.45	37.61	QP	202	1.0	V	-11.62	25.99	46.00	-20.01
4511.33	51.27	PK	108	1.0	H	-2.03	49.24	74.00	-24.76
4511.33	46.56	Ave	108	1.0	H	-2.03	44.53	54.00	-9.47
5124.97	51.89	PK	304	1.8	H	-1.02	50.87	74.00	-23.13
5124.97	48.80	Ave	304	1.8	H	-1.02	47.78	54.00	-6.22
10360.00	40.12	PK	99	1.4	H	5.33	45.45	74.00	-28.55
10360.00	38.10	Ave	99	1.4	H	5.33	43.43	54.00	-10.57
802.11a U-NII-1 Middle channel 5200MHz									
223.45	41.62	QP	357	1.9	H	-11.62	30.00	46.00	-16.00
223.45	38.35	QP	360	1.4	V	-11.62	26.73	46.00	-19.27
4539.33	49.97	PK	21	2.0	H	-1.94	48.03	74.00	-25.97
4539.33	48.05	Ave	21	2.0	H	-1.94	46.11	54.00	-7.89
5136.60	53.52	PK	176	1.7	H	-1.06	52.46	74.00	-21.54
5136.60	48.08	Ave	176	1.7	H	-1.06	47.02	54.00	-6.98
10400.00	39.91	PK	52	1.7	H	5.21	45.12	74.00	-28.88
10400.00	38.21	Ave	52	1.7	H	5.21	43.42	54.00	-10.58

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
802.11a U-NII-1 High channel 5240MHz									
223.45	40.89	QP	56	1.4	H	-11.62	29.27	46.00	-16.73
223.45	39.35	QP	356	1.5	V	-11.62	27.73	46.00	-18.27
4528.18	49.42	PK	209	1.4	H	-2.24	47.18	74.00	-26.82
4528.18	49.08	Ave	209	1.4	H	-2.24	46.84	54.00	-7.16
5138.17	55.28	PK	96	1.6	H	-1.09	54.19	74.00	-19.81
5138.17	47.37	Ave	96	1.6	H	-1.09	46.28	54.00	-7.72
10480.00	39.06	PK	244	1.6	H	5.14	44.20	74.00	-29.80
10480.00	38.99	Ave	244	1.6	H	5.14	44.13	54.00	-9.87
802.11a U-NII-3 Low Channel 5745MHz									
223.45	39.81	QP	295	1.6	H	-11.62	28.19	46.00	-17.81
223.45	39.06	QP	33	1.3	V	-11.62	27.44	46.00	-18.56
4522.24	48.51	PK	236	1.6	H	-2.06	46.45	74.00	-27.55
4522.24	50.18	Ave	236	1.6	H	-2.06	48.12	54.00	-5.88
11490.00	39.36	PK	337	1.9	H	5.93	45.29	68.20	-22.91
11490.00	37.69	Ave	337	1.9	H	5.93	43.62	54.00	-10.38
5365.19	46.37	PK	159	1.6	H	-1.25	45.12	74.00	-28.88
5365.19	39.84	Ave	159	1.6	H	-1.25	38.59	54.00	-15.41

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11a U-NII-3 Middle channel 5785MHz									
223.45	40.84	QP	237	1.6	H	-11.62	29.22	46.00	-16.78
223.45	39.53	QP	261	1.9	V	-11.62	27.91	46.00	-18.09
4528.11	48.80	PK	261	1.9	H	-2.03	46.77	74.00	-27.23
4528.11	49.35	Ave	261	1.9	H	-2.03	47.32	54.00	-6.68
11570.00	40.63	PK	94	1.7	H	5.81	46.44	68.20	-21.76
11570.00	37.93	Ave	94	1.7	H	5.81	43.74	54.00	-10.26
5359.01	46.09	PK	80	1.3	H	-1.22	44.87	74.00	-29.13
5359.01	37.00	Ave	80	1.3	H	-1.22	35.78	54.00	-18.22
802.11a U-NII-3 High channel 5825MHz									
223.45	40.36	QP	53	1.7	H	-11.62	28.74	46.00	-17.26
223.45	38.69	QP	70	1.1	V	-11.62	27.07	46.00	-18.93
4531.11	48.42	PK	194	1.4	H	-1.84	46.58	74.00	-27.42
4531.11	48.15	Ave	194	1.4	H	-1.84	46.31	54.00	-7.69
11650.00	39.76	PK	302	1.7	H	5.84	45.60	68.20	-22.60
11650.00	39.09	Ave	302	1.7	H	5.84	44.93	54.00	-9.07
5351.44	45.99	PK	21	1.1	H	-1.30	44.69	74.00	-29.31
5351.44	39.90	Ave	21	1.1	H	-1.30	38.60	54.00	-15.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) U-NII-1 Low Channel 5180MHz									
223.45	40.80	QP	260	1.3	H	-11.62	29.18	46.00	-16.82
223.45	39.41	QP	171	1.9	V	-11.62	27.79	46.00	-18.21
4528.19	48.75	PK	85	1.4	H	-2.14	46.61	74.00	-27.39
4528.19	47.78	Ave	85	1.4	H	-2.14	45.64	54.00	-8.36
5113.97	46.25	PK	31	1.1	H	-1.06	45.19	74.00	-28.81
5113.97	37.82	Ave	31	1.1	H	-1.06	36.76	54.00	-17.24
10360.00	39.83	PK	259	1.6	H	5.33	45.16	74.00	-28.84
10360.00	38.53	Ave	259	1.6	H	5.33	43.86	54.00	-10.14
802.11n(HT20) U-NII-1 Middle channel 5200MHz									
223.45	41.73	QP	215	1.1	H	-11.62	30.11	46.00	-15.89
223.45	38.37	QP	93	1.2	V	-11.62	26.75	46.00	-19.25
4506.49	48.12	PK	102	1.5	H	-2.12	46.00	74.00	-28.00
4506.49	46.88	Ave	102	1.5	H	-2.12	44.76	54.00	-9.24
5126.43	47.91	PK	91	1.4	H	-1.06	46.85	74.00	-27.15
5126.43	37.45	Ave	91	1.4	H	-1.06	36.39	54.00	-17.61
10400.00	40.21	PK	24	1.2	H	5.21	45.42	74.00	-28.58
10400.00	39.21	Ave	24	1.2	H	5.21	44.42	54.00	-9.58

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) U-NII-1 High channel 5240MHz									
223.45	42.97	QP	279	1.1	H	-11.62	31.35	46.00	-14.65
223.45	38.41	QP	279	1.1	V	-11.62	26.79	46.00	-19.21
4531.46	47.31	PK	96	1.8	H	-1.96	45.35	74.00	-28.65
4531.46	46.24	Ave	96	1.8	H	-1.96	44.28	54.00	-9.72
5121.75	47.50	PK	188	1.5	H	-1.06	46.44	74.00	-27.56
5121.75	38.13	Ave	188	1.5	H	-1.06	37.07	54.00	-16.93
10480.00	39.39	PK	25	1.7	H	5.14	44.53	74.00	-29.47
10480.00	37.07	Ave	25	1.7	H	5.14	42.21	54.00	-11.79
802.11n(HT20) U-NII-3 Low Channel 5745MHz									
223.45	39.45	QP	94	1.5	H	-11.62	27.83	46.00	-18.17
223.45	47.46	QP	241	1.7	V	-11.62	35.84	46.00	-10.16
4534.09	45.63	PK	291	1.4	H	-2.06	43.57	74.00	-30.43
4534.09	48.05	Ave	291	1.4	H	-2.06	45.99	54.00	-8.01
11490.00	39.58	PK	103	1.1	H	5.93	45.51	68.20	-22.69
11490.00	45.47	Ave	103	1.1	H	5.93	51.40	54.00	-2.60
5380.40	46.41	PK	201	1.8	H	-1.25	45.16	74.00	-28.84
5380.40	39.21	Ave	201	1.8	H	-1.25	37.96	54.00	-16.04

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT20) U-NII-3 Middle channel 5785MHz									
223.45	39.07	QP	253	1.7	H	-11.62	27.45	46.00	-18.55
223.45	48.22	QP	58	1.3	V	-11.62	36.60	46.00	-9.40
4502.79	46.02	PK	93	1.4	H	-2.03	43.99	74.00	-30.01
4502.79	48.74	Ave	93	1.4	H	-2.03	46.71	54.00	-7.29
11570.00	38.24	PK	269	1.7	H	5.81	44.05	68.20	-24.15
11570.00	48.04	Ave	269	1.7	H	5.81	53.85	54.00	-0.15
5374.95	46.89	PK	236	1.8	H	-1.22	45.67	74.00	-28.33
5374.95	38.75	Ave	236	1.8	H	-1.22	37.53	54.00	-16.47
802.11n(HT20) U-NII-3 High channel 5825MHz									
223.45	39.41	QP	126	1.3	H	-11.62	27.79	46.00	-18.21
223.45	47.61	QP	62	1.7	V	-11.62	35.99	46.00	-10.01
4516.24	45.51	PK	330	1.6	H	-1.84	43.67	74.00	-30.33
4516.24	48.55	Ave	330	1.6	H	-1.84	46.71	54.00	-7.29
11650.00	38.17	PK	108	1.7	H	5.84	44.01	68.20	-24.19
11650.00	47.50	Ave	108	1.7	H	5.84	53.34	54.00	-0.66
5363.96	46.81	PK	259	1.2	H	-1.30	45.51	74.00	-28.49
5363.96	37.28	Ave	259	1.2	H	-1.30	35.98	54.00	-18.02

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) U-NII-1 Low Channel 5190MHz									
223.45	39.96	QP	274	1.1	H	-11.62	28.34	46.00	-17.66
223.45	44.40	QP	224	1.8	V	-11.62	32.78	46.00	-13.22
4539.63	39.50	PK	127	1.8	H	-1.89	37.61	74.00	-36.39
4539.63	32.18	Ave	127	1.8	H	-1.89	30.29	54.00	-23.71
5148.10	47.26	PK	256	1.8	H	-1.06	46.20	74.00	-27.80
5148.10	40.31	Ave	256	1.8	H	-1.06	39.25	54.00	-14.75
10380.00	38.55	PK	271	1.1	H	5.26	43.81	74.00	-30.19
10380.00	36.34	Ave	271	1.1	H	5.26	41.60	54.00	-12.40
802.11n(HT40) U-NII-1 High channel 5230MHz									
223.45	39.61	QP	122	1.2	H	-11.62	27.99	46.00	-18.01
223.45	43.45	QP	92	1.5	V	-11.62	31.83	46.00	-14.17
4500.97	38.88	PK	338	1.0	H	-1.94	36.94	74.00	-37.06
4500.97	31.92	Ave	338	1.0	H	-1.94	29.98	54.00	-24.02
5143.67	48.15	PK	294	1.1	H	-1.06	47.09	74.00	-26.91
5143.67	39.68	Ave	294	1.1	H	-1.06	38.62	54.00	-15.38
10460.00	40.74	PK	198	1.5	H	5.28	46.02	74.00	-27.98
10480.00	37.36	Ave	198	1.5	H	5.28	42.64	54.00	-11.36

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11n(HT40) U-NII-3 Low Channel 5755MHz									
223.45	38.23	QP	310	1.9	H	-11.62	26.61	46.00	-19.39
223.45	44.31	QP	126	1.3	V	-11.62	32.69	46.00	-13.31
4504.72	36.55	PK	96	1.9	H	-1.96	34.59	74.00	-39.41
4504.72	30.67	Ave	96	1.9	H	-1.96	28.71	54.00	-25.29
11510.00	37.86	PK	153	1.1	H	5.88	43.74	68.20	-24.46
11510.00	35.64	Ave	153	1.1	H	5.88	41.52	54.00	-12.48
5379.08	46.37	PK	167	1.9	H	-1.01	45.36	74.00	-28.64
5379.08	38.99	Ave	167	1.9	H	-1.01	37.98	54.00	-16.02
802.11n(HT40) U-NII-3 High channel 5795MHz									
223.45	38.64	QP	27	1.9	H	-11.62	27.02	46.00	-18.98
223.45	43.52	QP	339	1.1	V	-11.62	31.90	46.00	-14.10
4518.57	37.15	PK	7	1.9	H	-1.92	35.23	74.00	-38.77
4518.57	30.93	Ave	7	1.9	H	-1.92	29.01	54.00	-24.99
11590.00	39.47	PK	79	1.0	H	5.63	45.10	68.20	-23.10
11590.00	37.83	Ave	79	1.0	H	5.63	43.46	54.00	-10.54
5365.06	46.97	PK	175	1.0	H	-1.04	45.93	74.00	-28.07
5365.06	39.19	Ave	175	1.0	H	-1.04	38.15	54.00	-15.85

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) U-NII-1 Low Channel 5180MHz									
223.45	38.59	QP	35	1.6	H	-11.62	26.97	46.00	-19.03
223.45	46.48	QP	204	1.2	V	-11.62	34.86	46.00	-11.14
4521.36	45.32	PK	323	1.3	H	-1.86	43.46	74.00	-30.54
4521.36	37.32	Ave	323	1.3	H	-1.86	35.46	54.00	-18.54
5112.96	43.68	PK	30	1.7	H	-1.06	42.62	74.00	-31.38
5112.96	39.06	Ave	30	1.7	H	-1.06	38.00	54.00	-16.00
10360.00	46.49	PK	198	1.1	H	5.33	51.82	74.00	-22.18
10360.00	38.96	Ave	198	1.1	H	5.33	44.29	54.00	-9.71
802.11ac(HT20) U-NII-1 Middle channel 5200MHz									
223.45	38.40	QP	78	1.8	H	-11.62	26.78	46.00	-19.22
223.45	46.22	QP	278	1.8	V	-11.62	34.60	46.00	-11.40
4528.93	44.39	PK	320	1.4	H	-1.82	42.57	74.00	-31.43
4528.93	37.28	Ave	320	1.4	H	-1.82	35.46	54.00	-18.54
5116.97	43.07	PK	54	1.4	H	-1.06	42.01	74.00	-31.99
5116.97	40.12	Ave	54	1.4	H	-1.06	39.06	54.00	-14.94
10400.00	39.81	PK	354	1.1	H	5.21	45.02	74.00	-28.98
10400.00	38.92	Ave	354	1.1	H	5.21	44.13	54.00	-9.87

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) U-NII-1 High channel 5240MHz									
223.45	38.98	QP	311	1.2	H	-11.62	27.36	46.00	-18.64
223.45	47.11	QP	33	1.8	V	-11.62	35.49	46.00	-10.51
4538.31	43.78	PK	229	1.9	H	-1.81	41.97	74.00	-32.03
4538.31	37.13	Ave	229	1.9	H	-1.81	35.32	54.00	-18.68
5119.13	44.06	PK	159	1.3	H	-1.06	43.00	74.00	-31.00
5119.13	40.63	Ave	159	1.3	H	-1.06	39.57	54.00	-14.43
10480.00	40.81	PK	3	1.8	H	5.14	45.95	74.00	-28.05
10480.00	39.08	Ave	3	1.8	H	5.14	44.22	54.00	-9.78
802.11ac(HT20) U-NII-3 Low Channel 5745MHz									
223.45	38.26	QP	173	1.9	H	-11.62	26.64	46.00	-19.36
223.45	46.03	QP	295	1.3	V	-11.62	34.41	46.00	-11.59
4530.70	41.65	PK	162	1.9	H	-1.92	39.73	74.00	-34.27
4530.70	34.26	Ave	162	1.9	H	-1.92	32.34	54.00	-21.66
11490.00	37.76	PK	337	1.4	H	5.93	43.69	68.20	-24.51
11490.00	36.12	Ave	337	1.4	H	5.93	42.05	54.00	-11.95
5351.89	46.22	PK	109	1.3	H	-1.03	45.19	74.00	-28.81
5351.89	39.79	Ave	109	1.3	H	-1.03	38.76	54.00	-15.24

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT20) U-NII-3 Middle channel 5785MHz									
223.45	39.20	QP	125	1.3	H	-11.62	27.58	46.00	-18.42
223.45	45.07	QP	257	1.8	V	-11.62	33.45	46.00	-12.55
4503.45	42.36	PK	192	1.4	H	-1.97	40.39	74.00	-33.61
4503.45	34.56	Ave	192	1.4	H	-1.97	32.59	54.00	-21.41
11570.00	39.75	PK	51	1.1	H	5.81	45.56	68.20	-22.64
11570.00	37.19	Ave	51	1.1	H	5.81	43.00	54.00	-11.00
5363.02	46.04	PK	131	1.3	H	-1.05	44.99	74.00	-29.01
5363.02	37.67	Ave	131	1.3	H	-1.05	36.62	54.00	-17.38
802.11ac(HT20) U-NII-3 High channel 5825MHz									
223.45	39.94	QP	59	1.1	H	-11.62	28.32	46.00	-17.68
223.45	45.81	QP	74	1.2	V	-11.62	34.19	46.00	-11.81
4501.88	41.86	PK	134	1.9	H	-1.88	39.98	74.00	-34.02
4501.88	34.18	Ave	134	1.9	H	-1.88	32.30	54.00	-21.70
11650.00	39.25	PK	271	1.4	H	5.84	45.09	68.20	-23.11
11650.00	38.51	Ave	271	1.4	H	5.84	44.35	54.00	-9.65
5388.94	46.15	PK	125	1.3	H	-1.06	45.09	74.00	-28.91
5388.94	37.94	Ave	125	1.3	H	-1.06	36.88	54.00	-17.12

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) U-NII-1 Low Channel 5190MHz									
223.45	39.17	QP	229	1.5	H	-11.62	27.55	46.00	-18.45
223.45	43.63	QP	305	1.9	V	-11.62	32.01	46.00	-13.99
4539.21	35.37	PK	232	1.6	H	-1.91	33.46	74.00	-40.54
4539.21	28.04	Ave	232	1.6	H	-1.91	26.13	54.00	-27.87
5138.54	47.43	PK	14	1.2	H	-1.06	46.37	74.00	-27.63
5138.54	41.41	Ave	14	1.2	H	-1.06	40.35	54.00	-13.65
10380.00	38.81	PK	77	1.6	H	5.26	44.07	74.00	-29.93
10380.00	36.56	Ave	77	1.6	H	5.26	41.82	54.00	-12.18
802.11ac(HT40) U-NII-1 High channel 5230MHz									
223.45	39.17	QP	170	1.5	H	-11.62	27.55	46.00	-18.45
223.45	42.74	QP	277	1.7	V	-11.62	31.12	46.00	-14.88
4513.56	34.39	PK	297	1.7	H	-1.93	32.46	74.00	-41.54
4513.56	28.18	Ave	297	1.7	H	-1.93	26.25	54.00	-27.75
5141.66	47.55	PK	274	1.1	H	-1.06	46.49	74.00	-27.51
5141.66	40.75	Ave	274	1.1	H	-1.06	39.69	54.00	-14.31
10460.00	40.18	PK	332	1.8	H	5.28	45.46	74.00	-28.54
10480.00	38.34	Ave	332	1.8	H	5.28	43.62	54.00	-10.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT40) U-NII-3 Low Channel 5755MHz									
223.45	38.72	QP	238	1.1	H	-11.62	27.10	46.00	-18.90
223.45	43.51	QP	72	1.3	V	-11.62	31.89	46.00	-14.11
4528.35	32.18	PK	256	1.7	H	-1.92	30.26	74.00	-43.74
4528.35	25.83	Ave	256	1.7	H	-1.92	23.91	54.00	-30.09
11510.00	37.57	PK	106	2.0	H	5.88	43.45	68.20	-24.75
11510.00	36.03	Ave	106	2.0	H	5.88	41.91	54.00	-12.09
5377.33	45.24	PK	70	1.2	H	-1.07	44.17	74.00	-29.83
5377.33	39.47	Ave	70	1.2	H	-1.07	38.40	54.00	-15.60
802.11ac(HT40) U-NII-3 High channel 5795MHz									
223.45	37.89	QP	178	1.4	H	-11.62	26.27	46.00	-19.73
223.45	44.07	QP	177	1.8	V	-11.62	32.45	46.00	-13.55
4526.66	32.41	PK	94	1.3	H	-1.86	30.55	74.00	-43.45
4526.66	25.76	Ave	94	1.3	H	-1.86	23.90	54.00	-30.10
11590.00	39.85	PK	35	1.7	H	5.63	45.48	68.20	-22.72
11590.00	37.13	Ave	35	1.7	H	5.63	42.76	54.00	-11.24
5389.50	46.09	PK	148	1.7	H	-1.03	45.06	74.00	-28.94
5389.50	37.40	Ave	148	1.7	H	-1.03	36.37	54.00	-17.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.407/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
802.11ac(HT80) U-NII-1 Low Channel 5210MHz									
223.45	43.49	QP	83	1.0	H	-11.62	31.87	46.00	-14.13
4526.66	31.68	QP	5	1.6	V	-11.62	20.06	46.00	-25.94
4521.69	24.93	PK	261	1.1	H	-1.88	23.05	74.00	-50.95
4521.69	39.14	Ave	261	1.1	H	-1.88	37.26	54.00	-16.74
5143.31	36.47	PK	327	1.4	H	-1.06	35.41	74.00	-38.59
5143.31	46.05	Ave	327	1.4	H	-1.06	44.99	54.00	-9.01
10420.00	40.76	PK	127	1.4	H	4.65	45.41	74.00	-28.59
10420.00	38.66	Ave	127	1.4	H	4.65	43.31	54.00	-10.69
802.11ac(HT80) U-NII-3 Low Channel 5775MHz									
4526.66	32.12	QP	156	1.8	H	-11.62	20.50	46.00	-25.50
4521.69	24.83	QP	220	1.6	V	-11.62	13.21	46.00	-32.79
4527.70	38.52	PK	52	1.5	H	-1.85	36.67	74.00	-37.33
4527.70	39.97	Ave	52	1.5	H	-1.85	38.12	54.00	-15.88
11550.00	39.61	PK	296	1.9	H	4.83	44.44	68.20	-23.76
11550.00	38.37	Ave	296	1.9	H	4.83	43.20	54.00	-10.80
5361.49	46.57	PK	106	1.1	H	-1.14	45.43	74.00	-28.57
5361.49	38.25	Ave	106	1.1	H	-1.14	37.11	54.00	-16.89

Test Frequency: 18GHz~40GHz

The measurements were more than 20 dB below the limit and not reported.

9 Duty cycle


Test Requirement:	47 CFR Part 15C 15.407 KDB789033 D02 General U-NII Test Procedures New Rules v02r01, Section (B)
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	Through Pre-scan, and found 802.11a at lowest channel is the worst case. Only the worst case is recorded in the report.

9.1 Summary of Test Results


802.11a mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11n(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT20) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
36	100	100	100
149	100	100	100
802.11ac(HT40) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
38	100	100	100
151	100	100	100
802.11ac(HT80) mode			
channel	On time(ms)	Period(ms)	Duty Cycle(%)
42	100	100	100
155	100	100	100

Test result plots shown as follows:


802.11a U-NII-1 Low channel

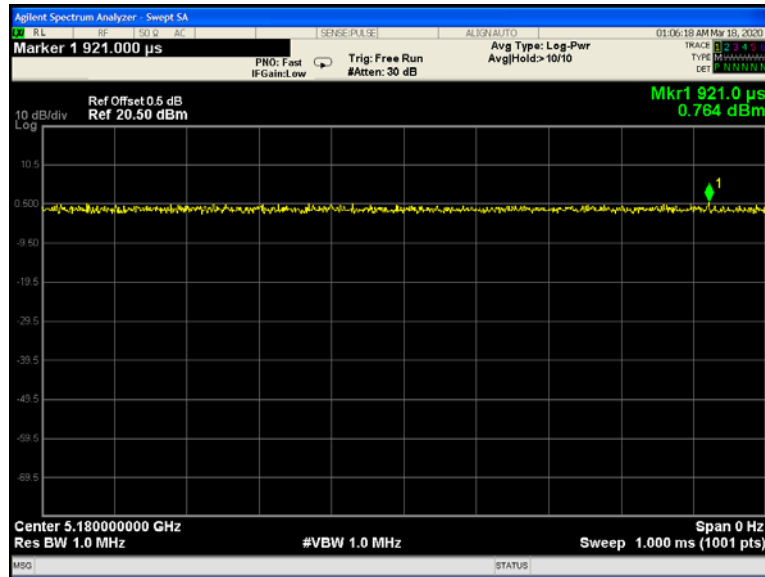


802.11n(HT20) U-NII-1 Low channel

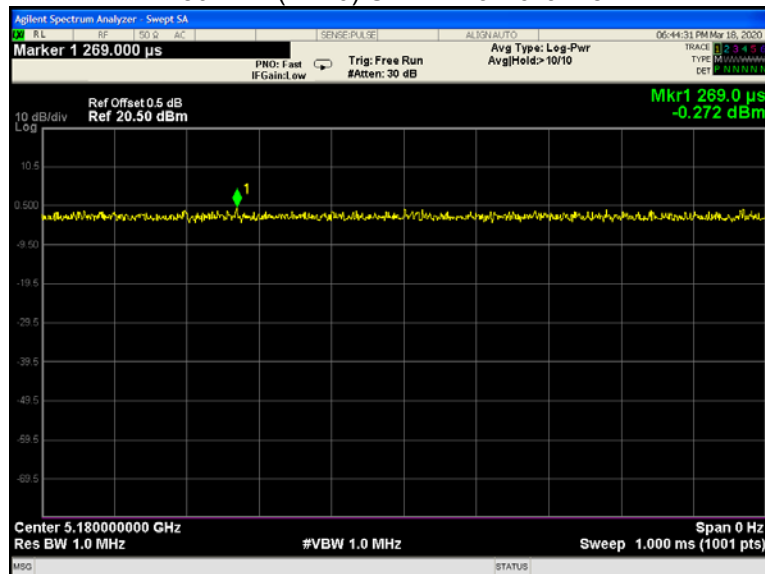


802.11n(HT40) U-NII-1 Low channel

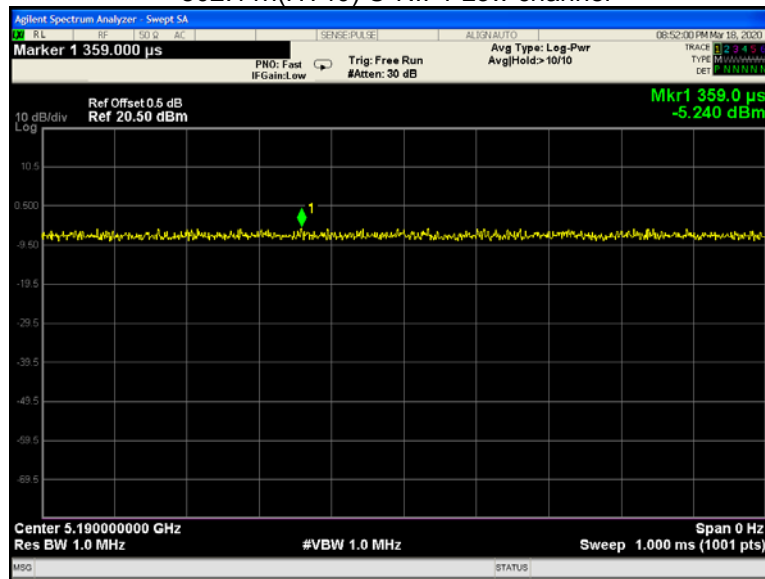


802.11ac(HT20) U-NII-1 Low channel

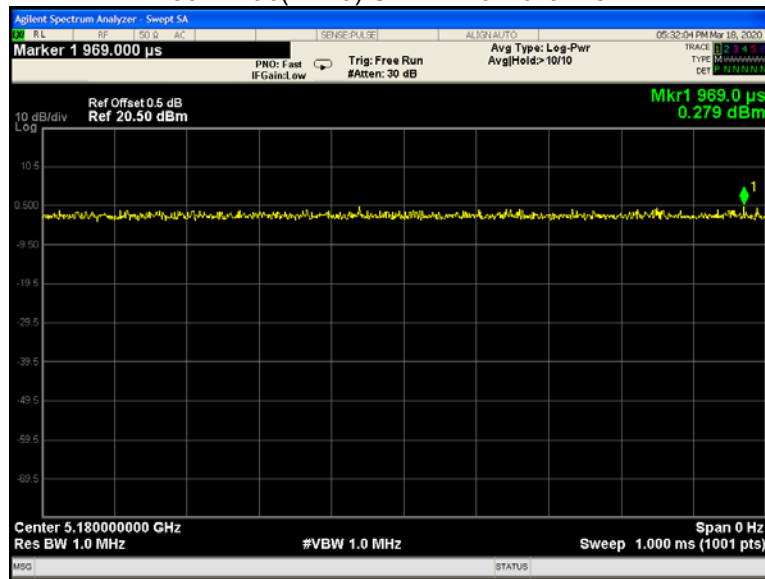


802.11ac(HT40) U-NII-1 Low channel

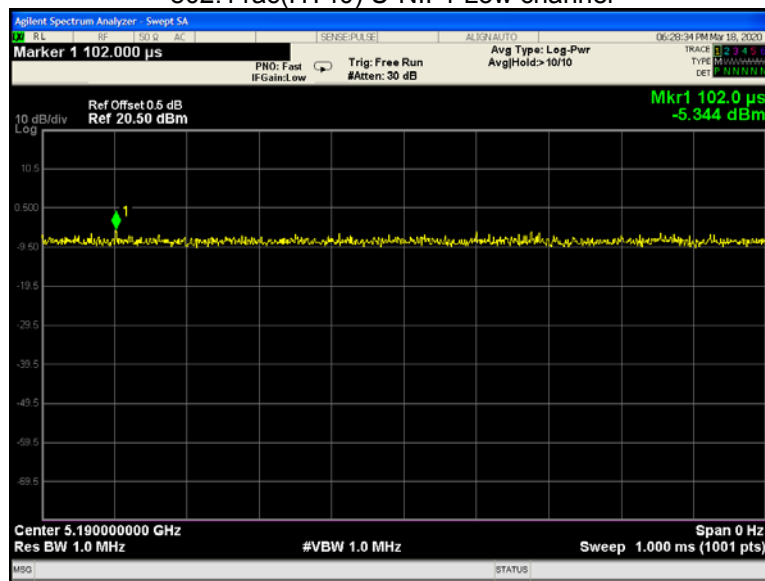


802.11ac(HT80) U-NII-1 Low channel

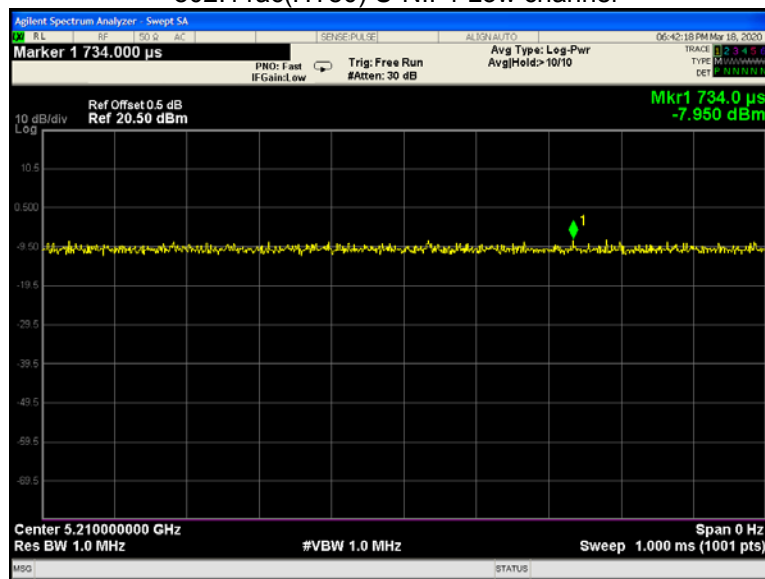


802.11a U-NII-3 Low channel

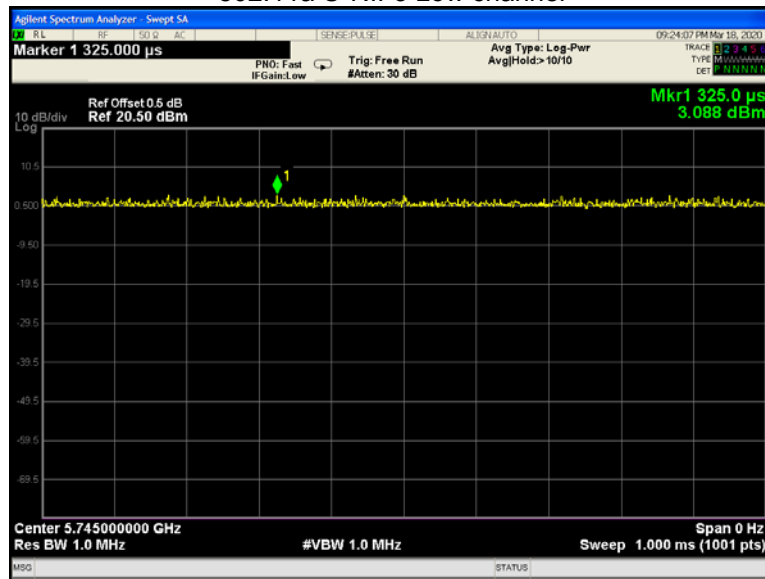


802.11n(HT20) U-NII-3 Low channel

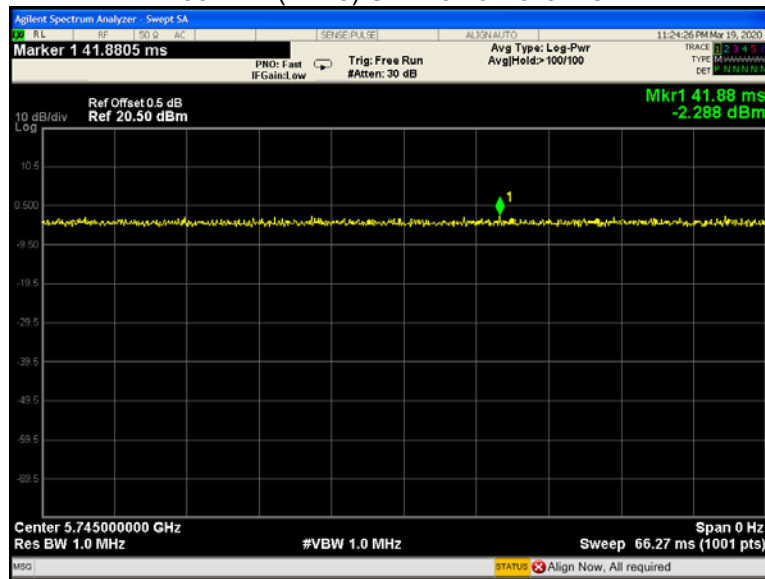


802.11n(HT40) U-NII-3 Low channel

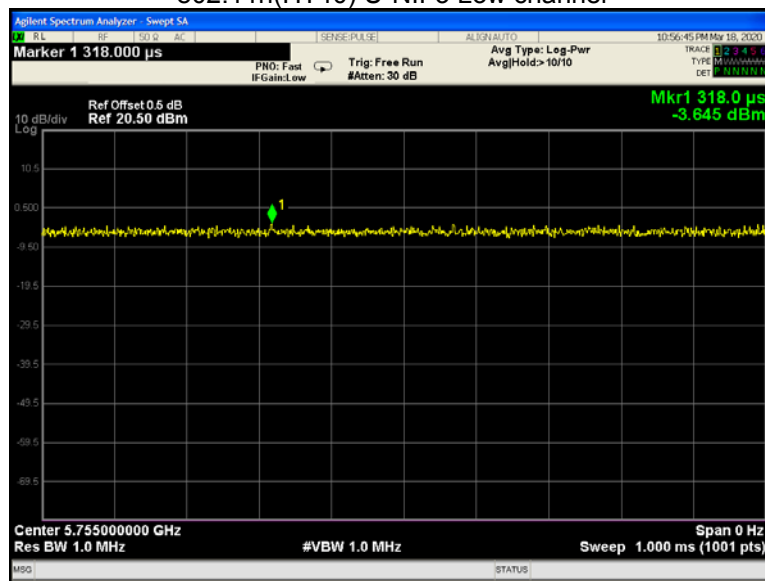


802.11ac(HT20) U-NII-3 Low channel

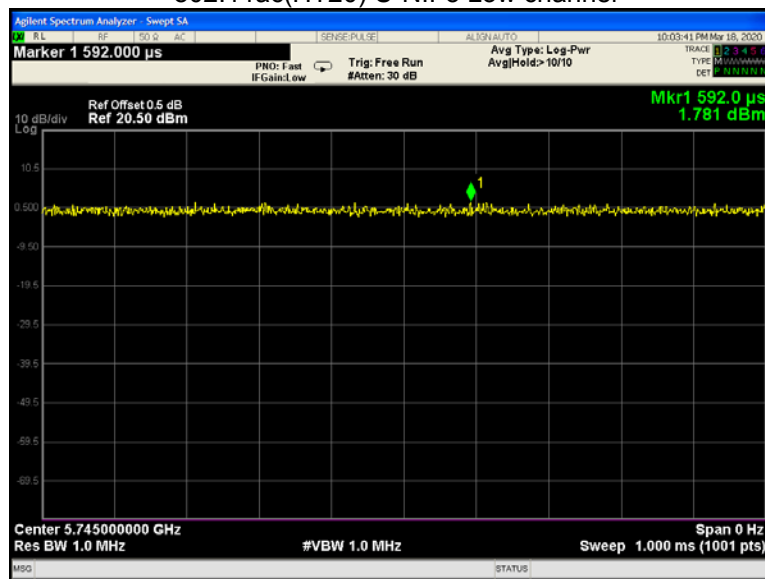

802.11ac(HT40) U-NII-3 Low channel

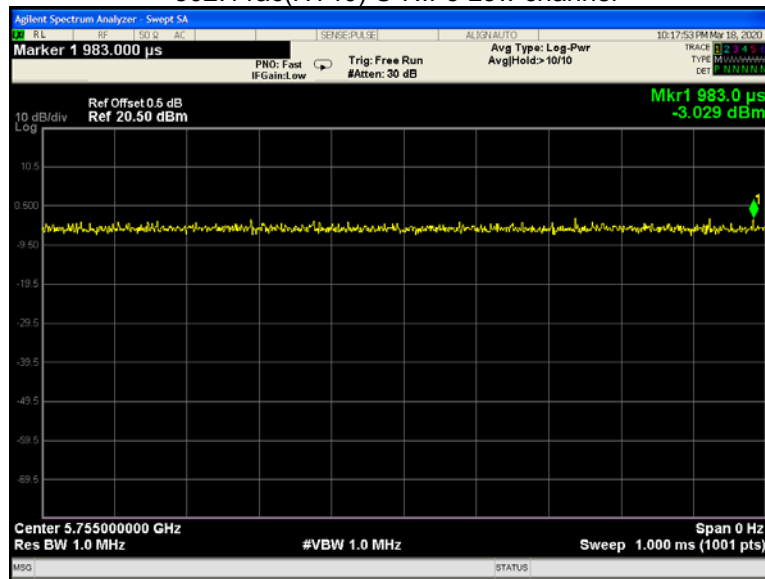

802.11ac(HT80) U-NII-3 Low channel

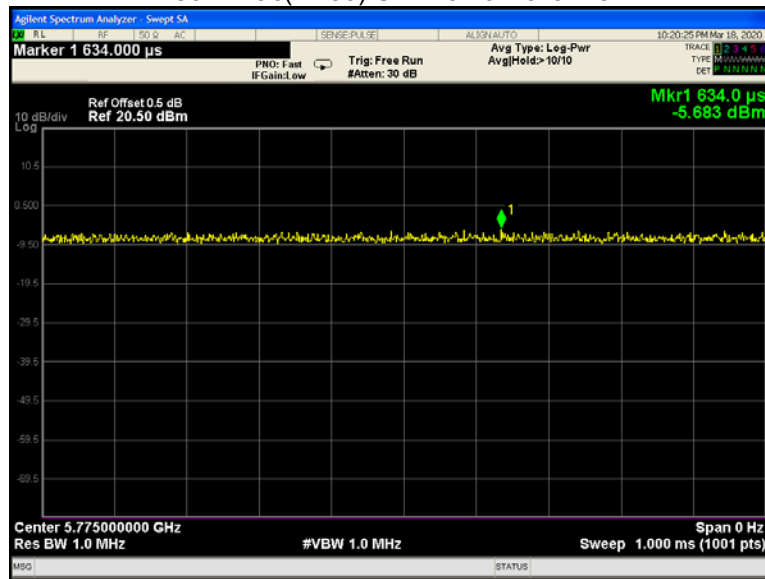

10 Band Edge

Test Requirement:	FCC CFR47 Part 15 Section 15.407
Test Method:	ANSI C63.10 2013
Test Limit:	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27dBm/MHz . (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17dBm/MHz ; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27dBm/MHz .
Test Result:	PASS


10.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


10.2 Test Result

Test result plots shown as follows:


802.11a U-NII-1 Band edge-left side

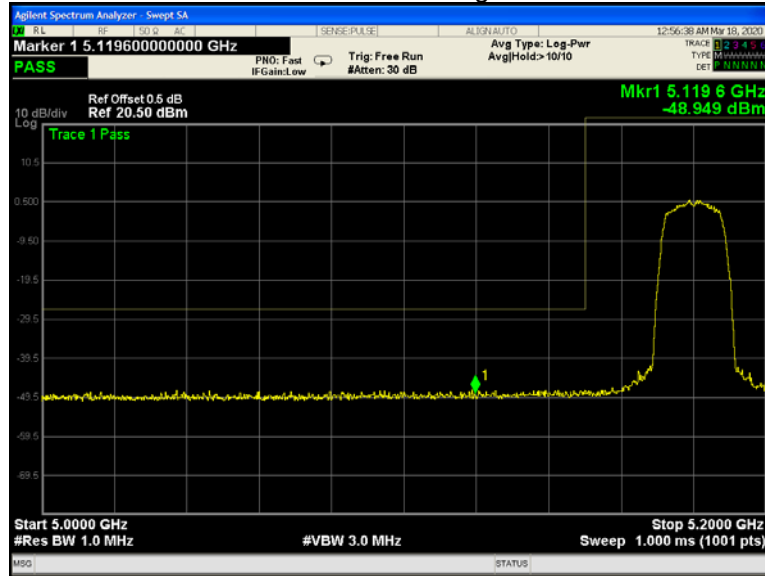


802.11a U-NII-1 Band edge-right side

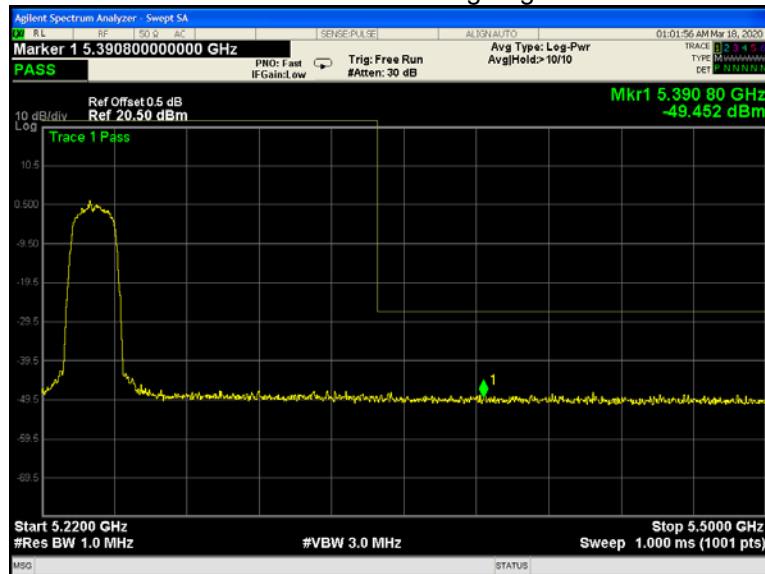


802.11a U-NII-3 Band edge-left side

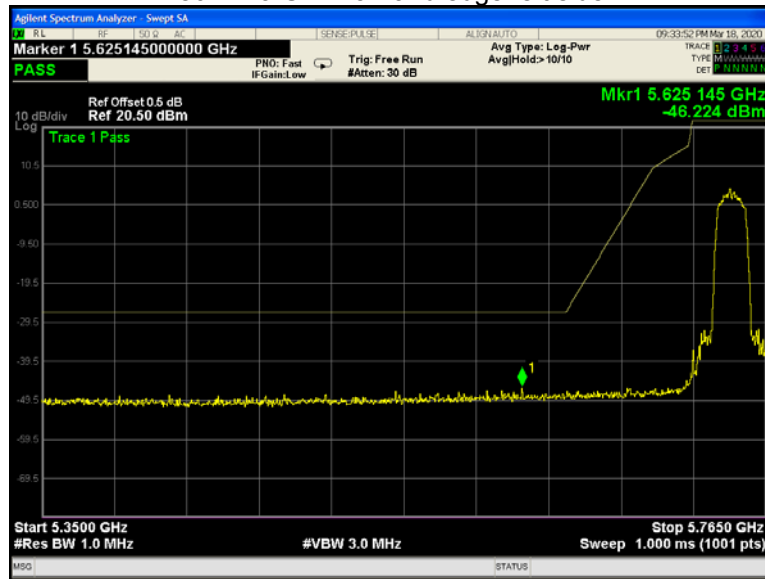


802.11a U-NII-3 Band edge-right side

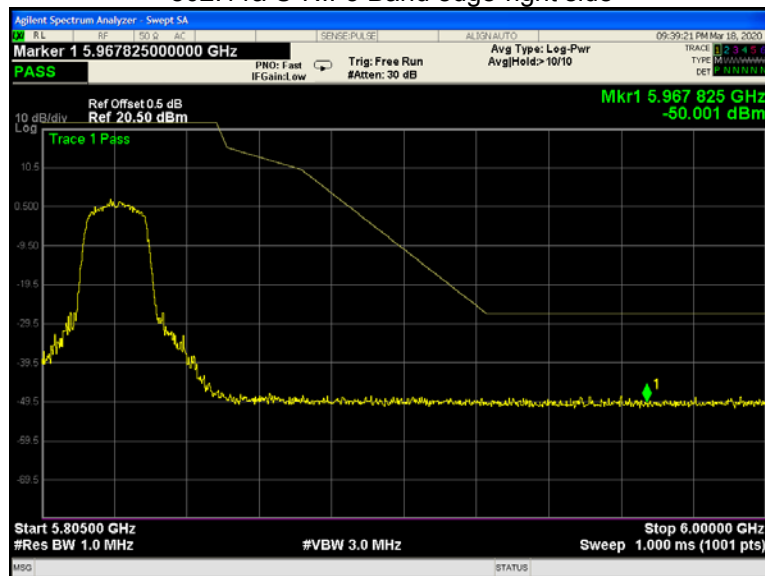


802.11n(HT20) U-NII-1 Band edge-left side

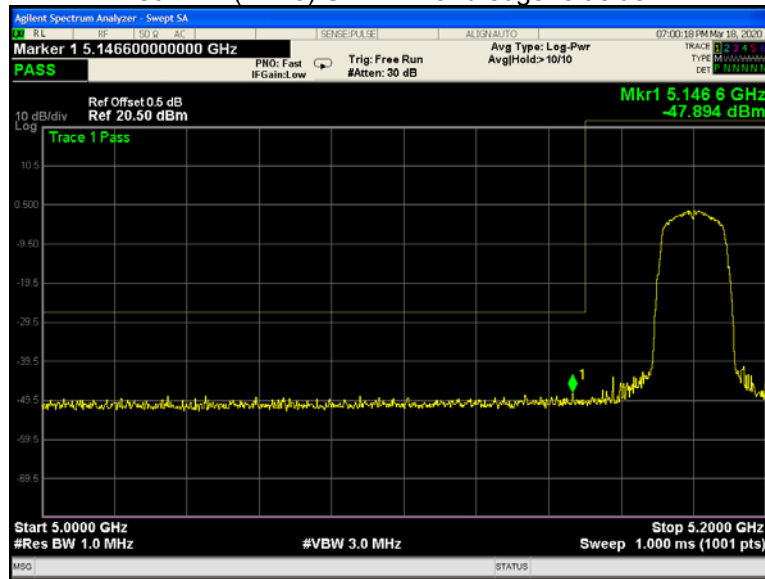


802.11n(HT20) U-NII-1 Band edge-right side

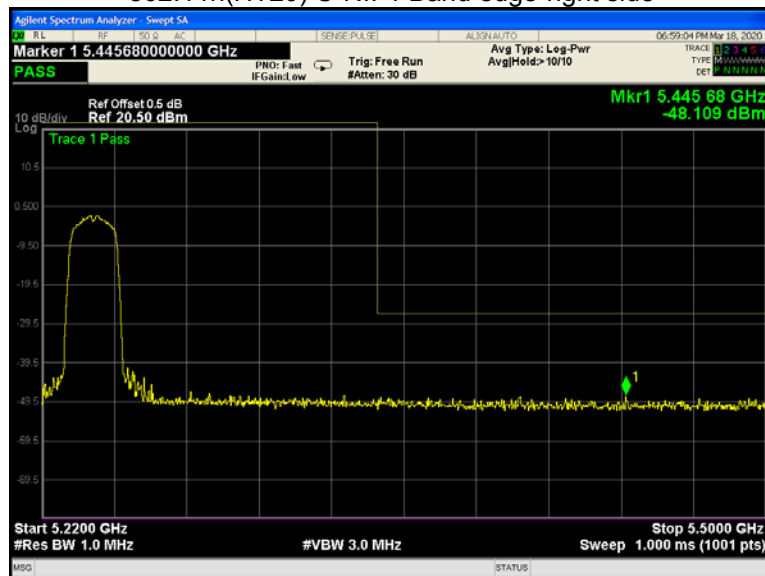


802.11n(HT20) U-NII-3 Band edge-left side

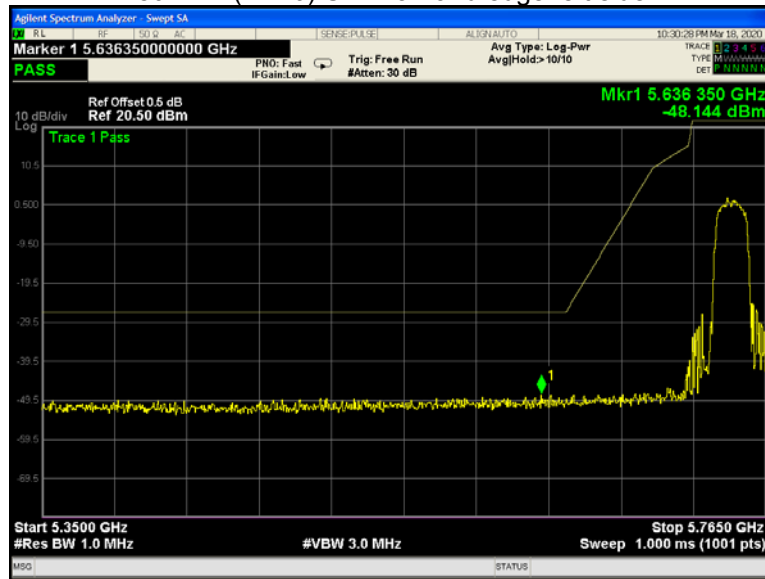


802.11n(HT20) U-NII-3 Band edge-right side

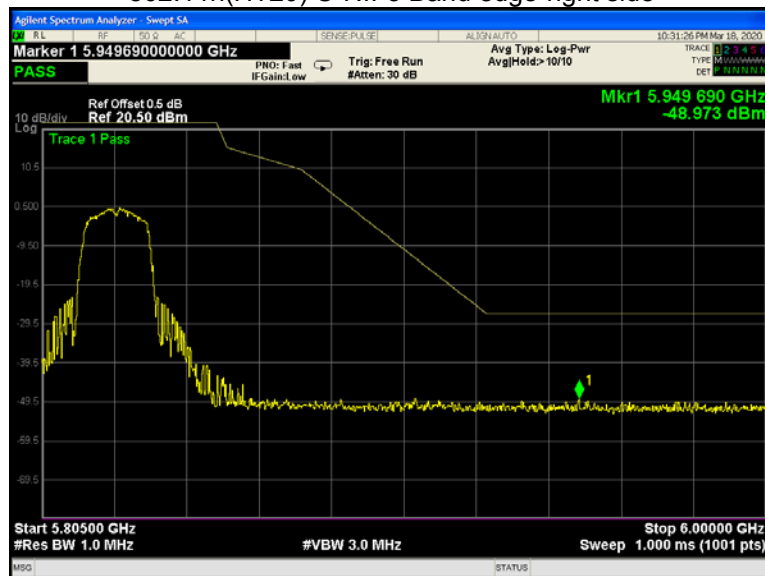


802.11n(HT40) U-NII-1 Band edge-left side

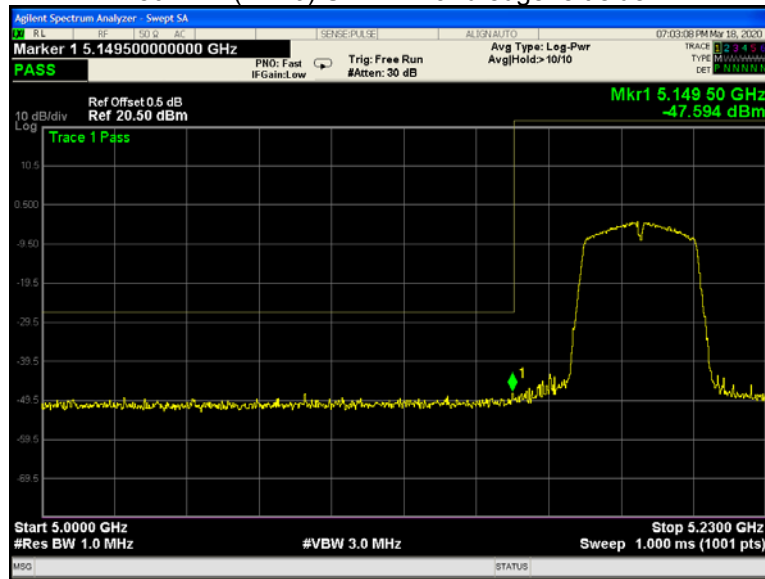


802.11n(HT40) U-NII-1 Band edge-right side

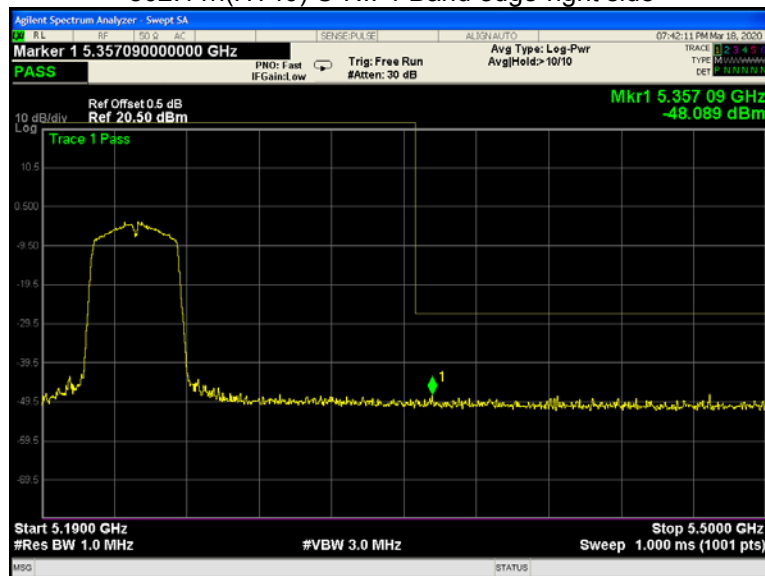


802.11n(HT40) U-NII-3 Band edge-left side

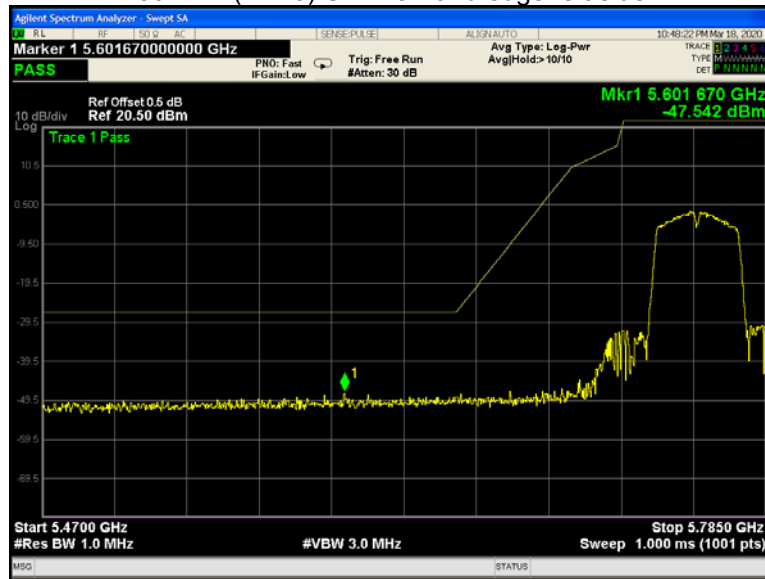


802.11n(HT40) U-NII-3 Band edge-right side

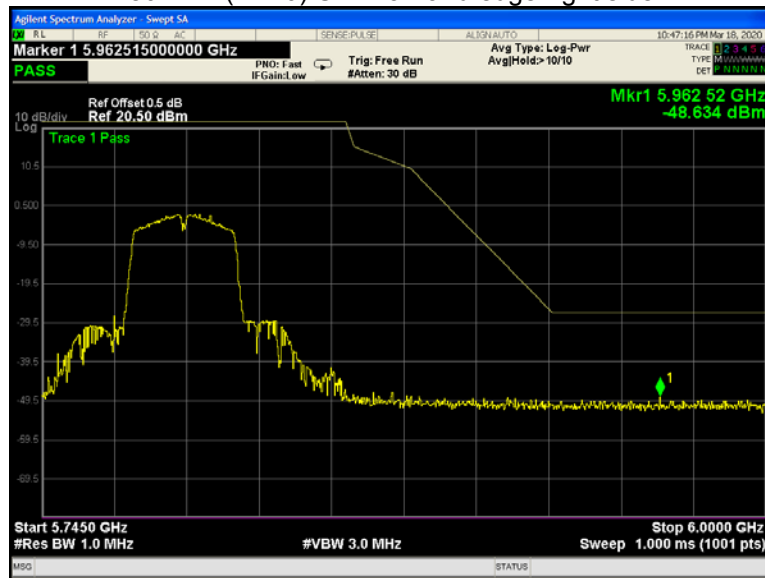


802.11ac(HT20) U-NII-1 Band edge-left side

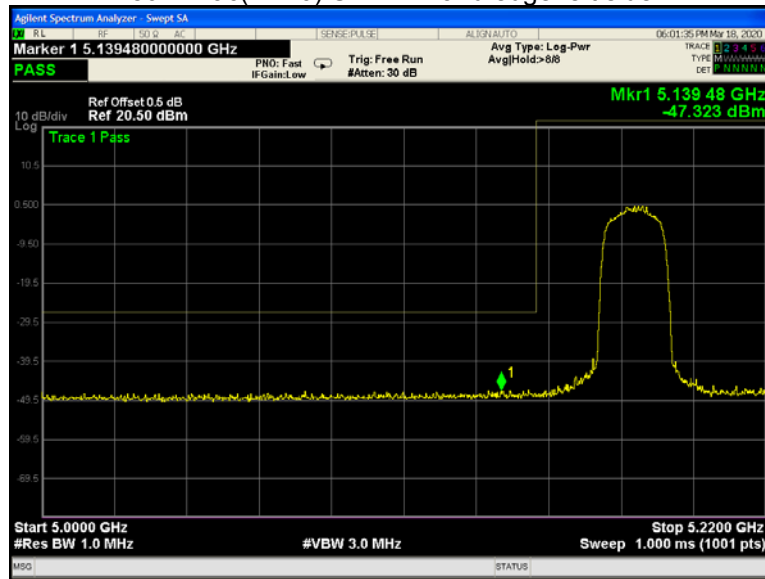


802.11ac(HT20) U-NII-1 Band edge-right side

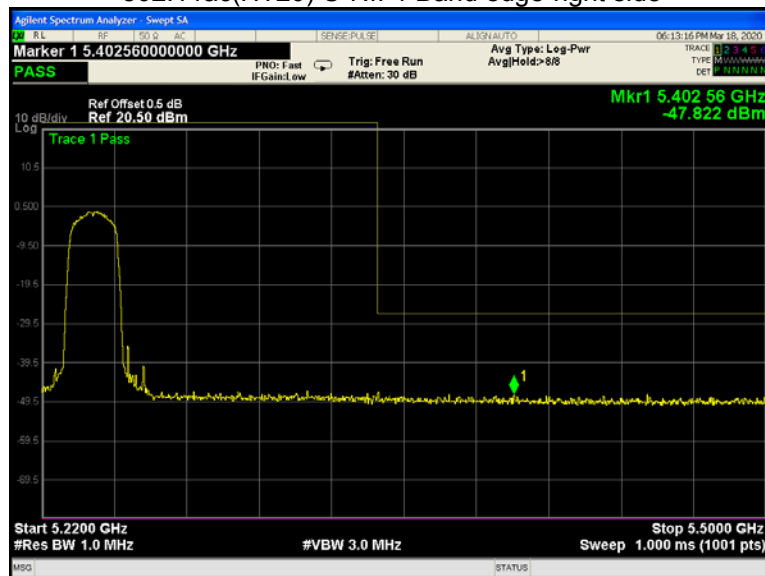


802.11ac(HT20) U-NII-3 Band edge-left side

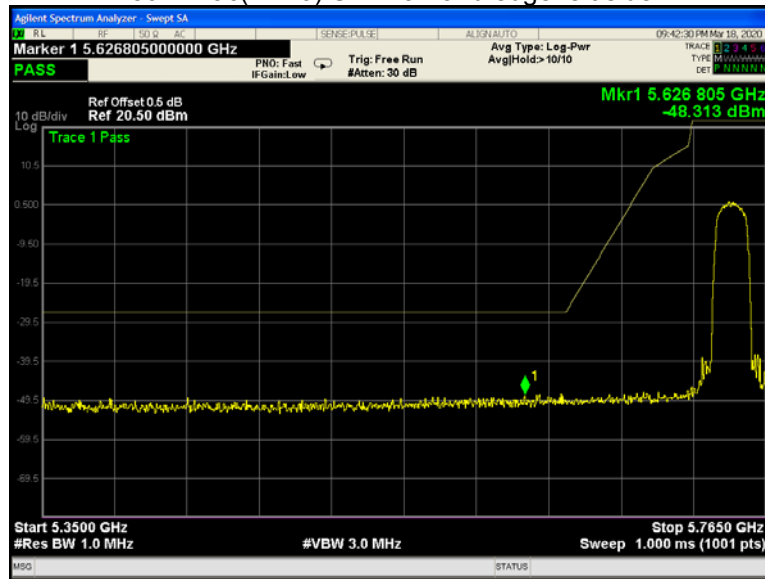


802.11ac(HT20) U-NII-3 Band edge-right side

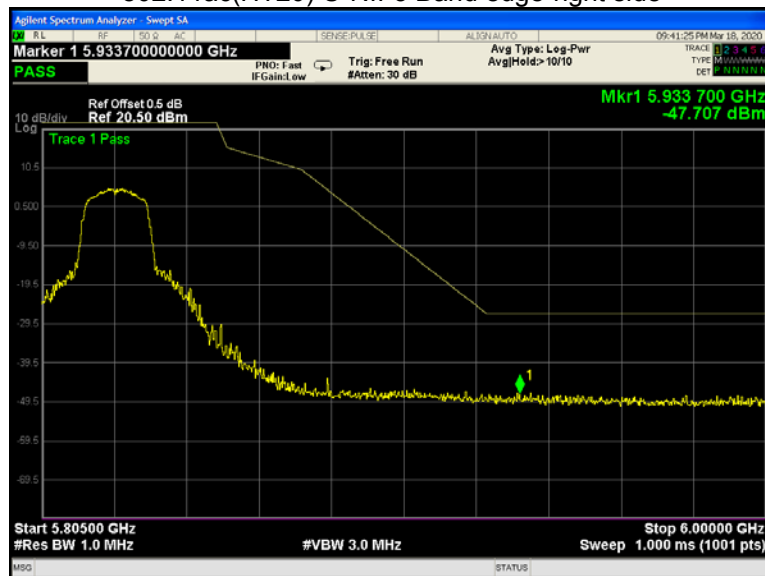


802.11ac(HT40) U-NII-1 Band edge-left side

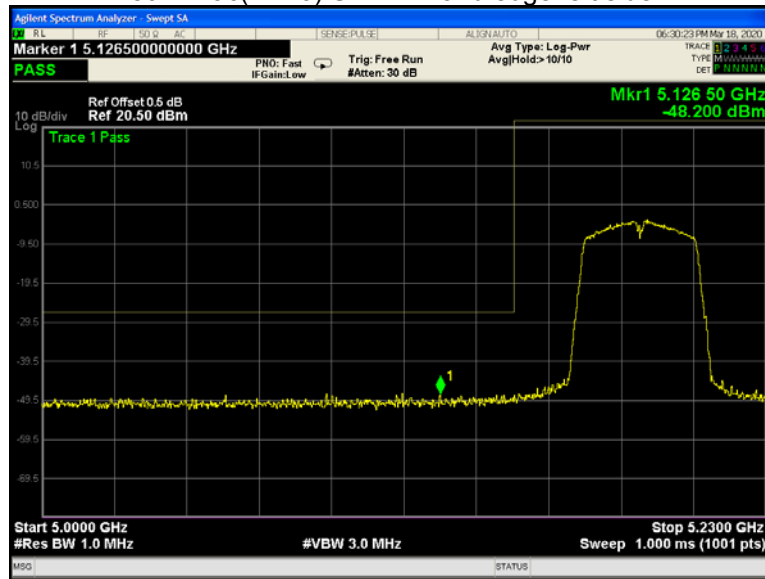


802.11ac(HT40) U-NII-1 Band edge-right side

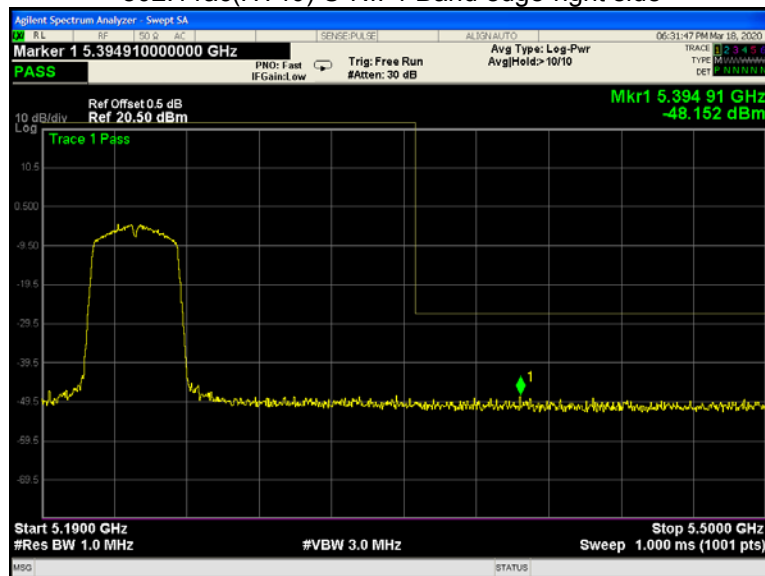


802.11ac(HT40) U-NII-3 Band edge-left side

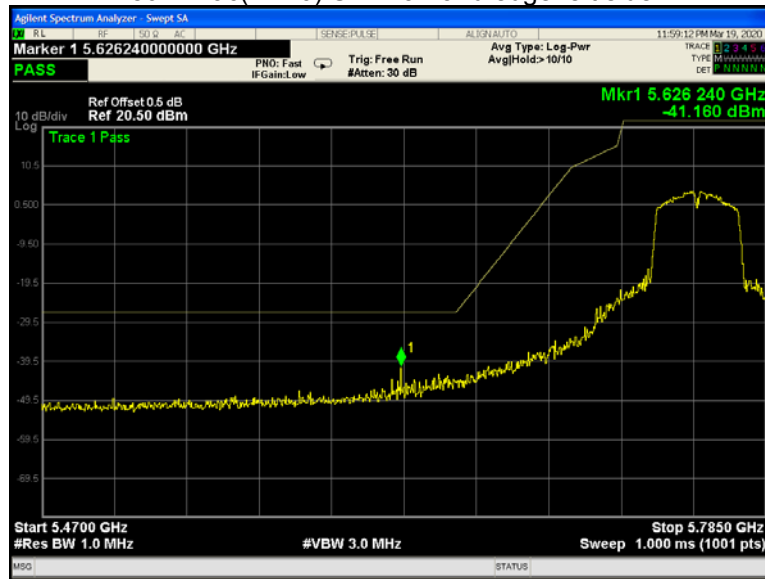


802.11ac(HT40) U-NII-3 Band edge-right side

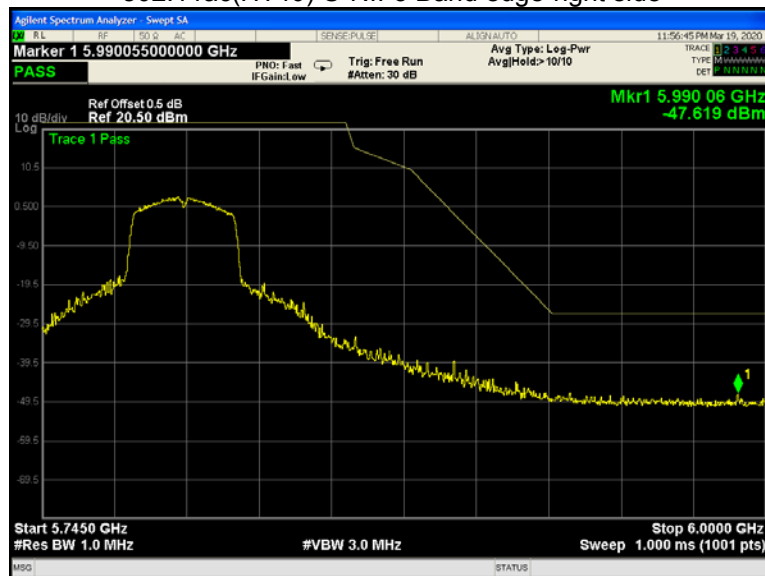


802.11ac(HT80) U-NII-1 Band edge-left side

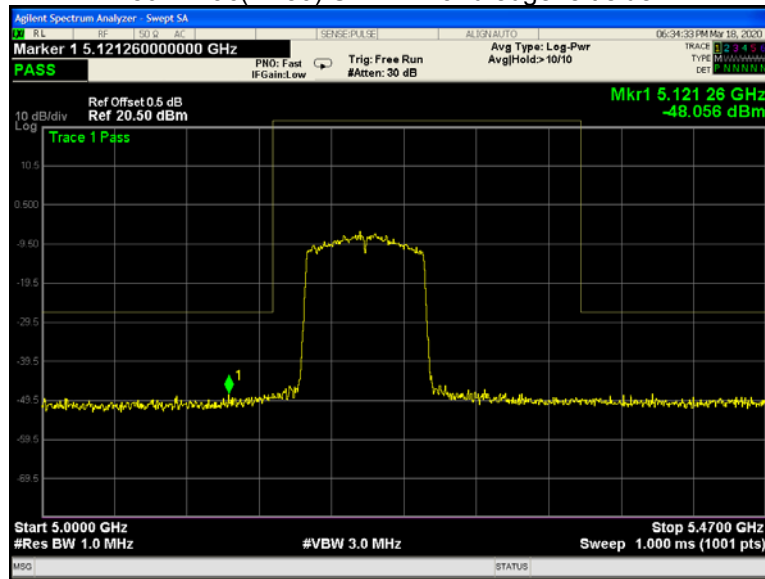


802.11ac(HT80) U-NII-1 Band edge-right side

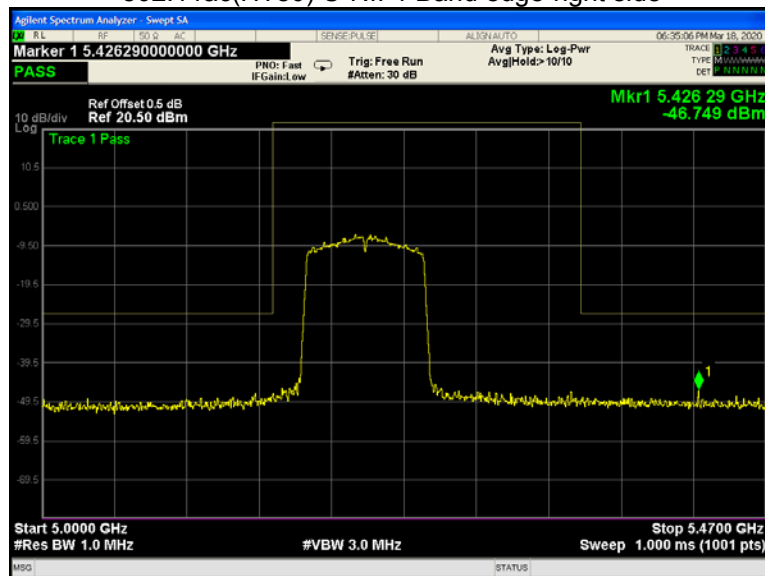

802.11ac(HT80) U-NII-3 Band edge-left side

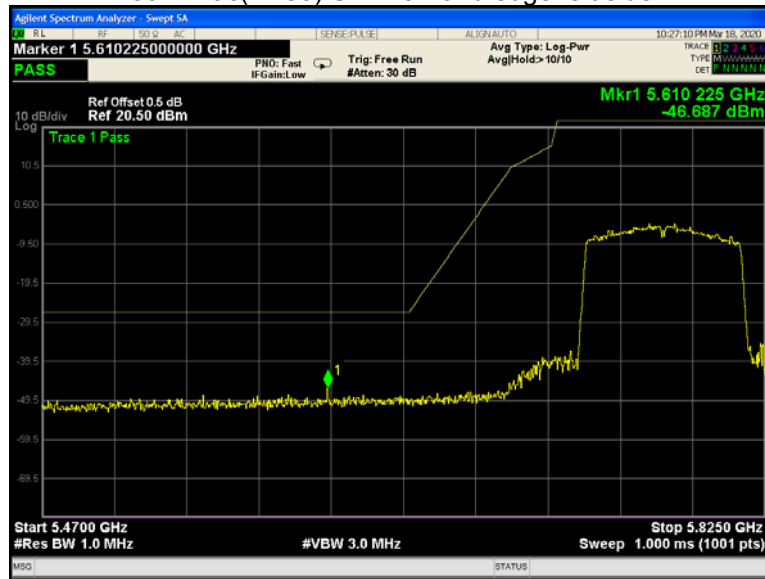

802.11ac(HT80) U-NII-3 Band edge-right side

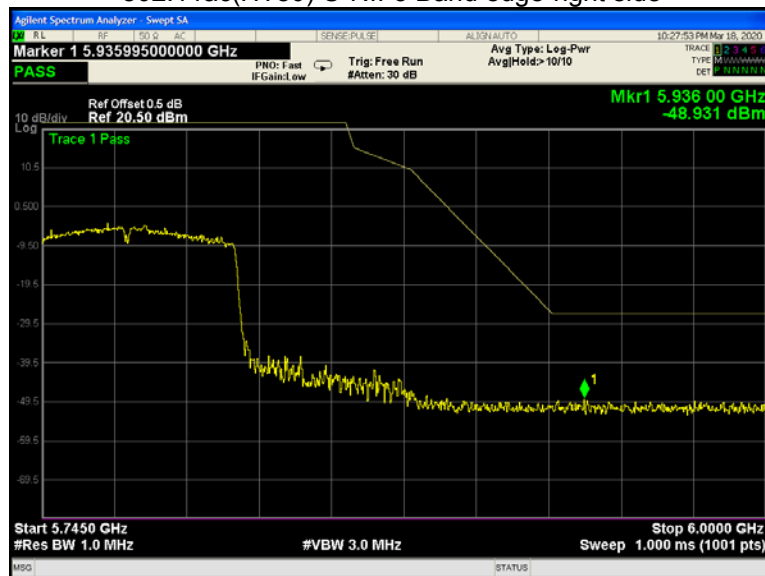

11 6 dB Bandwidth

Test Requirement:	FCC CFR47 Part 15 Section 15.407(e) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section C
Test Limit:	≥ 500 kHz
Test Result:	PASS

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:


Band	Operation mode	6 dB Bandwidth (MHz)		
		Low	Middle	High
U-NII-3	802.11a	15.69	16.28	15.92
	802.11n(HT20)	15.10	15.10	15.11
	802.11n(HT40)	35.10	/	35.11
	802.11ac(HT20)	15.11	15.08	15.04
	802.11ac(HT40)	35.09	/	35.07
	802.11ac(HT80)	75.14	/	/

Test result plots shown as follows:


802.11a U-NII-3 Low channel

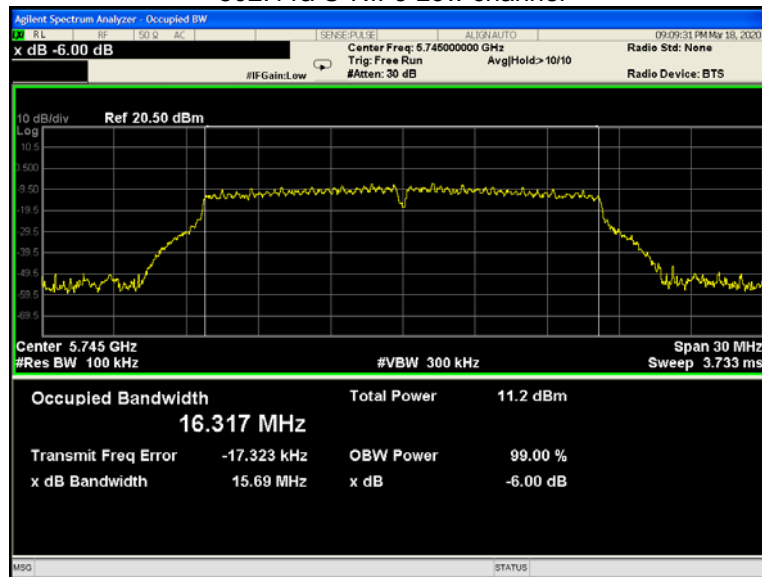


802.11a U-NII-3 Middle channel

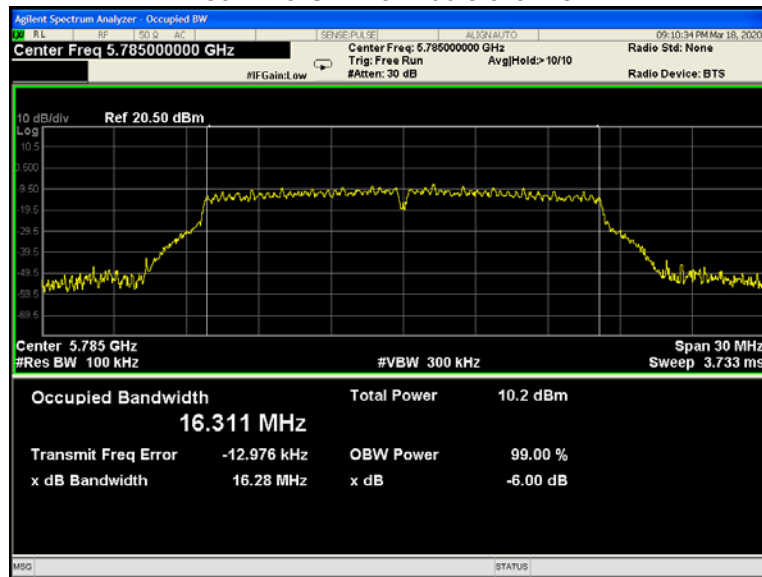


802.11a U-NII-3 High channel

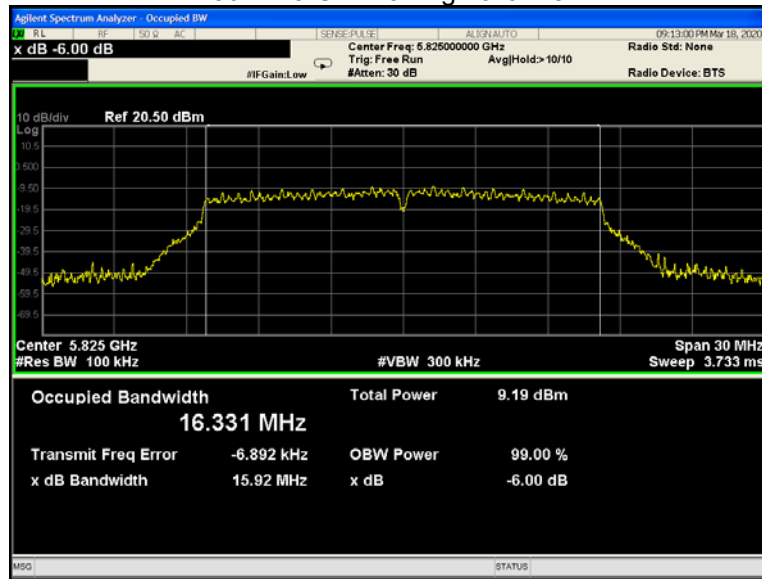


802.11n(HT20) U-NII-3 Low channel

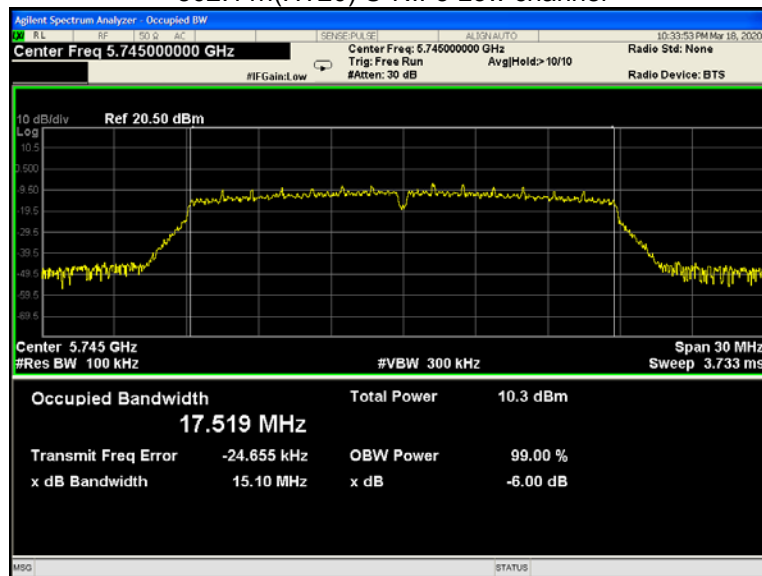


802.11n(HT20) U-NII-3 Middle channel

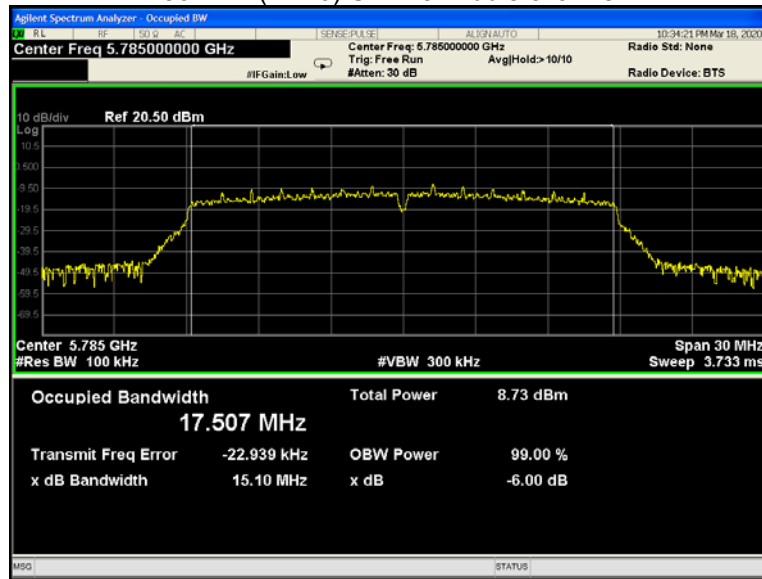


802.11n(HT20) U-NII-3 High channel

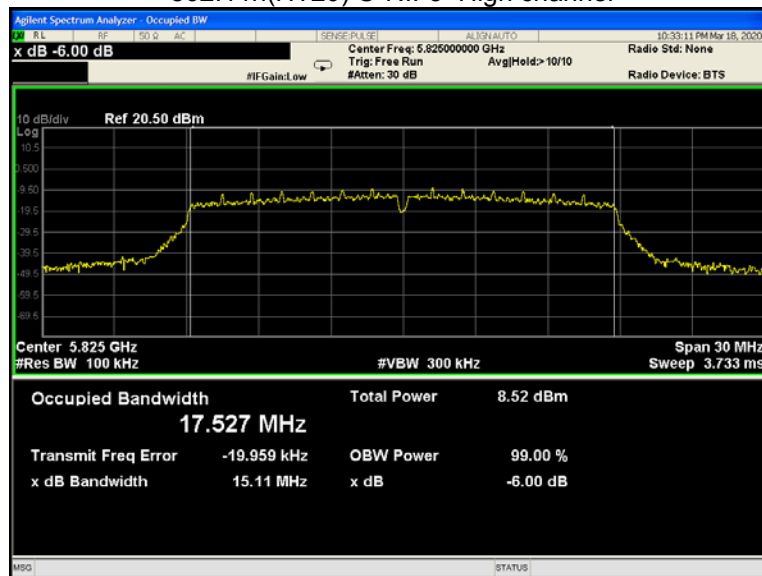


802.11n(HT40) U-NII-3 Low channel

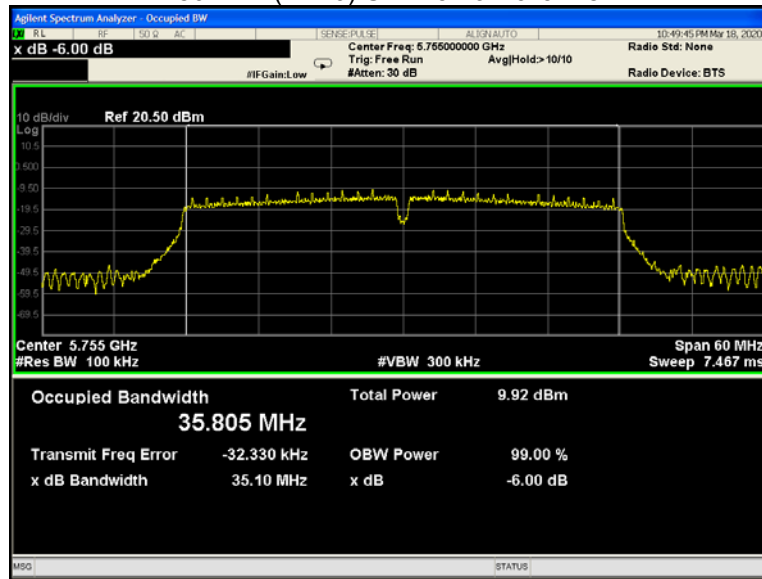


802.11n(HT40) U-NII-3 High channel

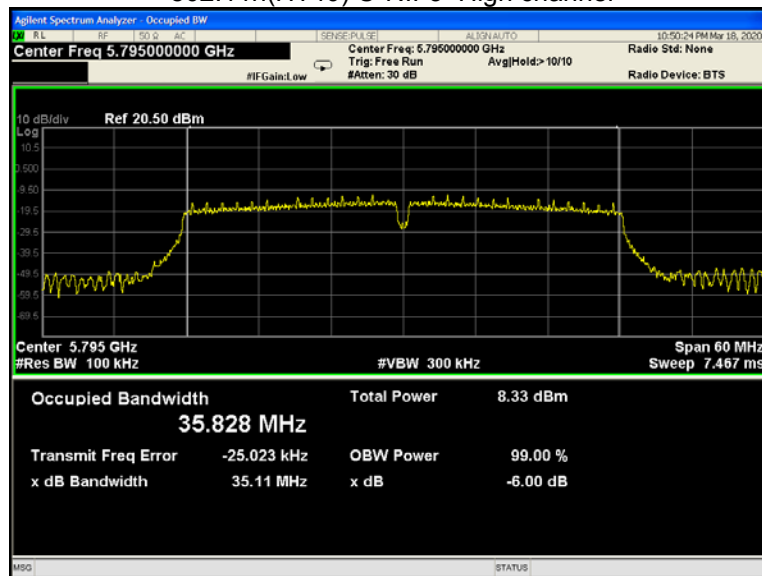


802.11ac(HT20) U-NII-3 Low channel

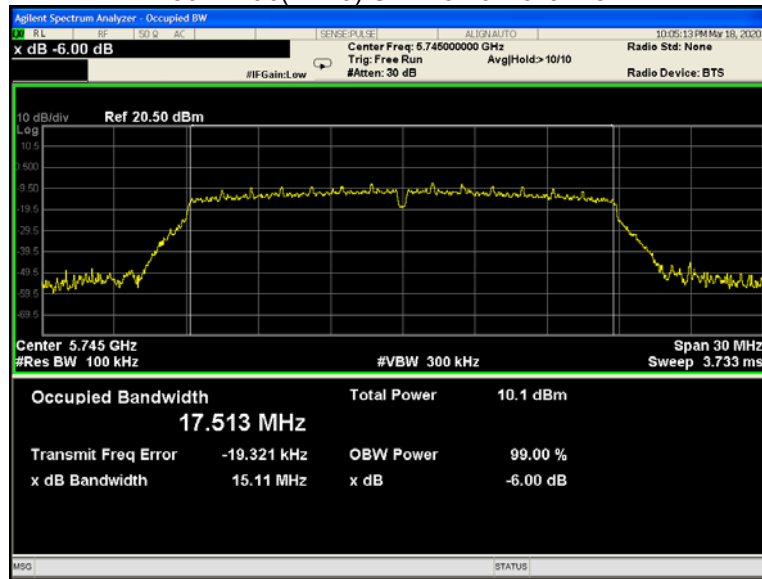


802.11ac(HT20) U-NII-3 Middle channel

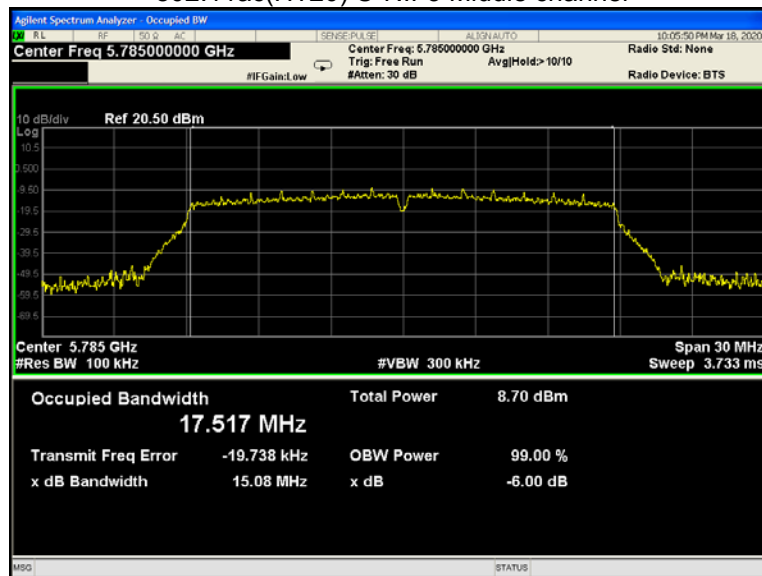


802.11ac(HT20) U-NII-3 High channel

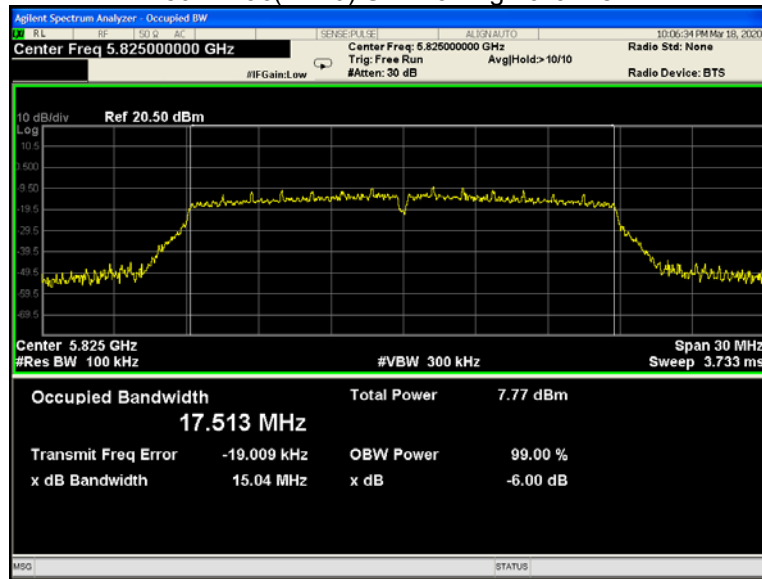


802.11ac(HT40) U-NII-3 Low channel

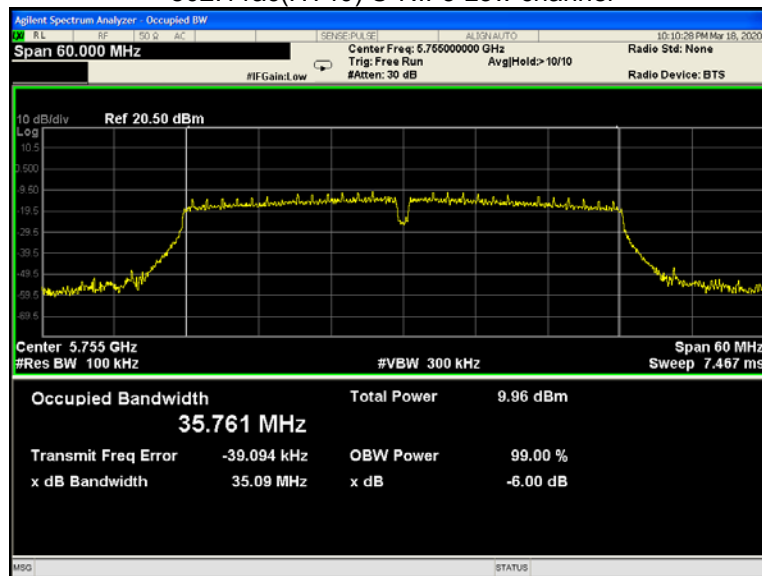

802.11ac(HT40) U-NII-3 High channel

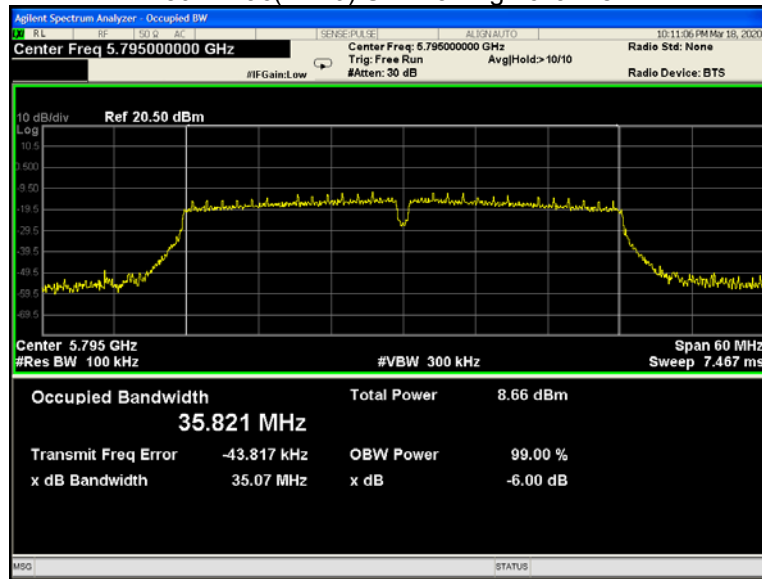

802.11ac(HT80) U-NII-3 Low channel

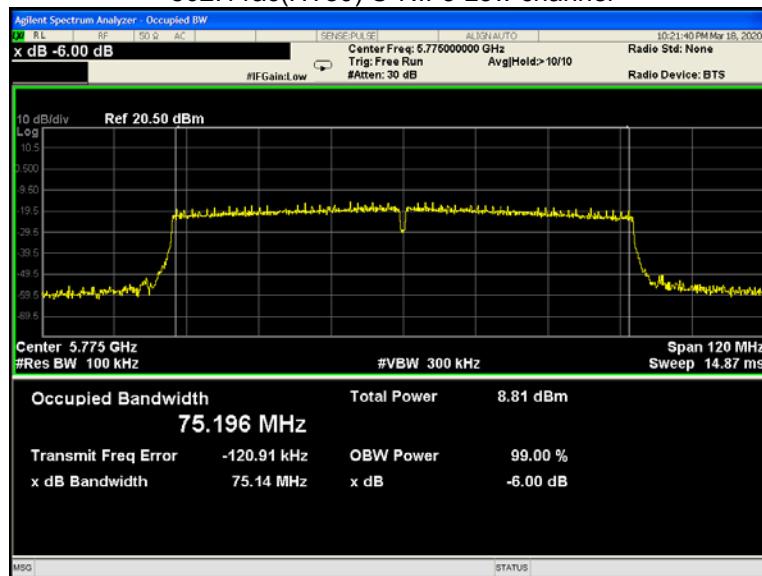

12 26 dB Bandwidth and 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.407 (a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section D
Test Limit:	No restriction limits
Test Result:	PASS

12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 1% to 5% of the OBW, VBW = 3x RBW

12.2 Test Result:


Band	Operation mode	26 dB Bandwidth (MHz)			99% Bandwidth (MHz)		
		Low	Middle	High	Low	Middle	High
U-NII-1	802.11a	19.72	19.60	19.52	16.424	16.415	16.397
	802.11n(HT20)	19.63	19.64	19.73	17.547	17.543	17.538
	802.11n(HT40)	38.71	/	38.95	35.920	/	35.911
	802.11ac(HT20)	19.57	19.44	19.34	17.511	17.519	17.522
	802.11ac(HT40)	38.69	/	38.80	35.884	/	35.877
	802.11ac(HT80)	78.49	/	/	75.49	/	/
U-NII-3	802.11a	19.69	19.62	19.71	16.410	16.418	16.426
	802.11n(HT20)	20.20	20.15	20.10	17.562	17.573	17.561
	802.11n(HT40)	40.32	/	40.39	35.983	/	35.987
	802.11ac(HT20)	20.22	20.13	20.04	17.522	17.556	17.539
	802.11ac(HT40)	40.35	/	40.24	35.897	/	35.992
	802.11ac(HT80)	80.71	/	/	75.286	/	/

Test result plots shown as follows:


802.11a U-NII-1 Low channel

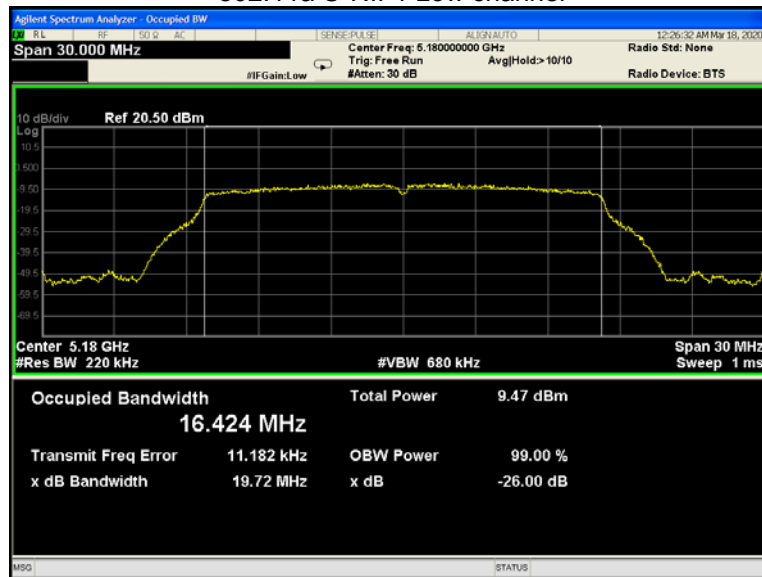


802.11a U-NII-1 Middle channel

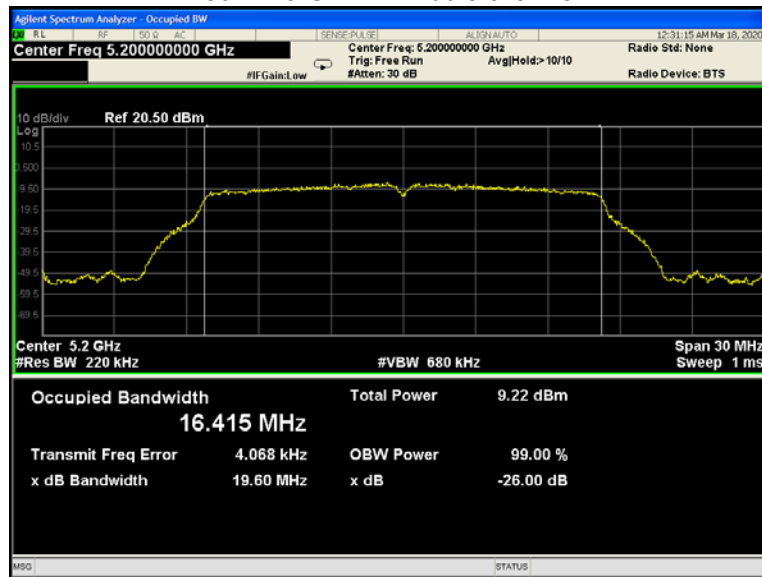


802.11a U-NII-1 High channel

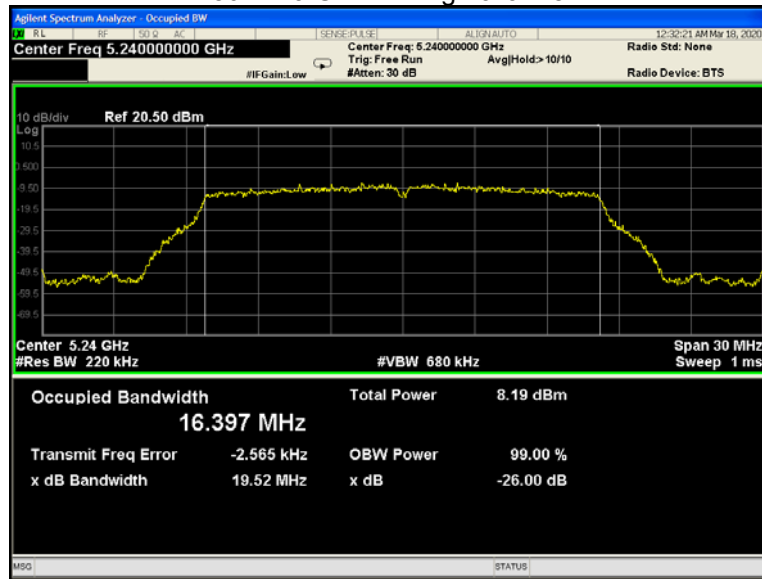


802.11n(HT20) U-NII-1 Low channel

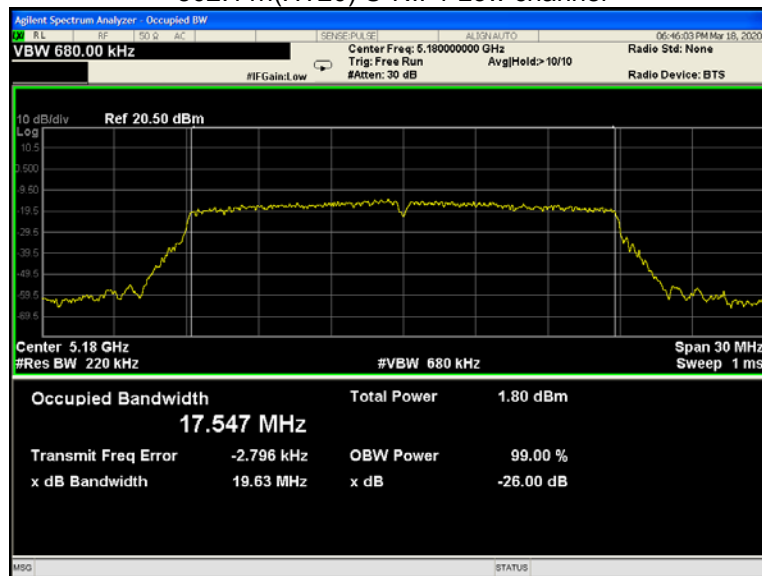


802.11n(HT20) U-NII-1 Middle channel

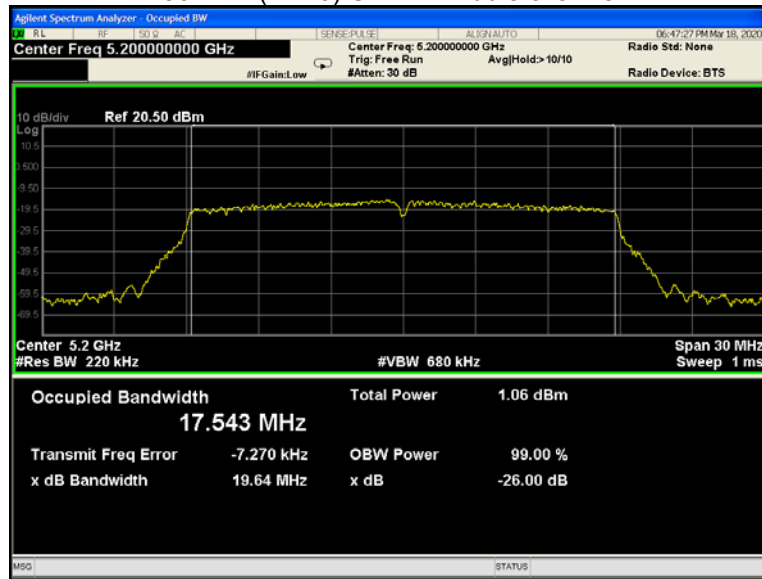


802.11n(HT20) U-NII-1 High channel

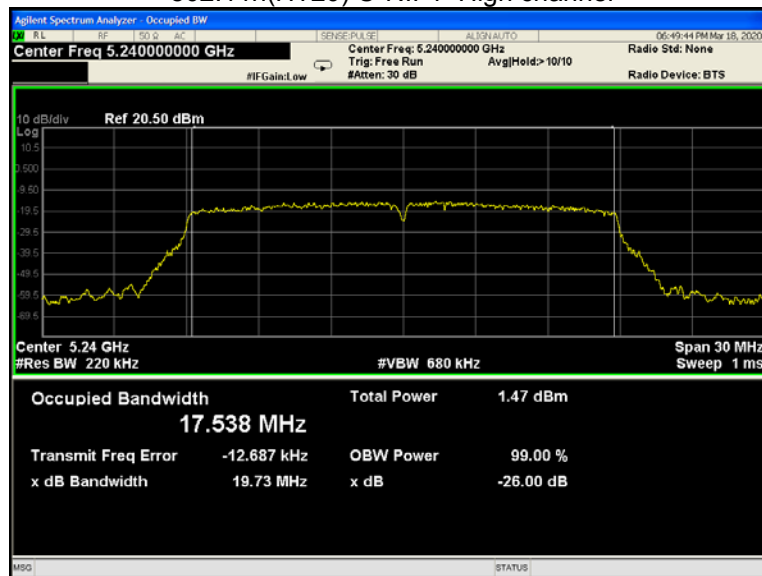


802.11n(HT40) U-NII-1 Low channel

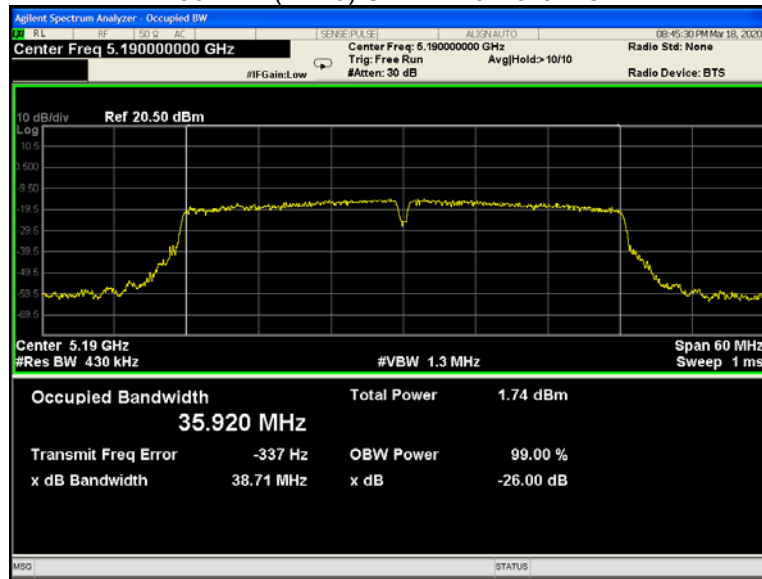


802.11n(HT40) U-NII-1 High channel

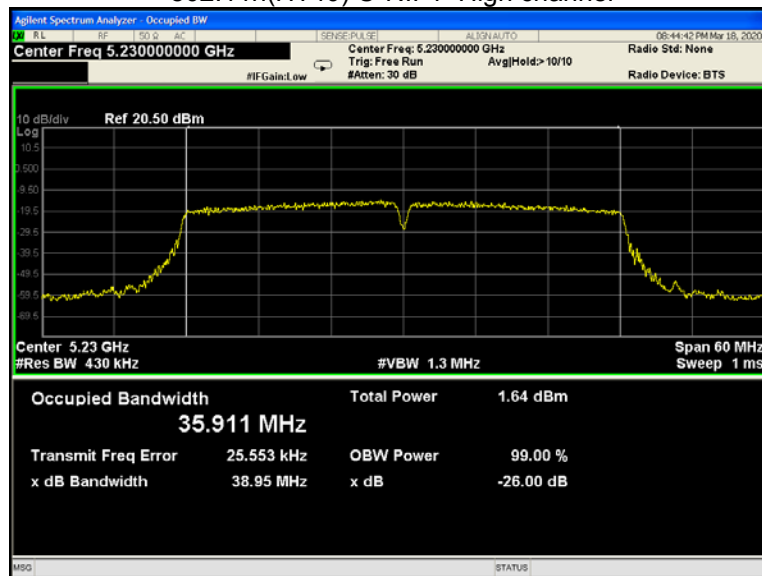


802.11ac(HT20) U-NII-1 Low channel

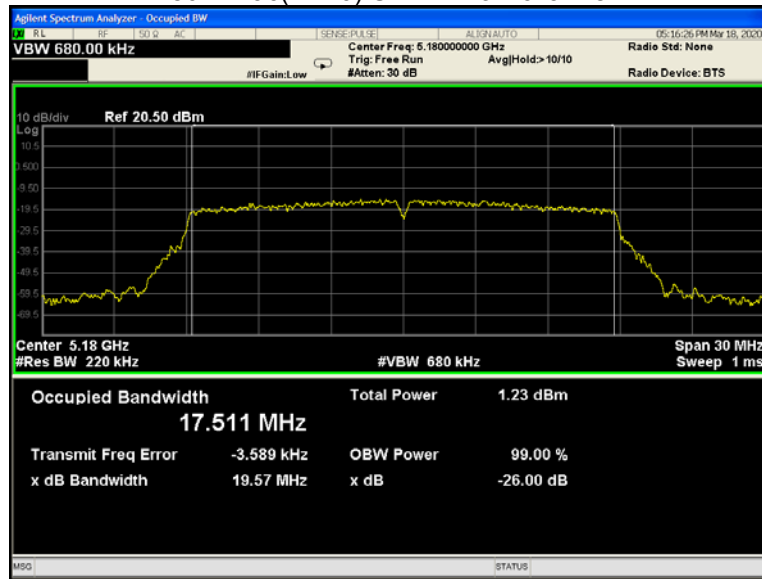


802.11ac(HT20) U-NII-1 Middle channel

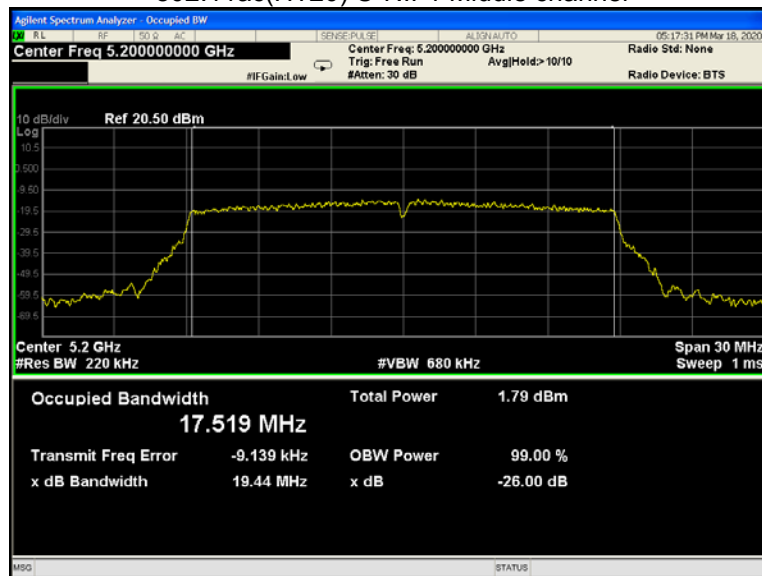


802.11ac(HT20) U-NII-1 High channel

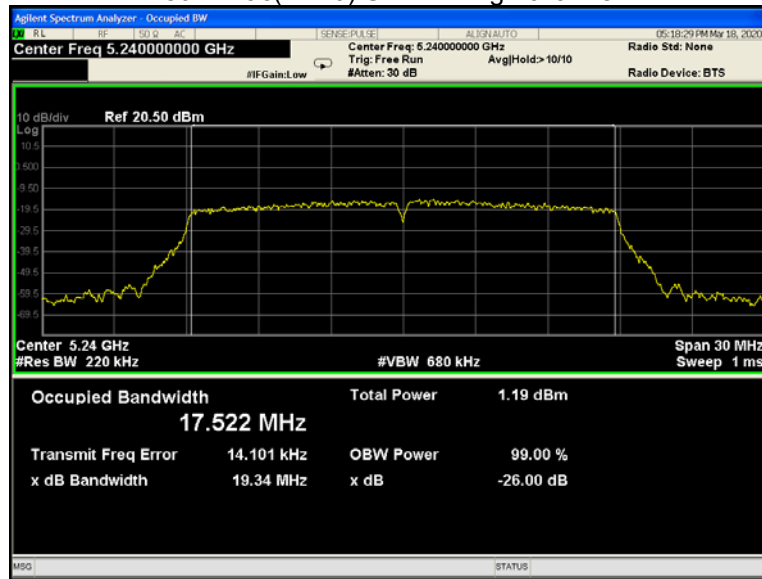


802.11ac(HT40) U-NII-1 Low channel

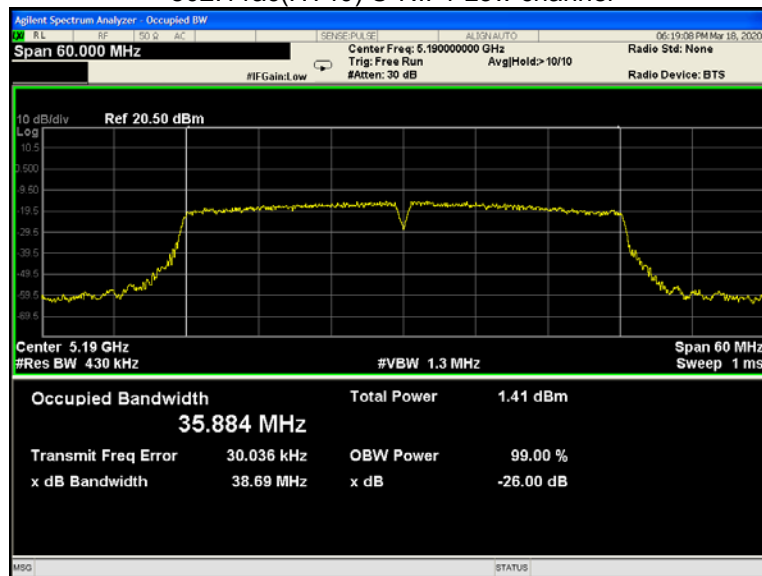


802.11ac(HT40) U-NII-1 High channel

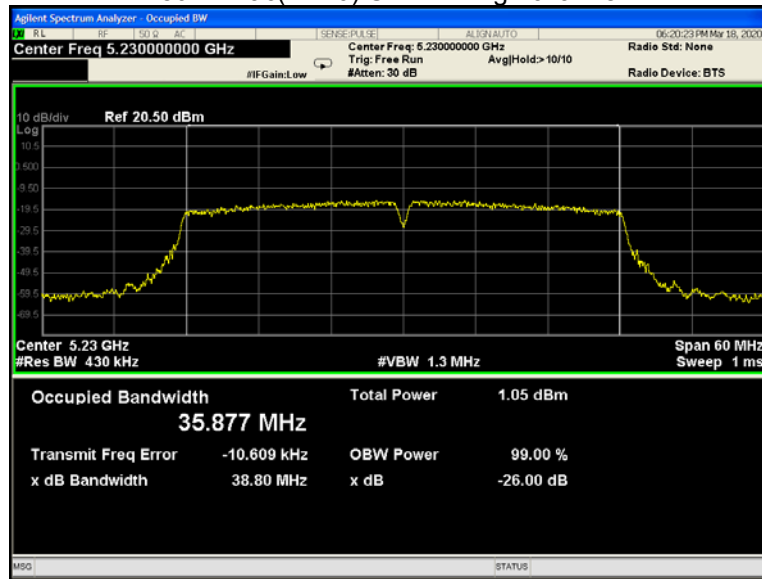


802.11ac(HT80) U-NII-1 Low channel

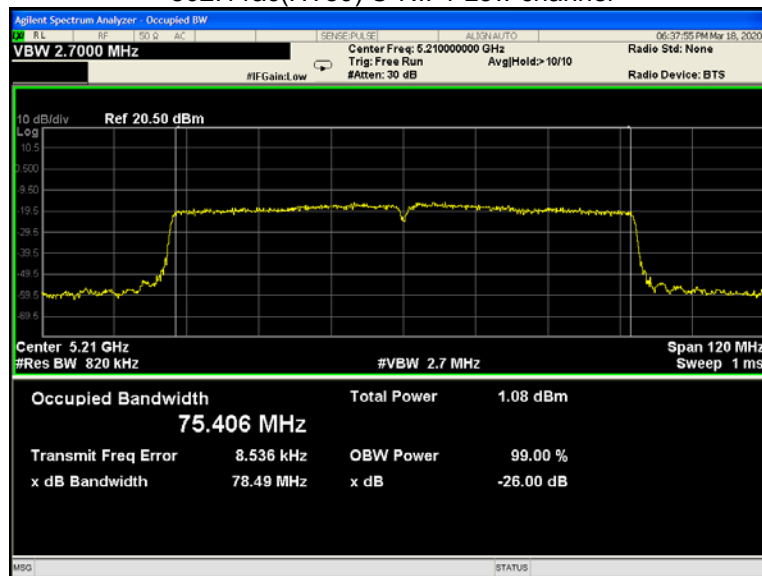


802.11a U-NII-3 Low channel

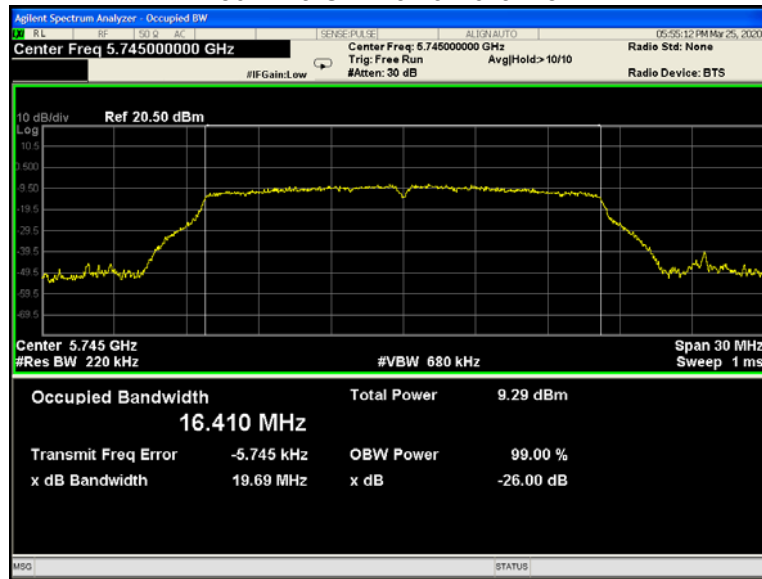


802.11a U-NII-3 Middle channel

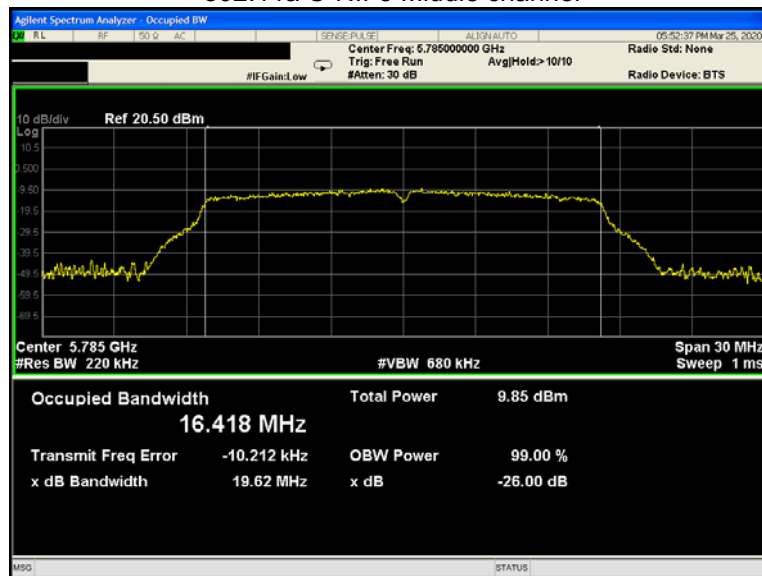


802.11a U-NII-3 High channel

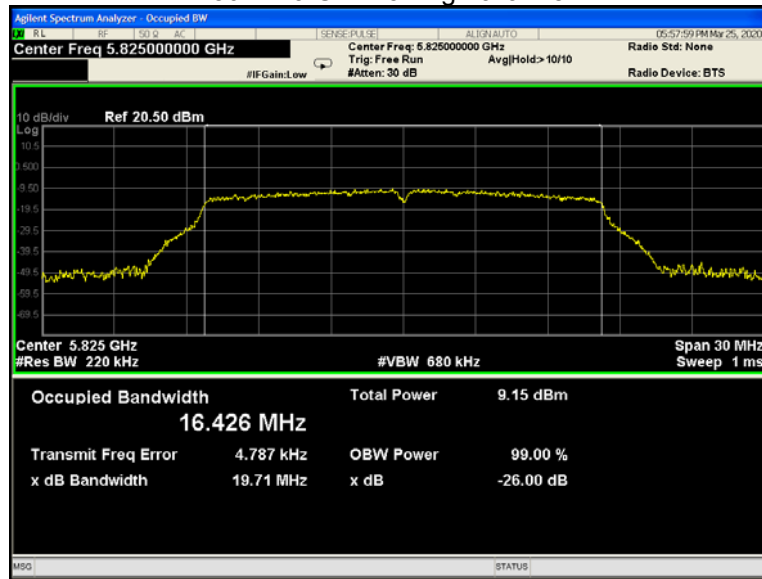


802.11n(HT20) U-NII-3 Low channel

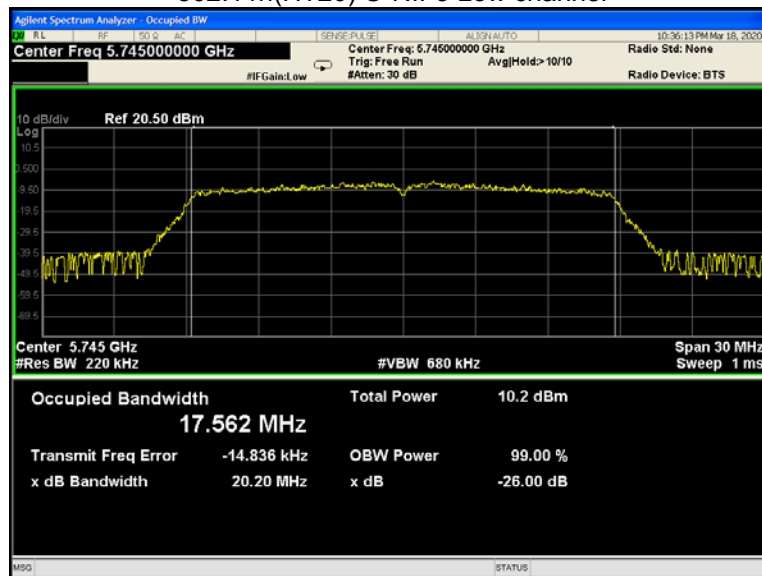


802.11n(HT20) U-NII-3 Middle channel

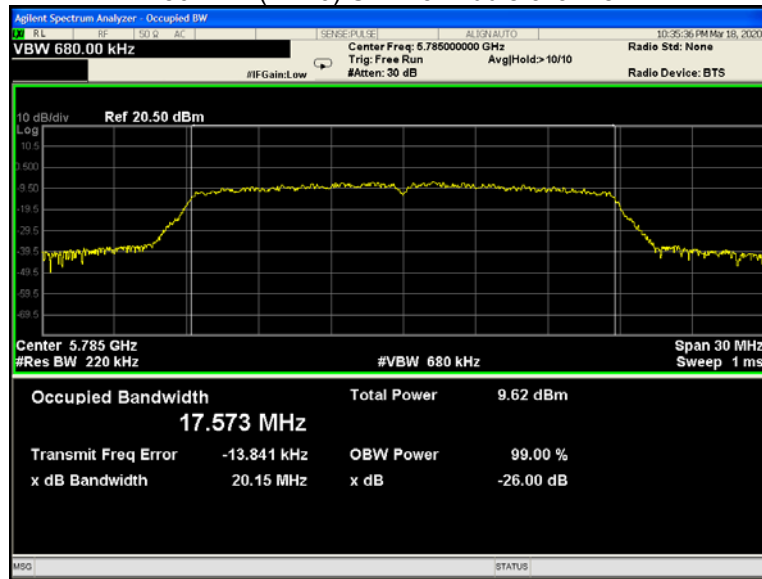


802.11n(HT20) U-NII-3 High channel

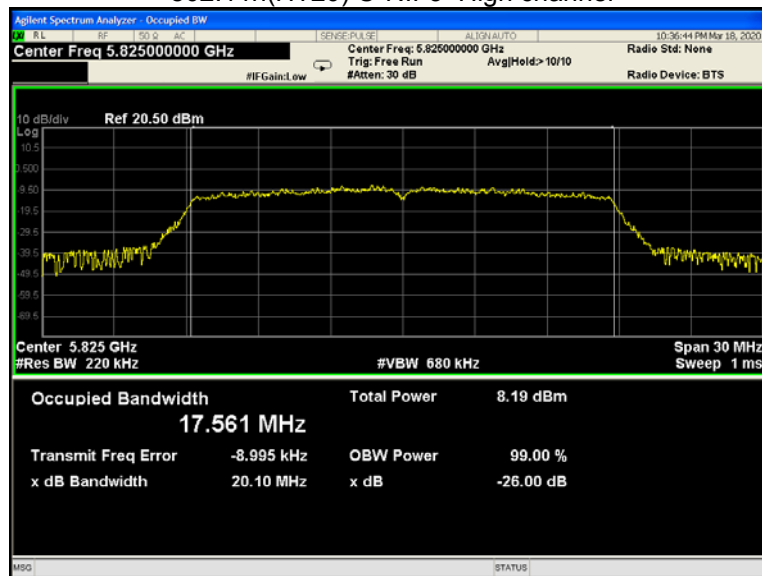


802.11n(HT40) U-NII-3 Low channel

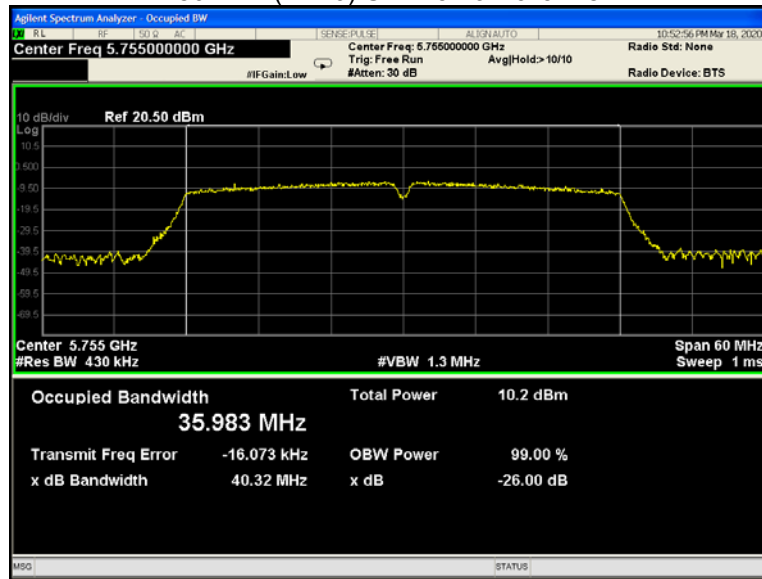


802.11n(HT40) U-NII-3 High channel

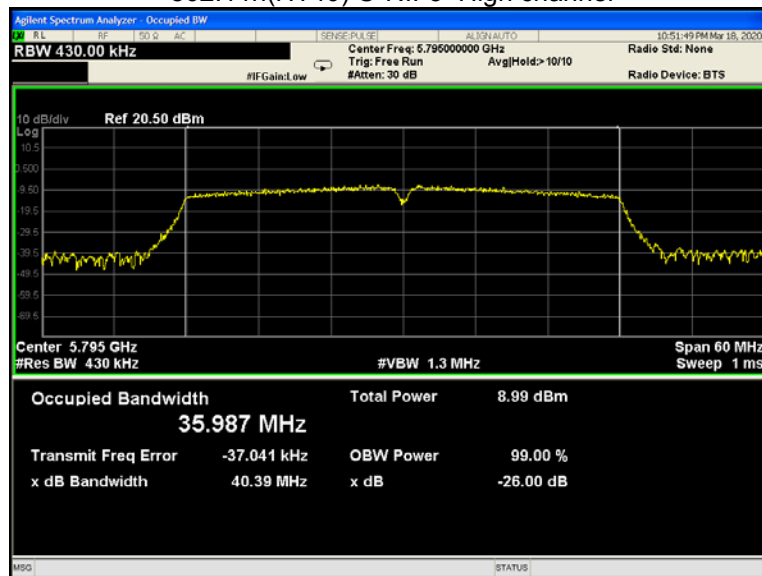


802.11ac(HT20) U-NII-3 Low channel

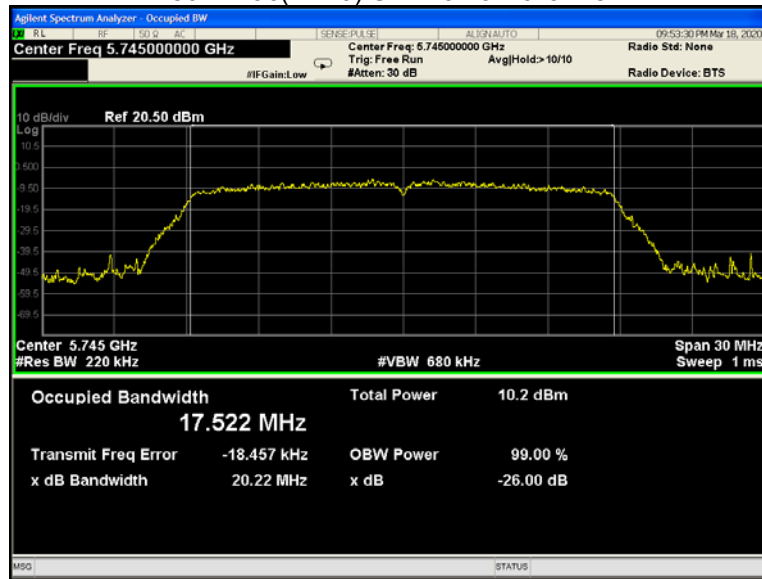


802.11ac(HT20) U-NII-3 Middle channel

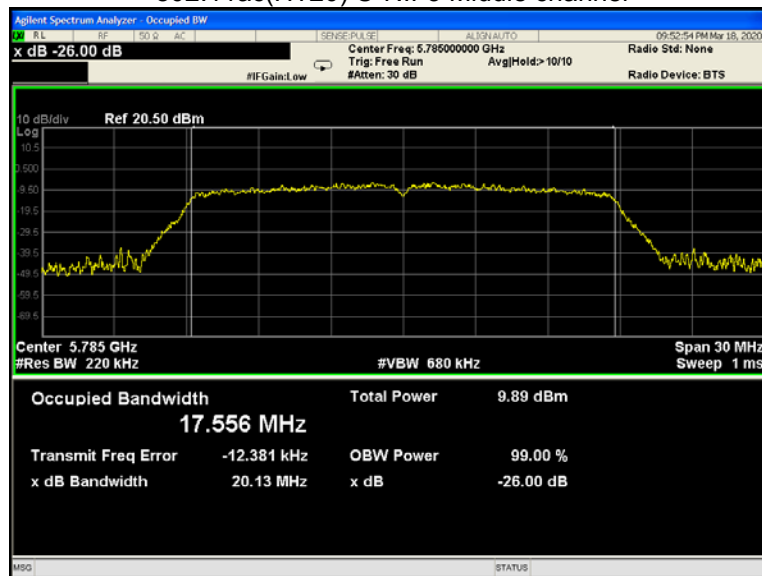


802.11ac(HT20) U-NII-3 High channel

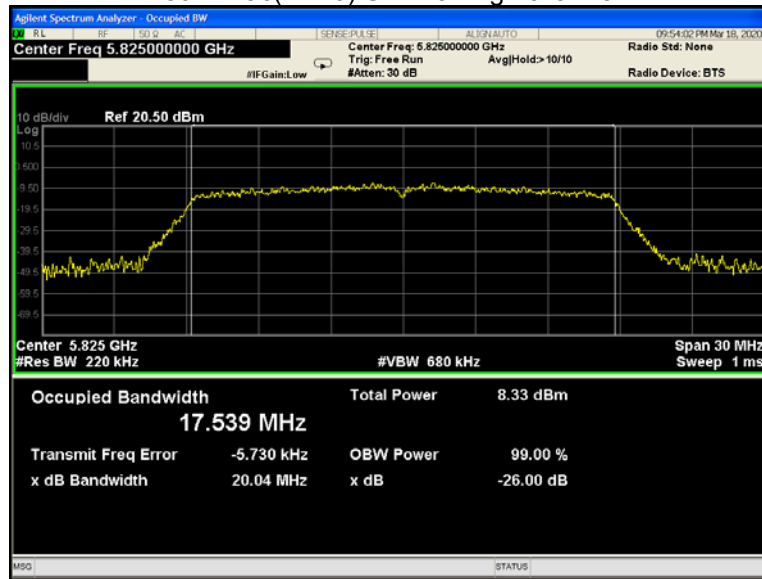


802.11ac(HT40) U-NII-3 Low channel

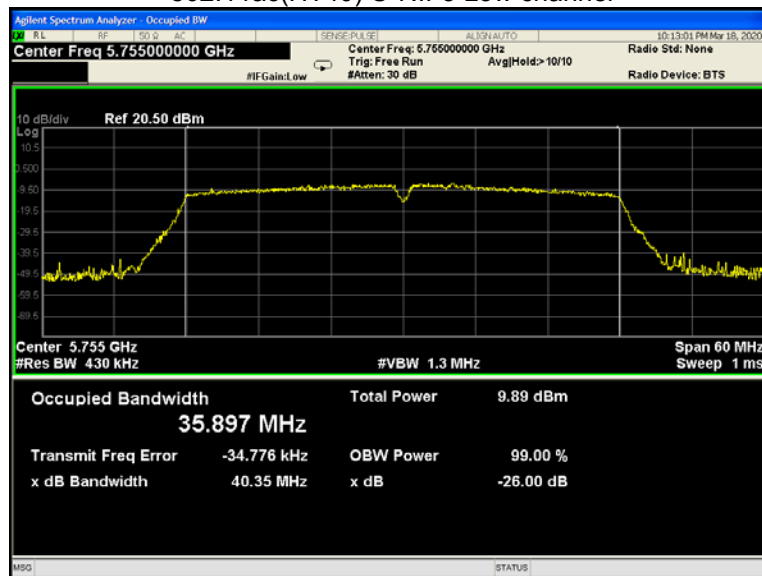

802.11ac(HT40) U-NII-3 High channel

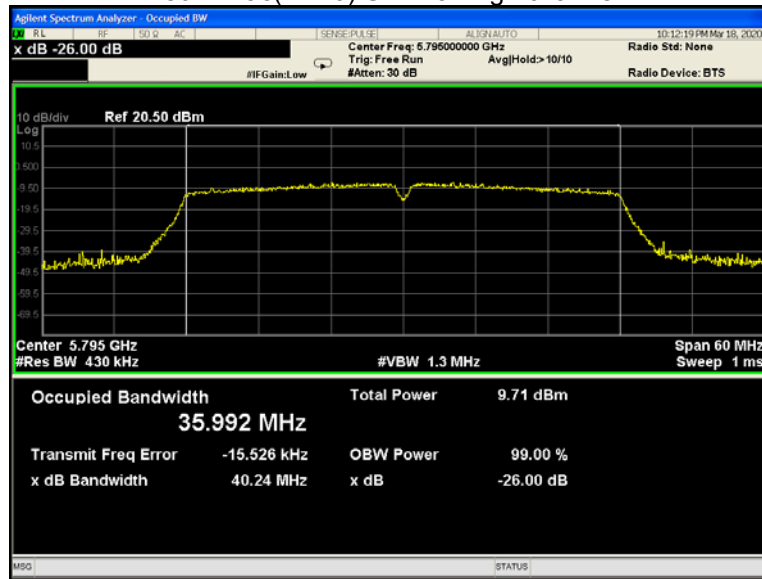

802.11ac(HT80) U-NII-3 Low channel

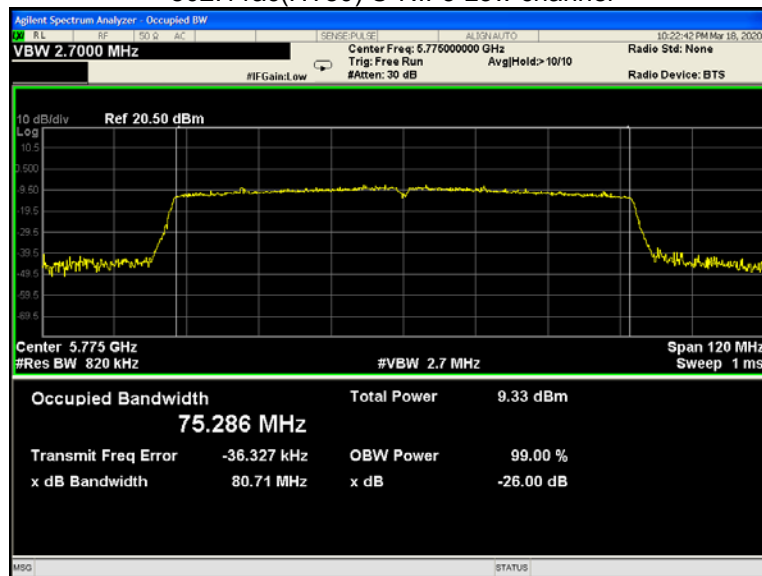

13 Conducted Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.407(a) KDB662911 D01 Multiple Transmitter Output v02r01
Test Method:	KDB789033 D02 General U-NII Test Procedures New Rules v02r01 Section E
Test Limit:	U-NII-1 250mW(24dBm) U-NII-3 1W(30dBm)
Test Result:	PASS Conducted output power= measurement power+10log(1/x)
Remark:	X is duty cycle=1, so 10log(1/1)=0 Conducted output power= measurement power

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


13.2 Test Result :

Band	Operation mode	Conducted Output Power (dBm)		
		Low	Middle	High
U-NII-1	802.11a	8.18	8.07	7.80
	802.11n(HT20)	6.55	6.75	7.06
	802.11n(HT40)	7.48	/	6.43
	802.11ac(HT20)	7.39	7.25	6.86
	802.11ac(HT40)	7.26	/	6.69
	802.11ac(HT80)	7.21	/	/
U-NII-3	802.11a	10.68	10.04	9.06
	802.11n(HT20)	9.14	8.28	7.39
	802.11n(HT40)	9.35	/	8.14
	802.11ac(HT20)	9.42	9.02	7.62
	802.11ac(HT40)	9.22	/	8.53
	802.11ac(HT80)	9.48	/	/


* All transmit signals are completely uncorrelated with each other, Directional gain = G_{ANT} which is less than 6dBi. So the limit does not be reduced.

Test result plots shown as follows:


802.11a U-NII-1 Low channel

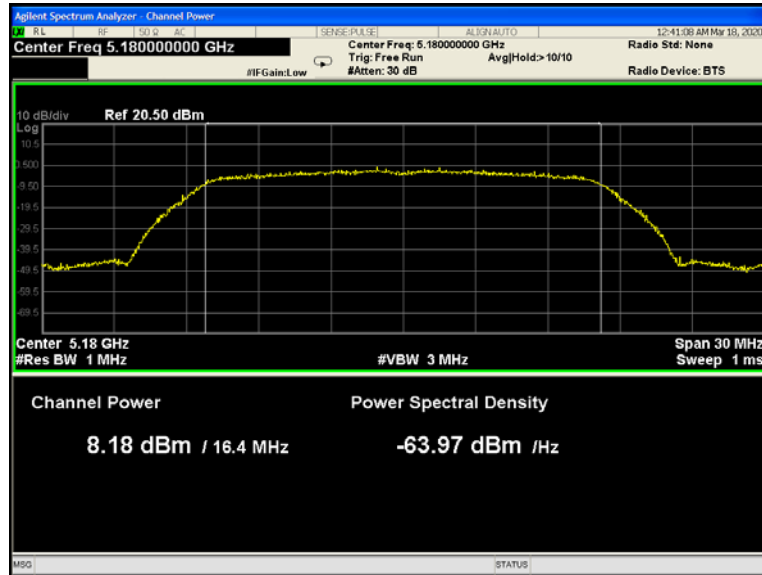


802.11a U-NII-1 Middle channel

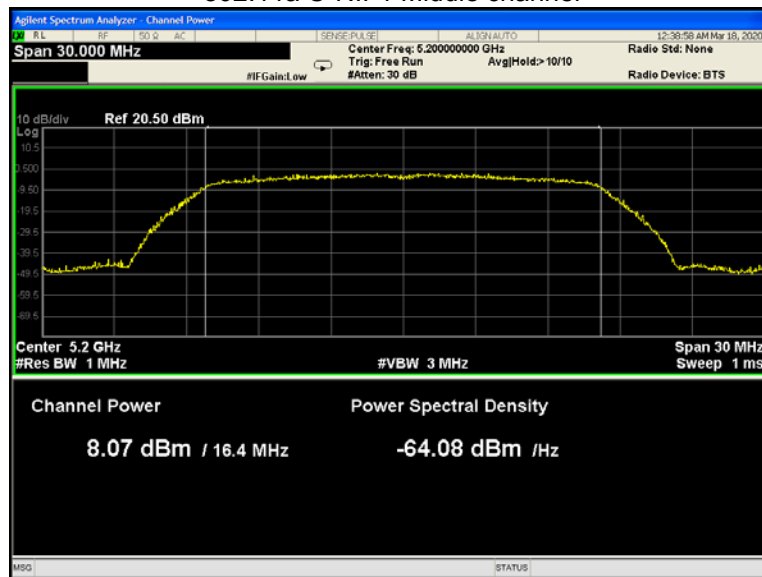


802.11a U-NII-1 High channel

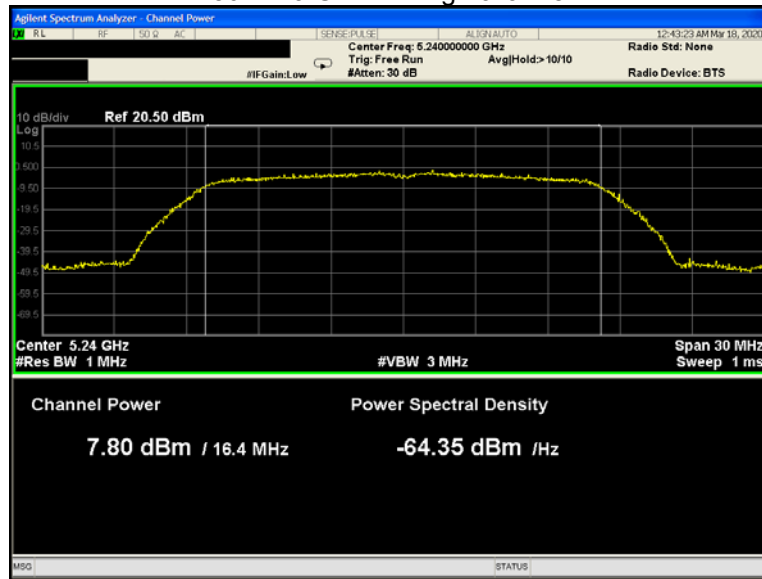

802.11n(HT20) U-NII-1 Low channel

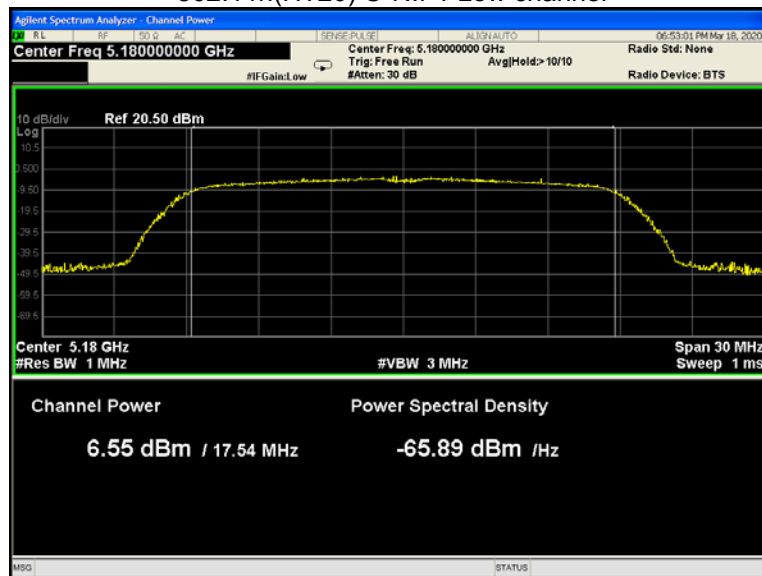

802.11n(HT20) U-NII-1 Middle channel

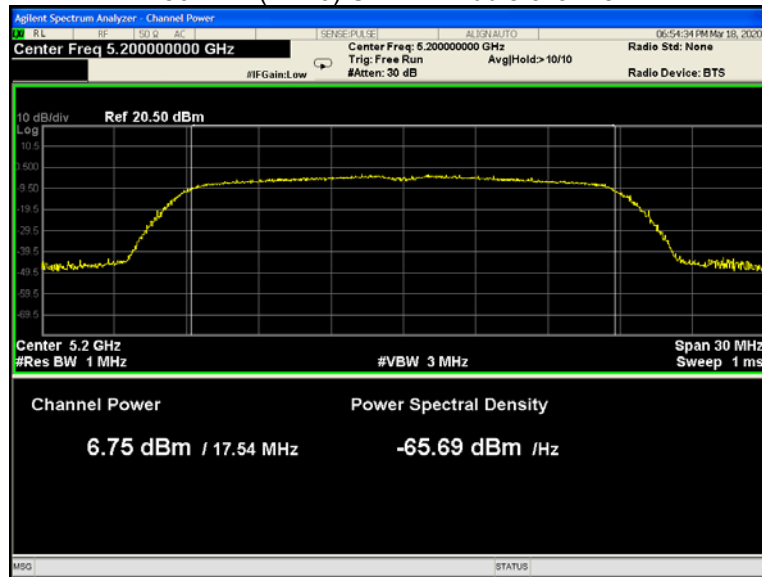

802.11n(HT20) U-NII-1 High channel

