

# TEST REPORT

**Reference No.**..... : WTS19S12086451W003 V1  
**FCC ID** ..... : 2ADYY-CD8  
**Applicant**..... : TECNO MOBILE LIMITED  
**Address**..... : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR  
HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong  
**Manufacturer** ..... : SHENZHEN TECNO TECHNOLOGY CO.,LTD.  
**Address**..... : 101, Building 24, Waijing Industrial Park, Fumin Community,  
Fucheng Street, Longhua District, Shenzhen City, P.R. China  
**Product**..... : Mobile Phone  
**Model(s)** ..... : CD8  
**Brand Name**..... : TECNO  
**Standards**..... : FCC CFR47 Part 15.247:2018  
**Date of Receipt sample** .... : 2019-12-11  
**Date of Test** ..... : 2019-12-12 to 2019-12-23  
**Date of Issue**..... : 2019-12-30  
**Test Result**..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

*Ford Wang*

\_\_\_\_\_  
Ford Wang / Project Engineer



*Philip Zhong*

\_\_\_\_\_  
Philip Zhong / Manager

## 2 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 CHANNEL LIST.....	5
4.4 TEST MODE.....	6
4.5 TEST FACILITY.....	7
<b>5 TEST SUMMARY</b> .....	<b>8</b>
<b>6 EQUIPMENT USED DURING TEST</b> .....	<b>9</b>
6.1 EQUIPMENTS LIST.....	9
6.2 DESCRIPTION OF SUPPORT UNITS.....	10
6.3 MEASUREMENT UNCERTAINTY.....	10
6.4 TEST EQUIPMENT CALIBRATION.....	10
<b>7 CONDUCTED EMISSION</b> .....	<b>11</b>
7.1 E.U.T. OPERATION.....	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION.....	11
7.4 CONDUCTED EMISSION TEST RESULT.....	12
<b>8 RADIATED EMISSIONS</b> .....	<b>16</b>
8.1 EUT OPERATION.....	16
8.2 TEST SETUP.....	17
8.3 SPECTRUM ANALYZER SETUP.....	18
8.4 TEST PROCEDURE.....	19
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
8.6 SUMMARY OF TEST RESULTS.....	20
<b>9 CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>36</b>
9.1 TEST PROCEDURE.....	36
9.2 TEST RESULT.....	37
<b>10 BAND EDGE MEASUREMENT</b> .....	<b>53</b>
10.1 TEST PROCEDURE.....	53
10.2 TEST RESULT.....	54
<b>11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT</b> .....	<b>59</b>
11.1 TEST PROCEDURE:.....	59
11.2 TEST RESULT:.....	59
<b>12 MAXIMUM PEAK CONDUCTED OUTPUT POWER</b> .....	<b>68</b>
12.1 TEST PROCEDURE:.....	68
12.2 TEST RESULT:.....	69
<b>13 DUTY CYCLE</b> .....	<b>78</b>
<b>14 POWER SPECTRAL DENSITY</b> .....	<b>79</b>
14.1 TEST PROCEDURE:.....	79
14.2 TEST RESULT:.....	79
<b>15 ANTENNA REQUIREMENT</b> .....	<b>88</b>
<b>16 RF EXPOSURE</b> .....	<b>89</b>
<b>17 PHOTOGRAPHS OF TEST SETUP AND EUT</b> .....	<b>90</b>

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS19S12086 451W003	2019-12-11	2019-12-12 to 2019-12- 23	2019-12-23	original	-	Replaced
WTS19S12086 451W003 V1	2019-12-11	2019-12-12 to 2019-12- 23	2019-12-30	Version 1	Updated	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	Mobile Phone
Model(s):	CD8
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	V1.3
Software Version:	CD8-H655SBC-Q-191121V104
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

### 4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 17.27dBm BLE: -4.21dBm
Type of Modulation:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi: internal permanent antenna BLE: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 1.5dBi BLE: 1.5dBi
Ratings:	Battery DC 3.85V, 3900mAh DC 5V, 2.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.35A)
Adapter:	Manufacturer: Dongguan Aohai Power Technology CO.,LTD Model No.: A8A-050200U-US1

### 4.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

Note: All test were performed that the device transmit continue of the 100% duty cycle.



## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-12	2020-09-11
2.	LISN	R&S	ENV216	101215	2019-09-12	2020-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-12	2020-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-12	2020-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-12	2020-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-12	2020-09-11
4.	Cable	LARGE	RF300	-	2019-09-12	2020-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2019-04-29	2020-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2019-04-09	2020-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2019-04-09	2020-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-12	2020-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2019-04-09	2020-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2019-04-09	2020-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2019-04-13	2020-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2019-04-13	2020-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2019-04-13	2020-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2019-04-09	2020-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2019-04-13	2020-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2019-04-13	2020-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-09-12	2020-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2019-09-12	2020-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2019-09-12	2020-09-11

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 <sup>-7</sup> Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

### 7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

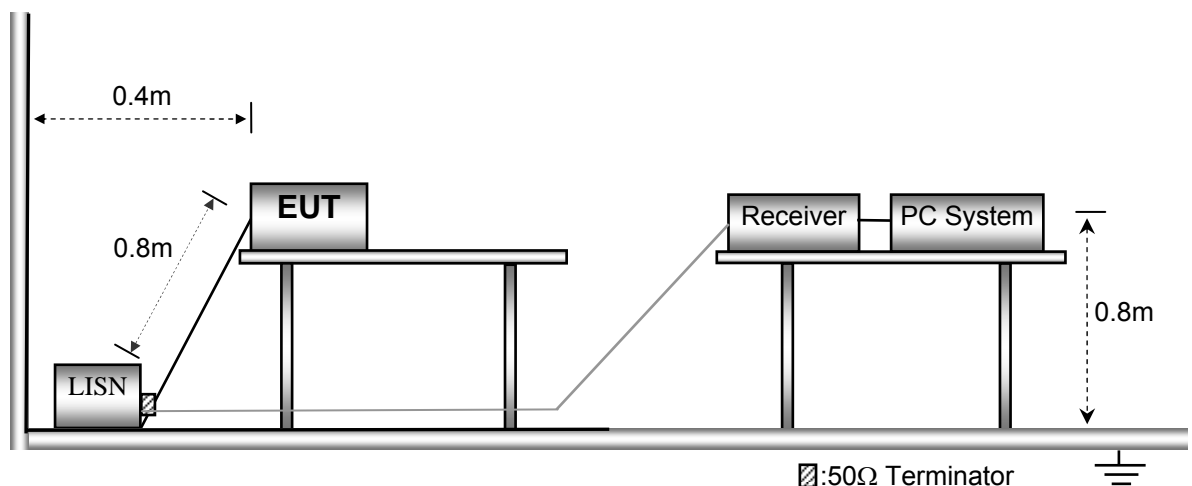

### 7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

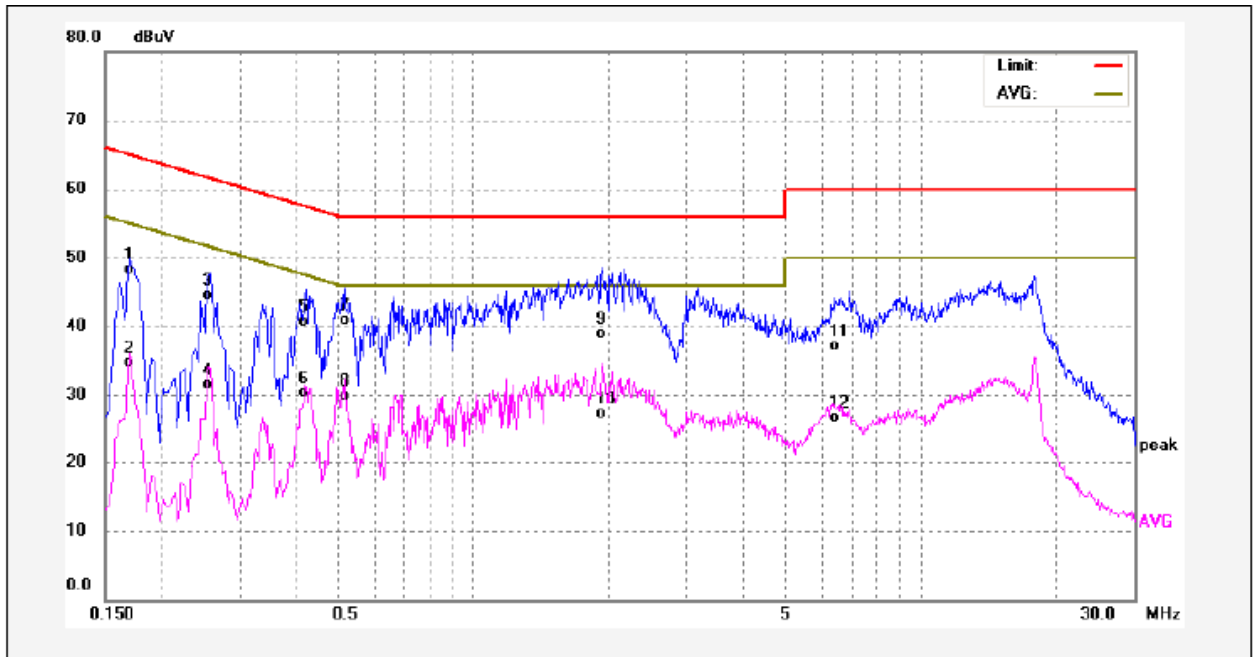

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	38.47	9.78	48.25	64.96	-16.71	QP	
2	0.1700	24.97	9.78	34.75	54.96	-20.21	AVG	
3	0.2540	34.68	9.76	44.44	61.62	-17.18	QP	
4	0.2540	21.73	9.76	31.49	51.62	-20.13	AVG	
5	0.4180	30.83	9.83	40.66	57.49	-16.83	QP	
6	0.4180	20.40	9.83	30.23	47.49	-17.26	AVG	
7	0.5140	31.04	9.81	40.85	56.00	-15.15	QP	
8	0.5140	20.05	9.81	29.86	46.00	-16.14	AVG	
9	1.9460	28.93	9.95	38.88	56.00	-17.12	QP	
10	1.9460	17.38	9.95	27.33	46.00	-18.67	AVG	
11	6.3940	27.02	10.09	37.11	60.00	-22.89	QP	
12	6.3940	16.56	10.09	26.65	50.00	-23.35	AVG	


Neutral line:

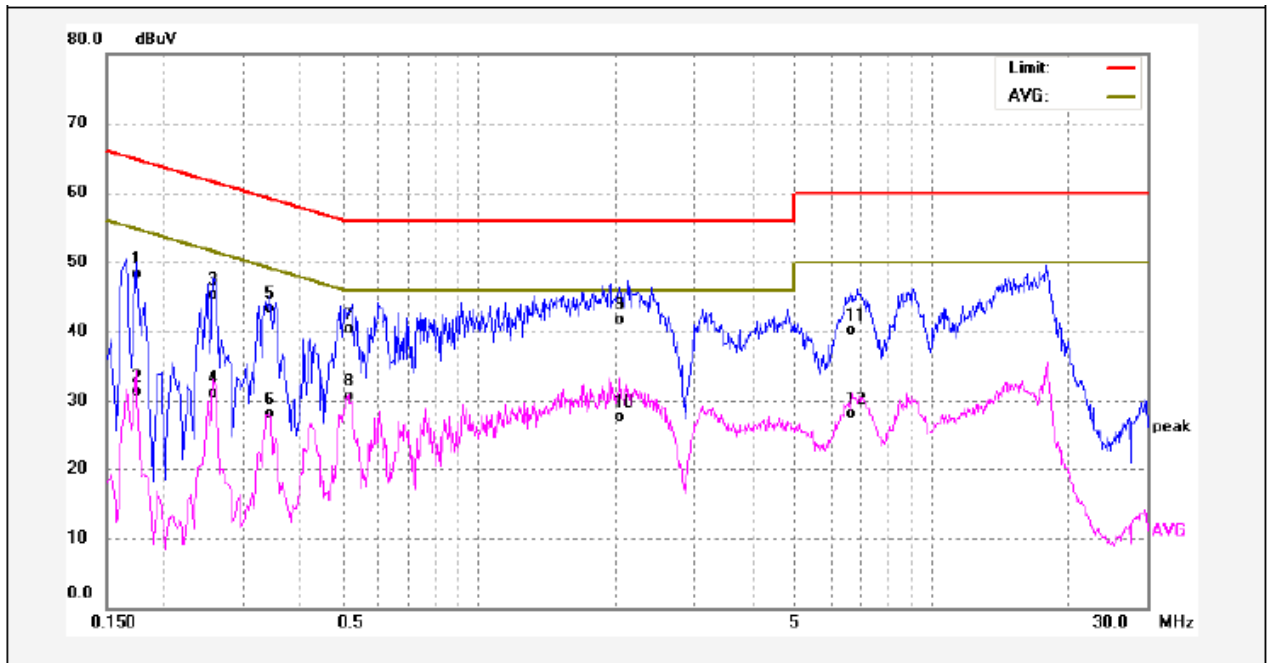

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1740	38.44	9.78	48.22	64.76	-16.54	QP	
2	0.1740	21.59	9.78	31.37	54.76	-23.39	AVG	
3	0.2580	35.55	9.77	45.32	61.49	-16.17	QP	
4	0.2580	21.35	9.77	31.12	51.49	-20.37	AVG	
5	0.3460	33.50	9.80	43.30	59.06	-15.76	QP	
6	0.3460	18.24	9.80	28.04	49.06	-21.02	AVG	
7	0.5140	30.55	9.81	40.36	56.00	-15.64	QP	
8	0.5140	20.85	9.81	30.66	46.00	-15.34	AVG	
9	2.0460	31.69	9.96	41.65	56.00	-14.35	QP	
10	2.0460	17.67	9.96	27.63	46.00	-18.37	AVG	
11	6.6860	29.97	10.10	40.07	60.00	-19.93	QP	
12	6.6860	18.08	10.10	28.18	50.00	-21.82	AVG	


Worst Mode: BLE mode (low channel )

Live line:

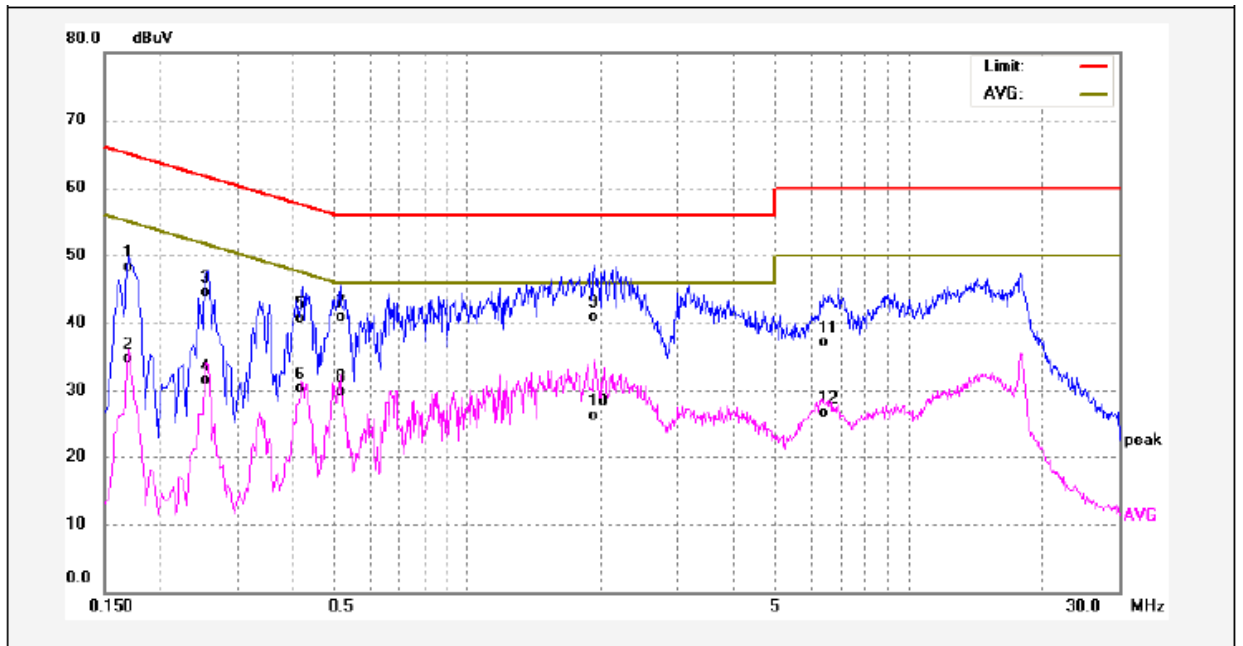

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	38.47	9.78	48.25	64.96	-16.71	QP	
2	0.1700	24.97	9.78	34.75	54.96	-20.21	AVG	
3	0.2540	34.68	9.76	44.44	61.62	-17.18	QP	
4	0.2540	21.73	9.76	31.49	51.62	-20.13	AVG	
5	0.4180	30.83	9.83	40.66	57.49	-16.83	QP	
6	0.4180	20.40	9.83	30.23	47.49	-17.26	AVG	
7	0.5140	31.04	9.81	40.85	56.00	-15.15	QP	
8	0.5140	20.05	9.81	29.86	46.00	-16.14	AVG	
9	1.9460	30.93	9.95	40.88	56.00	-15.12	QP	
10	1.9460	16.38	9.95	26.33	46.00	-19.67	AVG	
11	6.3940	27.02	10.09	37.11	60.00	-22.89	QP	
12	6.3940	16.56	10.09	26.65	50.00	-23.35	AVG	

Neutral line:

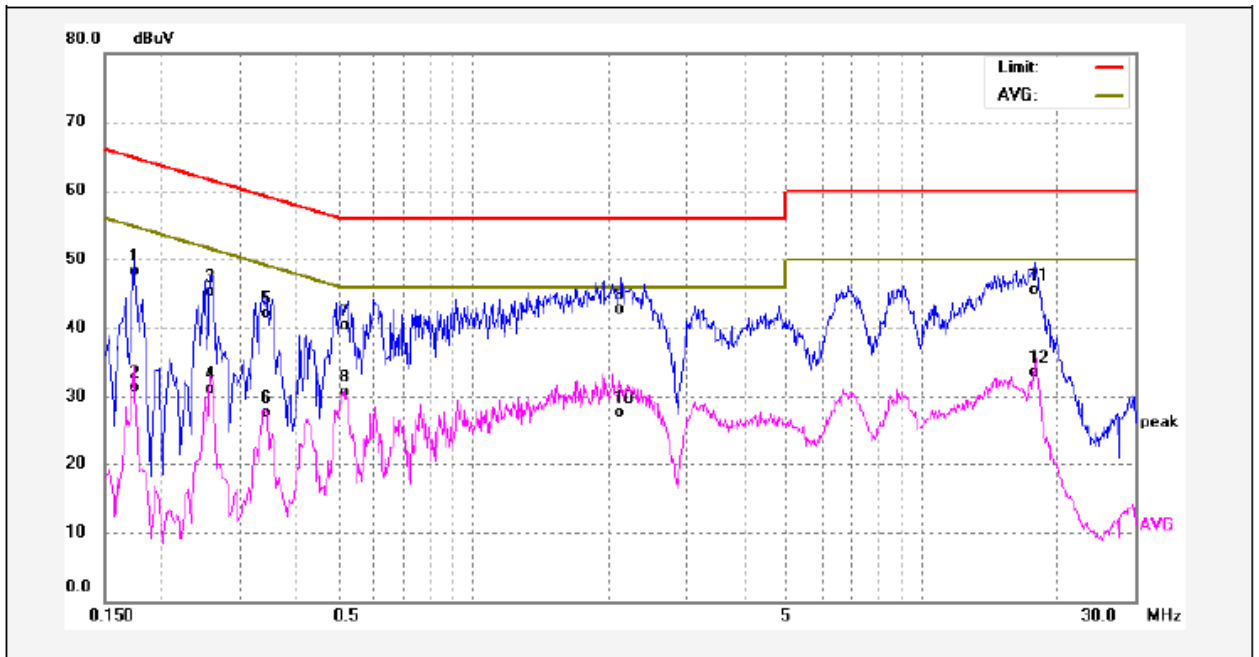

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1740	38.44	9.78	48.22	64.76	-16.54	QP	
2	0.1740	21.59	9.78	31.37	54.76	-23.39	AVG	
3	0.2580	35.55	9.77	45.32	61.49	-16.17	QP	
4	0.2580	21.35	9.77	31.12	51.49	-20.37	AVG	
5	0.3480	32.30	9.80	42.10	59.01	-16.91	QP	
6	0.3480	17.98	9.80	27.78	49.01	-21.23	AVG	
7	0.5140	30.55	9.81	40.36	56.00	-15.64	QP	
8	0.5140	20.85	9.81	30.66	46.00	-15.34	AVG	
9	2.1199	32.69	9.96	42.65	56.00	-13.35	QP	
10	2.1199	17.67	9.96	27.63	46.00	-18.37	AVG	
11	17.8736	35.31	10.23	45.54	60.00	-14.46	QP	
12	17.8736	23.31	10.23	33.54	50.00	-16.46	AVG	

## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa

EUT Operation :


The test was performed in TX transmitting mode, the test data were shown in the report.




## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

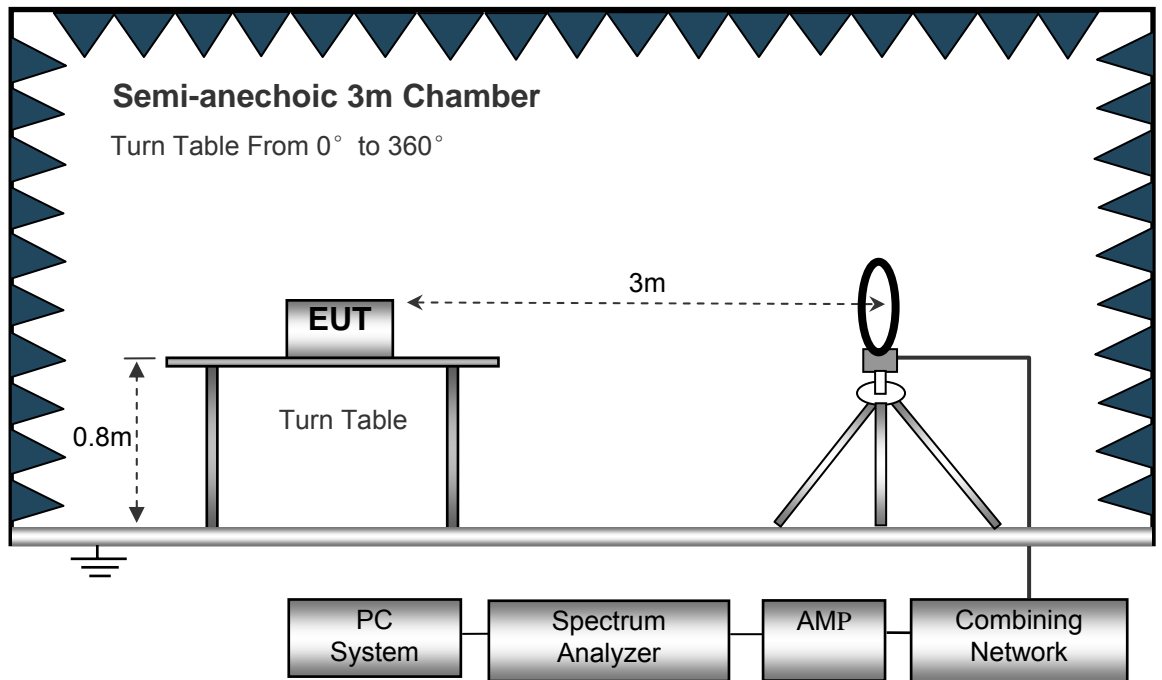

The test setup for emission measurement from 30 MHz to 1 GHz.

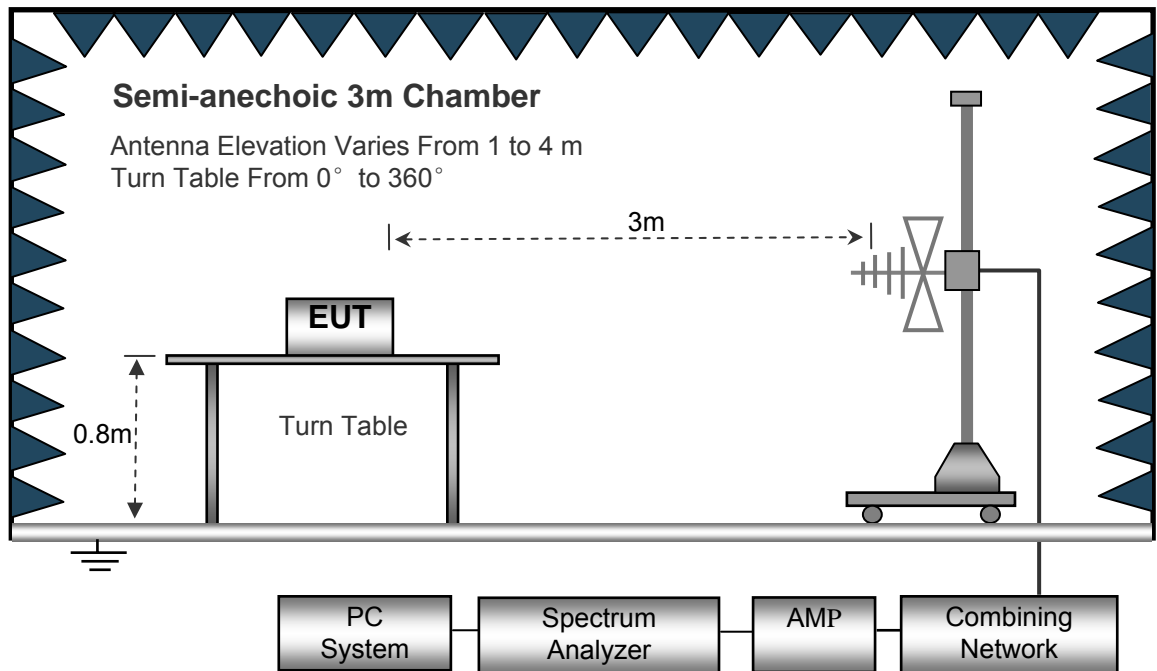

The test setup for emission measurement above 1 GHz.

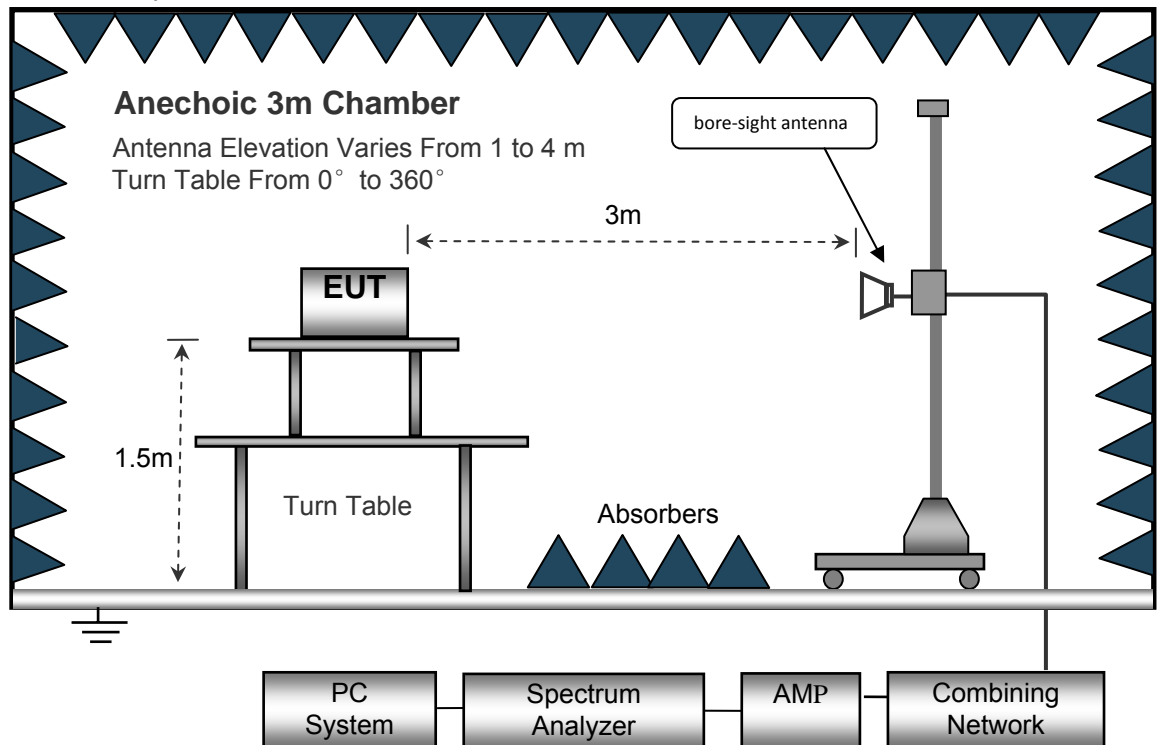

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.37	QP	21.84	40.00	7.21	29.54	-22.33
15.730	24.56	QP	21.35	40.00	5.91	29.54	-23.63
25.680	24.98	QP	20.67	40.00	5.65	29.54	-23.89
802.11g							
6.021	25.22	QP	21.84	40.00	7.06	29.54	-22.48
15.730	24.57	QP	21.35	40.00	5.92	29.54	-23.62
25.680	25.19	QP	20.67	40.00	5.86	29.54	-23.68
802.11n(HT20)							
6.021	25.41	QP	21.84	40.00	7.25	29.54	-22.29
15.730	24.58	QP	21.35	40.00	5.93	29.54	-23.61
25.680	25.36	QP	20.67	40.00	6.03	29.54	-23.51
802.11n(HT40)							
6.021	25.06	QP	21.84	40.00	6.90	29.54	-22.64
15.730	24.89	QP	21.35	40.00	6.24	29.54	-23.30
25.680	25.33	QP	20.67	40.00	6.00	29.54	-23.54

**Test Frequency : 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	39.79	QP	221	1.8	H	-11.62	28.17	46.00	-17.83
223.45	35.98	QP	148	1.8	V	-11.62	24.36	46.00	-21.64
4824.00	51.58	PK	349	1.4	V	-1.06	50.52	74.00	-23.48
4824.00	47.54	Ave	349	1.4	V	-1.06	46.48	54.00	-7.52
7236.00	41.49	PK	130	1.1	H	1.33	42.82	74.00	-31.18
7236.00	42.53	Ave	130	1.1	H	1.33	43.86	54.00	-10.14
2310.89	46.34	PK	32	1.8	V	-13.19	33.15	74.00	-40.85
2310.89	38.06	Ave	32	1.8	V	-13.19	24.87	54.00	-29.13
2351.02	44.62	PK	163	1.6	H	-13.14	31.48	74.00	-42.52
2351.02	38.37	Ave	163	1.6	H	-13.14	25.23	54.00	-28.77
2497.46	44.39	PK	242	1.9	V	-13.08	31.31	74.00	-42.69
2497.46	37.24	Ave	242	1.9	V	-13.08	24.16	54.00	-29.84

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	39.19	QP	154	1.0	H	-11.62	27.57	46.00	-18.43
223.45	36.32	QP	277	1.9	V	-11.62	24.70	46.00	-21.30
4874.00	52.56	PK	80	1.2	V	-0.62	51.94	74.00	-22.06
4874.00	48.49	Ave	80	1.2	V	-0.62	47.87	54.00	-6.13
7311.00	41.63	PK	249	1.6	H	2.21	43.84	74.00	-30.16
7311.00	43.73	Ave	249	1.6	H	2.21	45.94	54.00	-8.06
2318.60	45.27	PK	311	1.4	V	-13.19	32.08	74.00	-41.92
2318.60	39.98	Ave	311	1.4	V	-13.19	26.79	54.00	-27.21
2367.90	44.26	PK	173	1.6	H	-13.14	31.12	74.00	-42.88
2367.90	38.49	Ave	173	1.6	H	-13.14	25.35	54.00	-28.65
2495.44	43.08	PK	46	1.8	V	-13.08	30.00	74.00	-44.00
2495.44	37.25	Ave	46	1.8	V	-13.08	24.17	54.00	-29.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
223.45	38.19	QP	170	1.9	H	-11.62	26.57	46.00	-19.43
223.45	36.01	QP	296	1.9	V	-11.62	24.39	46.00	-21.61
4924.00	53.99	PK	111	1.5	V	-0.24	53.75	74.00	-20.25
4924.00	47.22	Ave	111	1.5	V	-0.24	46.98	54.00	-7.02
7386.00	41.20	PK	108	1.0	H	2.84	44.04	74.00	-29.96
7386.00	45.00	Ave	108	1.0	H	2.84	47.84	54.00	-6.16
2338.46	46.59	PK	110	1.7	V	-13.19	33.40	74.00	-40.60
2338.46	38.45	Ave	110	1.7	V	-13.19	25.26	54.00	-28.74
2373.18	44.03	PK	314	1.8	H	-13.14	30.89	74.00	-43.11
2373.18	38.23	Ave	314	1.8	H	-13.14	25.09	54.00	-28.91
2495.52	44.60	PK	144	1.3	V	-13.08	31.52	74.00	-42.48
2495.52	37.30	Ave	144	1.3	V	-13.08	24.22	54.00	-29.78

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	37.72	QP	9	1.1	H	-11.62	26.10	46.00	-19.90
223.45	35.04	QP	150	1.3	V	-11.62	23.42	46.00	-22.58
4824.00	54.07	PK	38	1.1	V	-1.06	53.01	74.00	-20.99
4824.00	46.15	Ave	38	1.1	V	-1.06	45.09	54.00	-8.91
7236.00	41.00	PK	252	1.1	H	1.33	42.33	74.00	-31.67
7236.00	45.74	Ave	252	1.1	H	1.33	47.07	54.00	-6.93
2322.65	45.24	PK	114	1.2	V	-13.19	32.05	74.00	-41.95
2322.65	38.10	Ave	114	1.2	V	-13.19	24.91	54.00	-29.09
2353.98	43.37	PK	153	1.2	H	-13.14	30.23	74.00	-43.77
2353.98	36.78	Ave	153	1.2	H	-13.14	23.64	54.00	-30.36
2497.24	43.46	PK	33	1.1	V	-13.08	30.38	74.00	-43.62
2497.24	36.09	Ave	33	1.1	V	-13.08	23.01	54.00	-30.99



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	37.34	QP	302	1.8	H	-11.62	25.72	46.00	-20.28
223.45	35.38	QP	50	1.1	V	-11.62	23.76	46.00	-22.24
4874.00	52.75	PK	232	1.5	V	-0.62	52.13	74.00	-21.87
4874.00	46.40	Ave	232	1.5	V	-0.62	45.78	54.00	-8.22
7311.00	42.42	PK	326	1.0	H	2.21	44.63	74.00	-29.37
7311.00	45.50	Ave	326	1.0	H	2.21	47.71	54.00	-6.29
2345.29	46.93	PK	228	1.6	V	-13.19	33.74	74.00	-40.26
2345.29	38.79	Ave	228	1.6	V	-13.19	25.60	54.00	-28.40
2368.61	43.98	PK	99	1.8	H	-13.14	30.84	74.00	-43.16
2368.61	37.86	Ave	99	1.8	H	-13.14	24.72	54.00	-29.28
2492.85	42.06	PK	349	1.4	V	-13.08	28.98	74.00	-45.02
2492.85	37.58	Ave	349	1.4	V	-13.08	24.50	54.00	-29.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	36.85	QP	82	1.3	H	-11.62	25.23	46.00	-20.77
223.45	34.42	QP	335	1.4	V	-11.62	22.80	46.00	-23.20
4924.00	52.85	PK	233	1.9	V	-0.24	52.61	74.00	-21.39
4924.00	47.77	Ave	233	1.9	V	-0.24	47.53	54.00	-6.47
7386.00	43.01	PK	53	1.6	H	2.84	45.85	74.00	-28.15
7386.00	44.52	Ave	53	1.6	H	2.84	47.36	54.00	-6.64
2326.45	45.22	PK	57	1.2	V	-13.19	32.03	74.00	-41.97
2326.45	39.28	Ave	57	1.2	V	-13.19	26.09	54.00	-27.91
2386.67	43.63	PK	336	2.0	H	-13.14	30.49	74.00	-43.51
2386.67	38.58	Ave	336	2.0	H	-13.14	25.44	54.00	-28.56
2493.50	42.84	PK	238	1.8	V	-13.08	29.76	74.00	-44.24
2493.50	37.01	Ave	238	1.8	V	-13.08	23.93	54.00	-30.07

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	37.66	QP	139	1.2	H	-11.62	26.04	46.00	-19.96
223.45	33.91	QP	325	1.7	V	-11.62	22.29	46.00	-23.71
4824.00	53.49	PK	80	1.3	V	-1.06	52.43	74.00	-21.57
4824.00	47.59	Ave	80	1.3	V	-1.06	46.53	54.00	-7.47
7236.00	43.77	PK	12	1.3	H	1.33	45.10	74.00	-28.90
7236.00	45.56	Ave	12	1.3	H	1.33	46.89	54.00	-7.11
2324.40	45.93	PK	33	1.2	V	-13.19	32.74	74.00	-41.26
2324.40	37.85	Ave	33	1.2	V	-13.19	24.66	54.00	-29.34
2378.07	42.17	PK	208	1.3	H	-13.14	29.03	74.00	-44.97
2378.07	37.55	Ave	208	1.3	H	-13.14	24.41	54.00	-29.59
2498.79	44.30	PK	209	1.1	V	-13.08	31.22	74.00	-42.78
2498.79	37.83	Ave	209	1.1	V	-13.08	24.75	54.00	-29.25

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	37.18	QP	360	1.8	H	-11.62	25.56	46.00	-20.44
223.45	34.71	QP	281	1.7	V	-11.62	23.09	46.00	-22.91
4874.00	52.88	PK	116	1.3	V	-0.62	52.26	74.00	-21.74
4874.00	48.01	Ave	116	1.3	V	-0.62	47.39	54.00	-6.61
7311.00	44.31	PK	225	1.9	H	2.21	46.52	74.00	-27.48
7311.00	44.16	Ave	225	1.9	H	2.21	46.37	54.00	-7.63
2316.40	45.09	PK	225	1.8	V	-13.19	31.90	74.00	-42.10
2316.40	39.59	Ave	225	1.8	V	-13.19	26.40	54.00	-27.60
2386.77	44.61	PK	219	1.3	H	-13.14	31.47	74.00	-42.53
2386.77	36.79	Ave	219	1.3	H	-13.14	23.65	54.00	-30.35
2493.70	42.88	PK	0	1.5	V	-13.08	29.80	74.00	-44.20
2493.70	38.41	Ave	0	1.5	V	-13.08	25.33	54.00	-28.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.45	36.12	QP	342	1.5	H	-11.62	24.50	46.00	-21.50
223.45	35.92	QP	68	1.5	V	-11.62	24.30	46.00	-21.70
4924.00	53.22	PK	233	1.7	V	-0.24	52.98	74.00	-21.02
4924.00	47.93	Ave	233	1.7	V	-0.24	47.69	54.00	-6.31
7386.00	43.64	PK	124	1.9	H	2.84	46.48	74.00	-27.52
7386.00	44.06	Ave	124	1.9	H	2.84	46.90	54.00	-7.10
2348.75	46.23	PK	330	1.3	V	-13.19	33.04	74.00	-40.96
2348.75	39.62	Ave	330	1.3	V	-13.19	26.43	54.00	-27.57
2379.07	44.90	PK	181	1.3	H	-13.14	31.76	74.00	-42.24
2379.07	36.17	Ave	181	1.3	H	-13.14	23.03	54.00	-30.97
2497.74	42.30	PK	172	1.5	V	-13.08	29.22	74.00	-44.78
2497.74	37.23	Ave	172	1.5	V	-13.08	24.15	54.00	-29.85

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	36.80	QP	358	2.0	H	-11.62	25.18	46.00	-20.82
223.45	36.36	QP	115	1.1	V	-11.62	24.74	46.00	-21.26
4844.00	52.22	PK	170	1.0	V	-1.06	51.16	74.00	-22.84
4844.00	45.98	Ave	170	1.0	V	-1.06	44.92	54.00	-9.08
7266.00	42.12	PK	33	1.6	H	1.33	43.45	74.00	-30.55
7266.00	41.69	Ave	33	1.6	H	1.33	43.02	54.00	-10.98
2343.76	46.45	PK	354	1.1	V	-13.19	33.26	74.00	-40.74
2343.76	39.66	Ave	354	1.1	V	-13.19	26.47	54.00	-27.53
2350.07	44.81	PK	41	1.1	H	-13.14	31.67	74.00	-42.33
2350.07	36.98	Ave	41	1.1	H	-13.14	23.84	54.00	-30.16
2487.74	43.44	PK	277	1.8	V	-13.08	30.36	74.00	-43.64
2487.74	37.70	Ave	277	1.8	V	-13.08	24.62	54.00	-29.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	36.29	QP	281	1.8	H	-11.62	24.67	46.00	-21.33
223.45	35.54	QP	18	1.8	V	-11.62	23.92	46.00	-22.08
4874.00	52.76	PK	105	1.2	V	-0.62	52.14	74.00	-21.86
4874.00	46.53	Ave	105	1.2	V	-0.62	45.91	54.00	-8.09
7311.00	41.59	PK	8	1.1	H	2.21	43.80	74.00	-30.20
7311.00	42.16	Ave	8	1.1	H	2.21	44.37	54.00	-9.63
2332.81	46.48	PK	146	2.0	V	-13.19	33.29	74.00	-40.71
2332.81	37.61	Ave	146	2.0	V	-13.19	24.42	54.00	-29.58
2389.28	42.41	PK	54	1.7	H	-13.14	29.27	74.00	-44.73
2389.28	36.60	Ave	54	1.7	H	-13.14	23.46	54.00	-30.54
2490.80	44.42	PK	103	1.4	V	-13.08	31.34	74.00	-42.66
2490.80	37.97	Ave	103	1.4	V	-13.08	24.89	54.00	-29.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.45	36.90	QP	355	1.9	H	-11.62	25.28	46.00	-20.72
223.45	36.06	QP	52	1.7	V	-11.62	24.44	46.00	-21.56
4904.00	53.47	PK	131	1.1	V	-0.24	53.23	74.00	-20.77
4904.00	46.53	Ave	131	1.1	V	-0.24	46.29	54.00	-7.71
7356.00	41.88	PK	137	1.9	H	2.84	44.72	74.00	-29.28
7356.00	42.17	Ave	137	1.9	H	2.84	45.01	54.00	-8.99
2338.65	46.85	PK	100	1.2	V	-13.19	33.66	74.00	-40.34
2338.65	39.05	Ave	100	1.2	V	-13.19	25.86	54.00	-28.14
2387.97	44.52	PK	324	1.1	H	-13.14	31.38	74.00	-42.62
2387.97	37.21	Ave	324	1.1	H	-13.14	24.07	54.00	-29.93
2498.70	42.42	PK	279	1.4	V	-13.08	29.34	74.00	-44.66
2498.70	36.34	Ave	279	1.4	V	-13.08	23.26	54.00	-30.74

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.



**BT BLE:****Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.021	25.47	QP	21.84	40.00	7.31	29.54	-22.23
15.730	24.50	QP	21.35	40.00	5.85	29.54	-23.69
25.680	24.68	QP	20.67	40.00	5.35	29.54	-24.19

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.33	34.59	QP	329	1.6	H	-13.35	21.24	46.00	-24.76
269.33	40.74	QP	339	1.5	V	-13.35	27.39	46.00	-18.61
4804.00	44.79	PK	161	1.2	V	-1.06	43.73	74.00	-30.27
4804.00	42.28	Ave	161	1.2	V	-1.06	41.22	54.00	-12.78
7206.00	44.47	PK	110	1.7	H	1.33	45.80	74.00	-28.20
7206.00	36.28	Ave	110	1.7	H	1.33	37.61	54.00	-16.39
2319.53	46.45	PK	95	2.0	V	-13.19	33.26	74.00	-40.74
2319.53	38.89	Ave	95	2.0	V	-13.19	25.70	54.00	-28.30
2381.54	43.97	PK	334	1.8	H	-13.14	30.83	74.00	-43.17
2381.54	36.32	Ave	334	1.8	H	-13.14	23.18	54.00	-30.82
2484.45	44.00	PK	329	1.0	V	-13.08	30.92	74.00	-43.08
2484.45	37.41	Ave	329	1.0	V	-13.08	24.33	54.00	-29.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.33	34.71	QP	61	1.7	H	-13.35	21.36	46.00	-24.64
269.33	39.89	QP	115	1.6	V	-13.35	26.54	46.00	-19.46
4880.00	43.46	PK	1	1.8	V	-0.62	42.84	74.00	-31.16
4880.00	41.86	Ave	1	1.8	V	-0.62	41.24	54.00	-12.76
7320.00	45.00	PK	9	1.6	H	2.21	47.21	74.00	-26.79
7320.00	35.75	Ave	9	1.6	H	2.21	37.96	54.00	-16.04
2344.32	46.35	PK	61	1.6	V	-13.19	33.16	74.00	-40.84
2344.32	38.14	Ave	61	1.6	V	-13.19	24.95	54.00	-29.05
2367.87	43.81	PK	111	1.4	H	-13.14	30.67	74.00	-43.33
2367.87	38.61	Ave	111	1.4	H	-13.14	25.47	54.00	-28.53
2494.59	42.67	PK	36	1.4	V	-13.08	29.59	74.00	-44.41
2494.59	38.81	Ave	36	1.4	V	-13.08	25.73	54.00	-28.27

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
269.33	33.93	QP	163	1.5	H	-13.35	20.58	46.00	-25.42
269.33	38.46	QP	8	1.1	V	-13.35	25.11	46.00	-20.89
4960.00	44.70	PK	289	1.6	V	-0.24	44.46	74.00	-29.54
4960.00	41.30	Ave	289	1.6	V	-0.24	41.06	54.00	-12.94
7440.00	43.55	PK	315	1.4	H	2.84	46.39	74.00	-27.61
7440.00	36.29	Ave	315	1.4	H	2.84	39.13	54.00	-14.87
2323.03	46.05	PK	192	1.5	V	-13.19	32.86	74.00	-41.14
2323.03	39.47	Ave	192	1.5	V	-13.19	26.28	54.00	-27.72
2367.40	43.78	PK	247	1.7	H	-13.14	30.64	74.00	-43.36
2367.40	37.27	Ave	247	1.7	H	-13.14	24.13	54.00	-29.87
2490.41	43.28	PK	340	1.1	V	-13.08	30.20	74.00	-43.80
2490.41	38.48	Ave	340	1.1	V	-13.08	25.40	54.00	-28.60

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\approx 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\approx [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

### 9.2 Test Result


9KHz – 30MHz

802.11b


Low Channel

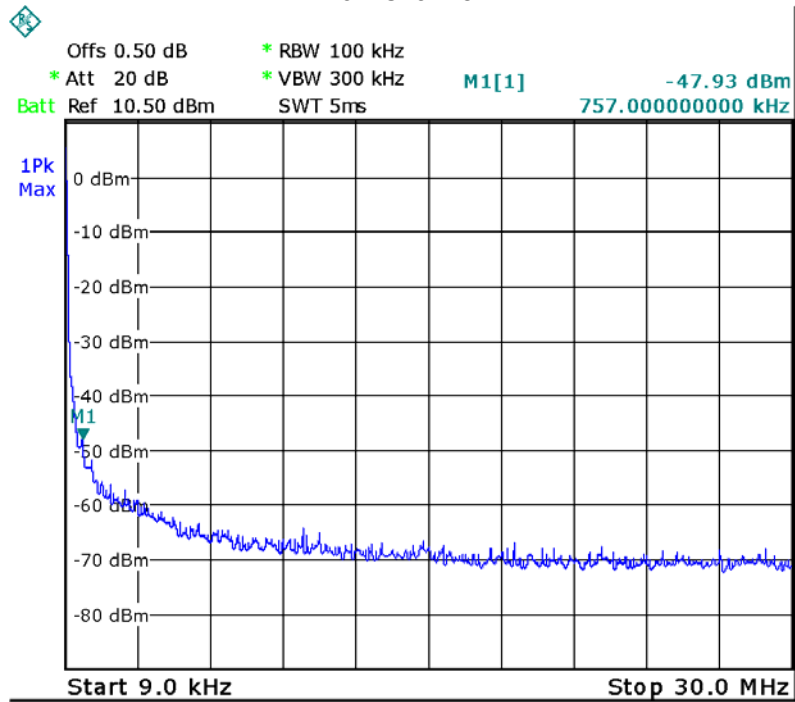

Middle Channel

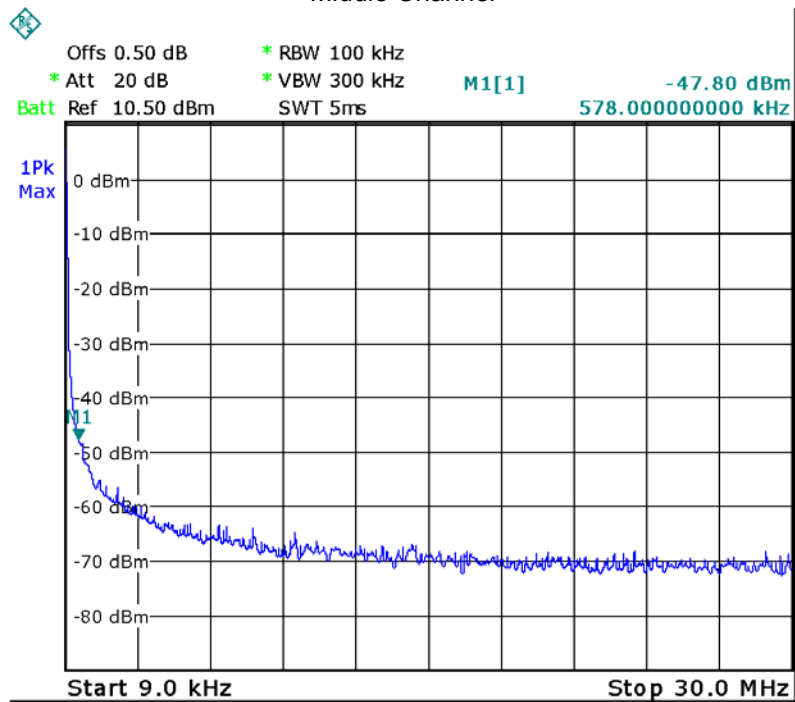


### High Channel

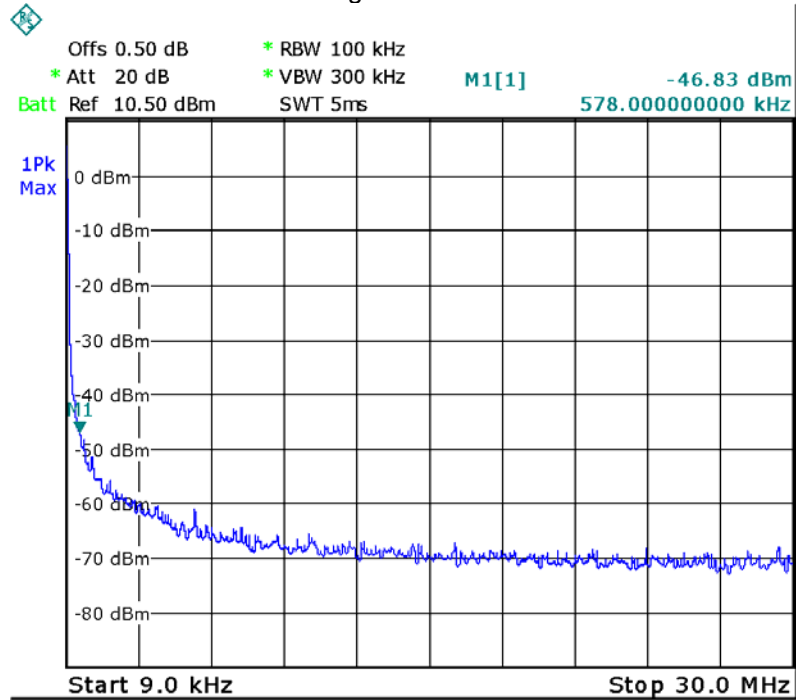


### 802.11g


### Low Channel

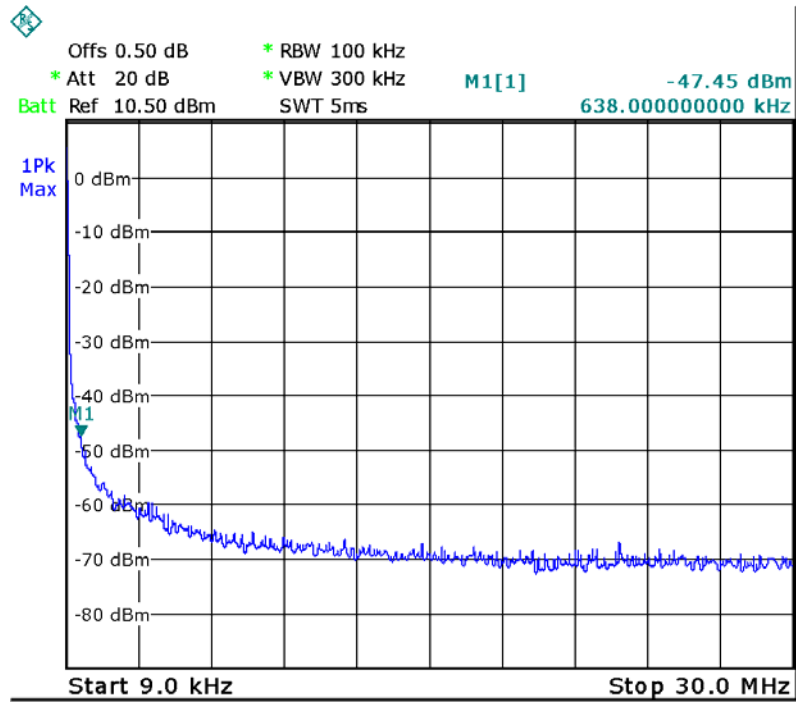

### Middle Channel

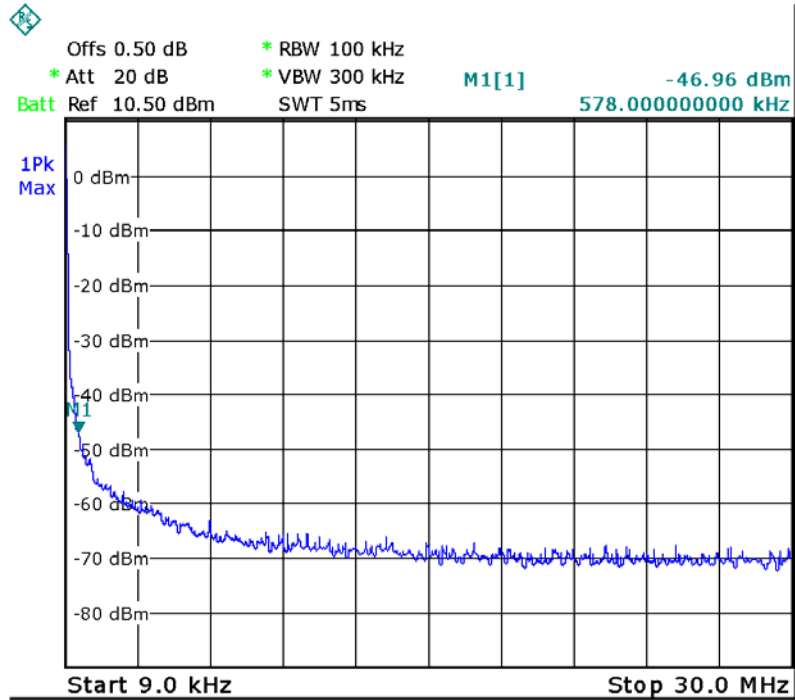


### High Channel

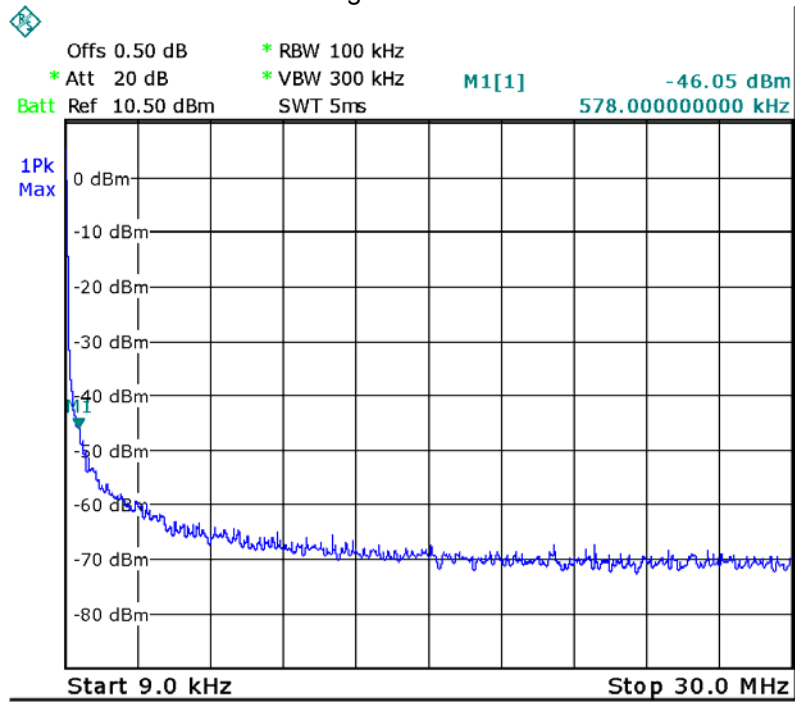


### 802.11n HT20

#### Low Channel

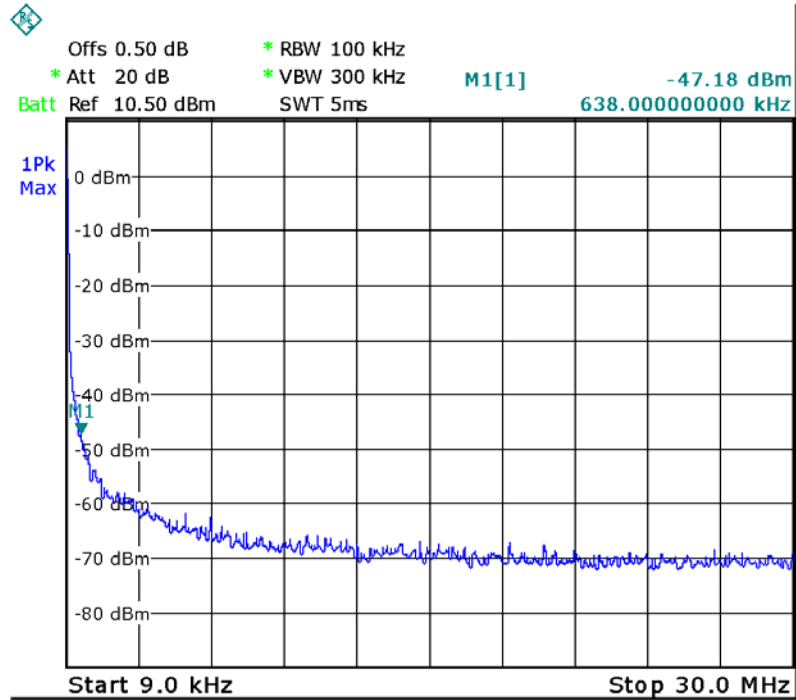


#### Middle Channel

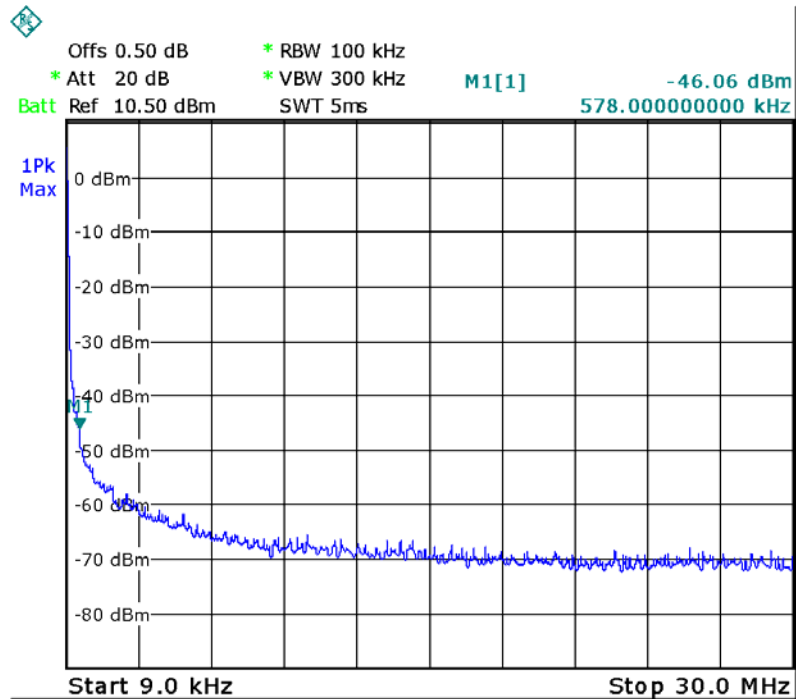






### High Channel

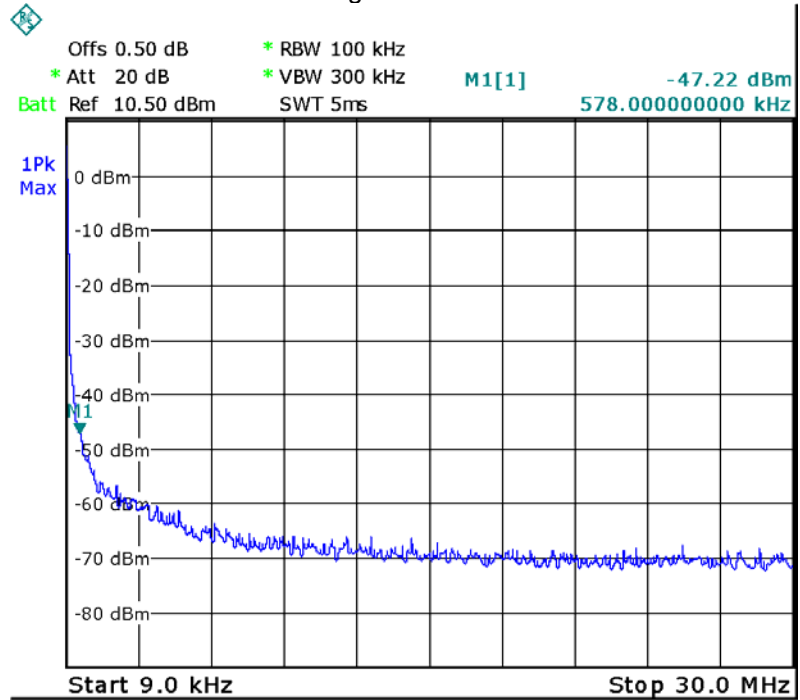


### 802.11n HT40

#### Low Channel

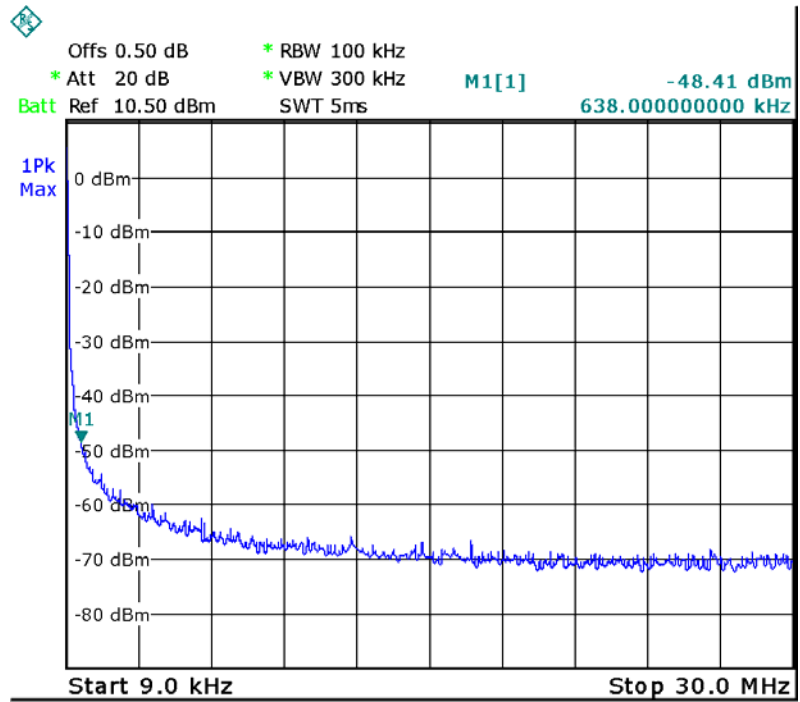


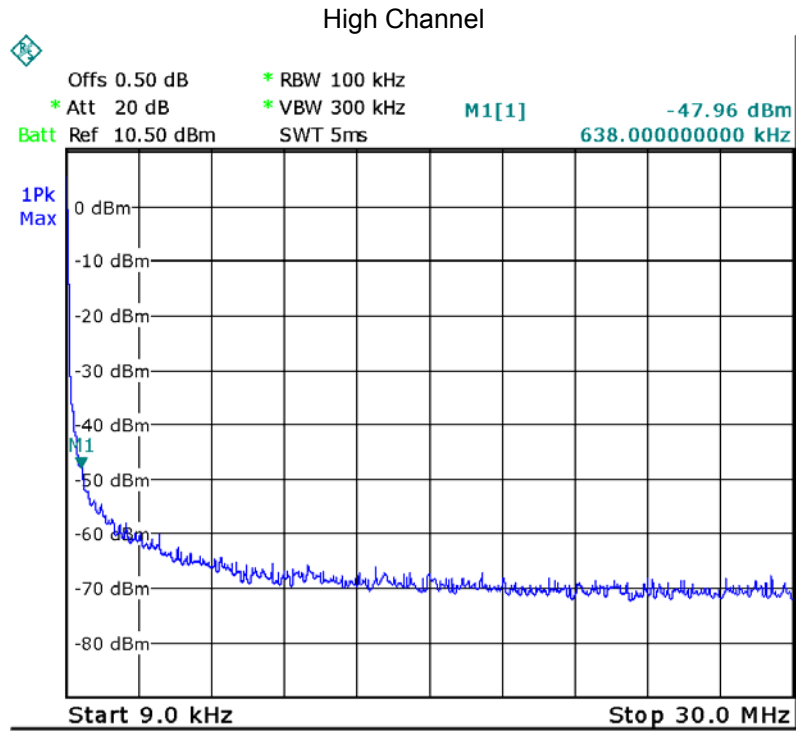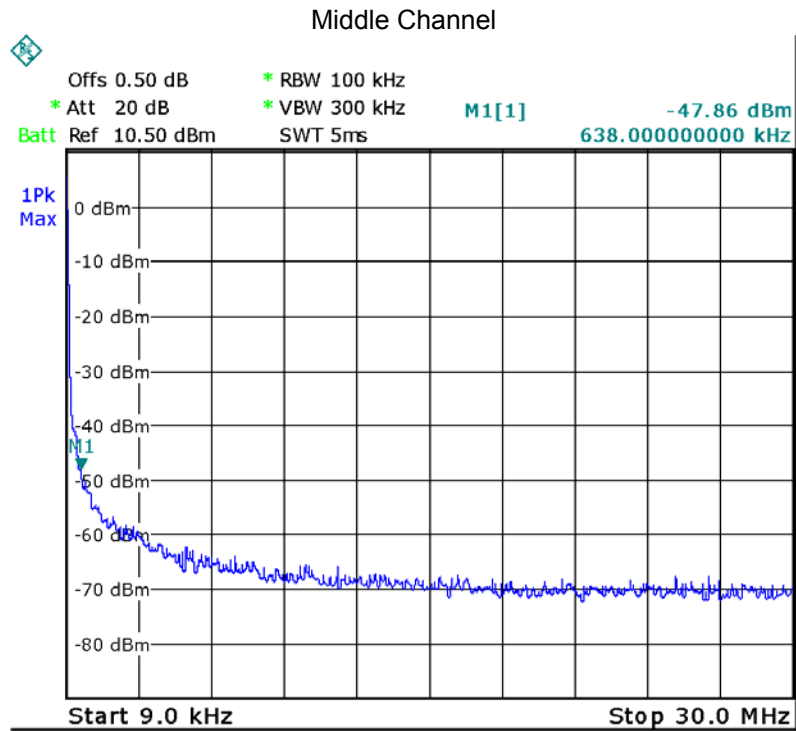


### BLE Low Channel

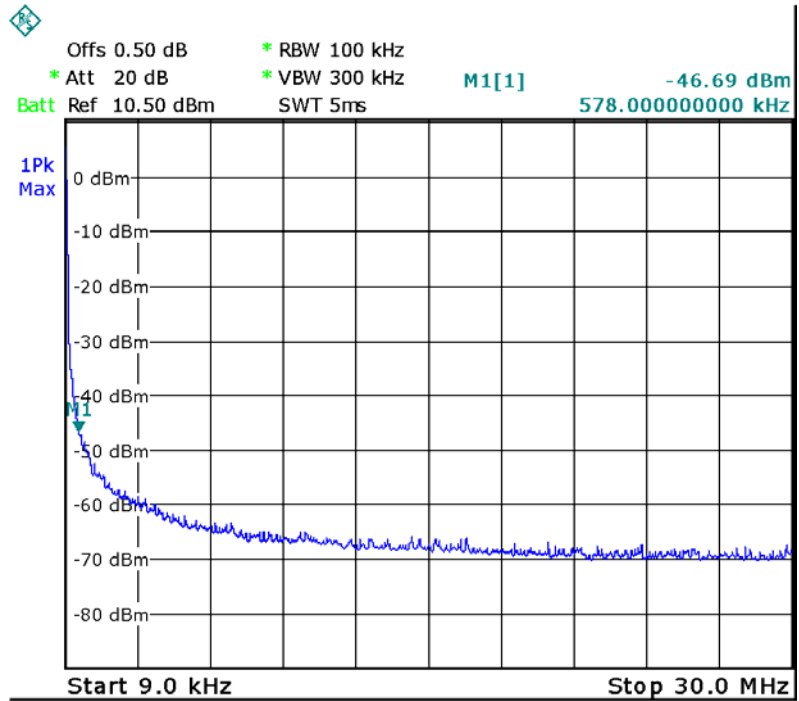

### Middle Channel

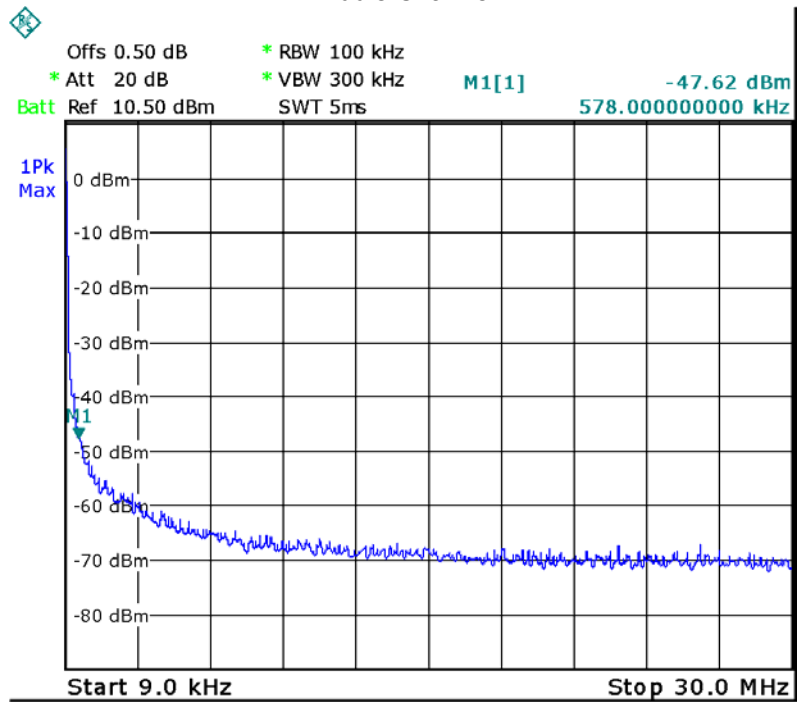

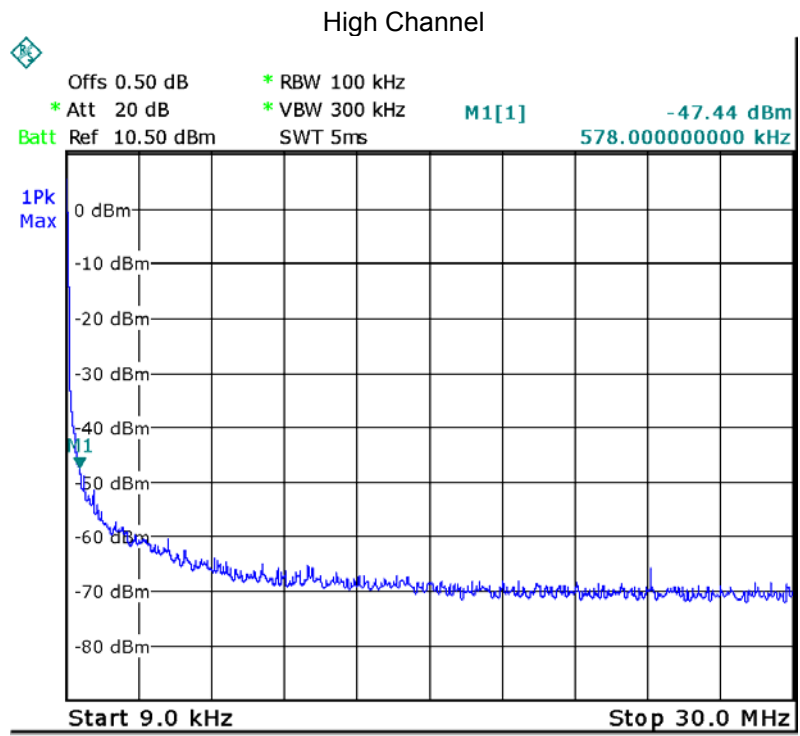


Above 30MHz

802.11b

Low Channel

Fundamental

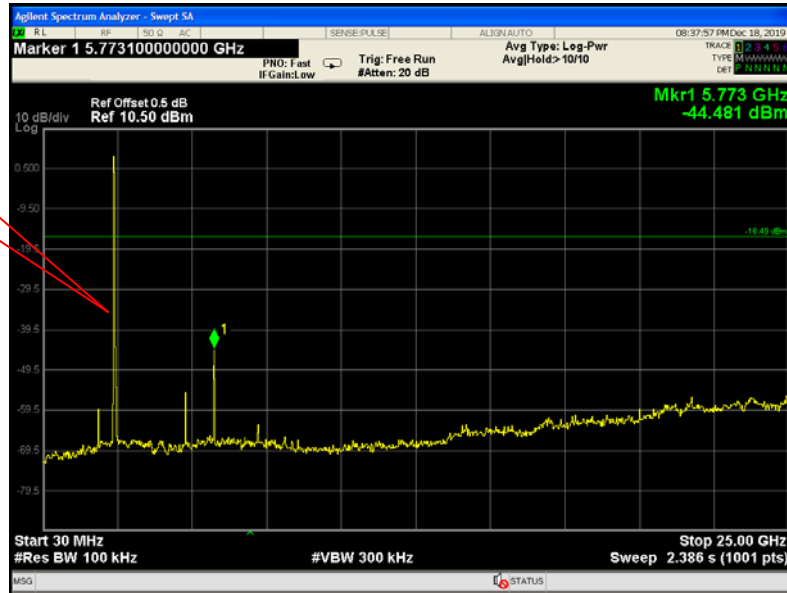

Middle Channel

Fundamental



### High Channel

Fundamental



### 802.11g

### Low Channel

Fundamental



### Middle Channel

Fundamental



### High Channel

Fundamental



802.11n HT20

Low Channel

Fundamental



Middle Channel

Fundamental





### High Channel

Fundamental



### 802.11n HT40


### Low Channel

Fundamental



### Middle Channel

Fundamental

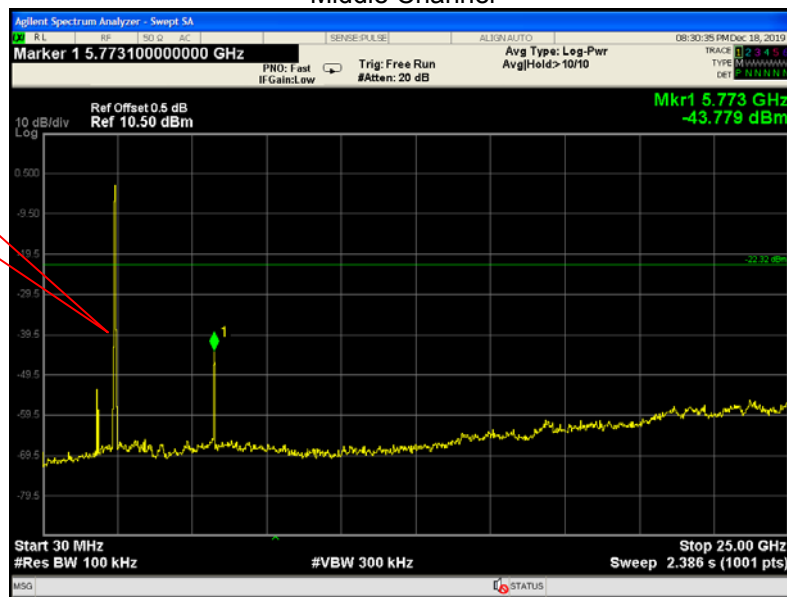

### High Channel

Fundamental




BLE  
Low Channel

Fundamental



Middle Channel

Fundamental

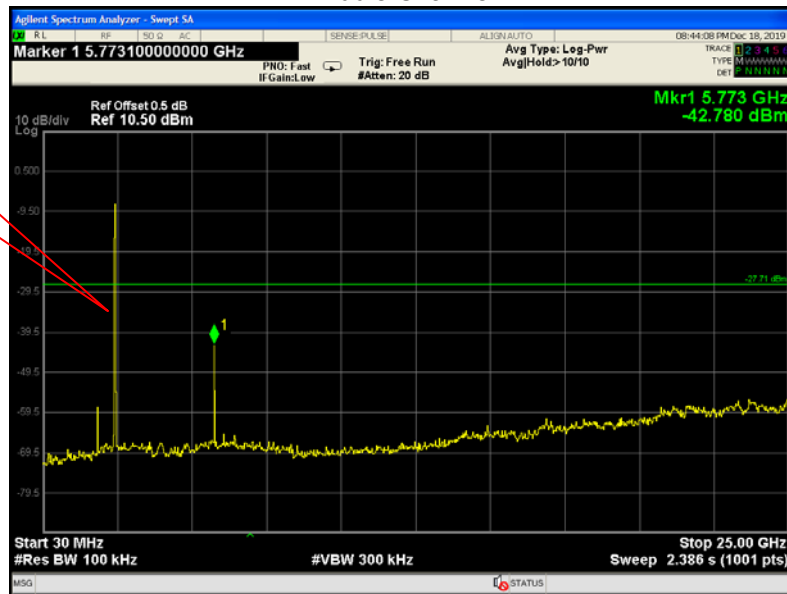

### High Channel

Fundamental



## 10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

### 10.1 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 10.2 Test Result

Test result plots shown as follows:


TX 11b: Band edge-left side



TX 11b: Band edge-right side




TX 11g: Band edge-left side

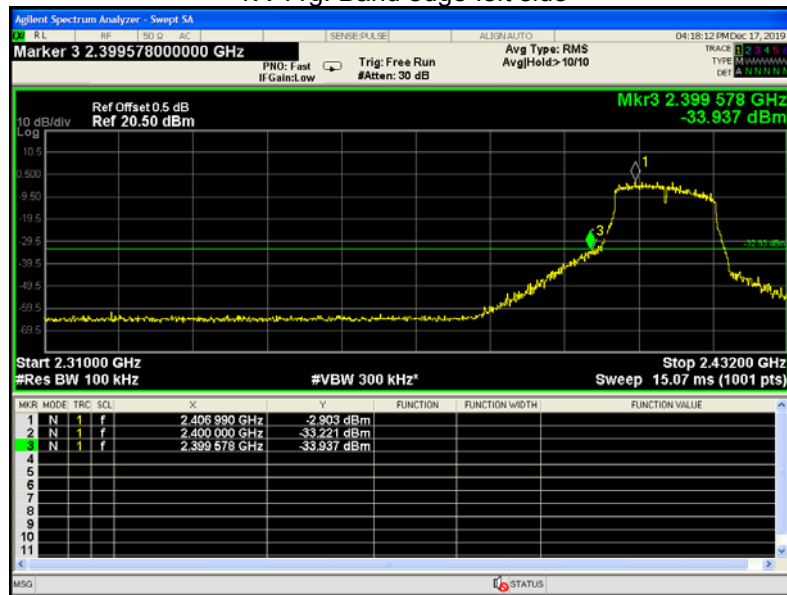

TX 11g: Band edge-right side



TX 11n HT20: Band edge-left side

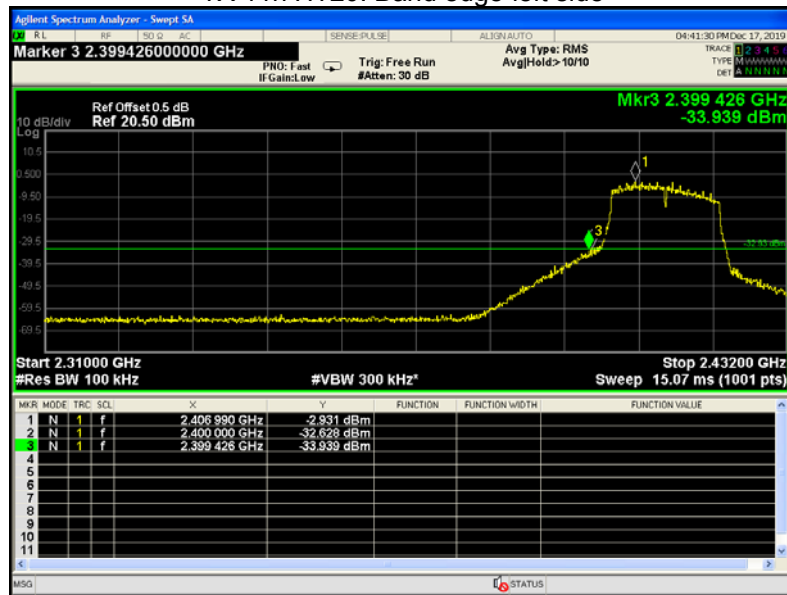

TX 11n HT20: Band edge-right side






TX 11n HT40: Band edge-left side




TX 11n HT40: Band edge-right side



BLE: Band edge-left side

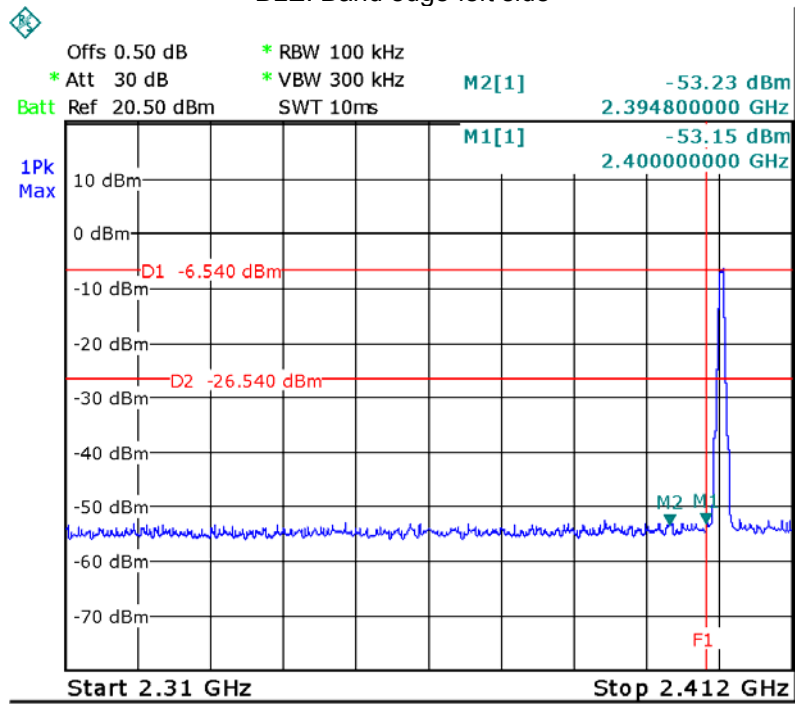

BLE: Band edge-right side

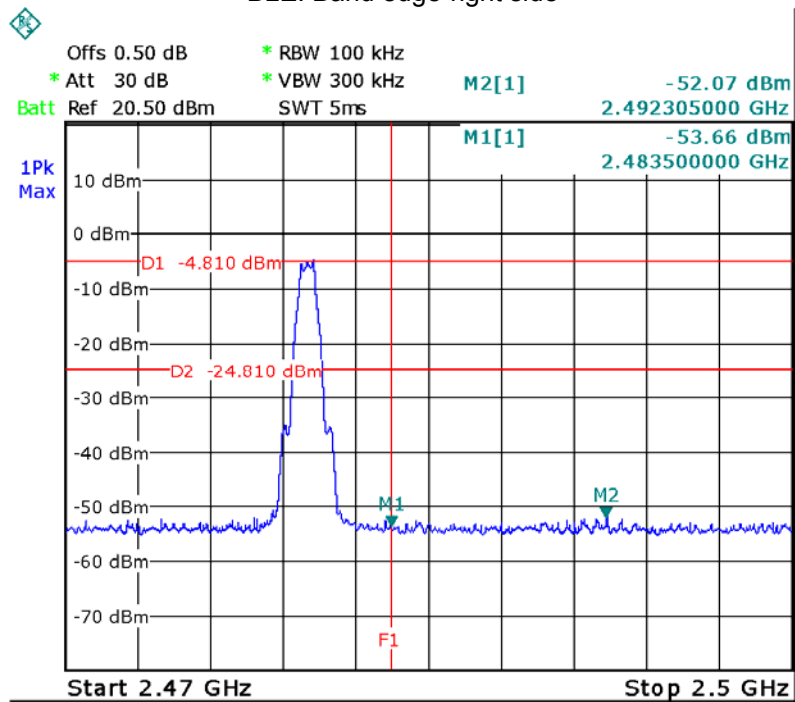

## 11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 11.2 Test Result:


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	8.088	12.828
	Channel 6	8.076	12.742
	Channel 11	9.026	13.179
TX 11g	Channel 1	15.700	16.332
	Channel 6	15.720	16.411
	Channel 11	15.760	16.447
TX 11n HT20	Channel 1	16.310	17.488
	Channel 6	16.340	17.513
	Channel 11	16.370	17.614
TX 11n HT40	Channel 3	36.130	36.234
	Channel 6	26.340	35.611
	Channel 9	18.820	35.095
BLE	Channel 0	0.671	1.060
	Channel 19	0.671	1.066
	Channel 39	0.671	1.060

Test result plot:


Mode: TX 11b channel 1

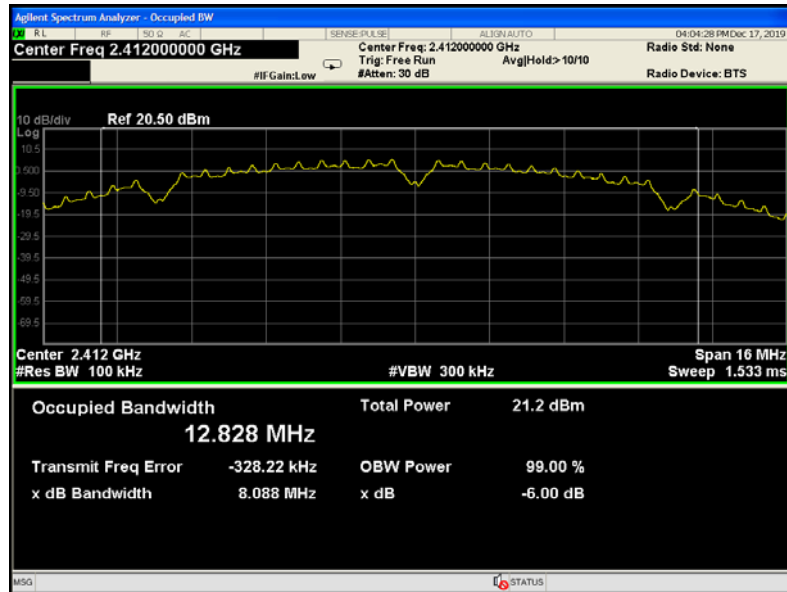


Mode: TX 11b channel 6

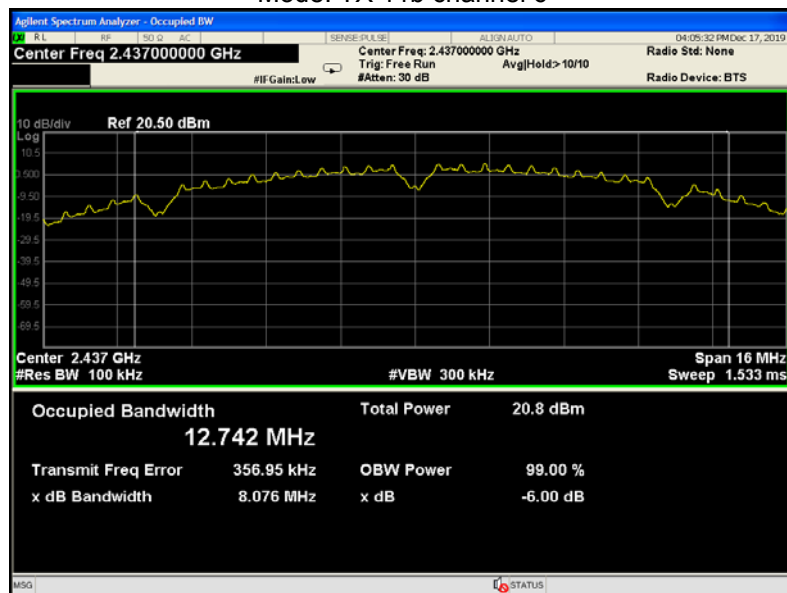


Mode: TX 11b channel 11

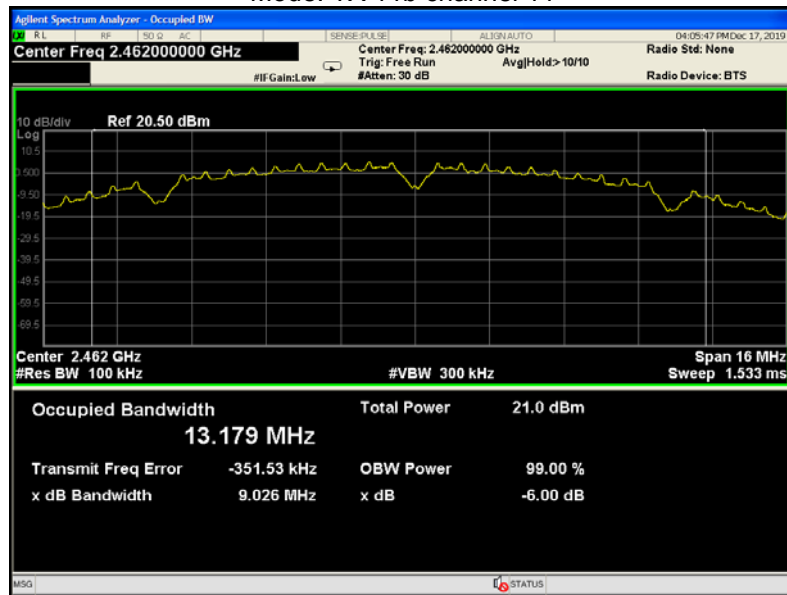


Mode: TX 11g channel 1

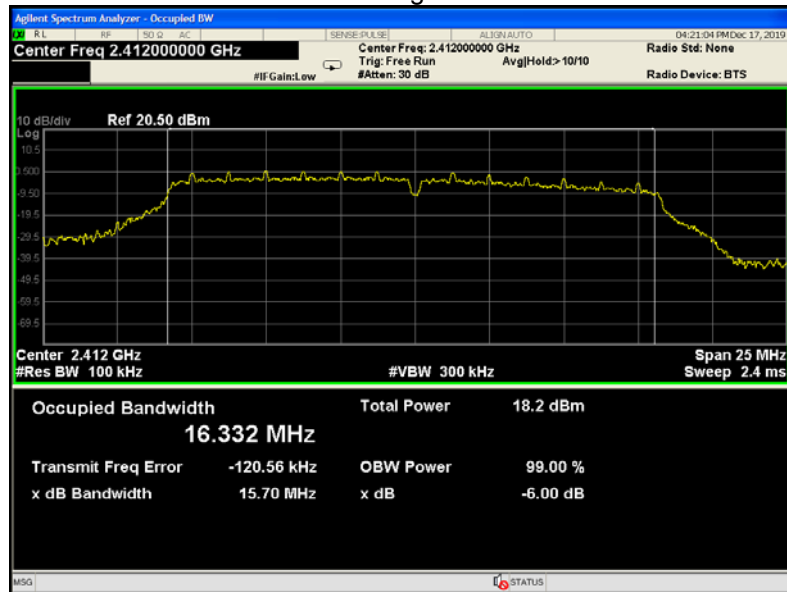


Mode: TX 11g channel 6

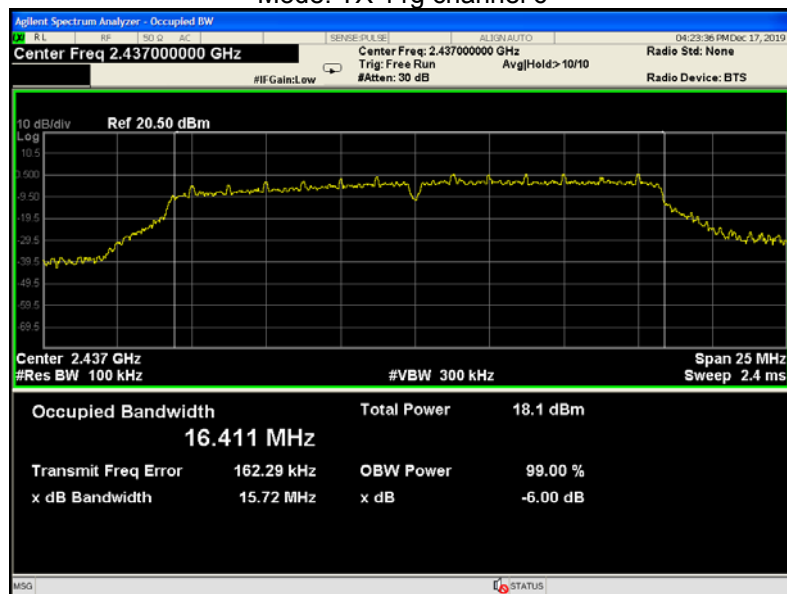


Mode: TX 11g channel 11

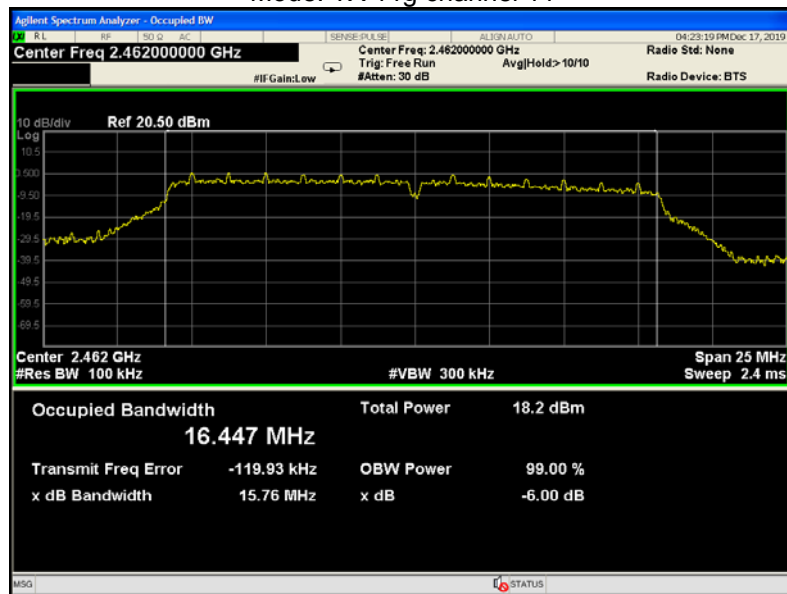


Mode: TX 11n HT20 channel 1

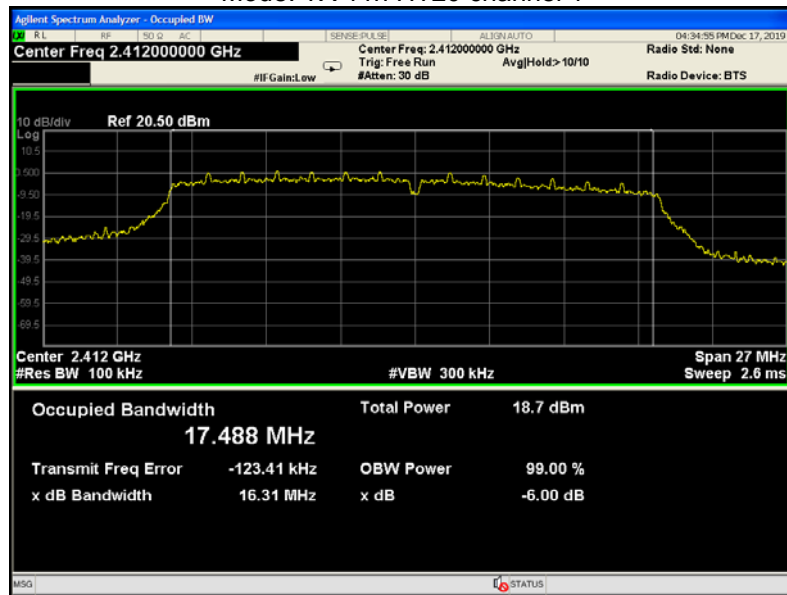


Mode: TX 11n HT20 channel 6

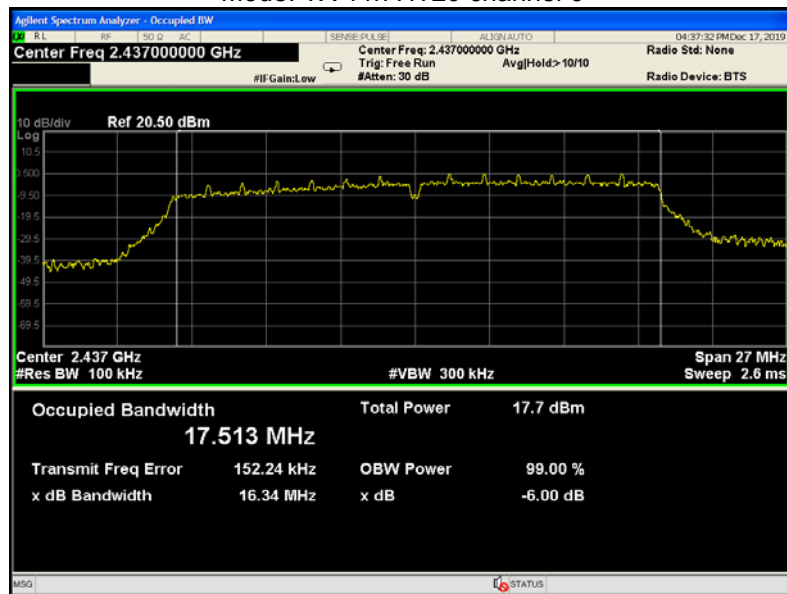

Mode: TX 11n HT20 channel 11

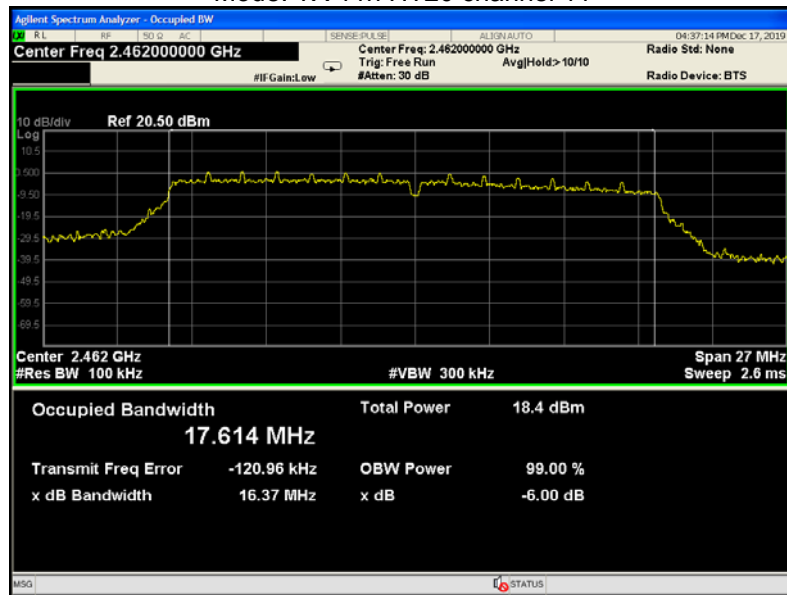


Mode: TX 11n HT40 channel 3

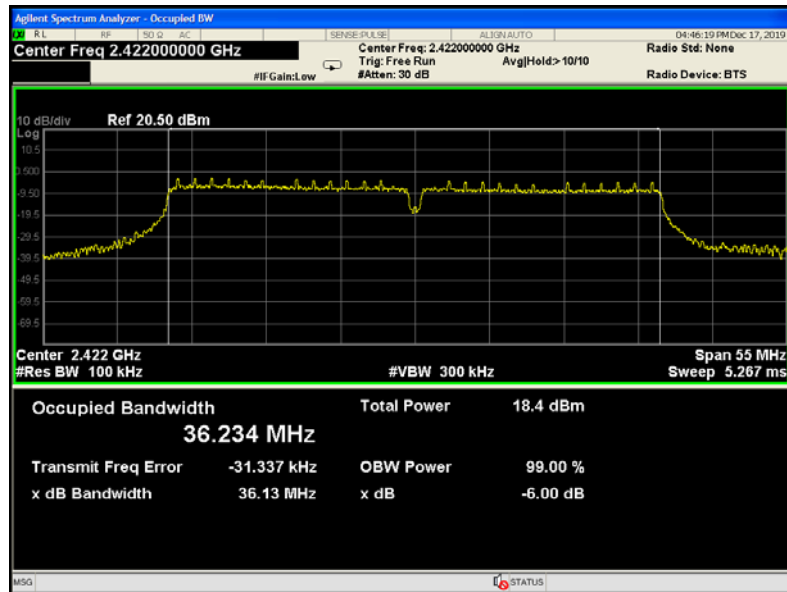





Mode: TX 11n HT40 channel 6

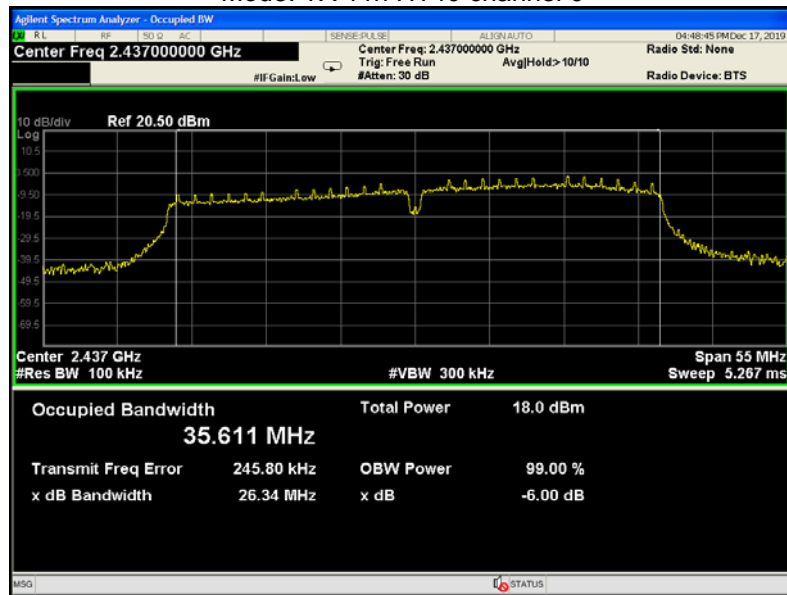


Mode: TX 11n HT40 channel 9

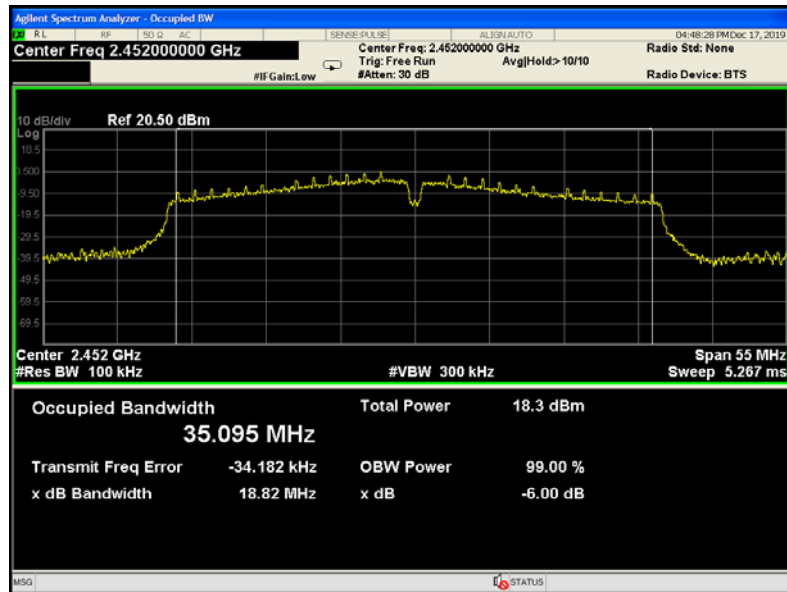


BLE: channel 0

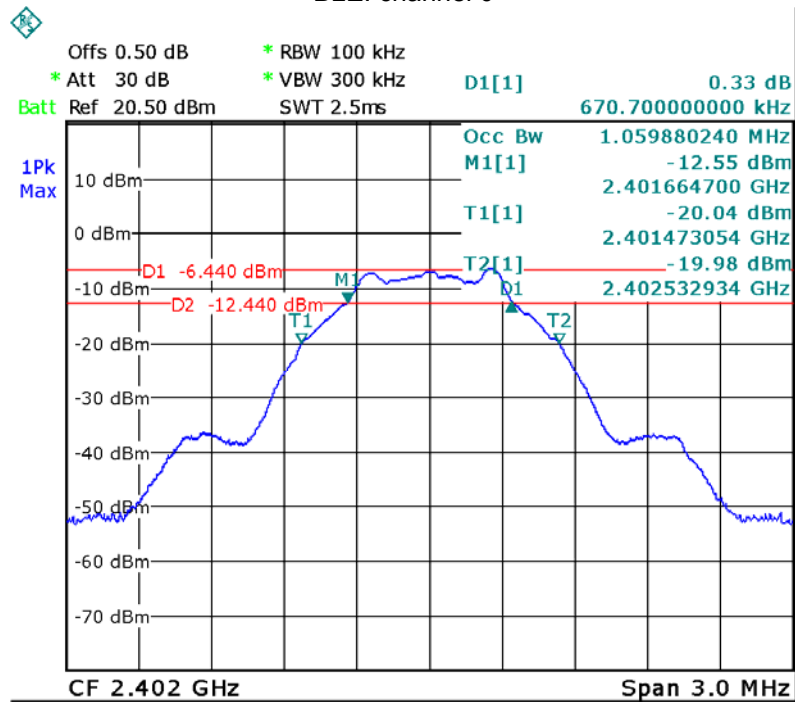

BLE: channel 19

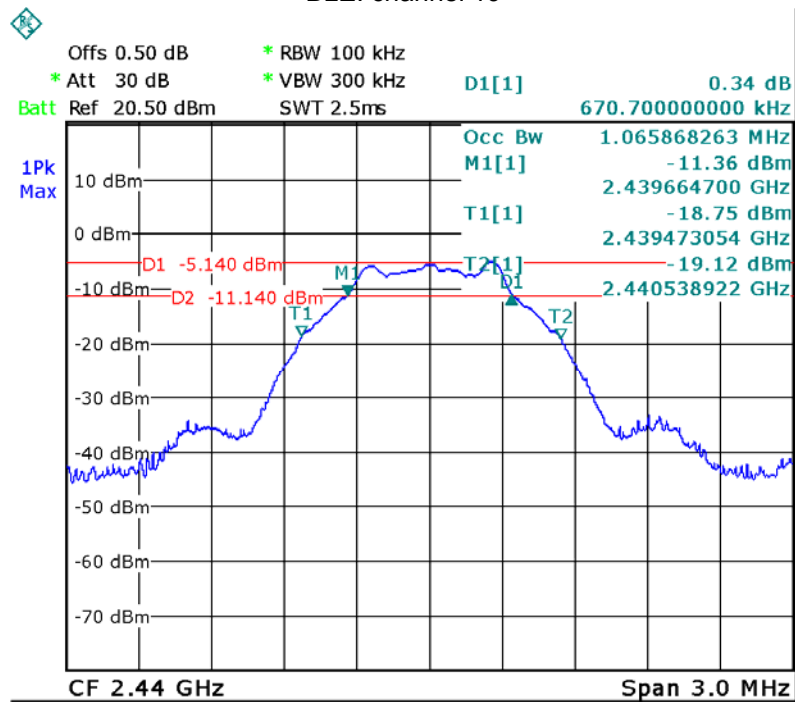

BLE: channel 39

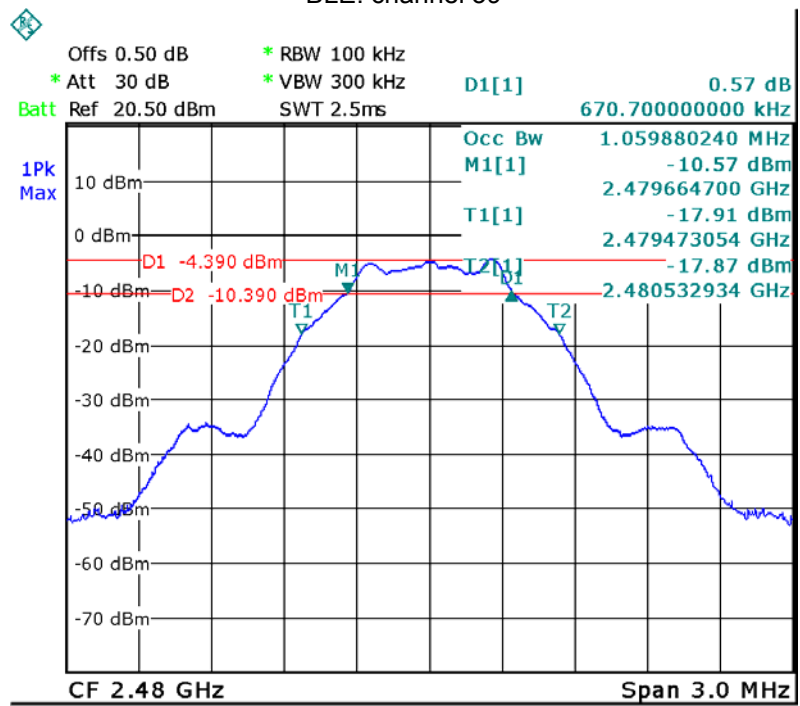

## 12 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW  $\geq 3 \times$  RBW
- c) Set the span  $\geq 1.5 \times$  OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\geq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

**12.2 Test Result:**


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	16.75	1W/30dBm
	Middle-2437	16.48	1W/30dBm
	High-2462	16.71	1W/30dBm
TX 11g	Low-2412	<b>17.27</b>	1W/30dBm
	Middle-2437	16.62	1W/30dBm
	High-2462	17.00	1W/30dBm
TX 11n HT20	Low-2412	17.02	1W/30dBm
	Middle-2437	16.67	1W/30dBm
	High-2462	17.22	1W/30dBm
TX 11n HT40	Low-2422	15.97	1W/30dBm
	Middle-2437	15.92	1W/30dBm
	High-2452	16.10	1W/30dBm
BLE	Low-2402	-5.89	1W/30dBm
	Middle-2440	-4.33	1W/30dBm
	High-2480	<b>-4.21</b>	1W/30dBm

### Test Plot


Mode: TX 11b channel 1

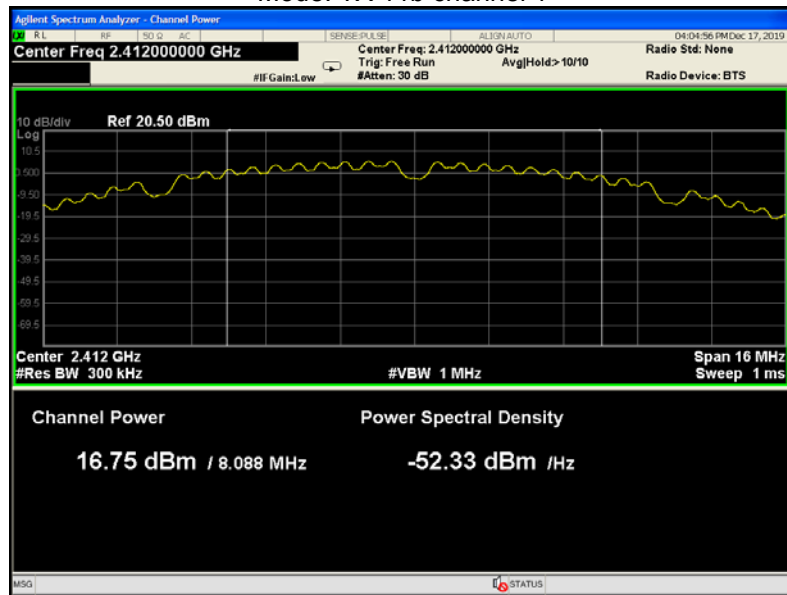


Mode: TX 11b channel 6

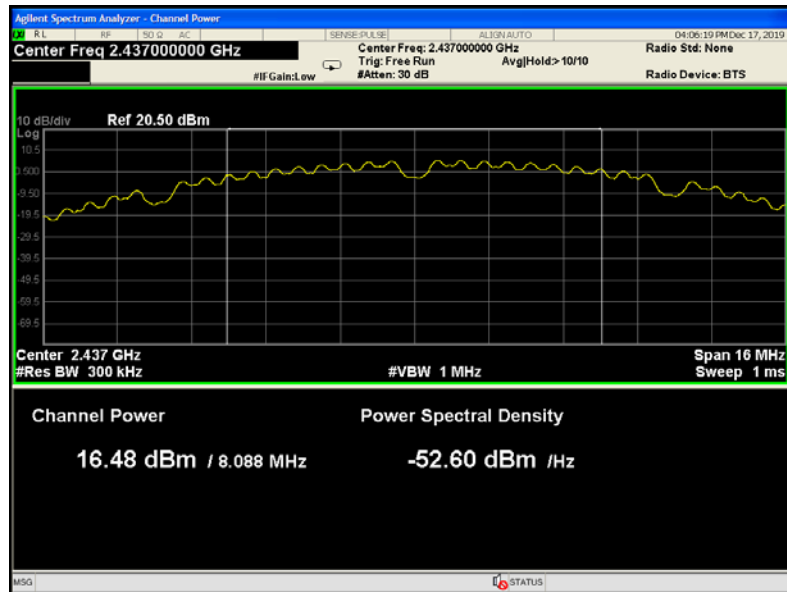


Mode: TX 11b channel 11

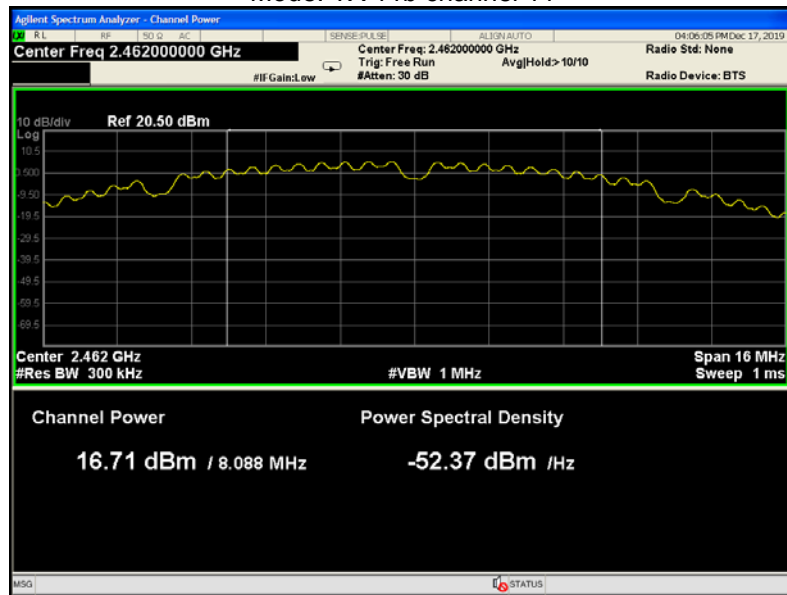


Mode :TX 11g channel 1

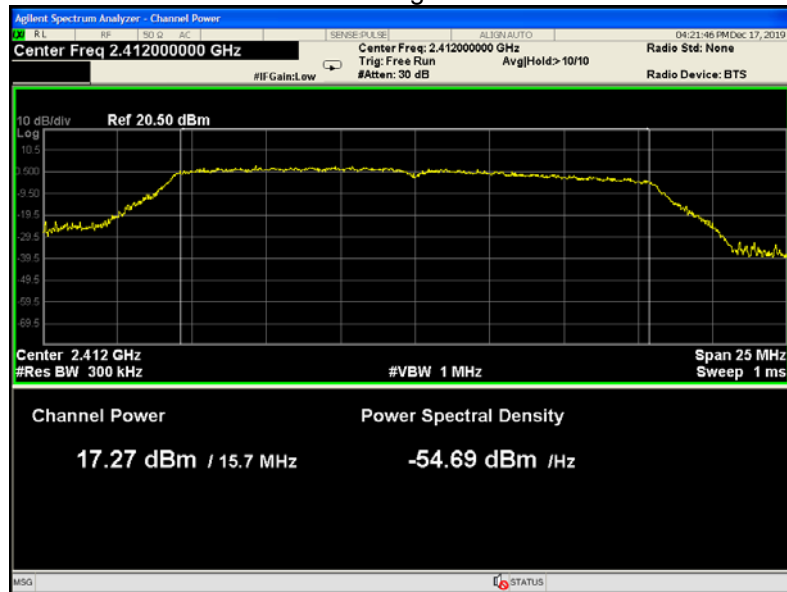

Mode :TX 11g channel 6

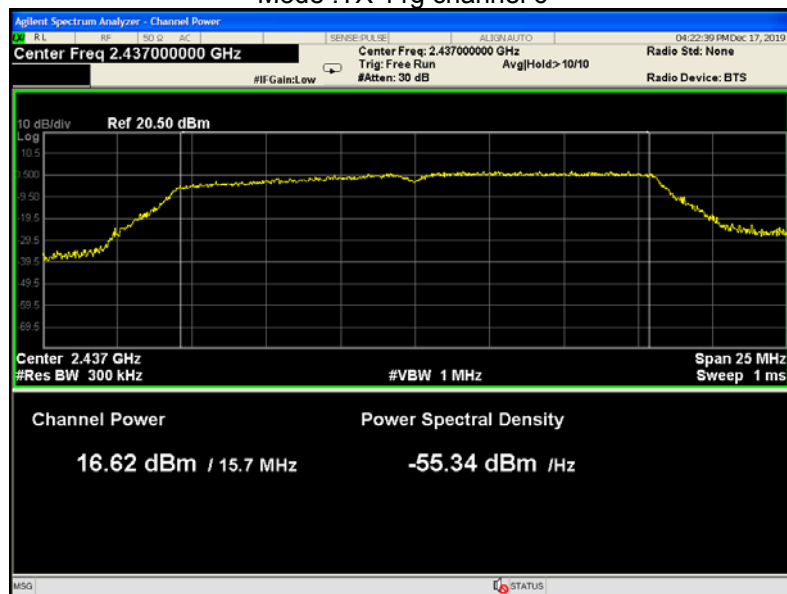


Mode :TX 11g channel 11

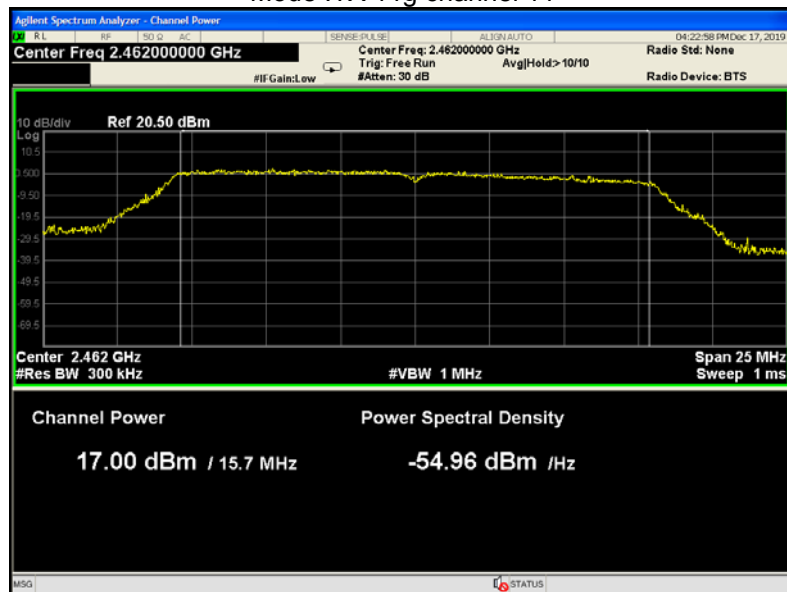





Mode: TX 11n HT20 channel 1

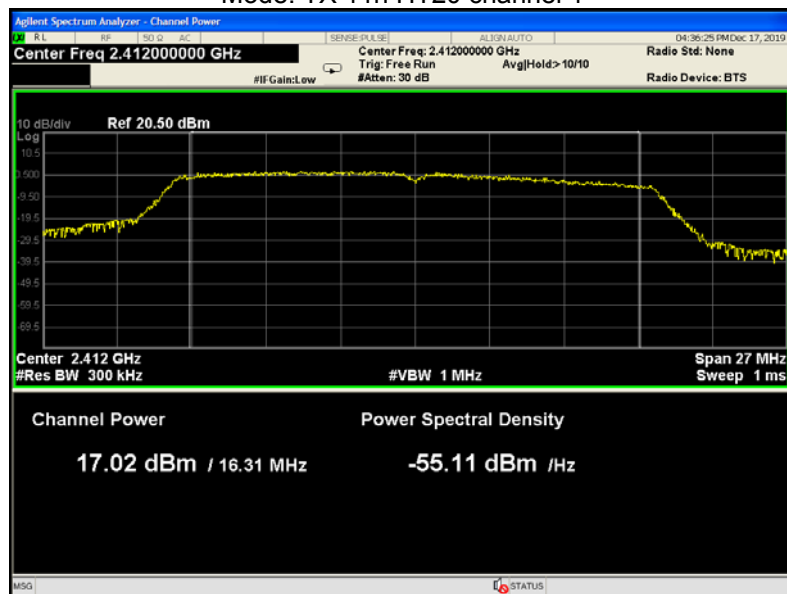


Mode: TX 11n HT20 channel 6

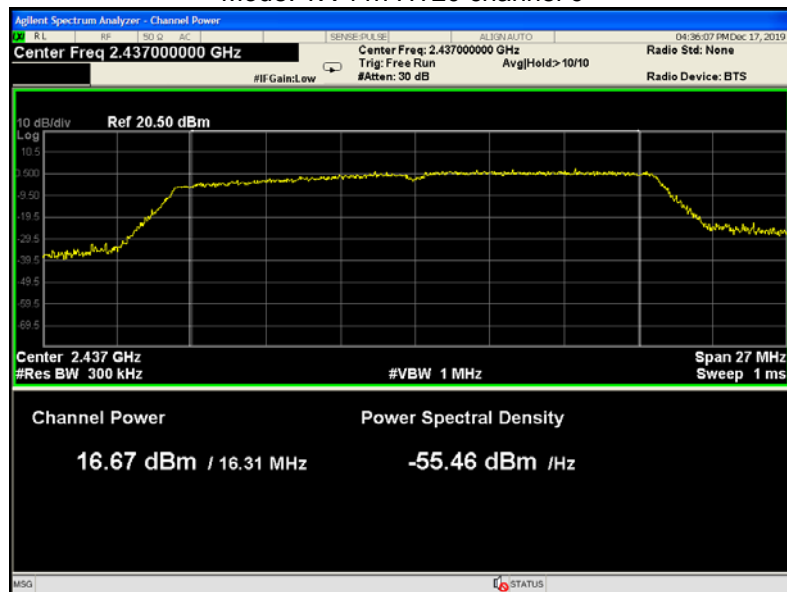


Mode: TX 11n HT20 channel 11

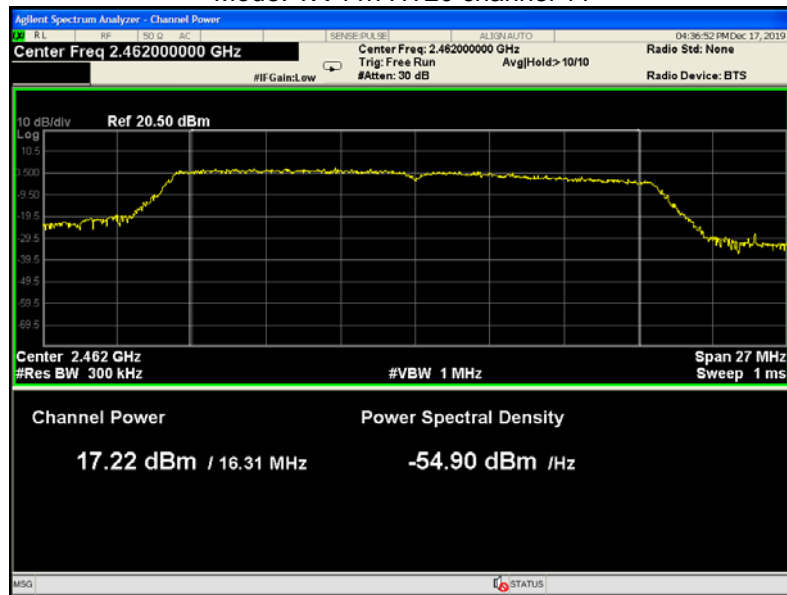


Mode: TX 11n HT40 channel 3

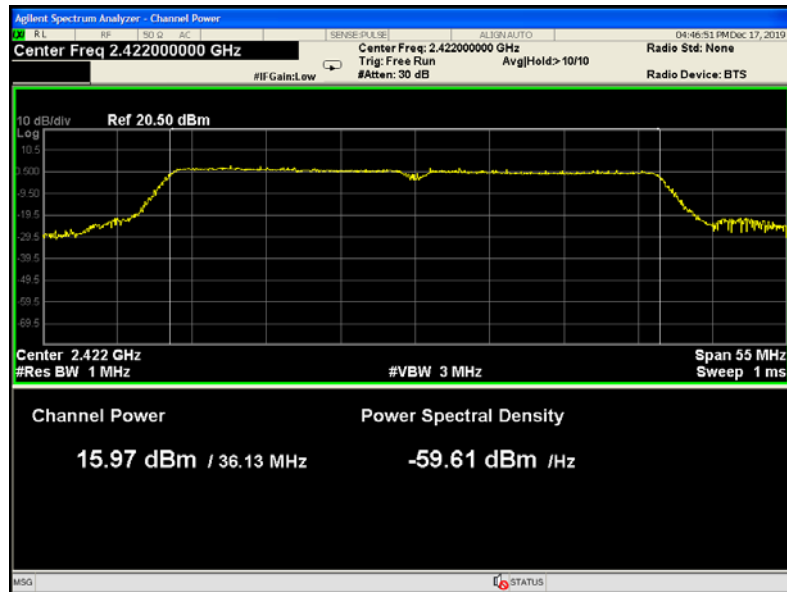


Mode: TX 11n HT40 channel 6

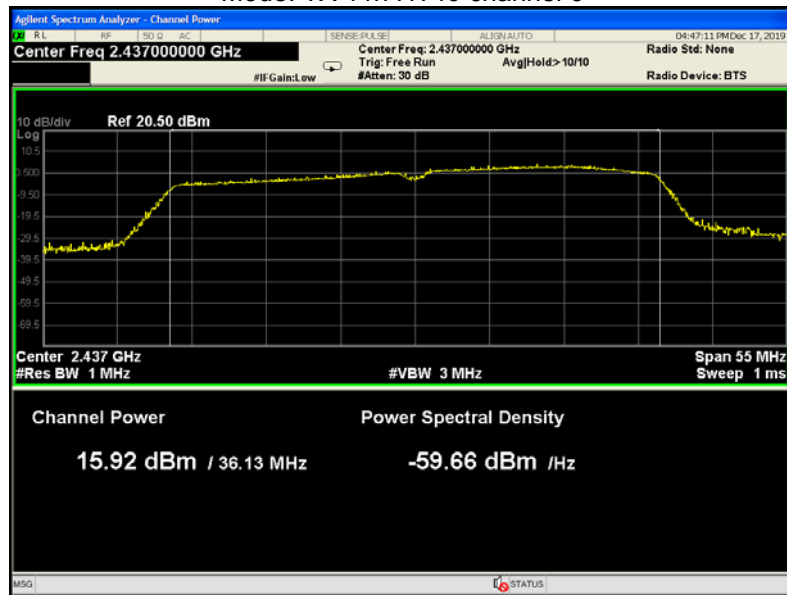


Mode: TX 11n HT40 channel 9

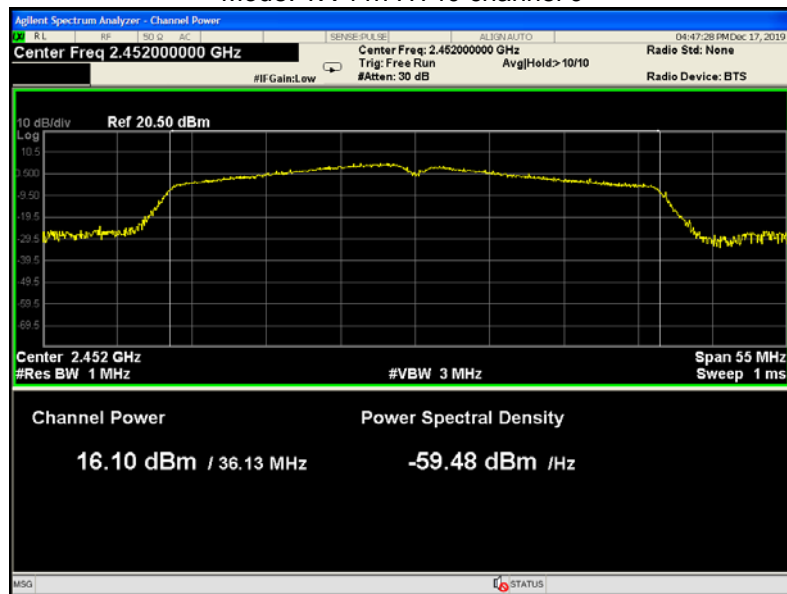


BLE: channel 0

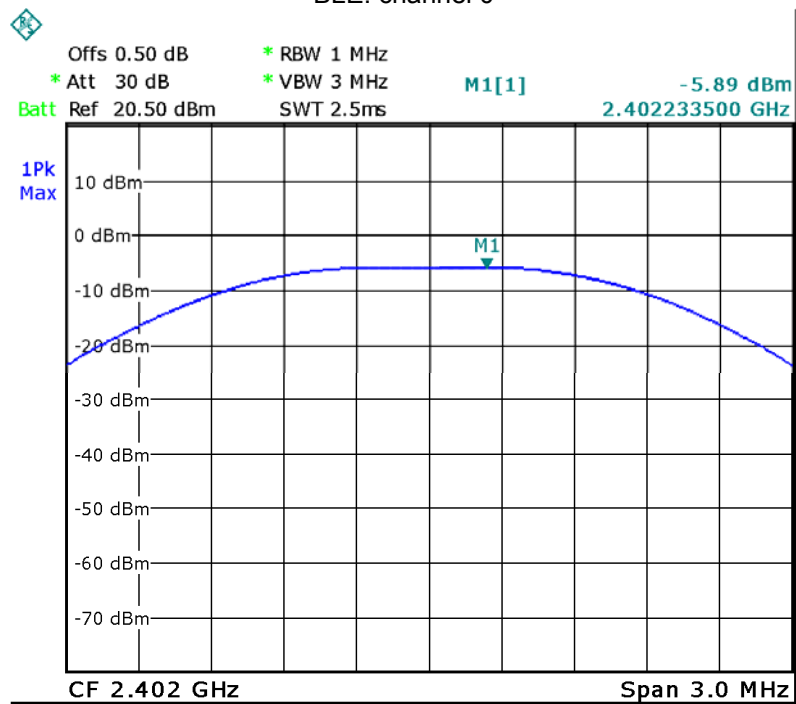

BLE: channel 19

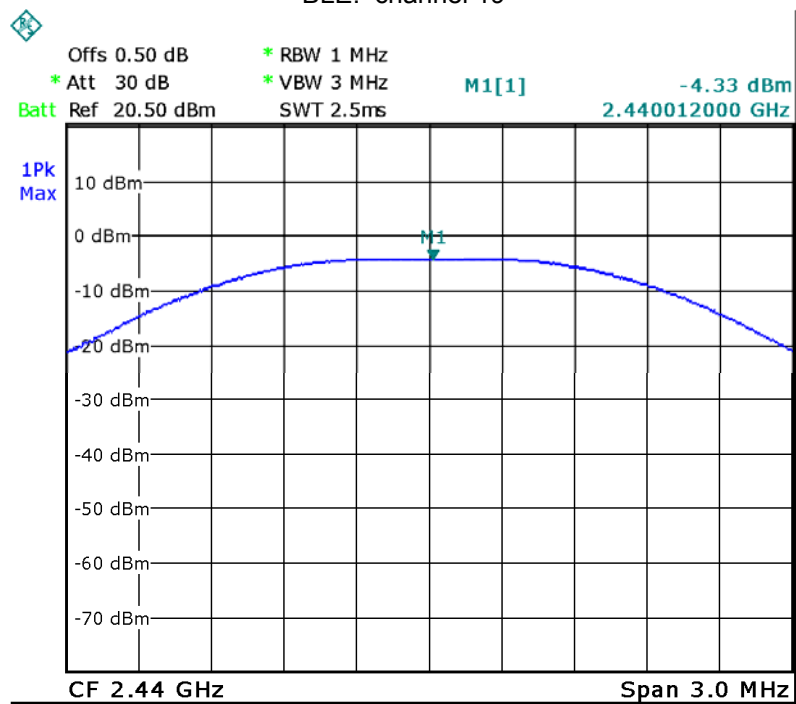

BLE: channel 39

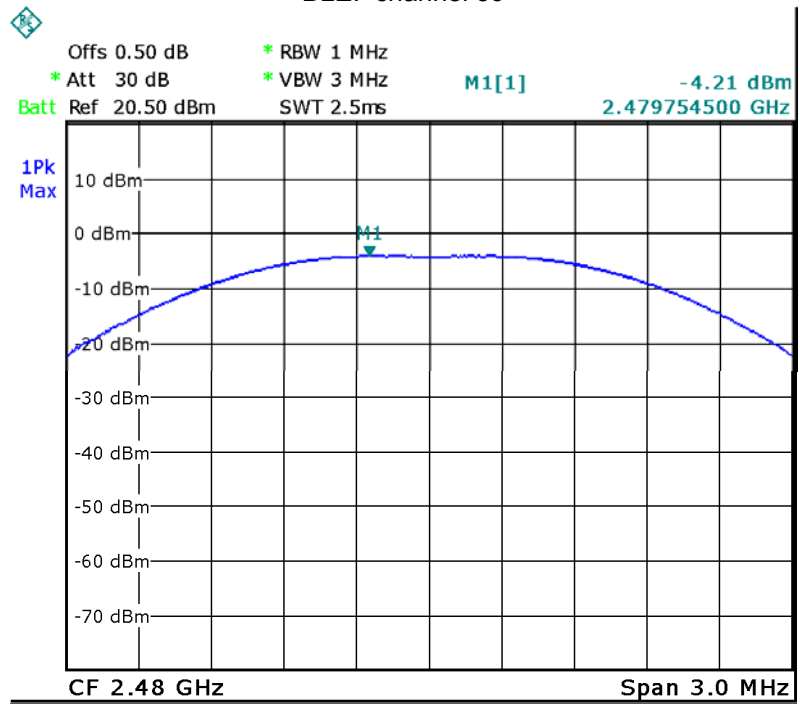

### 13 Duty cycle

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	EUT transmitting continuously

## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;

ANSI C63.10:2013

### 14.1 Test Procedure:


KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


### 14.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-7.365	8dBm per 3kHz
	Middle-2437	-8.110	8dBm per 3kHz
	High-2462	-8.401	8dBm per 3kHz
TX 11g	Low-2412	-10.956	8dBm per 3kHz
	Middle-2437	-12.823	8dBm per 3kHz
	High-2462	-12.937	8dBm per 3kHz
TX 11n HT20	Low-2412	-12.712	8dBm per 3kHz
	Middle-2437	-13.362	8dBm per 3kHz
	High-2462	-13.052	8dBm per 3kHz
TX 11n HT40	Low-2422	-16.865	8dBm per 3kHz
	Middle-2437	-15.828	8dBm per 3kHz
	High-2452	-13.310	8dBm per 3kHz
BLE	Low-2402	-23.220	8dBm per 3kHz
	Middle-2440	-21.840	8dBm per 3kHz
	High-2480	-21.330	8dBm per 3kHz

### Test Plot Mode: TX 11b channel 1

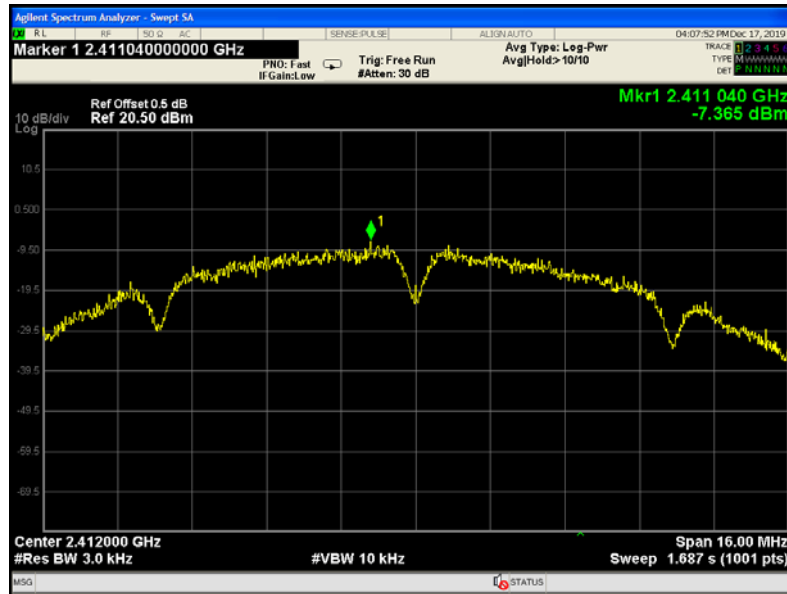


### Mode: TX 11b channel 6

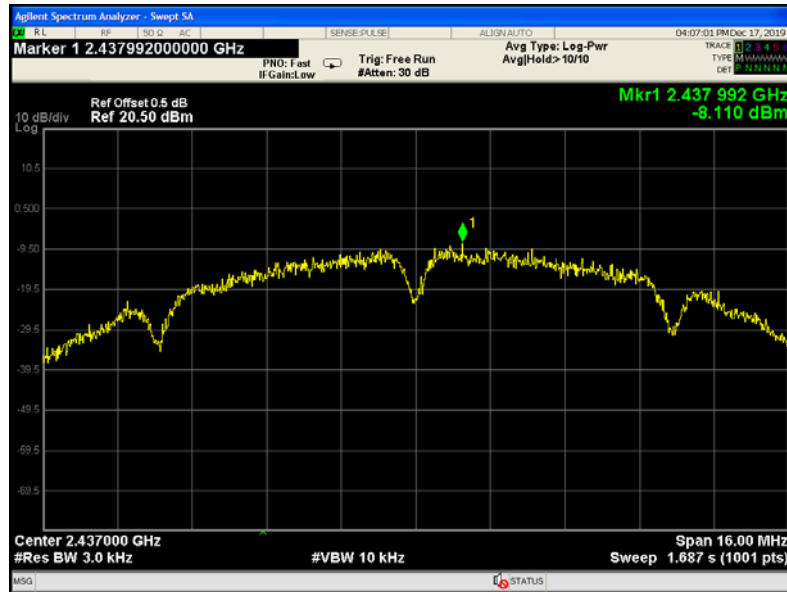





Mode: TX 11b channel 11

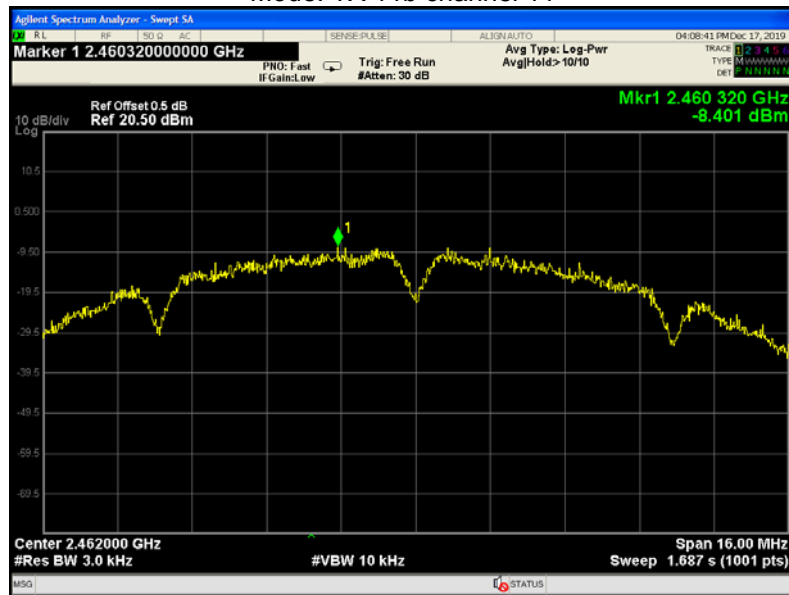


Mode :TX 11g channel 1

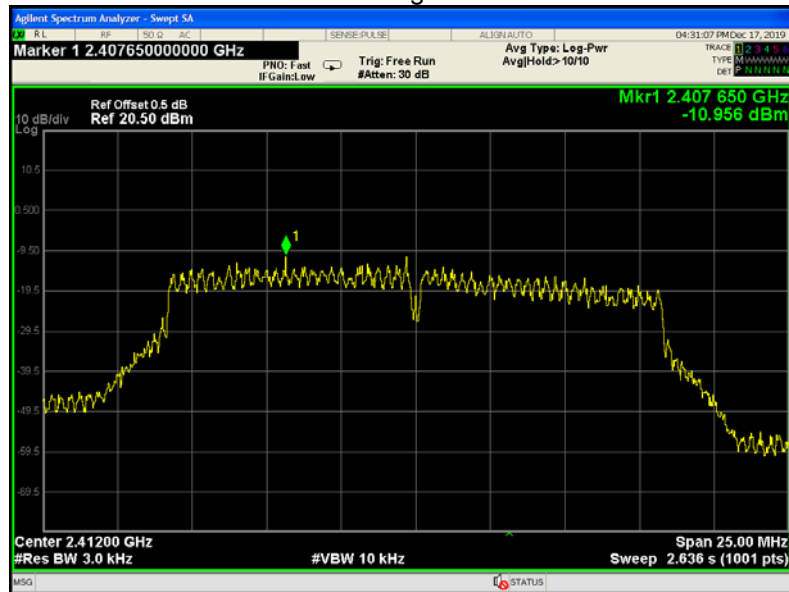


Mode :TX 11g channel 6

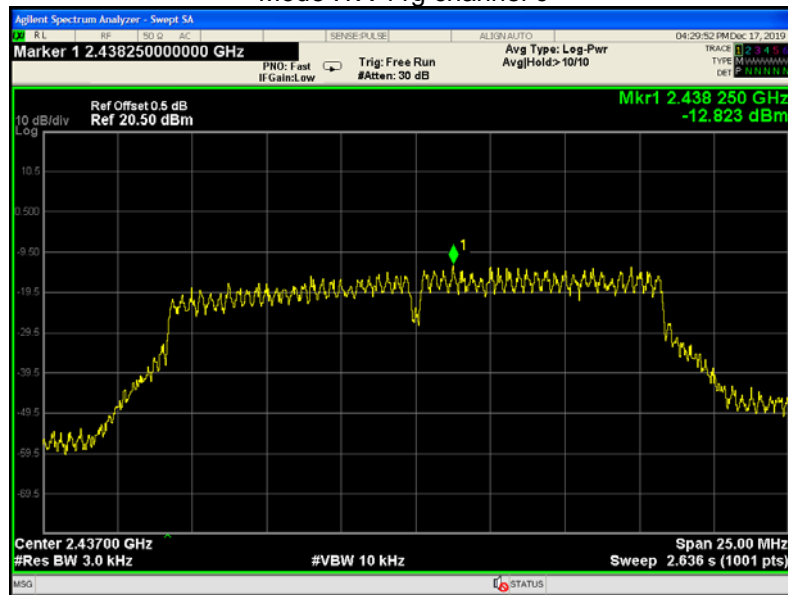


Mode :TX 11g channel 11

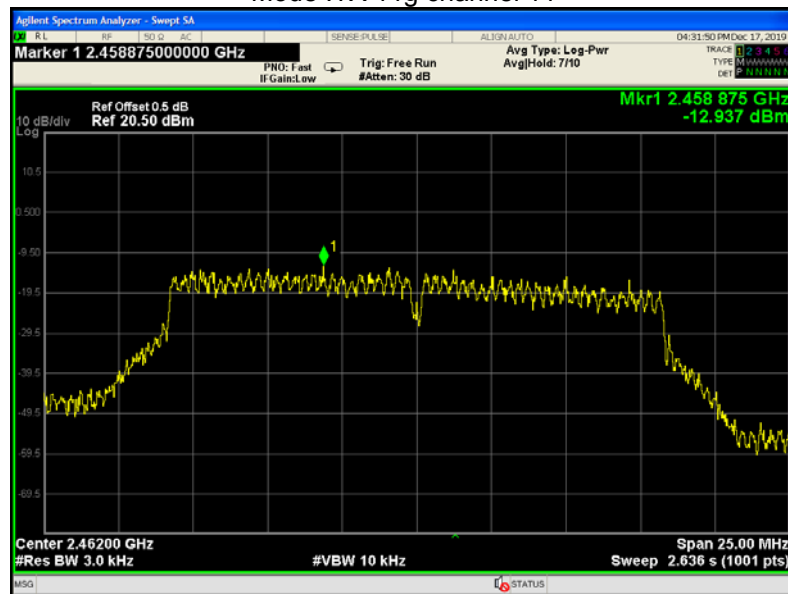


Mode: TX 11n HT20 channel 1

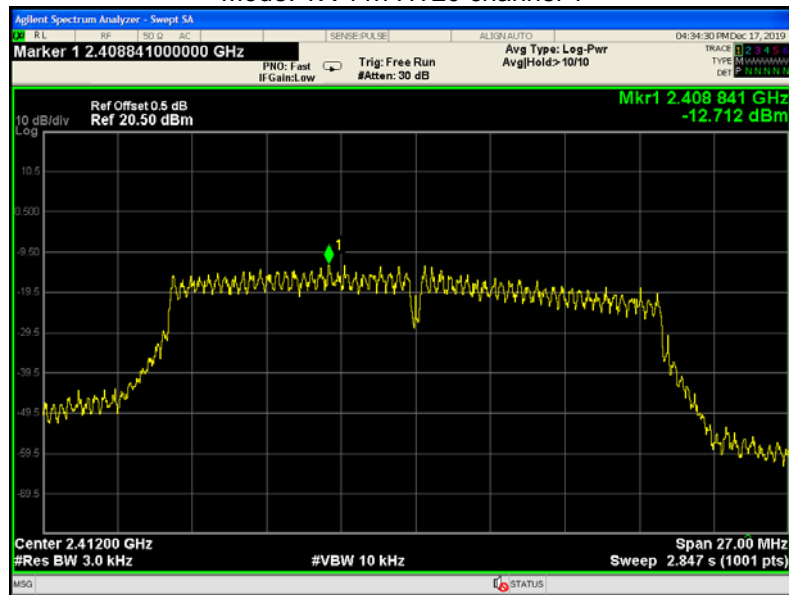


Mode: TX 11n HT20 channel 6

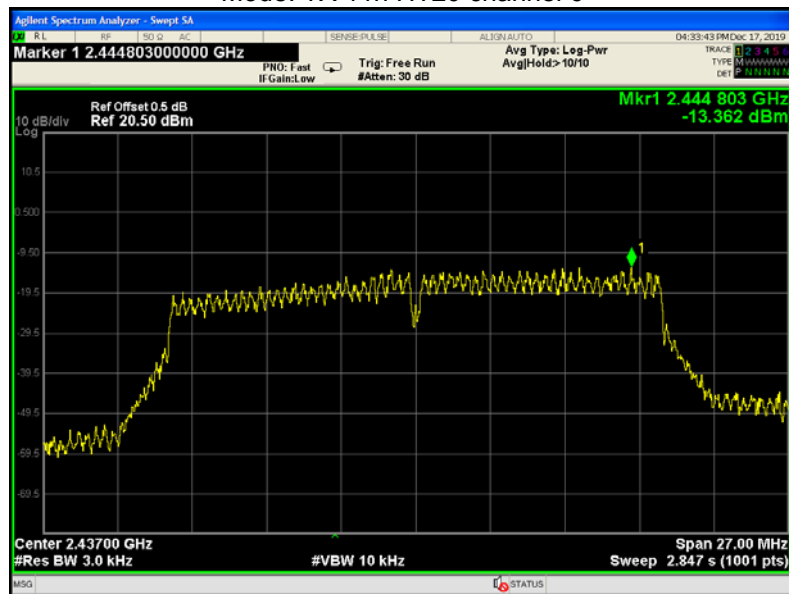


Mode: TX 11n HT20 channel 11

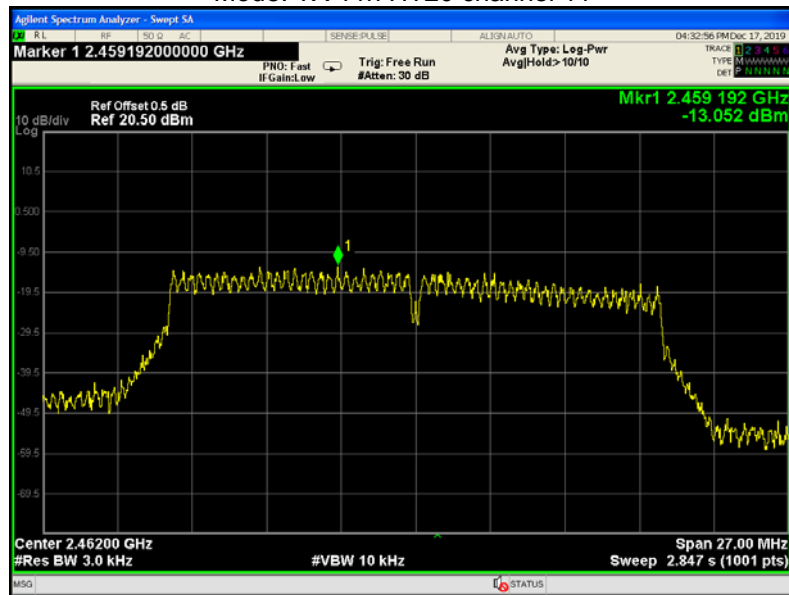


Mode: TX 11n HT40 channel 3

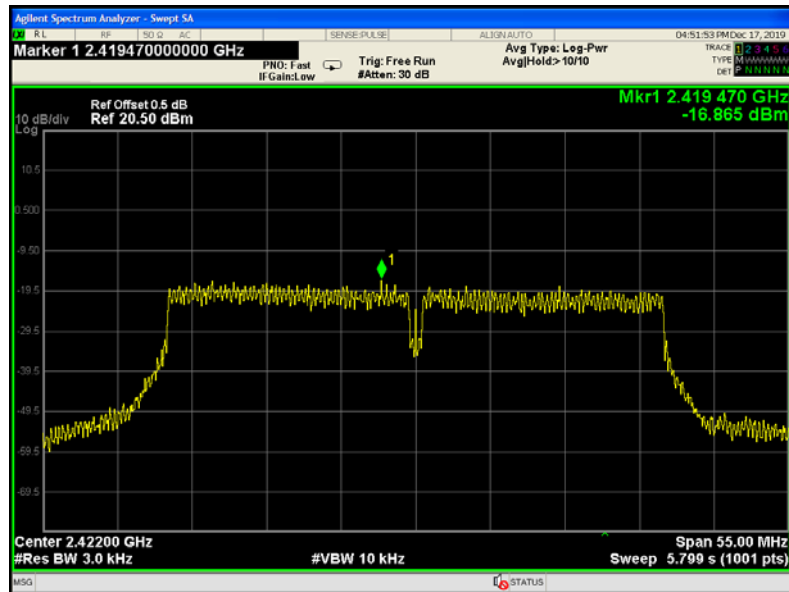


Mode: TX 11n HT40 channel 6

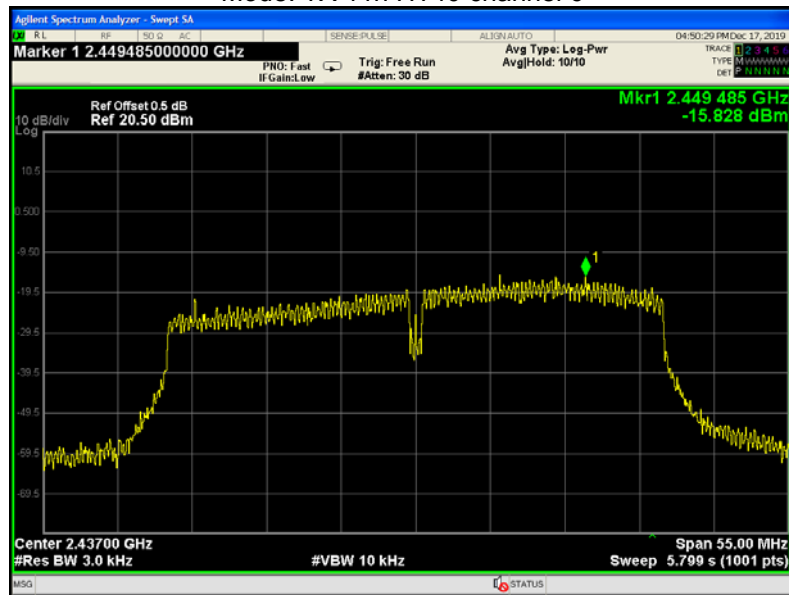


Mode: TX 11n HT40 channel 9

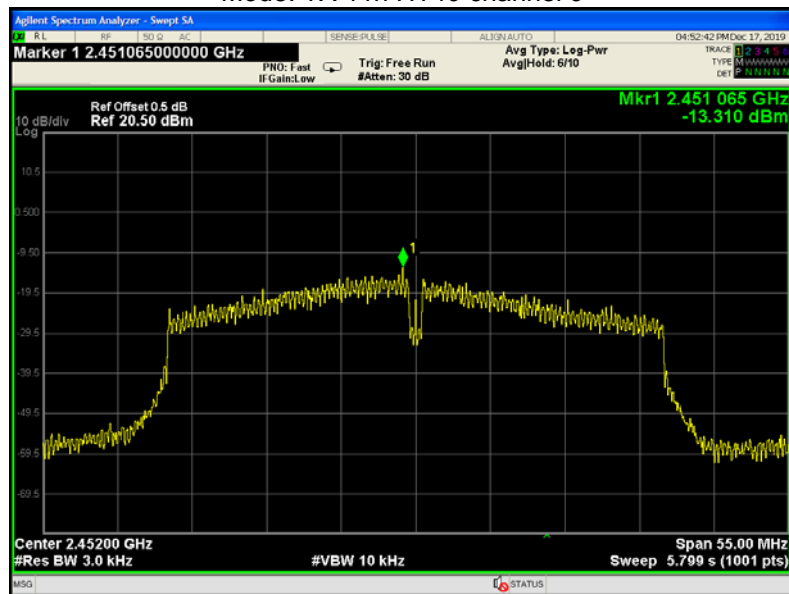


BLE: channel 0

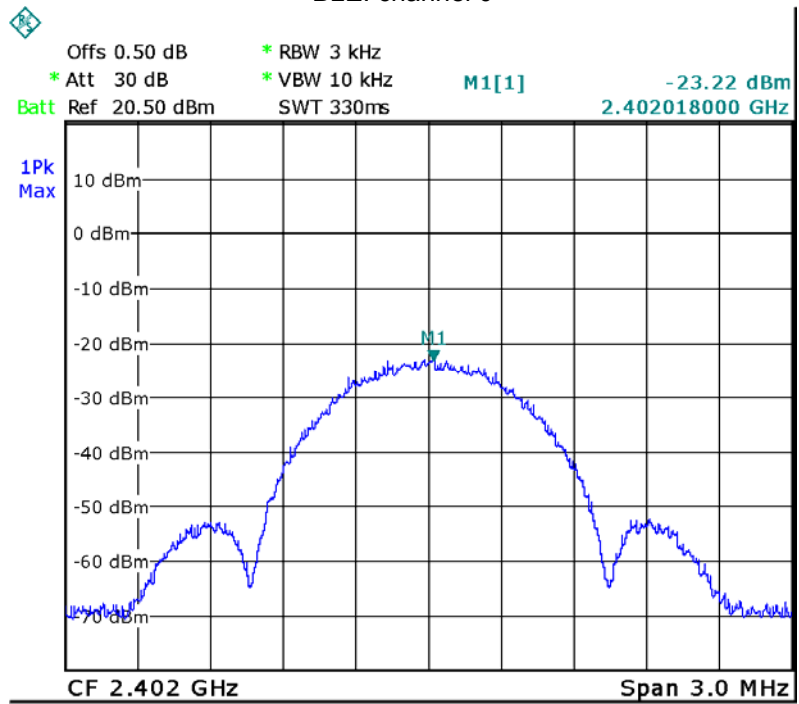

BLE: channel 19

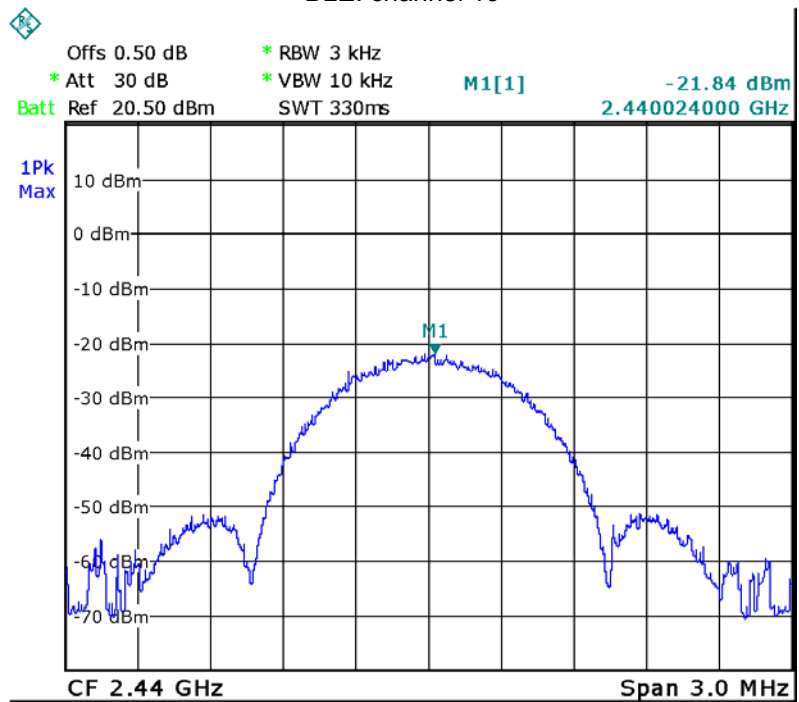

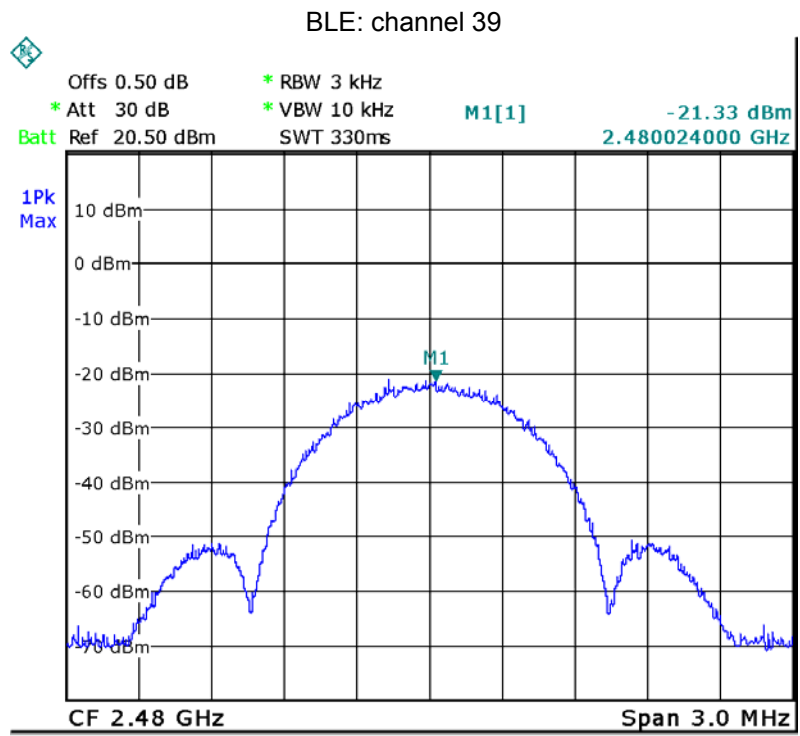

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.



## **16 RF Exposure**

Remark: refer to SAR test report: WTS19S12086451W001.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: Appendix-CD8-Photos.

=====**End of Report**=====