

FCC RF Test Report

(5G NR)

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: CI7n

Trade Mark: TECNO

FCC ID: 2ADYY-CI7N

Applicable Standards: FCC CFR Title 47 Part 2, 22H, 24E, 27M&N&O&Q

Date of Sample Receipt: 10 Mar., 2022

Date of Test: 11 Mar., to 14 Apr., 2022


Date of Report Issued: 15 Apr., 2022

Test Result: PASS

Tested by: Mike OU **Date:** 15 Apr., 2022
Test Engineer

Reviewed by: Wenwen Zhang **Date:** 15 Apr., 2022
Project Engineer

Approved by: Wenwen Zhang **Date:** 15 Apr., 2022
Manager

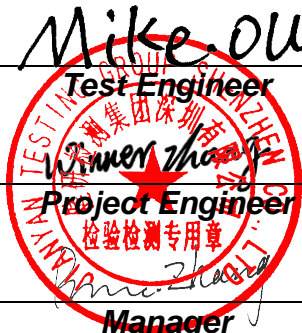

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	15 Apr., 2022	Original

3. Contents

	Page
1. Cover Page	1
2. Version	2
3. Contents	3
4. General Information	4
4.1 Client Information	4
4.2 General Description of E.U.T.	4
4.3 Test Model and Environment	5
4.4 Description of Test Auxiliary Equipment.....	5
4.5 Measurement Uncertainty.....	5
4.6 Additions to, Deviations, or Exclusions from the Method.....	5
4.7 Laboratory Facility.....	5
4.8 Laboratory Location	6
4.9 Test Instruments List	6
5. Measurement Setup and Procedure	7
5.1 Test Channel	7
5.2 Test Setup.....	13
5.3 Test Procedure	14
6. Test Results	15
6.1 Summary	15
6.2 Field Strength of Spurious Radiation Measurement.....	18

4. General Information

4.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Manufacturer:	TECNO MOBILE LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

4.2 General Description of E.U.T.

Product Name:	Mobile Phone		
Model No.:	C17n		
Operation Frequency Range:	Band n2:	Tx: 1850 MHz - 1910 MHz	Rx: 1930 MHz - 1990 MHz
	Band n5:	Tx: 824 MHz - 849 MHz	Rx: 869 MHz - 894 MHz
	Band n38:	Tx: 2570 MHz - 2620 MHz	Rx: 2570 MHz - 2620 MHz
	Band n41:	Tx: 2535 MHz - 2655 MHz	Rx: 2535 MHz - 2655 MHz
	Band n71:	Tx: 663 MHz - 698 MHz	Rx: 617 MHz - 652 MHz
	Band n77:	Tx: 3450 MHz - 3550 MHz	Rx: 3450 MHz - 3550 MHz
	Band n77:	Tx: 3700 MHz - 3980 MHz	Rx: 3700 MHz - 3980 MHz
	Band n78:	Tx: 3450 MHz - 3550 MHz	Rx: 3450 MHz - 3550 MHz
	Band n78:	Tx: 3700 MHz - 3800 MHz	Rx: 3700 MHz - 3800 MHz
Modulation Type:	<input checked="" type="checkbox"/> DFT-s-OFDM:	Pi/2-BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	
	<input checked="" type="checkbox"/> CP-OFDM:	QPSK, 16-QAM, 64-QAM, 256-QAM	
Network Mode:	<input checked="" type="checkbox"/> SA:	n2, n5, n7, n38, n41, n71, n77, n78	
	<input checked="" type="checkbox"/> NSA(EN-DC):	DC_7A_n78, DC_38A_n78, DC_41A_n77, DC_41A_n78	
SCS Support:	<input checked="" type="checkbox"/> 15 kHz	<input checked="" type="checkbox"/> 30 kHz	<input type="checkbox"/> 60 kHz <input type="checkbox"/> 120 kHz
Antenna Type:	Internal Antenna		
Antenna Gain:	Band n2:	-0.6 dBi (declare by Applicant)	
	Band n5:	-2.8 dBi (declare by Applicant)	
	Band n38:	-0.1 dBi (declare by Applicant)	
	Band n41:	-0.1 dBi (declare by Applicant)	
	Band n71:	-4.6 dBi (declare by Applicant)	
	Band n77:	1.2 dBi (declare by Applicant)	
	Band n78:	0.3 dBi (declare by Applicant)	
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.87V, 4900mAh		
AC Adapter:	Model: U330TSA Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 3A or DC 10.0V, 3.3A		
Test Sample Condition:	The test samples were provided in good working order with no visible defects.		

4.3 Test Model and Environment

Test Mode:	
DFT-s-OFDM access mode:	Keep the EUT communication with simulated station in Pi/2-BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM modulation of DFT-s-OFDM access mode.
CP-OFDM access mode:	Keep the EUT communication with simulated station in Pi/2-BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM modulation of CP-OFDM access mode.
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.87 Vdc, Extreme: Low 3.50 Vdc, High 4.45 Vdc

4.4 Description of Test Auxiliary Equipment

Test Equipment	Manufacturer	Model No.	Serial No.
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY60192444

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	±5.34 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.6 Additions to, Deviations, or Exclusions from the Method

No

4.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments List

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	01-19-2021	01-18-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	02-17-2022	02-16-2023
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	06-20-2021	06-19-2022
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	02-17-2022	02-16-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	06-18-2021	06-17-2022
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXG001-7	02-17-2022	02-16-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXG001-3	02-17-2022	02-16-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXG001-9	02-17-2022	02-16-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	02-17-2022	02-16-2023
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	10-27-2022	10-26-2022
UXM 5G Wireless Test Platform	Keysight	E7515B	WXJ008-6	10-27-2021	10-26-2022
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/C	
Coaxial Cable (30MHz ~ 1GHz)	JYT	JYT3M-1G-NN-8M	WXG001-4	02-17-2022	02-16-2023
Coaxial Cable (1GHz ~ 18GHz)	JYT	JYT3M-18G-NN-8M	WXG001-5	02-17-2022	02-16-2023
Coaxial Cable (18GHz ~ 40GHz)	JYT	JYT3M-40G-SS-8M	WXG001-7	02-17-2022	02-16-2023
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9020B	WXJ004-2	10-27-2021	10-26-2022
Vector Signal Generator	Keysight	N5182B	WXJ006-5	10-27-2021	10-26-2022
Analog Signal Generator	Keysight	N5173B	WXJ006-3	10-27-2021	10-26-2022
UXM 5G Wireless Test Platform	Keysight	E7515B	WXJ008-6	10-27-2021	10-26-2022
DC Power Supply	Keysight	E3642A	WXJ025-3	11-27-2020	11-26-2023
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	03-19-2021	03-18-2023
RF Control Box	MWRF-test	MW400-RFCB	WXG005	N/A	
Automatic Filter Box	MWRF-test	MW400-SFCB1	WXG005-1	N/A	
Automatic Filter Box	MWRF-test	MW400-SFCB2	WXG005-2	N/A	
Test Software	MWRF-test	MTS 8200 NR	Version: 2.0.0.0		

5. Measurement Setup and Procedure

5.1 Test Channel

According to ANSI C63.26-2015 chapter 5.1.2.1 Table 2 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Band n2, SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
5 MHz			10 MHz		
Lowest	370500	1852.5	Lowest	371000	1855.0
Middle	376000	1880.0	Middle	376000	1880.0
Highest	381500	1907.5	Highest	381000	1905.0
15 MHz			20 MHz		
Lowest	371500	1857.5	Lowest	372000	1860.0
Middle	376000	1880.0	Middle	376000	1880.0
Highest	380500	1902.5	Highest	380000	1900.0
Band n2, SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	371000	1855.0	Lowest	371500	1857.5
Middle	376000	1880.0	Middle	376000	1880.0
Highest	381000	1905.0	Highest	380500	1902.5
20 MHz					
Lowest	372000	1860.0			
Middle	376000	1880.0			
Highest	380000	1900.0			
Band n5, SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
5 MHz			10 MHz		
Lowest	165300	826.5	Lowest	165800	829.0
Middle	167300	836.5	Middle	167300	836.5
Highest	169300	846.5	Highest	168800	844.0
15 MHz			20 MHz		
Lowest	166300	831.5	Lowest	166800	834.0
Middle	167300	836.5	Middle	167300	836.5
Highest	168300	841.5	Highest	167800	839.0
Band n5, SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	165800	829.0	Lowest	166300	831.5
Middle	167300	836.5	Middle	167300	836.5
Highest	168800	844.0	Highest	168300	841.5
20 MHz					
Lowest	166800	834.0			
Middle	167300	836.5			
Highest	167800	839.0			

Band n38, SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
5 MHz			10 MHz		
Lowest	514500	2572.5	Lowest	515000	2575.0
Middle	518500	2592.5	Middle	519000	2595.0
Highest	523500	2617.5	Highest	523000	2615.0
15 MHz			20 MHz		
Lowest	515500	2577.5	Lowest	516000	2580.0
Middle	519000	2595.0	Middle	519000	2595.0
Highest	522500	2612.5	Highest	522000	2610.0
40 MHz					
Lowest	518000	2590.0			
Middle	519000	2595.0			
Highest	520000	2600.0			
Band n38, SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	515000	2575.0	Lowest	515500	2577.5
Middle	519000	2595.0	Middle	519000	2595.0
Highest	523000	2615.0	Highest	522500	2612.5
20 MHz			40 MHz		
Lowest	516000	2580.0	Lowest	518000	2590.0
Middle	519000	2595.0	Middle	519000	2595.0
Highest	522000	2610.0	Highest	520000	2600.0
Band n41(2535 MHz - 2655 MHz), SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	508002	2540.010	Lowest	508500	2542.500
Middle	519000	2595.000	Middle	519000	2595.000
Highest	529998	2649.990	Highest	529500	2647.500
20 MHz			30 MHz		
Lowest	509001	2545.005	Lowest	510000	2550.000
Middle	519000	2595.000	Middle	519000	2595.000
Highest	528999	2644.995	Highest	528000	2640.000
40 MHz			50 MHz		
Lowest	511002	2555.010	Lowest	512001	2560.005
Middle	519000	2595.000	Middle	519000	2595.000
Highest	526998	2634.990	Highest	525999	2629.995
Band n41(2535 MHz - 2655 MHz), SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	508002	2540.010	Lowest	508500	2542.500
Middle	519000	2595.000	Middle	519000	2595.000
Highest	529998	2649.990	Highest	529500	2647.500
20 MHz			30 MHz		
Lowest	509004	2545.020	Lowest	510000	2550.000
Middle	519000	2595.000	Middle	519000	2595.000

Highest	528996	2644.980	Highest	528000	2640.000
40 MHz			50 MHz		
Lowest	511002	2555.010	Lowest	512004	2560.020
Middle	519000	2595.000	Middle	519000	2595.000
Highest	526998	2634.990	Highest	525996	2629.980
60 MHz			80 MHz		
Lowest	513000	2565.000	Lowest	515004	2575.020
Middle	519000	2595.000	Middle	519000	2595.000
Highest	525000	2625.000	Highest	522996	2614.980
90 MHz			100 MHz		
Lowest	516000	2580.000	Lowest	517002	2585.010
Middle	519000	2595.000	Middle	519000	2595.000
Highest	522000	2610.000	Highest	520998	2604.990
Band n71, SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
5 MHz			10 MHz		
Lowest	133100	665.5	Lowest	133600	668.0
Middle	136100	680.5	Middle	136100	680.5
Highest	139100	695.5	Highest	138600	693.0
15 MHz			20 MHz		
Lowest	134100	670.5	Lowest	134600	673.0
Middle	136100	680.5	Middle	136100	680.5
Highest	138100	690.5	Highest	137600	688.0
Band n71, SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	133600	668.0	Lowest	134100	670.5
Middle	136100	680.5	Middle	136100	680.5
Highest	138600	693.0	Highest	138100	690.5
20 MHz					
Lowest	134600	673.0			
Middle	136100	680.5			
Highest	137600	688.0			
Band n77/78(3450-3550), SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	630334	3455.010	Lowest	630500	3457.500
Middle	633333	3499.995	Middle	633333	3499.995
Highest	636333	3544.995	Highest	636166	3542.490
20 MHz			25 MHz		
Lowest	630667	3460.005	Lowest	630834	3462.510
Middle	633333	3499.995	Middle	633333	3499.995
Highest	636000	3540.000	Highest	635833	3537.495
30 MHz			40 MHz		
Lowest	631000	3465.000	Lowest	631334	3470.010
Middle	633333	3499.995	Middle	633333	3499.995
Highest	635666	3534.990	Highest	635333	3529.995
50 MHz					

Lowest	631667	3475.005			
Middle	633333	3499.995			
Highest	635000	3525.000			
Band n77/78(3450-3550), SCS: 30 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	630334	3455.010	Lowest	630500	3457.500
Middle	633334	3500.010	Middle	633334	3500.010
Highest	636332	3544.980	Highest	636166	3542.490
20 MHz			25 MHz		
Lowest	630668	3460.020	Lowest	630834	3462.510
Middle	633334	3500.010	Middle	633334	3500.010
Highest	636000	3540.000	Highest	635832	3537.480
30 MHz			40 MHz		
Lowest	631000	3465.000	Lowest	631334	3470.010
Middle	633334	3500.010	Middle	633334	3500.010
Highest	635666	3534.990	Highest	635332	3529.980
50 MHz			60 MHz		
Lowest	631668	3475.020	Lowest	632000	3480.000
Middle	633334	3500.010	Middle	633334	3500.010
Highest	635000	3525.000	Highest	634666	3519.990
80 MHz			90 MHz		
Lowest	632668	3490.020	Lowest	633000	3495.000
Middle	633334	3500.010	Middle	633334	3500.010
Highest	634000	3510.000	Highest	633666	3504.990
100 MHz					
Lowest	633334	3500.010			
Middle	633334	3500.010			
Highest	633332	3499.980			
Band n77(3700-3980), SCS: 15 kHz					
Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	647000	3705.000	Lowest	647167	3707.505
Middle	656000	3840.000	Middle	656000	3840.000
Highest	665000	3975.000	Highest	664833	3972.495
20 MHz			25 MHz		
Lowest	647334	3710.010	Lowest	647500	3712.500
Middle	656000	3840.000	Middle	656000	3840.000
Highest	664666	3969.990	Highest	664500	3967.500
30 MHz			40 MHz		
Lowest	647667	3715.005	Lowest	648000	3720.000
Middle	656000	3840.000	Middle	656000	3840.000
Highest	664333	3964.995	Highest	664000	3960.000
50 MHz					
Lowest	648334	3725.010			
Middle	656000	3840.000			
Highest	663666	3954.990			
Band n77(3700-3980), SCS: 30 kHz					
Channels	ARFCN	Frequency	Channels	ARFCN	Frequency

		(MHz)				(MHz)		
10 MHz				15 MHz				
Lowest	647000	3705.000	Lowest	647168	3707.520			
Middle	656000	3840.000	Middle	656000	3840.000			
Highest	665000	3975.000	Highest	664832	3972.480			
20 MHz				25 MHz				
Lowest	647334	3710.010	Lowest	647500	3712.500			
Middle	656000	3840.000	Middle	656000	3840.000			
Highest	664666	3969.990	Highest	664500	3967.500			
30 MHz				40 MHz				
Lowest	647668	3715.020	Lowest	648000	3720.000			
Middle	656000	3840.000	Middle	656000	3840.000			
Highest	664332	3964.980	Highest	664000	3960.000			
50 MHz				60 MHz				
Lowest	648334	3725.010	Lowest	648668	3730.020			
Middle	656000	3840.000	Middle	656000	3840.000			
Highest	663666	3954.990	Highest	663332	3949.980			
80 MHz				90 MHz				
Lowest	649334	3740.010	Lowest	649668	3745.020			
Middle	656000	3840.000	Middle	656000	3840.000			
Highest	662666	3939.990	Highest	662332	3934.980			
100 MHz								
Lowest	650000	3750.000						
Middle	656000	3840.000						
Highest	662000	3930.000						

Band n78(3700-3800), SCS: 15 kHz

Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	647000	3705.000	Lowest	647167	3707.505
Middle	650000	3750.000	Middle	650000	3750.000
Highest	653000	3795.000	Highest	652833	3792.495
20 MHz			25 MHz		
Lowest	647334	3710.010	Lowest	647500	3712.500
Middle	650000	3750.000	Middle	650000	3750.000
Highest	652666	3789.990	Highest	652500	3787.500
30 MHz			40 MHz		
Lowest	647667	3715.005	Lowest	648000	3720.000
Middle	650000	3750.000	Middle	650000	3750.000
Highest	652333	3784.995	Highest	652000	3780.000
50 MHz					
Lowest	648334	3725.010			
Middle	650000	3750.000			
Highest	651666	3774.990			

Band n78(3700-3800), SCS: 30 kHz


Channels	ARFCN	Frequency (MHz)	Channels	ARFCN	Frequency (MHz)
10 MHz			15 MHz		
Lowest	647000	3705.000	Lowest	647168	3707.520
Middle	650000	3750.000	Middle	650000	3750.000
Highest	653000	3795.000	Highest	652832	3792.480

20 MHz			25 MHz		
Lowest	647334	3710.010	Lowest	647500	3712.500
Middle	650000	3750.000	Middle	650000	3750.000
Highest	652666	3789.990	Highest	652500	3787.500
30 MHz			40 MHz		
Lowest	647668	3715.020	Lowest	648000	3720.000
Middle	650000	3750.000	Middle	650000	3750.000
Highest	652332	3784.980	Highest	652000	3780.000
50 MHz			60 MHz		
Lowest	648334	3725.010	Lowest	648668	3730.020
Middle	650000	3750.000	Middle	650000	3750.000
Highest	651666	3774.990	Highest	651332	3769.980
80 MHz			90 MHz		
Lowest	649334	3740.010	Lowest	649668	3745.020
Middle	650000	3750.000	Middle	650000	3750.000
Highest	650666	3759.990	Highest	650332	3754.980
100 MHz					
Lowest	650000	3750.000			
Middle	650000	3750.000			
Highest	650000	3750.000			


5.2 Test Setup

1) Radiated emission measurement:


Below 1GHz (3m SAC)

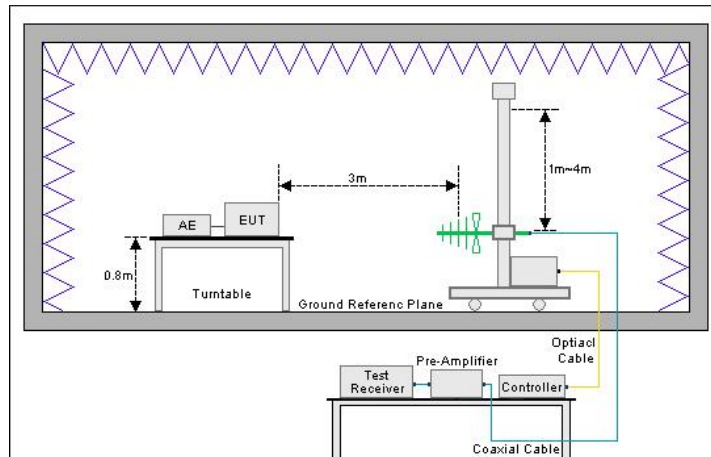

Above 1GHz (3m SAC)

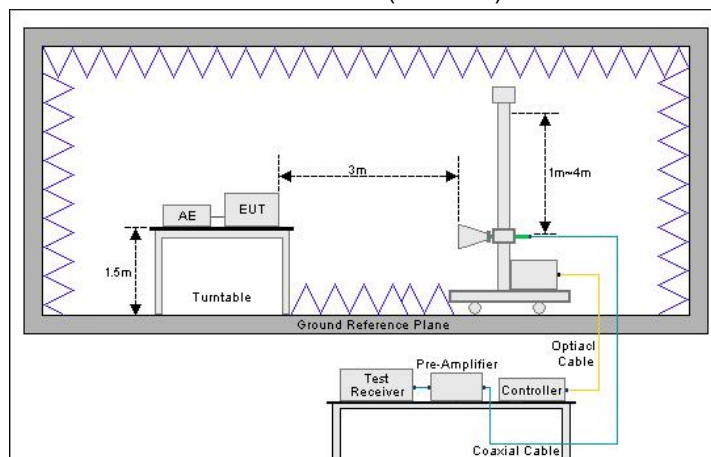

2) Conducted test method

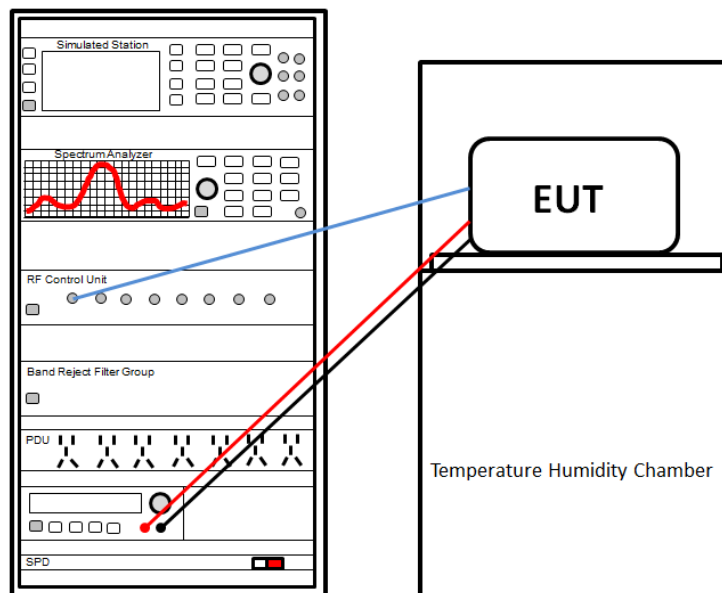

5.3 Test Procedure

Test method	Test step
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> The NR antenna port of EUT was connected to the test port of the test system through an RF cable. The EUT is keeping in continuous transmission mode and tested in all modulation modes. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

6. Test Results

6.1 Summary

6.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	See SAR Report	Pass
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) Part 27.50 (c)(10) Part 27.50 (h)(2) Part 27.50 (j)(3) Part 27.50 (k)(3)	Appendix – 5G NR	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50 (j)(4) Part 27.50 (k)(4)	Appendix – 5G NR	Pass
26dB Emission Bandwidth 99% Occupied Bandwidth	Part 2.1049 Part 22.917 (b) Part 24.238 (b) Part 27.53 (g) Part 27.53 (l)(2) Part 27.53 (m)(6) Part 27.53 (n)(2)	Appendix – 5G NR	Pass
Out of Band Emission at Antenna Terminals	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (l)(2) Part 27.53 (m)(4) Part 27.53 (n)(2)	Appendix – 5G NR	Pass
Field Strength of Spurious Radiation	Part 2.1051 Part 22.917 (a) Part 24.238 (a) Part 27.53 (g) Part 27.53 (l)(2) Part 27.53 (m)(4) Part 27.53 (n)(2)	See Section 6.2	Pass
Frequency Stability vs. Temperature	Part 2.1055 (a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Appendix – 5G NR	Pass
Frequency Stability vs. Voltage	Part 2.1055 (d)(2) Part 22.355 Part 24.235 Part 27.54	Appendix – 5G NR	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (Fundamental Frequency below 1GHz)/1.0dB (Fundamental Frequency above 1GHz) (provided by the customer).			
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015		

6.1.2 Test Limit

Test items	Limit
RF output power	Band n2/38/41: 2W EIRP, Band n5: 7W EIRP, Band n71: 3W EIRP Band n77, n78: 1W EIRP
Peak-to-Average Power Ratio	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB
Modulation Characteristics	N/A
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A
Out of Band Emission at Antenna Terminals Field Strength of Spurious Radiation	<p>Band n2, n5, n71: The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.</p> <p>Band n38, n41: For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.</p> <p>Band n77, n78: For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (n)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p>

<p>Out of Band Emission at Antenna Terminals</p> <p>Field Strength of Spurious Radiation</p>	<p>For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph (l)(2) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.</p>
<p>Frequency Stability vs. Temperature</p> <p>Frequency Stability vs. Voltage</p>	<p>The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.</p>

6.2 Field Strength of Spurious Radiation Measurement

Note:

1. The field strength of spurious radiation is tested by selecting the modulation and RB allocation with the maximum power in lowest and highest bandwidth.
2. Pre-Scan DC_7A_n78, DC_38A_n78, DC_41A_n77 and DC_41A_n78, mode, and found DC_7A_n78 and DC_41A_n77 was worst mode, the report only reflects the worst mode.

Band n2 – SCS 15kHz						
5MHz(1@0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3705.00	-47.68	-1.60	-49.28	-13.00	36.28	Vertical
5557.50	-51.97	5.43	-46.54	-13.00	33.54	Vertical
7410.00	-52.73	13.11	-39.62	-13.00	26.62	Vertical
3705.00	-50.17	-2.09	-52.26	-13.00	39.26	Horizontal
5557.50	-51.49	3.81	-47.68	-13.00	34.68	Horizontal
7410.00	-53.51	11.38	-42.13	-13.00	29.13	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-47.84	-1.31	-49.15	-13.00	36.15	Vertical
5640.00	-52.04	6.98	-45.06	-13.00	32.06	Vertical
7520.00	-52.58	11.74	-40.84	-13.00	27.84	Vertical
3760.00	-50.43	-1.80	-52.23	-13.00	39.23	Horizontal
5640.00	-51.57	4.30	-47.27	-13.00	34.27	Horizontal
7520.00	-53.40	10.25	-43.15	-13.00	30.15	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3815.00	-47.57	-1.02	-48.59	-13.00	35.59	Vertical
5722.50	-51.57	8.20	-43.37	-13.00	30.37	Vertical
7630.00	-52.43	11.17	-41.26	-13.00	28.26	Vertical
3815.00	-50.28	-1.49	-51.77	-13.00	38.77	Horizontal
5722.50	-51.68	5.68	-46.00	-13.00	33.00	Horizontal
7630.00	-53.77	10.01	-43.76	-13.00	30.76	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n2 – SCS 15kHz						
20MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.00	-47.82	-1.51	-49.33	-13.00	36.33	Vertical
5580.00	-51.39	5.80	-45.59	-13.00	32.59	Vertical
7440.00	-52.01	12.61	-39.40	-13.00	26.40	Vertical
3720.00	-49.88	-2.00	-51.88	-13.00	38.88	Horizontal
5580.00	-51.90	3.95	-47.95	-13.00	34.95	Horizontal
7440.00	-53.67	10.94	-42.73	-13.00	29.73	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-48.25	-1.31	-49.56	-13.00	36.56	Vertical
5640.00	-51.73	6.98	-44.75	-13.00	31.75	Vertical
7520.00	-51.86	11.74	-40.12	-13.00	27.12	Vertical
3760.00	-49.96	-1.80	-51.76	-13.00	38.76	Horizontal
5640.00	-52.01	4.30	-47.71	-13.00	34.71	Horizontal
7520.00	-53.63	10.25	-43.38	-13.00	30.38	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.00	-48.01	-1.11	-49.12	-13.00	36.12	Vertical
5700.00	-51.56	8.28	-43.28	-13.00	30.28	Vertical
7600.00	-51.98	11.38	-40.60	-13.00	27.60	Vertical
3800.00	-49.65	-1.61	-51.26	-13.00	38.26	Horizontal
5700.00	-52.22	4.67	-47.55	-13.00	34.55	Horizontal
7600.00	-53.74	10.20	-43.54	-13.00	30.54	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n2 – SCS 30kHz						
10MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3710.00	-47.62	-1.53	-49.15	-13.00	36.15	Vertical
5565.00	-51.70	5.59	-46.11	-13.00	33.11	Vertical
7420.00	-51.95	13.20	-38.75	-13.00	25.75	Vertical
3710.00	-50.40	-2.01	-52.41	-13.00	39.41	Horizontal
5565.00	-52.00	3.93	-48.07	-13.00	35.07	Horizontal
7420.00	-54.26	11.45	-42.81	-13.00	29.81	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-48.09	-1.31	-49.40	-13.00	36.40	Vertical
5640.00	-51.97	6.98	-44.99	-13.00	31.99	Vertical
7520.00	-51.56	11.74	-39.82	-13.00	26.82	Vertical
3760.00	-50.02	-1.80	-51.82	-13.00	38.82	Horizontal
5640.00	-51.85	4.30	-47.55	-13.00	34.55	Horizontal
7520.00	-54.37	10.25	-44.12	-13.00	31.12	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3810.00	-47.97	-0.97	-48.94	-13.00	35.94	Vertical
5715.00	-52.41	8.49	-43.92	-13.00	30.92	Vertical
7620.00	-51.49	11.32	-40.17	-13.00	27.17	Vertical
3810.00	-49.68	-1.37	-51.05	-13.00	38.05	Horizontal
5715.00	-51.87	5.81	-46.06	-13.00	33.06	Horizontal
7620.00	-54.30	10.22	-44.08	-13.00	31.08	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n2 – SCS 30kHz						
20MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3720.00	-47.43	-1.51	-48.94	-13.00	35.94	Vertical
5580.00	-51.59	5.80	-45.79	-13.00	32.79	Vertical
7440.00	-51.78	12.61	-39.17	-13.00	26.17	Vertical
3720.00	-50.84	-2.00	-52.84	-13.00	39.84	Horizontal
5580.00	-51.63	3.95	-47.68	-13.00	34.68	Horizontal
7440.00	-54.07	10.94	-43.13	-13.00	30.13	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3760.00	-48.01	-1.31	-49.32	-13.00	36.32	Vertical
5640.00	-51.69	6.98	-44.71	-13.00	31.71	Vertical
7520.00	-51.59	11.74	-39.85	-13.00	26.85	Vertical
3760.00	-50.06	-1.80	-51.86	-13.00	38.86	Horizontal
5640.00	-52.14	4.30	-47.84	-13.00	34.84	Horizontal
7520.00	-53.92	10.25	-43.67	-13.00	30.67	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
3800.00	-47.76	-1.11	-48.87	-13.00	35.87	Vertical
5700.00	-52.77	8.28	-44.49	-13.00	31.49	Vertical
7600.00	-51.62	11.38	-40.24	-13.00	27.24	Vertical
3800.00	-49.53	-1.61	-51.14	-13.00	38.14	Horizontal
5700.00	-52.06	4.67	-47.39	-13.00	34.39	Horizontal
7600.00	-54.15	10.20	-43.95	-13.00	30.95	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n5 – SCS 15kHz						
5MHz(1@0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1653.00	-50.15	-11.08	-61.23	-13.00	48.23	Vertical
2479.50	-49.47	-6.19	-55.66	-13.00	42.66	Vertical
3306.00	-49.24	-4.73	-53.97	-13.00	40.97	Vertical
1653.00	-49.26	-10.95	-60.21	-13.00	47.21	Horizontal
2479.50	-49.93	-6.51	-56.44	-13.00	43.44	Horizontal
3306.00	-50.04	-5.20	-55.24	-13.00	42.24	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-50.27	-11.13	-61.40	-13.00	48.40	Vertical
2509.50	-49.70	-6.20	-55.90	-13.00	42.90	Vertical
3346.00	-49.18	-5.03	-54.21	-13.00	41.21	Vertical
1673.00	-49.61	-11.05	-60.66	-13.00	47.66	Horizontal
2509.50	-50.66	-6.51	-57.17	-13.00	44.17	Horizontal
3346.00	-50.07	-5.23	-55.30	-13.00	42.30	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1693.00	-50.15	-11.12	-61.27	-13.00	48.27	Vertical
2539.50	-49.67	-6.03	-55.70	-13.00	42.70	Vertical
3386.00	-49.10	-5.01	-54.11	-13.00	41.11	Vertical
1693.00	-49.12	-11.03	-60.15	-13.00	47.15	Horizontal
2539.50	-50.36	-6.32	-56.68	-13.00	43.68	Horizontal
3386.00	-50.22	-5.17	-55.39	-13.00	42.39	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n5 – SCS 15kHz						
20MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.00	-50.04	-11.05	-61.09	-13.00	48.09	Vertical
2502.00	-49.92	-6.15	-56.07	-13.00	43.07	Vertical
3336.00	-49.44	-4.88	-54.32	-13.00	41.32	Vertical
1668.00	-49.18	-10.92	-60.10	-13.00	47.10	Horizontal
2502.00	-50.22	-6.47	-56.69	-13.00	43.69	Horizontal
3336.00	-49.99	-5.13	-55.12	-13.00	42.12	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-50.63	-11.13	-61.76	-13.00	48.76	Vertical
2509.50	-50.14	-6.20	-56.34	-13.00	43.34	Vertical
3346.00	-48.84	-5.03	-53.87	-13.00	40.87	Vertical
1673.00	-49.88	-11.05	-60.93	-13.00	47.93	Horizontal
2509.50	-51.10	-6.51	-57.61	-13.00	44.61	Horizontal
3346.00	-49.68	-5.23	-54.91	-13.00	41.91	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1678.00	-50.17	-11.26	-61.43	-13.00	48.43	Vertical
2517.00	-49.50	-6.20	-55.70	-13.00	42.70	Vertical
3356.00	-49.26	-5.15	-54.41	-13.00	41.41	Vertical
1678.00	-49.27	-11.18	-60.45	-13.00	47.45	Horizontal
2517.00	-50.76	-6.30	-57.06	-13.00	44.06	Horizontal
3356.00	-49.89	-5.29	-55.18	-13.00	42.18	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n5 – SCS 30kHz						
10MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1658.00	-50.52	-11.11	-61.63	-13.00	48.63	Vertical
2487.00	-49.93	-6.22	-56.15	-13.00	43.15	Vertical
3316.00	-49.46	-4.98	-54.44	-13.00	41.44	Vertical
1658.00	-49.69	-11.02	-60.71	-13.00	47.71	Horizontal
2487.00	-51.31	-6.54	-57.85	-13.00	44.85	Horizontal
3316.00	-49.74	-5.24	-54.98	-13.00	41.98	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-50.08	-11.13	-61.21	-13.00	48.21	Vertical
2509.50	-49.43	-6.20	-55.63	-13.00	42.63	Vertical
3346.00	-49.40	-5.03	-54.43	-13.00	41.43	Vertical
1673.00	-50.06	-11.05	-61.11	-13.00	48.11	Horizontal
2509.50	-51.16	-6.51	-57.67	-13.00	44.67	Horizontal
3346.00	-49.69	-5.23	-54.92	-13.00	41.92	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1688.00	-50.41	-11.14	-61.55	-13.00	48.55	Vertical
2532.00	-49.38	-6.11	-55.49	-13.00	42.49	Vertical
3376.00	-49.47	-5.07	-54.54	-13.00	41.54	Vertical
1688.00	-50.33	-11.07	-61.40	-13.00	48.40	Horizontal
2532.00	-50.81	-6.42	-57.23	-13.00	44.23	Horizontal
3376.00	-50.16	-5.21	-55.37	-13.00	42.37	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n5 – SCS 30kHz						
20MHz(1 @0) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1668.00	-49.43	-11.05	-60.48	-13.00	47.48	Vertical
2502.00	-49.37	-6.15	-55.52	-13.00	42.52	Vertical
3336.00	-49.39	-4.88	-54.27	-13.00	41.27	Vertical
1668.00	-50.18	-10.92	-61.10	-13.00	48.10	Horizontal
2502.00	-50.54	-6.47	-57.01	-13.00	44.01	Horizontal
3336.00	-49.69	-5.13	-54.82	-13.00	41.82	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1673.00	-49.82	-11.13	-60.95	-13.00	47.95	Vertical
2509.50	-48.95	-6.20	-55.15	-13.00	42.15	Vertical
3346.00	-49.86	-5.03	-54.89	-13.00	41.89	Vertical
1673.00	-50.22	-11.05	-61.27	-13.00	48.27	Horizontal
2509.50	-50.90	-6.51	-57.41	-13.00	44.41	Horizontal
3346.00	-49.41	-5.23	-54.64	-13.00	41.64	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1678.00	-50.03	-11.26	-61.29	-13.00	48.29	Vertical
2517.00	-49.03	-6.20	-55.23	-13.00	42.23	Vertical
3356.00	-49.01	-5.15	-54.16	-13.00	41.16	Vertical
1678.00	-50.16	-11.18	-61.34	-13.00	48.34	Horizontal
2517.00	-50.78	-6.30	-57.08	-13.00	44.08	Horizontal
3356.00	-49.99	-5.29	-55.28	-13.00	42.28	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n41 – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5080.02	-51.67	4.56	-47.11	-25.00	22.11	Vertical
7620.03	-53.76	13.14	-40.62	-25.00	15.62	Vertical
10160.04	-54.52	16.89	-37.63	-25.00	12.63	Vertical
5080.02	-50.61	4.56	-46.05	-25.00	21.05	Horizontal
7620.03	-51.31	13.14	-38.17	-25.00	13.17	Horizontal
10160.04	-54.57	16.89	-37.68	-25.00	12.68	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-51.76	4.76	-47.00	-25.00	22.00	Vertical
7785.00	-53.78	13.48	-40.30	-25.00	15.30	Vertical
10380.00	-54.33	18.00	-36.33	-25.00	11.33	Vertical
5190.00	-50.80	4.76	-46.04	-25.00	21.04	Horizontal
7785.00	-51.32	13.48	-37.84	-25.00	12.84	Horizontal
10380.00	-54.42	18.00	-36.42	-25.00	11.42	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5299.98	-51.83	5.50	-46.33	-25.00	21.33	Vertical
7949.97	-53.65	13.31	-40.34	-25.00	15.34	Vertical
10599.96	-54.52	19.50	-35.02	-25.00	10.02	Vertical
5299.98	-50.99	5.50	-45.49	-25.00	20.49	Horizontal
7949.97	-51.77	13.31	-38.46	-25.00	13.46	Horizontal
10599.96	-54.13	19.50	-34.63	-25.00	9.63	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n41 – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.04	-51.82	4.56	-47.26	-25.00	22.26	Vertical
7680.06	-53.48	13.29	-40.19	-25.00	15.19	Vertical
10240.08	-54.98	16.93	-38.05	-25.00	13.05	Vertical
5120.04	-50.79	4.56	-46.23	-25.00	21.23	Horizontal
7680.06	-50.86	13.29	-37.57	-25.00	12.57	Horizontal
10240.08	-54.78	16.93	-37.85	-25.00	12.85	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-51.62	4.76	-46.86	-25.00	21.86	Vertical
7785.00	-53.55	13.48	-40.07	-25.00	15.07	Vertical
10380.00	-54.61	18.00	-36.61	-25.00	11.61	Vertical
5190.00	-50.31	4.76	-45.55	-25.00	20.55	Horizontal
7785.00	-50.86	13.48	-37.38	-25.00	12.38	Horizontal
10380.00	-54.08	18.00	-36.08	-25.00	11.08	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5259.96	-51.72	5.41	-46.31	-25.00	21.31	Vertical
7889.94	-53.59	13.33	-40.26	-25.00	15.26	Vertical
10519.92	-55.01	19.67	-35.34	-25.00	10.34	Vertical
5259.96	-51.07	5.41	-45.66	-25.00	20.66	Horizontal
7889.94	-51.38	13.33	-38.05	-25.00	13.05	Horizontal
10519.92	-54.61	19.67	-34.94	-25.00	9.94	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n41 – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5080.02	-51.66	4.56	-47.10	-25.00	22.10	Vertical
7620.03	-53.45	13.14	-40.31	-25.00	15.31	Vertical
10160.04	-53.95	16.89	-37.06	-25.00	12.06	Vertical
5080.02	-51.13	4.56	-46.57	-25.00	21.57	Horizontal
7620.03	-51.22	13.14	-38.08	-25.00	13.08	Horizontal
10160.04	-54.29	16.89	-37.40	-25.00	12.40	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-52.16	4.76	-47.40	-25.00	22.40	Vertical
7785.00	-53.58	13.48	-40.10	-25.00	15.10	Vertical
10380.00	-54.17	18.00	-36.17	-25.00	11.17	Vertical
5190.00	-51.55	4.76	-46.79	-25.00	21.79	Horizontal
7785.00	-51.04	13.48	-37.56	-25.00	12.56	Horizontal
10380.00	-53.94	18.00	-35.94	-25.00	10.94	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5299.98	-51.83	5.50	-46.33	-25.00	21.33	Vertical
7949.97	-53.98	13.31	-40.67	-25.00	15.67	Vertical
10599.96	-54.59	19.50	-35.09	-25.00	10.09	Vertical
5299.98	-51.66	5.50	-46.16	-25.00	21.16	Horizontal
7949.97	-51.08	13.31	-37.77	-25.00	12.77	Horizontal
10599.96	-53.91	19.50	-34.41	-25.00	9.41	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n41 – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5170.02	-51.99	4.56	-47.43	-25.00	22.43	Vertical
7755.03	-53.60	13.29	-40.31	-25.00	15.31	Vertical
10340.04	-54.20	16.93	-37.27	-25.00	12.27	Vertical
5170.02	-50.79	4.56	-46.23	-25.00	21.23	Horizontal
7755.03	-51.58	13.29	-38.29	-25.00	13.29	Horizontal
10340.04	-54.30	16.93	-37.37	-25.00	12.37	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5190.00	-52.62	4.76	-47.86	-25.00	22.86	Vertical
7785.00	-54.07	13.48	-40.59	-25.00	15.59	Vertical
10380.00	-54.57	18.00	-36.57	-25.00	11.57	Vertical
5190.00	-51.24	4.76	-46.48	-25.00	21.48	Horizontal
7785.00	-50.85	13.48	-37.37	-25.00	12.37	Horizontal
10380.00	-53.61	18.00	-35.61	-25.00	10.61	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
5209.98	-52.29	5.41	-46.88	-25.00	21.88	Vertical
7814.97	-53.96	13.33	-40.63	-25.00	15.63	Vertical
10419.96	-54.28	19.67	-34.61	-25.00	9.61	Vertical
5209.98	-51.49	5.41	-46.08	-25.00	21.08	Horizontal
7814.97	-51.20	13.33	-37.87	-25.00	12.87	Horizontal
10419.96	-54.38	19.67	-34.71	-25.00	9.71	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n71 – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1331.00	-49.81	-8.86	-58.67	-13.00	45.67	Vertical
1996.50	-49.77	-7.97	-57.74	-13.00	44.74	Vertical
2662.00	-49.32	-5.75	-55.07	-13.00	42.07	Vertical
1331.00	-49.80	-9.58	-59.38	-13.00	46.38	Horizontal
1996.50	-47.72	-8.13	-55.85	-13.00	42.85	Horizontal
2662.00	-49.40	-6.23	-55.63	-13.00	42.63	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361.00	-49.94	-8.79	-58.73	-13.00	45.73	Vertical
2041.50	-49.76	-7.88	-57.64	-13.00	44.64	Vertical
2722.00	-49.76	-5.62	-55.38	-13.00	42.38	Vertical
1361.00	-49.63	-9.32	-58.95	-13.00	45.95	Horizontal
2041.50	-48.13	-7.93	-56.06	-13.00	43.06	Horizontal
2722.00	-49.37	-5.95	-55.32	-13.00	42.32	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1391.00	-50.12	-8.62	-58.74	-13.00	45.74	Vertical
2086.50	-49.28	-7.49	-56.77	-13.00	43.77	Vertical
2782.00	-49.49	-5.41	-54.90	-13.00	41.90	Vertical
1391.00	-49.96	-9.10	-59.06	-13.00	46.06	Horizontal
2086.50	-47.65	-7.62	-55.27	-13.00	42.27	Horizontal
2782.00	-49.07	-5.70	-54.77	-13.00	41.77	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n71 – SCS 15kHz						
20MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1346.00	-49.99	-8.73	-58.72	-13.00	45.72	Vertical
2019.00	-49.52	-7.67	-57.19	-13.00	44.19	Vertical
2692.00	-49.55	-5.61	-55.16	-13.00	42.16	Vertical
1346.00	-49.75	-9.49	-59.24	-13.00	46.24	Horizontal
2019.00	-48.03	-8.03	-56.06	-13.00	43.06	Horizontal
2692.00	-49.38	-6.11	-55.49	-13.00	42.49	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361.00	-50.08	-8.79	-58.87	-13.00	45.87	Vertical
2041.50	-50.11	-7.88	-57.99	-13.00	44.99	Vertical
2722.00	-50.16	-5.62	-55.78	-13.00	42.78	Vertical
1361.00	-49.15	-9.32	-58.47	-13.00	45.47	Horizontal
2041.50	-48.30	-7.93	-56.23	-13.00	43.23	Horizontal
2722.00	-49.58	-5.95	-55.53	-13.00	42.53	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1376.00	-50.23	-8.76	-58.99	-13.00	45.99	Vertical
2064.00	-48.96	-7.55	-56.51	-13.00	43.51	Vertical
2752.00	-49.83	-5.58	-55.41	-13.00	42.41	Vertical
1376.00	-50.18	-9.23	-59.41	-13.00	46.41	Horizontal
2064.00	-47.95	-7.74	-55.69	-13.00	42.69	Horizontal
2752.00	-49.15	-5.78	-54.93	-13.00	41.93	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n71 – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1336.00	-49.37	-8.81	-58.18	-13.00	45.18	Vertical
2004.00	-49.60	-7.72	-57.32	-13.00	44.32	Vertical
2672.00	-49.28	-5.69	-54.97	-13.00	41.97	Vertical
1336.00	-49.63	-9.58	-59.21	-13.00	46.21	Horizontal
2004.00	-47.96	-8.16	-56.12	-13.00	43.12	Horizontal
2672.00	-49.38	-6.31	-55.69	-13.00	42.69	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361.00	-50.23	-8.79	-59.02	-13.00	46.02	Vertical
2041.50	-49.76	-7.88	-57.64	-13.00	44.64	Vertical
2722.00	-49.33	-5.62	-54.95	-13.00	41.95	Vertical
1361.00	-49.17	-9.32	-58.49	-13.00	45.49	Horizontal
2041.50	-48.50	-7.93	-56.43	-13.00	43.43	Horizontal
2722.00	-49.81	-5.95	-55.76	-13.00	42.76	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1386.00	-50.37	-8.66	-59.03	-13.00	46.03	Vertical
2079.00	-49.21	-7.40	-56.61	-13.00	43.61	Vertical
2772.00	-49.34	-5.48	-54.82	-13.00	41.82	Vertical
1386.00	-49.77	-9.14	-58.91	-13.00	45.91	Horizontal
2079.00	-47.62	-7.62	-55.24	-13.00	42.24	Horizontal
2772.00	-49.54	-5.65	-55.19	-13.00	42.19	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n71 – SCS 30kHz						
20MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1346.00	-49.52	-8.73	-58.25	-13.00	45.25	Vertical
2019.00	-50.01	-7.67	-57.68	-13.00	44.68	Vertical
2692.00	-49.34	-5.61	-54.95	-13.00	41.95	Vertical
1346.00	-49.26	-9.49	-58.75	-13.00	45.75	Horizontal
2019.00	-47.62	-8.03	-55.65	-13.00	42.65	Horizontal
2692.00	-49.50	-6.11	-55.61	-13.00	42.61	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1361.00	-50.73	-8.79	-59.52	-13.00	46.52	Vertical
2041.50	-49.40	-7.88	-57.28	-13.00	44.28	Vertical
2722.00	-49.26	-5.62	-54.88	-13.00	41.88	Vertical
1361.00	-49.45	-9.32	-58.77	-13.00	45.77	Horizontal
2041.50	-48.74	-7.93	-56.67	-13.00	43.67	Horizontal
2722.00	-49.65	-5.95	-55.60	-13.00	42.60	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
1376.00	-50.61	-8.76	-59.37	-13.00	46.37	Vertical
2064.00	-49.36	-7.55	-56.91	-13.00	43.91	Vertical
2752.00	-49.21	-5.58	-54.79	-13.00	41.79	Vertical
1376.00	-49.43	-9.23	-58.66	-13.00	45.66	Horizontal
2064.00	-47.89	-7.74	-55.63	-13.00	42.63	Horizontal
2752.00	-49.55	-5.78	-55.33	-13.00	42.33	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3450 MHz – 3550 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-53.27	10.75	-42.52	-13.00	29.52	Vertical
10365.03	-52.71	17.40	-35.31	-13.00	22.31	Vertical
13820.04	-54.79	23.61	-31.18	-13.00	18.18	Vertical
6910.02	-53.85	10.75	-43.10	-13.00	30.10	Horizontal
10365.03	-52.38	17.40	-34.98	-13.00	21.98	Horizontal
13820.04	-53.43	23.61	-29.82	-13.00	16.82	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-52.77	10.51	-42.26	-13.00	29.26	Vertical
10500.00	-53.13	18.37	-34.76	-13.00	21.76	Vertical
14000.00	-54.99	25.38	-29.61	-13.00	16.61	Vertical
7000.00	-53.44	10.51	-42.93	-13.00	29.93	Horizontal
10500.00	-52.80	18.37	-34.43	-13.00	21.43	Horizontal
14000.00	-53.68	25.38	-28.30	-13.00	15.30	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7090.00	-52.39	11.50	-40.89	-13.00	27.89	Vertical
10635.00	-53.55	18.87	-34.68	-13.00	21.68	Vertical
14180.00	-54.75	26.86	-27.89	-13.00	14.89	Vertical
7090.00	-53.20	11.50	-41.70	-13.00	28.70	Horizontal
10635.00	-52.79	18.87	-33.92	-13.00	20.92	Horizontal
14180.00	-53.93	26.86	-27.07	-13.00	14.07	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3450 MHz – 3550 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6950.02	-52.96	10.50	-42.46	-13.00	29.46	Vertical
10425.03	-52.96	17.63	-35.33	-13.00	22.33	Vertical
13900.04	-54.81	24.60	-30.21	-13.00	17.21	Vertical
6950.02	-53.59	10.50	-43.09	-13.00	30.09	Horizontal
10425.03	-52.65	17.63	-35.02	-13.00	22.02	Horizontal
13900.04	-53.36	24.60	-28.76	-13.00	15.76	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-52.86	10.49	-42.37	-13.00	29.37	Vertical
10500.00	-53.14	18.21	-34.93	-13.00	21.93	Vertical
14000.00	-54.51	25.38	-29.13	-13.00	16.13	Vertical
7000.00	-53.18	10.49	-42.69	-13.00	29.69	Horizontal
10500.00	-52.58	18.21	-34.37	-13.00	21.37	Horizontal
14000.00	-53.57	25.38	-28.19	-13.00	15.19	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7050.00	-52.70	11.08	-41.62	-13.00	28.62	Vertical
10575.00	-53.90	18.53	-35.37	-13.00	22.37	Vertical
14100.00	-54.66	26.24	-28.42	-13.00	15.42	Vertical
7050.00	-53.70	11.08	-42.62	-13.00	29.62	Horizontal
10575.00	-52.81	18.53	-34.28	-13.00	21.28	Horizontal
14100.00	-53.83	26.24	-27.59	-13.00	14.59	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3450 MHz – 3550 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-52.77	10.75	-42.02	-13.00	29.02	Vertical
10365.03	-53.77	17.58	-36.19	-13.00	23.19	Vertical
13820.04	-55.61	23.61	-32.00	-13.00	19.00	Vertical
6910.02	-53.38	10.75	-42.63	-13.00	29.63	Horizontal
10365.03	-52.61	17.58	-35.03	-13.00	22.03	Horizontal
13820.04	-54.33	23.61	-30.72	-13.00	17.72	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-52.91	10.49	-42.42	-13.00	29.42	Vertical
10500.03	-53.34	18.21	-35.13	-13.00	22.13	Vertical
14000.04	-55.42	25.38	-30.04	-13.00	17.04	Vertical
7000.02	-53.48	10.49	-42.99	-13.00	29.99	Horizontal
10500.03	-53.03	18.21	-34.82	-13.00	21.82	Horizontal
14000.04	-54.07	25.38	-28.69	-13.00	15.69	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7089.96	-52.57	11.50	-41.07	-13.00	28.07	Vertical
10634.94	-53.49	18.71	-34.78	-13.00	21.78	Vertical
14179.92	-55.84	26.86	-28.98	-13.00	15.98	Vertical
7089.96	-53.84	11.50	-42.34	-13.00	29.34	Horizontal
10634.94	-53.10	18.71	-34.39	-13.00	21.39	Horizontal
14179.92	-53.94	26.86	-27.08	-13.00	14.08	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3450 MHz – 3550 MHz) – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-53.35	10.49	-42.86	-13.00	29.86	Vertical
10500.03	-53.58	18.21	-35.37	-13.00	22.37	Vertical
14000.04	-55.00	25.38	-29.62	-13.00	16.62	Vertical
7000.02	-53.06	10.49	-42.57	-13.00	29.57	Horizontal
10500.03	-52.84	18.21	-34.63	-13.00	21.63	Horizontal
14000.04	-54.14	25.38	-28.76	-13.00	15.76	Horizontal

Remark:

1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

Band n77(3700 MHz – 3980 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-52.18	12.64	-39.54	-13.00	26.54	Vertical
11115.00	-53.20	18.78	-34.42	-13.00	21.42	Vertical
14820.00	-54.61	26.68	-27.93	-13.00	14.93	Vertical
7410.00	-52.98	12.64	-40.34	-13.00	27.34	Horizontal
11115.00	-53.83	18.78	-35.05	-13.00	22.05	Horizontal
14820.00	-54.77	26.68	-28.09	-13.00	15.09	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-52.42	12.84	-39.58	-13.00	26.58	Vertical
11520.00	-52.78	18.50	-34.28	-13.00	21.28	Vertical
15360.00	-54.97	24.94	-30.03	-13.00	17.03	Vertical
7680.00	-52.73	12.84	-39.89	-13.00	26.89	Horizontal
11520.00	-53.40	18.50	-34.90	-13.00	21.90	Horizontal
15360.00	-55.17	24.94	-30.23	-13.00	17.23	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7950.00	-52.26	16.92	-35.34	-13.00	22.34	Vertical
11925.00	-53.19	12.98	-40.21	-13.00	27.21	Vertical
15900.00	-55.14	22.31	-32.83	-13.00	19.83	Vertical
7950.00	-52.63	16.92	-35.71	-13.00	22.71	Horizontal
11925.00	-53.64	12.98	-40.66	-13.00	27.66	Horizontal
15900.00	-55.07	22.31	-32.76	-13.00	19.76	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3700 MHz – 3980 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7450.02	-52.09	12.49	-39.60	-13.00	26.60	Vertical
11175.03	-53.17	18.85	-34.32	-13.00	21.32	Vertical
14900.04	-54.13	26.90	-27.23	-13.00	14.23	Vertical
7450.02	-53.07	12.49	-40.58	-13.00	27.58	Horizontal
11175.03	-53.46	18.85	-34.61	-13.00	21.61	Horizontal
14900.04	-54.28	26.90	-27.38	-13.00	14.38	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-52.04	12.84	-39.20	-13.00	26.20	Vertical
11520.00	-53.19	18.50	-34.69	-13.00	21.69	Vertical
15360.00	-54.89	24.94	-29.95	-13.00	16.95	Vertical
7680.00	-52.65	12.84	-39.81	-13.00	26.81	Horizontal
11520.00	-53.58	18.50	-35.08	-13.00	22.08	Horizontal
15360.00	-55.61	24.94	-30.67	-13.00	17.67	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7909.98	-51.97	17.07	-34.90	-13.00	21.90	Vertical
11864.97	-52.81	17.97	-34.84	-13.00	21.84	Vertical
15819.96	-55.25	18.75	-36.50	-13.00	23.50	Vertical
7909.98	-52.97	17.07	-35.90	-13.00	22.90	Horizontal
11864.97	-54.03	17.97	-36.06	-13.00	23.06	Horizontal
15819.96	-54.58	18.75	-35.83	-13.00	22.83	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3700 MHz – 3980 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-52.62	12.64	-39.98	-13.00	26.98	Vertical
11115.00	-52.72	18.78	-33.94	-13.00	20.94	Vertical
14820.00	-54.52	26.68	-27.84	-13.00	14.84	Vertical
7410.00	-52.49	12.64	-39.85	-13.00	26.85	Horizontal
11115.00	-53.54	18.78	-34.76	-13.00	21.76	Horizontal
14820.00	-54.65	26.68	-27.97	-13.00	14.97	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-52.35	12.84	-39.51	-13.00	26.51	Vertical
11520.00	-52.51	18.50	-34.01	-13.00	21.01	Vertical
15360.00	-55.01	24.94	-30.07	-13.00	17.07	Vertical
7680.00	-52.78	12.84	-39.94	-13.00	26.94	Horizontal
11520.00	-53.7	18.50	-35.20	-13.00	22.20	Horizontal
15360.00	-54.73	24.94	-29.79	-13.00	16.79	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7950.00	-52.36	16.92	-35.44	-13.00	22.44	Vertical
11925.00	-52.86	12.98	-39.88	-13.00	26.88	Vertical
15900.00	-55.55	22.31	-33.24	-13.00	20.24	Vertical
7950.00	-52.76	16.92	-35.84	-13.00	22.84	Horizontal
11925.00	-54.14	12.98	-41.16	-13.00	28.16	Horizontal
15900.00	-55.23	22.31	-32.92	-13.00	19.92	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

Band n77(3700 MHz – 3980 MHz) – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-52.39	12.48	-39.91	-13.00	26.91	Vertical
11250.00	-52.42	19.20	-33.22	-13.00	20.22	Vertical
15000.00	-54.72	25.36	-29.36	-13.00	16.36	Vertical
7500.00	-52.90	12.48	-40.42	-13.00	27.42	Horizontal
11250.00	-54.00	19.20	-34.80	-13.00	21.80	Horizontal
15000.00	-54.24	25.36	-28.88	-13.00	15.88	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-51.91	12.84	-39.07	-13.00	26.07	Vertical
11520.00	-52.86	18.50	-34.36	-13.00	21.36	Vertical
15360.00	-54.91	24.94	-29.97	-13.00	16.97	Vertical
7680.00	-53.26	12.84	-40.42	-13.00	27.42	Horizontal
11520.00	-53.71	18.50	-35.21	-13.00	22.21	Horizontal
15360.00	-54.63	24.94	-29.69	-13.00	16.69	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7860.00	-51.98	13.20	-38.78	-13.00	25.78	Vertical
11790.00	-53.26	18.40	-34.86	-13.00	21.86	Vertical
15720.00	-55.89	20.34	-35.55	-13.00	22.55	Vertical
7860.00	-52.80	13.20	-39.60	-13.00	26.60	Horizontal
11790.00	-53.77	18.40	-35.37	-13.00	22.37	Horizontal
15720.00	-54.84	20.34	-34.50	-13.00	21.50	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3450 MHz – 3550 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-52.43	10.75	-41.68	-13.00	28.68	Vertical
10365.03	-51.56	17.40	-34.16	-13.00	21.16	Vertical
13820.04	-54.31	23.61	-30.70	-13.00	17.70	Vertical
6910.02	-53.40	10.75	-42.65	-13.00	29.65	Horizontal
10365.03	-50.63	17.40	-33.23	-13.00	20.23	Horizontal
13820.04	-54.64	23.61	-31.03	-13.00	18.03	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-51.94	10.51	-41.43	-13.00	28.43	Vertical
10500.00	-51.99	18.37	-33.62	-13.00	20.62	Vertical
14000.00	-54.53	25.38	-29.15	-13.00	16.15	Vertical
7000.00	-53.02	10.51	-42.51	-13.00	29.51	Horizontal
10500.00	-51.06	18.37	-32.69	-13.00	19.69	Horizontal
14000.00	-54.89	25.38	-29.51	-13.00	16.51	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7090.00	-52.34	11.50	-40.84	-13.00	27.84	Vertical
10635.00	-52.20	18.87	-33.33	-13.00	20.33	Vertical
14180.00	-54.06	26.86	-27.20	-13.00	14.20	Vertical
7090.00	-52.55	11.50	-41.05	-13.00	28.05	Horizontal
10635.00	-50.83	18.87	-31.96	-13.00	18.96	Horizontal
14180.00	-54.93	26.86	-28.07	-13.00	15.07	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3450 MHz – 3550 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6950.02	-51.97	10.50	-41.47	-13.00	28.47	Vertical
10425.03	-51.68	17.63	-34.05	-13.00	21.05	Vertical
13900.04	-54.18	24.60	-29.58	-13.00	16.58	Vertical
6950.02	-52.98	10.50	-42.48	-13.00	29.48	Horizontal
10425.03	-50.57	17.63	-32.94	-13.00	19.94	Horizontal
13900.04	-54.25	24.60	-29.65	-13.00	16.65	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-51.80	10.49	-41.31	-13.00	28.31	Vertical
10500.00	-51.77	18.21	-33.56	-13.00	20.56	Vertical
14000.00	-54.82	25.38	-29.44	-13.00	16.44	Vertical
7000.00	-52.54	10.49	-42.05	-13.00	29.05	Horizontal
10500.00	-50.61	18.21	-32.40	-13.00	19.40	Horizontal
14000.00	-54.56	25.38	-29.18	-13.00	16.18	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7050.00	-52.62	11.08	-41.54	-13.00	28.54	Vertical
10575.00	-52.54	18.53	-34.01	-13.00	21.01	Vertical
14100.00	-53.94	26.24	-27.70	-13.00	14.70	Vertical
7050.00	-53.01	11.08	-41.93	-13.00	28.93	Horizontal
10575.00	-50.83	18.53	-32.30	-13.00	19.30	Horizontal
14100.00	-54.81	26.24	-28.57	-13.00	15.57	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3450 MHz – 3550 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-52.70	10.75	-41.95	-13.00	28.95	Vertical
10365.03	-51.90	17.58	-34.32	-13.00	21.32	Vertical
13820.04	-53.87	23.61	-30.26	-13.00	17.26	Vertical
6910.02	-53.57	10.75	-42.82	-13.00	29.82	Horizontal
10365.03	-50.98	17.58	-33.40	-13.00	20.40	Horizontal
13820.04	-54.16	23.61	-30.55	-13.00	17.55	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-51.57	10.49	-41.08	-13.00	28.08	Vertical
10500.03	-52.43	18.21	-34.22	-13.00	21.22	Vertical
14000.04	-54.29	25.38	-28.91	-13.00	15.91	Vertical
7000.02	-52.78	10.49	-42.29	-13.00	29.29	Horizontal
10500.03	-51.06	18.21	-32.85	-13.00	19.85	Horizontal
14000.04	-55.16	25.38	-29.78	-13.00	16.78	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7089.96	-52.07	11.50	-40.57	-13.00	27.57	Vertical
10634.94	-52.51	18.71	-33.80	-13.00	20.80	Vertical
14179.92	-54.12	26.86	-27.26	-13.00	14.26	Vertical
7089.96	-52.32	11.50	-40.82	-13.00	27.82	Horizontal
10634.94	-50.96	18.71	-32.25	-13.00	19.25	Horizontal
14179.92	-54.73	26.86	-27.87	-13.00	14.87	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3450 MHz – 3550 MHz) – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-51.43	10.49	-40.94	-13.00	27.94	Vertical
10500.03	-52.21	18.21	-34.00	-13.00	21.00	Vertical
14000.04	-54.58	25.38	-29.20	-13.00	16.20	Vertical
7000.02	-52.30	10.49	-41.81	-13.00	28.81	Horizontal
10500.03	-50.61	18.21	-32.40	-13.00	19.40	Horizontal
14000.04	-54.82	25.38	-29.44	-13.00	16.44	Horizontal

Remark:
 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

DC_7A_n78 (3700 MHz – 3800 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-51.83	12.64	-39.19	-13.00	26.19	Vertical
11115.00	-52.53	18.78	-33.75	-13.00	20.75	Vertical
14820.00	-54.54	26.68	-27.86	-13.00	14.86	Vertical
7410.00	-51.96	12.64	-39.32	-13.00	26.32	Horizontal
11115.00	-52.10	18.78	-33.32	-13.00	20.32	Horizontal
14820.00	-55.05	26.68	-28.37	-13.00	15.37	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-53.65	12.48	-41.17	-13.00	28.17	Vertical
11250.00	-52.39	19.20	-33.19	-13.00	20.19	Vertical
15000.00	-53.48	25.36	-28.12	-13.00	15.12	Vertical
7500.00	-52.31	12.48	-39.83	-13.00	26.83	Horizontal
11250.00	-52.20	19.20	-33.00	-13.00	20.00	Horizontal
15000.00	-54.88	25.36	-29.52	-13.00	16.52	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7590.00	-52.04	13.18	-38.86	-13.00	25.86	Vertical
11385.00	-52.00	18.42	-33.58	-13.00	20.58	Vertical
15180.00	-54.90	23.31	-31.59	-13.00	18.59	Vertical
7590.00	-51.94	13.18	-38.76	-13.00	25.76	Horizontal
11385.00	-52.01	18.42	-33.59	-13.00	20.59	Horizontal
15180.00	-54.86	23.31	-31.55	-13.00	18.55	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3700 MHz – 3800 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7450.02	-51.86	12.49	-39.37	-13.00	26.37	Vertical
11175.03	-52.80	18.85	-33.95	-13.00	20.95	Vertical
14900.04	-54.57	26.90	-27.67	-13.00	14.67	Vertical
7450.02	-51.72	12.49	-39.23	-13.00	26.23	Horizontal
11175.03	-52.22	18.85	-33.37	-13.00	20.37	Horizontal
14900.04	-54.82	26.90	-27.92	-13.00	14.92	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-52.66	12.48	-40.18	-13.00	27.18	Vertical
11250.00	-52.64	19.20	-33.44	-13.00	20.44	Vertical
15000.00	-54.82	25.36	-29.46	-13.00	16.46	Vertical
7500.00	-52.49	12.48	-40.01	-13.00	27.01	Horizontal
11250.00	-52.43	19.20	-33.23	-13.00	20.23	Horizontal
15000.00	-54.68	25.36	-29.32	-13.00	16.32	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7549.98	-51.88	12.72	-39.16	-13.00	26.16	Vertical
11324.97	-51.88	19.12	-32.76	-13.00	19.76	Vertical
15099.96	-55.34	24.92	-30.42	-13.00	17.42	Vertical
7549.98	-51.97	12.72	-39.25	-13.00	26.25	Horizontal
11324.97	-51.56	19.12	-32.44	-13.00	19.44	Horizontal
15099.96	-55.28	24.92	-30.36	-13.00	17.36	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3700 MHz – 3800 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-52.44	12.64	-39.80	-13.00	26.80	Vertical
11115.00	-52.12	18.78	-33.34	-13.00	20.34	Vertical
14820.00	-54.90	26.68	-28.22	-13.00	15.22	Vertical
7410.00	-52.77	12.64	-40.13	-13.00	27.13	Horizontal
11115.00	-52.36	18.78	-33.58	-13.00	20.58	Horizontal
14820.00	-54.66	26.68	-27.98	-13.00	14.98	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-52.67	12.48	-40.19	-13.00	27.19	Vertical
11250.00	-51.97	19.20	-32.77	-13.00	19.77	Vertical
15000.00	-54.87	25.36	-29.51	-13.00	16.51	Vertical
7500.00	-52.94	12.48	-40.46	-13.00	27.46	Horizontal
11250.00	-51.91	19.20	-32.71	-13.00	19.71	Horizontal
15000.00	-55.03	25.36	-29.67	-13.00	16.67	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7590.00	-53.56	13.18	-40.38	-13.00	27.38	Vertical
11385.00	-52.38	18.42	-33.96	-13.00	20.96	Vertical
15180.00	-53.70	23.31	-30.39	-13.00	17.39	Vertical
7590.00	-52.13	13.18	-38.95	-13.00	25.95	Horizontal
11385.00	-52.19	18.42	-33.77	-13.00	20.77	Horizontal
15180.00	-55.04	23.31	-31.73	-13.00	18.73	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_7A_n78 (3700 MHz – 3800 MHz) – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-53.63	12.48	-41.15	-13.00	28.15	Vertical
11250.00	-52.18	19.20	-32.98	-13.00	19.98	Vertical
15000.00	-53.60	25.36	-28.24	-13.00	15.24	Vertical
7500.00	-52.42	12.48	-39.94	-13.00	26.94	Horizontal
11250.00	-52.55	19.20	-33.35	-13.00	20.35	Horizontal
15000.00	-54.50	25.36	-29.14	-13.00	16.14	Horizontal

Remark:
 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

DC_41A_n77 (3450 MHz – 3550 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-52.69	10.75	-41.94	-13.00	28.94	Vertical
10365.03	-53.14	17.40	-35.74	-13.00	22.74	Vertical
13820.04	-55.61	23.61	-32.00	-13.00	19.00	Vertical
6910.02	-52.26	10.75	-41.51	-13.00	28.51	Horizontal
10365.03	-54.67	17.40	-37.27	-13.00	24.27	Horizontal
13820.04	-55.05	23.61	-31.44	-13.00	18.44	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-52.64	10.51	-42.13	-13.00	29.13	Vertical
10500.00	-53.01	18.37	-34.64	-13.00	21.64	Vertical
14000.00	-55.28	25.38	-29.90	-13.00	16.90	Vertical
7000.00	-52.32	10.51	-41.81	-13.00	28.81	Horizontal
10500.00	-54.27	18.37	-35.90	-13.00	22.90	Horizontal
14000.00	-55.48	25.38	-30.10	-13.00	17.10	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7090.00	-51.57	11.50	-40.07	-13.00	27.07	Vertical
10635.00	-54.55	18.87	-35.68	-13.00	22.68	Vertical
14180.00	-51.99	26.86	-25.13	-13.00	12.13	Vertical
7090.00	-51.87	11.50	-40.37	-13.00	27.37	Horizontal
10635.00	-52.47	18.87	-33.60	-13.00	20.60	Horizontal
14180.00	-51.69	26.86	-24.83	-13.00	11.83	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3450 MHz – 3550 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6950.02	-52.67	10.50	-42.17	-13.00	29.17	Vertical
10425.03	-52.92	17.63	-35.29	-13.00	22.29	Vertical
13900.04	-55.73	24.60	-31.13	-13.00	18.13	Vertical
6950.02	-52.38	10.50	-41.88	-13.00	28.88	Horizontal
10425.03	-54.27	17.63	-36.64	-13.00	23.64	Horizontal
13900.04	-54.90	24.60	-30.30	-13.00	17.30	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.00	-52.57	10.49	-42.08	-13.00	29.08	Vertical
10500.00	-53.50	18.21	-35.29	-13.00	22.29	Vertical
14000.00	-55.19	25.38	-29.81	-13.00	16.81	Vertical
7000.00	-51.95	10.49	-41.46	-13.00	28.46	Horizontal
10500.00	-54.27	18.21	-36.06	-13.00	23.06	Horizontal
14000.00	-55.14	25.38	-29.76	-13.00	16.76	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7050.00	-51.67	11.08	-40.59	-13.00	27.59	Vertical
10575.00	-54.57	18.53	-36.04	-13.00	23.04	Vertical
14100.00	-52.44	26.24	-26.20	-13.00	13.20	Vertical
7050.00	-51.54	11.08	-40.46	-13.00	27.46	Horizontal
10575.00	-52.20	18.53	-33.67	-13.00	20.67	Horizontal
14100.00	-51.53	26.24	-25.29	-13.00	12.29	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3450 MHz – 3550 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
6910.02	-51.49	10.75	-40.74	-13.00	27.74	Vertical
10365.03	-54.70	17.58	-37.12	-13.00	24.12	Vertical
13820.04	-51.70	23.61	-28.09	-13.00	15.09	Vertical
6910.02	-52.17	10.75	-41.42	-13.00	28.42	Horizontal
10365.03	-52.30	17.58	-34.72	-13.00	21.72	Horizontal
13820.04	-51.39	23.61	-27.78	-13.00	14.78	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-51.54	10.49	-41.05	-13.00	28.05	Vertical
10500.03	-54.53	18.21	-36.32	-13.00	23.32	Vertical
14000.04	-51.47	25.38	-26.09	-13.00	13.09	Vertical
7000.02	-52.64	10.49	-42.15	-13.00	29.15	Horizontal
10500.03	-52.35	18.21	-34.14	-13.00	21.14	Horizontal
14000.04	-51.42	25.38	-26.04	-13.00	13.04	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7089.96	-51.77	11.50	-40.27	-13.00	27.27	Vertical
10634.94	-54.57	18.71	-35.86	-13.00	22.86	Vertical
14179.92	-51.59	26.86	-24.73	-13.00	11.73	Vertical
7089.96	-52.19	11.50	-40.69	-13.00	27.69	Horizontal
10634.94	-52.61	18.71	-33.90	-13.00	20.90	Horizontal
14179.92	-51.32	26.86	-24.46	-13.00	11.46	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3450 MHz – 3550 MHz) – SCS 30kHz						
100MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7000.02	-51.24	10.49	-40.75	-13.00	27.75	Vertical
10500.03	-54.85	18.21	-36.64	-13.00	23.64	Vertical
14000.04	-51.89	25.38	-26.51	-13.00	13.51	Vertical
7000.02	-52.27	10.49	-41.78	-13.00	28.78	Horizontal
10500.03	-52.37	18.21	-34.16	-13.00	21.16	Horizontal
14000.04	-51.25	25.38	-25.87	-13.00	12.87	Horizontal

Remark:
 1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.

DC_41A_n77 (3700 MHz – 3800 MHz) – SCS 15kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-52.03	12.64	-39.39	-13.00	26.39	Vertical
11115.00	-51.60	18.78	-32.82	-13.00	19.82	Vertical
14820.00	-56.47	26.68	-29.79	-13.00	16.79	Vertical
7410.00	-52.90	12.64	-40.26	-13.00	27.26	Horizontal
11115.00	-53.66	18.78	-34.88	-13.00	21.88	Horizontal
14820.00	-56.51	26.68	-29.83	-13.00	16.83	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-52.14	12.84	-39.30	-13.00	26.30	Vertical
11520.00	-51.62	18.50	-33.12	-13.00	20.12	Vertical
15360.00	-56.28	24.94	-31.34	-13.00	18.34	Vertical
7680.00	-53.12	12.84	-40.28	-13.00	27.28	Horizontal
11520.00	-53.69	18.50	-35.19	-13.00	22.19	Horizontal
15360.00	-56.36	24.94	-31.42	-13.00	18.42	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7950.00	-52.23	16.92	-35.31	-13.00	22.31	Vertical
11925.00	-51.51	12.98	-38.53	-13.00	25.53	Vertical
15900.00	-56.49	22.31	-34.18	-13.00	21.18	Vertical
7950.00	-53.33	16.92	-36.41	-13.00	23.41	Horizontal
11925.00	-54.15	12.98	-41.17	-13.00	28.17	Horizontal
15900.00	-56.08	22.31	-33.77	-13.00	20.77	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3700 MHz – 3800 MHz) – SCS 15kHz						
50MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7450.02	-52.23	12.49	-39.74	-13.00	26.74	Vertical
11175.03	-51.33	18.85	-32.48	-13.00	19.48	Vertical
14900.04	-56.91	26.90	-30.01	-13.00	17.01	Vertical
7450.02	-53.39	12.49	-40.90	-13.00	27.90	Horizontal
11175.03	-53.45	18.85	-34.60	-13.00	21.60	Horizontal
14900.04	-56.66	26.90	-29.76	-13.00	16.76	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-52.60	12.84	-39.76	-13.00	26.76	Vertical
11520.00	-51.69	18.50	-33.19	-13.00	20.19	Vertical
15360.00	-55.81	24.94	-30.87	-13.00	17.87	Vertical
7680.00	-53.55	12.84	-40.71	-13.00	27.71	Horizontal
11520.00	-53.58	18.50	-35.08	-13.00	22.08	Horizontal
15360.00	-56.05	24.94	-31.11	-13.00	18.11	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7909.98	-52.23	17.07	-35.16	-13.00	22.16	Vertical
11864.97	-51.25	17.97	-33.28	-13.00	20.28	Vertical
15819.96	-56.48	18.75	-37.73	-13.00	24.73	Vertical
7909.98	-53.58	17.07	-36.51	-13.00	23.51	Horizontal
11864.97	-54.05	17.97	-36.08	-13.00	23.08	Horizontal
15819.96	-56.55	18.75	-37.80	-13.00	24.80	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3700 MHz – 3800 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7410.00	-51.95	12.64	-39.31	-13.00	26.31	Vertical
11115.00	-51.53	18.78	-32.75	-13.00	19.75	Vertical
14820.00	-55.70	26.68	-29.02	-13.00	16.02	Vertical
7410.00	-52.81	12.64	-40.17	-13.00	27.17	Horizontal
11115.00	-53.48	18.78	-34.70	-13.00	21.70	Horizontal
14820.00	-56.75	26.68	-30.07	-13.00	17.07	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-51.77	12.84	-38.93	-13.00	25.93	Vertical
11520.00	-51.58	18.50	-33.08	-13.00	20.08	Vertical
15360.00	-55.8	24.94	-30.86	-13.00	17.86	Vertical
7680.00	-53.2	12.84	-40.36	-13.00	27.36	Horizontal
11520.00	-53.30	18.50	-34.80	-13.00	21.80	Horizontal
15360.00	-56.6	24.94	-31.66	-13.00	18.66	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7950.00	-51.70	16.92	-34.78	-13.00	21.78	Vertical
11925.00	-51.32	12.98	-38.34	-13.00	25.34	Vertical
15900.00	-55.63	22.31	-33.32	-13.00	20.32	Vertical
7950.00	-53.46	16.92	-36.54	-13.00	23.54	Horizontal
11925.00	-53.26	12.98	-40.28	-13.00	27.28	Horizontal
15900.00	-56.20	22.31	-33.89	-13.00	20.89	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

DC_41A_n77 (3700 MHz – 3800 MHz) – SCS 30kHz						
10MHz(Edge_1RB_Left) for DFT-s-OFDM Pi/2 BPSK						
Lowest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7500.00	-51.12	12.48	-38.64	-13.00	25.64	Vertical
11250.00	-50.33	19.20	-31.13	-13.00	18.13	Vertical
15000.00	-54.67	25.36	-29.31	-13.00	16.31	Vertical
7500.00	-53.67	12.48	-41.19	-13.00	28.19	Horizontal
11250.00	-53.91	19.20	-34.71	-13.00	21.71	Horizontal
15000.00	-56.47	25.36	-31.11	-13.00	18.11	Horizontal
Middle channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7680.00	-51.30	12.84	-38.46	-13.00	25.46	Vertical
11520.00	-50.75	18.50	-32.25	-13.00	19.25	Vertical
15360.00	-55.08	24.94	-30.14	-13.00	17.14	Vertical
7680.00	-53.41	12.84	-40.57	-13.00	27.57	Horizontal
11520.00	-53.72	18.50	-35.22	-13.00	22.22	Horizontal
15360.00	-56.32	24.94	-31.38	-13.00	18.38	Horizontal
Highest channel						
Frequency (MHz)	Reading Level (dBm)	Factor (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	Polarization
7860.00	-51.68	13.20	-38.48	-13.00	25.48	Vertical
11790.00	-51.10	18.40	-32.70	-13.00	19.70	Vertical
15720.00	-55.52	20.34	-35.18	-13.00	22.18	Vertical
7860.00	-53.56	13.20	-40.36	-13.00	27.36	Horizontal
11790.00	-53.75	18.40	-35.35	-13.00	22.35	Horizontal
15720.00	-56.50	20.34	-36.16	-13.00	23.16	Horizontal
Remark:						
1. The emission levels of below 1 GHz are lower than the limit 10dB, so not show in test report.						

-----End of report-----