

FCC RF Test Report

(NFC)

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: CI8n

Trade Mark: TECNO

FCC ID: 2ADYY-CI8N

Applicable standards: FCC CFR Title 47 Part 15C (§15.225)

Date of sample receipt: 25 Feb., 2022

Date of Test: 26 Feb., to 01 Apr., 2022

Date of report issue: 02 Apr., 2022

Test Result: PASS

Tested by: Mike OU

Date: 02 Apr., 2022

Reviewed by: Wenwen Zhang

Date: 02 Apr., 2022

Approved by: Wenwen Zhang

Date: 02 Apr., 2022



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	02 Apr., 2022	Original

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	GENERAL INFORMATION.....	4
4.1	CLIENT INFORMATION.....	4
4.2	GENERAL DESCRIPTION OF E.U.T.....	4
4.3	TEST MODE AND ENVIRONMENT	5
4.4	DESCRIPTION OF SUPPORT UNITS.....	5
4.5	MEASUREMENT UNCERTAINTY.....	5
4.6	ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	5
4.7	LABORATORY FACILITY.....	5
4.8	LABORATORY LOCATION	6
4.9	TEST INSTRUMENTS LIST.....	6
5	MEASUREMENT SETUP AND PROCEDURE	7
5.1	TEST SETUP	7
5.2	TEST PROCEDURE	8
6	TEST RESULTS.....	9
6.1	SUMMARY	9
6.1.1	Clause and data summary.....	9
6.1.2	Test Limit.....	10
6.2	ANTENNA REQUIREMENT	11
6.3	CONDUCTED EMISSION	12
6.4	20dB BANDWIDTH.....	14
6.5	FIELD STRENGTH EMISSIONS.....	15
6.6	FREQUENCY TOLERANCE.....	21

4 General Information

4.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Manufacturer:	TECNO MOBILE LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

4.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	CI8n
Operation Frequency:	13.56MHz
Channel numbers:	1
Modulation type:	ASK
Antenna Type:	Induction Coil Antenna
Power supply:	Rechargeable Li-ion polymer Battery DC3.87V, 4900mAh
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

4.3 Test Mode and Environment

Test mode:			
Transmitting mode:	Keep the EUT in transmitting mode with modulation		
The EUT was placed on three different polar directions tested: i.e. X axis, Y axis, Z axis. which was shown in this test report and defined as follows:			
Axis	X	Y	Z
Field Strength(dBuV/m)	48.78	49.20	60.33
According to ANSI C63.10 standards, the test results are both the "worst case" and "worst setup": Y axis (see the test setup photo).			
Operating Environment:			
Temperature:	15°C ~ 35°C		
Humidity:	20 % ~ 75 % RH		
Atmospheric Pressure:	1010 mbar		

4.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
SHENZHEN HONOR ELECTRONIC CO., LDT.	AC ADAPTER	ADS-65H1-19A-2	200310110000128	N/A

4.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (9kHz ~ 30MHz) (3m SAC)	±3.13 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	±5.34 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.6 Additions to, Deviations, or Exclusions From the Method

No

4.7 Laboratory Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC - Designation No.: CN1211 JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551. ● ISED – CAB identifier.: CN0021 The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1. ● CNAS - Registration No.: CNAS L15527 JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527. ● A2LA - Registration No.: 4346.01 This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: https://portal.a2la.org/scopepdf/4346-01.pdf
--

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments list


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	01-19-2021	01-18-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	06-20-2021	06-19-2022
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	06-18-2021	06-17-2022
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXG001-7	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXG001-3	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXG001-9	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	03-03-2021	03-02-2022
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	11-27-2021	11-26-2022
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	04-06-2021	04-05-2022
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Coaxial Cable (9kHz ~ 30MHz)	JYT	JYT3M-1G-BB-5M	WXG001-6	03-07-2021	03-06-2022
				02-17-2022	02-16-2023
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI 3	WXJ003	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
RF Switch	TOP PRECISION	RSU0301	WXG003	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
LISN	Rohde & Schwarz	ENV432	WXJ005-2	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	06-18-2021	06-17-2022
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	03-03-2021	03-02-2022
				02-17-2022	02-16-2023
Test Software	AUDIX	E3	Version: 6.110919b		

5 Measurement setup and procedure

5.1 Test setup


1) Conducted emission measurement:

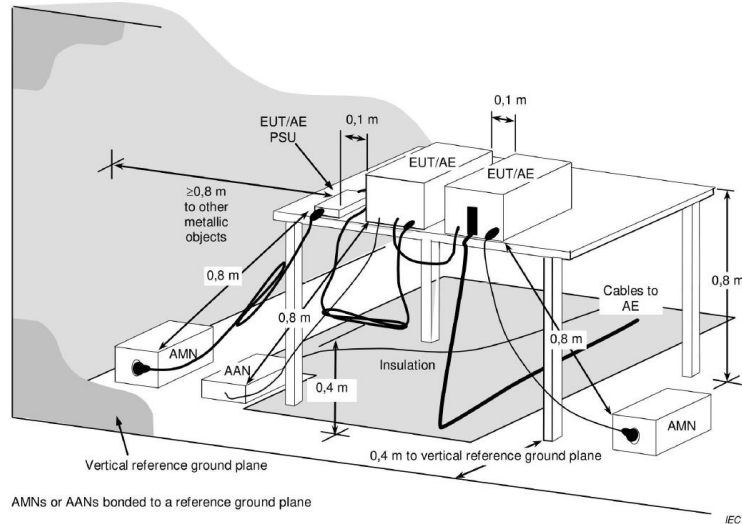


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.


2) Radiated emission measurement:

9kHz ~ 30 MHz (3m SAC)

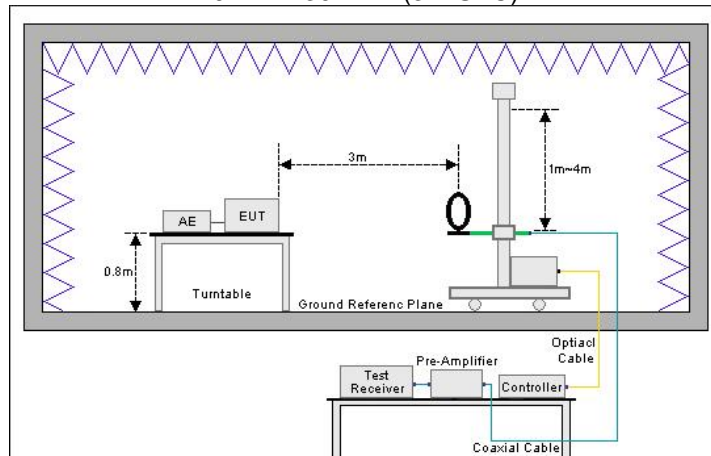

30 MHz ~ 1GHz (3m SAC)

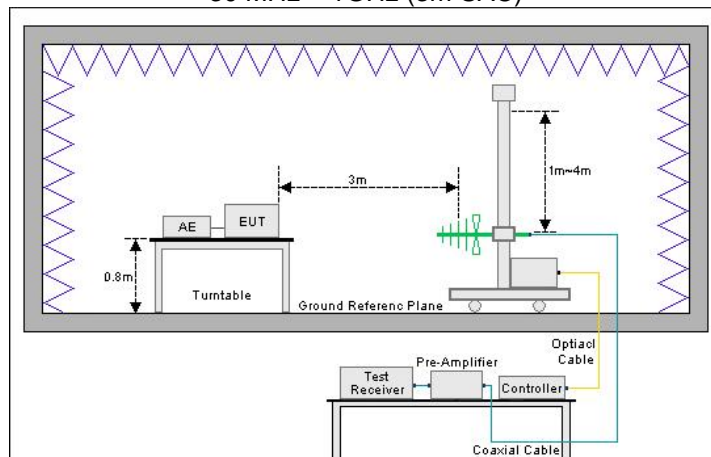

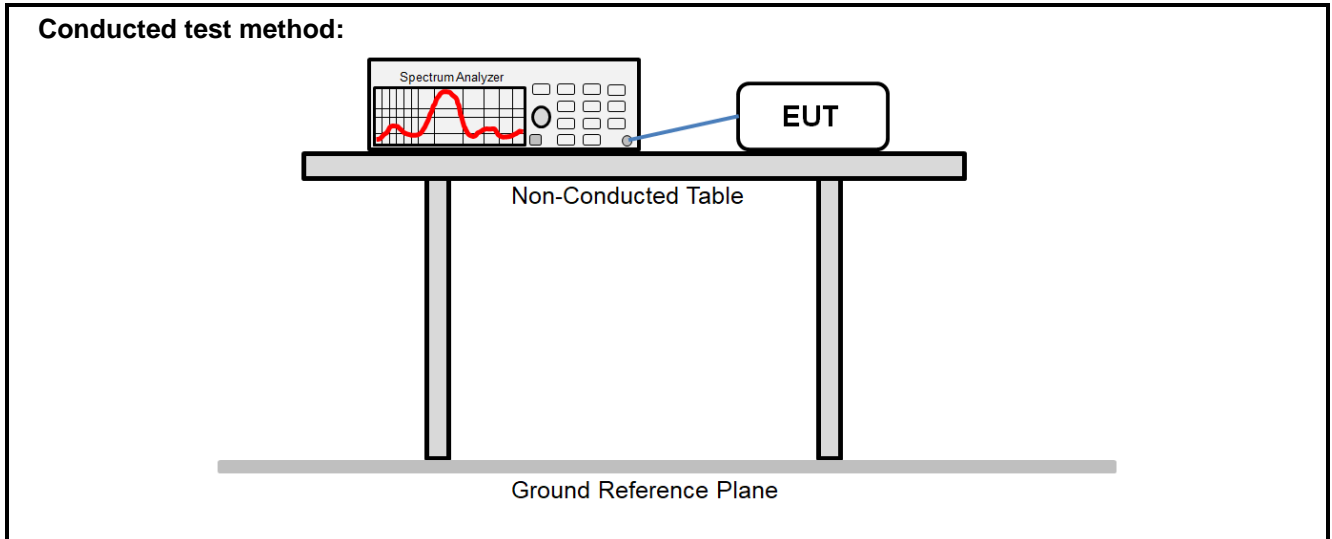

5.2 Test procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	<ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	<ol style="list-style-type: none"> 1. The antenna port of EUT was connected to the RF port of the spectrum analyzer through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. The test data is saved by the screenshot function of the spectrum analyzer.

6 Test Results

6.1 Summary

6.1.1 Clause and data summary

Test Items	FCC Part Section(s)	Test Data	Result
Antenna Requirement	15.203	See Section 6.2	Pass
Conducted Emission	15.207	See Section 6.3	Pass
20dB Bandwidth	15.215(c)	See Section 6.4	Pass
Field strength emissions	15.209 15.225 (a)(b)(c)(d)	See Section 6.5	Pass
Frequency tolerance	15.225 (e)	See Section 6.6	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable.			
Test Method:	ANSI C63.4-2014 ANSI C63.10-2013		

6.1.2 Test Limit


Items	Limit																								
Conducted Emission	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* Decreases with the logarithm of the frequency.</p>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50										
Frequency range (MHz)	Limit (dBuV)																								
	Quasi-peak	Average																							
0.15-0.5	66 to 56*	56 to 46*																							
0.5-5	56	46																							
5-30	60	50																							
20dB Bandwidth	N/A																								
Field strength emissions	<p>(a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.</p> <table border="1"> <thead> <tr> <th>Frequency (MHz)</th> <th>Field strength (microvolts/meter)</th> <th>Measurement distance (meters)</th> </tr> </thead> <tbody> <tr> <td>0.009 – 0.490</td> <td>2400/F(kHz)</td> <td>300</td> </tr> <tr> <td>0.490 – 1.705</td> <td>24000/F(kHz)</td> <td>30</td> </tr> <tr> <td>1.705 – 30.0</td> <td>30</td> <td>30</td> </tr> <tr> <td>30.0 – 88.0</td> <td>100**</td> <td>3</td> </tr> <tr> <td>88.0 – 216.0</td> <td>150**</td> <td>3</td> </tr> <tr> <td>216.0 – 960.0</td> <td>200**</td> <td>3</td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> </tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p>	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009 – 0.490	2400/F(kHz)	300	0.490 – 1.705	24000/F(kHz)	30	1.705 – 30.0	30	30	30.0 – 88.0	100**	3	88.0 – 216.0	150**	3	216.0 – 960.0	200**	3	Above 960	500	3
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																							
0.009 – 0.490	2400/F(kHz)	300																							
0.490 – 1.705	24000/F(kHz)	30																							
1.705 – 30.0	30	30																							
30.0 – 88.0	100**	3																							
88.0 – 216.0	150**	3																							
216.0 – 960.0	200**	3																							
Above 960	500	3																							
Frequency tolerance	The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to $+ 50$ degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.																								

6.2 Antenna Requirement

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement:	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
E.U.T Antenna:	The EUT make use of an induction coil antenna.

6.3 Conducted Emission

Product name:	Mobile Phone	Product model:	CI8n
Test by:	Mike	Test mode:	NFC Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

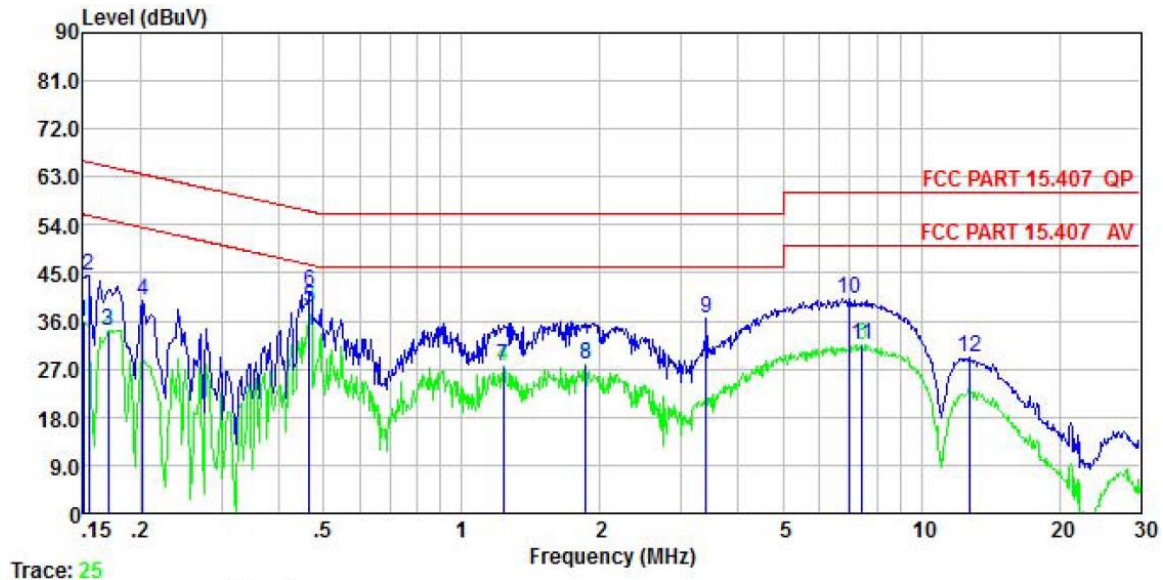


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	35.83	0.04	0.01	35.88	56.00	-20.12	Average
2	0.154	44.60	0.04	0.01	44.65	65.78	-21.13	QP
3	0.170	34.23	0.04	0.01	34.28	54.94	-20.66	Average
4	0.202	39.88	0.04	0.04	39.96	63.54	-23.58	QP
5	0.466	38.47	0.04	0.03	38.54	46.58	-8.04	Average
6	0.466	41.53	0.04	0.03	41.60	56.58	-14.98	QP
7	1.229	27.35	0.06	0.10	27.51	46.00	-18.49	Average
8	1.858	27.64	0.07	0.19	27.90	46.00	-18.10	Average
9	3.399	36.47	0.10	0.07	36.64	56.00	-19.36	QP
10	6.951	40.00	0.15	0.10	40.25	60.00	-19.75	QP
11	7.446	31.40	0.16	0.10	31.66	50.00	-18.34	Average
12	12.784	28.76	0.25	0.11	29.12	60.00	-30.88	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	CI8n
Test by:	Mike	Test mode:	NFC Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

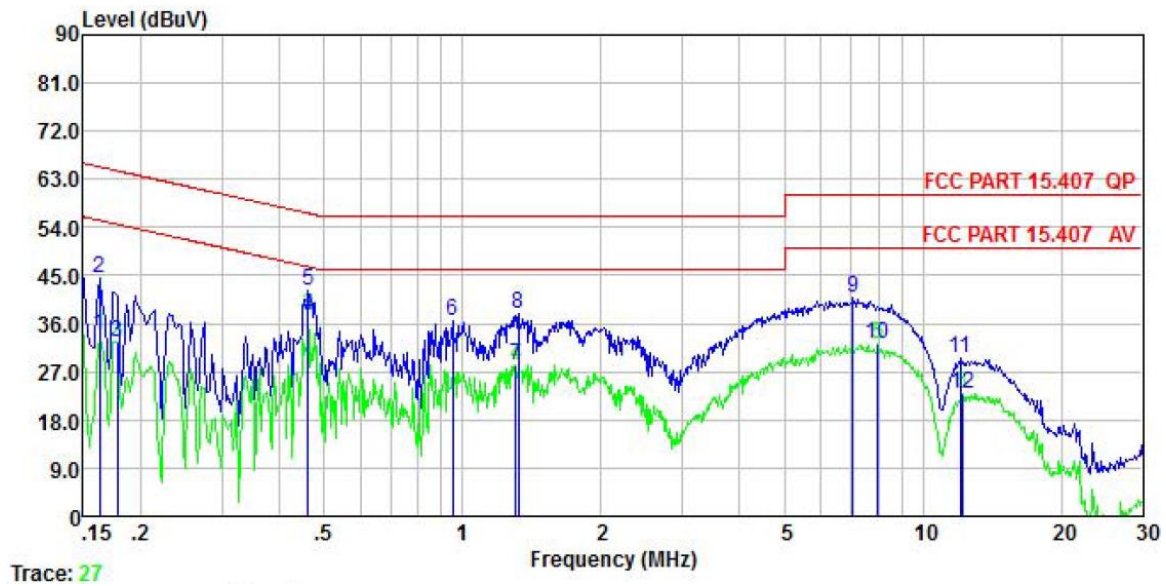

Trace: 27

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	33.83	0.05	0.01	33.89	55.34	-21.45	Average
2	0.162	44.56	0.05	0.01	44.62	65.34	-20.72	QP
3	0.178	32.55	0.04	0.01	32.60	54.59	-21.99	Average
4	0.461	37.40	0.04	0.03	37.47	46.67	-9.20	Average
5	0.461	41.99	0.04	0.03	42.06	56.67	-14.61	QP
6	0.953	36.39	0.05	0.05	36.49	56.00	-19.51	QP
7	1.303	28.15	0.05	0.11	28.31	46.00	-17.69	Average
8	1.324	37.68	0.05	0.11	37.84	56.00	-18.16	QP
9	7.062	40.65	0.14	0.10	40.89	60.00	-19.11	QP
10	7.977	31.83	0.16	0.10	32.09	50.00	-17.91	Average
11	12.060	29.16	0.22	0.10	29.48	60.00	-30.52	QP
12	12.188	22.70	0.22	0.10	23.02	50.00	-26.98	Average

Remark:


1. Level = Read level + LISN Factor + Cable Loss.

6.4 20dB Bandwidth

20dB bandwidth (kHz)	Limit (kHz)	Results
0.79	11.2	Passed

Note: For 13.56MHz, permitted Band is 14 kHz, so the Limit is 11.2 kHz.


Test plot as follows:

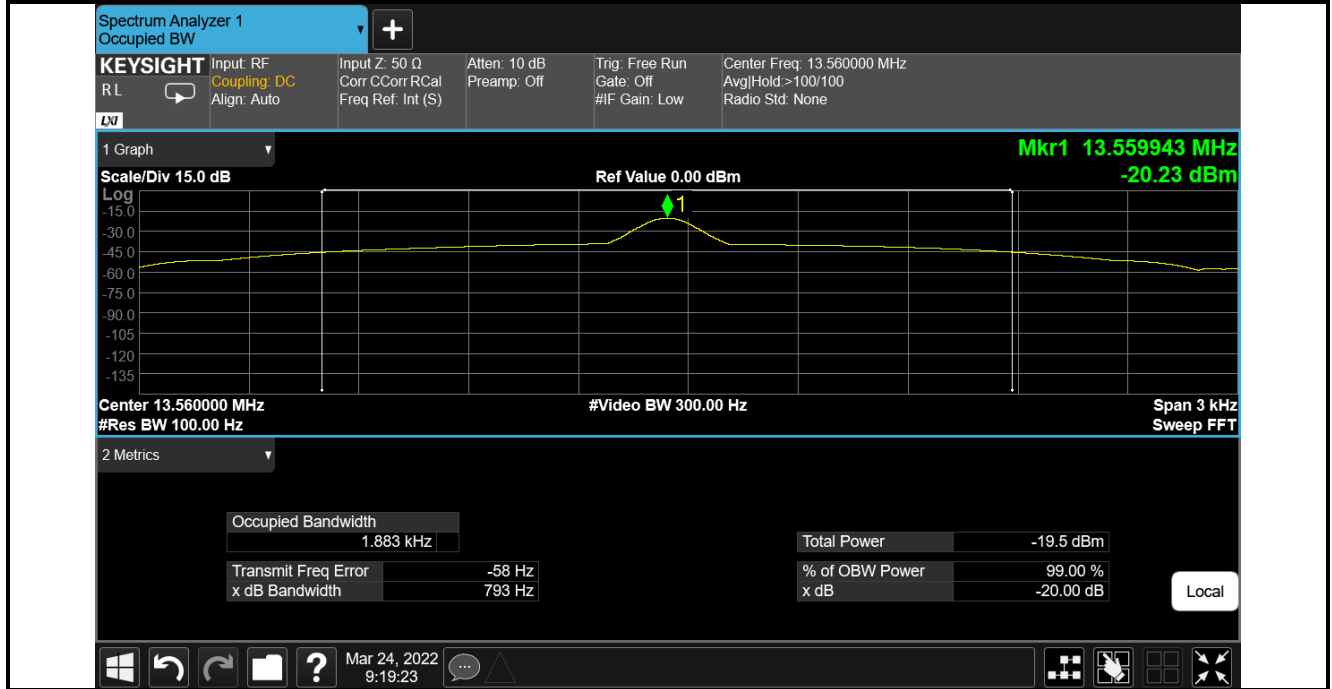

6.5 Field Strength Emissions

Field Strength of fundamental signal:

Product Name:	Mobile Phone	Product Model:	Cl8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Voltage:	AC 120/60Hz	Polarization:	Vertical

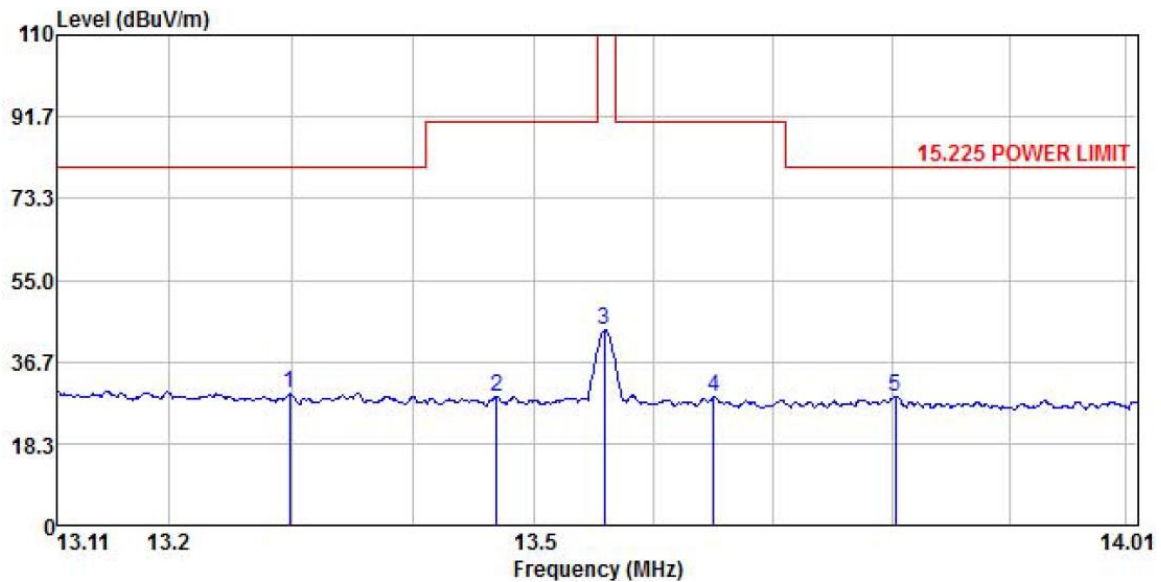


	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	9.42	19.63	0.40	0.00	29.45	80.50	-51.05	
2	8.72	19.61	0.41	0.00	28.74	90.50	-61.76	
3	23.80	19.59	0.41	0.00	43.80	124.00	-80.20	
4	8.65	19.57	0.42	0.00	28.64	90.50	-61.86	
5	8.91	19.54	0.43	0.00	28.88	80.50	-51.62	

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.

Product Name:	Mobile Phone	Product Model:	Cl8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Voltage:	AC 120/60Hz	Polarization:	Horizontal

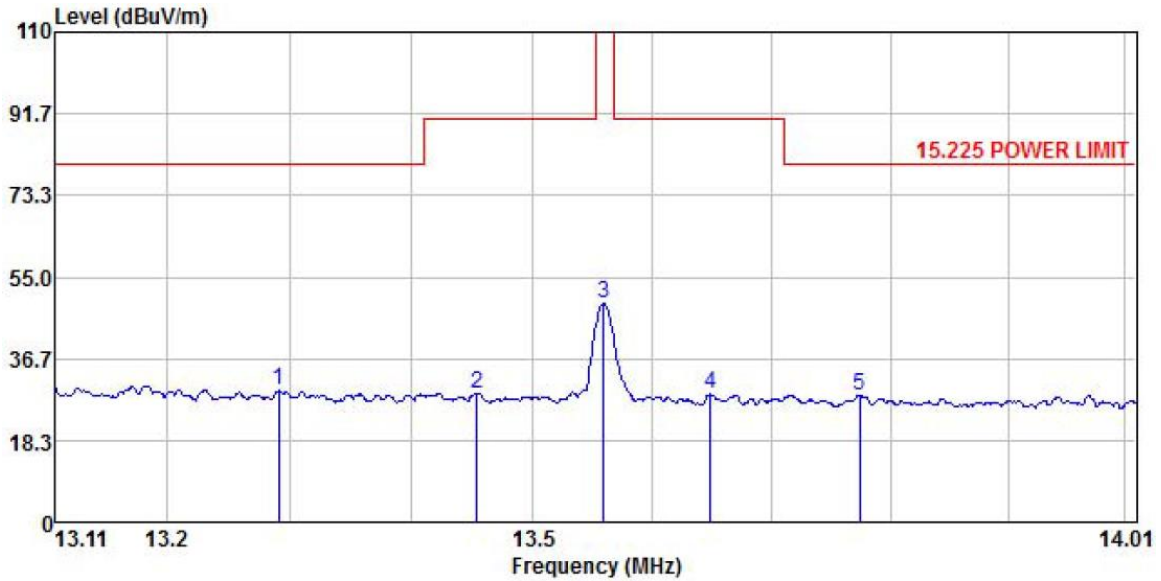


	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	13.291	9.41	19.63	0.40	0.00	29.44	80.50	-51.06
2	13.454	8.84	19.61	0.41	0.00	28.86	90.50	-61.64
3	13.559	29.20	19.59	0.41	0.00	49.20	124.00	-74.80
4	13.648	8.63	19.57	0.42	0.00	28.62	90.50	-61.88
5	13.774	8.56	19.54	0.43	0.00	28.53	80.50	-51.97

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

Spurious Emissions:

Product Name:	Mobile Phone	Product Model:	Cl8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Frequency:	150 kHz – 30 MHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

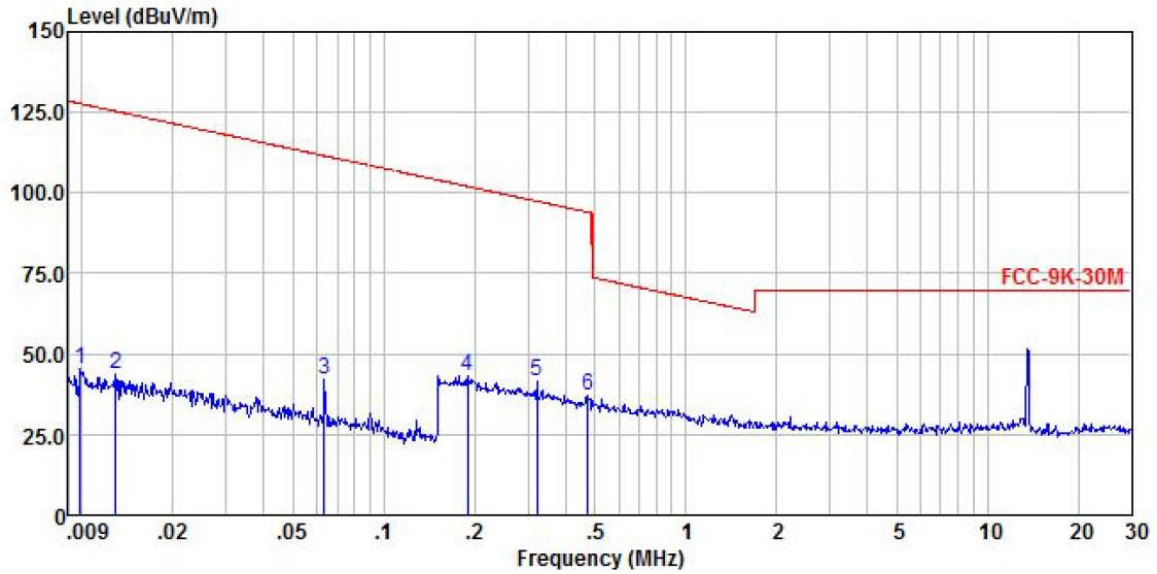


	Read	Antenna	Cable	Preamp	Limit	Over	
Freq	Level	Factor	Loss	Factor	Line	Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	0.010	25.07	20.47	0.01	0.00	45.55	127.72 -82.17
2	0.013	23.19	20.43	0.01	0.00	43.63	125.33 -81.70
3	0.064	21.70	20.53	0.02	0.00	42.25	111.52 -69.27
4	0.190	23.01	20.32	0.04	0.00	43.37	102.04 -58.67
5	0.322	20.90	20.58	0.06	0.00	41.54	97.45 -55.91
6	0.475	15.98	20.78	0.07	0.00	36.83	94.07 -57.24

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of 9 kHz~150 kHz are background noise and very lower than the limit, so not show in test report.

Product Name:	Mobile Phone	Product Model:	Cl8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Frequency:	150 kHz – 30 MHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

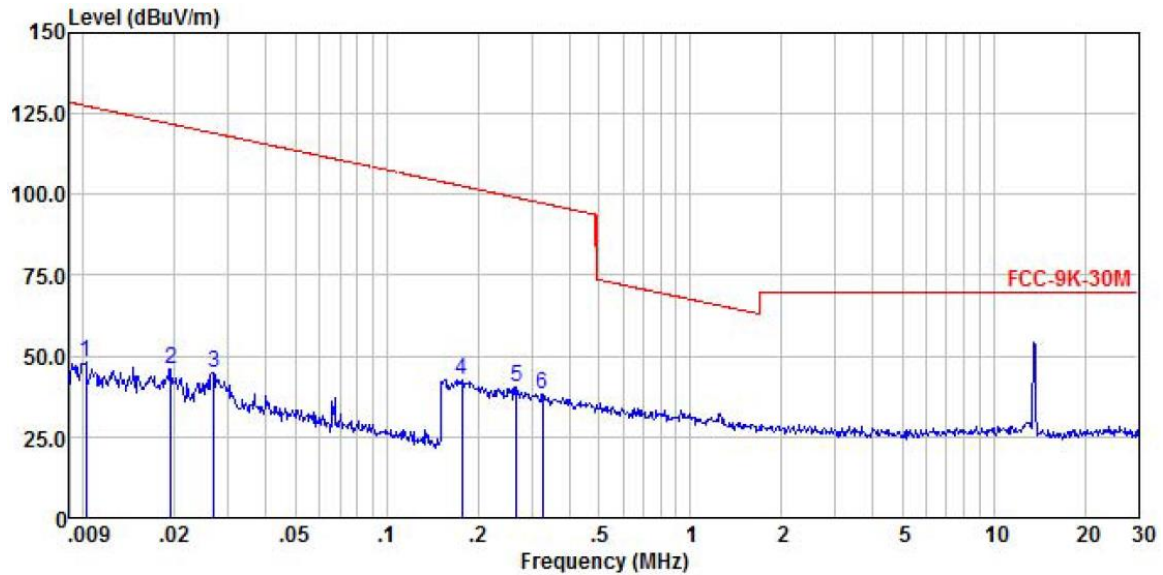


	Read Freq	Antenna Level	Cable Factor	Preamp Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	0.010	27.39	20.50	0.01	0.00	47.90	127.44	-79.54	
2	0.019	25.71	20.32	0.01	0.00	46.04	121.81	-75.77	
3	0.027	24.43	20.23	0.01	0.00	44.67	118.99	-74.32	
4	0.177	22.26	20.28	0.04	0.00	42.58	102.68	-60.10	
5	0.267	19.73	20.49	0.05	0.00	40.27	99.08	-58.81	
6	0.327	17.44	20.59	0.06	0.00	38.09	97.31	-59.22	

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of 9 kHz–150 kHz are background noise and very lower than the limit, so not show in test report.

Product Name:	Mobile Phone	Product Model:	CI8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Frequency:	30MHz – 1GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

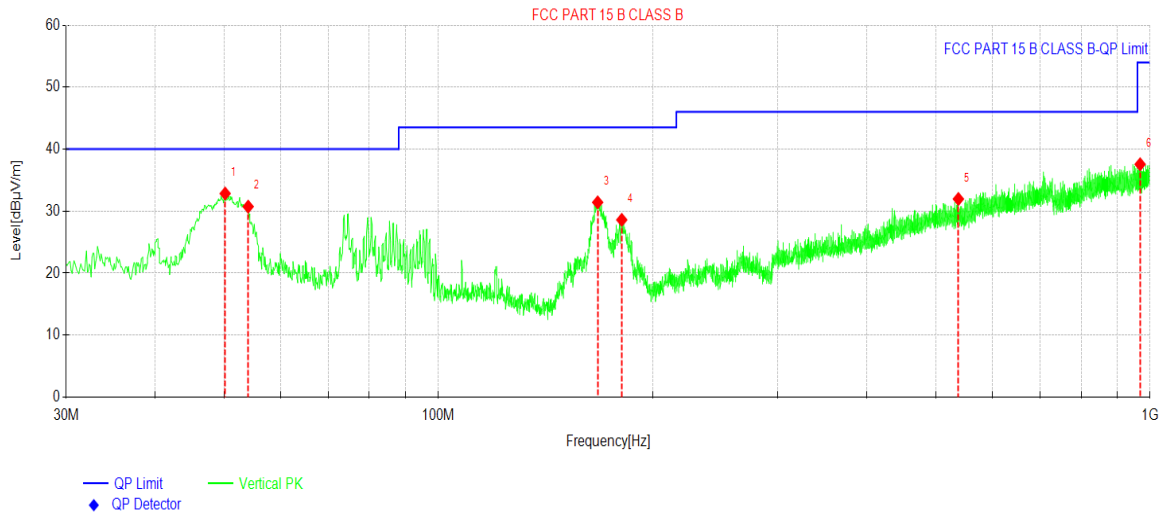


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	50.1780	47.55	32.84	-14.71	40.00	7.16	PK	Vertical
2	54.0584	45.36	30.73	-14.63	40.00	9.27	PK	Vertical
3	167.462	48.52	31.42	-17.10	43.50	12.08	PK	Vertical
4	181.044	45.28	28.60	-16.68	43.50	14.90	PK	Vertical
5	537.942	38.77	31.96	-6.81	46.00	14.04	PK	Vertical
6	968.471	38.43	37.56	-0.87	54.00	16.44	PK	Vertical

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

Product Name:	Mobile Phone	Product Model:	CI8n
Test By:	Mike	Test mode:	NFC Tx mode
Test Frequency:	30MHz – 1GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

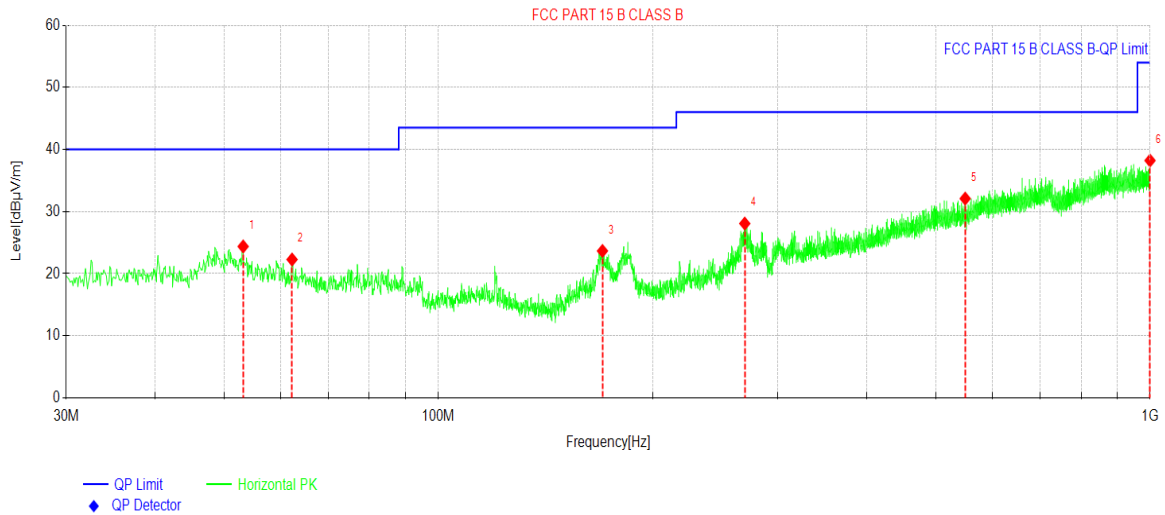

NO.	Freq. [MHz]	Reading[dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	53.1853	39.03	24.38	-14.65	40.00	15.62	PK	Horizontal
2	62.3042	37.58	22.28	-15.30	40.00	17.72	PK	Horizontal
3	170.082	40.66	23.66	-17.00	43.50	19.84	PK	Horizontal
4	269.517	41.56	28.07	-13.49	46.00	17.93	PK	Horizontal
5	549.875	38.98	32.09	-6.89	46.00	13.91	PK	Horizontal
6	999.903	38.75	38.22	-0.53	54.00	15.78	PK	Horizontal

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

6.6 Frequency Tolerance

Frequency stability V.S. Temperature measurement:

Voltage (Vdc)	Temperature (°C)	Frequency Tolerance (MHz)	Frequency Error (%)	Limit (%)	Results
3.87	-20	-0.000078	-0.0006	±0.01	Pass
	-10	-0.000063	-0.0005	±0.01	Pass
	0	-0.000079	-0.0006	±0.01	Pass
	+10	0.000071	0.0005	±0.01	Pass
	+20	-0.000058	-0.0004	±0.01	Pass
	+30	-0.000069	-0.0005	±0.01	Pass
	+40	0.000045	0.0003	±0.01	Pass
	+50	-0.000070	-0.0005	±0.01	Pass

Frequency stability V.S. Voltage measurement:

Temperature (°C)	Voltage (Vdc)	Frequency Tolerance (MHz)	Frequency Error (%)	Limit (%)	Results
25.0	3.50	-0.000068	-0.0005	±0.01	Pass
	3.87	-0.000062	-0.0005	±0.01	Pass
	4.45	0.000039	0.0003	±0.01	Pass

-----End of report-----