




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant13	2.922	30	Pass
NVNT	BLE	2442	Ant13	5.216	30	Pass
NVNT	BLE	2480	Ant13	4.22	30	Pass



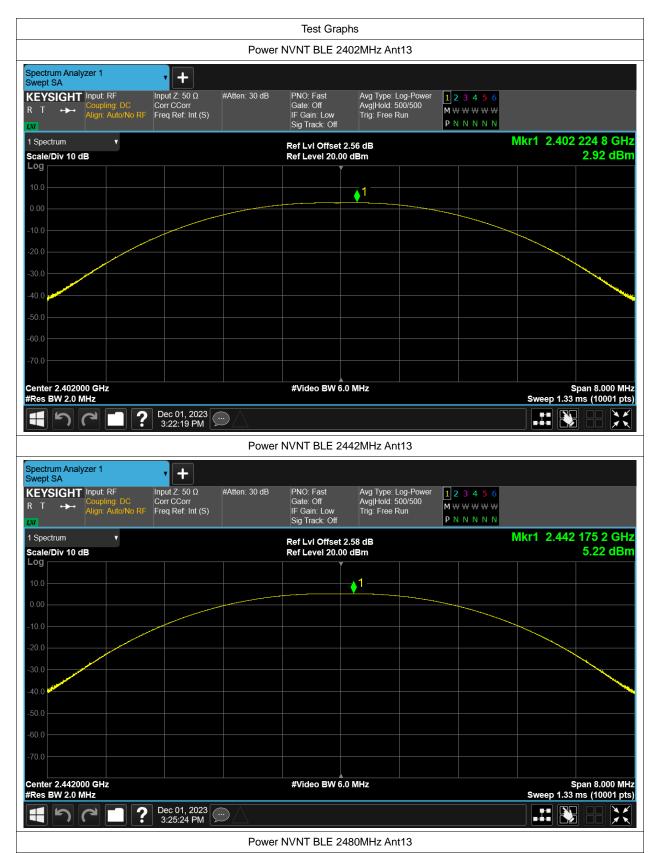









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant13	0.692	0.5	Pass
NVNT	BLE	2442	Ant13	0.693	0.5	Pass
NVNT	BLE	2480	Ant13	0.692	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant13	1.061	
NVNT	BLE	2442	Ant13	1.063	
NVNT	BLE	2480	Ant13	1.063	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant13	-3.376	8	Pass
NVNT	BLE	2442	Ant13	-1.062	8	Pass
NVNT	BLE	2480	Ant13	-2.055	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant13	-55.46	-20	Pass
NVNT	BLE	2480	Ant13	-57.15	-20	Pass



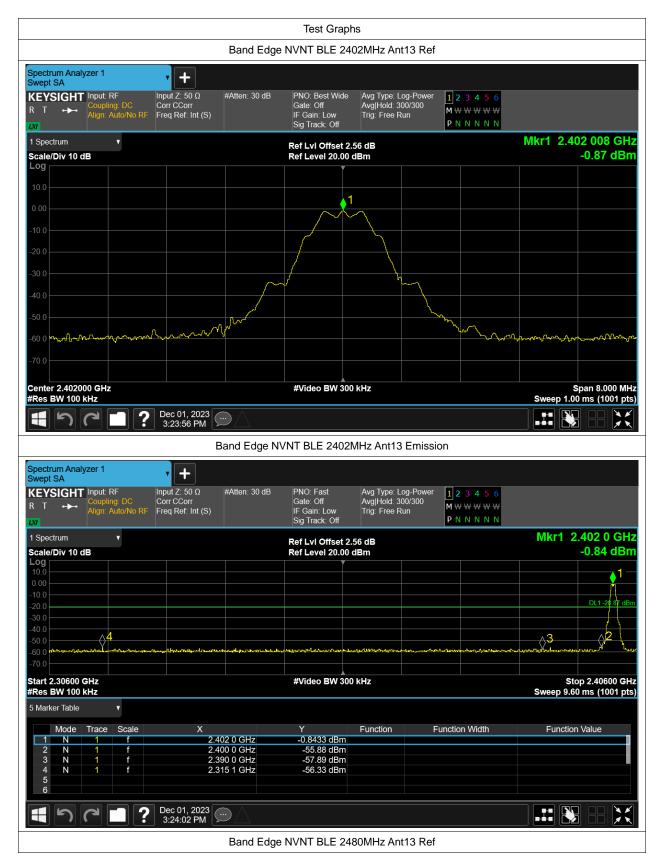



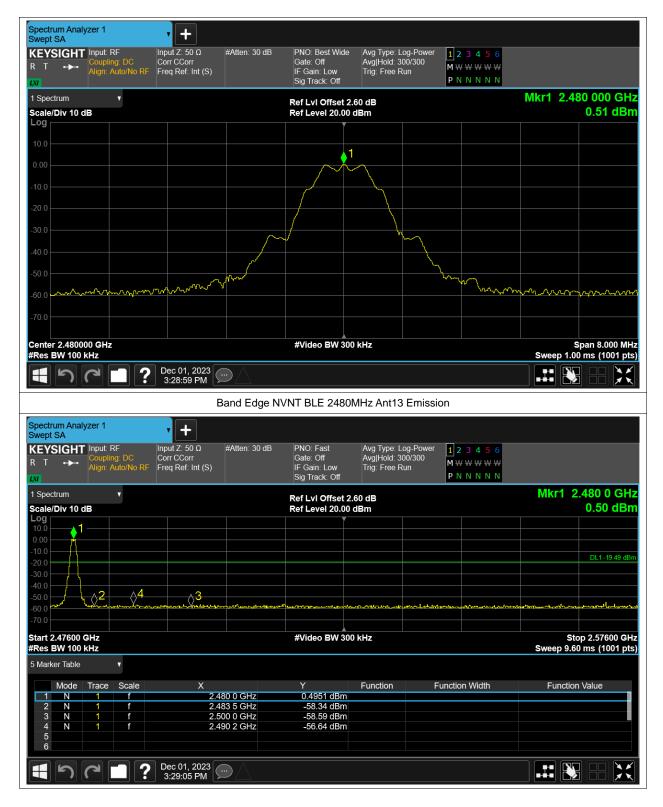





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant13	-48.81	-20	Pass
NVNT	BLE	2442	Ant13	-50.78	-20	Pass
NVNT	BLE	2480	Ant13	-49.79	-20	Pass

Project No.: JYTSZR2311068









Tx. Spurious NVNT BLE 2480MHz Ant13 Ref



