

TEST REPORT

Applicant Name: TECNO MOBILE LIMITED
Address: FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Report Number: SZ1240108-01736E-RF-00B
FCC ID: 2ADYY-CL7S

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Mobile Phone
Model No.: CL7s
Multiple Model(s) No.: N/A
Trade Mark: TECNO
Date Received: 2024/01/18
Issue Date: 2024/03/20

Test Result:

Pass[▲]

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Chen

Black Chen
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY4

GENERAL INFORMATION.....5

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)5

OBJECTIVE5

TEST METHODOLOGY5

MEASUREMENT UNCERTAINTY6

TEST FACILITY6

SYSTEM TEST CONFIGURATION7

DESCRIPTION OF TEST CONFIGURATION7

EQUIPMENT MODIFICATIONS8

EUT EXERCISE SOFTWARE8

DUTY CYCLE8

SUPPORT EQUIPMENT LIST AND DETAILS11

EXTERNAL I/O CABLE.....11

SUMMARY OF TEST RESULTS13

TEST EQUIPMENT LIST14

FCC§15.247 (I), §1.1307 (B) (1) & §2.1093 – RF EXPOSURE15

APPLICABLE STANDARD15

FCC §15.203 - ANTENNA REQUIREMENT.....16

APPLICABLE STANDARD16

ANTENNA CONNECTOR CONSTRUCTION16

FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS17

APPLICABLE STANDARD17

EUT SETUP17

EMI TEST RECEIVER SETUP.....17

TEST PROCEDURE17

FACTOR & OVER LIMIT CALCULATION.....18

TEST DATA18

FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS.....23

APPLICABLE STANDARD23

EUT SETUP23

EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP24

TEST PROCEDURE25

FACTOR & MARGIN CALCULATION25

TEST DATA25

FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH63

APPLICABLE STANDARD63

TEST PROCEDURE63

TEST DATA63

FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER70

APPLICABLE STANDARD70

TEST PROCEDURE70

TEST DATA70

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE74
 APPLICABLE STANDARD74
 TEST PROCEDURE74
 TEST DATA75

FCC §15.247(E) - POWER SPECTRAL DENSITY.....81
 APPLICABLE STANDARD81
 TEST PROCEDURE81
 TEST DATA82

EUT PHOTOGRAPHS.....88

TEST SETUP PHOTOGRAPHS89

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|-------------------------|-------------------------|------------------|
| 0 | SZ1240108-01736E-RF-00B | Original Report | 2024/03/20 |

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|-------------------------------------|---|
| Product | Mobile Phone |
| Tested Model | CL7s |
| Multiple Model(s) | N/A |
| Frequency Range | BLE: 2402-2480MHz Wi-Fi: 2412-2472MHz |
| Maximum Conducted Output Peak Power | BLE: 2.90dBm Wi-Fi: 20.97dBm |
| Modulation Technique | BLE: GFSK Wi-Fi: DSSS, OFDM |
| Antenna Specification [#] | BLE/Wi-Fi: -0.27dBi (provided by the applicant) |
| Voltage Range | DC 3.91V from battery or DC 5V/5-10V/11V/4-20V from adapter |
| Sample serial number | 2GB9-4for Conducted and Radiated Emissions Test 2GB9-1 for RF Conducted Test (Assigned by BACL, Shenzhen) |
| Sample/EUT Status | Good condition |
| Adapter Information | Model: U700TSA Input: AC 100-240V, 50/60Hz, 2.0A Output: DC 5.0V, 3.0A, 15.0W or DC 5.0-10.0V, 7.0A MAX or DC 11.0V, 6.4A MAX or DC4.0-20.0V, 3.5A, 70.0W MAX |

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

| Parameter | | Uncertainty |
|------------------------------------|--------------------------------------|---|
| Occupied Channel Bandwidth | | ±5% |
| RF Frequency | | 213.55 Hz(k=2, 95% level of confidence) |
| RF output power, conducted | | 0.72 dB(k=2, 95% level of confidence) |
| Unwanted Emission, conducted | | 1.75 dB(k=2, 95% level of confidence) |
| AC Power Lines Conducted Emissions | 9 kHz~150 KHz | 3.94dB(k=2, 95% level of confidence) |
| | 150 kHz ~30MHz | 3.84dB(k=2, 95% level of confidence) |
| Radiated Emissions | 9kHz - 30MHz | 3.30dB(k=2, 95% level of confidence) |
| | 30MHz~200MHz (Horizontal) | 4.48dB(k=2, 95% level of confidence) |
| | 30MHz~200MHz (Vertical) | 4.55dB(k=2, 95% level of confidence) |
| | 200MHz~1000MHz (Horizontal) | 4.85dB(k=2, 95% level of confidence) |
| | 200MHz~1000MHz (Vertical) | 5.05dB(k=2, 95% level of confidence) |
| | 1GHz - 6GHz | 5.35dB(k=2, 95% level of confidence) |
| | 6GHz - 18GHz | 5.44dB(k=2, 95% level of confidence) |
| 18GHz - 40GHz | 5.16dB(k=2, 95% level of confidence) | |
| Temperature | | ±1°C |
| Humidity | | ±1% |
| Supply voltages | | ±0.4% |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 2.4GHz Wi-Fi mode, total 13 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1 | 2412 | 8 | 2447 |
| 2 | 2417 | 9 | 2452 |
| 3 | 2422 | 10 | 2457 |
| 4 | 2427 | 11 | 2462 |
| 5 | 2432 | 12 | 2467 |
| 6 | 2437 | 13 | 2472 |
| 7 | 2442 | / | / |

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 7 and 13.

For BLE mode, 40 channels are provided to test:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 20 | 2442 |
| 1 | 2404 | 21 | 2444 |
| 2 | 2406 | 22 | 2446 |
| 3 | 2408 | 23 | 2448 |
| 4 | 2410 | 24 | 2450 |
| 5 | 2412 | 25 | 2452 |
| 6 | 2414 | 26 | 2454 |
| 7 | 2416 | 27 | 2456 |
| 8 | 2418 | 28 | 2458 |
| 9 | 2420 | 29 | 2460 |
| 10 | 2422 | 30 | 2462 |
| 11 | 2424 | 31 | 2464 |
| 12 | 2426 | 32 | 2466 |
| 13 | 2428 | 33 | 2468 |
| 14 | 2430 | 34 | 2470 |
| 15 | 2432 | 35 | 2472 |
| 16 | 2434 | 36 | 2474 |
| 17 | 2436 | 37 | 2476 |
| 18 | 2438 | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

For BLE 1M, EUT was tested with Channel 0, 19 and 39.

For BLE 2M, EUT was tested with Channel 1, 19 and 38.

Note: For BLE 2M, channel 0 and channel 39 was disabled.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

EUT was testing in engineering mode. The power level was provided by applicant.


The device was tested with the worst case was performed as below:

| Mode | Data rate | Power Level [#] | | |
|--------------|-----------|--------------------------|----------------|--------------|
| | | Low Channel | Middle Channel | High Channel |
| 802.11b | 1Mbps | 18.5 | 18.5 | 18.5 |
| 802.11g | 6Mbps | 12 | 12 | 12 |
| 802.11n-HT20 | MCS0 | 11 | 11 | 11 |
| BLE | 1Mbps | Default | Default | Default |
| BLE | 2Mbps | Default | Default | Default |

Duty cycle


| Test Modes | Ton (ms) | Ton+off (ms) | Duty Cycle (%) | 1/T (Hz) | VBW Setting (Hz) |
|--------------|----------|--------------|----------------|----------|------------------|
| 802.11b | 100 | 100 | 100.00 | / | 10.00 |
| 802.11g | 100 | 100 | 100.00 | / | 10.00 |
| 802.11n ht20 | 100 | 100 | 100.00 | / | 10.00 |
| BLE 1Mbps | 2.135 | 2.515 | 84.89 | 468 | 500.00 |
| BLE 2Mbps | 1.07 | 1.88 | 56.91 | 935 | 1000.00 |

802.11b

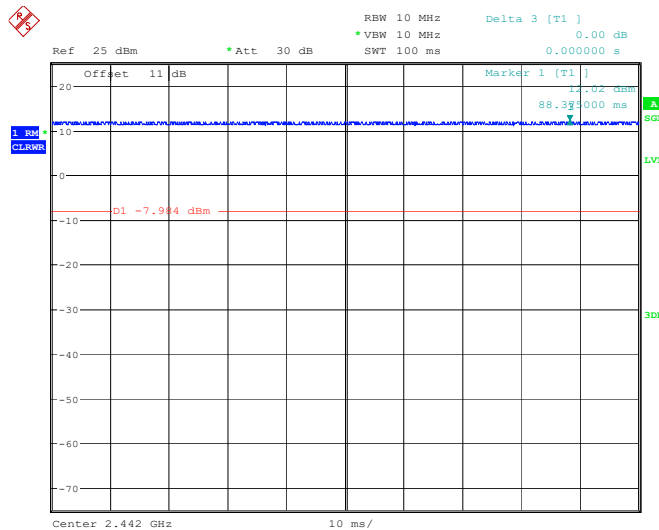


ProjectNo.:SZ1240108-01736E-RF Tester:Cheeb Huang
 Date: 20.FEB.2024 09:20:22

802.11g

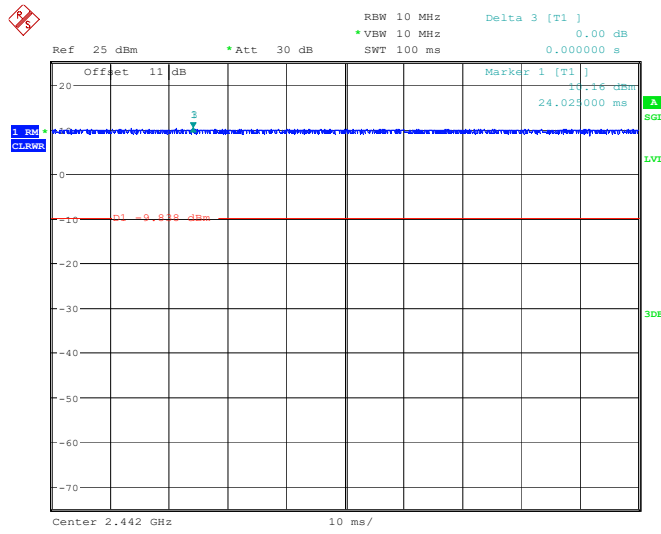


ProjectNo.:SZ1240108-01736E-RF Tester:Cheeb Huang
Date: 20.FEB.2024 09:41:36

802.11n ht20

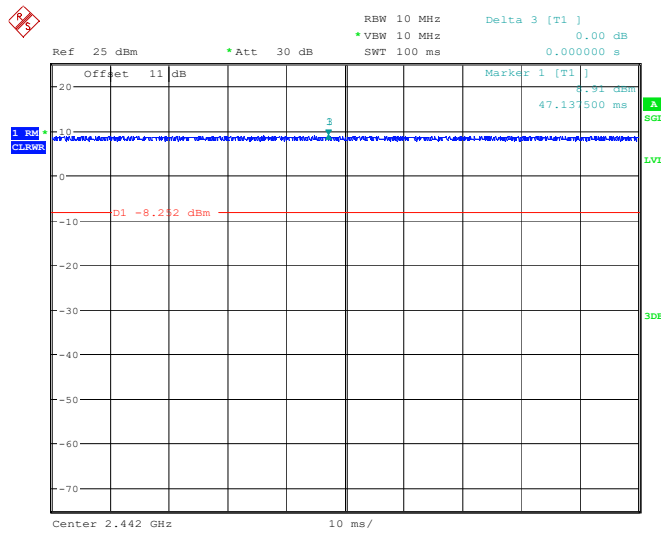


ProjectNo.:SZ1240108-01736E-RF Tester:Cheeb Huang
Date: 20.FEB.2024 10:03:30

BLE 1M

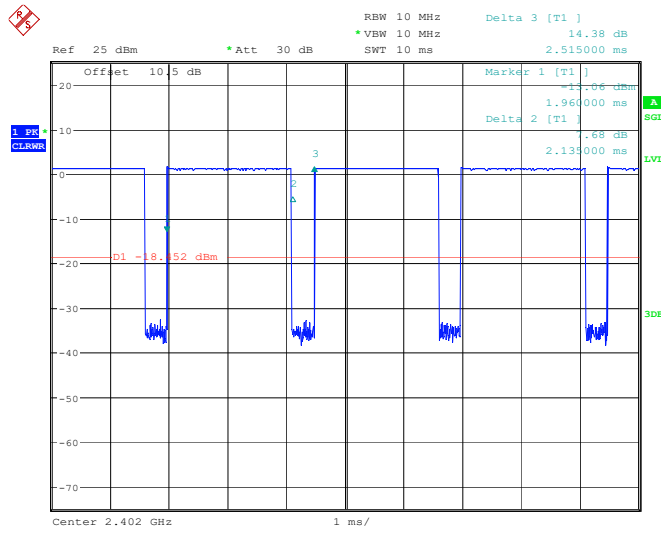

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:40:35

BLE 2M

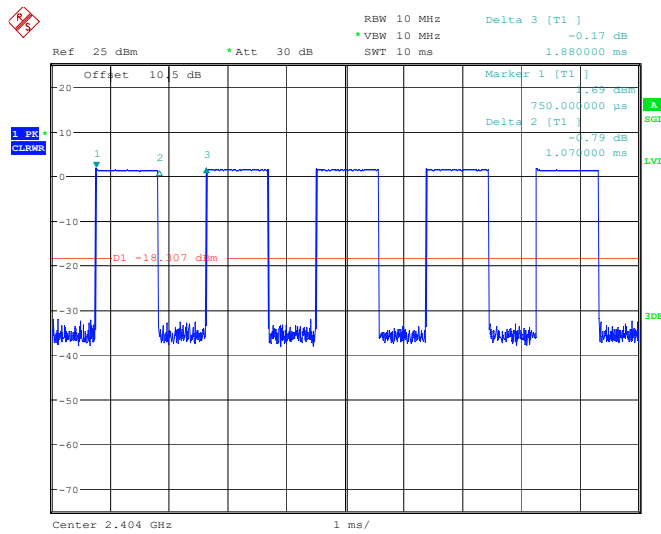

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:51:02

Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| / | / | / | / |

External I/O Cable


| Cable Description | Length (m) | From Port | To |
|-----------------------------------|------------|-----------|---------|
| Un-shielding Detachable USB Cable | 1.0 | EUT | Adapter |

Block Diagram of Test Setup


For Conducted Emission:

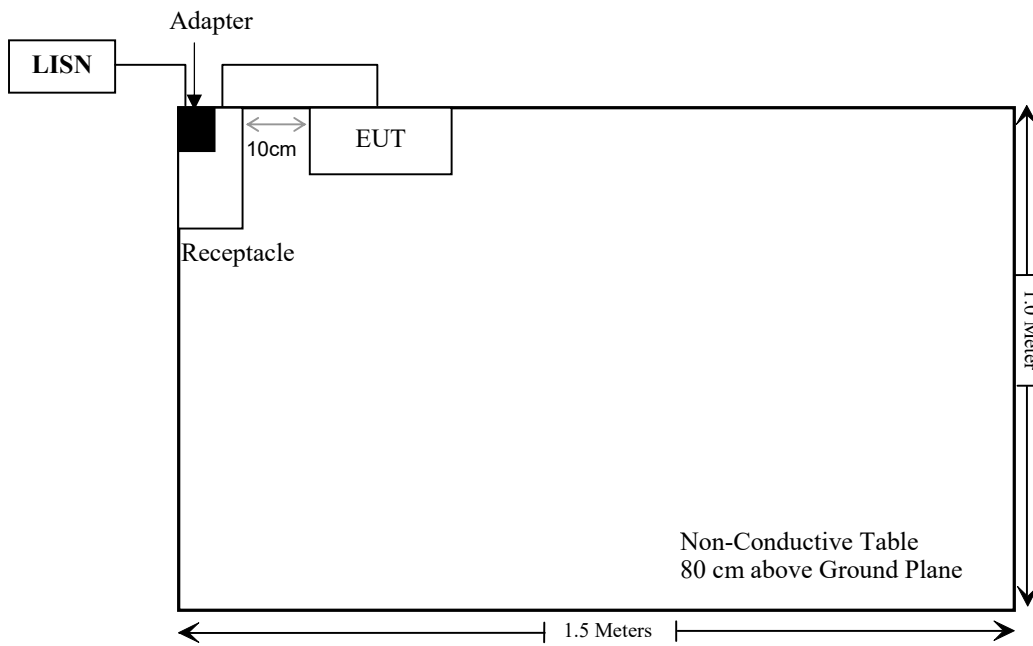

For Radiated Emissions below 1GHz:

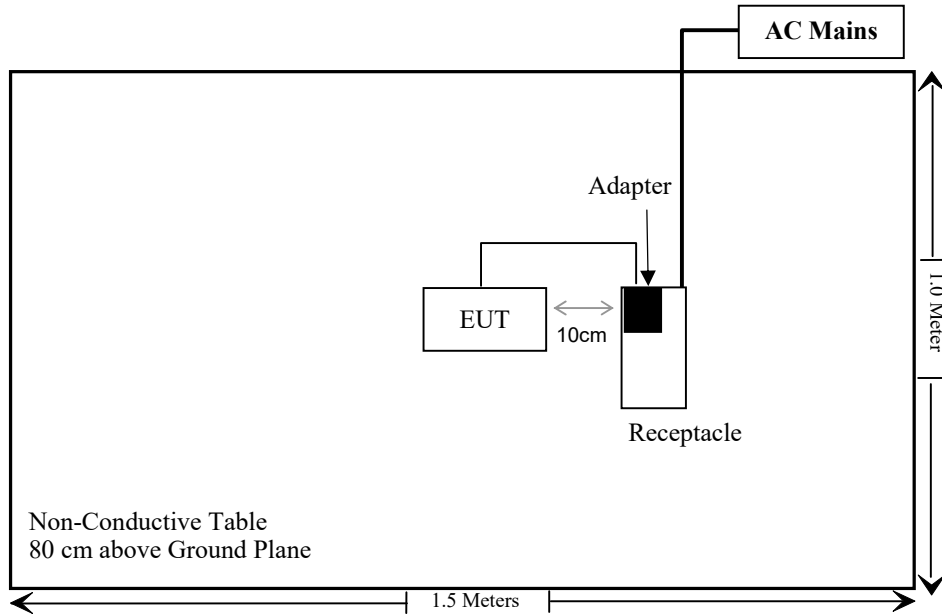

For Radiated Emissions above 1GHz:

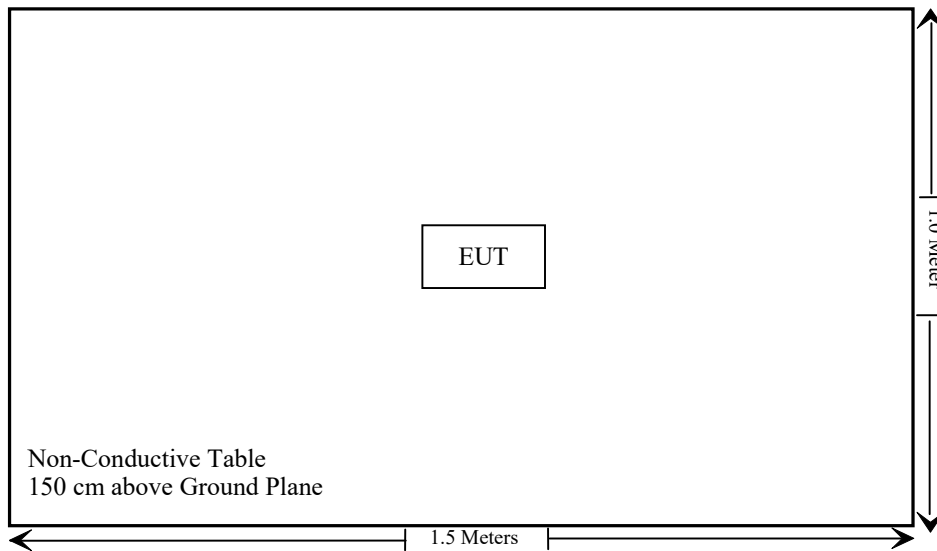

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|--|--|---------------|
| §15.247 (i), §1.1307 (b) (1) & §2.1093 | RF Exposure | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §15.207 (a) | AC Line Conducted Emissions | Compliant |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliant |
| §15.247 (a)(2) | 6 dB Emission Bandwidth & Occupied Bandwidth | Compliant |
| §15.247(b)(3) | Maximum Conducted Output Power | Compliant |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--------------------------------|---------------------------|-----------------|------------------------|------------------|----------------------|
| Conducted Emission Test | | | | | |
| Rohde & Schwarz | EMI Test Receiver | ESCI | 101120 | 2024/01/16 | 2025/01/15 |
| Rohde & Schwarz | LISN | ENV216 | 101613 | 2024/01/16 | 2025/01/15 |
| Rohde & Schwarz | Transient Limiter | ESH3Z2 | DE25985 | 2023/08/03 | 2024/08/02 |
| Unknown | CE Cable | CE Cable | UF A210B-1-0720-504504 | 2023/08/03 | 2024/08/02 |
| Audix | EMI Test software | E3 | 191218 | NCR | NCR |
| Radiated Emission Test | | | | | |
| R&S | EMI Test Receiver | ESR3 | 102455 | 2024/01/16 | 2025/01/15 |
| Sonoma instrument | Pre-amplifier | 310 N | 186238 | 2023/06/08 | 2024/06/07 |
| Sunol Sciences | Broadband Antenna | JB1 | A040904-1 | 2023/07/20 | 2024/07/19 |
| ETS | Passive Loop Antenna | 6512 | 29604 | 2023/07/07 | 2024/07/06 |
| Unknown | Cable | Chamber Cable 1 | F-03-EM236 | 2023/08/03 | 2024/08/02 |
| Unknown | Cable | Chamber Cable 4 | EC-007 | 2023/08/03 | 2024/08/02 |
| Audix | EMI Test software | E3 | 19821b(V9) | NCR | NCR |
| Rohde & Schwarz | Spectrum Analyzer | FSV40 | 101605 | 2023/04/18 | 2024/04/17 |
| COM-POWER | Pre-amplifier | PA-122 | 181919 | 2023/06/29 | 2024/06/28 |
| A.H.System | Pre-amplifier | PAM-1840VH | 190 | 2023/08/03 | 2024/08/02 |
| Schwarzbeck | Horn Antenna | BBHA9120D(1201) | 1143 | 2023/07/26 | 2024/07/25 |
| Electro-Mechanics Co | Horn Antenna | 3116 | 2026 | 2023/09/18 | 2026/09/17 |
| Unknown | RF Cable | KMSE | 0735 | 2023/10/08 | 2024/10/07 |
| Unknown | RF Cable | UFA147 | 219661 | 2023/10/08 | 2024/10/07 |
| UTIFLEX | RF Cable | NO. 13 | 232308-001 | 2023/08/03 | 2024/08/02 |
| MICRO-TRONICS | 2.8G Passband filter | HPM50111 | F-03-EM217 | 2023/08/03 | 2024/08/02 |
| Audix | EMI Test software | E3 | 191218(V9) | NCR | NCR |
| RF Conducted Test | | | | | |
| Rohde & Schwarz | SPECTRUM ANALYZER | FSU26 | 200120 | 2024/01/08 | 2025/01/07 |
| Agilent | USB wideband power sensor | U2021XA | MY52350001 | 2023/06/08 | 2024/06/07 |
| Unknown | 10dB Attenuator | Unknown | F-03-EM190 | 2023/07/04 | 2024/07/03 |

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission’s guideline.

- a) According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

For BLE:

| Frequency (MHz) | Maximum Tune-up power | | Calculated Distance (mm) | Calculated Value | Threshold (1-g SAR) | SAR Test Exclusion |
|-----------------|-----------------------|------|--------------------------|------------------|---------------------|--------------------|
| | (dBm) | (mW) | | | | |
| 2402-2480 | 3.0 | 2.0 | 5 | 0.6 | 3.0 | Yes |

Result: No Standalone SAR test is required

For Wi-Fi mode, please refer to SAR report: Please refer to SAR test report: SZ1240108-01736E-SA.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached, the antenna gain[#] is -0.27dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

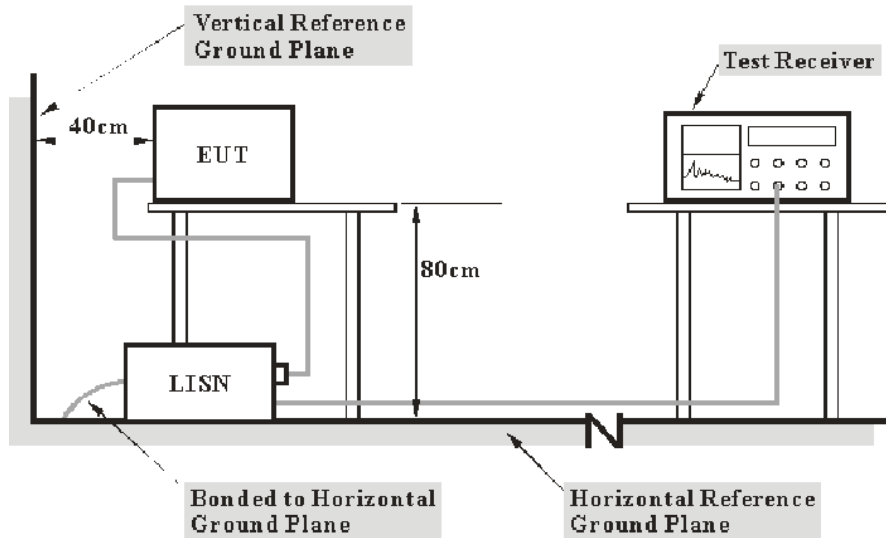

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).

Test Data

Environmental Conditions


| | |
|---------------------------|---------|
| Temperature: | 25 °C |
| Relative Humidity: | 52 % |
| ATM Pressure: | 101 kPa |

The testing was performed by Macy Shi on 2024-01-22.

EUT operation mode: Transmitting

BLE: (Maximum output power mode, BLE 1M Middle Channel)

AC 120V/60 Hz, Line

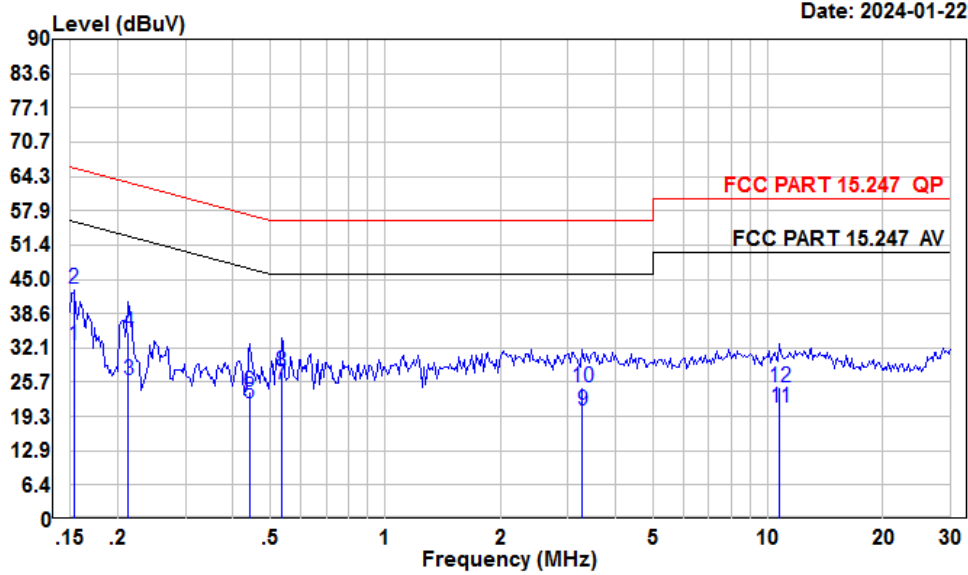


Condition: Line
 Project : SZ1240108-01736E-RF
 Tester : Macy shi
 Note : BLE

| | Read Freq | Read Level | LISN Level | LISN Factor | Cable Loss | Limit Line | Over Limit | Remark |
|----|-----------|------------|------------|-------------|------------|------------|------------|---------|
| | MHz | dBuV | dBuV | dB | dB | dBuV | dB | |
| 1 | 0.15 | 11.89 | 32.64 | 10.60 | 10.15 | 55.82 | -23.18 | Average |
| 2 | 0.15 | 22.57 | 43.32 | 10.60 | 10.15 | 65.82 | -22.50 | QP |
| 3 | 0.21 | 5.35 | 26.08 | 10.61 | 10.12 | 53.10 | -27.02 | Average |
| 4 | 0.21 | 14.37 | 35.10 | 10.61 | 10.12 | 63.10 | -28.00 | QP |
| 5 | 0.44 | 0.88 | 21.76 | 10.69 | 10.19 | 47.02 | -25.26 | Average |
| 6 | 0.44 | 3.12 | 24.00 | 10.69 | 10.19 | 57.02 | -33.02 | QP |
| 7 | 0.53 | 4.54 | 25.41 | 10.70 | 10.17 | 46.00 | -20.59 | Average |
| 8 | 0.53 | 6.94 | 27.81 | 10.70 | 10.17 | 56.00 | -28.19 | QP |
| 9 | 3.28 | -0.50 | 20.43 | 10.66 | 10.27 | 46.00 | -25.57 | Average |
| 10 | 3.28 | 3.80 | 24.73 | 10.66 | 10.27 | 56.00 | -31.27 | QP |
| 11 | 10.73 | 0.21 | 21.02 | 10.57 | 10.24 | 50.00 | -28.98 | Average |
| 12 | 10.73 | 3.92 | 24.73 | 10.57 | 10.24 | 60.00 | -35.27 | QP |

AC 120V/60 Hz, Neutral

Date: 2024-01-22

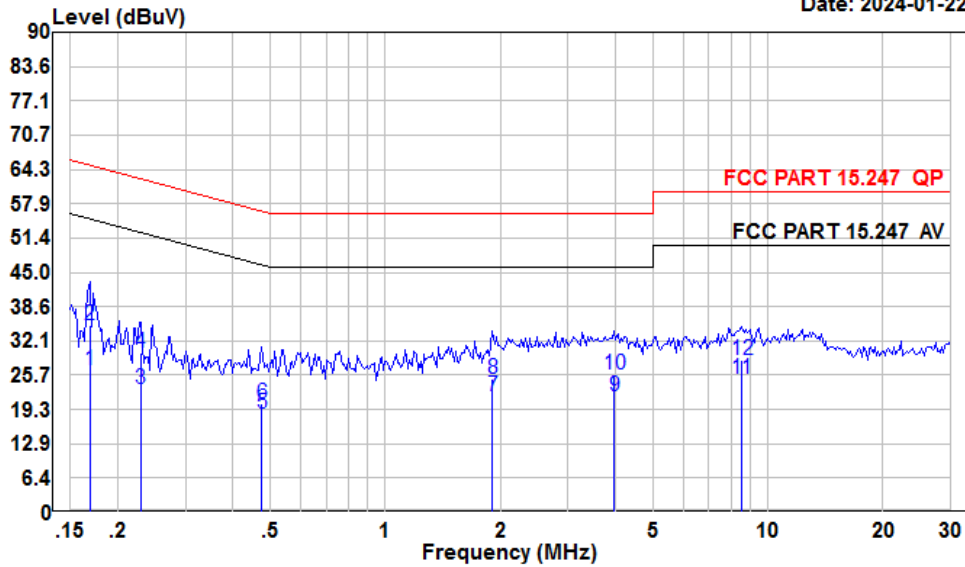


Condition: Neutral
 Project : SZ1240108-01736E-RF
 Tester : Macy shi
 Note : BLE

| | Read Freq | Read Level | LISN Level | LISN Factor | Cable Loss | Limit Line | Over Limit | Remark |
|----|-----------|------------|------------|-------------|------------|------------|------------|---------|
| | MHz | dBuV | dBuV | dB | dB | dBuV | dB | |
| 1 | 0.17 | 6.04 | 26.77 | 10.58 | 10.15 | 55.03 | -28.26 | Average |
| 2 | 0.17 | 14.23 | 34.96 | 10.58 | 10.15 | 65.03 | -30.07 | QP |
| 3 | 0.23 | 2.15 | 23.02 | 10.71 | 10.16 | 52.48 | -29.46 | Average |
| 4 | 0.23 | 9.05 | 29.92 | 10.71 | 10.16 | 62.48 | -32.56 | QP |
| 5 | 0.48 | -2.52 | 18.44 | 10.79 | 10.17 | 46.41 | -27.97 | Average |
| 6 | 0.48 | -0.44 | 20.52 | 10.79 | 10.17 | 56.41 | -35.89 | QP |
| 7 | 1.91 | 0.94 | 21.80 | 10.69 | 10.17 | 46.00 | -24.20 | Average |
| 8 | 1.91 | 4.14 | 25.00 | 10.69 | 10.17 | 56.00 | -31.00 | QP |
| 9 | 3.96 | 0.92 | 21.88 | 10.70 | 10.26 | 46.00 | -24.12 | Average |
| 10 | 3.96 | 4.77 | 25.73 | 10.70 | 10.26 | 56.00 | -30.27 | QP |
| 11 | 8.50 | 3.84 | 24.93 | 10.85 | 10.24 | 50.00 | -25.07 | Average |
| 12 | 8.50 | 7.53 | 28.62 | 10.85 | 10.24 | 60.00 | -31.38 | QP |

2.4G Wi-Fi: (Maximum output power mode, 802.11g 2472MHz)

AC 120V/60 Hz, Line

Date: 2024-01-22

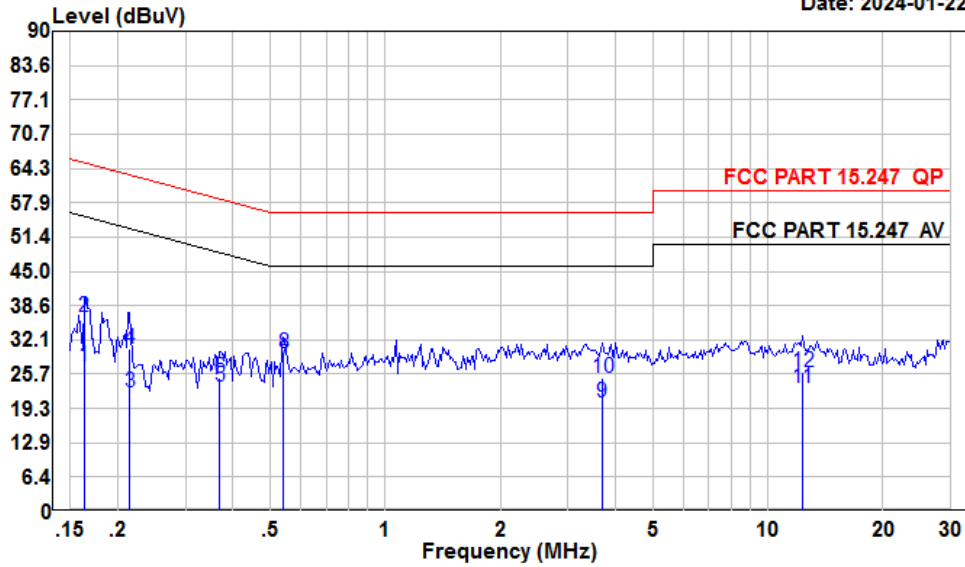


Condition: Line
 Project : SZ1240108-01736E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

| | Read Freq | Read Level | LISN Level | LISN Factor | Cable Loss | Limit Line | Over Limit | Remark |
|----|-----------|------------|------------|-------------|------------|------------|------------|---------|
| | MHz | dBuV | dBuV | dB | dB | dBuV | dB | |
| 1 | 0.16 | 6.53 | 27.28 | 10.60 | 10.15 | 55.30 | -28.02 | Average |
| 2 | 0.16 | 15.74 | 36.49 | 10.60 | 10.15 | 65.30 | -28.81 | QP |
| 3 | 0.22 | 1.67 | 22.41 | 10.61 | 10.13 | 53.01 | -30.60 | Average |
| 4 | 0.22 | 9.64 | 30.38 | 10.61 | 10.13 | 63.01 | -32.63 | QP |
| 5 | 0.37 | 2.50 | 23.35 | 10.67 | 10.18 | 48.52 | -25.17 | Average |
| 6 | 0.37 | 4.28 | 25.13 | 10.67 | 10.18 | 58.52 | -33.39 | QP |
| 7 | 0.54 | 6.64 | 27.52 | 10.70 | 10.18 | 46.00 | -18.48 | Average |
| 8 | 0.54 | 8.83 | 29.71 | 10.70 | 10.18 | 56.00 | -26.29 | QP |
| 9 | 3.68 | -0.36 | 20.52 | 10.62 | 10.26 | 46.00 | -25.48 | Average |
| 10 | 3.68 | 4.02 | 24.90 | 10.62 | 10.26 | 56.00 | -31.10 | QP |
| 11 | 12.32 | 2.32 | 23.01 | 10.50 | 10.19 | 50.00 | -26.99 | Average |
| 12 | 12.32 | 5.50 | 26.19 | 10.50 | 10.19 | 60.00 | -33.81 | QP |

AC 120V/60 Hz, Neutral

Date: 2024-01-22

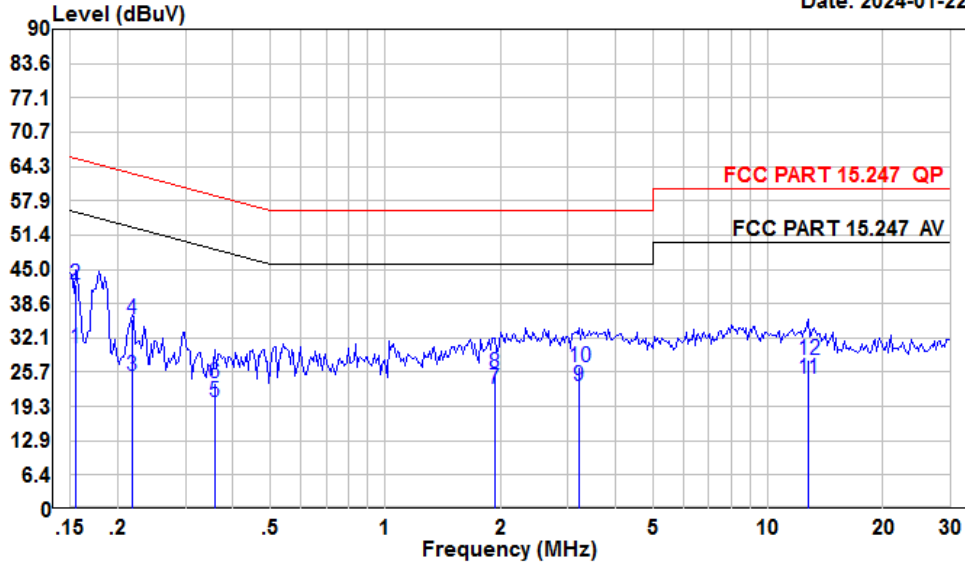

Condition: Neutral
 Project : SZ1240108-01736E-RF
 Tester : Macy shi
 Note : 2.4G WIFI

| | Read Freq | Read Level | LISN Level | LISN Factor | Cable Loss | Limit Line | Over Limit | Remark |
|----|-----------|------------|------------|-------------|------------|------------|------------|---------|
| | MHz | dBuV | dBuV | dB | dB | dBuV | dB | |
| 1 | 0.15 | 9.50 | 30.17 | 10.52 | 10.15 | 55.74 | -25.57 | Average |
| 2 | 0.15 | 21.51 | 42.18 | 10.52 | 10.15 | 65.74 | -23.56 | QP |
| 3 | 0.22 | 4.14 | 24.98 | 10.71 | 10.13 | 52.92 | -27.94 | Average |
| 4 | 0.22 | 14.78 | 35.62 | 10.71 | 10.13 | 62.92 | -27.30 | QP |
| 5 | 0.36 | -0.84 | 20.09 | 10.76 | 10.17 | 48.78 | -28.69 | Average |
| 6 | 0.36 | 2.76 | 23.69 | 10.76 | 10.17 | 58.78 | -35.09 | QP |
| 7 | 1.93 | 1.62 | 22.48 | 10.69 | 10.17 | 46.00 | -23.52 | Average |
| 8 | 1.93 | 4.68 | 25.54 | 10.69 | 10.17 | 56.00 | -30.46 | QP |
| 9 | 3.21 | 2.25 | 23.22 | 10.70 | 10.27 | 46.00 | -22.78 | Average |
| 10 | 3.21 | 5.72 | 26.69 | 10.70 | 10.27 | 56.00 | -29.31 | QP |
| 11 | 12.72 | 3.66 | 24.45 | 10.62 | 10.17 | 50.00 | -25.55 | Average |
| 12 | 12.72 | 7.28 | 28.07 | 10.62 | 10.17 | 60.00 | -31.93 | QP |


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup


9 kHz-30MHz:

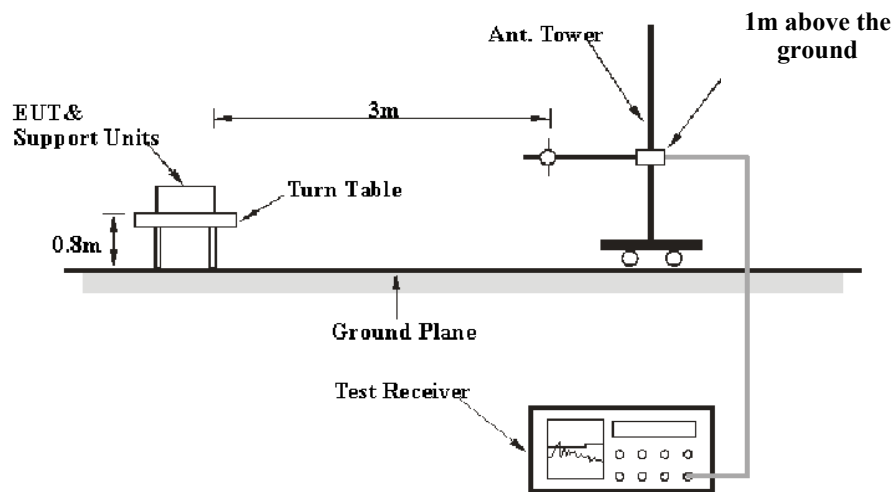

30MHz-1GHz:

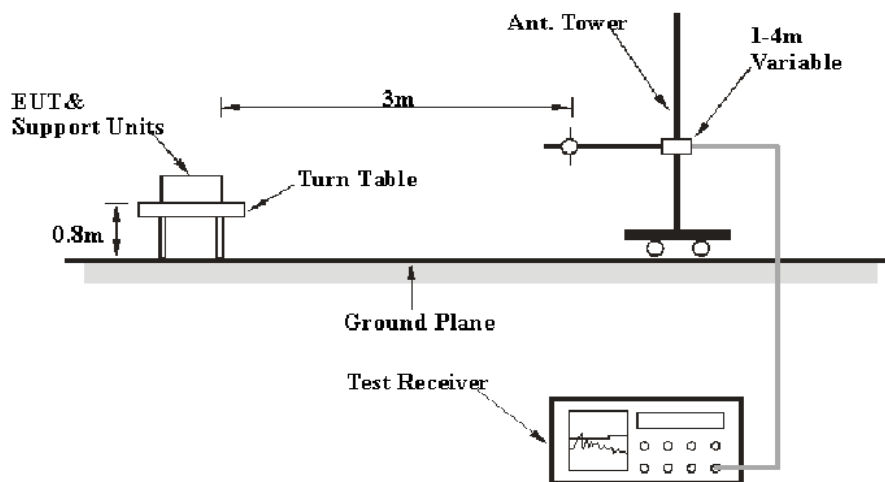

Above 1GHz:

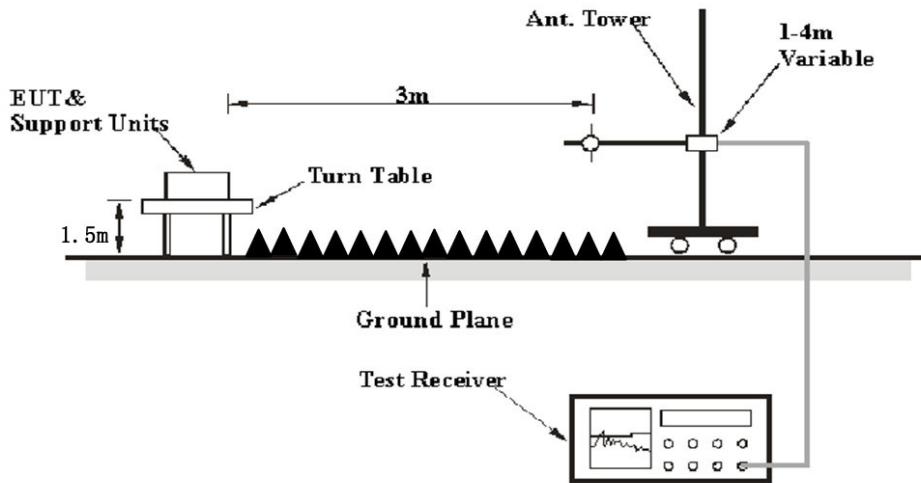

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 9 kHz – 150 kHz | / | / | 200 Hz | QP |
| | 300 Hz | 1 kHz | / | PK |
| 150 kHz – 30 MHz | / | / | 9 kHz | QP |
| | 10 kHz | 30 kHz | / | PK |
| 30 MHz – 1000 MHz | / | / | 120 kHz | QP |
| | 100 kHz | 300 kHz | / | PK |

1-25GHz:

| Measurement | Duty cycle | RBW | Video B/W |
|-------------|------------|------|-----------|
| PK | Any | 1MHz | 3 MHz |
| AV | >98% | 1MHz | 10 Hz |
| | <98% | 1MHz | ≥1/T |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

| | |
|---------------------------|----------|
| Temperature: | 22~24 °C |
| Relative Humidity: | 50~54 % |
| ATM Pressure: | 101 kPa |

The testing was performed by Warren Huang on 2024-01-19 for below 1GHz and Zenos Qiao from 2024-02-19 to 2024-02-20 for above 1GHz.

EUT operation mode: Transmitting


Note: Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.

9 kHz-30MHz:

Note: When the test result of peak was less than the limit of QP/Average more than 6dB, just peak value were recorded.


Parallel (worst case)

BLE: (Maximum output power mode, BLE 1M Middle Channel)

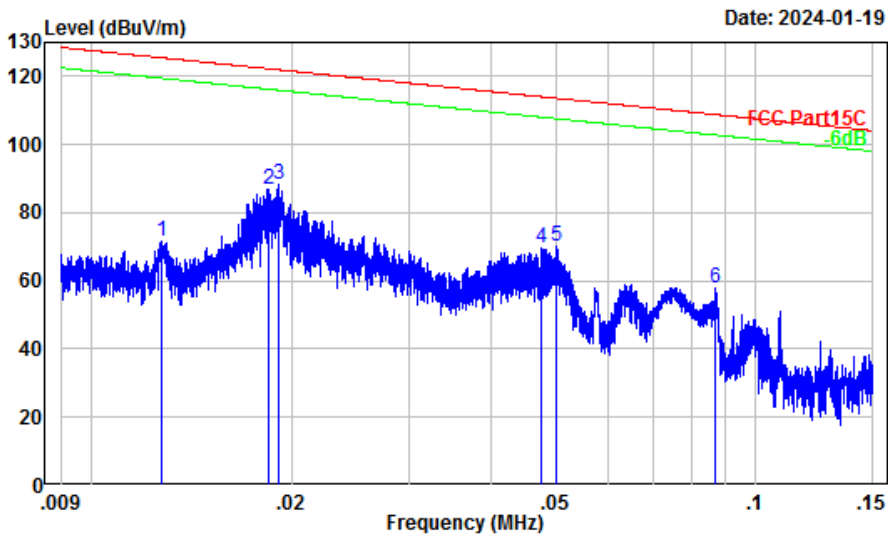

Site : chamber
 Condition : 3m
 Project Number: SZ1240108-01736E-RF
 Note : BLE
 Tester : Warren Huang


| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 0.01 | 52.45 | 19.11 | 71.56 | 125.47 | -53.91 | Peak |
| 2 | 0.02 | 50.70 | 36.07 | 86.77 | 122.27 | -35.50 | Peak |
| 3 | 0.02 | 50.51 | 37.63 | 88.14 | 121.97 | -33.83 | Peak |
| 4 | 0.05 | 41.72 | 27.83 | 69.55 | 114.04 | -44.49 | Peak |
| 5 | 0.05 | 40.99 | 28.93 | 69.92 | 113.62 | -43.70 | Peak |
| 6 | 0.09 | 35.92 | 21.79 | 57.71 | 108.81 | -51.10 | Peak |

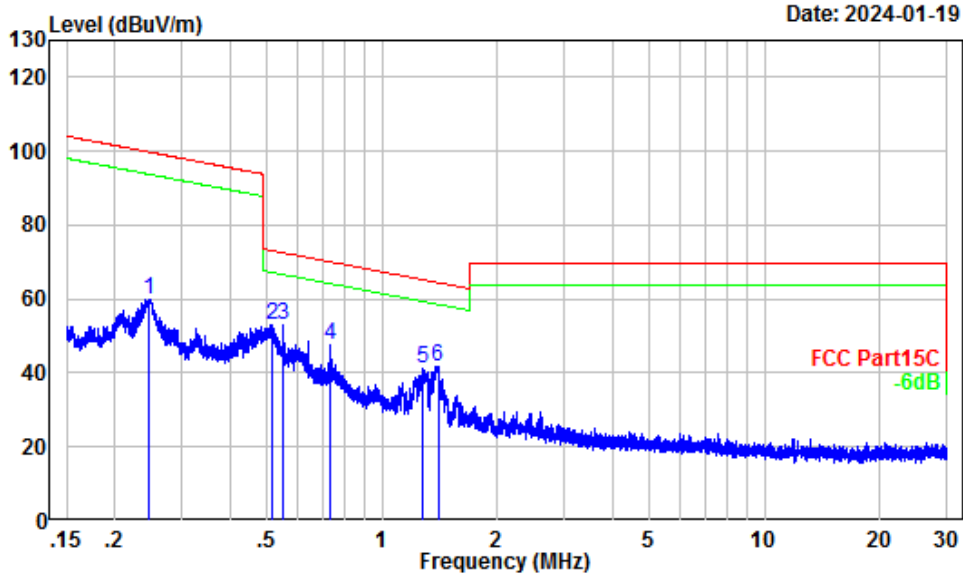

Site : chamber
 Condition : 3m
 Project Number: SZ1240108-01736E-RF
 Note : BLE
 Tester : Warren Huang


| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 0.25 | 27.33 | 32.62 | 59.95 | 99.76 | -39.81 | Peak |
| 2 | 0.52 | 20.76 | 32.11 | 52.87 | 73.35 | -20.48 | Peak |
| 3 | 0.55 | 20.32 | 32.42 | 52.74 | 72.78 | -20.04 | Peak |
| 4 | 0.73 | 17.84 | 29.89 | 47.73 | 70.25 | -22.52 | Peak |
| 5 | 1.28 | 14.07 | 27.13 | 41.20 | 65.29 | -24.09 | Peak |
| 6 | 1.40 | 13.45 | 28.06 | 41.51 | 64.48 | -22.97 | Peak |

2.4G Wi-Fi: (Maximum output power mode, 802.11g 2472MHz)

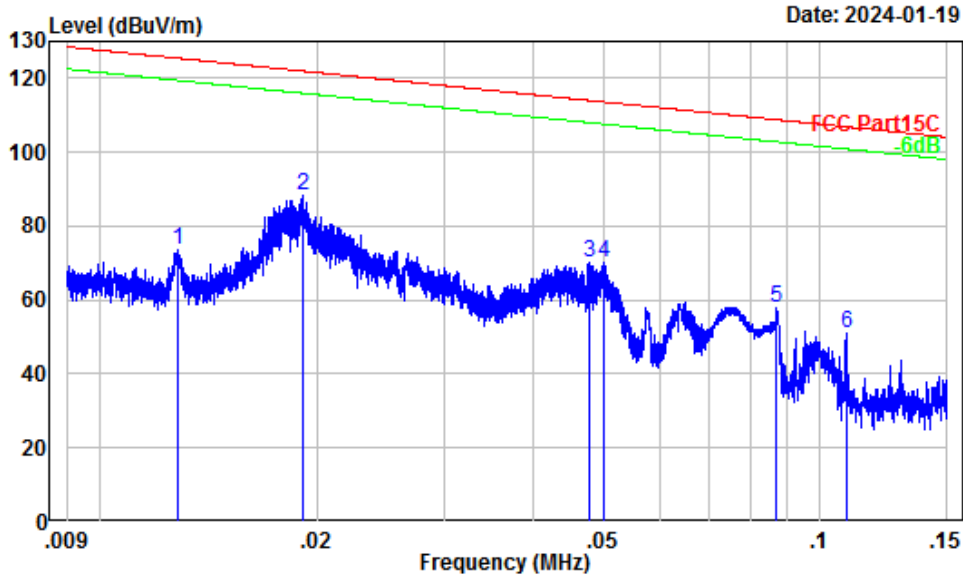

Site : chamber
 Condition : 3m
 Project Number: SZ1240108-01736E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 0.01 | 52.45 | 20.93 | 73.38 | 125.46 | -52.08 | Peak |
| 2 | 0.02 | 50.51 | 37.63 | 88.14 | 121.97 | -33.83 | Peak |
| 3 | 0.05 | 41.70 | 28.58 | 70.28 | 114.03 | -43.75 | Peak |
| 4 | 0.05 | 40.99 | 28.93 | 69.92 | 113.62 | -43.70 | Peak |
| 5 | 0.09 | 35.92 | 21.79 | 57.71 | 108.81 | -51.10 | Peak |
| 6 | 0.11 | 33.69 | 17.54 | 51.23 | 106.88 | -55.65 | Peak |

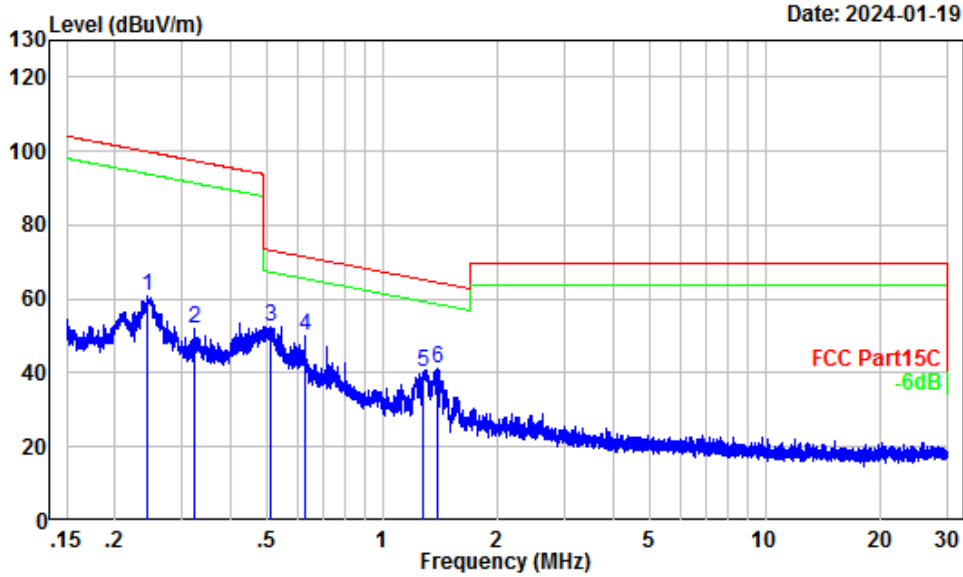


Site : chamber
 Condition : 3m
 Project Number: SZ1240108-01736E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 0.24 | 27.44 | 33.46 | 60.90 | 99.88 | -38.98 | Peak |
| 2 | 0.32 | 24.68 | 27.54 | 52.22 | 97.39 | -45.17 | Peak |
| 3 | 0.51 | 20.82 | 31.86 | 52.68 | 73.45 | -20.77 | Peak |
| 4 | 0.63 | 19.24 | 30.87 | 50.11 | 71.56 | -21.45 | Peak |
| 5 | 1.27 | 14.09 | 25.91 | 40.00 | 65.33 | -25.33 | Peak |
| 6 | 1.39 | 13.52 | 27.66 | 41.18 | 64.57 | -23.39 | Peak |

30MHz-1GHz:

BLE: (Maximum output power mode, BLE 1M Middle Channel)


Horizontal

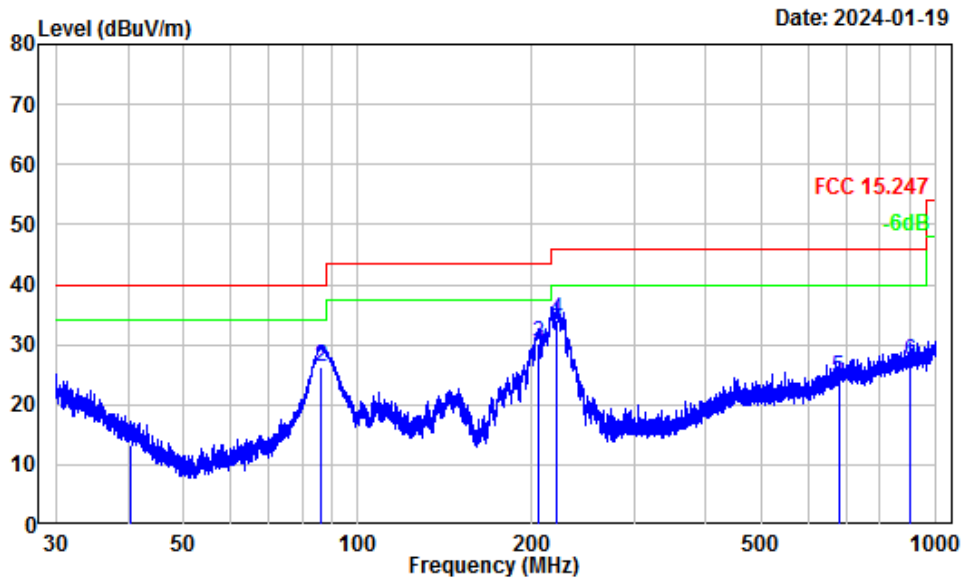

Site : chamber
 Condition : 3m Horizontal
 Project Number: SZ1240108-01736E-RF
 Note : BLE
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|--------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 40.28 | -10.56 | 23.79 | 13.23 | 40.00 | -26.77 | QP |
| 2 | 86.20 | -16.62 | 42.94 | 26.32 | 40.00 | -13.68 | QP |
| 3 | 204.87 | -11.11 | 41.20 | 30.09 | 43.50 | -13.41 | QP |
| 4 | 221.10 | -11.37 | 45.59 | 34.22 | 46.00 | -11.78 | QP |
| 5 | 678.17 | -1.92 | 26.33 | 24.41 | 46.00 | -21.59 | QP |
| 6 | 900.15 | 1.01 | 26.02 | 27.03 | 46.00 | -18.97 | QP |

Vertical

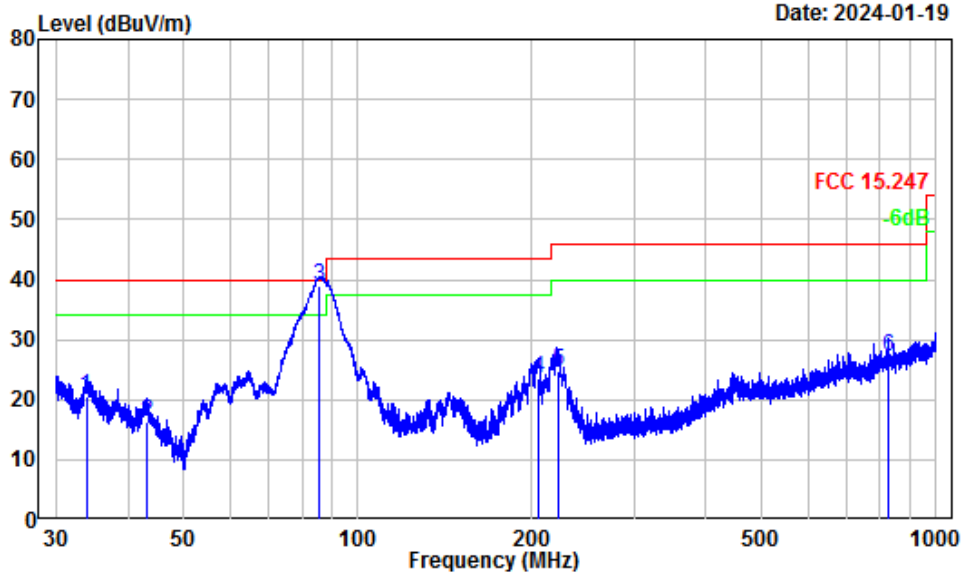


Site : chamber
 Condition : 3m Vertical
 Project Number: SZ1240108-01736E-RF
 Note : BLE
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|--------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 33.87 | -8.05 | 28.50 | 20.45 | 40.00 | -19.55 | QP |
| 2 | 43.13 | -13.67 | 29.83 | 16.16 | 40.00 | -23.84 | QP |
| 3 | 85.79 | -17.30 | 56.20 | 38.90 | 40.00 | -1.10 | QP |
| 4 | 204.69 | -12.23 | 35.80 | 23.57 | 43.50 | -19.93 | QP |
| 5 | 222.36 | -12.24 | 37.12 | 24.88 | 46.00 | -21.12 | QP |
| 6 | 827.86 | -0.35 | 27.61 | 27.26 | 46.00 | -18.74 | QP |

2.4G Wi-Fi: (Maximum output power mode, 802.11g 2472MHz)


Horizontal

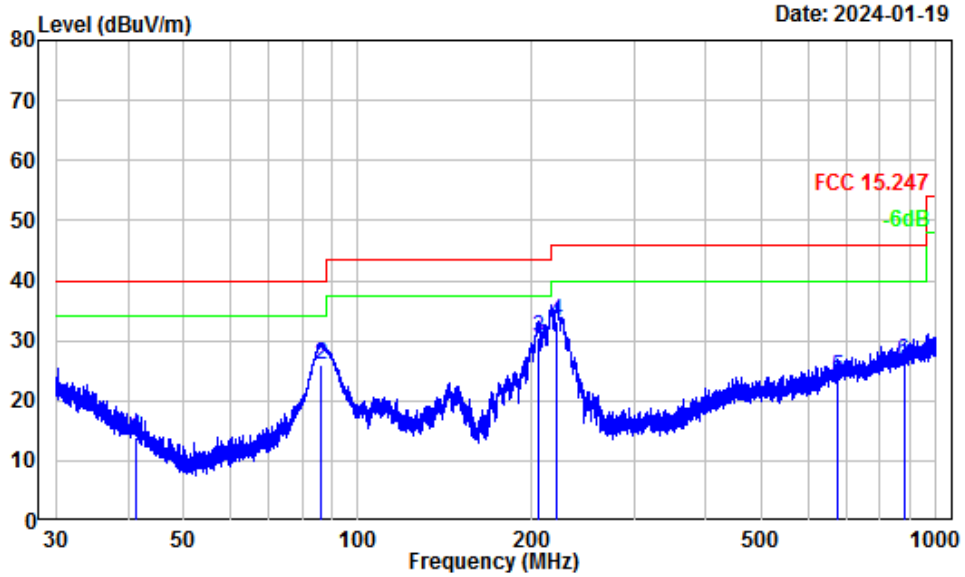

Site : chamber
 Condition : 3m Horizontal
 Project Number: SZ1240108-01736E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|--------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 41.44 | -11.31 | 25.18 | 13.87 | 40.00 | -26.13 | QP |
| 2 | 86.05 | -16.62 | 42.67 | 26.05 | 40.00 | -13.95 | QP |
| 3 | 205.49 | -11.12 | 41.50 | 30.38 | 43.50 | -13.12 | QP |
| 4 | 220.71 | -11.37 | 44.54 | 33.17 | 46.00 | -12.83 | QP |
| 5 | 675.80 | -1.96 | 25.85 | 23.89 | 46.00 | -22.11 | QP |
| 6 | 879.48 | 0.67 | 25.82 | 26.49 | 46.00 | -19.51 | QP |

Vertical

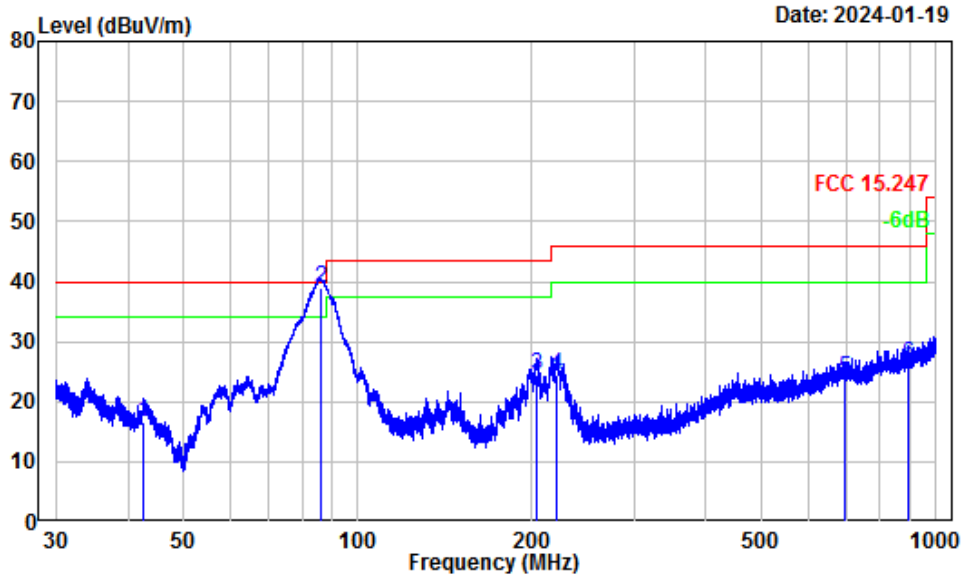

Site : chamber
 Condition : 3m Vertical
 Project Number: SZ1240108-01736E-RF
 Note : 2.4G WIFI
 Tester : Warren Huang

| | Freq | Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|--------|--------|------------|--------|--------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 42.62 | -13.38 | 29.91 | 16.53 | 40.00 | -23.47 | QP |
| 2 | 86.12 | -17.30 | 56.29 | 38.99 | 40.00 | -1.01 | QP |
| 3 | 204.06 | -12.24 | 36.61 | 24.37 | 43.50 | -19.13 | QP |
| 4 | 220.71 | -12.24 | 36.59 | 24.35 | 46.00 | -21.65 | QP |
| 5 | 695.03 | -2.00 | 25.75 | 23.75 | 46.00 | -22.25 | QP |
| 6 | 893.86 | 0.52 | 25.72 | 26.24 | 46.00 | -19.76 | QP |


1-25 GHz:

| Frequency (MHz) | Receiver | | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|--------|-------------|---------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/Ave | | | | | |
| BLE 1M | | | | | | | |
| Low Channel 2402MHz | | | | | | | |
| 4804.00 | 50.39 | PK | H | 2.42 | 52.81 | 74 | -21.19 |
| 4804.00 | 43.46 | AV | H | 2.42 | 45.88 | 54 | -8.12 |
| 4804.00 | 49.68 | PK | V | 2.42 | 52.10 | 74 | -21.90 |
| 4804.00 | 41.87 | AV | V | 2.42 | 44.29 | 54 | -9.71 |
| Middle Channel 2440MHz | | | | | | | |
| 4880.00 | 50.72 | PK | H | 2.58 | 53.30 | 74 | -20.70 |
| 4880.00 | 43.85 | AV | H | 2.58 | 46.43 | 54 | -7.57 |
| 4880.00 | 50.09 | PK | V | 2.58 | 52.67 | 74 | -21.33 |
| 4880.00 | 42.21 | AV | V | 2.58 | 44.79 | 54 | -9.21 |
| High Channel 2480MHz | | | | | | | |
| 4960.00 | 51.15 | PK | H | 2.68 | 53.83 | 74 | -20.17 |
| 4960.00 | 44.24 | AV | H | 2.68 | 46.92 | 54 | -7.08 |
| 4960.00 | 50.36 | PK | V | 2.68 | 53.04 | 74 | -20.96 |
| 4960.00 | 42.63 | AV | V | 2.68 | 45.31 | 54 | -8.69 |
| BLE 2M | | | | | | | |
| Low Channel 2404MHz | | | | | | | |
| 4808.00 | 49.84 | PK | H | 2.42 | 52.26 | 74 | -21.74 |
| 4808.00 | 39.33 | AV | H | 2.42 | 41.75 | 54 | -12.25 |
| 4808.00 | 49.18 | PK | V | 2.42 | 51.60 | 74 | -22.40 |
| 4808.00 | 38.51 | AV | V | 2.42 | 40.93 | 54 | -13.07 |
| Middle Channel 2440MHz | | | | | | | |
| 4880.00 | 50.27 | PK | H | 2.58 | 52.85 | 74 | -21.15 |
| 4880.00 | 39.86 | AV | H | 2.58 | 42.44 | 54 | -11.56 |
| 4880.00 | 49.49 | PK | V | 2.58 | 52.07 | 74 | -21.93 |
| 4880.00 | 39.23 | AV | V | 2.58 | 41.81 | 54 | -12.19 |
| High Channel 2478MHz | | | | | | | |
| 4956.00 | 50.72 | PK | H | 2.61 | 53.33 | 74 | -20.67 |
| 4956.00 | 40.29 | AV | H | 2.61 | 42.90 | 54 | -11.10 |
| 4956.00 | 50.05 | PK | V | 2.61 | 52.66 | 74 | -21.34 |
| 4956.00 | 39.44 | AV | V | 2.61 | 42.05 | 54 | -11.95 |


Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor
 Corrected Amplitude = Corrected Factor + Reading
 Margin = Corrected. Amplitude - Limit
 The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

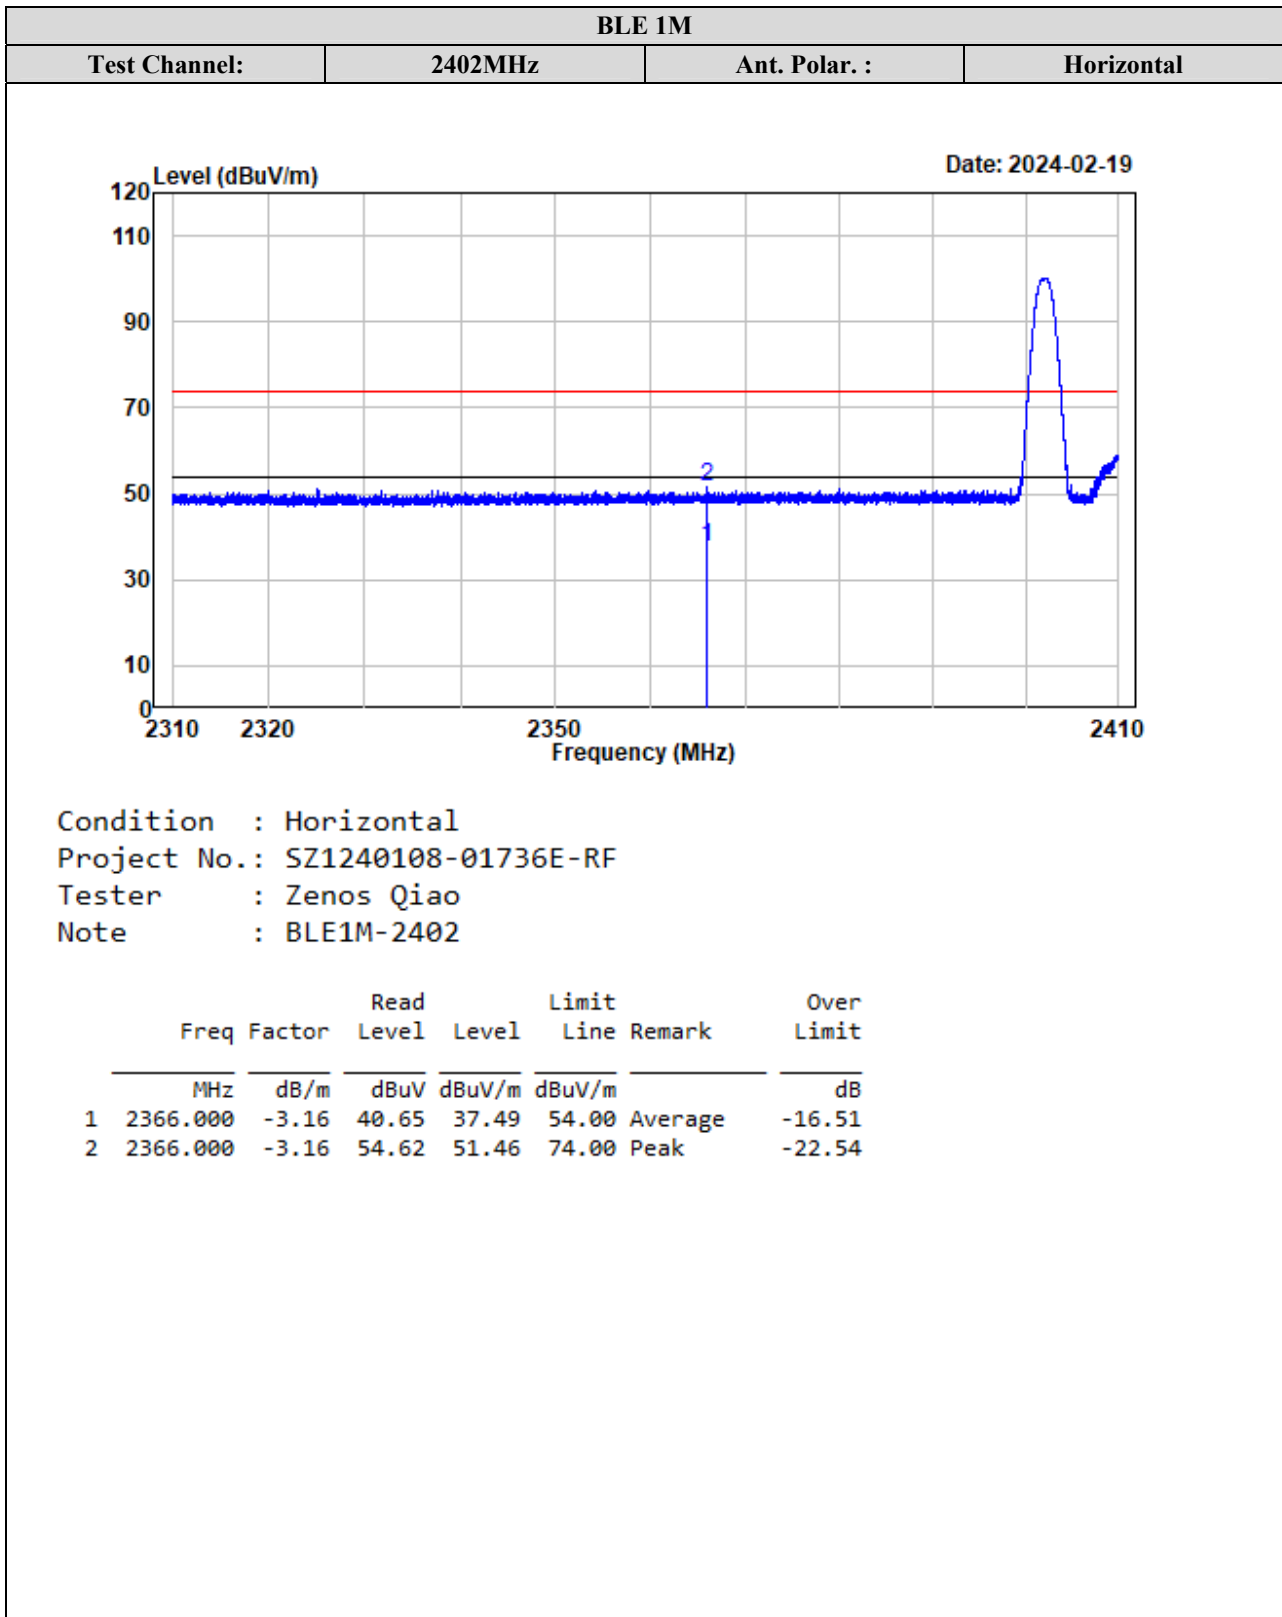


| BLE 1M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2402MHz | Ant. Polar. : | Vertical |

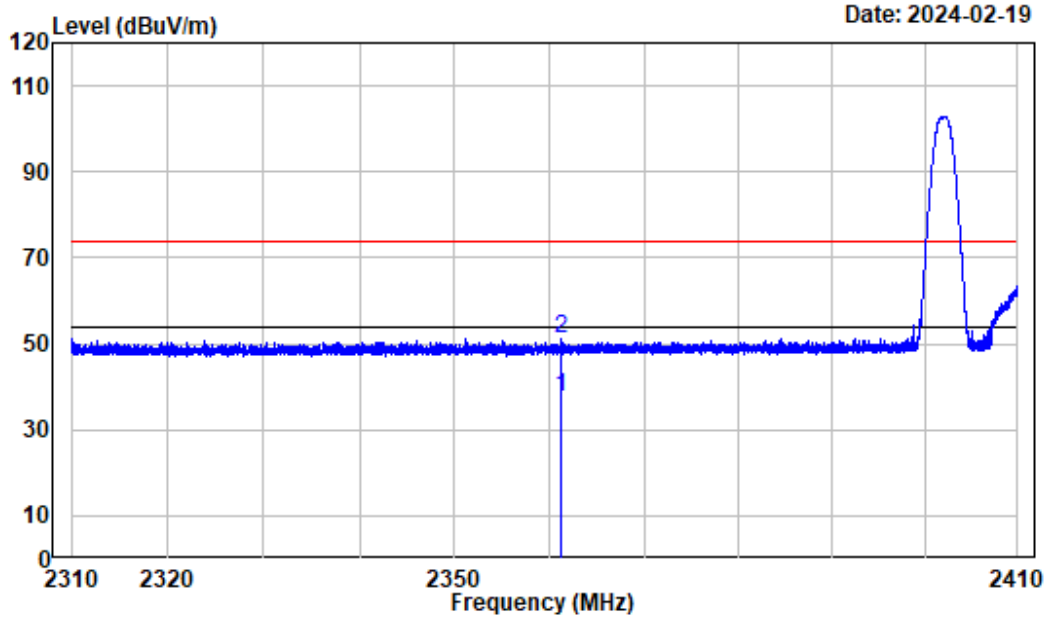

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2402

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|----------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2361.238 | -3.16 | 40.78 | 37.62 | 54.00 | Average -16.38 |
| 2 | 2361.238 | -3.16 | 54.47 | 51.31 | 74.00 | Peak -22.69 |


| BLE 1M | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2480MHz | Ant. Polar. : | Horizontal |

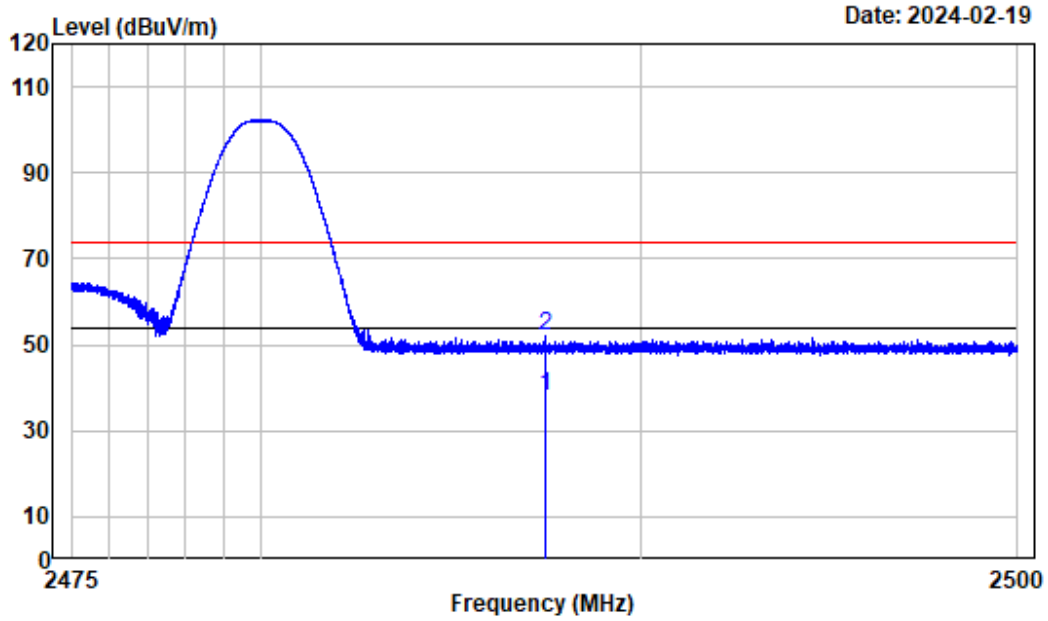

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2487.488 | -3.17 | 41.36 | 38.19 | 54.00 | Average | -15.81 |
| 2 | 2487.488 | -3.17 | 55.13 | 51.96 | 74.00 | Peak | -22.04 |


| BLE 1M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2480MHz | Ant. Polar. : | Vertical |

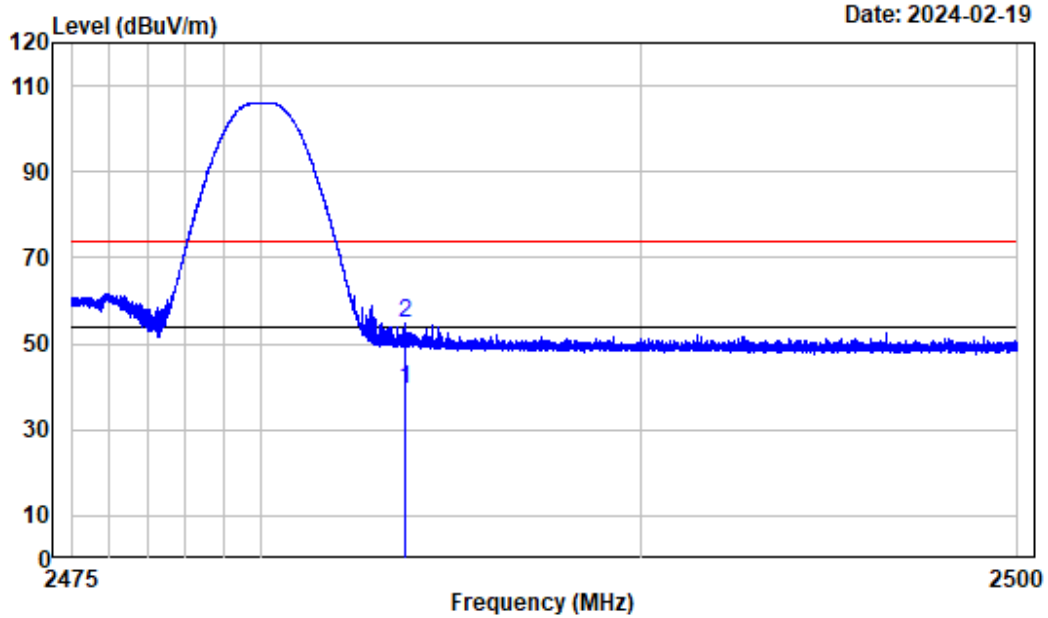

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE1M-2480

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2483.784 | -3.17 | 42.56 | 39.39 | 54.00 | Average | -14.61 |
| 2 | 2483.784 | -3.17 | 57.82 | 54.65 | 74.00 | Peak | -19.35 |


| BLE 2M | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2404MHz | Ant. Polar. : | Horizontal |

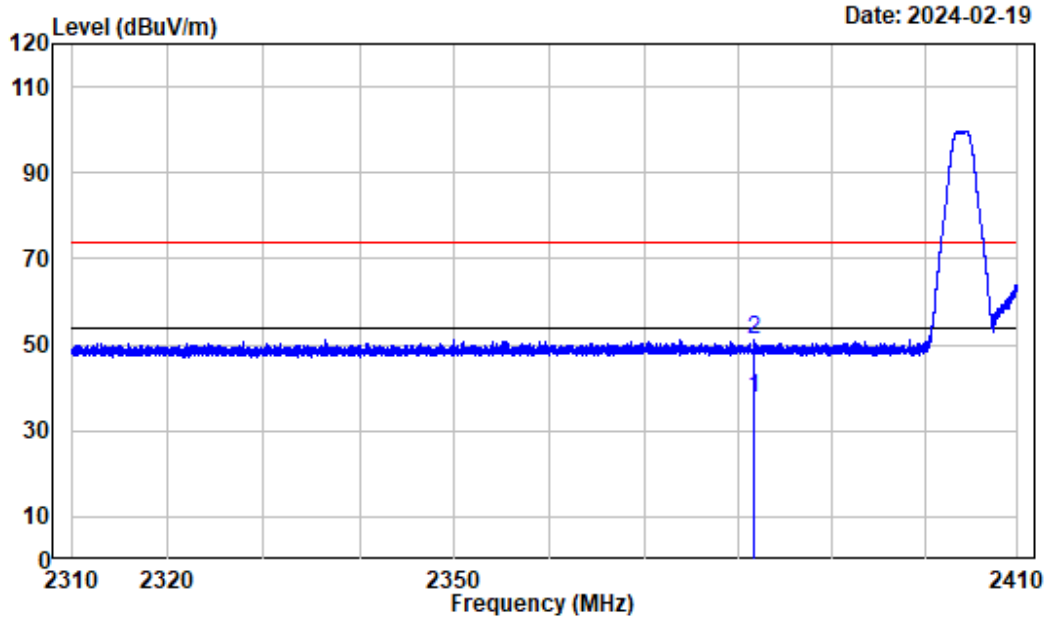

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE2M-2404

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|----------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2381.813 | -3.19 | 40.76 | 37.57 | 54.00 | Average -16.43 |
| 2 | 2381.813 | -3.19 | 54.53 | 51.34 | 74.00 | Peak -22.66 |


| BLE 2M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2404MHz | Ant. Polar. : | Vertical |

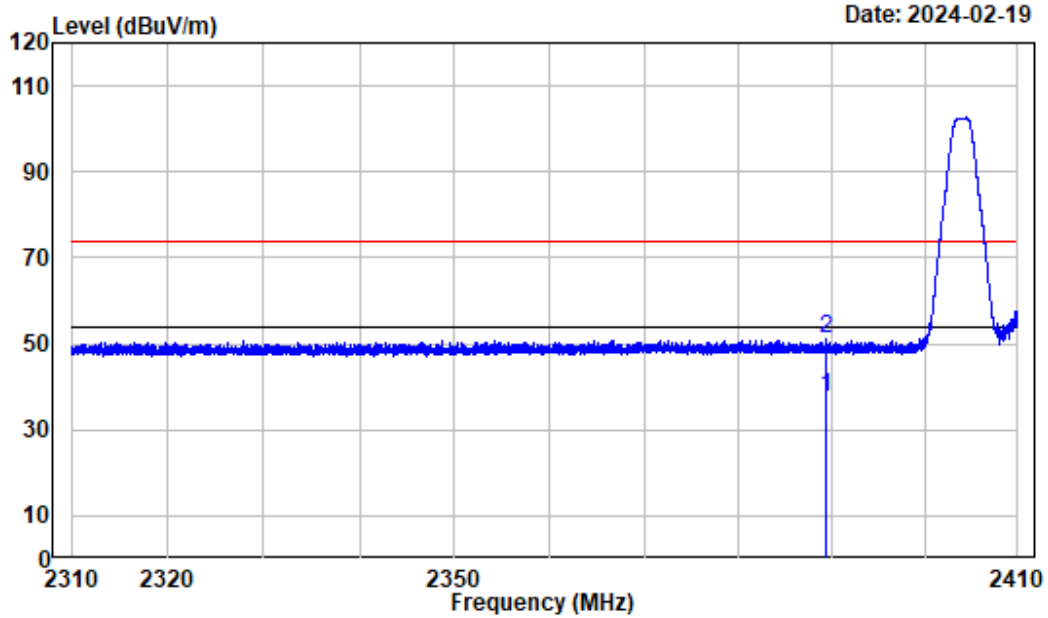

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE2M-2404

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|----------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2389.512 | -3.20 | 40.95 | 37.75 | 54.00 | Average -16.25 |
| 2 | 2389.512 | -3.20 | 54.19 | 50.99 | 74.00 | Peak -23.01 |


| BLE 2M | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2478MHz | Ant. Polar. : | Horizontal |

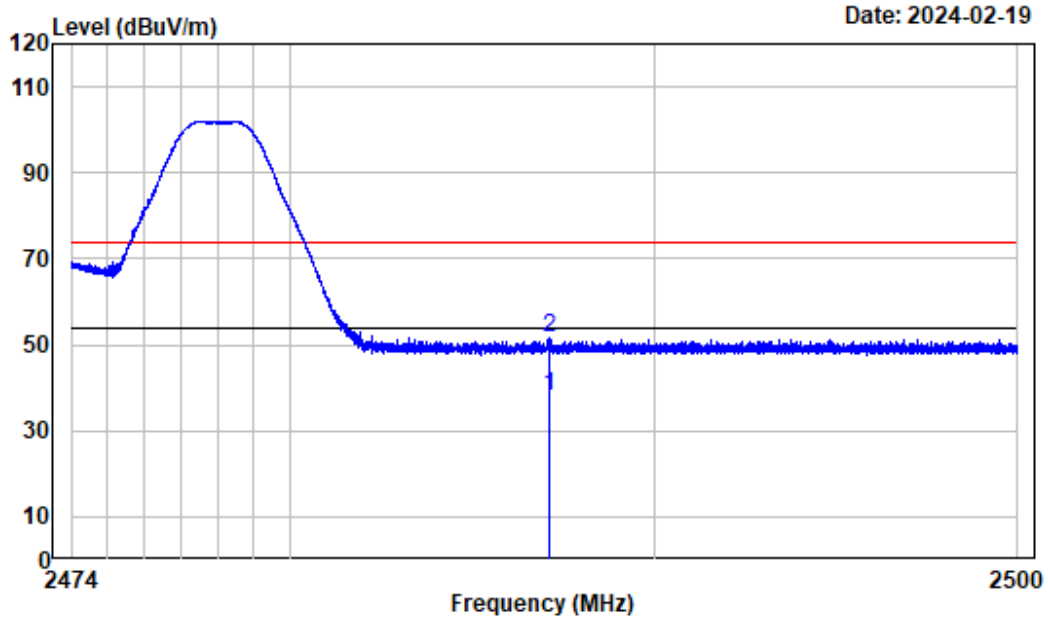

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE2M-2478

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|----------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2487.097 | -3.17 | 41.28 | 38.11 | 54.00 | Average -15.89 |
| 2 | 2487.097 | -3.17 | 54.84 | 51.67 | 74.00 | Peak -22.33 |

| BLE 2M | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2478MHz | Ant. Polar. : | Vertical |

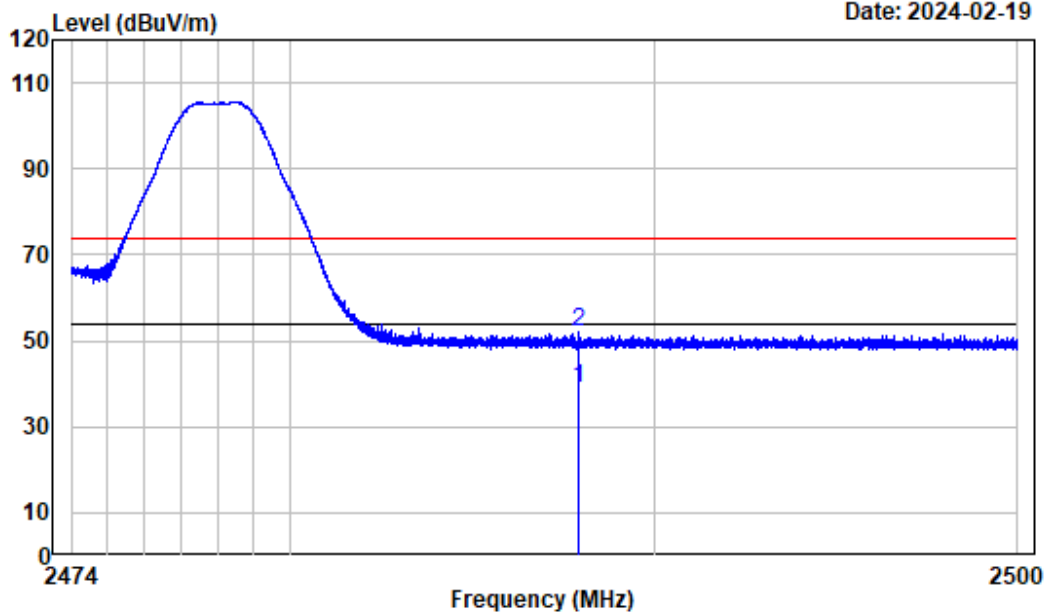

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : BLE2M-2478

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|----------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2487.897 | -3.18 | 42.08 | 38.90 | 54.00 | Average -15.10 |
| 2 | 2487.897 | -3.18 | 55.23 | 52.05 | 74.00 | Peak -21.95 |

Wi-Fi

| Frequency (MHz) | Receiver | | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|--------|-------------|---------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/Ave | | | | | |
| 802.11b | | | | | | | |
| Low Channel 2412MHz | | | | | | | |
| 4824.00 | 48.56 | PK | H | 2.45 | 51.01 | 74 | -22.99 |
| 4824.00 | 38.38 | AV | H | 2.45 | 40.83 | 54 | -13.17 |
| 4824.00 | 47.85 | PK | V | 2.45 | 50.30 | 74 | -23.70 |
| 4824.00 | 37.24 | AV | V | 2.45 | 39.69 | 54 | -14.31 |
| Middle Channel 2442MHz | | | | | | | |
| 4884.00 | 49.84 | PK | H | 2.60 | 52.44 | 74 | -21.56 |
| 4884.00 | 41.75 | AV | H | 2.60 | 44.35 | 54 | -9.65 |
| 4884.00 | 49.18 | PK | V | 2.60 | 51.78 | 74 | -22.22 |
| 4884.00 | 40.53 | AV | V | 2.60 | 43.13 | 54 | -10.87 |
| High Channel 2472MHz | | | | | | | |
| 4944.00 | 51.12 | PK | H | 2.61 | 53.73 | 74 | -20.27 |
| 4944.00 | 45.63 | AV | H | 2.61 | 48.24 | 54 | -5.76 |
| 4944.00 | 50.27 | PK | V | 2.61 | 52.88 | 74 | -21.12 |
| 4944.00 | 44.48 | AV | V | 2.61 | 47.09 | 54 | -6.91 |
| 802.11g | | | | | | | |
| Low Channel 2412MHz | | | | | | | |
| 4824.00 | 46.57 | PK | H | 2.45 | 49.02 | 74 | -24.98 |
| 4824.00 | 32.68 | AV | H | 2.45 | 35.13 | 54 | -18.87 |
| 4824.00 | 46.04 | PK | V | 2.45 | 48.49 | 74 | -25.51 |
| 4824.00 | 32.19 | AV | V | 2.45 | 34.64 | 54 | -19.36 |
| Middle Channel 2442MHz | | | | | | | |
| 4884.00 | 47.03 | PK | H | 2.60 | 49.63 | 74 | -24.37 |
| 4884.00 | 33.24 | AV | H | 2.60 | 35.84 | 54 | -18.16 |
| 4884.00 | 36.45 | PK | V | 2.60 | 39.05 | 74 | -34.95 |
| 4884.00 | 32.39 | AV | V | 2.60 | 34.99 | 54 | -19.01 |
| High Channel 2472MHz | | | | | | | |
| 4944.00 | 47.52 | PK | H | 2.61 | 50.13 | 74 | -23.87 |
| 4944.00 | 33.75 | AV | H | 2.61 | 36.36 | 54 | -17.64 |
| 4944.00 | 46.83 | PK | V | 2.61 | 49.44 | 74 | -24.56 |
| 4944.00 | 32.64 | AV | V | 2.61 | 35.25 | 54 | -18.75 |

| Frequency (MHz) | Receiver | | Polar (H/V) | Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|--------|-------------|---------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/Ave | | | | | |
| 802.11n20 | | | | | | | |
| Low Channel 2412MHz | | | | | | | |
| 4824.00 | 46.12 | PK | H | 2.45 | 48.57 | 74 | -25.43 |
| 4824.00 | 32.85 | AV | H | 2.45 | 35.30 | 54 | -18.70 |
| 4824.00 | 45.76 | PK | V | 2.45 | 48.21 | 74 | -25.79 |
| 4824.00 | 32.43 | AV | V | 2.45 | 34.88 | 54 | -19.12 |
| Middle Channel 2442MHz | | | | | | | |
| 4884.00 | 46.31 | PK | H | 2.60 | 48.91 | 74 | -25.09 |
| 4884.00 | 33.14 | AV | H | 2.60 | 35.74 | 54 | -18.26 |
| 4884.00 | 45.89 | PK | V | 2.60 | 48.49 | 74 | -25.51 |
| 4884.00 | 32.52 | AV | V | 2.60 | 35.12 | 54 | -18.88 |
| High Channel 2472MHz | | | | | | | |
| 4944.00 | 46.54 | PK | H | 2.61 | 49.15 | 74 | -24.85 |
| 4944.00 | 33.48 | AV | H | 2.61 | 36.09 | 54 | -17.91 |
| 4944.00 | 46.02 | PK | V | 2.61 | 48.63 | 74 | -25.37 |
| 4944.00 | 32.61 | AV | V | 2.61 | 35.22 | 54 | -18.78 |

Note:


Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

Test plots for Band Edge Measurements (Radiated):

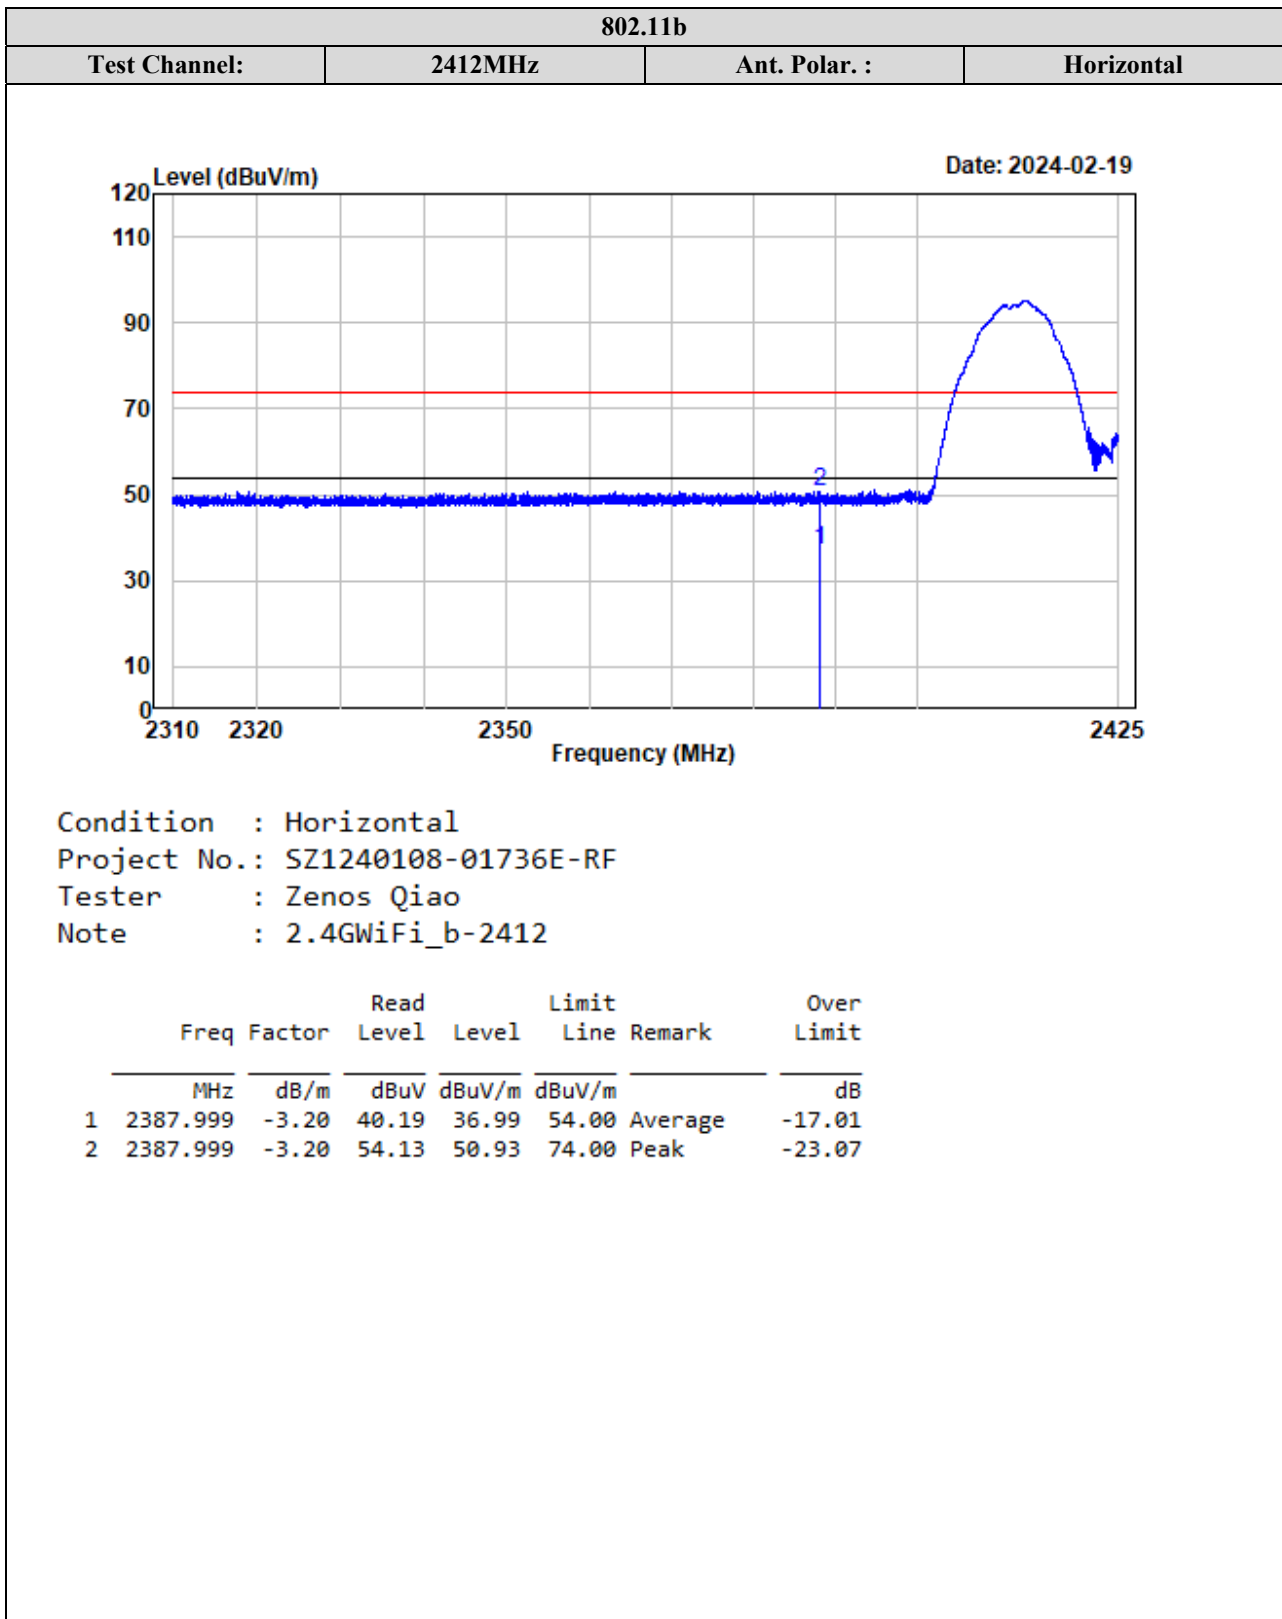


| 802.11b | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2412MHz | Ant. Polar. : | Vertical |

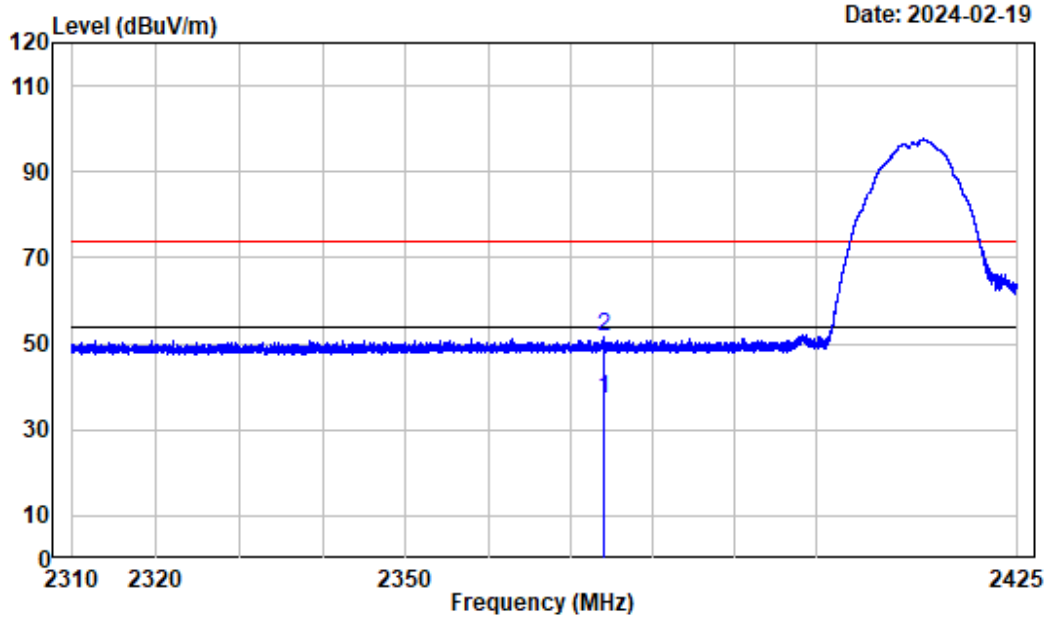

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_b-2412

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2374.141 | -3.18 | 40.35 | 37.17 | 54.00 | Average | -16.83 |
| 2 | 2374.141 | -3.18 | 54.75 | 51.57 | 74.00 | Peak | -22.43 |


| 802.11b | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2472MHz | Ant. Polar. : | Horizontal |

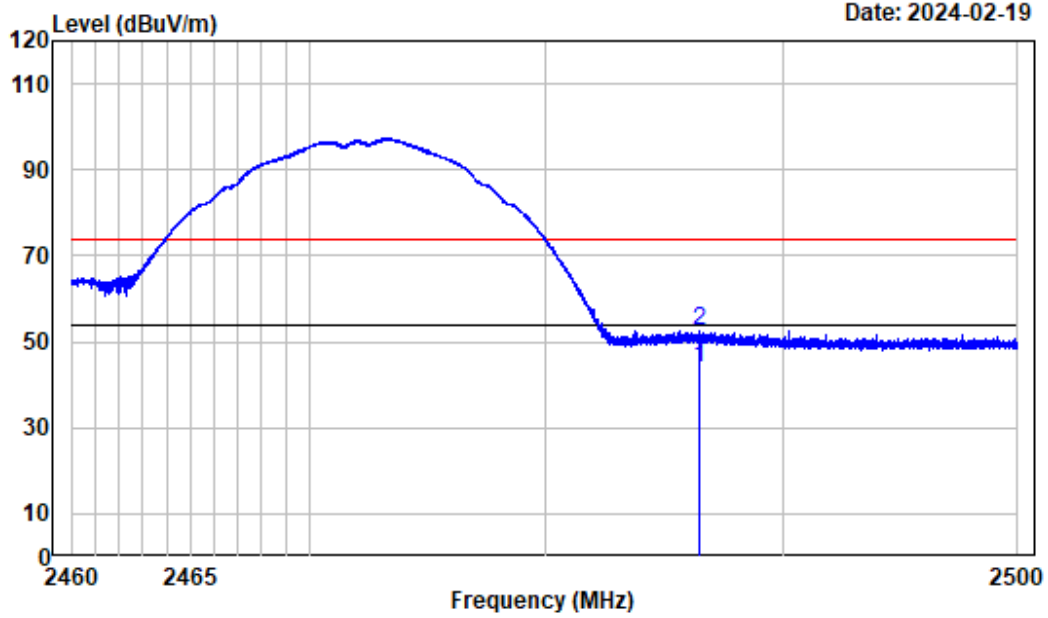

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4WiFi_b-2472

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2486.490 | -3.17 | 46.92 | 43.75 | 54.00 | Average | -10.25 |
| 2 | 2486.490 | -3.17 | 55.87 | 52.70 | 74.00 | Peak | -21.30 |


| 802.11b | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2472MHz | Ant. Polar. : | Vertical |

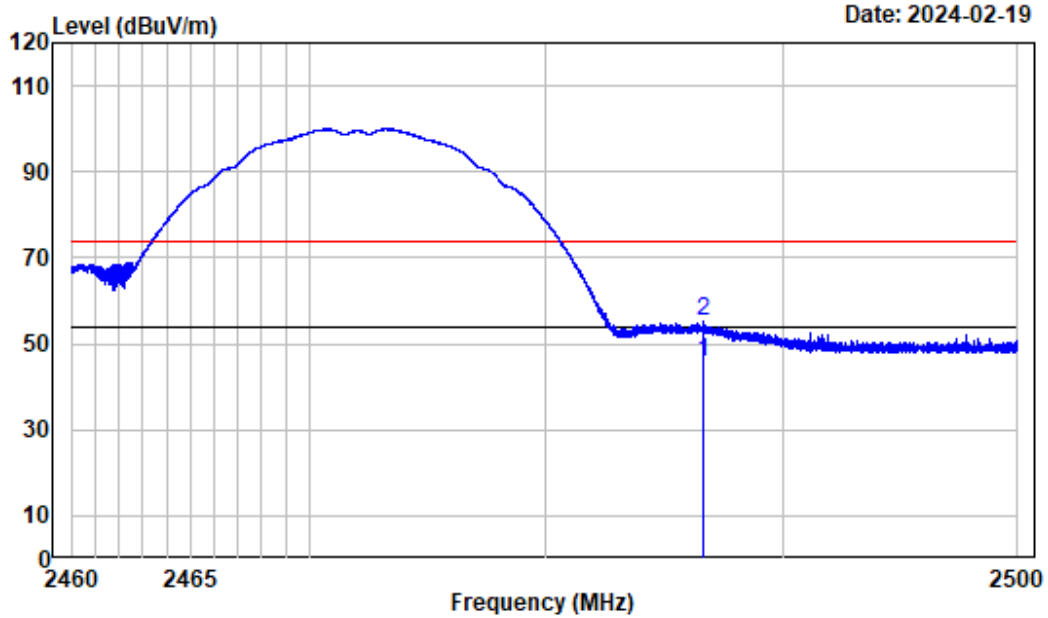

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_b-2472

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2486.680 | -3.17 | 48.89 | 45.72 | 54.00 | Average | -8.28 |
| 2 | 2486.680 | -3.17 | 58.31 | 55.14 | 74.00 | Peak | -18.86 |


| 802.11b | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2412MHz | Ant. Polar. : | Horizontal |

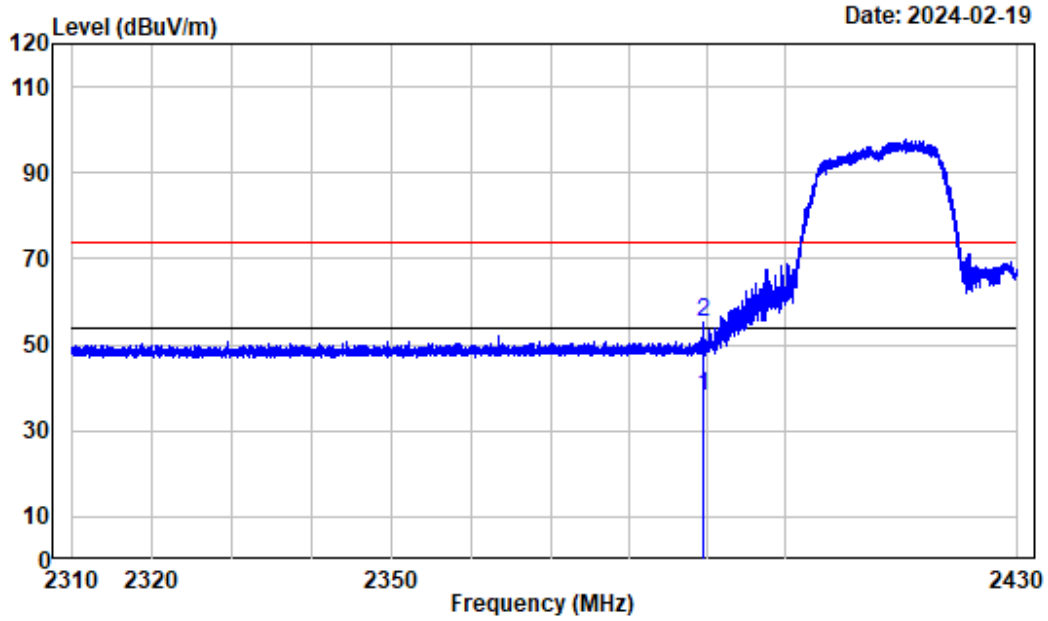

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4WiFi_g-2412

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2389.485 | -3.20 | 41.07 | 37.87 | 54.00 | Average | -16.13 |
| 2 | 2389.485 | -3.20 | 58.50 | 55.30 | 74.00 | Peak | -18.70 |


| 802.11b | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2412MHz | Ant. Polar. : | Vertical |

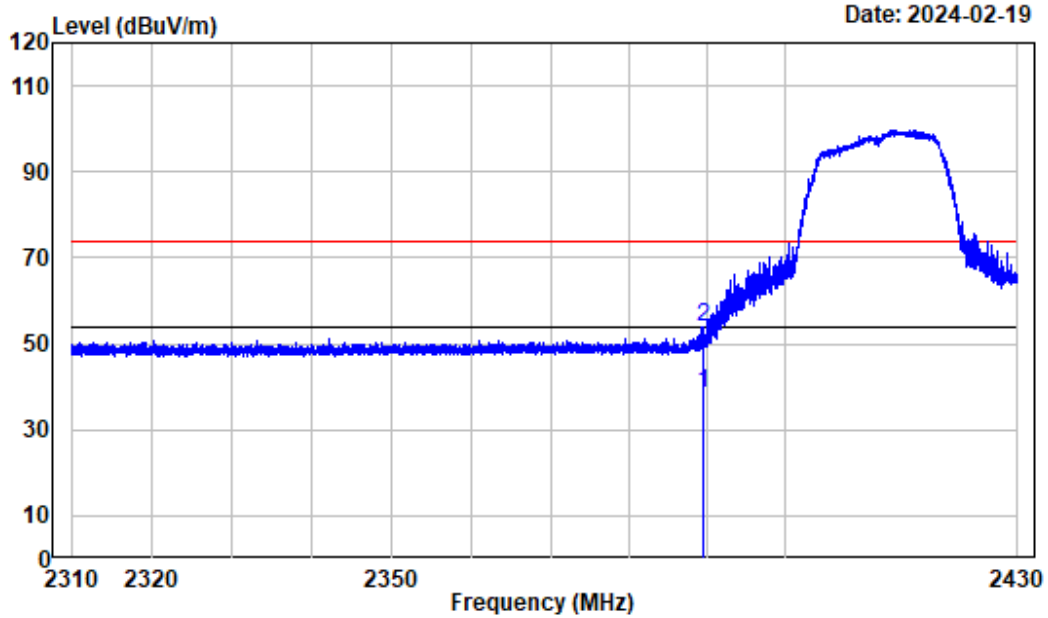

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_g-2412

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2389.515 | -3.20 | 41.63 | 38.43 | 54.00 | Average | -15.57 |
| 2 | 2389.515 | -3.20 | 57.22 | 54.02 | 74.00 | Peak | -19.98 |


| 802.11b | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2472MHz | Ant. Polar. : | Horizontal |

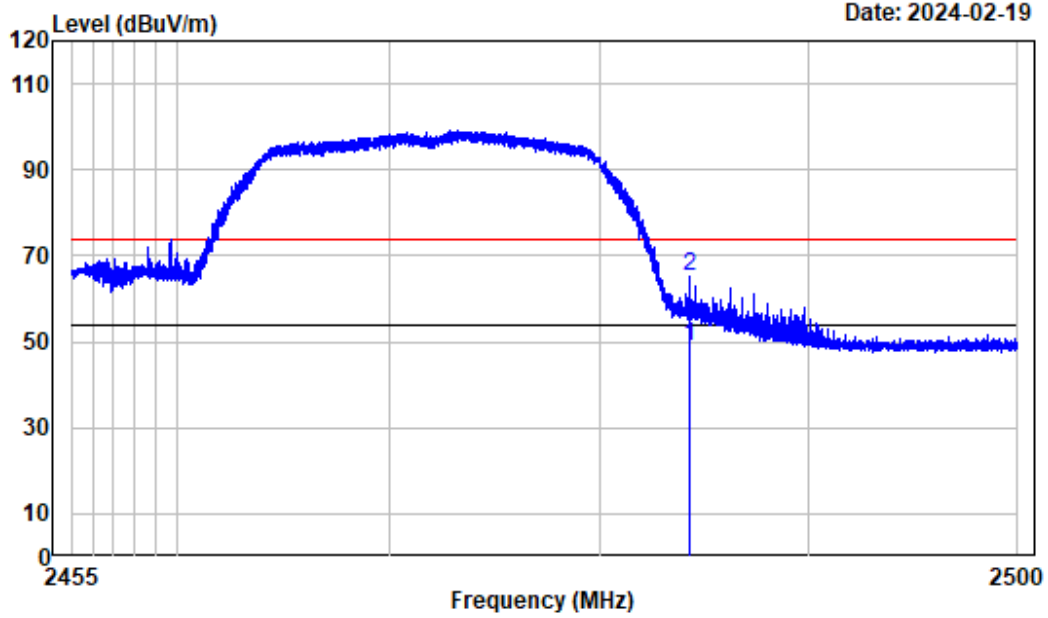

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4WiFi_g-2472

| | Freq | Factor | Read Level | Level | Limit | Over Limit |
|---|----------|--------|------------|--------|--------|---------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2484.329 | -3.17 | 51.87 | 48.70 | 54.00 | Average -5.30 |
| 2 | 2484.329 | -3.17 | 68.25 | 65.08 | 74.00 | Peak -8.92 |


| 802.11b | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2472MHz | Ant. Polar. : | Vertical |

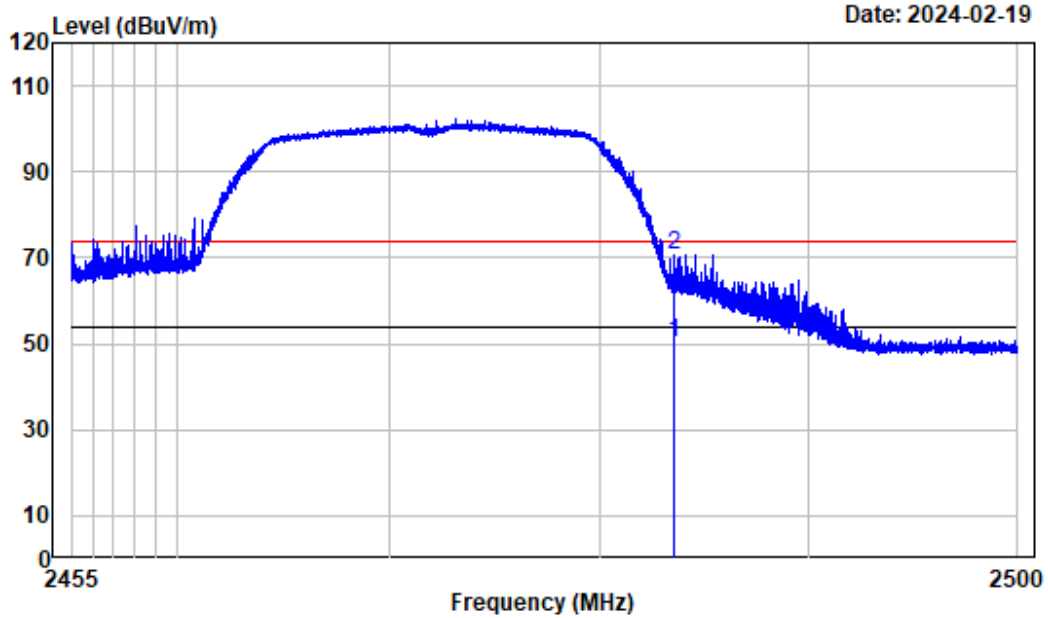

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_g-2472

| | Freq | Factor | Read Level | Limit Level | Limit Line | Remark | Over Limit |
|---|----------|--------|------------|-------------|------------|---------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2483.530 | -3.17 | 53.60 | 50.43 | 54.00 | Average | -3.57 |
| 2 | 2483.530 | -3.17 | 73.99 | 70.82 | 74.00 | Peak | -3.18 |


| 802.11n20 | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2412MHz | Ant. Polar. : | Horizontal |

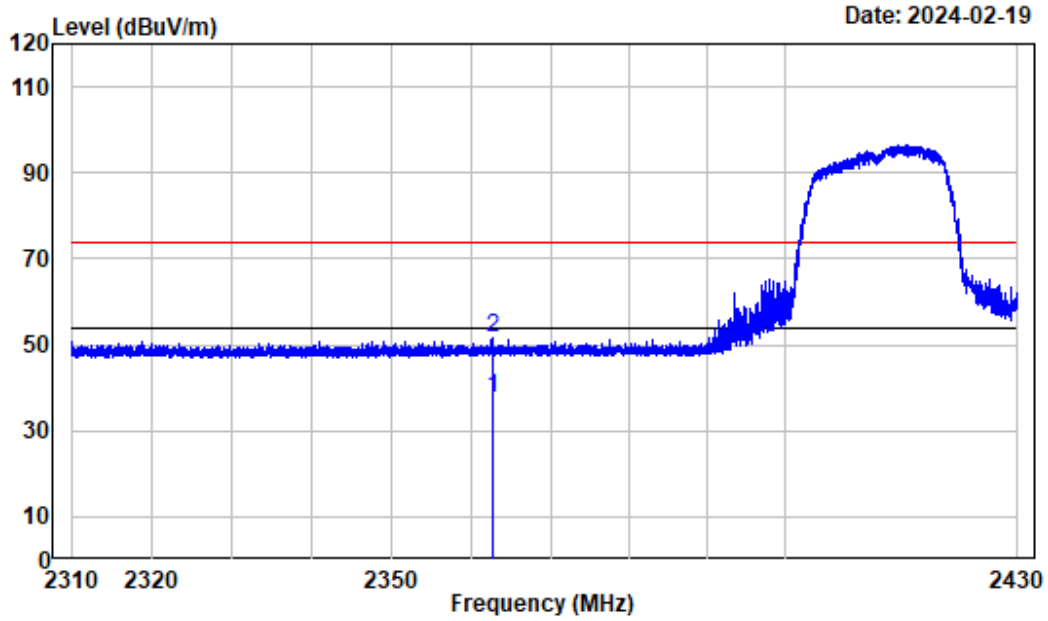

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4WiFi_n20-2412

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2362.590 | -3.17 | 40.95 | 37.78 | 54.00 | Average | -16.22 |
| 2 | 2362.590 | -3.17 | 54.65 | 51.48 | 74.00 | Peak | -22.52 |


| 802.11n20 | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2412MHz | Ant. Polar. : | Vertical |

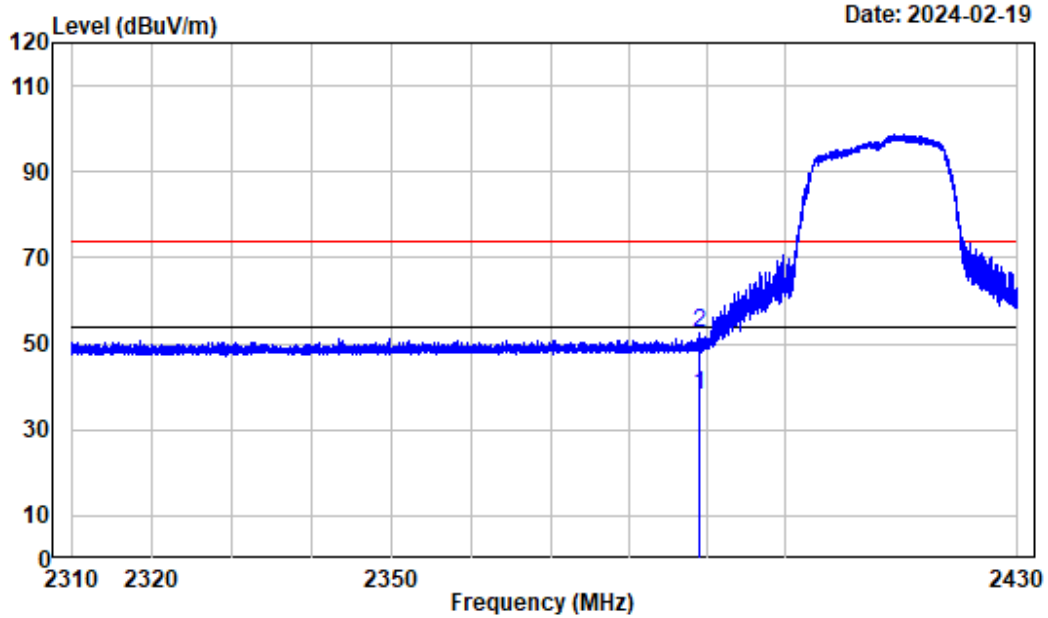

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_n20-2412

| | Freq | Factor | Read Level | Level | Limit | Line Remark | Over Limit |
|---|----------|--------|------------|--------|--------|-------------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2388.975 | -3.20 | 41.36 | 38.16 | 54.00 | Average | -15.84 |
| 2 | 2388.975 | -3.20 | 55.76 | 52.56 | 74.00 | Peak | -21.44 |


| 802.11n20 | | | |
|---------------|---------|---------------|------------|
| Test Channel: | 2472MHz | Ant. Polar. : | Horizontal |

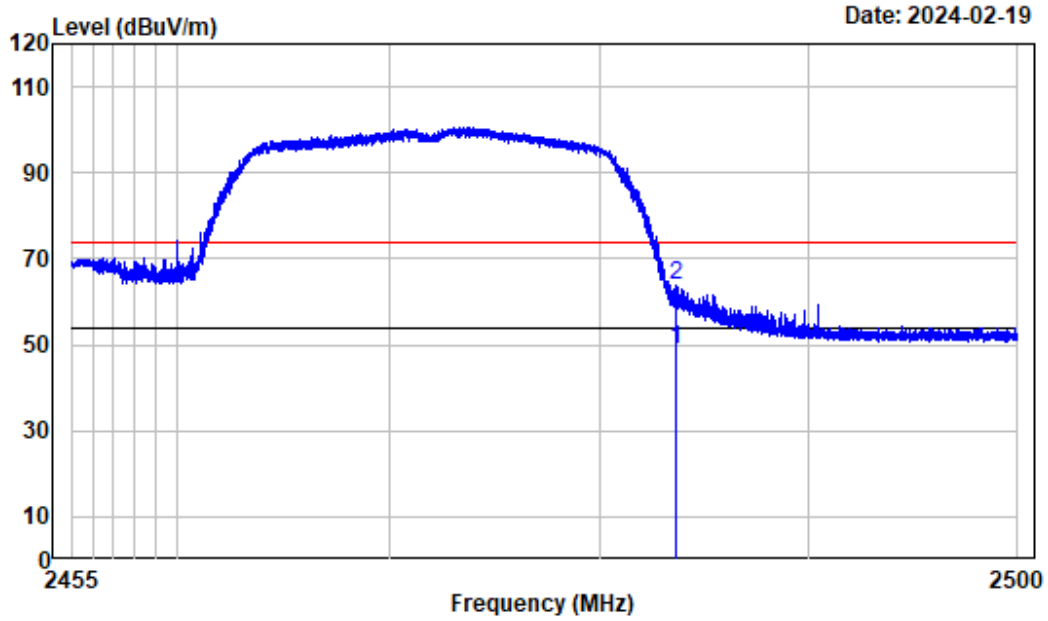

Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4WiFi_n20-2472

| | Freq | Factor | Read Level | Limit Level | Limit Line | Remark | Over Limit |
|---|----------|--------|------------|-------------|------------|---------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2483.648 | -3.17 | 52.25 | 49.08 | 54.00 | Average | -4.92 |
| 2 | 2483.648 | -3.17 | 66.91 | 63.74 | 74.00 | Peak | -10.26 |


| 802.11n20 | | | |
|---------------|---------|---------------|----------|
| Test Channel: | 2472MHz | Ant. Polar. : | Vertical |

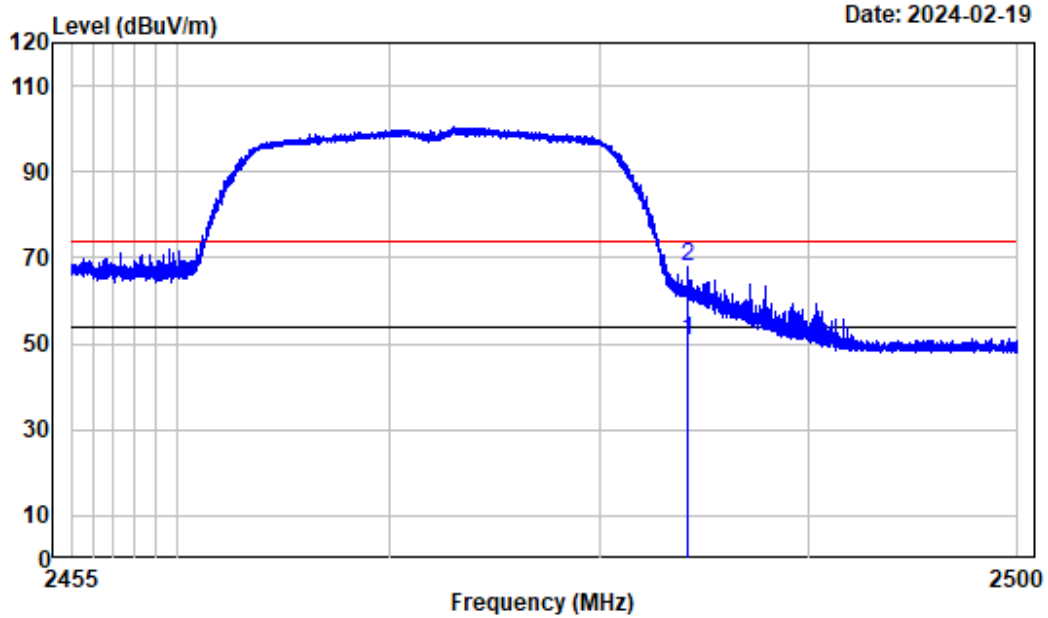


Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4GWiFi_n20-2472

| | Freq | Factor | Read Level | Limit Level | Limit Line | Remark | Over Limit |
|---|----------|--------|------------|-------------|------------|---------|------------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 2484.261 | -3.17 | 54.02 | 50.85 | 54.00 | Average | -3.15 |
| 2 | 2484.261 | -3.17 | 71.27 | 68.10 | 74.00 | Peak | -5.90 |

Listed with the worst harmonic margin test plot: (802.11b, 2472MHz)

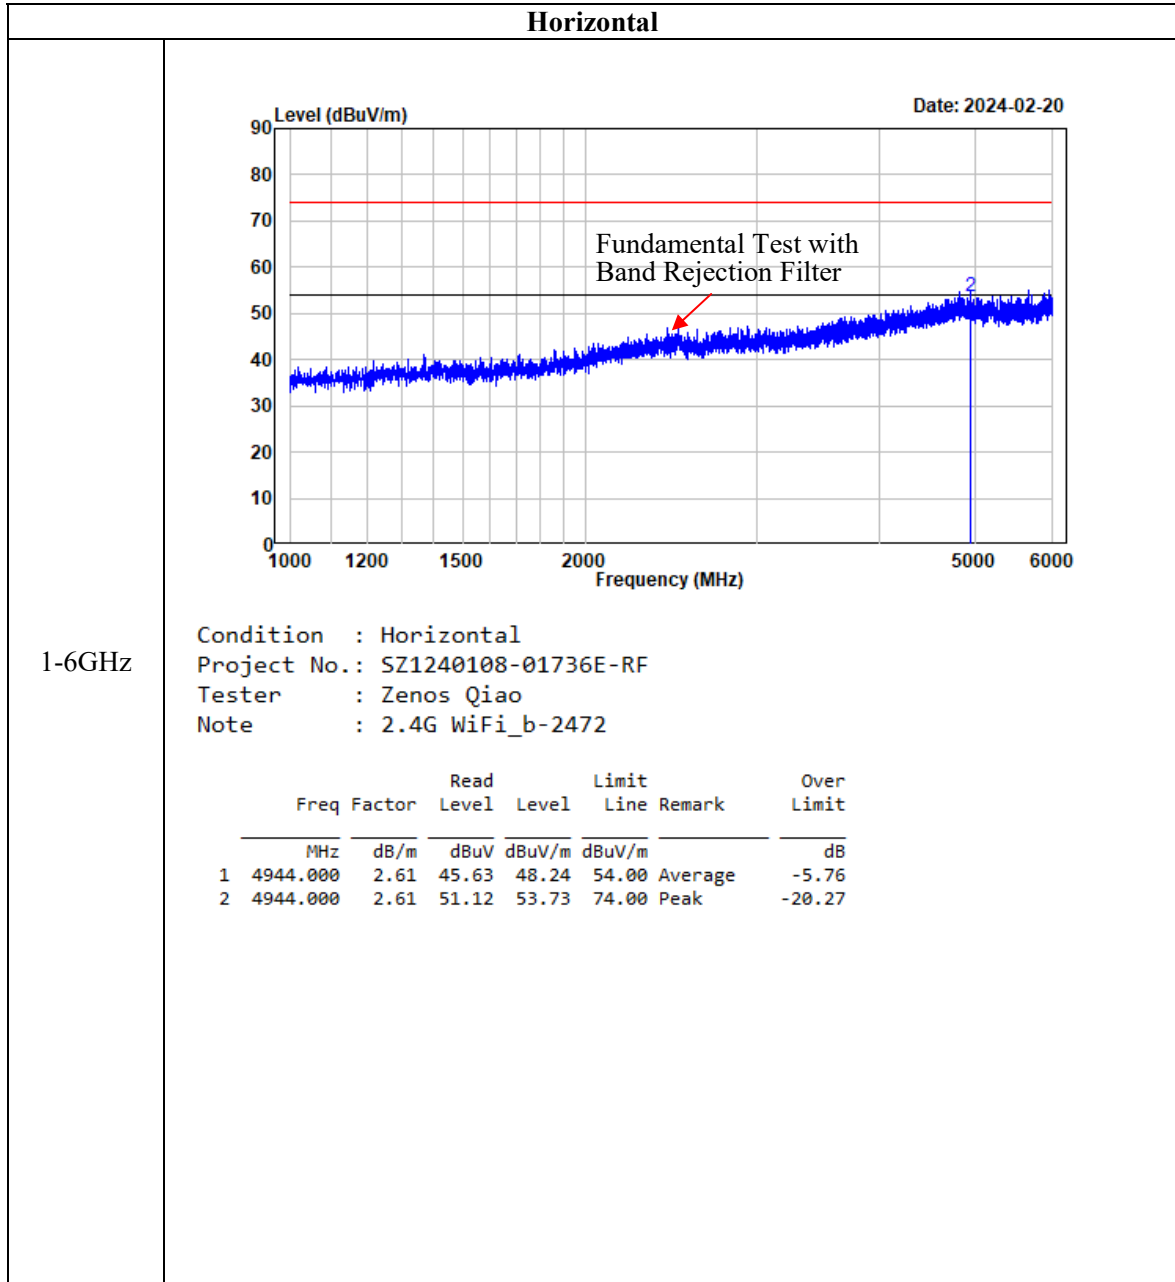

Vertical

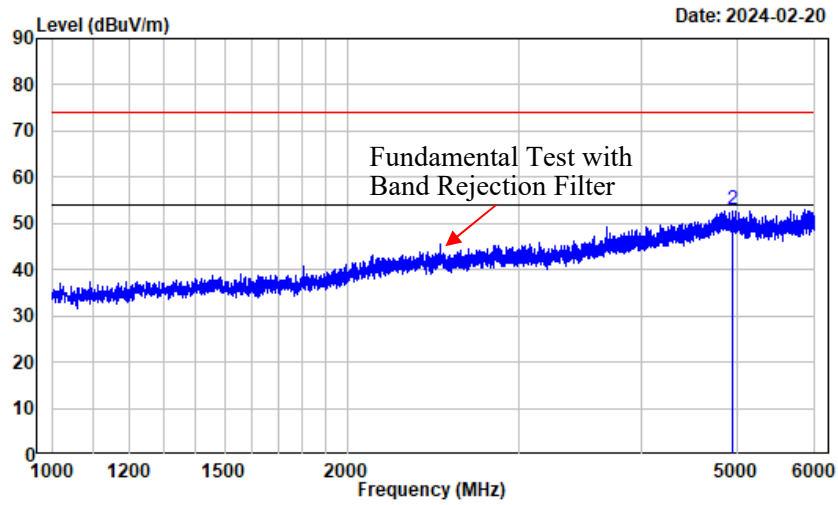


1-6GHz

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4G WiFi_b-2472

| | Freq | Factor | Read Level | Level | Limit | Over Limit | Remark |
|---|----------|--------|------------|--------|--------|------------|---------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 4944.000 | 2.61 | 44.48 | 47.09 | 54.00 | -6.91 | Average |
| 2 | 4944.000 | 2.61 | 50.27 | 52.88 | 74.00 | -21.12 | Peak |

Horizontal

6-18GHz

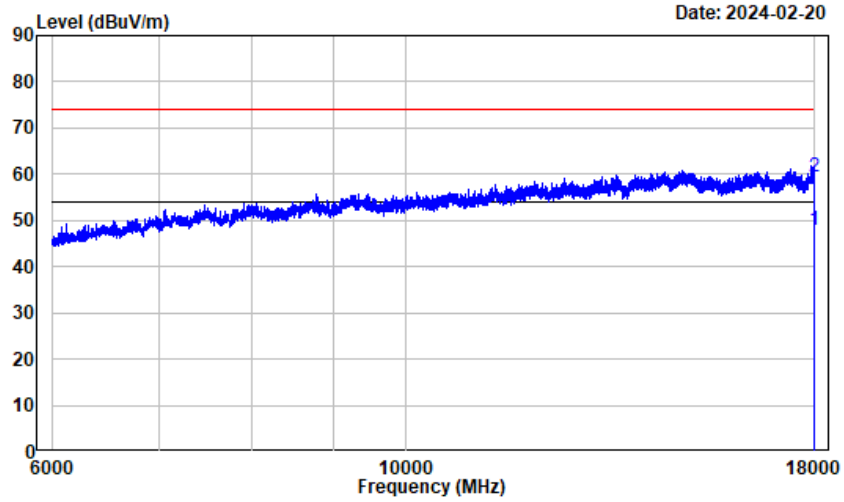


Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4G WiFi_b-2472

| | Freq | Factor | Read | | Limit | | Over Limit |
|---|-----------|--------|-------|--------|--------|---------|------------|
| | | | Level | Level | Line | Remark | |
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | | dB |
| 1 | 18000.000 | 24.62 | 23.32 | 47.94 | 54.00 | Average | -6.06 |
| 2 | 18000.000 | 24.62 | 34.88 | 59.50 | 74.00 | Peak | -14.50 |

Vertical

6-18GHz

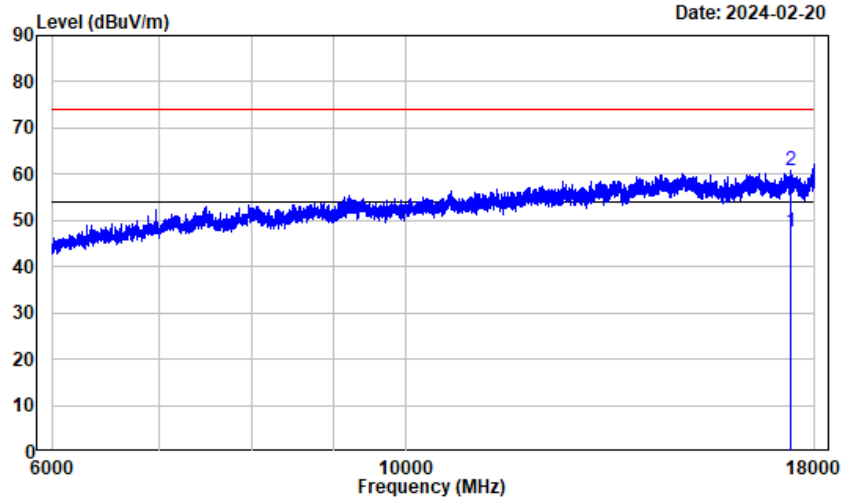


Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4G WiFi_b-2472

| Freq | Factor | Read | | Limit | | Remark | Over Limit |
|-------------|--------|-------|--------|--------|--------|---------|------------|
| | | Level | Level | Line | Line | | |
| MHz | dB/m | dBuV | dBuV/m | dBuV/m | dBuV/m | | dB |
| 1 17388.000 | 19.79 | 27.84 | 47.63 | 54.00 | 54.00 | Average | -6.37 |
| 2 17388.000 | 19.79 | 40.95 | 60.74 | 74.00 | 74.00 | Peak | -13.26 |

Horizontal

18-25GHz

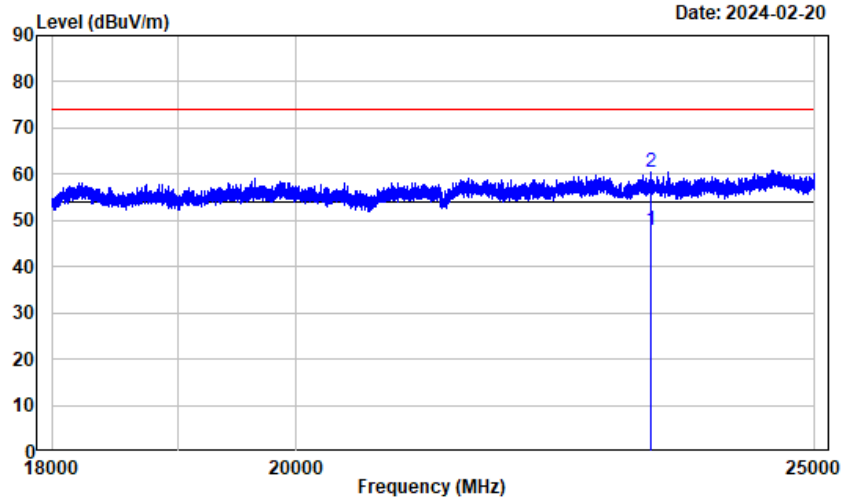


Condition : Horizontal
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4G WiFi_b-2472

| | Read | Limit | Over | | | | |
|------|-----------|-------|--------|-------|-------|---------|--------|
| Freq | Factor | Level | Level | | | | |
| MHz | dB/m | dBuV | dBuV/m | | | | |
| 1 | 23292.000 | 17.37 | 30.41 | 47.78 | 54.00 | Average | -6.22 |
| 2 | 23292.000 | 17.37 | 43.03 | 60.40 | 74.00 | Peak | -13.60 |

Vertical

18-25GHz

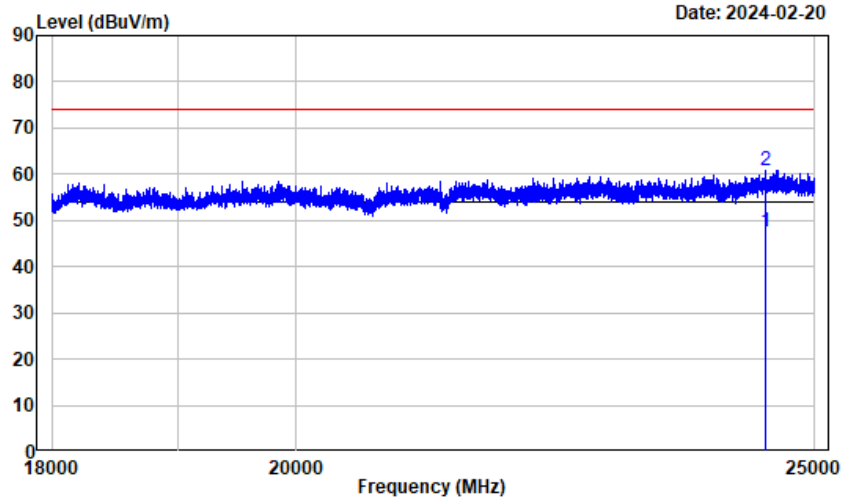

Condition : Vertical
 Project No.: SZ1240108-01736E-RF
 Tester : Zenos Qiao
 Note : 2.4G WiFi_b-2472

| | Read | Limit | Over | | | |
|------|-----------|-------|--------|--------|---------------|--------|
| Freq | Factor | Level | Level | Line | Remark | |
| MHz | dB/m | dBuV | dBuV/m | dBuV/m | | |
| 1 | 24484.630 | 18.97 | 28.60 | 47.57 | 54.00 Average | -6.43 |
| 2 | 24484.630 | 18.97 | 41.80 | 60.77 | 74.00 Peak | -13.23 |

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.8.1 & Clause 6.9.3

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

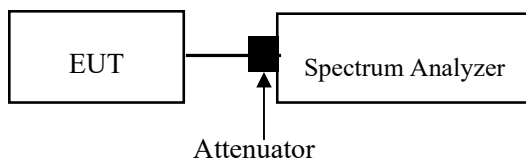

Test Data

Environmental Conditions

| | |
|---------------------------|--------------|
| Temperature: | 24.3~25.1 °C |
| Relative Humidity: | 44~47 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Bruce Lin on 2024-02-06 and Cheeb Huang on 2024-02-20.


EUT operation mode: Transmitting


Test Result: Compliant.


| Test Modes | Test Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit (MHz) |
|------------|----------------------|----------------------|-------------|
| 802.11b | 2412 | 8.58 | 0.5 |
| | 2442 | 8.10 | 0.5 |
| | 2472 | 8.10 | 0.5 |
| 802.11g | 2412 | 16.38 | 0.5 |
| | 2442 | 16.41 | 0.5 |
| | 2472 | 16.38 | 0.5 |
| 802.11n20 | 2412 | 17.67 | 0.5 |
| | 2442 | 17.64 | 0.5 |
| | 2472 | 17.64 | 0.5 |
| BLE 1M | 2402 | 0.672 | 0.5 |
| | 2440 | 0.672 | 0.5 |
| | 2480 | 0.675 | 0.5 |
| BLE 2M | 2404 | 1.170 | 0.5 |
| | 2440 | 1.176 | 0.5 |
| | 2478 | 1.176 | 0.5 |


6 dB Bandwidth

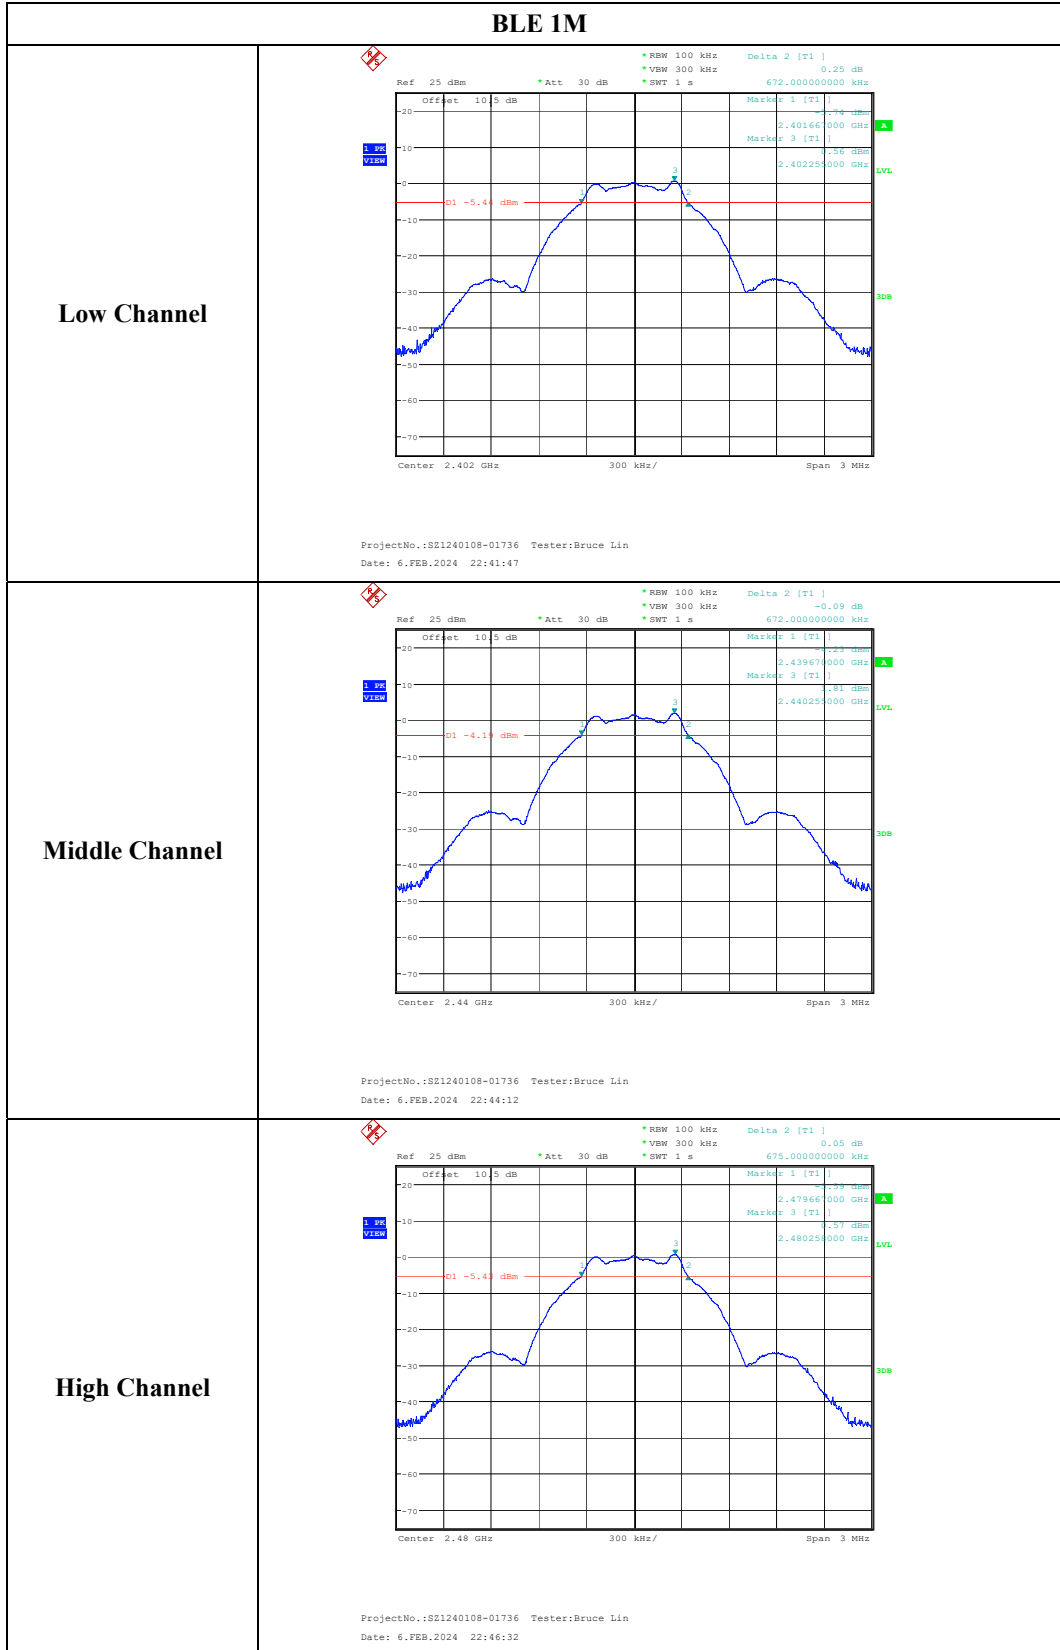

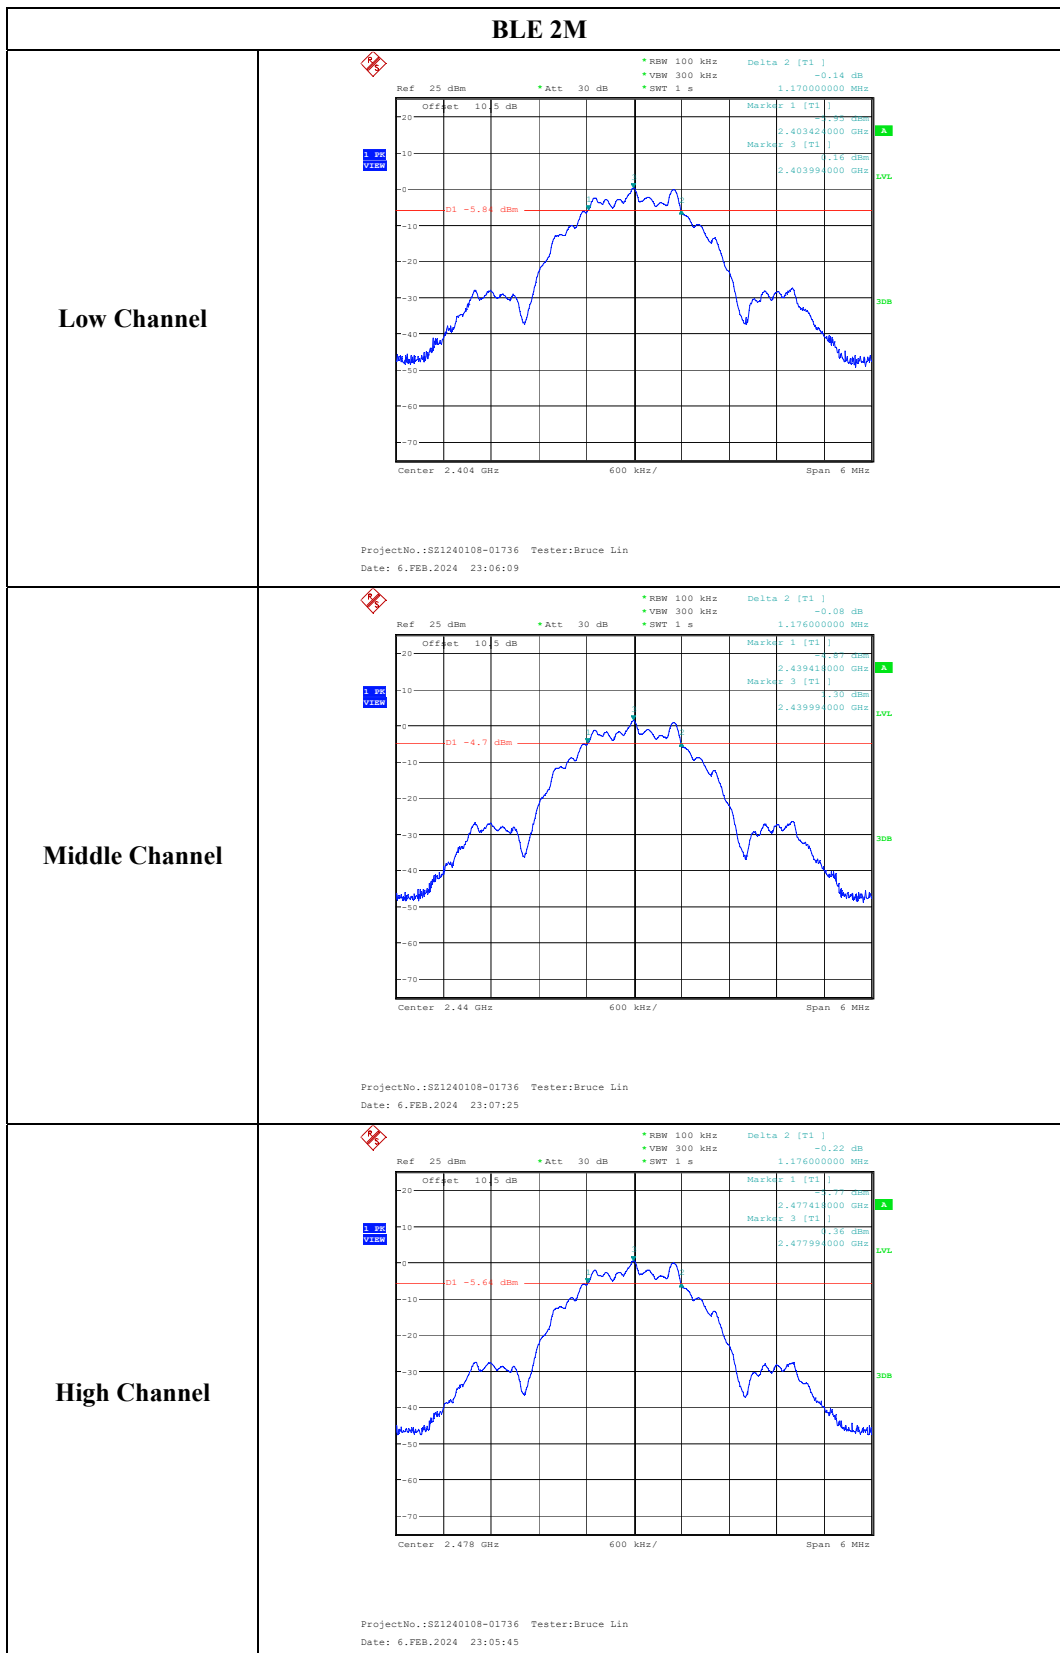

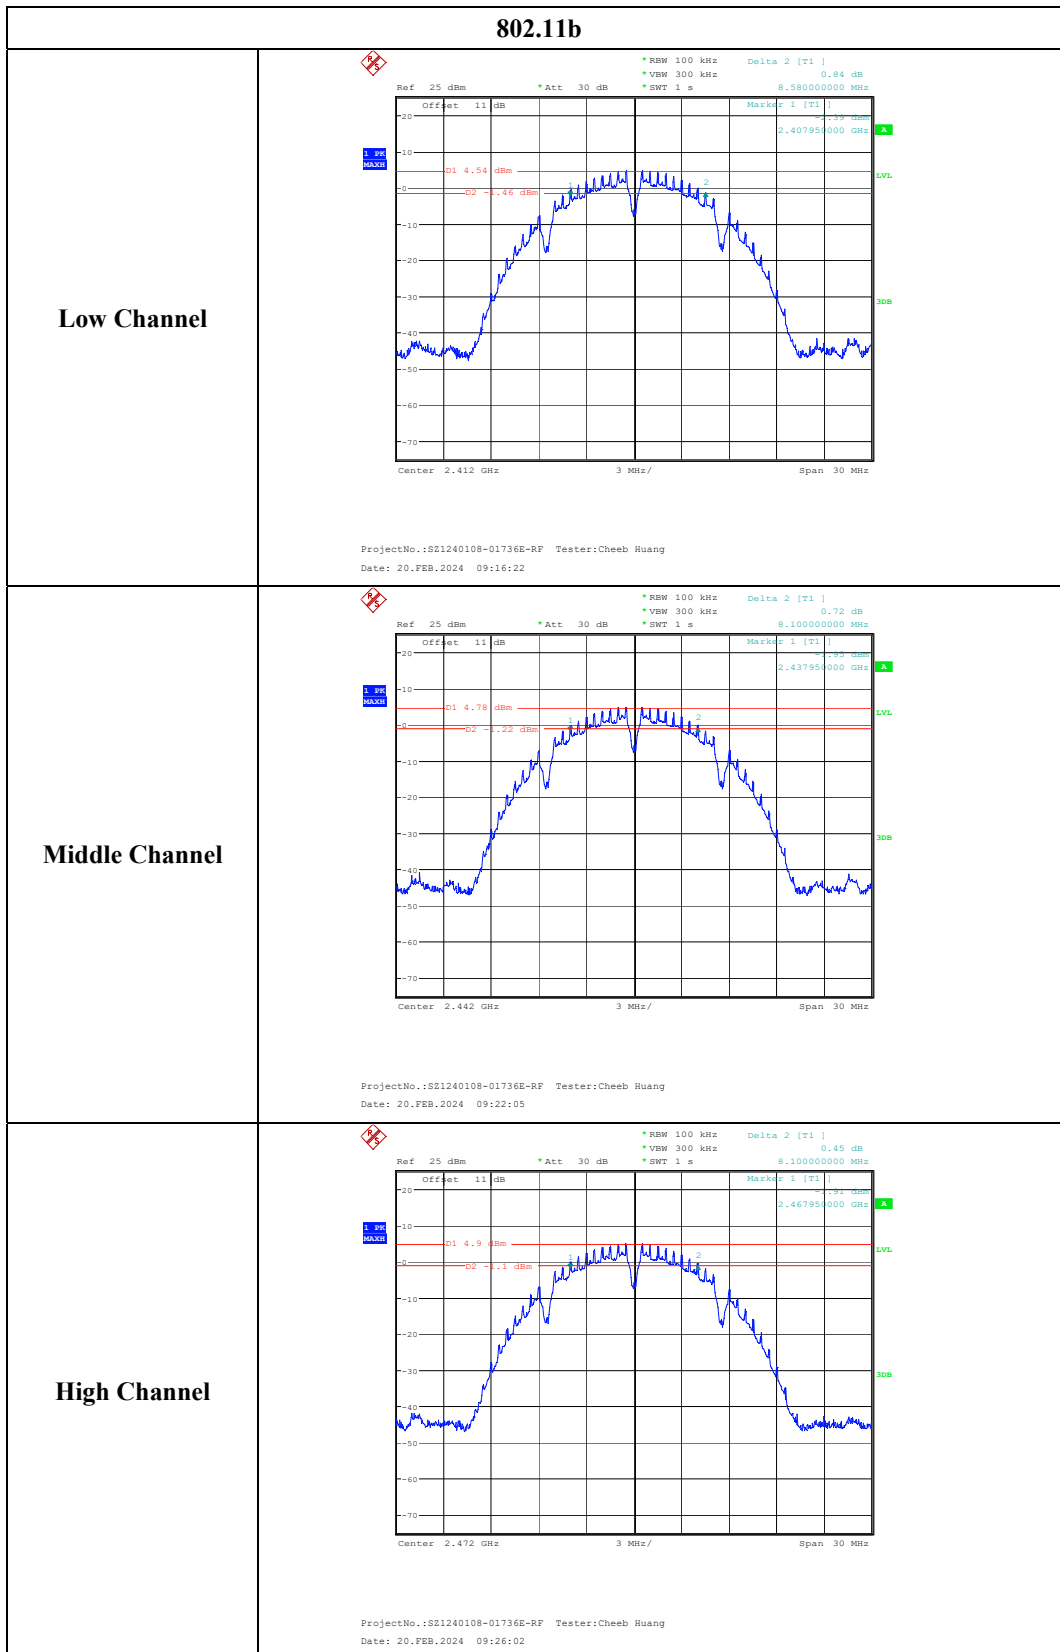

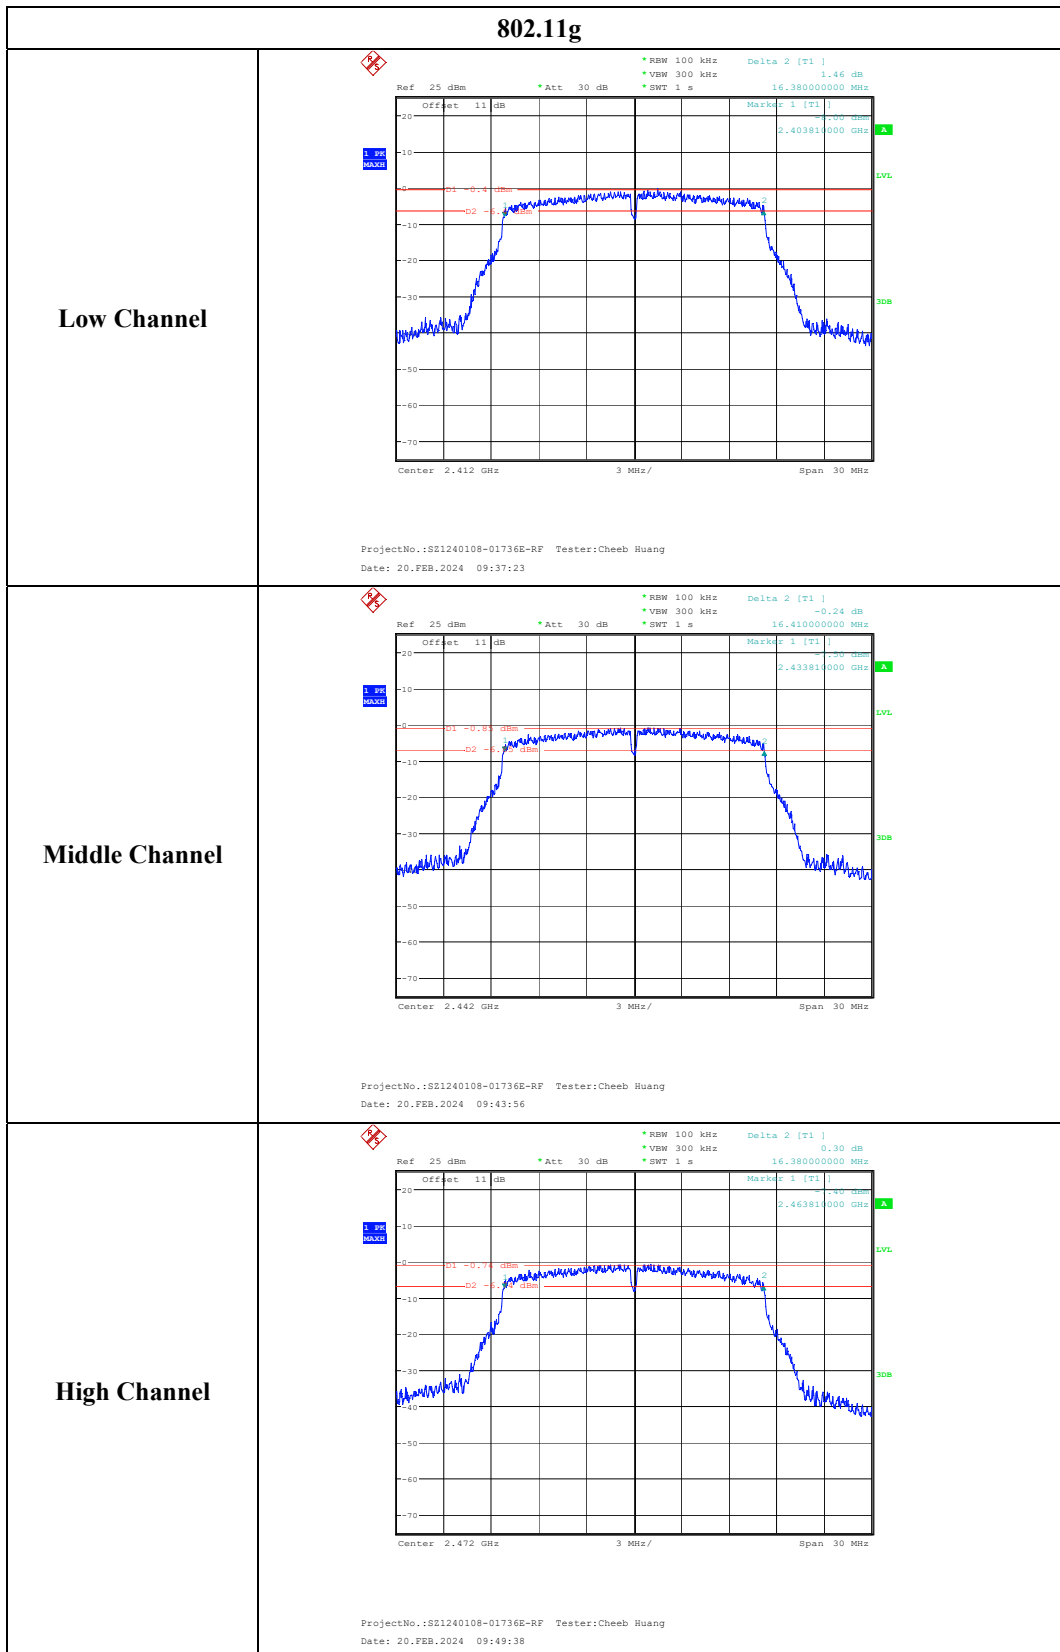

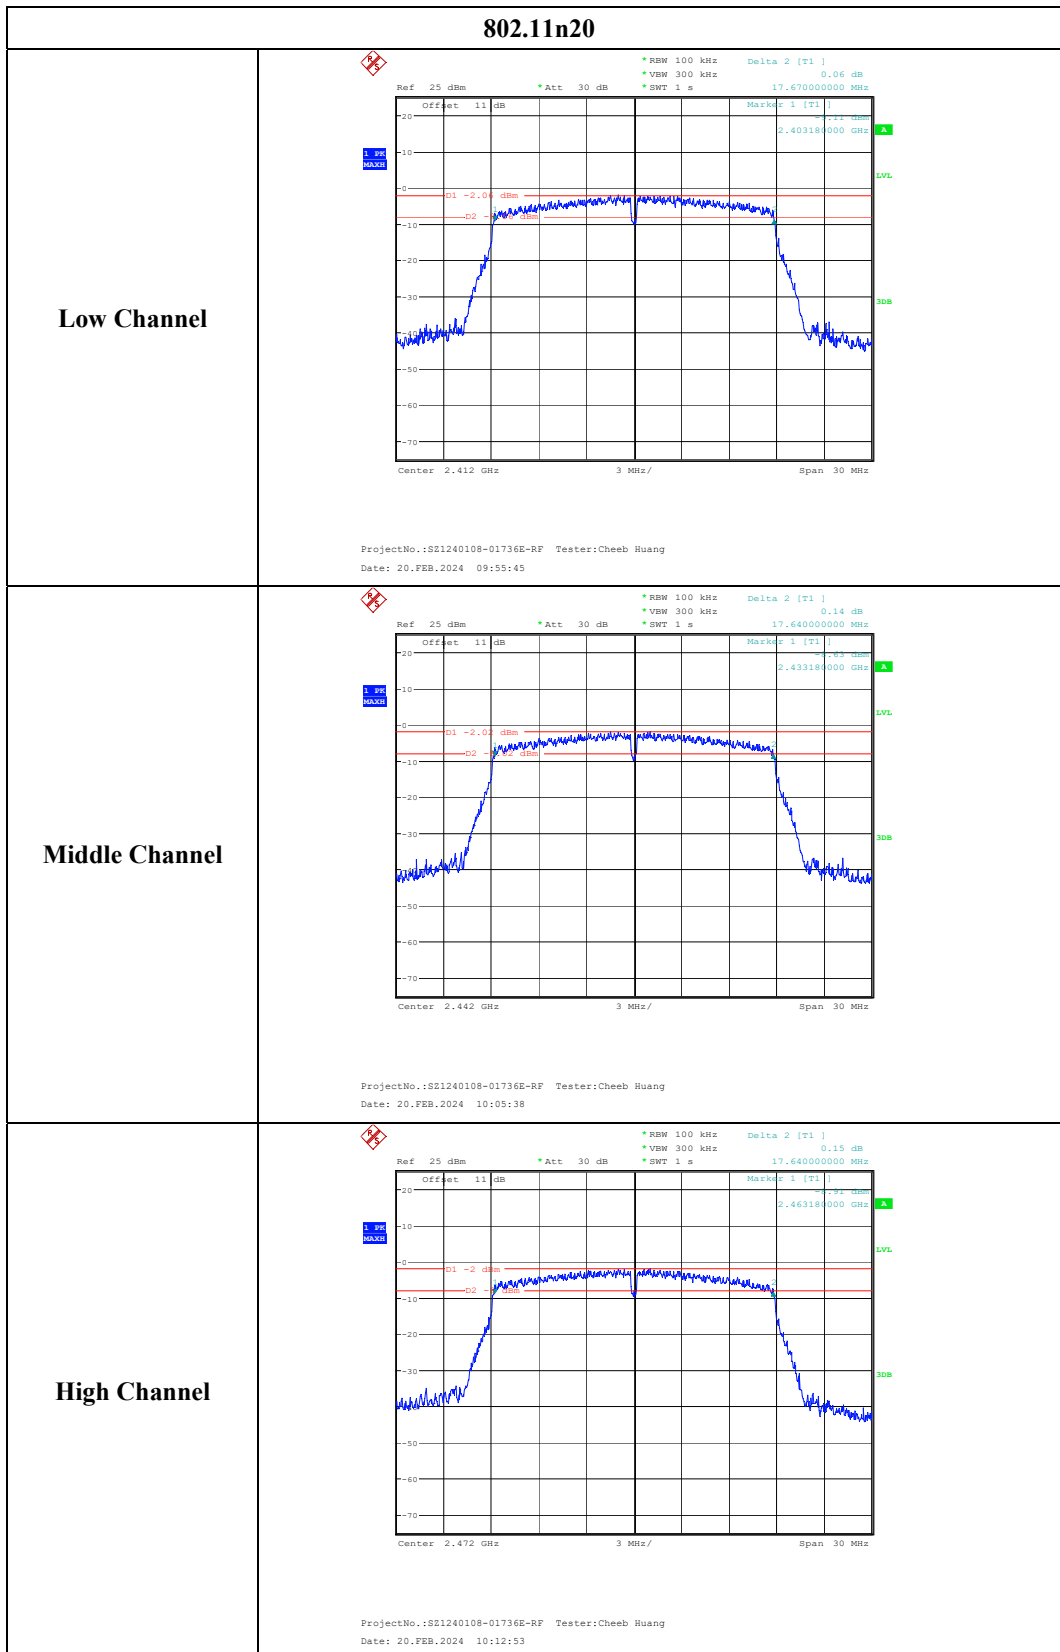

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure


Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE & Clause 11.9.2.3.2 for Wi-Fi

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

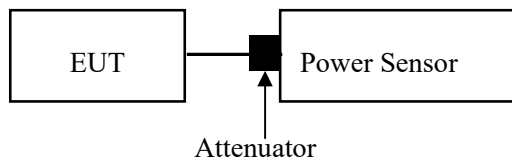

For BLE mode:

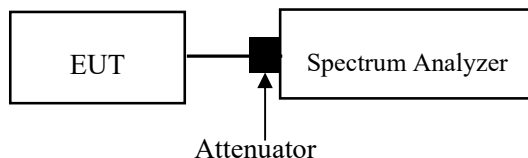

Test Data

Environmental Conditions

| | |
|---------------------------|--------------|
| Temperature: | 24.3~25.1 °C |
| Relative Humidity: | 44~47 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Bruce Lin on 2024-02-06 and Cheeb Huang on 2024-02-20.


EUT operation mode: Transmitting

Test Result: Compliant.

| Test Modes | Test Frequency (MHz) | Maximum Conducted Peak Output Power (dBm) | Maximum Conducted Average Output Power (dBm) | Limit (dBm) |
|------------|----------------------|---|--|-------------|
| 802.11b | 2412 | 16.18 | 12.75 | 30 |
| | 2442 | 16.36 | 12.92 | 30 |
| | 2472 | 16.31 | 12.87 | 30 |
| 802.11g | 2412 | 20.96 | 12.13 | 30 |
| | 2442 | 20.93 | 12.12 | 30 |
| | 2472 | 20.97 | 12.14 | 30 |
| 802.11n20 | 2412 | 19.97 | 11.11 | 30 |
| | 2442 | 19.89 | 11.05 | 30 |
| | 2472 | 19.92 | 11.05 | 30 |
| BLE 1M | 2402 | 1.61 | / | 30 |
| | 2440 | 2.90 | / | 30 |
| | 2480 | 1.71 | / | 30 |
| BLE 2M | 2404 | 1.68 | / | 30 |
| | 2440 | 2.80 | / | 30 |
| | 2478 | 1.87 | / | 30 |


BLE 1M

Low Channel

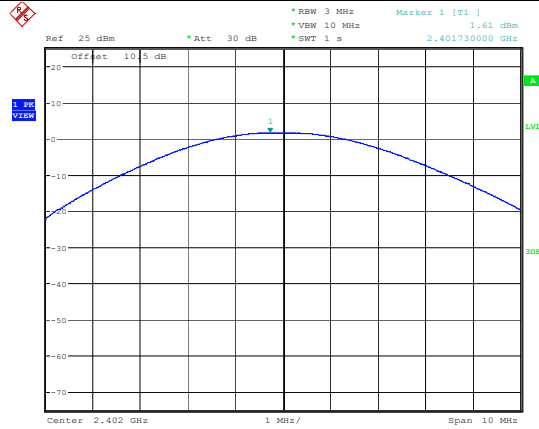


ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:41:01

Middle Channel

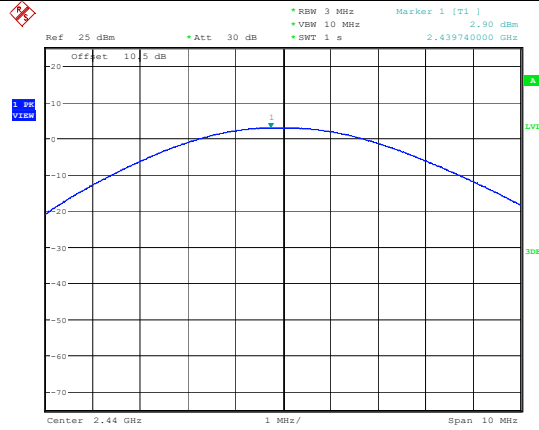

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:43:24


High Channel

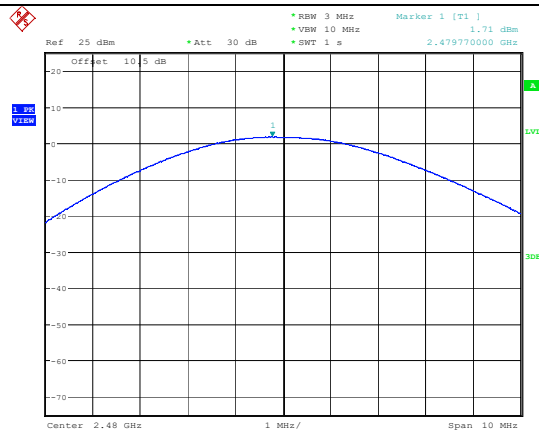

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:45:45


BLE 2M

Low Channel

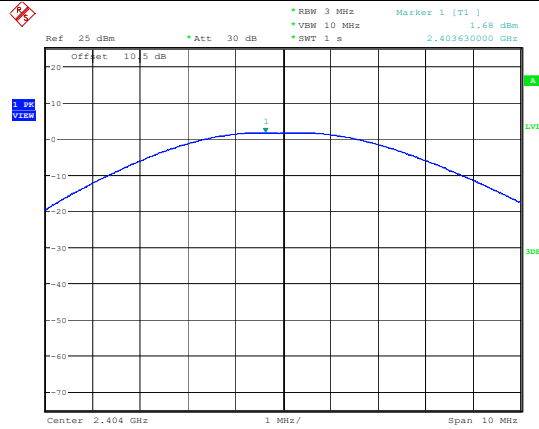


ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:51:26

Middle Channel

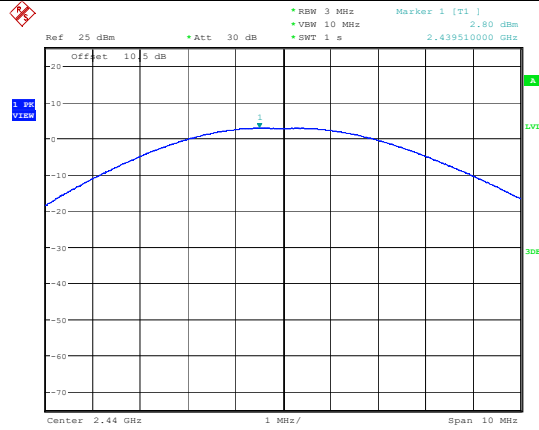

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:56:33

High Channel

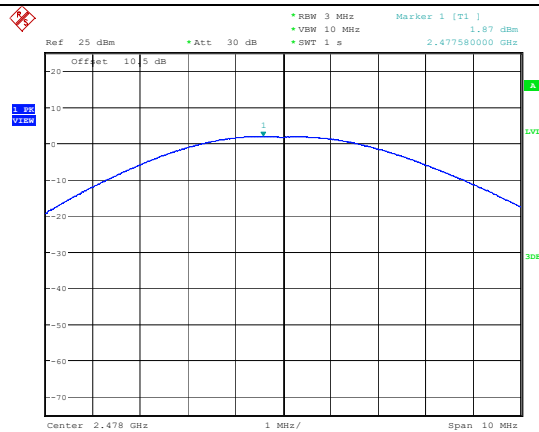

ProjectNo.:SZ1240108-01736 Tester:Bruce Lin
Date: 6.FEB.2024 22:58:40

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

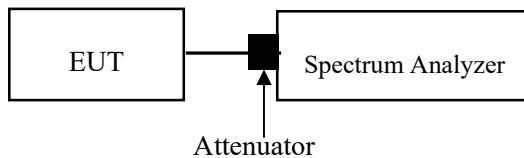

Test Data

Environmental Conditions

| | |
|---------------------------|--------------|
| Temperature: | 24.3~25.1 °C |
| Relative Humidity: | 44~47 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Bruce Lin on 2024-02-06 and Cheeb Huang on 2024-02-20.

EUT operation mode: Transmitting


Test Result: Compliant.


Band Edge, Single Channel


**BLE 1M,
Left Side**

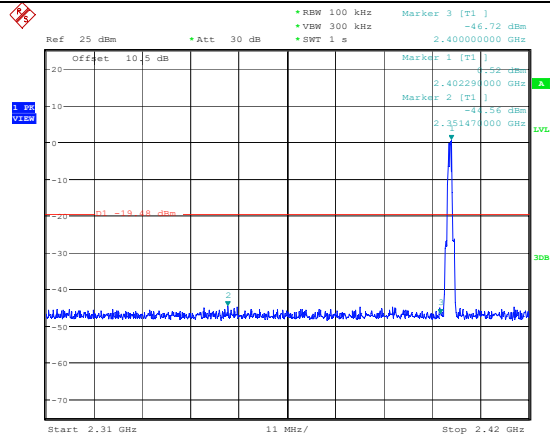



**BLE 1M,
Right Side**

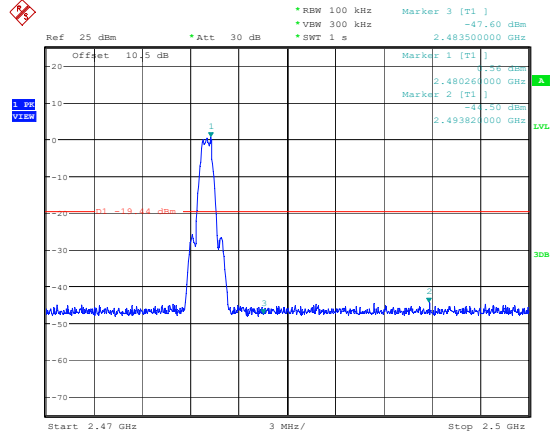

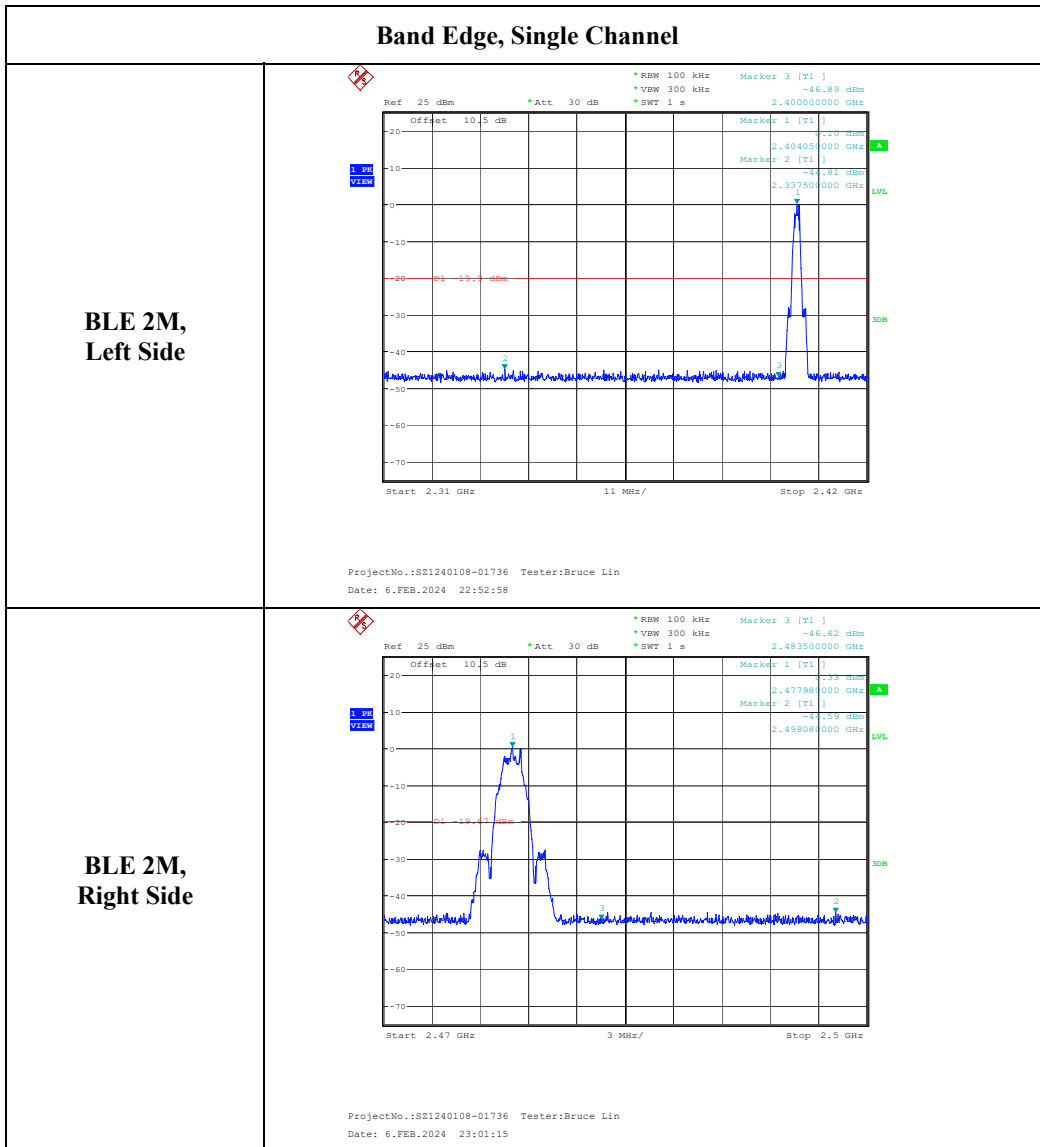

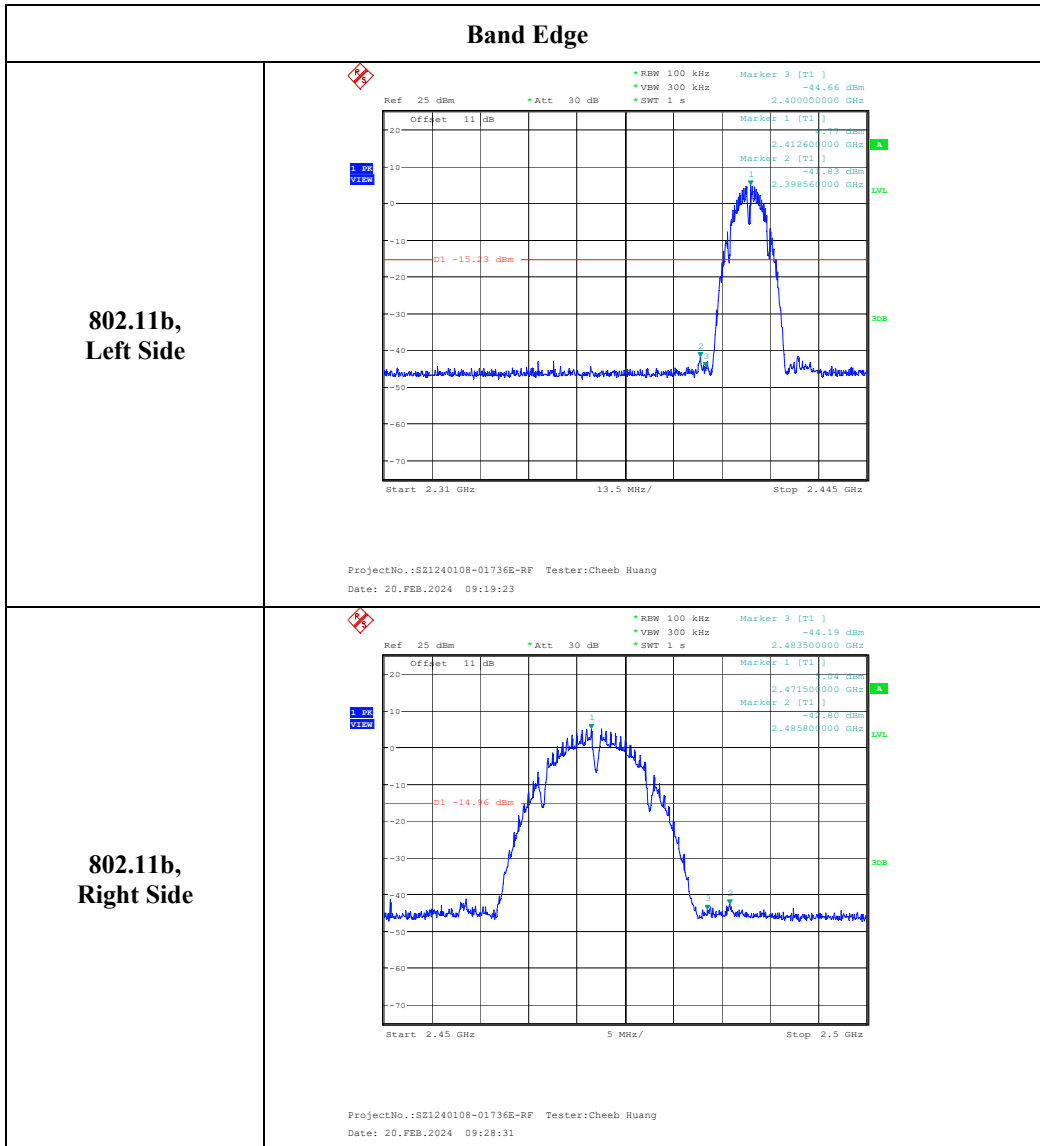

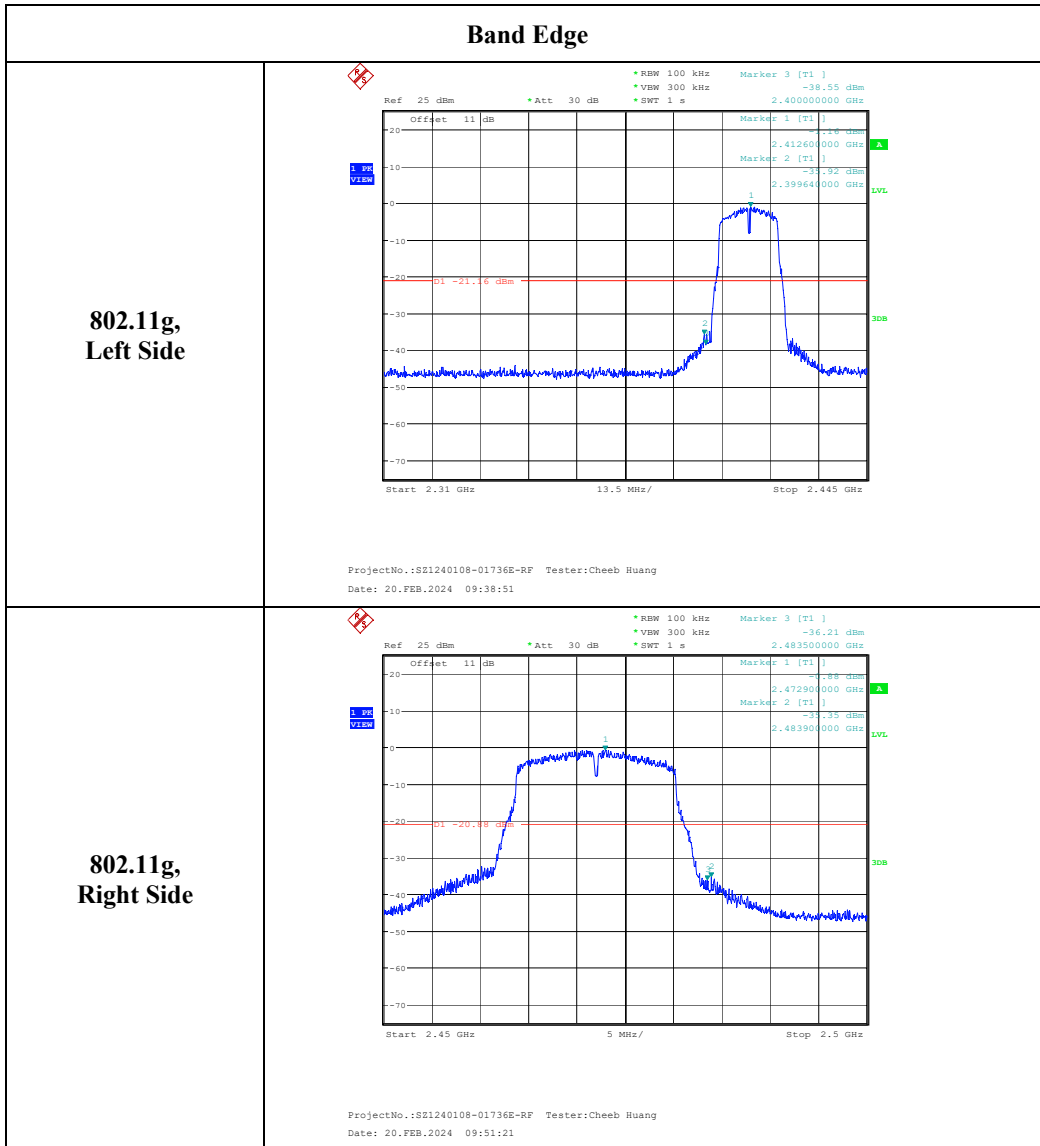

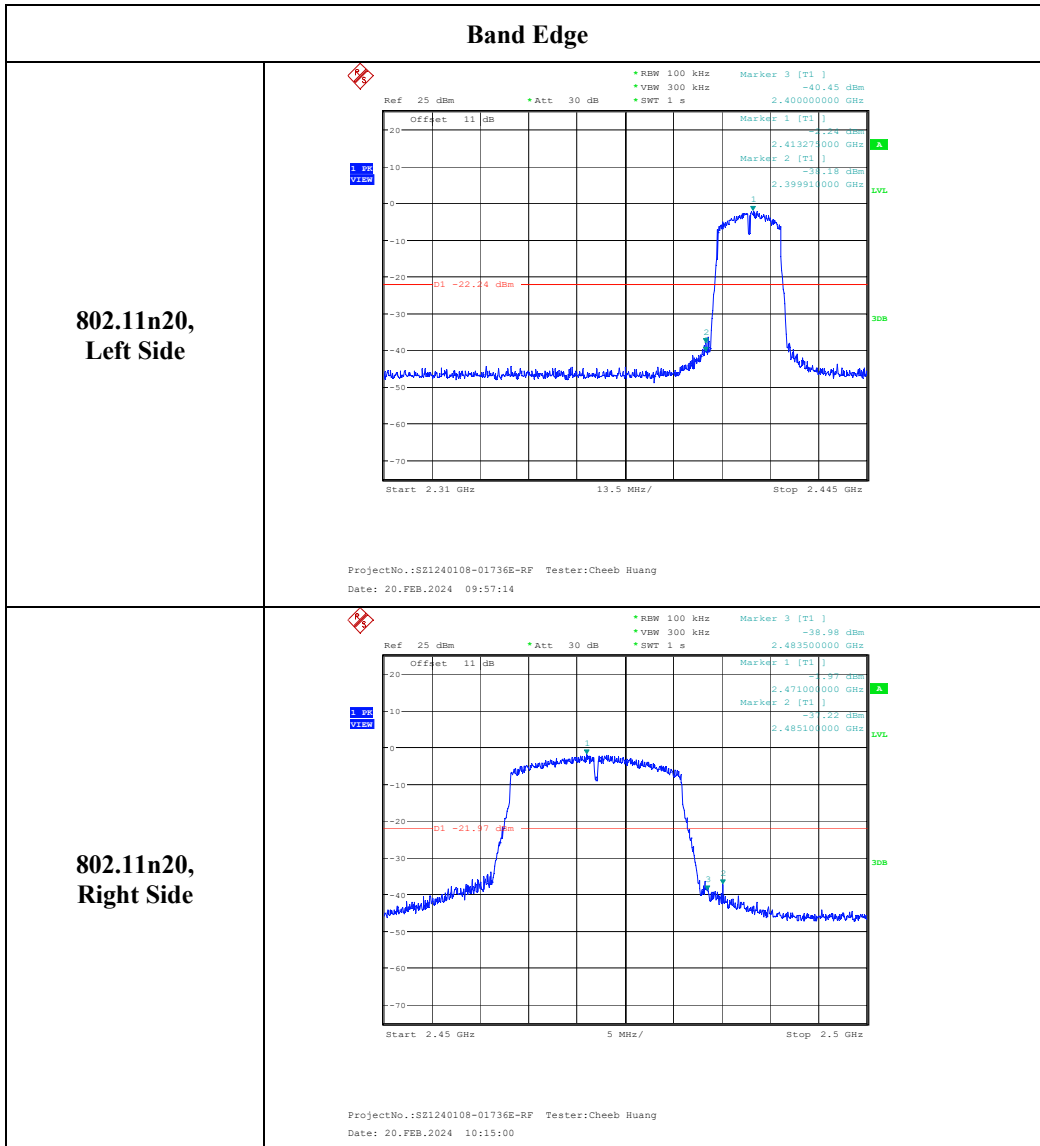

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 \times \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

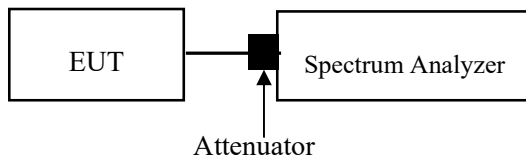

Test Data

Environmental Conditions


| | |
|---------------------------|--------------|
| Temperature: | 24.3~25.1 °C |
| Relative Humidity: | 44~47 % |
| ATM Pressure: | 101.0 kPa |


The testing was performed by Bruce Lin on 2024-02-06 and Cheeb Huang on 2024-02-20.


EUT operation mode: Transmitting


Test Result: Compliant.


| Test Modes | Test Frequency (MHz) | Reading (dBm/3kHz) | Limit (dBm/3kHz) |
|------------|----------------------|--------------------|------------------|
| 802.11b | 2412 | -9.97 | 8.00 |
| | 2442 | -8.62 | 8.00 |
| | 2472 | -8.68 | 8.00 |
| 802.11g | 2412 | -12.70 | 8.00 |
| | 2442 | -12.49 | 8.00 |
| | 2472 | -12.53 | 8.00 |
| 802.11n20 | 2412 | -12.81 | 8.00 |
| | 2442 | -13.31 | 8.00 |
| | 2472 | -13.59 | 8.00 |
| BLE 1M | 2402 | -15.87 | 8.00 |
| | 2440 | -14.64 | 8.00 |
| | 2480 | -15.82 | 8.00 |
| BLE 2M | 2404 | -17.87 | 8.00 |
| | 2440 | -16.78 | 8.00 |
| | 2478 | -17.69 | 8.00 |

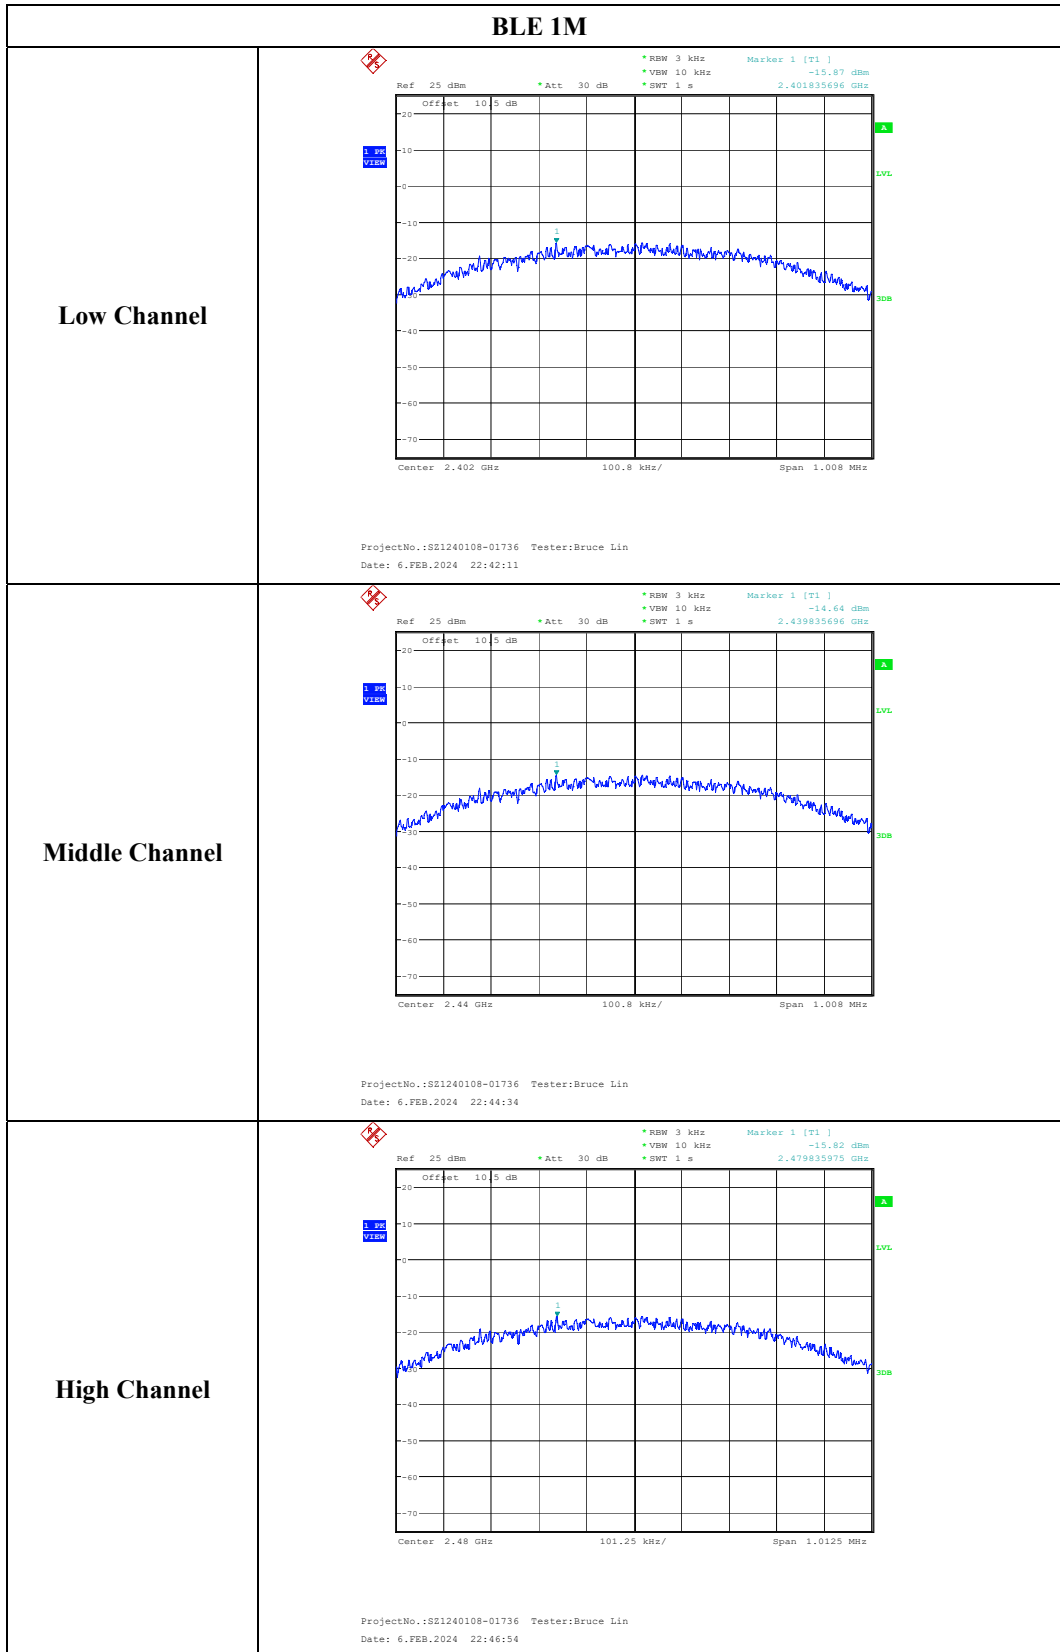

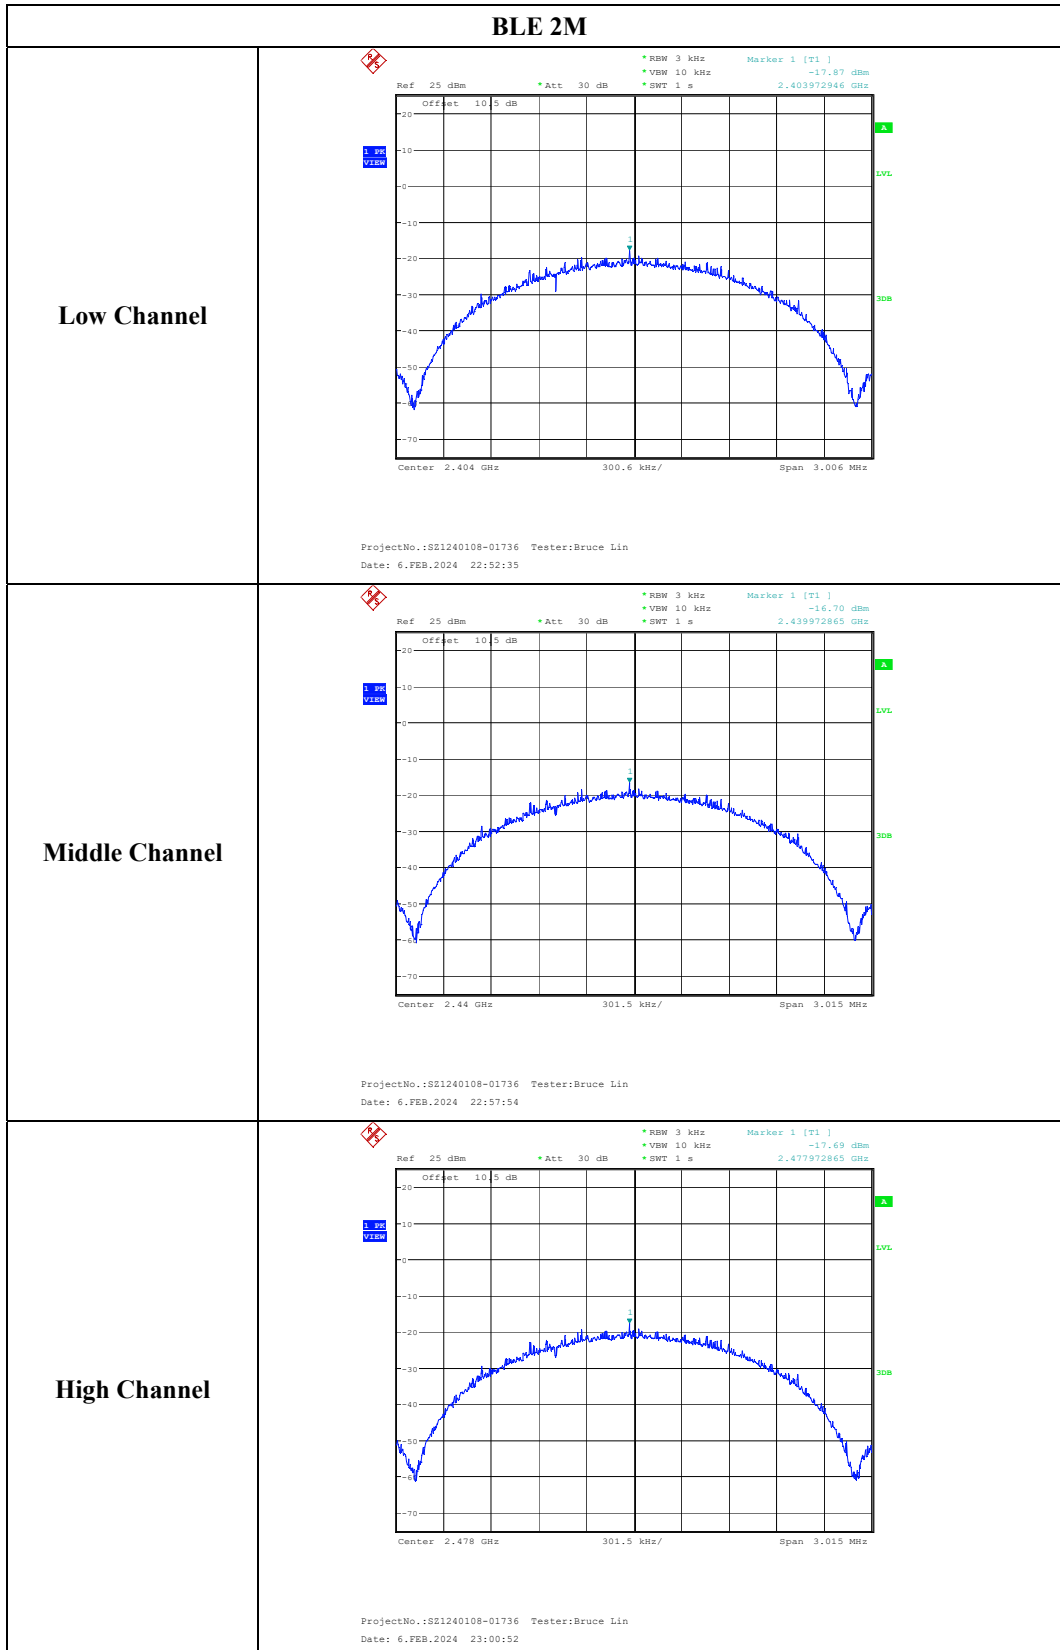

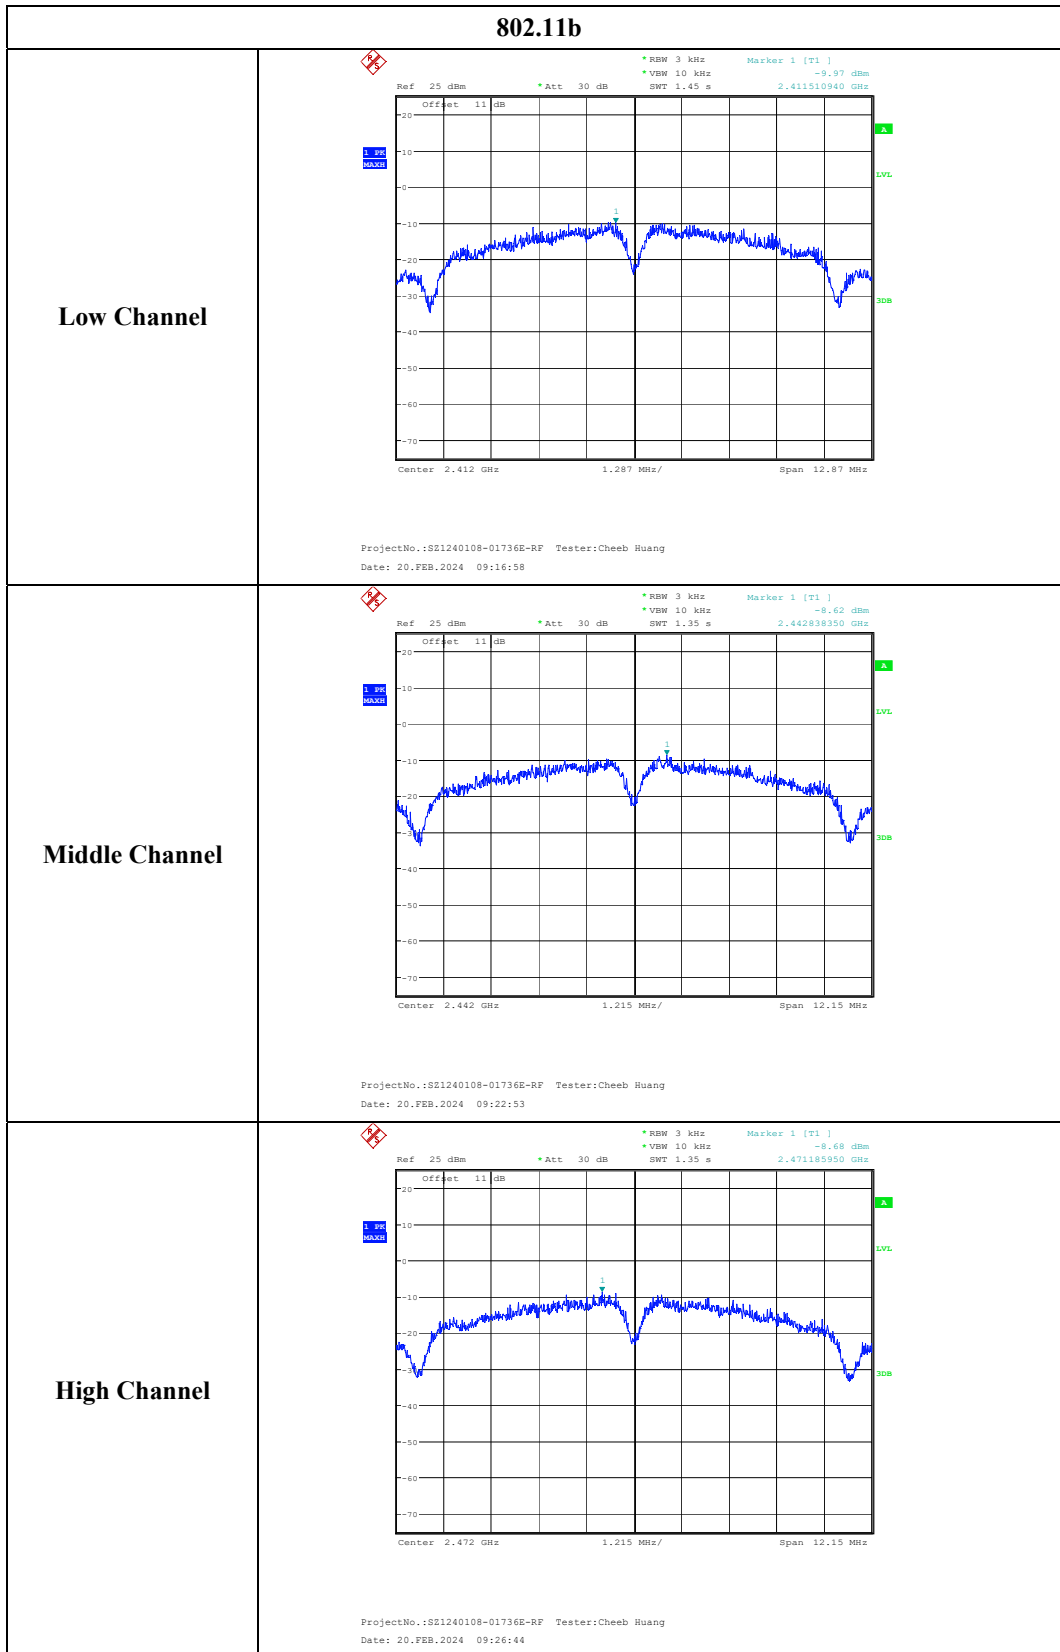

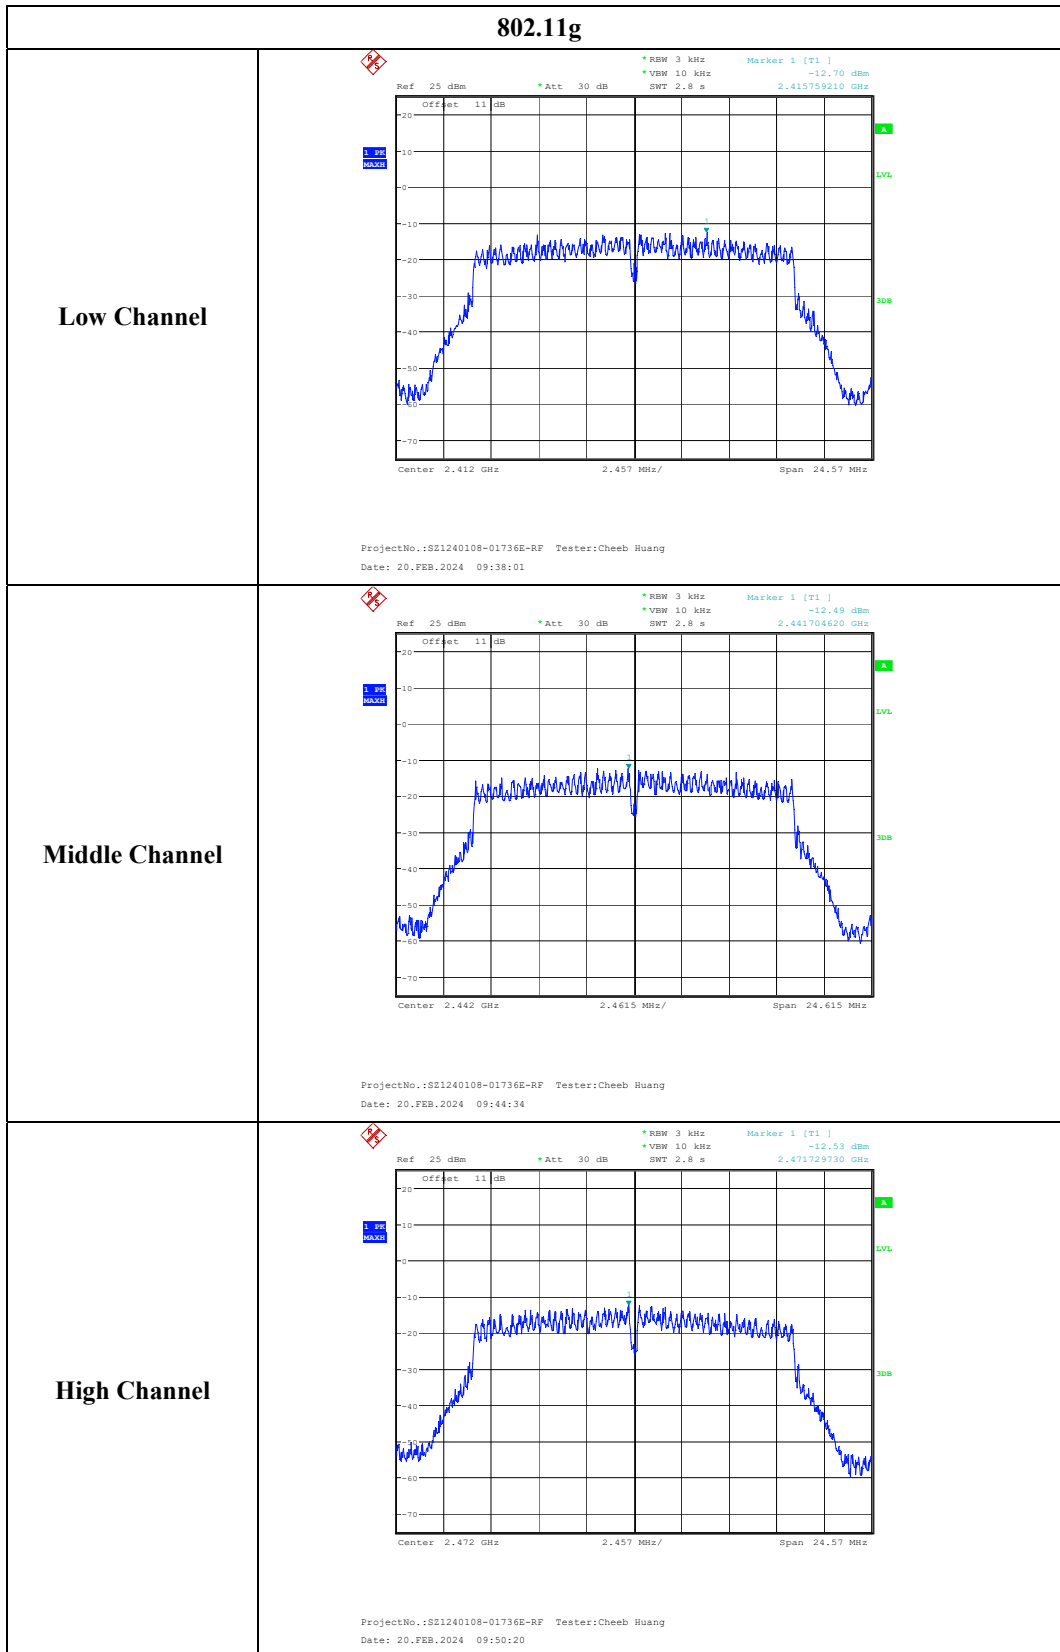

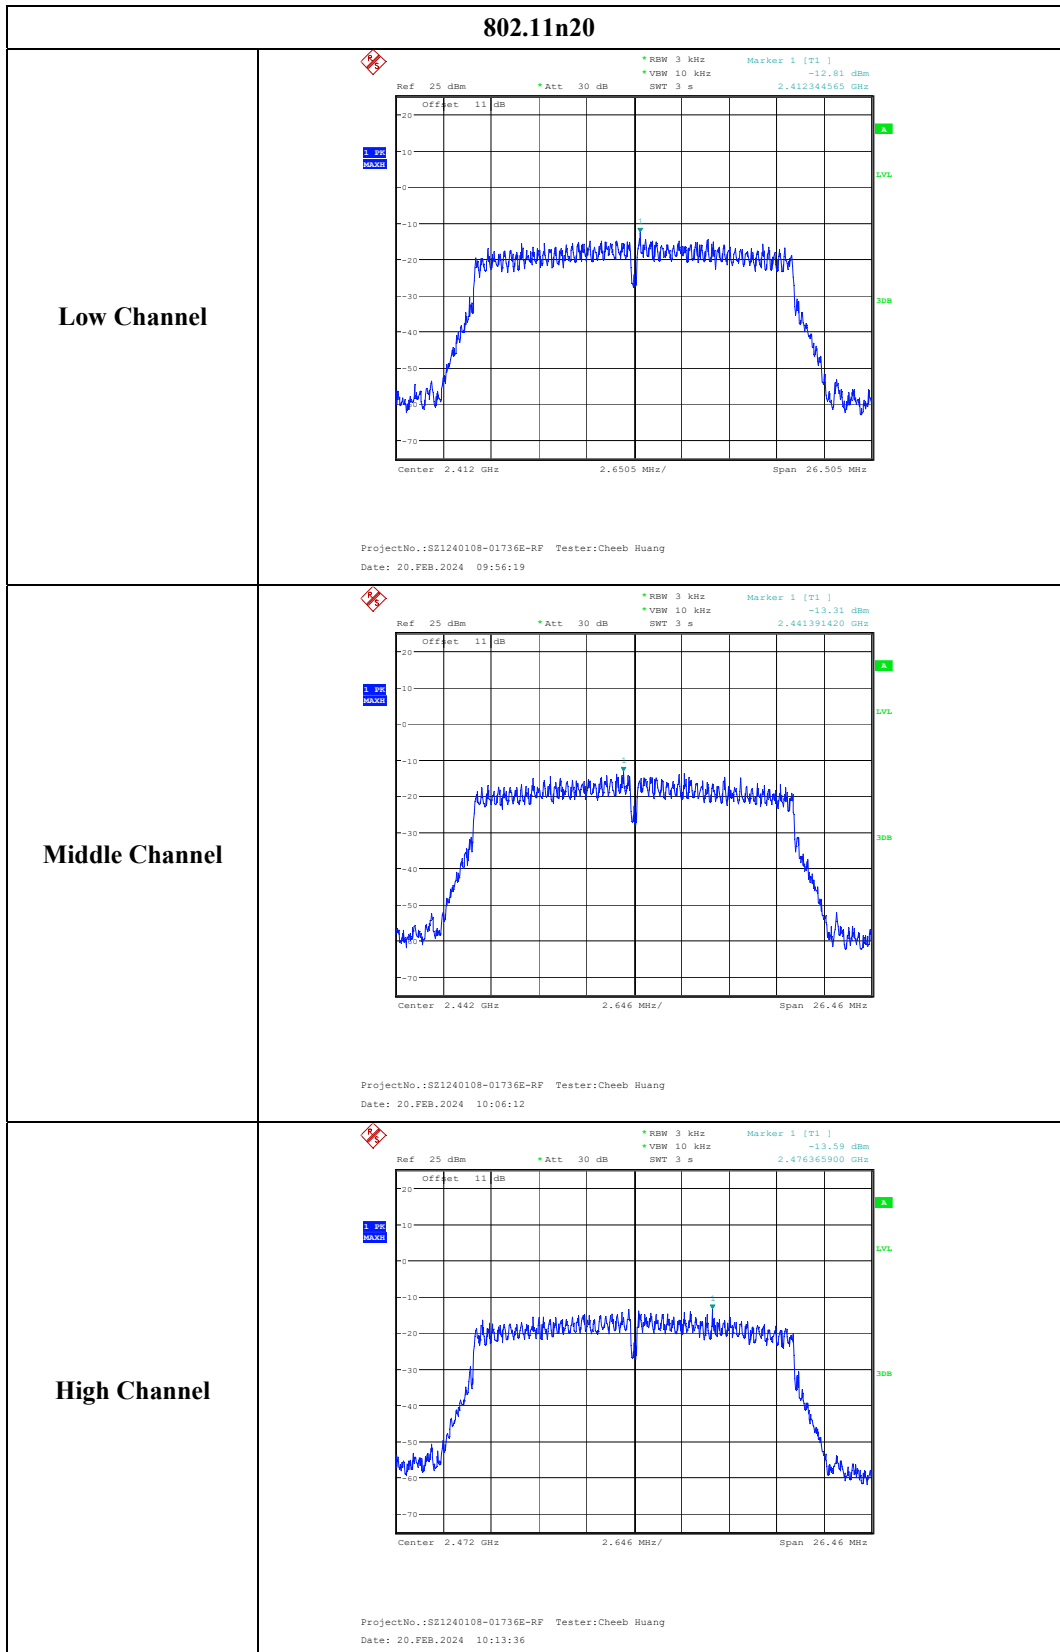

EUT PHOTOGRAPHS

Please refer to the attachment SZ1240108-01736E-RF External photo and SZ1240108-01736E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment SZ1240108-01736E-RF Test Setup photo.

******* END OF REPORT *******