

Test Plot 234#: 5G NR n12 50%RB Mid_Body Right**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0419 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.799 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0407 W/kg

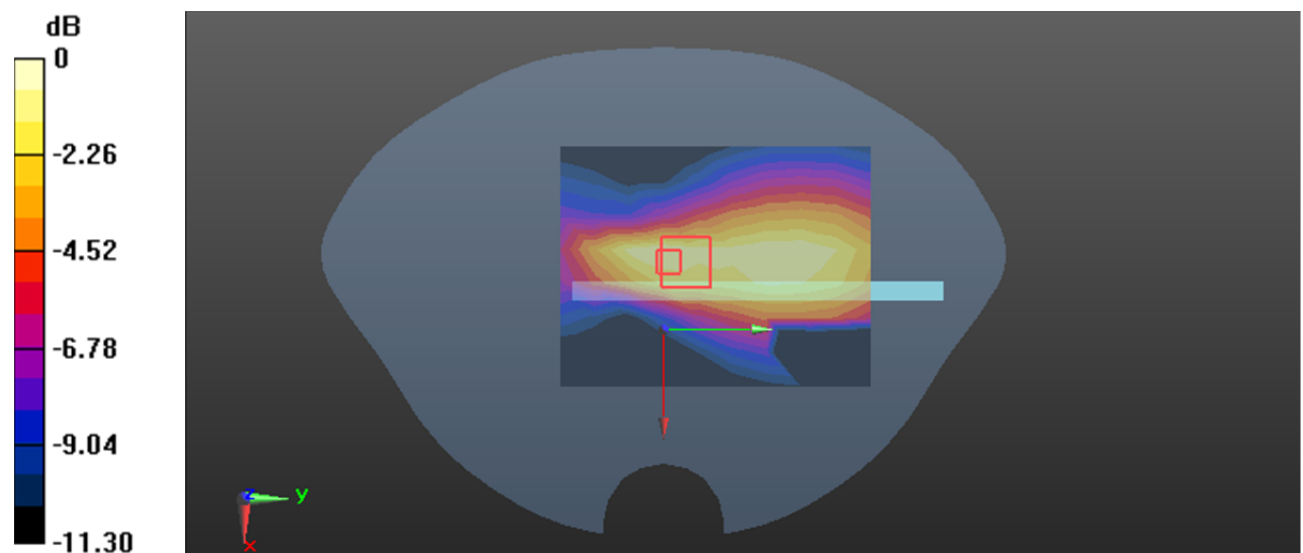

0 dB = 0.0407 W/kg = -13.90 dBW/kg

Test Plot 235#: 5G NR n12 1RB Mid_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00913 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.674 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0110 W/kg

SAR(1 g) = 0.00639 W/kg; SAR(10 g) = 0.00453 W/kg

Maximum value of SAR (measured) = 0.00919 W/kg

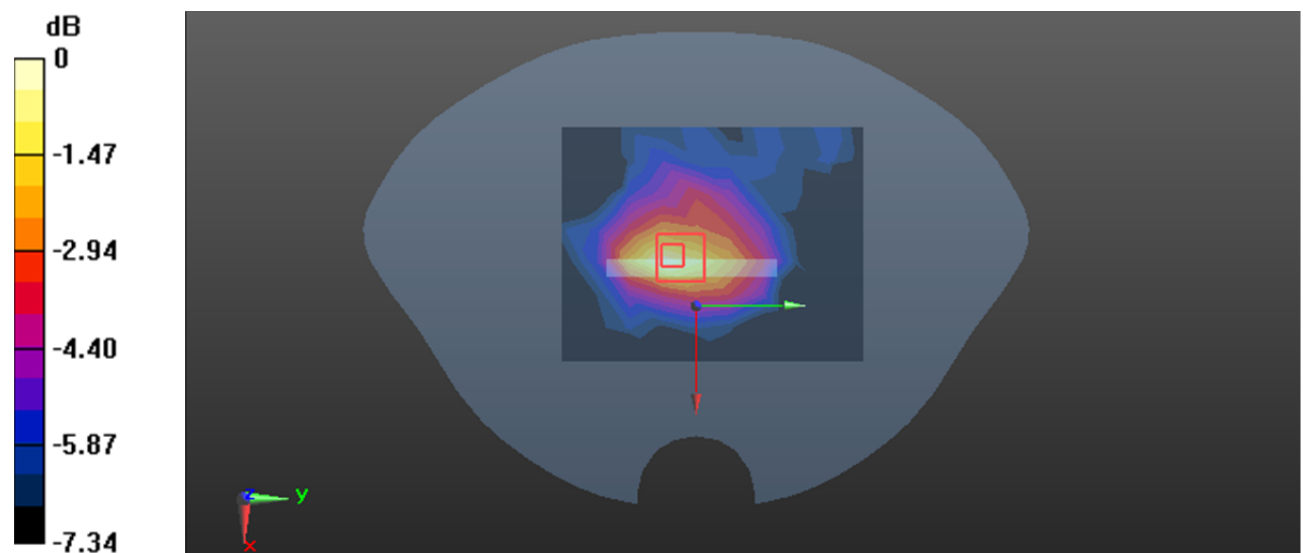

0 dB = 0.00919 W/kg = -20.37 dBW/kg

Test Plot 236#: 5G NR n12 50%RB Mid_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic FDD-FR1 n 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.867$ S/m; $\epsilon_r = 42.511$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(6.48, 6.48, 6.48) @ 707.5 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.00929 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.789 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00591 W/kg; SAR(10 g) = 0.0042 W/kg

Maximum value of SAR (measured) = 0.00847 W/kg

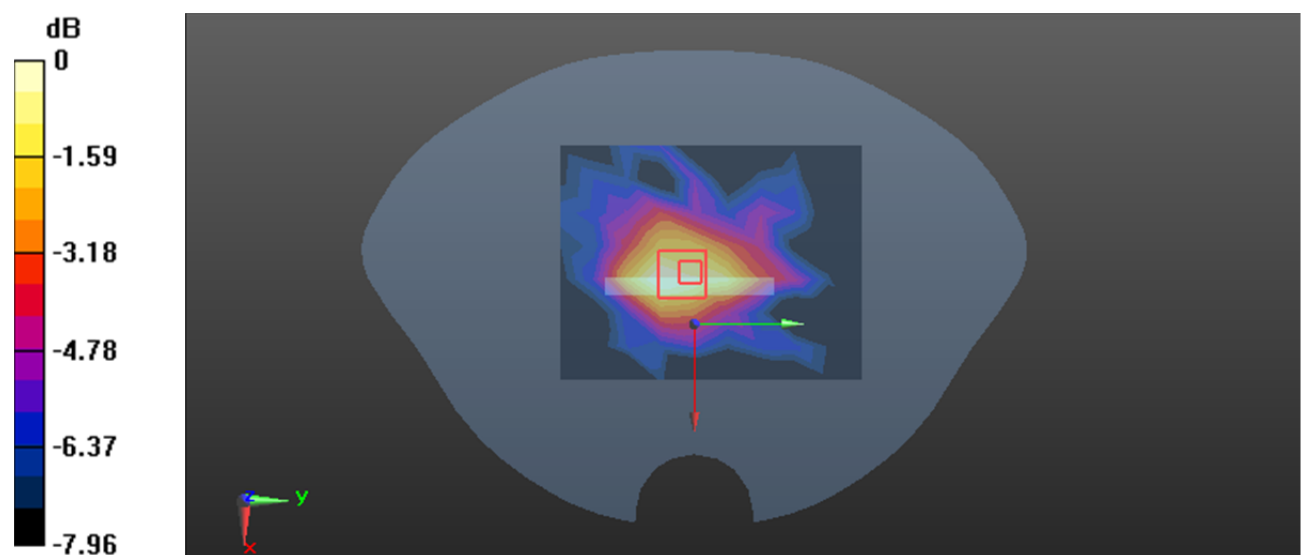

0 dB = 0.00847 W/kg = -20.72 dBW/kg

Test Plot237#: 5G NR n40 1RB Lower_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00736 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.7900 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00549 W/kg; SAR(10 g) = 0.00437 W/kg

Maximum value of SAR (measured) = 0.00759 W/kg

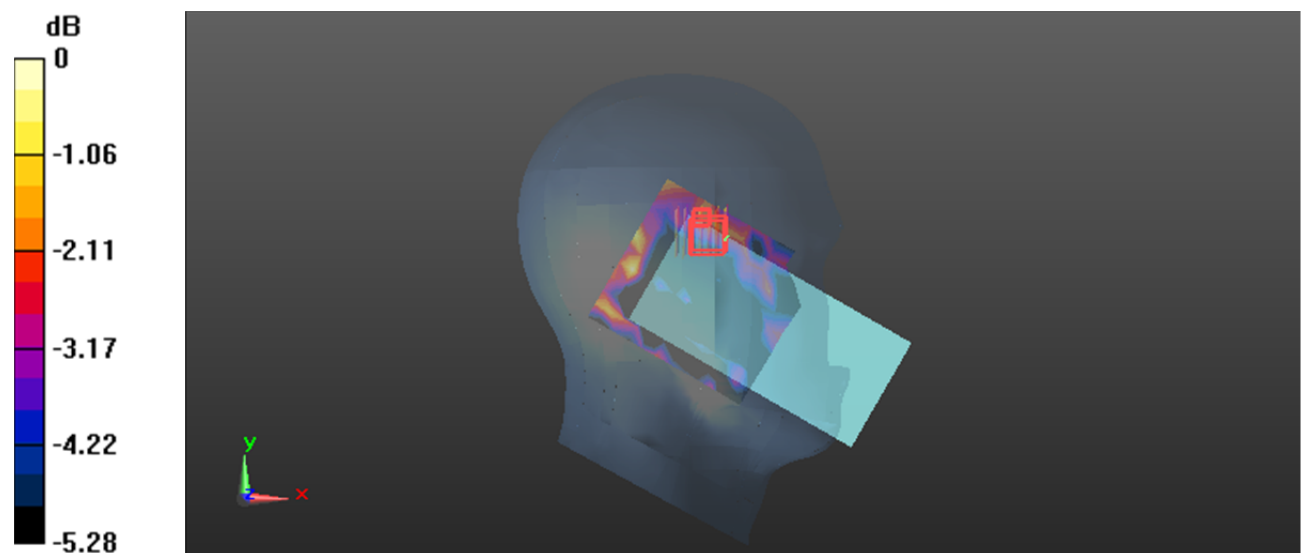

0 dB = 0.00759 W/kg = -21.20 dBW/kg

Test Plot238#: 5G NR n40 50%RB Lower_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz;Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00718 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.111 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00533 W/kg; SAR(10 g) = 0.0045 W/kg

Maximum value of SAR (measured) = 0.00741 W/kg

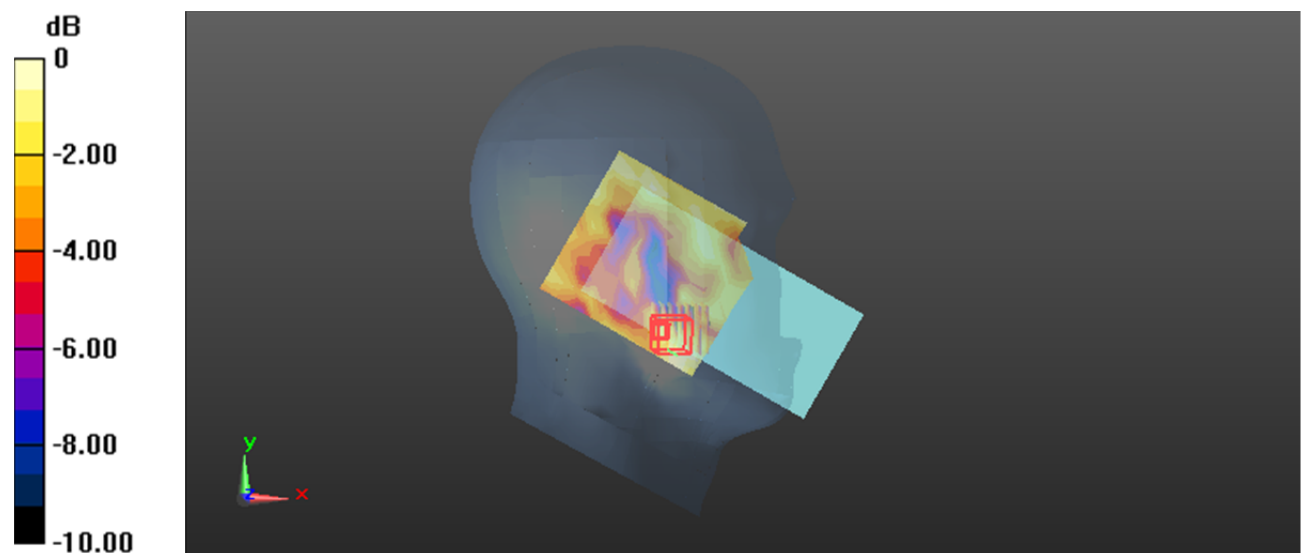

0 dB = 0.00741 W/kg = -21.30 dBW/kg

Test Plot239#: 5G NR n40 1RB Lower_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00631 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9950 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0160 W/kg

SAR(1 g) = 0.00576 W/kg; SAR(10 g) = 0.00354 W/kg

Maximum value of SAR (measured) = 0.00654 W/kg

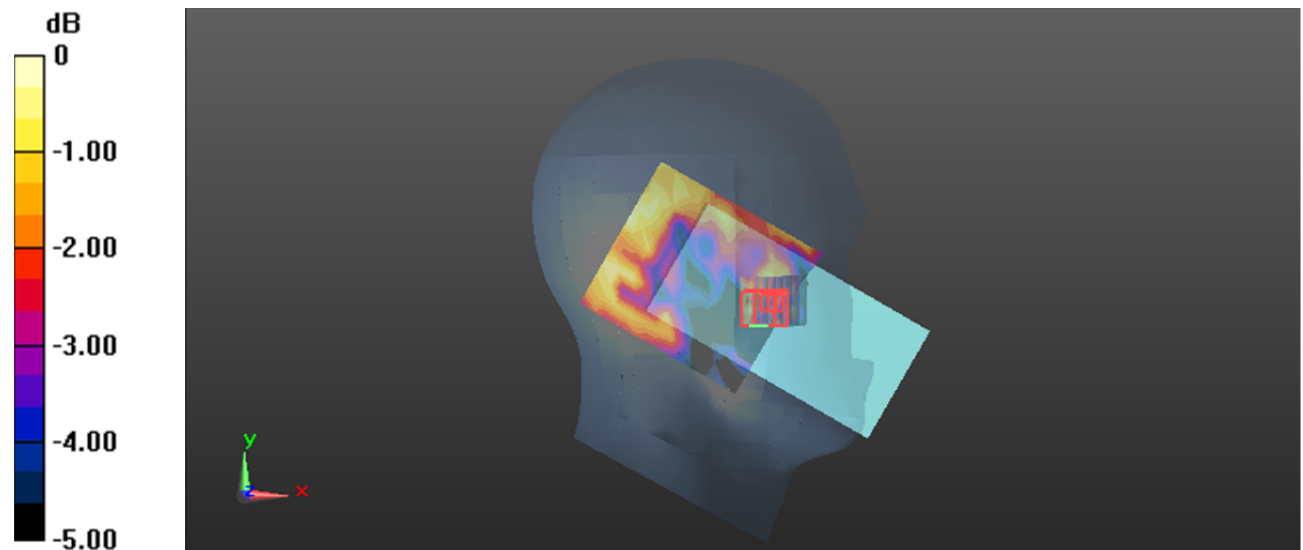

0 dB = 0.00654 W/kg = -21.84 dBW/kg

Test Plot240#: 5G NR n40 50%RB Lower_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00726 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.293 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.00785 W/kg

SAR(1 g) = 0.00554 W/kg; SAR(10 g) = 0.00481 W/kg

Maximum value of SAR (measured) = 0.00743 W/kg

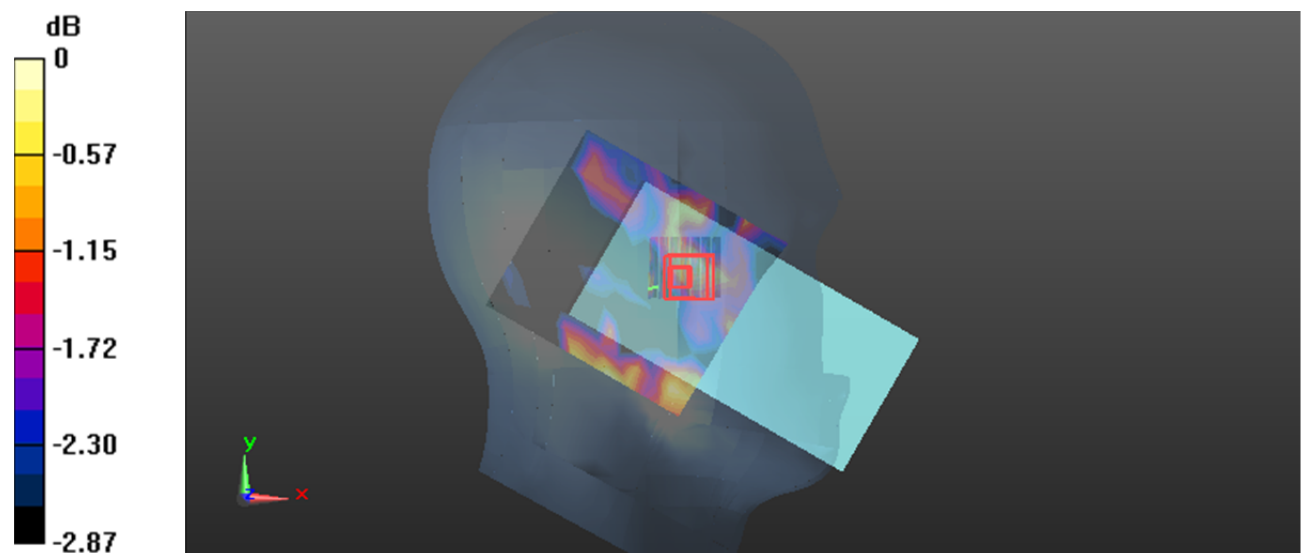

0 dB = 0.00743 W/kg = -21.29 dBW/kg

Test Plot241#: 5G NR n40 1RB Lower_Head Right Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0134 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.012 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.00961 W/kg; SAR(10 g) = 0.00549 W/kg

Maximum value of SAR (measured) = 0.0124 W/kg

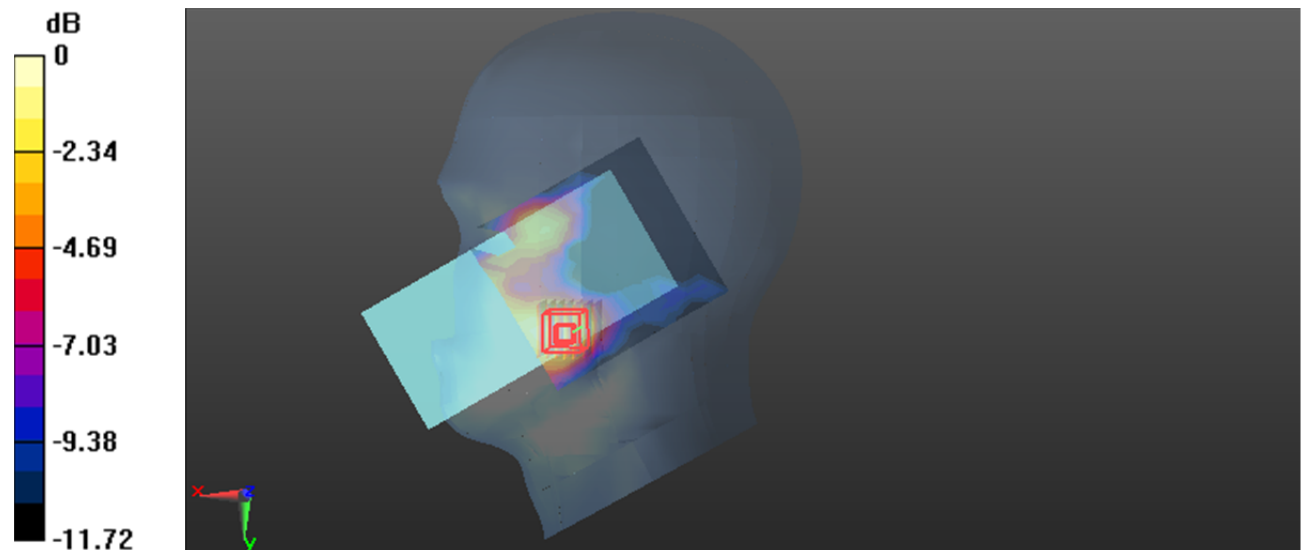

0 dB = 0.0124 W/kg = -19.07 dBW/kg

Test Plot242#: 5G NR n40 50%RB Lower_Head Right Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0312 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5500 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0370 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0322 W/kg

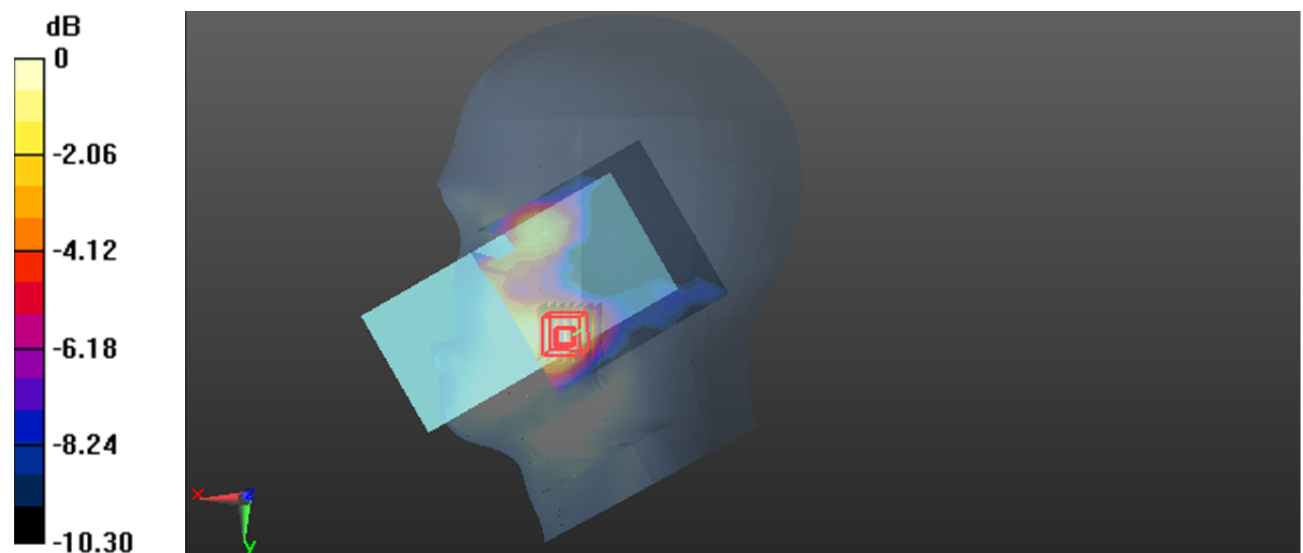

0 dB = 0.0322 W/kg = -14.92 dBW/kg

Test Plot243#: 5G NR n40 1RB Lower_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0213 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.627 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0204 W/kg

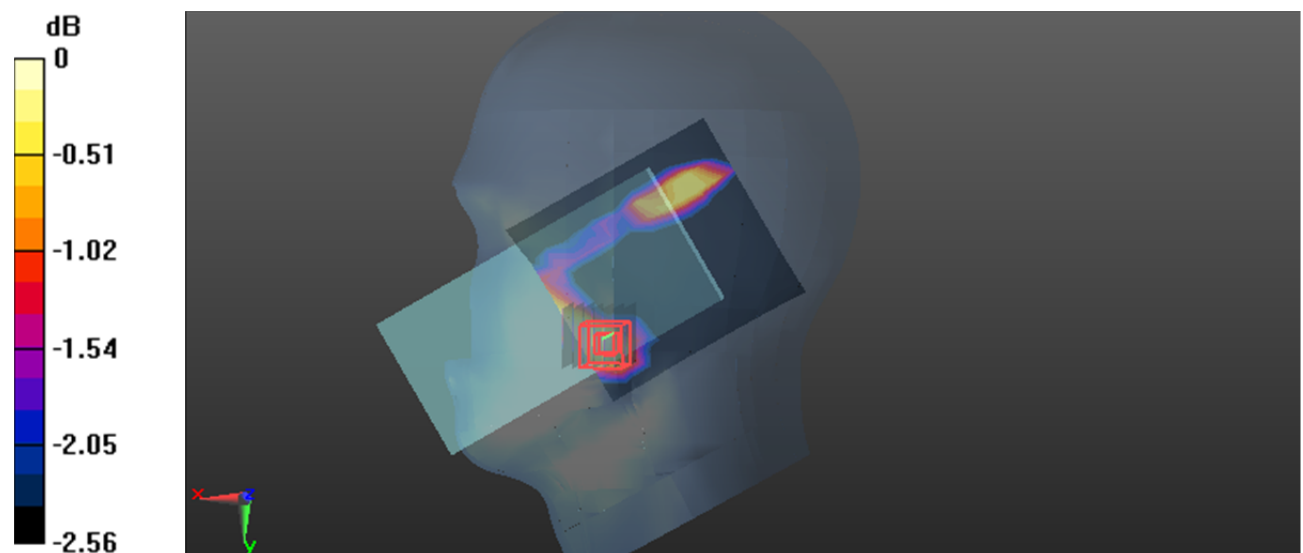

0 dB = 0.0204 W/kg = -16.90 dBW/kg

Test Plot244#: 5G NR n40 50%RB Lower_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00638 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5870 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.00701 W/kg

SAR(1 g) = 0.00382 W/kg; SAR(10 g) = 0.00306 W/kg

Maximum value of SAR (measured) = 0.00507 W/kg

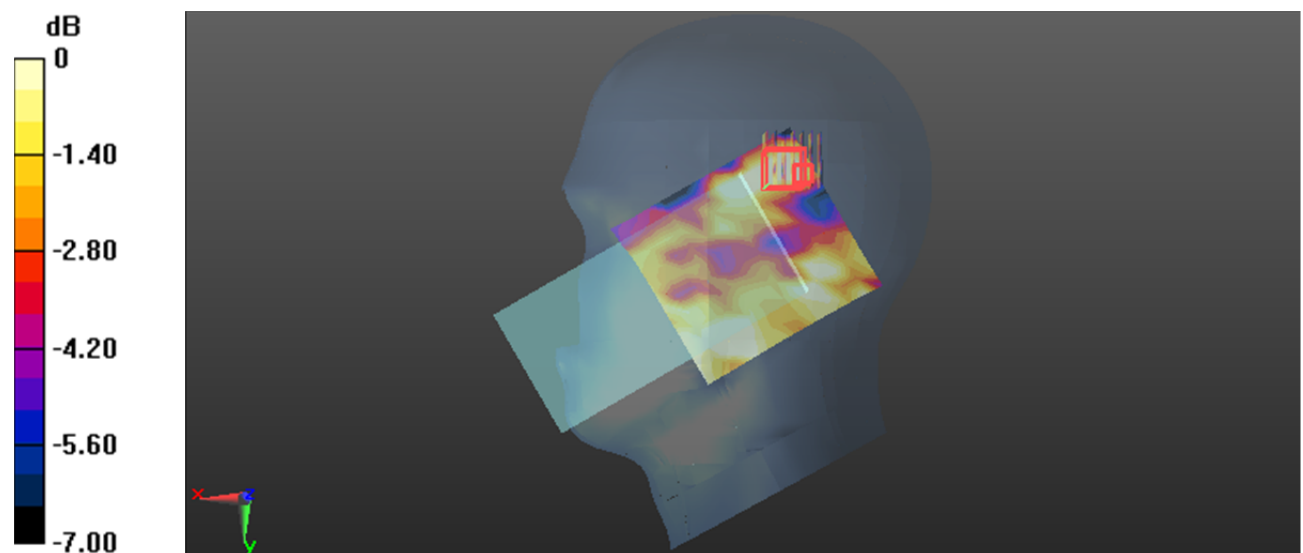

0 dB = 0.00507 W/kg = -22.95 dBW/kg

Test Plot245#: 5G NR n40 1RB Lower_Body Front**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0972 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.081 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.105 W/kg

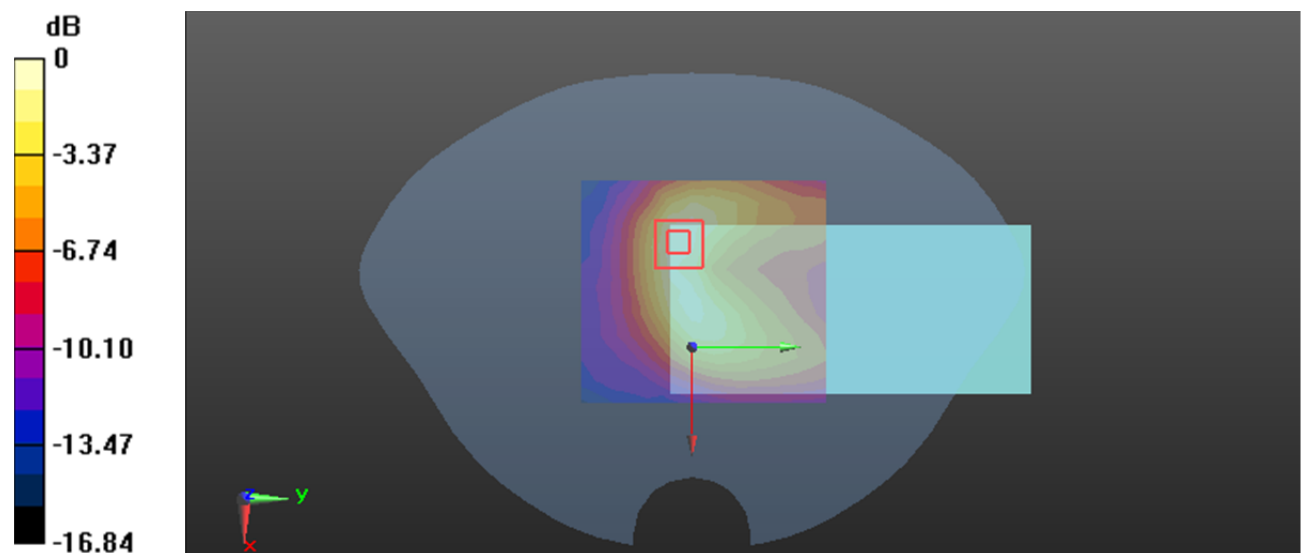

0 dB = 0.105 W/kg = -9.79 dBW/kg

Test Plot246#: 5G NR n40 50%RB Lower_Body Front**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0405 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.598 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0530 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0430 W/kg

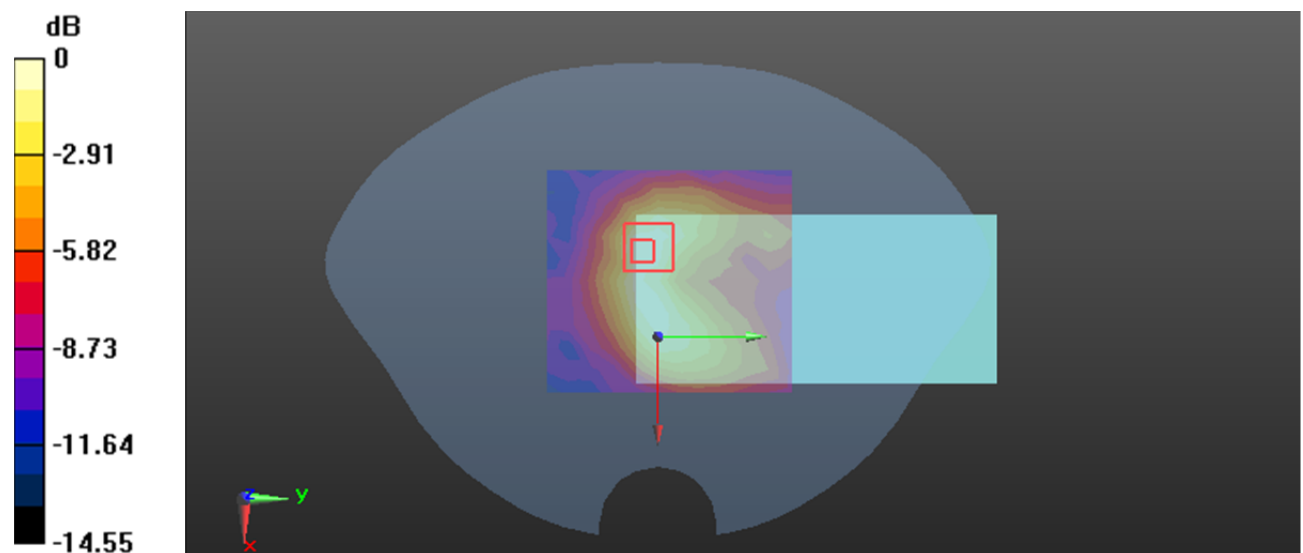

0 dB = 0.0430 W/kg = -13.67 dBW/kg

Test Plot247#: 5G NR n40 1RB Lower_Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0248 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.007 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0280 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00857 W/kg

Maximum value of SAR (measured) = 0.0233 W/kg

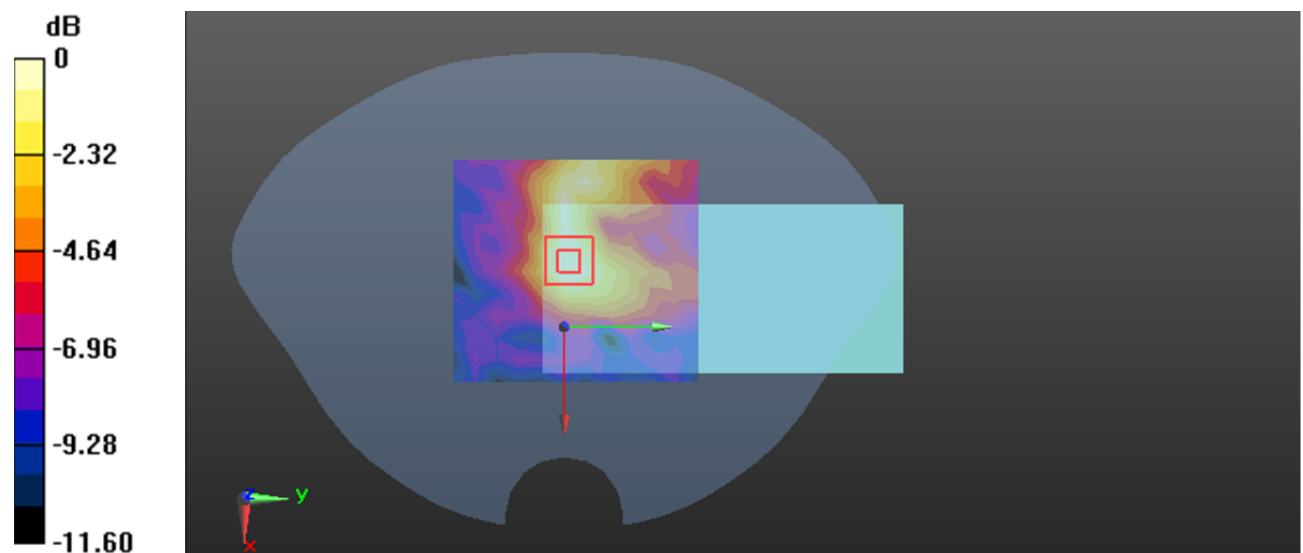

0 dB = 0.0233 W/kg = -16.33 dBW/kg

Test Plot248#: 5G NR n40 50%RB Lower_Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0518 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.502 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0620 W/kg

SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0519 W/kg

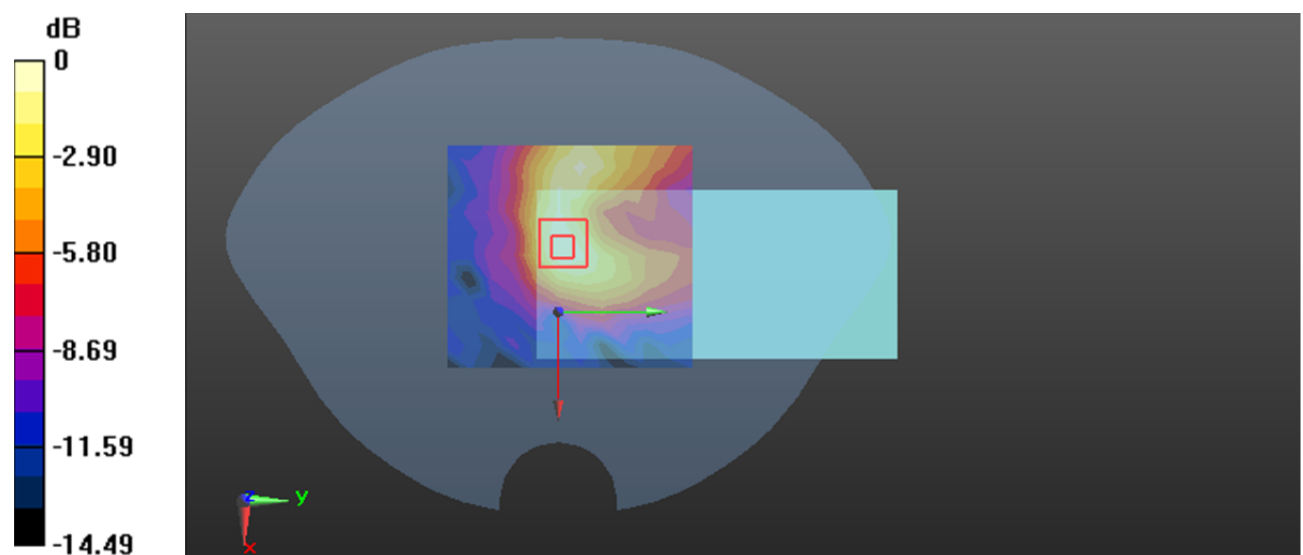

0 dB = 0.0519 W/kg = -12.85 dBW/kg

Test Plot249#: 5G NR n40 1RB Lower_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.00939 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.537 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0130 W/kg

SAR(1 g) = 0.00488 W/kg; SAR(10 g) = 0.00282 W/kg

Maximum value of SAR (measured) = 0.00900 W/kg

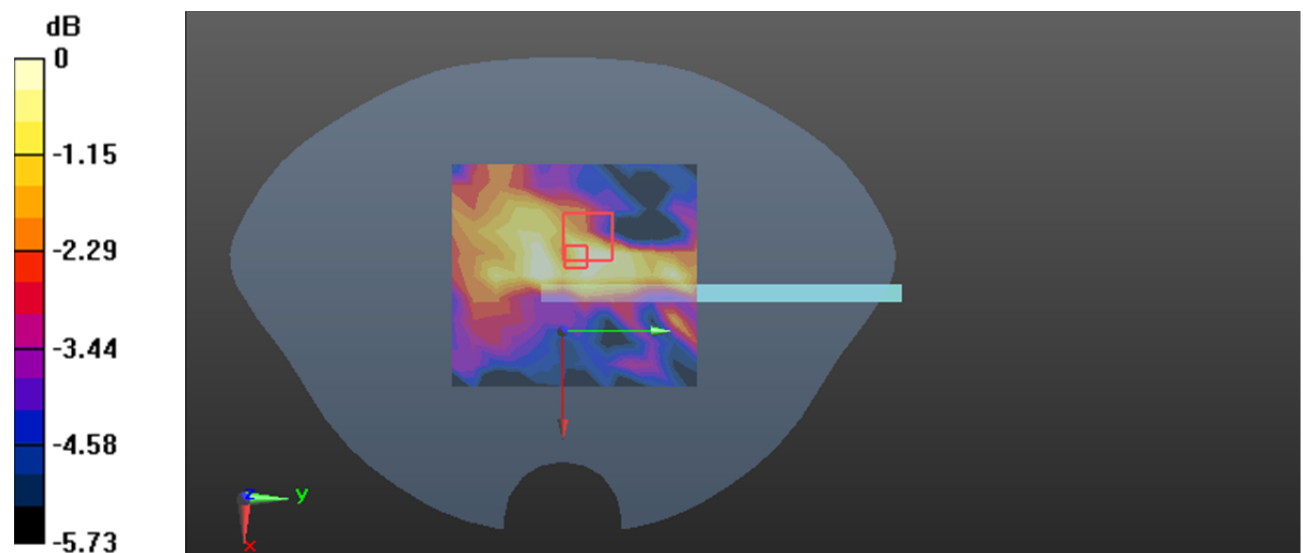

0 dB = 0.00900 W/kg = -20.46 dBW/kg

Test Plot250#: 5G NR n40 50%RB Lower_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0110 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.866 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.00854 W/kg; SAR(10 g) = 0.00607 W/kg

Maximum value of SAR (measured) = 0.0113 W/kg

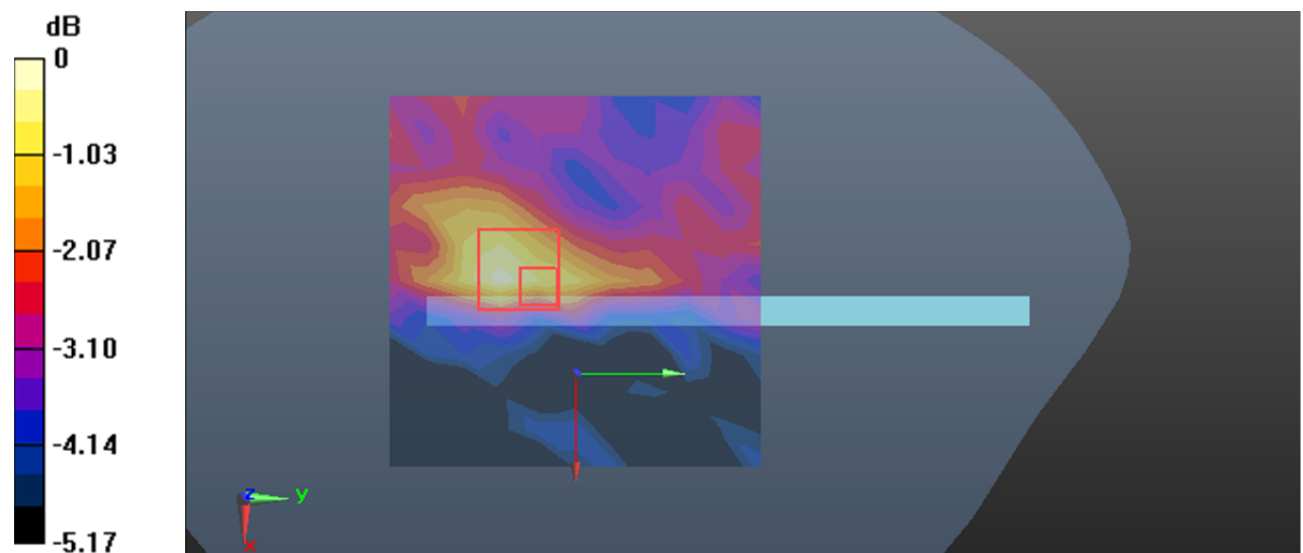

0 dB = 0.0113 W/kg = -19.47 dBW/kg

Test Plot251#: 5G NR n40 1RB Lower_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0359 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.832 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0470 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0380 W/kg

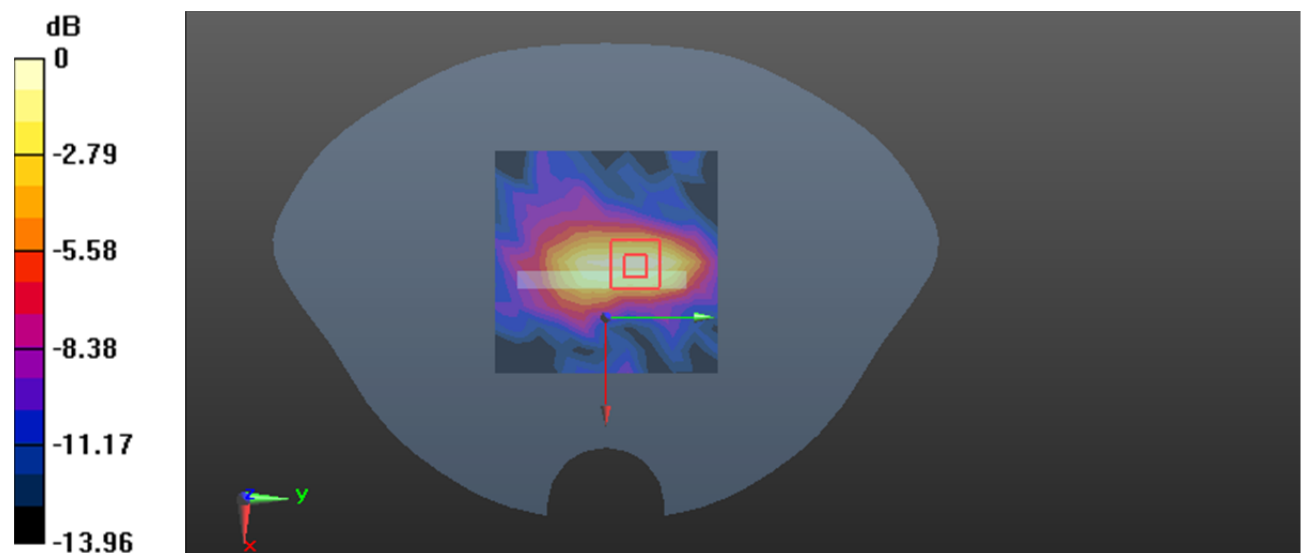

0 dB = 0.0380 W/kg = -14.20 dBW/kg

Test Plot252#: 5G NR n40 50%RB Lower_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2310 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2310$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.151$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2310 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0831 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.975 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0838 W/kg

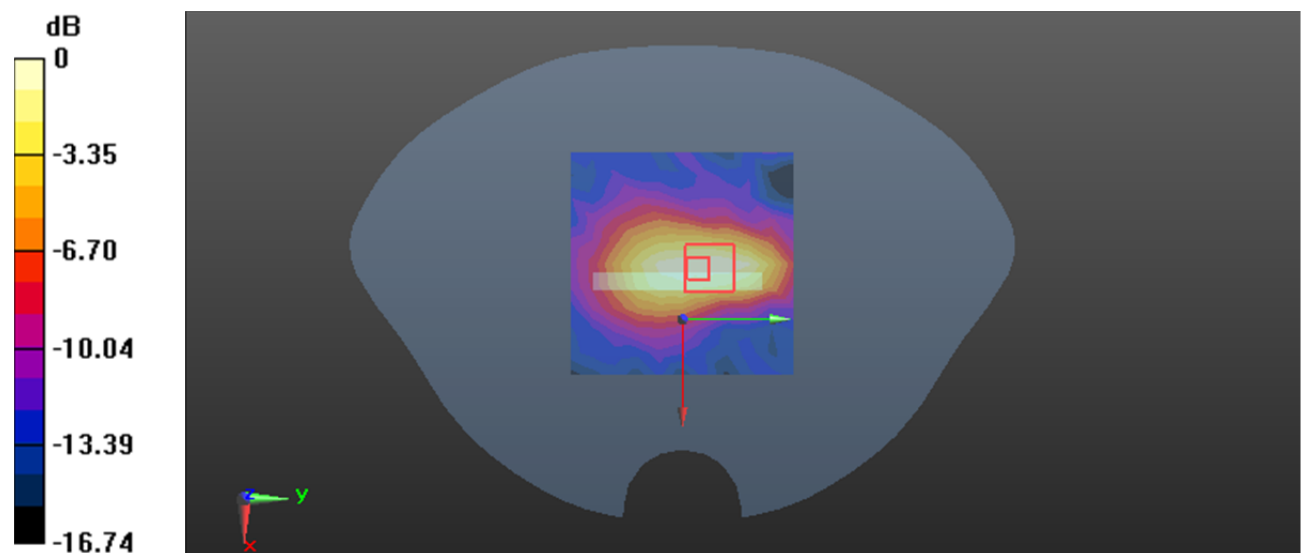

0 dB = 0.0838 W/kg = -10.77 dBW/kg

Test Plot253#: 5G NR n40 1RB Upper_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0304 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.918 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0325 W/kg

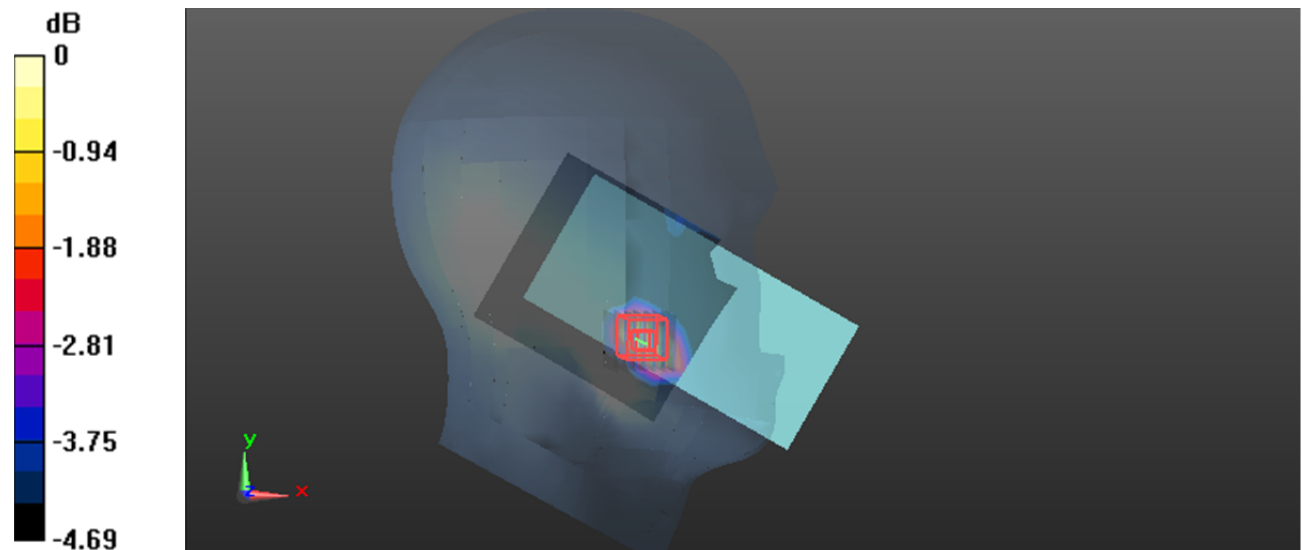

0 dB = 0.0325 W/kg = -14.88 dBW/kg

Test Plot254#: 5G NR n40 50%RB Upper_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0314 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.821 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0317 W/kg

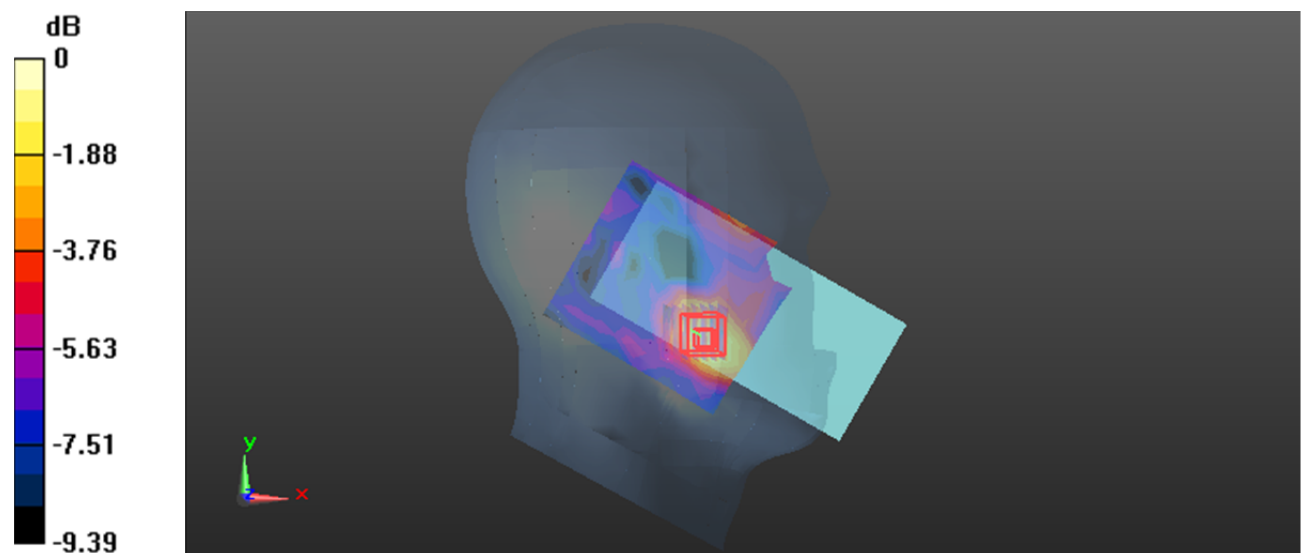

0 dB = 0.0317 W/kg = -14.99 dBW/kg

Test Plot255#: 5G NR n40 1RB Upper_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0116 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.020 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00994 W/kg; SAR(10 g) = 0.00817 W/kg

Maximum value of SAR (measured) = 0.0120 W/kg

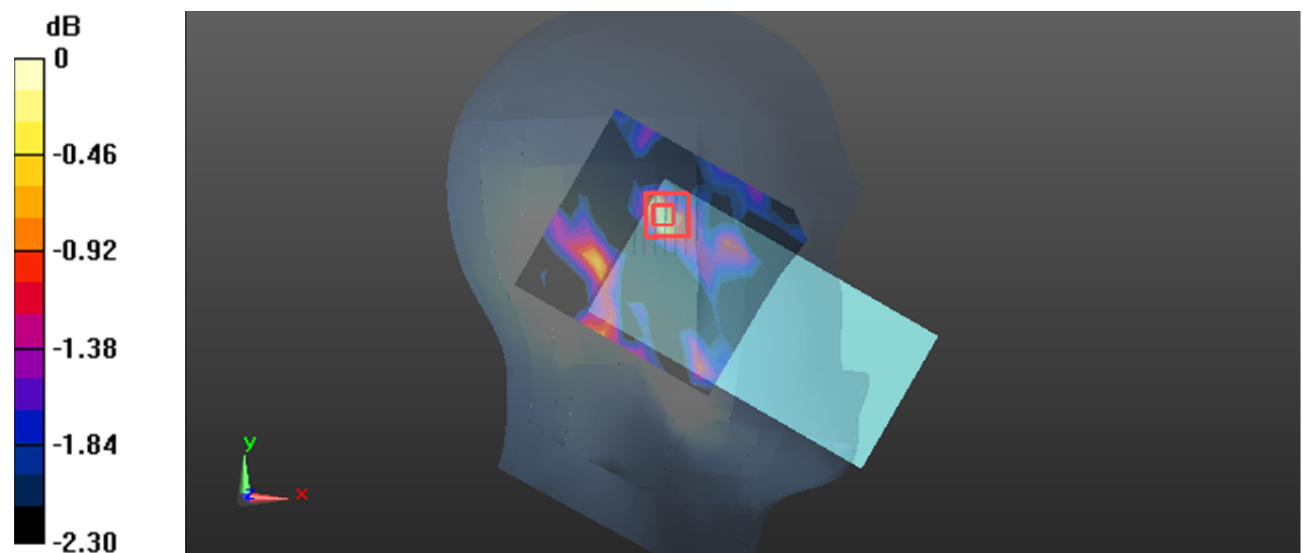

0 dB = 0.0120 W/kg = -19.21 dBW/kg

Test Plot256#: 5G NR n40 50%RB Upper_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0124 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.663 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0190 W/kg

SAR(1 g) = 0.00879 W/kg; SAR(10 g) = 0.00761 W/kg

Maximum value of SAR (measured) = 0.0112 W/kg

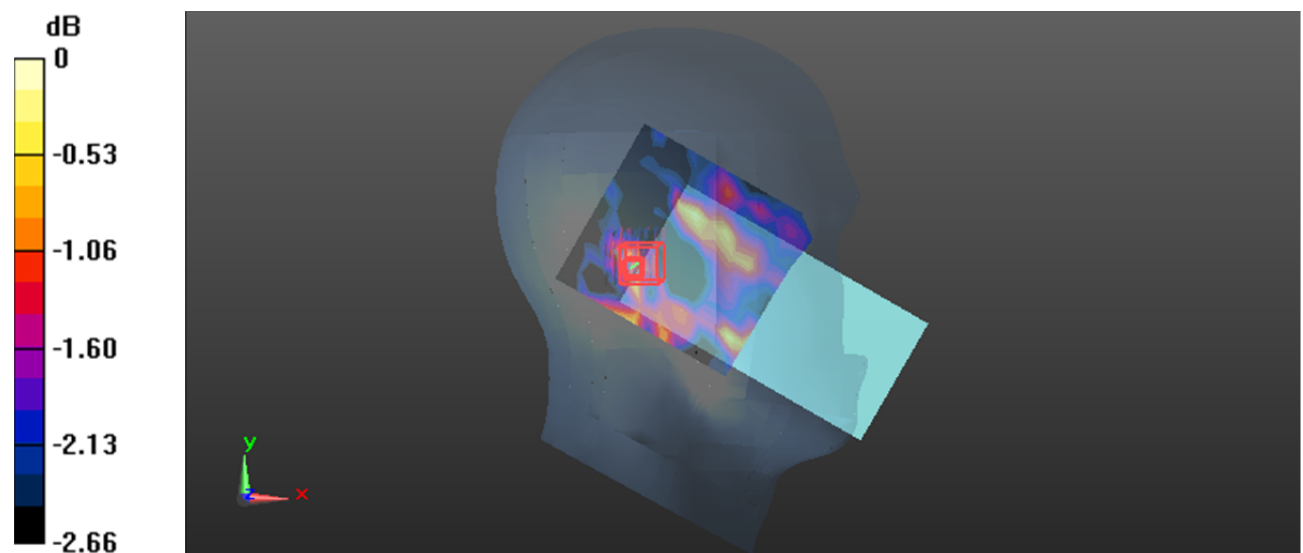

0 dB = 0.0112 W/kg = -19.51 dBW/kg

Test Plot257#: 5G NR n40 1RB Upper_Head Right Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0255 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.4840 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0270 W/kg

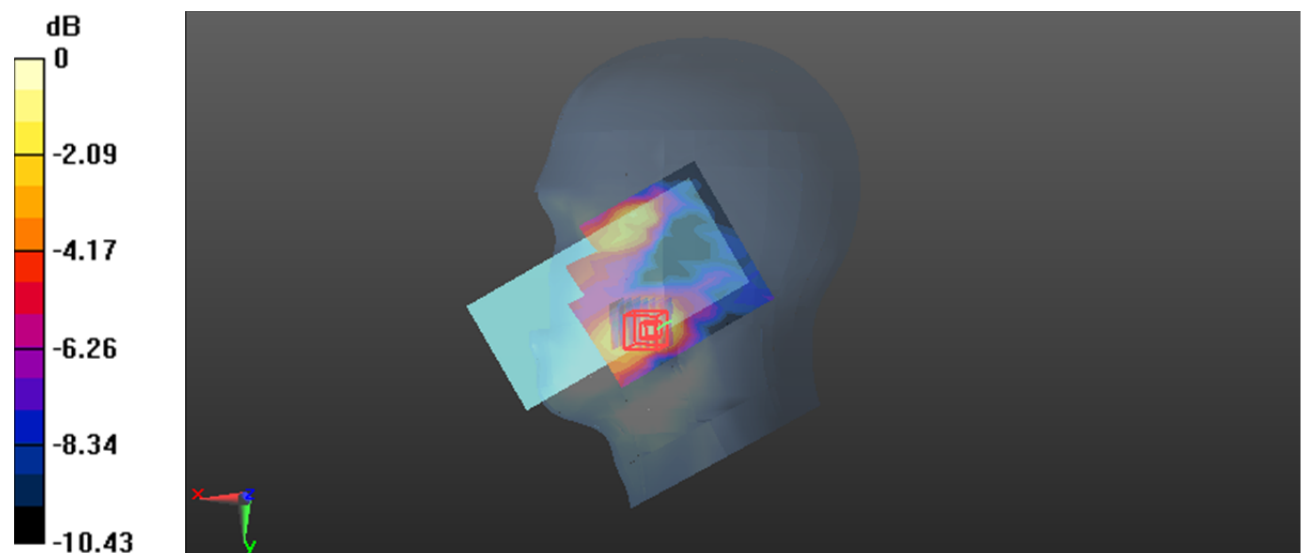

0 dB = 0.0270 W/kg = -15.69 dBW/kg

Test Plot258#: 5G NR n40 50%RB Upper_Head Right Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0309 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.011 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0265 W/kg

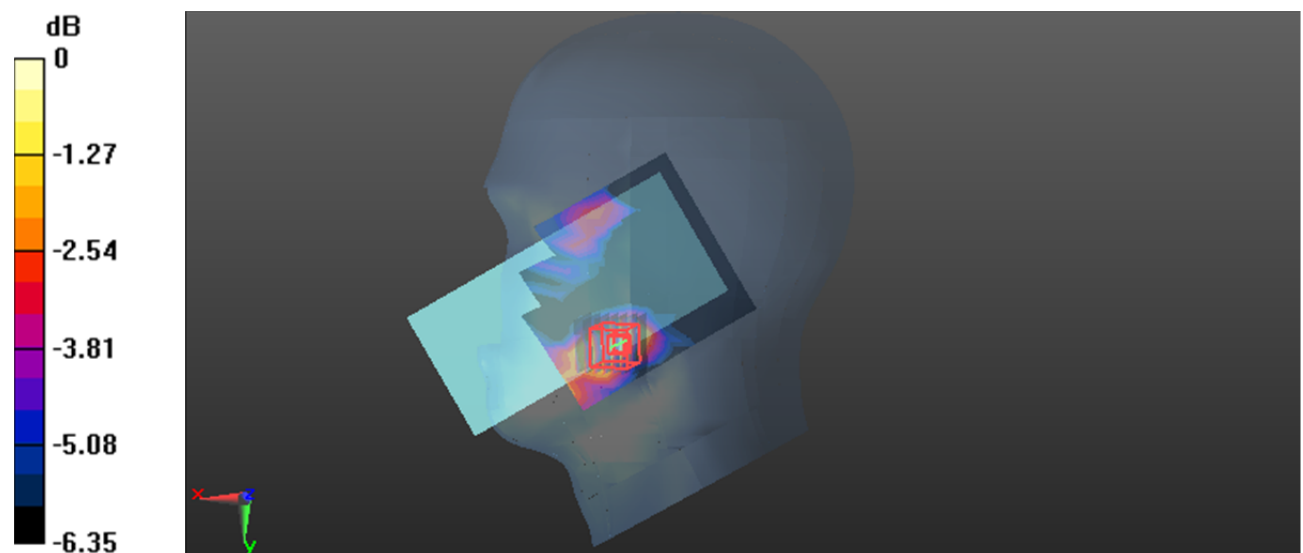

0 dB = 0.0265 W/kg = -15.77 dBW/kg

Test Plot259#: 5G NR n40 1RB Upper_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0120 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.416 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0120 W/kg

SAR(1 g) = 0.00818 W/kg; SAR(10 g) = 0.00654 W/kg

Maximum value of SAR (measured) = 0.0102 W/kg

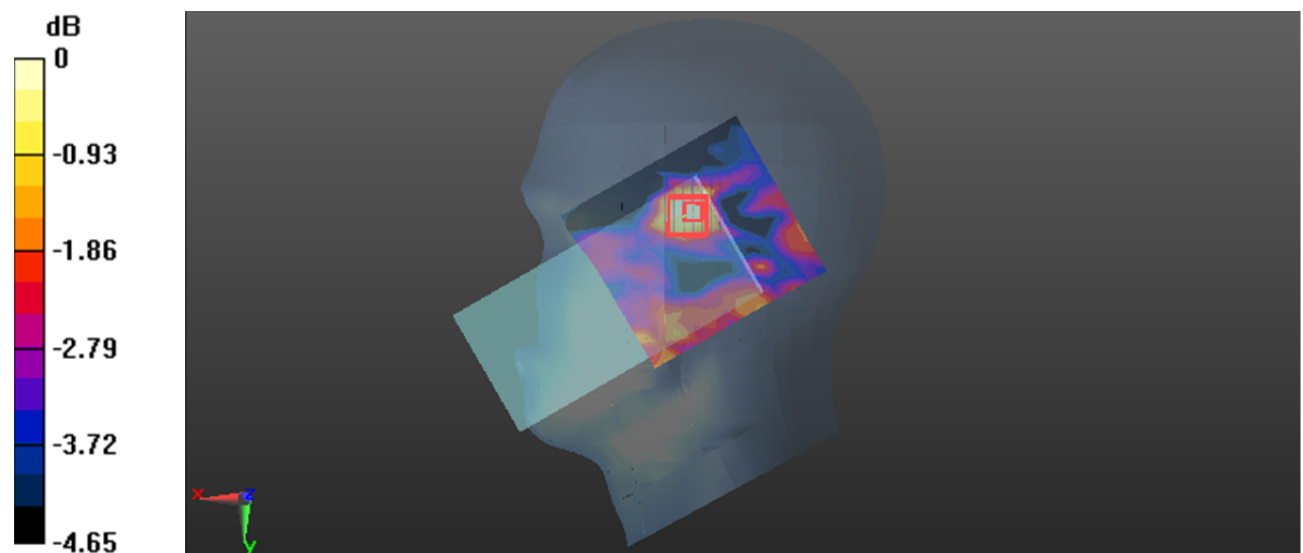

0 dB = 0.0102 W/kg = -19.91 dBW/kg

Test Plot260#: 5G NR n40 50%RB Upper_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz;Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0127 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.407 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0150 W/kg

SAR(1 g) = 0.00999 W/kg; SAR(10 g) = 0.00725 W/kg

Maximum value of SAR (measured) = 0.0127 W/kg

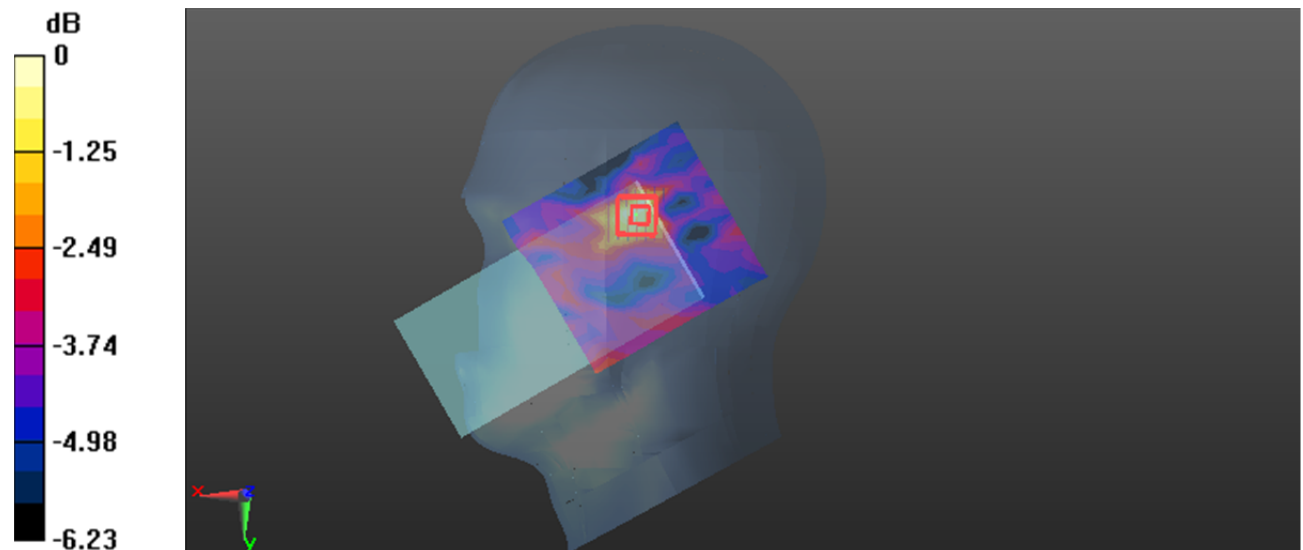

0 dB = 0.0127 W/kg = -18.96 dBW/kg

Test Plot261#: 5G NR n40 1RB Upper_Body Front**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0402 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.339 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0382 W/kg

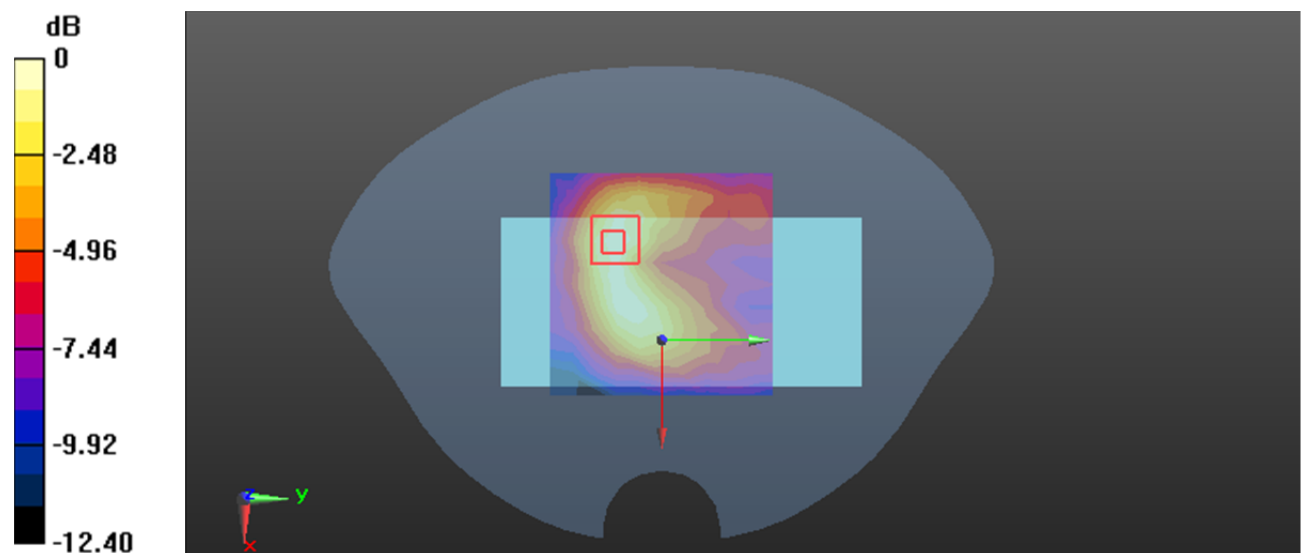

0 dB = 0.0382 W/kg = -14.18 dBW/kg

Test Plot262#: 5G NR n40 50%RB Upper_Body Front**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0403 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.758 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0386 W/kg

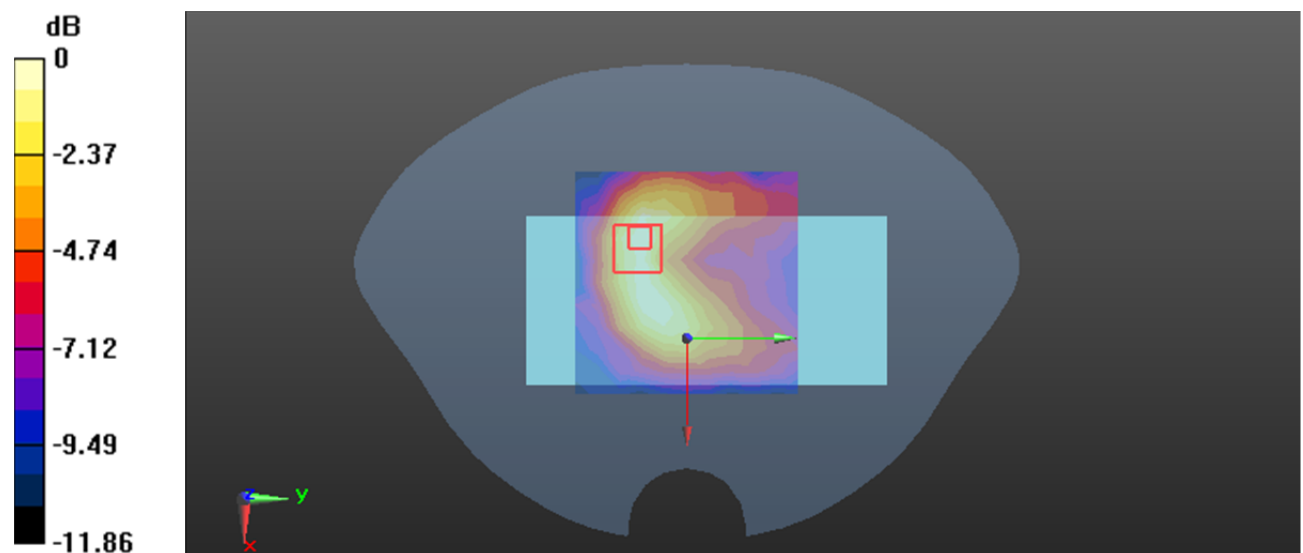

0 dB = 0.0386 W/kg = -14.13 dBW/kg

Test Plot263#: 5G NR n40 1RB Upper_Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0457 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.162 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0467 W/kg

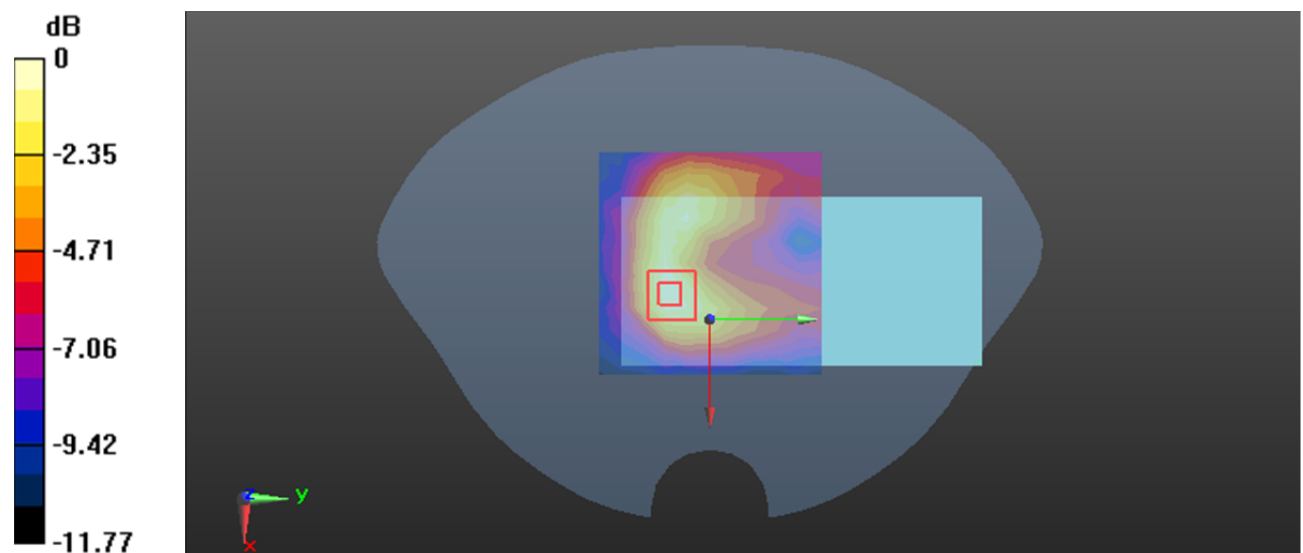

0 dB = 0.0467 W/kg = -13.31 dBW/kg

Test Plot264#: 5G NR n40 50%RB Upper_Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0462 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.394 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0473 W/kg

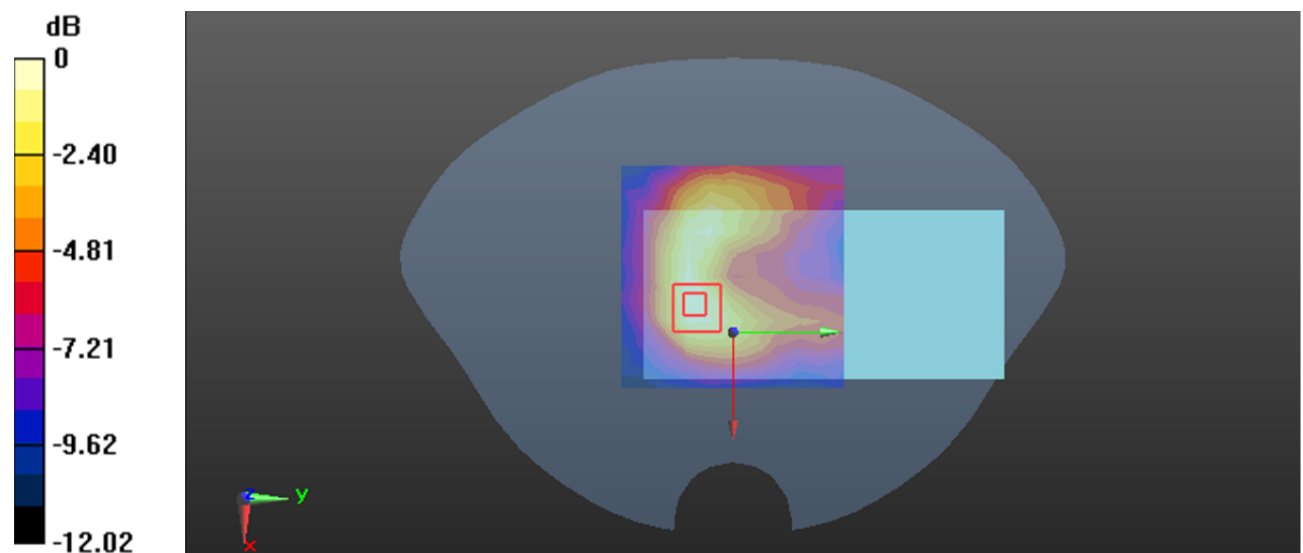

0 dB = 0.0473 W/kg = -13.25 dBW/kg

Test Plot265#: 5G NR n40 1RB Upper_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0203 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.725 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00825 W/kg

Maximum value of SAR (measured) = 0.0212 W/kg

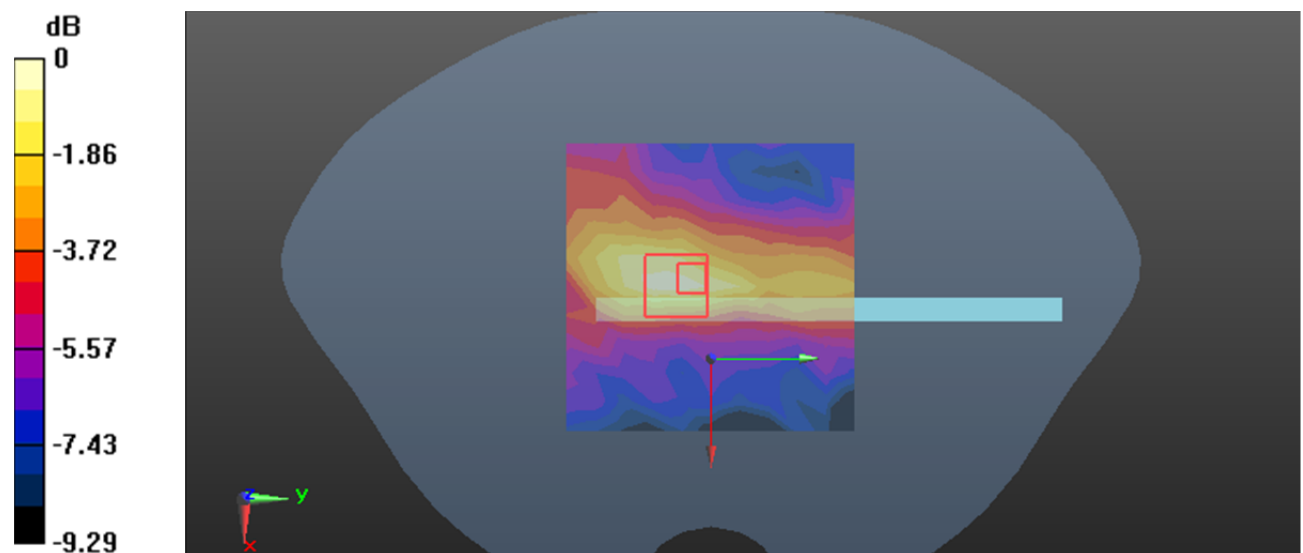

0 dB = 0.0212 W/kg = -16.74 dBW/kg

Test Plot266#: 5G NR n40 50%RB Upper_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0220 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.508 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.00878 W/kg

Maximum value of SAR (measured) = 0.0217 W/kg

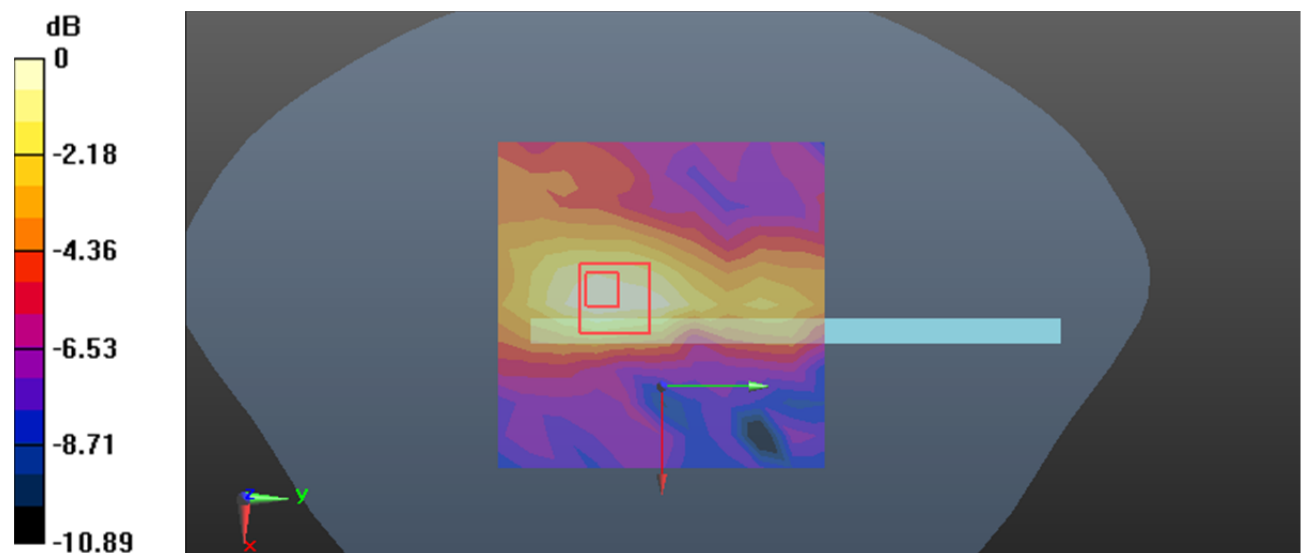

0 dB = 0.0217 W/kg = -16.64 dBW/kg

Test Plot267#: 5G NR n40 1RB Upper_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.207 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.231 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.259 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

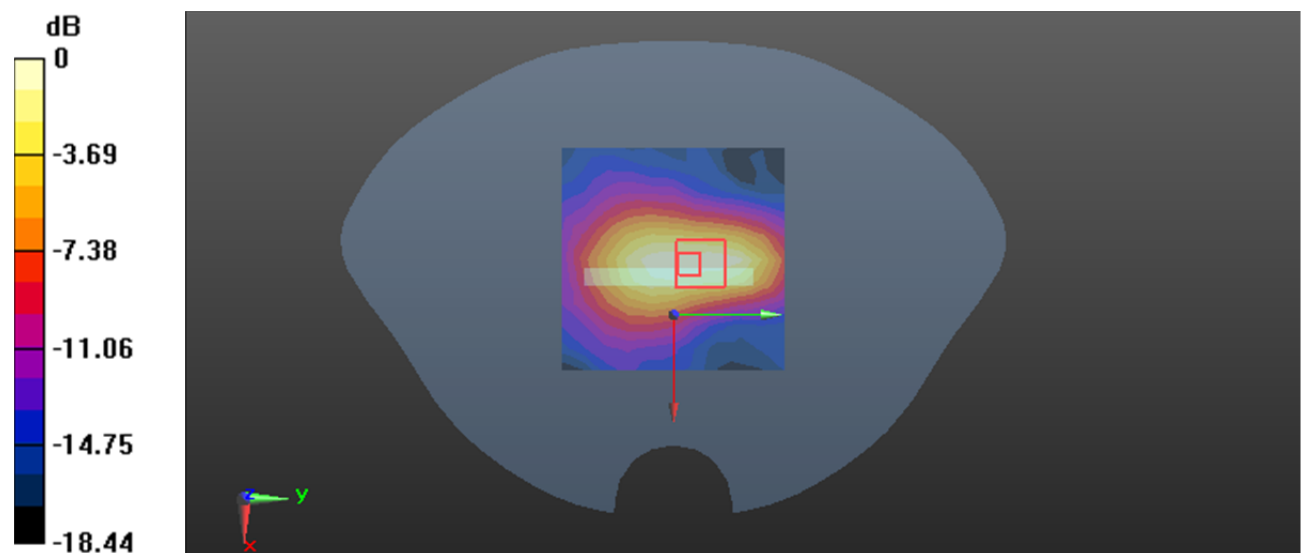

0 dB = 0.211 W/kg = -6.76 dBW/kg

Test Plot268#: 5G NR n40 50%RB Upper_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, TDD-5G NR (0); Frequency: 2355 MHz; Duty Cycle: 1:3.23

Medium parameters used: $f = 2355$ MHz; $\sigma = 1.708$ S/m; $\epsilon_r = 39.713$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.96, 4.96, 4.96) @ 2355 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.206 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.333 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.070 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

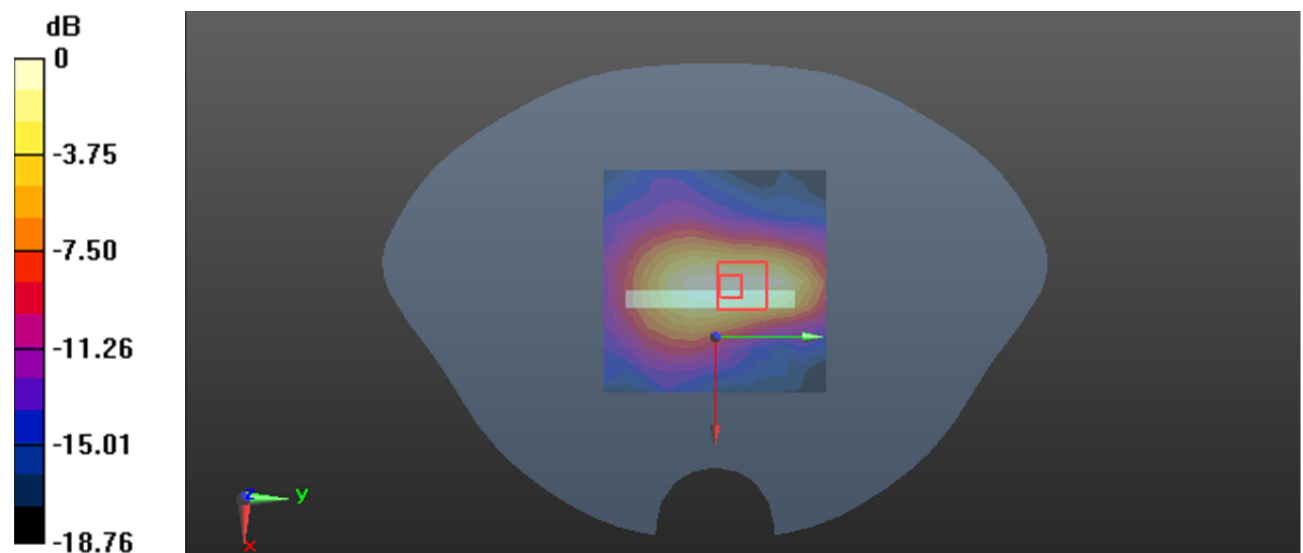

0 dB = 0.213 W/kg = -6.72 dBW/kg

Test Plot 269#: 5G NR n41 1RB Mid_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0142 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.705 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00781 W/kg

Maximum value of SAR (measured) = 0.0143 W/kg

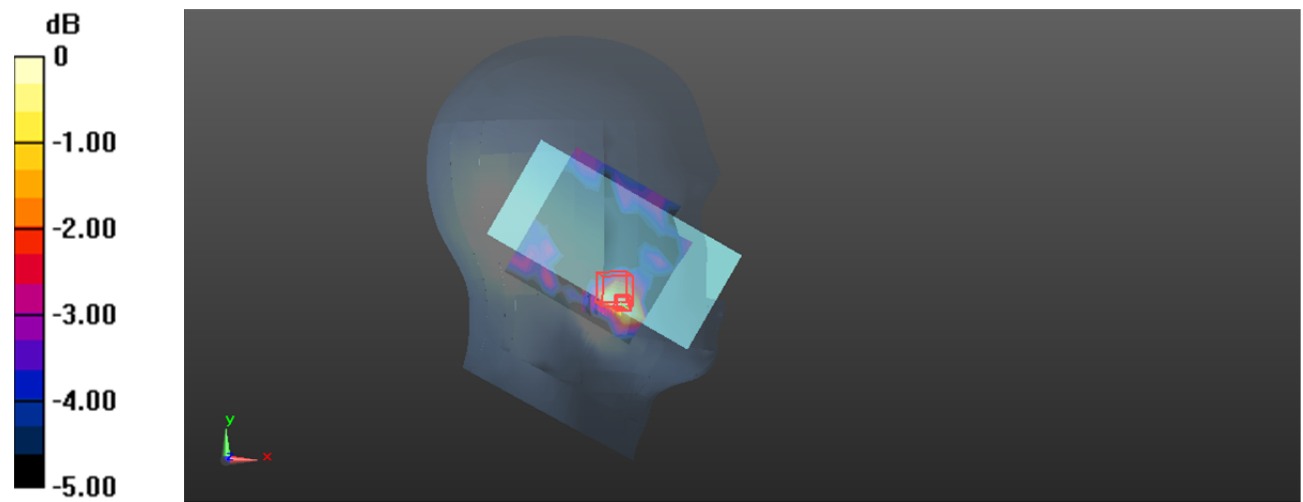

0 dB = 0.0143 W/kg = -18.45 dBW/kg

Test Plot 270#: 5G NR n41 50%RB Mid_Head Left Check**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0143 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.747 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.00996 W/kg; SAR(10 g) = 0.00828 W/kg

Maximum value of SAR (measured) = 0.0138 W/kg

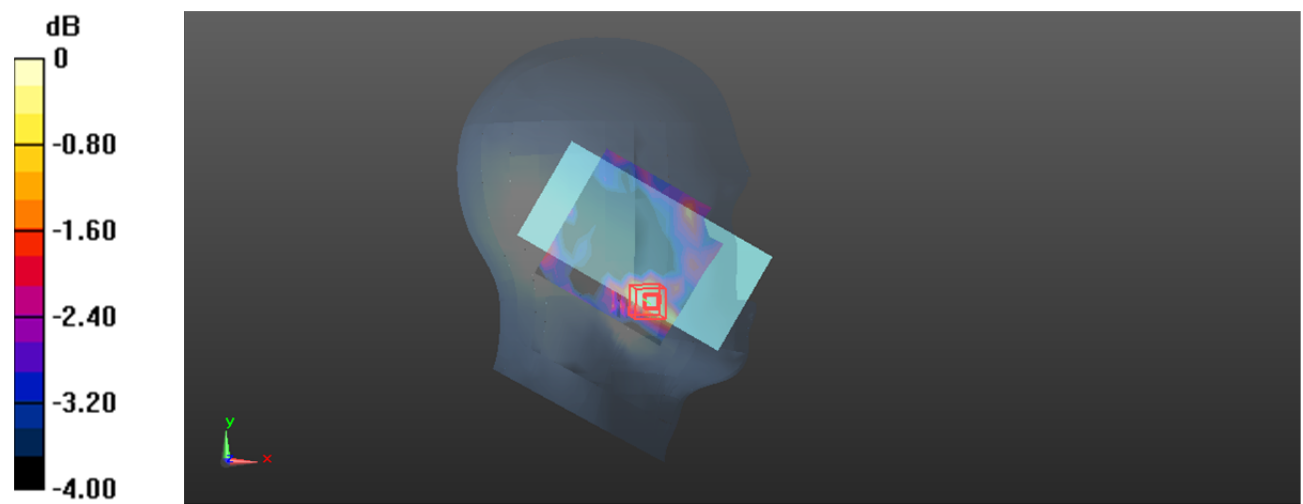

0 dB = 0.0138 W/kg = -18.60 dBW/kg

Test Plot 271#: 5G NR n41 1RB Mid_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0181 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.134 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00918 W/kg

Maximum value of SAR (measured) = 0.0158 W/kg

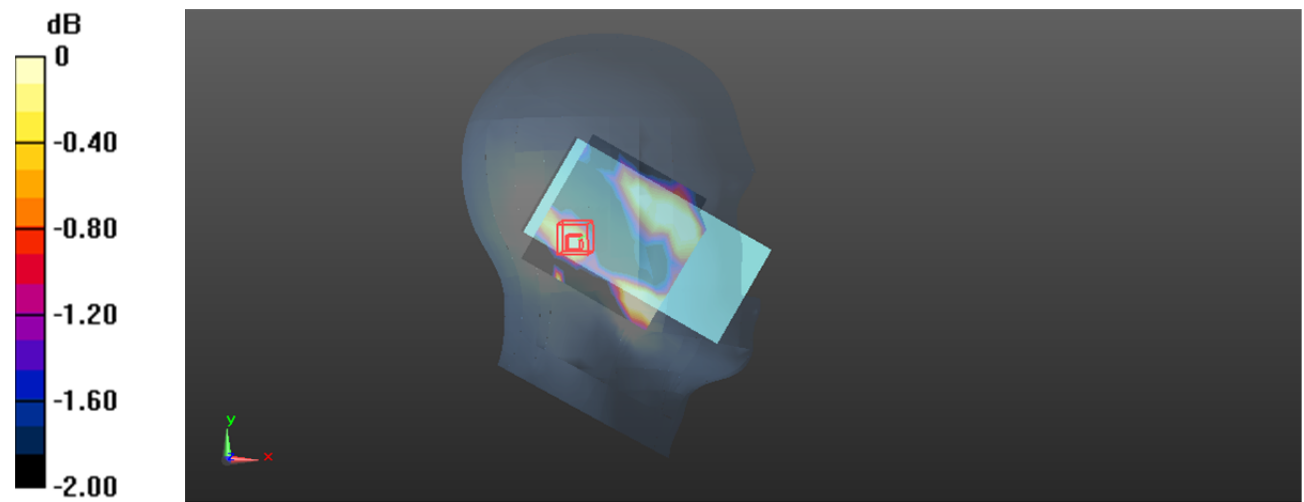

0 dB = 0.0158 W/kg = -18.01 dBW/kg

Test Plot 272#: 5G NR n41 50%RB Mid_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0213 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.812 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00742 W/kg

Maximum value of SAR (measured) = 0.0147 W/kg

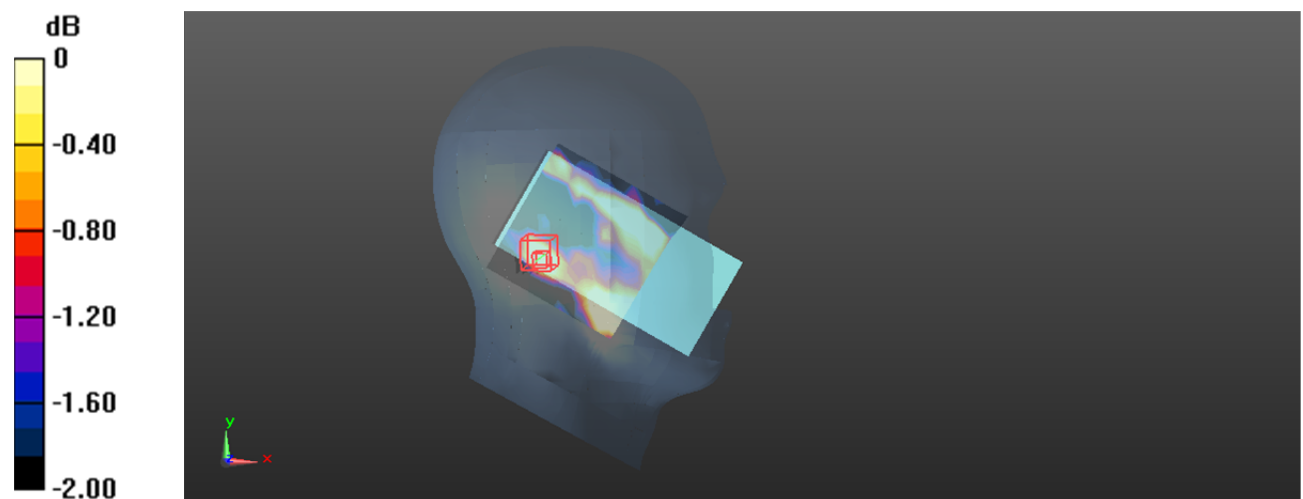

0 dB = 0.0147 W/kg = -18.33 dBW/kg

Test Plot 273#: 5G NR n41 1RB Mid_Head Right Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0197 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.114 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00806 W/kg

Maximum value of SAR (measured) = 0.0174 W/kg

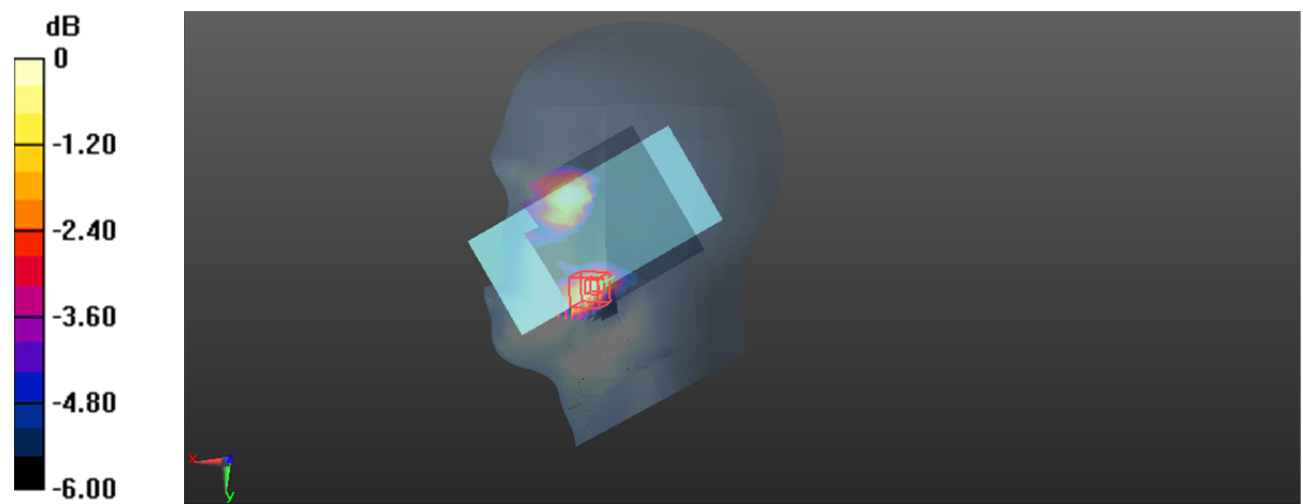

0 dB = 0.0174 W/kg = -17.59 dBW/kg

Test Plot 274#: 5G NR n41 50%RB Mid_Head Right Check**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0210 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.5510 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00453 W/kg

Maximum value of SAR (measured) = 0.0157 W/kg

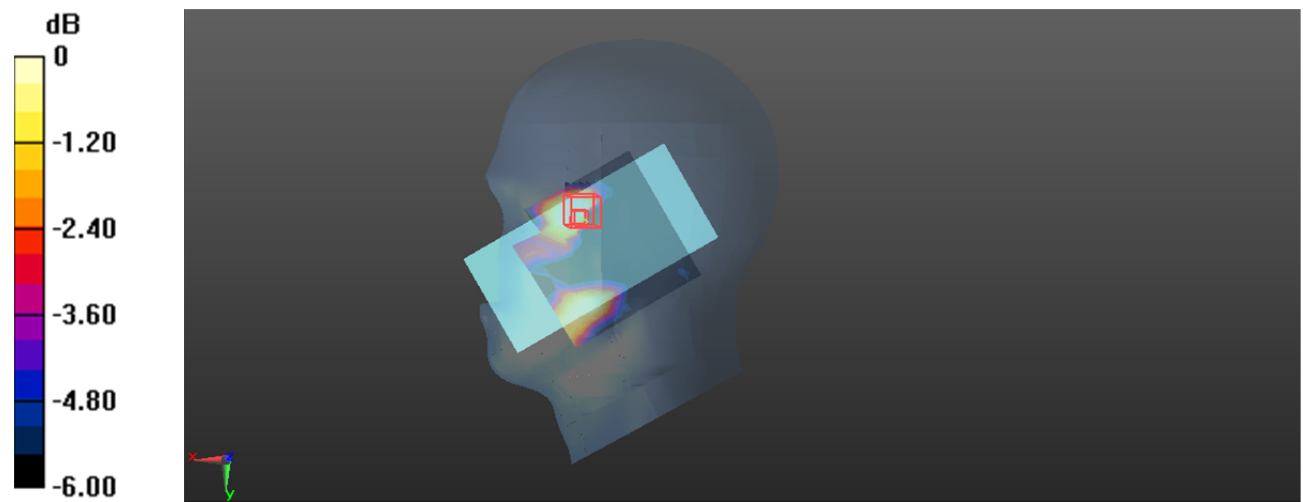

0 dB = 0.0157 W/kg = -18.04 dBW/kg

Test Plot 275#: 5G NR n41 1RB Mid_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0347 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.9610 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0350 W/kg

SAR(1 g) = 0.021 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0273 W/kg

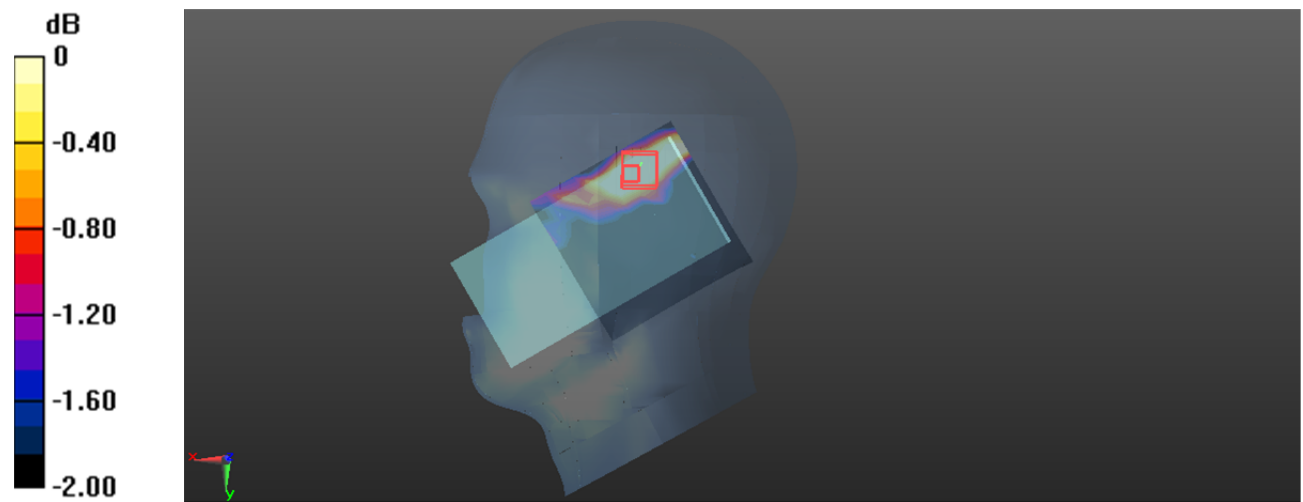

0 dB = 0.0273 W/kg = -15.64 dBW/kg

Test Plot 276#: 5G NR n41 50%RB Mid_Head Right Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0383 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.946 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0375 W/kg

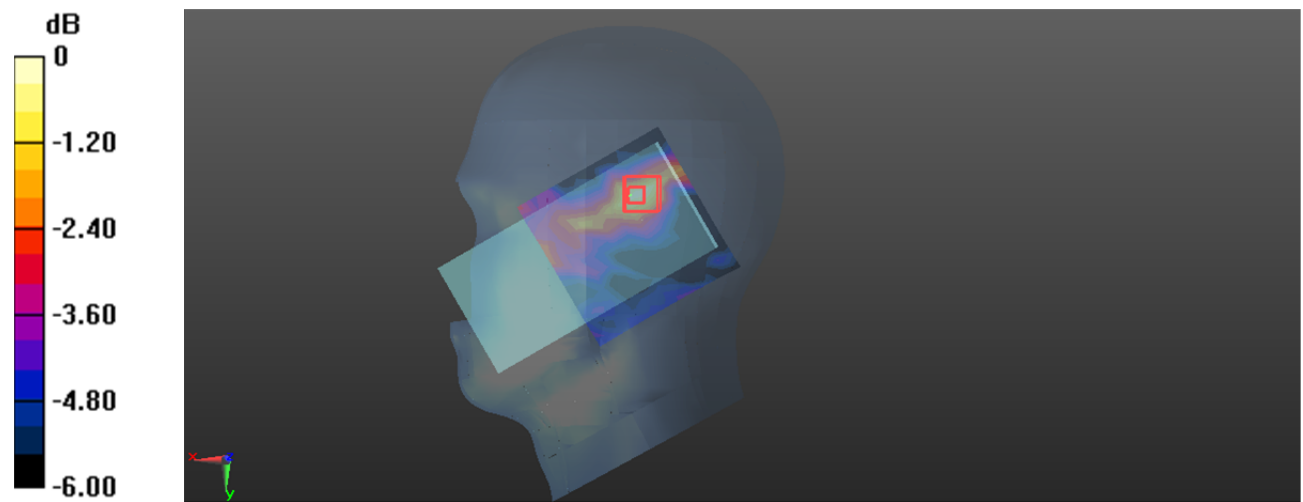

0 dB = 0.0375 W/kg = -14.26 dBW/kg

Test Plot 277#: 5G NR n41 1RB Mid - Body Font**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.130 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.969 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

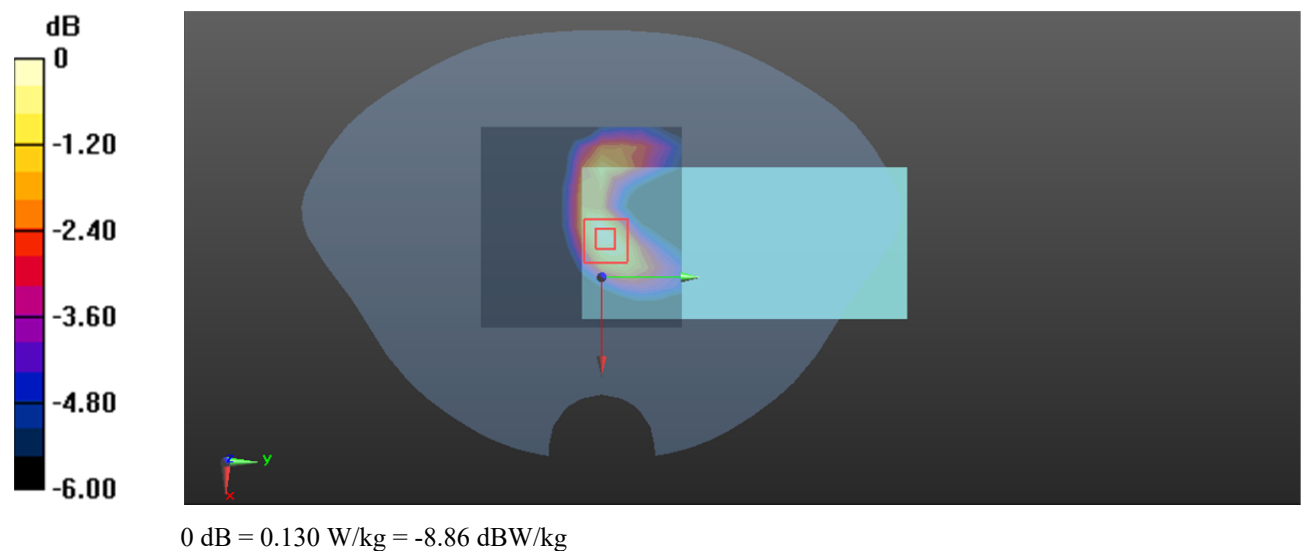

Test Plot 278#: 5G NR n41 50%RB Mid - Body Font**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.140 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.063 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.051 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

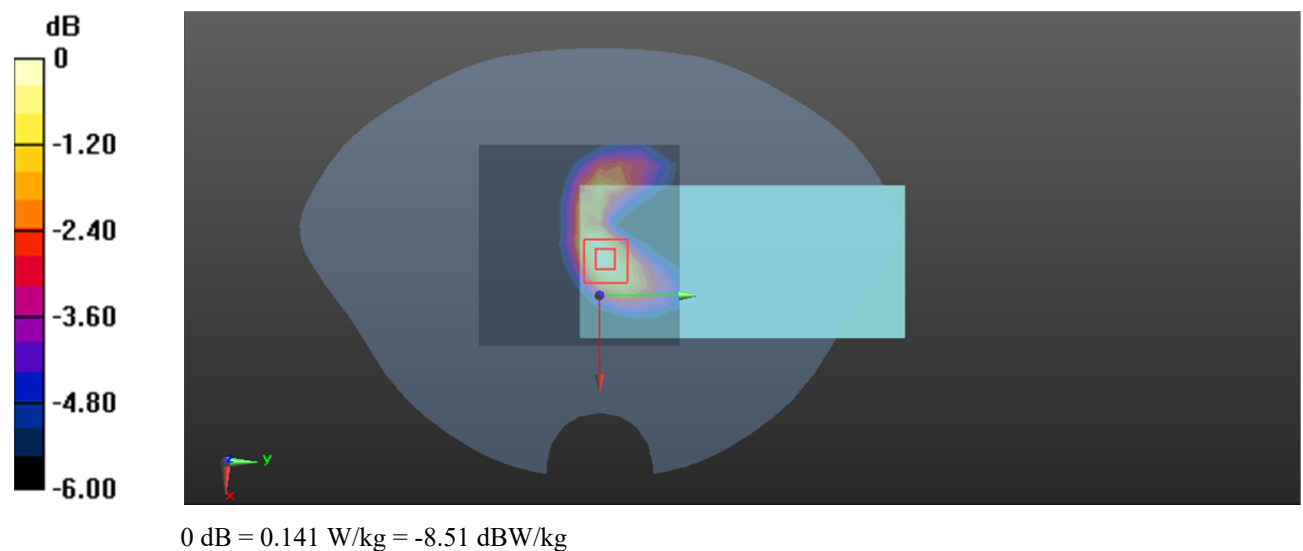

Test Plot 279#: 5G NR n41 1RB Mid - Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.169 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.313 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

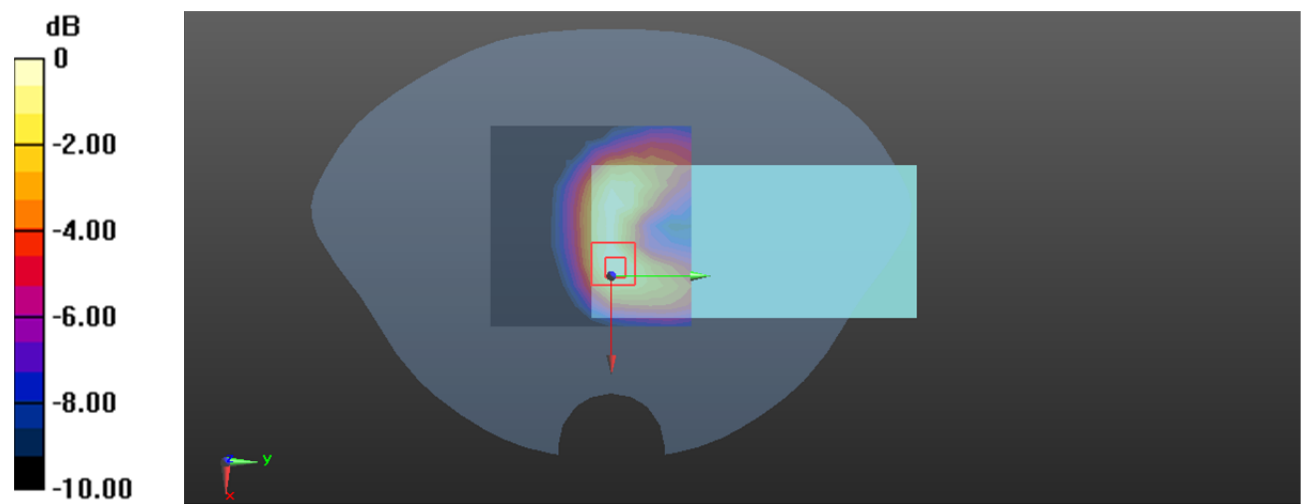

0 dB = 0.160 W/kg = -7.96 dBW/kg

Test Plot 280#: 5G NR n41 50%RB Mid_Body Back**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.171 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.090 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.208 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.059 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

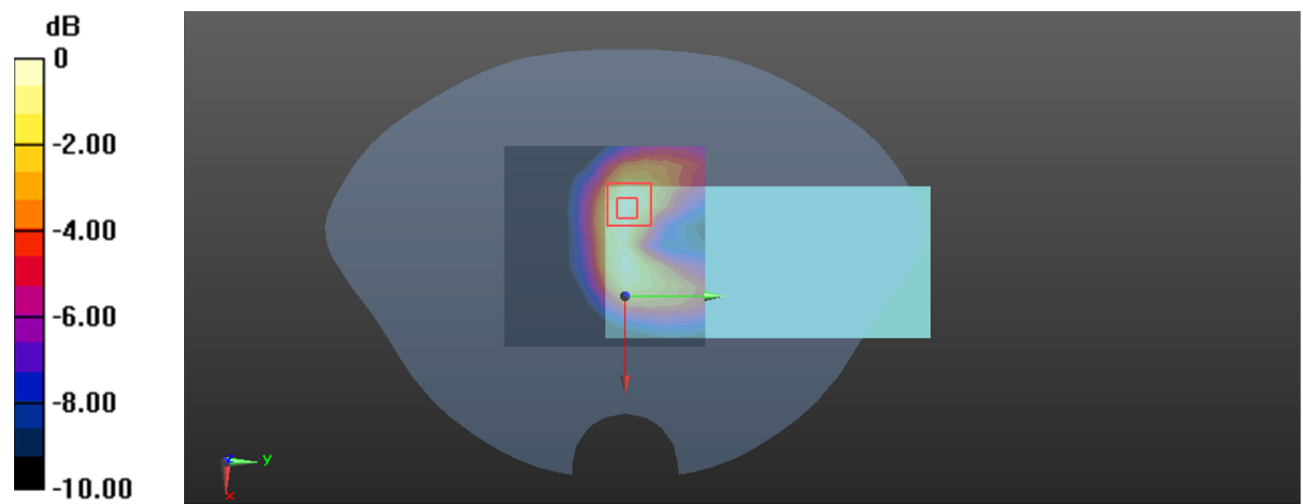

Test Plot 281#: 5G NR n41 1RB Mid_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0547 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.281 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0551 W/kg

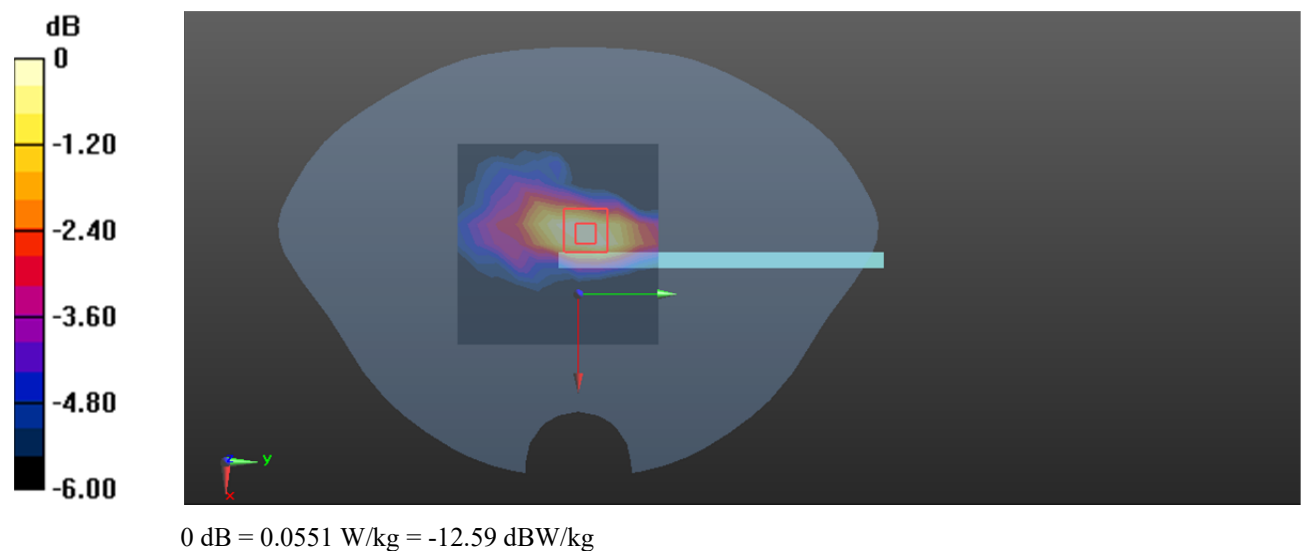

Test Plot 282#: 5G NR n41 50%RB Mid_Body Left**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0523 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.285 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0770 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0713 W/kg

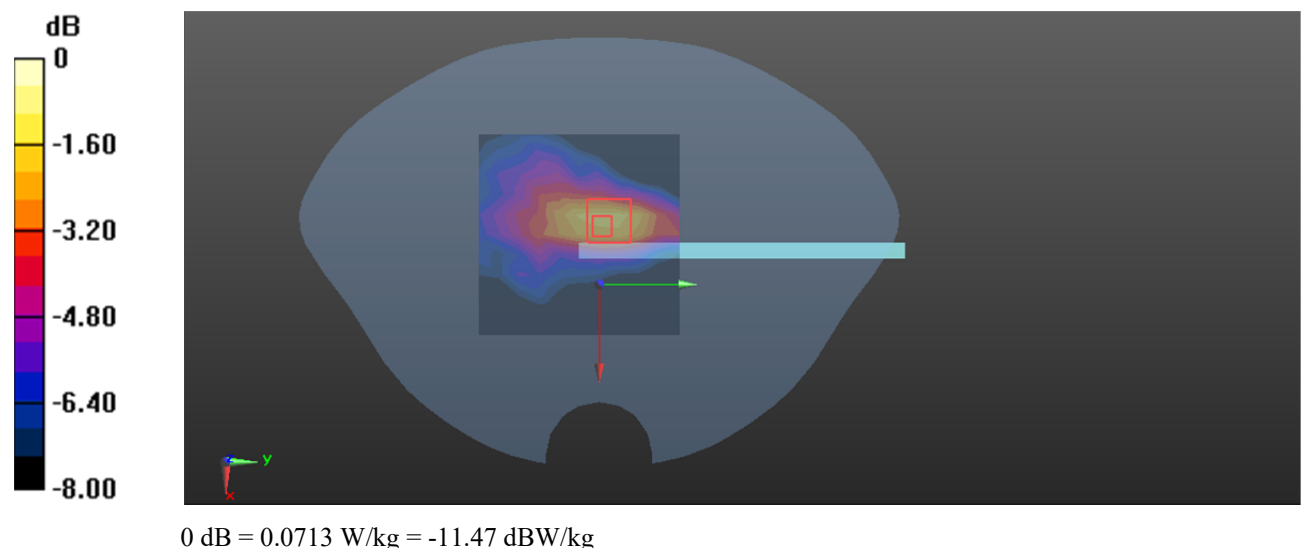

Test Plot 283#: 5G NR n41 1RB Mid_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.266 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.893 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.283 W/kg

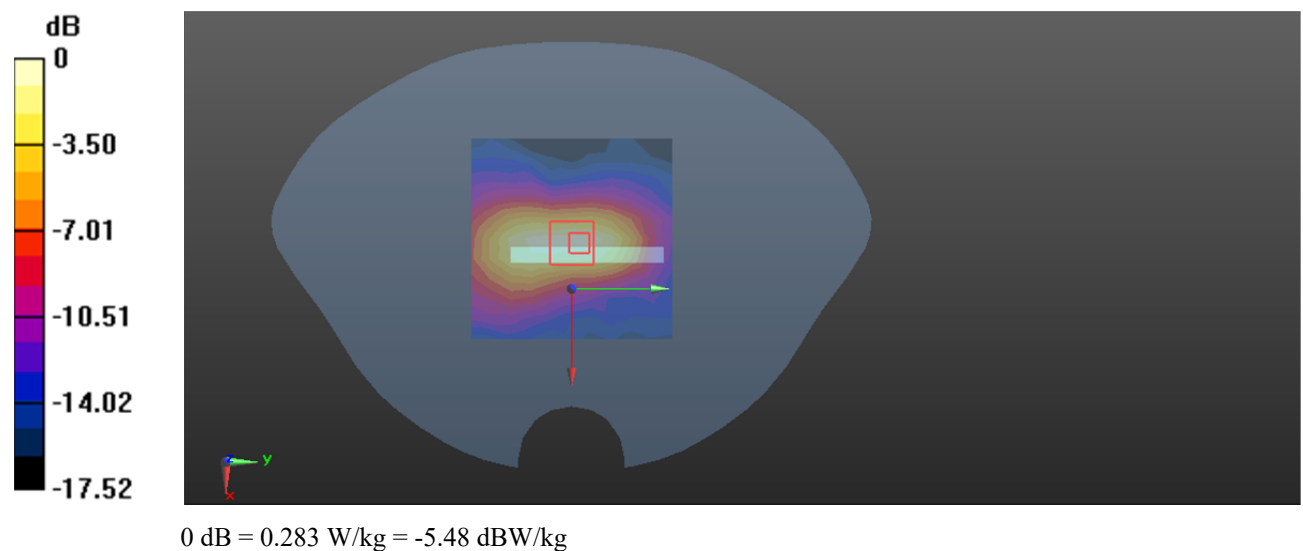

Test Plot 284#: 5G NR n41 50%RB Mid_Body Bottom**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, Generic TDD-FR1 n 41 (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.902$ S/m; $\epsilon_r = 38.411$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(4.52, 4.52, 4.52) @ 2593 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.277 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.991 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.301 W/kg

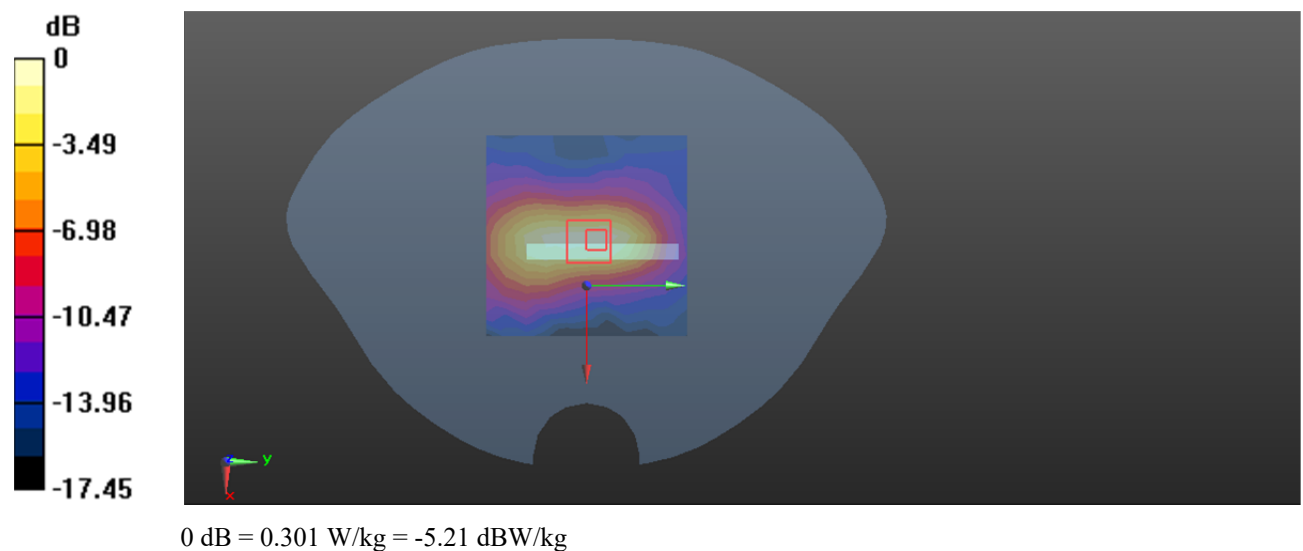

Test Plot285#: 5G NR n66 1RB Mid - Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.339 \text{ S/m}$; $\epsilon_r = 40.983$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0426 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.027 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0441 W/kg

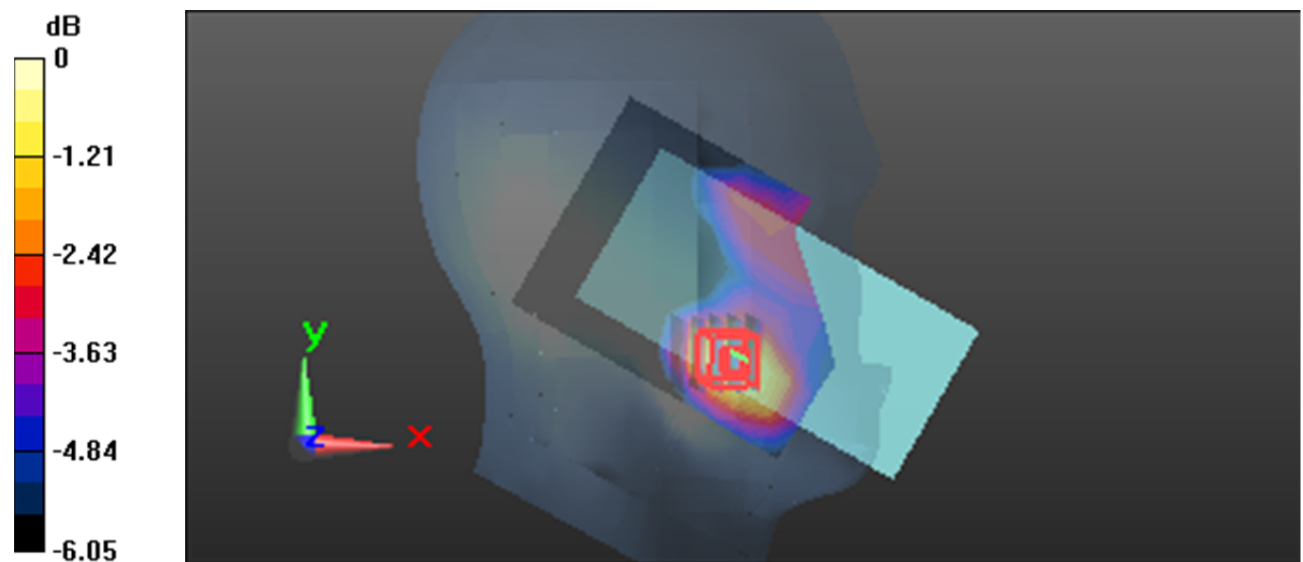

0 dB = 0.0441 W/kg = -13.56 dBW/kg

Test Plot286#: 5G NR n66 50%RB Mid_Head Left Cheek**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 40.983$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0406 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.204 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0540 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0541 W/kg

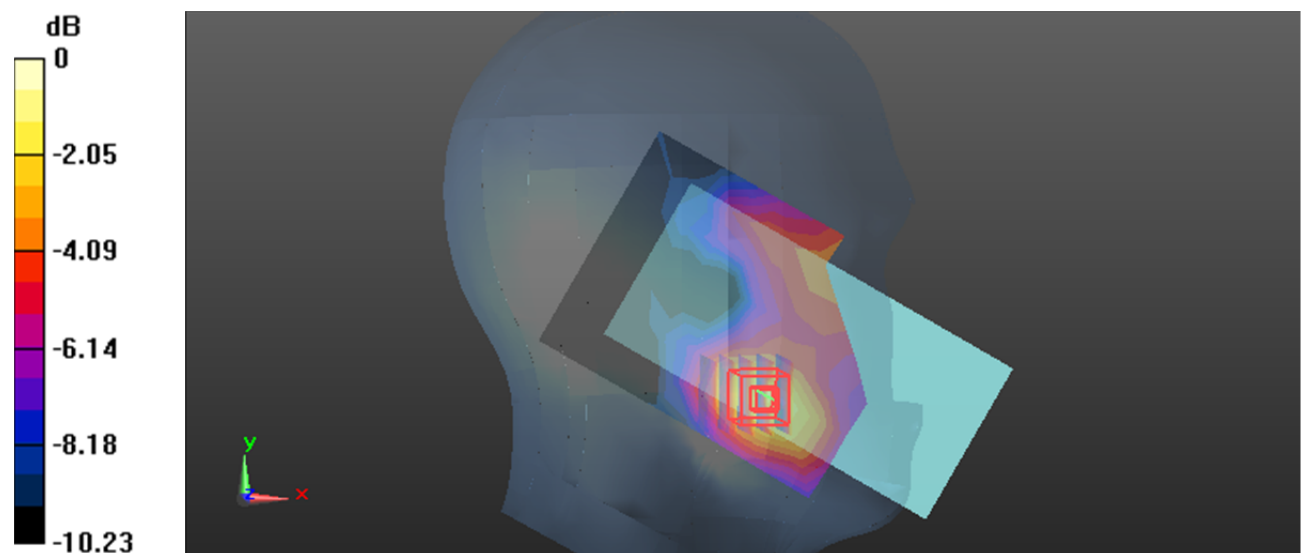

0 dB = 0.0541 W/kg = -12.67 dBW/kg

Test Plot287#: 5G NR n66 1RB Mid_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 40.983$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0197 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.120 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.0216 W/kg

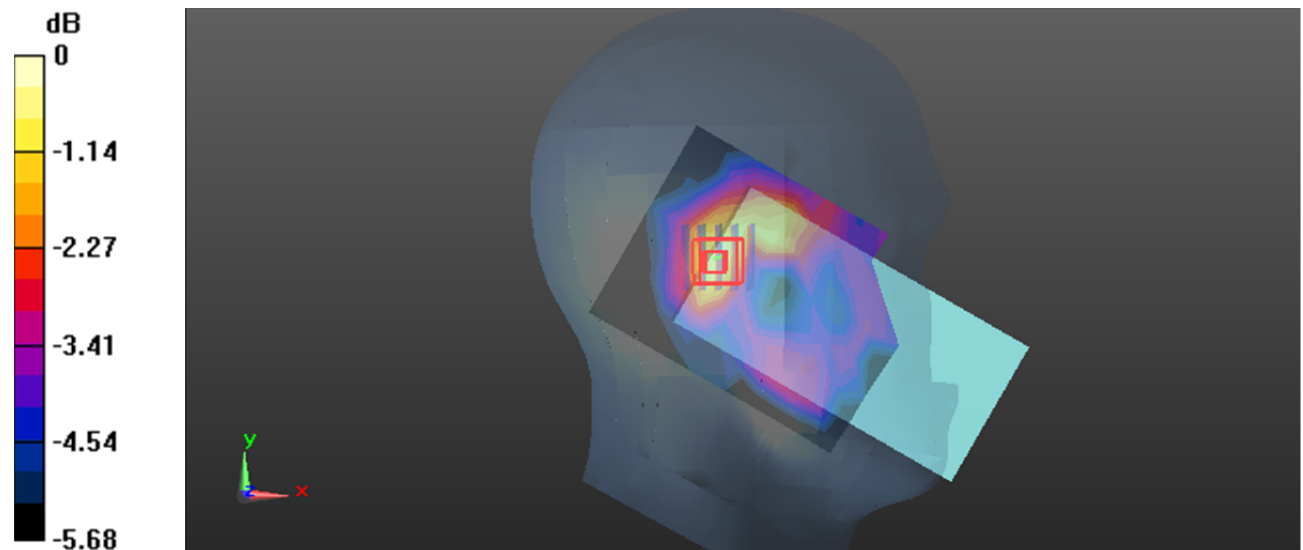

0 dB = 0.0216 W/kg = -16.66 dBW/kg

Test Plot288#: 5G NR n66 50%RB Mid_Head Left Tilt**DUT: Mobile Phone; Type: CL9 ; Serial: 2DB3-1**

Communication System: UID 0, FDD-5G NR (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 40.983$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3157; ConvF(5.38, 5.38, 5.38) @ 1745 MHz; Calibrated: 2023/4/10
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1493; Calibrated: 2023/3/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0197 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.812 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.011 W/kg

Maximum value of SAR (measured) = 0.0173 W/kg

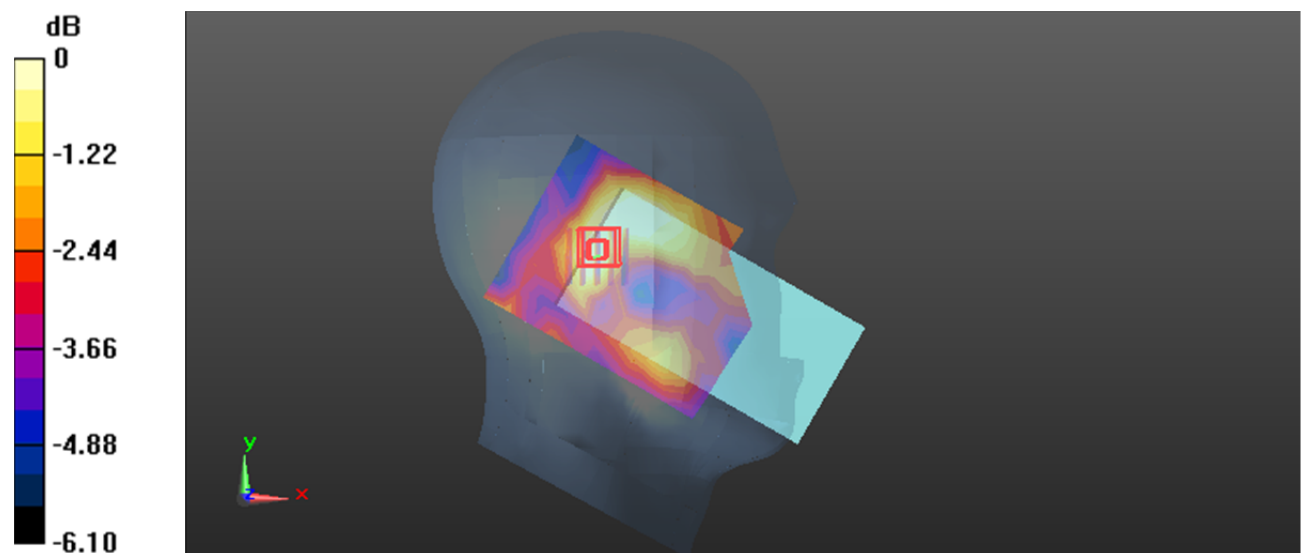

0 dB = 0.0173 W/kg = -17.62 dBW/kg