

# TEST REPORT

Reference No..... : WTS20S03012207W003  
FCC ID ..... : 2ADYY-KD6  
Applicant..... : TECNO MOBILE LIMITED  
Address..... : ROOM 604 6/F SOUTH TOWER WORLD, FINANCE CTR  
HARBOUR CITY 17 CANTON ROAD TST KL, Hong Kong  
Manufacturer ..... : SHENZHEN TECNO TECHNOLOGY CO.,LTD.  
Address..... : 101, Building 24, Waijing Industrial Park, Fumin Community,  
Fucheng Street, Longhua District, Shenzhen City, P.R. China  
Product..... : Mobile Phone  
Model(s) ..... : KD6  
Brand Name..... : TECNO  
Standards..... : FCC CFR47 Part 15.247:2018  
Date of Receipt sample .... : 2020-04-08  
Date of Test ..... : 2020-04-09 to 2020-04-15  
Date of Issue..... : 2020-04-16  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Approved by:

*Ford Wang*

Ford Wang / Project Engineer



*Philo Zhang*

Philo Zhang / Manager

## 2 Contents

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS .....</b>	<b>2</b>
<b>3 REVISION HISTORY .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION.....</b>	<b>4</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	4
4.2 DETAILS OF E.U.T. ....	4
4.3 CHANNEL LIST.....	5
4.4 TEST MODE.....	6
4.5 TEST FACILITY.....	7
<b>5 TEST SUMMARY .....</b>	<b>8</b>
<b>6 EQUIPMENT USED DURING TEST .....</b>	<b>9</b>
6.1 EQUIPMENTS LIST .....	9
6.2 DESCRIPTION OF SUPPORT UNITS .....	10
6.3 MEASUREMENT UNCERTAINTY .....	10
6.4 TEST EQUIPMENT CALIBRATION .....	10
<b>7 CONDUCTED EMISSION .....</b>	<b>11</b>
7.1 E.U.T. OPERATION .....	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION .....	11
7.4 CONDUCTED EMISSION TEST RESULT .....	12
<b>8 RADIATED EMISSIONS.....</b>	<b>16</b>
8.1 EUT OPERATION.....	16
8.2 TEST SETUP .....	17
8.3 SPECTRUM ANALYZER SETUP .....	18
8.4 TEST PROCEDURE .....	19
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	19
8.6 SUMMARY OF TEST RESULTS .....	20
<b>9 CONDUCTED SPURIOUS EMISSIONS.....</b>	<b>36</b>
9.1 TEST PROCEDURE .....	36
9.2 TEST RESULT .....	37
<b>10 BAND EDGE MEASUREMENT .....</b>	<b>53</b>
10.1 TEST PROCEDURE .....	53
10.2 TEST RESULT .....	54
<b>11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT .....</b>	<b>59</b>
11.1 TEST PROCEDURE:.....	59
11.2 TEST RESULT: .....	59
<b>12 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....</b>	<b>68</b>
12.1 TEST PROCEDURE:.....	68
12.2 TEST RESULT: .....	69
<b>13 DUTY CYCLE.....</b>	<b>78</b>
<b>14 POWER SPECTRAL DENSITY .....</b>	<b>79</b>
14.1 TEST PROCEDURE:.....	79
14.2 TEST RESULT: .....	79
<b>15 ANTENNA REQUIREMENT .....</b>	<b>88</b>
<b>16 RF EXPOSURE.....</b>	<b>89</b>
<b>17 PHOTOGRAPHS OF TEST SETUP AND EUT.....</b>	<b>90</b>

### 3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS20S03012 207W003	2020-04-08	2020-04-09 to 2020-04- 15	2020-04-16	original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	Mobile Phone
Model(s):	KD6
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band II/IV/V
LTE Band(s):	FDD Band 2/4/5/7
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40 5G-802.11a/ n(HT20/40)/ac(HT20/40/80)
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	V2.0
Software Version:	KD6-H6116HIJ-QGo-200212V114
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage
Note:	N/A

### 4.2 Details of E.U.T.

Operation Frequency:	WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz BLE:2402-2480MHz
Max. RF output power:	WiFi(2.4G): 14.82dBm BLE: -5.77dBm
Type of Modulation:	WiFi: CCK, OFDM BLE:GFSK
Antenna installation:	WiFi: internal permanent antenna BLE: internal permanent antenna
Antenna Gain:	WiFi(2.4G): 1.2dBi BLE: 1.2dBi
Ratings:	Battery DC 3.85V, 4900mAh DC 5V, 1.2A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.2A)
Adapter:	Manufacturer: Shenzhen Lianxunfa Technology Co.,LTD Model No.: CU-52JT

### 4.3 Channel List

#### WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

#### BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
	802.11n HT40	MCS0	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

**Note** :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

**ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

**FCC Designation No.: CN1201. Test Firm Registration No.: 523476.**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

## 5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

Note: All test were performed that the device transmit continue of the 100% duty cycle.



## 6 Equipment Used during Test

### 6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2019-09-12	2020-09-11
2.	LISN	R&S	ENV216	101215	2019-09-12	2020-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2019-09-12	2020-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2019-09-12	2020-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2019-09-12	2020-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2019-09-12	2020-09-11
4.	Cable	LARGE	RF300	-	2019-09-12	2020-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2019-04-29	2020-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2020-04-09	2021-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-04-09	2021-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2019-09-12	2020-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2020-04-09	2021-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-04-09	2021-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2020-04-13	2021-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2020-04-13	2021-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2020-04-13	2021-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-04-09	2021-04-08
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	2020-04-13	2021-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2020-04-13	2021-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2019-09-12	2020-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2019-09-12	2020-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2019-09-12	2020-09-11

## 6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

## 6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64$ dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}$ Hz
RF Power	$\pm 0.42$ dB
RF Power Density	$\pm 0.7$ dB
Conducted Spurious Emissions	$\pm 2.76$ dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

## 6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

## 7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

### 7.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

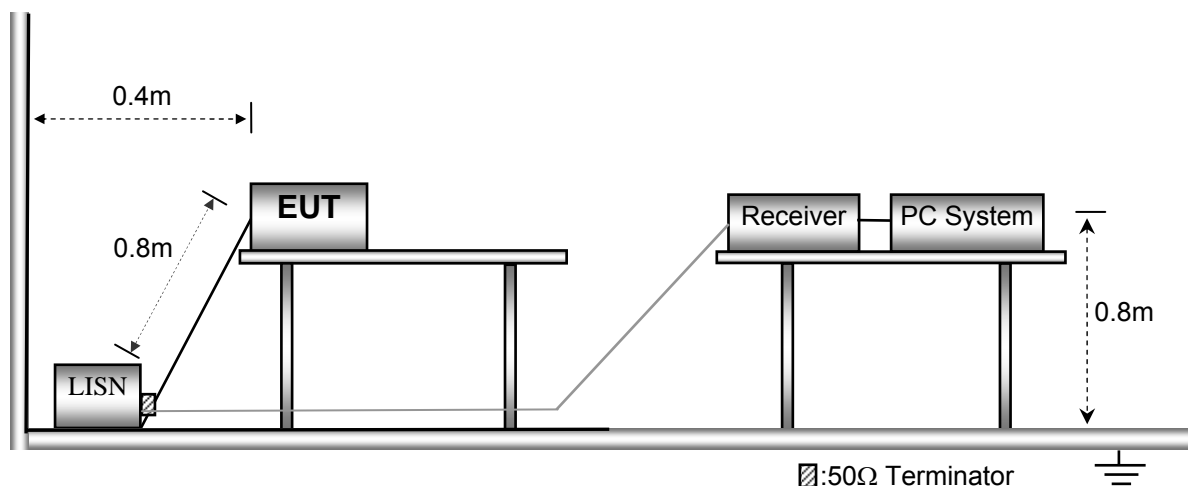

### 7.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode ( 802.11b mode low channel )

Live line:

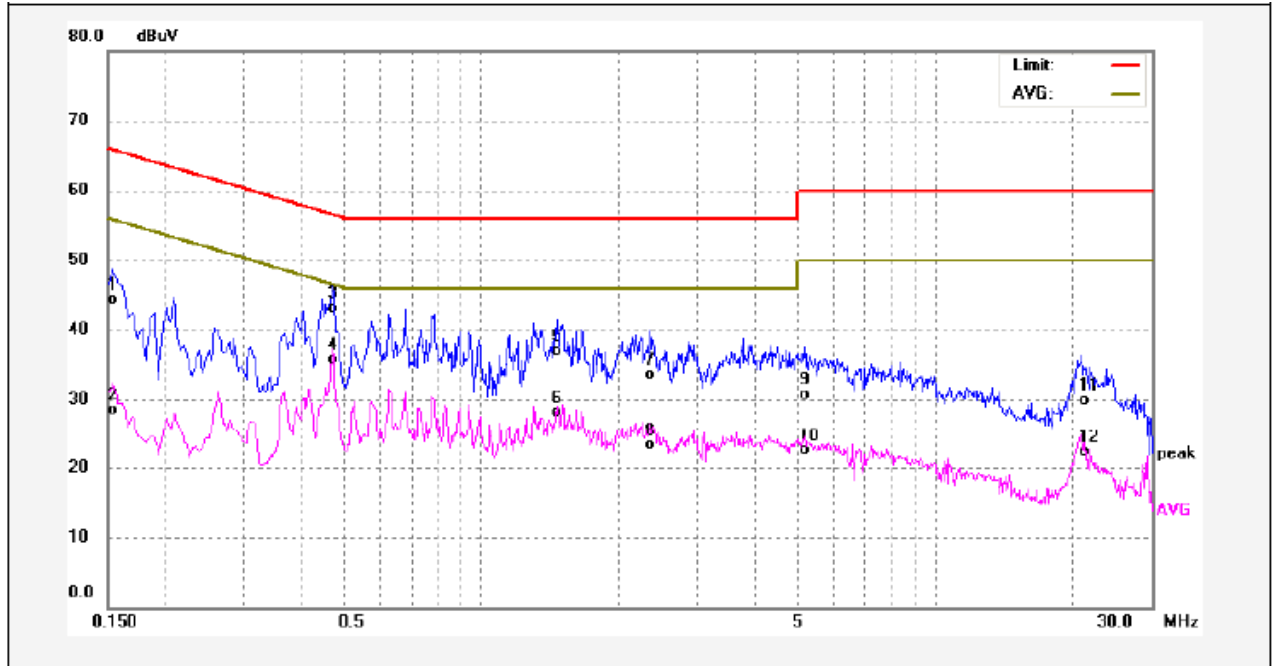

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	34.47	9.92	44.39	65.78	-21.39	QP	
2	0.1539	18.52	9.92	28.44	55.78	-27.34	AVG	
3	0.4700	33.16	9.99	43.15	56.51	-13.36	QP	
4	0.4700	25.68	9.99	35.67	46.51	-10.84	AVG	
5	1.4660	26.80	10.02	36.82	56.00	-19.18	QP	
6	1.4660	18.07	10.02	28.09	46.00	-17.91	AVG	
7	2.3460	23.53	10.01	33.54	56.00	-22.46	QP	
8	2.3460	13.25	10.01	23.26	46.00	-22.74	AVG	
9	5.1540	20.46	10.15	30.61	60.00	-29.39	QP	
10	5.1540	12.37	10.15	22.52	50.00	-27.48	AVG	
11	21.3940	19.44	10.53	29.97	60.00	-30.03	QP	
12	21.3940	11.74	10.53	22.27	50.00	-27.73	AVG	


Neutral line:

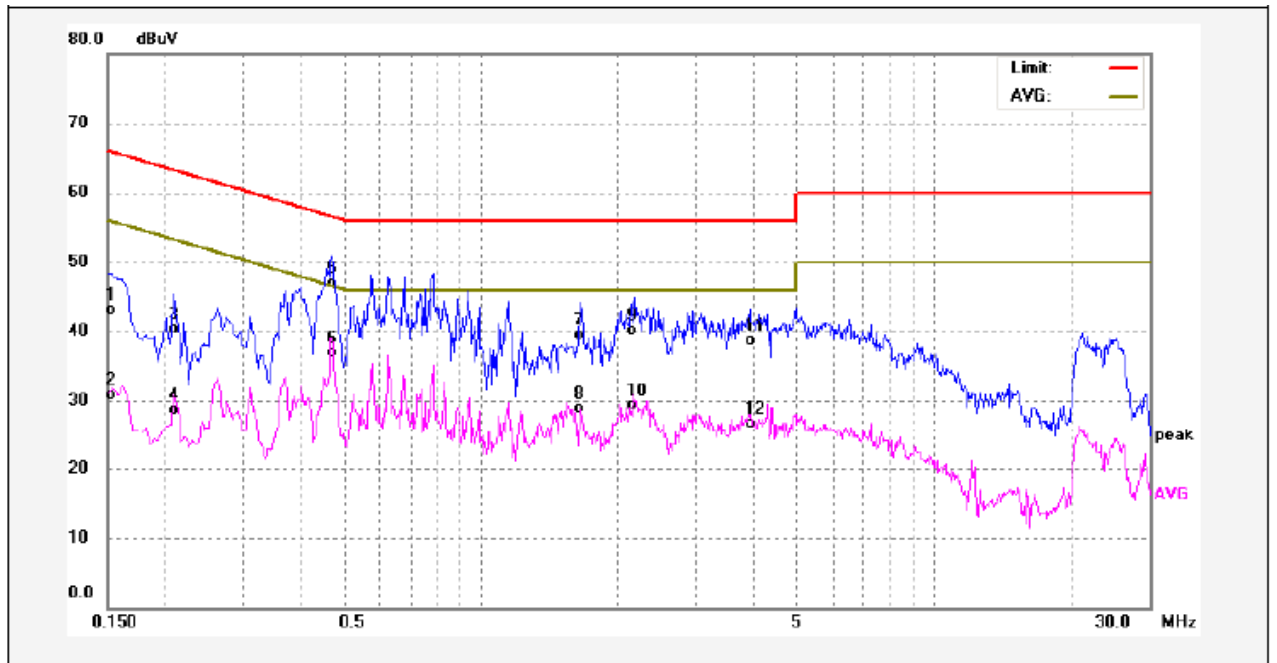

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	33.13	9.93	43.06	65.99	-22.93	QP	
2	0.1500	20.92	9.93	30.85	55.99	-25.14	AVG	
3	0.2100	30.39	9.90	40.29	63.20	-22.91	QP	
4	0.2100	18.86	9.90	28.76	53.20	-24.44	AVG	
5	0.4700	36.87	9.99	46.86	56.51	-9.65	QP	
6	0.4700	26.84	9.99	36.83	46.51	-9.68	AVG	
7	1.6660	29.49	10.01	39.50	56.00	-16.50	QP	
8	1.6660	18.90	10.01	28.91	46.00	-17.09	AVG	
9	2.1900	30.01	10.01	40.02	56.00	-15.98	QP	
10	2.1900	19.38	10.01	29.39	46.00	-16.61	AVG	
11	3.9380	28.58	10.06	38.64	56.00	-17.36	QP	
12	3.9380	16.60	10.06	26.66	46.00	-19.34	AVG	


Worst Mode: BLE mode (low channel )

Live line:

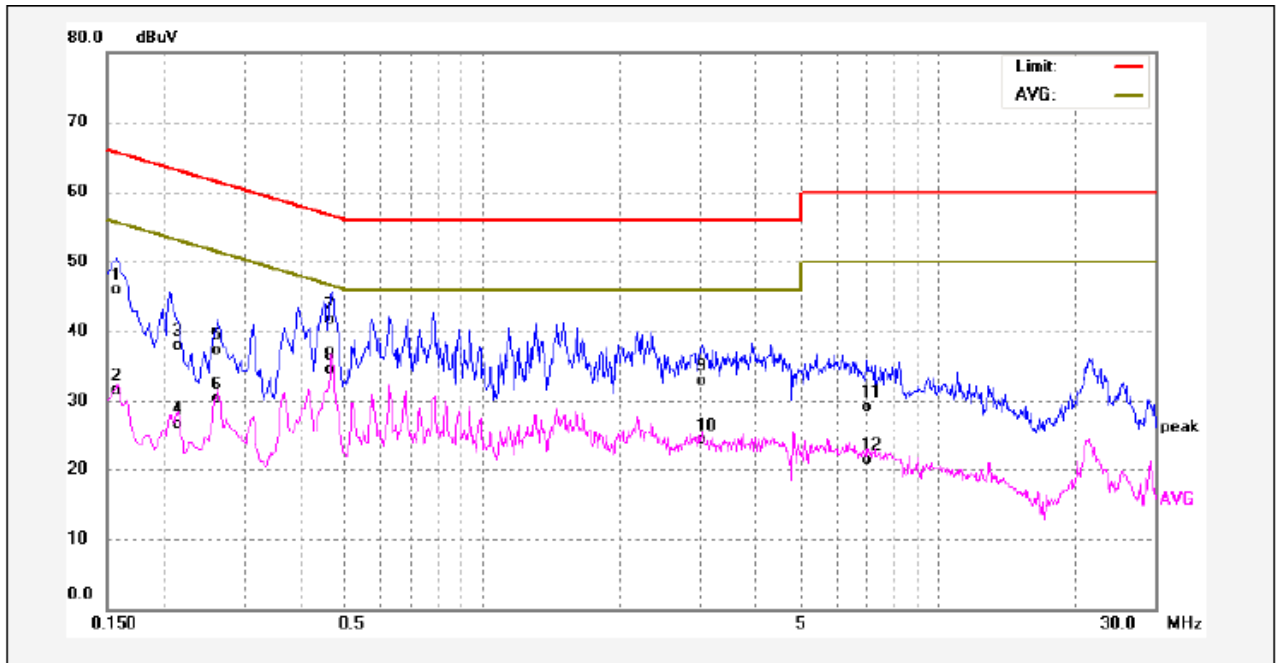

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	35.97	9.93	45.90	65.56	-19.66	QP	
2	0.1580	21.52	9.93	31.45	55.56	-24.11	AVG	
3	0.2140	28.11	9.89	38.00	63.04	-25.04	QP	
4	0.2140	16.77	9.89	26.66	53.04	-26.38	AVG	
5	0.2620	27.38	9.88	37.26	61.36	-24.10	QP	
6	0.2620	20.40	9.88	30.28	51.36	-21.08	AVG	
7	0.4700	31.70	9.99	41.69	56.51	-14.82	QP	
8	0.4700	24.53	9.99	34.52	46.51	-11.99	AVG	
9	3.0260	22.79	10.06	32.85	56.00	-23.15	QP	
10	3.0260	14.16	10.06	24.22	46.00	-21.78	AVG	
11	7.0420	18.87	10.29	29.16	60.00	-30.84	QP	
12	7.0420	11.03	10.29	21.32	50.00	-28.68	AVG	

Neutral line:

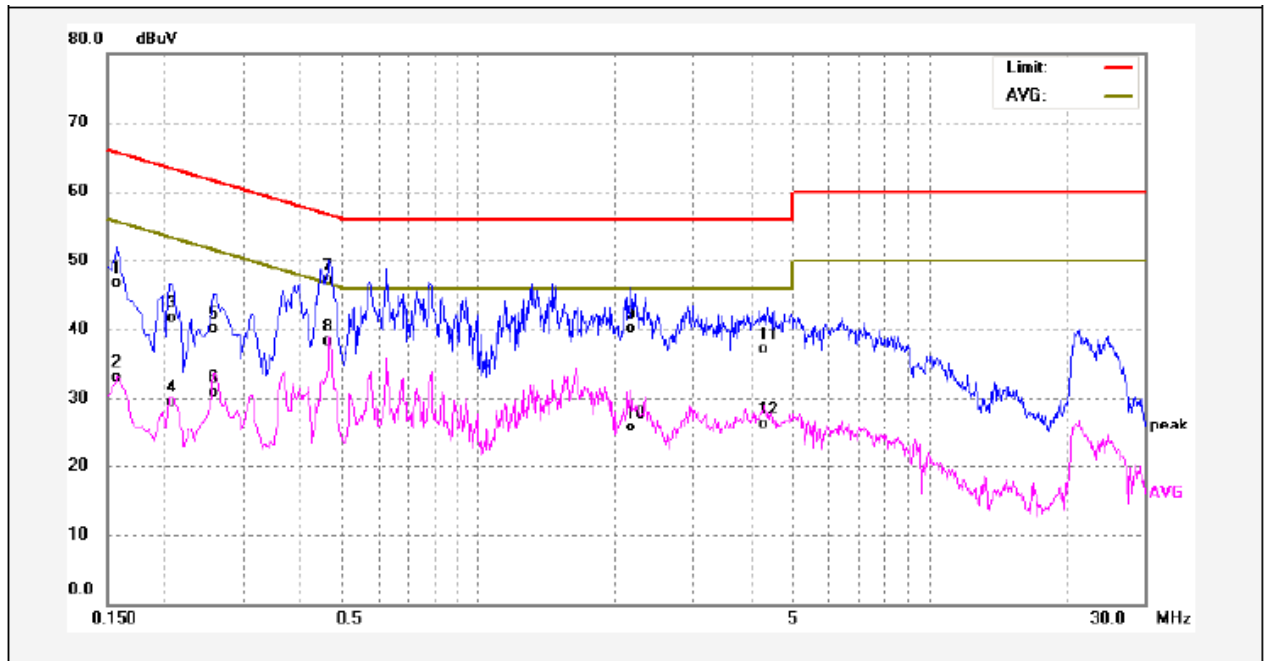

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	36.87	9.93	46.80	65.56	-18.76	QP	
2	0.1580	23.10	9.93	33.03	55.56	-22.53	AVG	
3	0.2100	31.83	9.90	41.73	63.20	-21.47	QP	
4	0.2100	19.53	9.90	29.43	53.20	-23.77	AVG	
5	0.2580	30.31	9.88	40.19	61.49	-21.30	QP	
6	0.2580	20.94	9.88	30.82	51.49	-20.67	AVG	
7	0.4660	37.12	9.99	47.11	56.58	-9.47	QP	
8	0.4660	28.25	9.99	38.24	46.58	-8.34	AVG	
9	2.1860	30.02	10.01	40.03	56.00	-15.97	QP	
10	2.1860	15.65	10.01	25.66	46.00	-20.34	AVG	
11	4.2938	27.06	10.08	37.14	56.00	-18.86	QP	
12	4.2938	16.19	10.08	26.27	46.00	-19.73	AVG	

## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa

EUT Operation :


The test was performed in TX transmitting mode, the test data were shown in the report.




## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

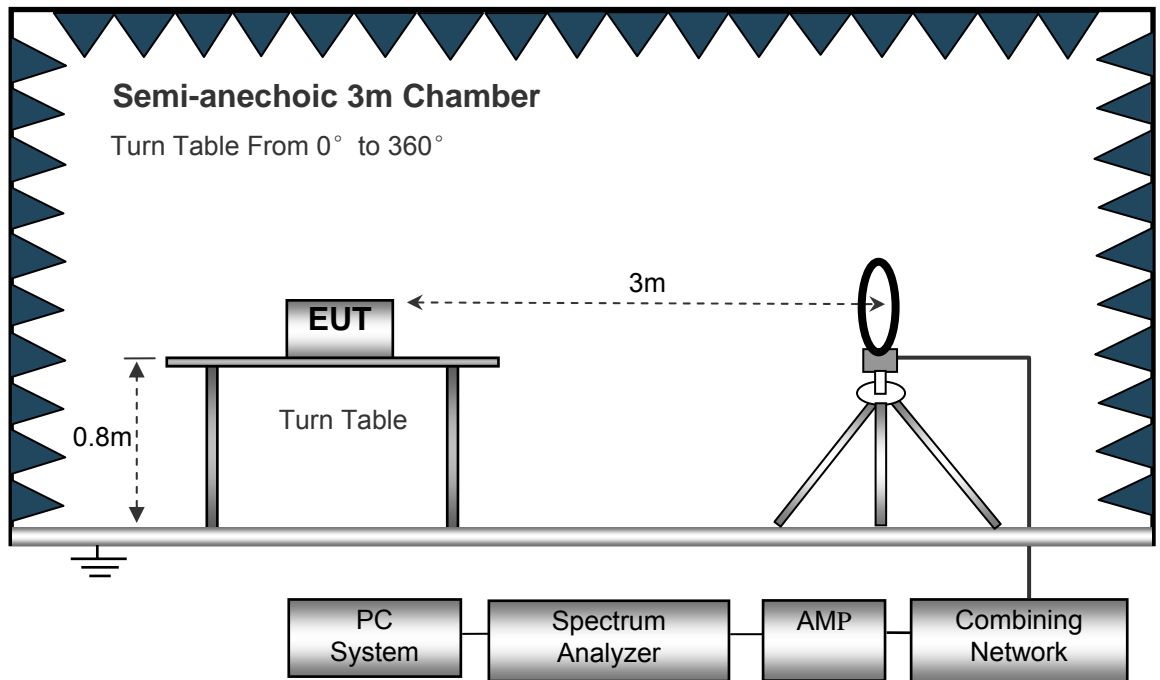

The test setup for emission measurement from 30 MHz to 1 GHz.

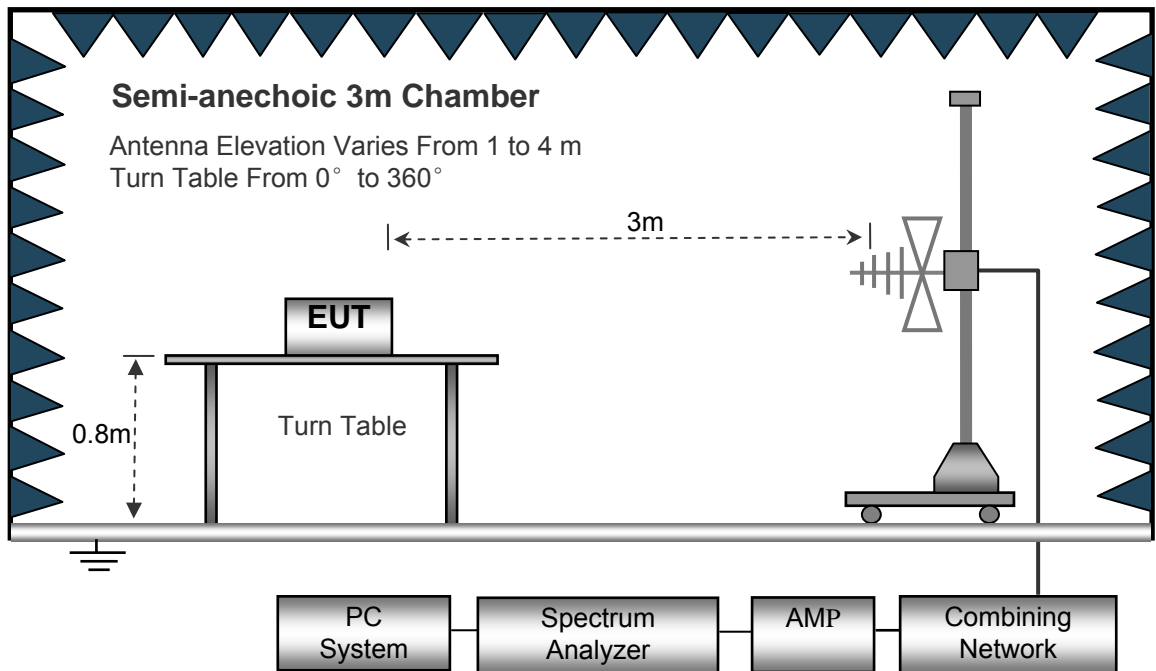

The test setup for emission measurement above 1 GHz.

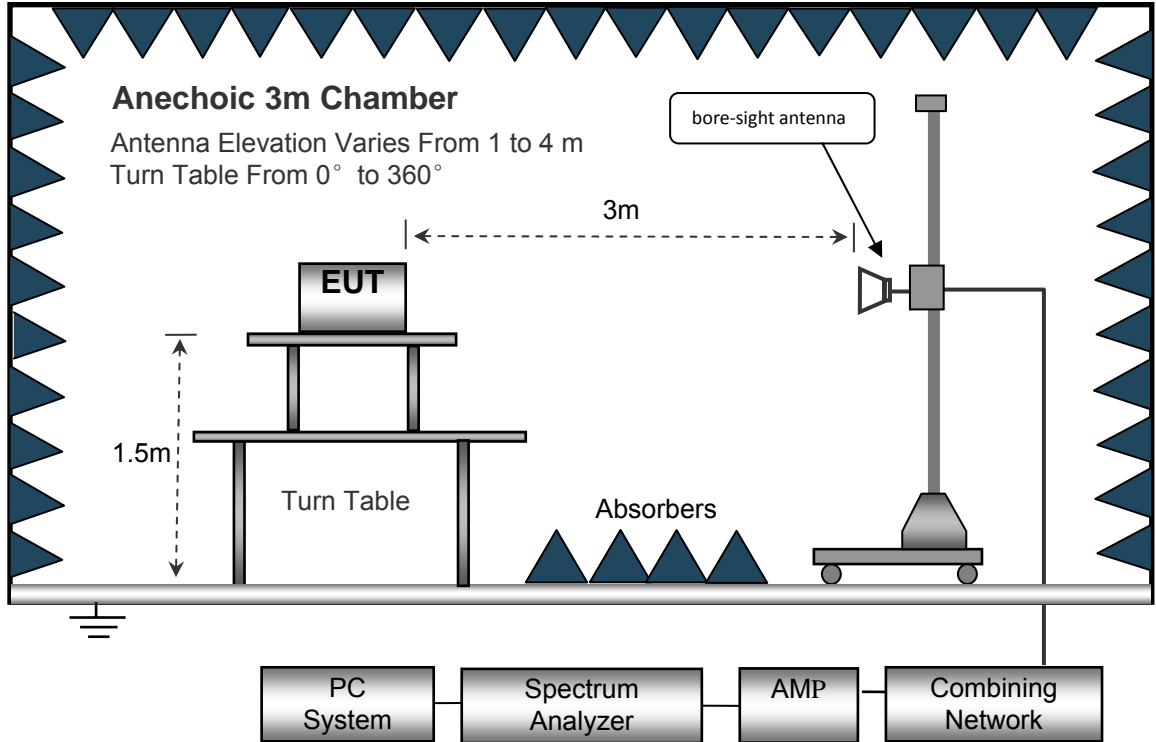

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used during radiated emissions above 1GHz measurement.

## 8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 8.6 Summary of Test Results

**Wifi:**

**Test Frequency: 9KHz~30MHz**

Remark: only the worst data (802.11b/g/n Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.021	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.730	25.85	QP	21.35	40.00	7.20	29.54	-22.34
25.680	24.63	QP	20.67	40.00	5.30	29.54	-24.24
802.11g							
6.021	25.23	QP	21.84	40.00	7.07	29.54	-22.47
15.730	25.46	QP	21.35	40.00	6.81	29.54	-22.73
25.680	24.85	QP	20.67	40.00	5.52	29.54	-24.02
802.11n(HT20)							
6.021	25.11	QP	21.84	40.00	6.95	29.54	-22.59
15.730	24.69	QP	21.35	40.00	6.04	29.54	-23.50
25.680	25.33	QP	20.67	40.00	6.00	29.54	-23.54
802.11n(HT40)							
6.021	25.17	QP	21.84	40.00	7.01	29.54	-22.53
15.730	25.29	QP	21.35	40.00	6.64	29.54	-22.90
25.680	25.81	QP	20.67	40.00	6.48	29.54	-23.06

**Test Frequency : 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	41.84	QP	337	1.7	H	-11.62	30.22	46.00	-15.78
223.45	37.44	QP	223	1.6	V	-11.62	25.82	46.00	-20.18
4824.00	50.40	PK	234	1.4	V	-1.06	49.34	74.00	-24.66
4824.00	46.99	Ave	234	1.4	V	-1.06	45.93	54.00	-8.07
7236.00	42.87	PK	97	2.0	H	1.33	44.20	74.00	-29.80
7236.00	41.68	Ave	97	2.0	H	1.33	43.01	54.00	-10.99
2310.66	46.90	PK	218	1.8	V	-13.19	33.71	74.00	-40.29
2310.66	38.15	Ave	218	1.8	V	-13.19	24.96	54.00	-29.04
2362.74	44.82	PK	269	1.4	H	-13.14	31.68	74.00	-42.32
2362.74	36.31	Ave	269	1.4	H	-13.14	23.17	54.00	-30.83
2494.60	42.56	PK	306	1.6	V	-13.08	29.48	74.00	-44.52
2494.60	38.25	Ave	306	1.6	V	-13.08	25.17	54.00	-28.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	41.96	QP	262	1.6	H	-11.62	30.34	46.00	-15.66
223.45	36.02	QP	164	1.9	V	-11.62	24.40	46.00	-21.60
4874.00	50.93	PK	148	1.9	V	-0.62	50.31	74.00	-23.69
4874.00	45.74	Ave	148	1.9	V	-0.62	45.12	54.00	-8.88
7311.00	43.95	PK	342	1.6	H	2.21	46.16	74.00	-27.84
7311.00	42.89	Ave	342	1.6	H	2.21	45.10	54.00	-8.90
2346.77	46.84	PK	193	1.9	V	-13.19	33.65	74.00	-40.35
2346.77	37.04	Ave	193	1.9	V	-13.19	23.85	54.00	-30.15
2363.43	44.87	PK	24	1.9	H	-13.14	31.73	74.00	-42.27
2363.43	36.14	Ave	24	1.9	H	-13.14	23.00	54.00	-31.00
2496.00	42.64	PK	300	1.9	V	-13.08	29.56	74.00	-44.44
2496.00	37.48	Ave	300	1.9	V	-13.08	24.40	54.00	-29.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	43.41	QP	6	1.8	H	-11.62	31.79	46.00	-14.21
223.45	35.67	QP	38	2.0	V	-11.62	24.05	46.00	-21.95
4924.00	50.71	PK	99	1.9	V	-0.24	50.47	74.00	-23.53
4924.00	45.31	Ave	99	1.9	V	-0.24	45.07	54.00	-8.93
7386.00	43.33	PK	337	1.6	H	2.84	46.17	74.00	-27.83
7386.00	43.39	Ave	337	1.6	H	2.84	46.23	54.00	-7.77
2342.22	46.97	PK	119	1.6	V	-13.19	33.78	74.00	-40.22
2342.22	37.29	Ave	119	1.6	V	-13.19	24.10	54.00	-29.90
2374.50	43.26	PK	258	1.9	H	-13.14	30.12	74.00	-43.88
2374.50	38.37	Ave	258	1.9	H	-13.14	25.23	54.00	-28.77
2487.86	43.04	PK	258	1.9	V	-13.08	29.96	74.00	-44.04
2487.86	38.15	Ave	258	1.9	V	-13.08	25.07	54.00	-28.93

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	44.26	QP	189	1.7	H	-11.62	32.64	46.00	-13.36
223.45	34.41	QP	127	2.0	V	-11.62	22.79	46.00	-23.21
4824.00	49.61	PK	25	1.3	V	-1.06	48.55	74.00	-25.45
4824.00	46.51	Ave	25	1.3	V	-1.06	45.45	54.00	-8.55
7236.00	42.31	PK	12	1.0	H	1.33	43.64	74.00	-30.36
7236.00	43.29	Ave	12	1.0	H	1.33	44.62	54.00	-9.38
2340.85	46.70	PK	109	1.4	V	-13.19	33.51	74.00	-40.49
2340.85	37.96	Ave	109	1.4	V	-13.19	24.77	54.00	-29.23
2379.46	43.25	PK	359	1.7	H	-13.14	30.11	74.00	-43.89
2379.46	36.28	Ave	359	1.7	H	-13.14	23.14	54.00	-30.86
2492.99	44.23	PK	350	1.3	V	-13.08	31.15	74.00	-42.85
2492.99	36.37	Ave	350	1.3	V	-13.08	23.29	54.00	-30.71



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	45.23	QP	312	1.3	H	-11.62	33.61	46.00	-12.39
223.45	34.76	QP	34	1.0	V	-11.62	23.14	46.00	-22.86
4874.00	48.67	PK	174	1.2	V	-0.62	48.05	74.00	-25.95
4874.00	47.94	Ave	174	1.2	V	-0.62	47.32	54.00	-6.68
7311.00	43.53	PK	3	1.2	H	2.21	45.74	74.00	-28.26
7311.00	42.61	Ave	3	1.2	H	2.21	44.82	54.00	-9.18
2332.04	46.12	PK	344	1.5	V	-13.19	32.93	74.00	-41.07
2332.04	38.52	Ave	344	1.5	V	-13.19	25.33	54.00	-28.67
2386.97	42.84	PK	97	1.2	H	-13.14	29.70	74.00	-44.30
2386.97	36.08	Ave	97	1.2	H	-13.14	22.94	54.00	-31.06
2486.97	44.62	PK	243	1.5	V	-13.08	31.54	74.00	-42.46
2486.97	37.94	Ave	243	1.5	V	-13.08	24.86	54.00	-29.14

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	45.75	QP	271	2.0	H	-11.62	34.13	46.00	-11.87
223.45	33.90	QP	295	1.6	V	-11.62	22.28	46.00	-23.72
4924.00	48.32	PK	131	1.6	V	-0.24	48.08	74.00	-25.92
4924.00	48.52	Ave	131	1.6	V	-0.24	48.28	54.00	-5.72
7386.00	44.41	PK	0	1.2	H	2.84	47.25	74.00	-26.75
7386.00	43.25	Ave	0	1.2	H	2.84	46.09	54.00	-7.91
2332.18	45.78	PK	146	1.5	V	-13.19	32.59	74.00	-41.41
2332.18	37.13	Ave	146	1.5	V	-13.19	23.94	54.00	-30.06
2378.86	44.59	PK	228	1.7	H	-13.14	31.45	74.00	-42.55
2378.86	38.91	Ave	228	1.7	H	-13.14	25.77	54.00	-28.23
2493.81	43.26	PK	163	1.4	V	-13.08	30.18	74.00	-43.82
2493.81	36.75	Ave	163	1.4	V	-13.08	23.67	54.00	-30.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: Low Channel 2412MHz									
223.45	46.44	QP	321	1.2	H	-11.62	34.82	46.00	-11.18
223.45	34.93	QP	230	1.3	V	-11.62	23.31	46.00	-22.69
4824.00	48.56	PK	145	1.8	V	-1.06	47.50	74.00	-26.50
4824.00	49.13	Ave	145	1.8	V	-1.06	48.07	54.00	-5.93
7236.00	45.48	PK	73	2.0	H	1.33	46.81	74.00	-27.19
7236.00	43.05	Ave	73	2.0	H	1.33	44.38	54.00	-9.62
2345.64	45.14	PK	357	1.7	V	-13.19	31.95	74.00	-42.05
2345.64	38.23	Ave	357	1.7	V	-13.19	25.04	54.00	-28.96
2386.86	44.08	PK	225	1.2	H	-13.14	30.94	74.00	-43.06
2386.86	37.21	Ave	225	1.2	H	-13.14	24.07	54.00	-29.93
2487.52	42.23	PK	111	1.6	V	-13.08	29.15	74.00	-44.85
2487.52	38.90	Ave	111	1.6	V	-13.08	25.82	54.00	-28.18

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n20: Middle Channel 2437MHz									
223.45	46.39	QP	31	1.3	H	-11.62	34.77	46.00	-11.23
223.45	36.39	QP	197	1.2	V	-11.62	24.77	46.00	-21.23
4874.00	48.72	PK	116	1.5	V	-0.62	48.10	74.00	-25.90
4874.00	48.77	Ave	116	1.5	V	-0.62	48.15	54.00	-5.85
7311.00	44.17	PK	47	1.8	H	2.21	46.38	74.00	-27.62
7311.00	41.98	Ave	47	1.8	H	2.21	44.19	54.00	-9.81
2322.65	45.77	PK	333	1.2	V	-13.19	32.58	74.00	-41.42
2322.65	39.23	Ave	333	1.2	V	-13.19	26.04	54.00	-27.96
2365.92	42.21	PK	266	1.2	H	-13.14	29.07	74.00	-44.93
2365.92	37.58	Ave	266	1.2	H	-13.14	24.44	54.00	-29.56
2496.03	42.35	PK	289	1.3	V	-13.08	29.27	74.00	-44.73
2496.03	36.79	Ave	289	1.3	V	-13.08	23.71	54.00	-30.29

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n20: High Channel 2462MHz									
223.45	46.39	QP	277	1.9	H	-11.62	34.77	46.00	-11.23
223.45	35.61	QP	252	1.2	V	-11.62	23.99	46.00	-22.01
4924.00	48.48	PK	0	1.0	V	-0.24	48.24	74.00	-25.76
4924.00	48.98	Ave	0	1.0	V	-0.24	48.74	54.00	-5.26
7386.00	44.78	PK	128	1.7	H	2.84	47.62	74.00	-26.38
7386.00	41.90	Ave	128	1.7	H	2.84	44.74	54.00	-9.26
2312.86	45.81	PK	10	1.5	V	-13.19	32.62	74.00	-41.38
2312.86	38.08	Ave	10	1.5	V	-13.19	24.89	54.00	-29.11
2378.51	44.65	PK	16	1.6	H	-13.14	31.51	74.00	-42.49
2378.51	38.85	Ave	16	1.6	H	-13.14	25.71	54.00	-28.29
2490.34	44.94	PK	60	1.7	V	-13.08	31.86	74.00	-42.14
2490.34	36.78	Ave	60	1.7	V	-13.08	23.70	54.00	-30.30

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Low Channel 2422MHz									
223.45	47.87	QP	250	1.7	H	-11.62	36.25	46.00	-9.75
223.45	36.17	QP	115	1.5	V	-11.62	24.55	46.00	-21.45
4844.00	46.25	PK	225	1.9	V	-1.06	45.19	74.00	-28.81
4844.00	47.51	Ave	225	1.9	V	-1.06	46.45	54.00	-7.55
7266.00	43.65	PK	277	1.4	H	1.33	44.98	74.00	-29.02
7266.00	39.09	Ave	277	1.4	H	1.33	40.42	54.00	-13.58
2326.85	45.89	PK	77	1.3	V	-13.19	32.70	74.00	-41.30
2326.85	37.54	Ave	77	1.3	V	-13.19	24.35	54.00	-29.65
2375.89	42.14	PK	196	1.1	H	-13.14	29.00	74.00	-45.00
2375.89	38.48	Ave	196	1.1	H	-13.14	25.34	54.00	-28.66
2486.02	45.00	PK	3	1.4	V	-13.08	31.92	74.00	-42.08
2486.02	38.87	Ave	3	1.4	V	-13.08	25.79	54.00	-28.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: Middle Channel 2437MHz									
223.45	48.45	QP	152	1.1	H	-11.62	36.83	46.00	-9.17
223.45	36.45	QP	347	1.9	V	-11.62	24.83	46.00	-21.17
4874.00	46.37	PK	6	1.9	V	-0.62	45.75	74.00	-28.25
4874.00	48.13	Ave	6	1.9	V	-0.62	47.51	54.00	-6.49
7311.00	43.04	PK	79	1.5	H	2.21	45.25	74.00	-28.75
7311.00	39.08	Ave	79	1.5	H	2.21	41.29	54.00	-12.71
2333.11	46.45	PK	139	1.5	V	-13.19	33.26	74.00	-40.74
2333.11	37.40	Ave	139	1.5	V	-13.19	24.21	54.00	-29.79
2385.79	43.59	PK	257	1.1	H	-13.14	30.45	74.00	-43.55
2385.79	37.37	Ave	257	1.1	H	-13.14	24.23	54.00	-29.77
2496.42	42.49	PK	83	1.2	V	-13.08	29.41	74.00	-44.59
2496.42	37.86	Ave	83	1.2	V	-13.08	24.78	54.00	-29.22

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
11n40: High Channel 2452MHz									
223.45	48.56	QP	218	1.5	H	-11.62	36.94	46.00	-9.06
223.45	35.92	QP	63	1.5	V	-11.62	24.30	46.00	-21.70
4904.00	47.29	PK	258	1.3	V	-0.24	47.05	74.00	-26.95
4904.00	47.13	Ave	258	1.3	V	-0.24	46.89	54.00	-7.11
7356.00	42.29	PK	272	2.0	H	2.84	45.13	74.00	-28.87
7356.00	39.43	Ave	272	2.0	H	2.84	42.27	54.00	-11.73
2341.29	46.03	PK	90	1.1	V	-13.19	32.84	74.00	-41.16
2341.29	37.57	Ave	90	1.1	V	-13.19	24.38	54.00	-29.62
2371.91	42.43	PK	76	1.4	H	-13.14	29.29	74.00	-44.71
2371.91	37.69	Ave	76	1.4	H	-13.14	24.55	54.00	-29.45
2486.07	43.92	PK	212	1.2	V	-13.08	30.84	74.00	-43.16
2486.07	38.39	Ave	212	1.2	V	-13.08	25.31	54.00	-28.69

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.



**BT BLE:****Test Frequency: 9KHz~26MHz**

Remark: only the worst data (GFSK modulation Low channel mode) were recorded.

Frequency	Measurement results dB $\mu$ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB $\mu$ V/m @30m	Limits dB $\mu$ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.025	25.40	QP	21.84	40.00	7.24	29.54	-22.30
15.730	25.62	QP	21.35	40.00	6.97	29.54	-22.57
25.680	24.87	QP	20.67	40.00	5.54	29.54	-24.00

**Test Frequency : 26MHz ~ 30MHz**

The measurements were more than 20 dB below the limit and not reported.

**Test Frequency : 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
223.45	40.52	QP	226	1.7	H	-11.62	28.90	46.00	-17.10
223.45	39.09	QP	149	2.0	V	-11.62	27.47	46.00	-18.53
4824.00	50.59	PK	298	1.4	V	-1.06	49.53	74.00	-24.47
4824.00	48.21	Ave	298	1.4	V	-1.06	47.15	54.00	-6.85
7236.00	42.54	PK	142	1.0	H	1.33	43.87	74.00	-30.13
7236.00	42.93	Ave	142	1.0	H	1.33	44.26	54.00	-9.74
2343.10	46.36	PK	9	1.9	V	-13.19	33.17	74.00	-40.83
2343.10	38.11	Ave	9	1.9	V	-13.19	24.92	54.00	-29.08
2370.33	43.24	PK	8	1.6	H	-13.14	30.10	74.00	-43.90
2370.33	37.61	Ave	8	1.6	H	-13.14	24.47	54.00	-29.53
2487.26	44.63	PK	313	1.2	V	-13.08	31.55	74.00	-42.45
2487.26	38.70	Ave	313	1.2	V	-13.08	25.62	54.00	-28.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2440MHz									
223.45	40.72	QP	134	1.5	H	-11.62	29.10	46.00	-16.90
223.45	39.43	QP	33	2.0	V	-11.62	27.81	46.00	-18.19
4874.00	50.94	PK	318	1.9	V	-0.62	50.32	74.00	-23.68
4874.00	49.58	Ave	318	1.9	V	-0.62	48.96	54.00	-5.04
7311.00	42.47	PK	341	1.7	H	2.21	44.68	74.00	-29.32
7311.00	43.55	Ave	341	1.7	H	2.21	45.76	54.00	-8.24
2343.79	45.34	PK	296	1.5	V	-13.19	32.15	74.00	-41.85
2343.79	38.45	Ave	296	1.5	V	-13.19	25.26	54.00	-28.74
2389.59	42.41	PK	60	1.0	H	-13.14	29.27	74.00	-44.73
2389.59	36.73	Ave	60	1.0	H	-13.14	23.59	54.00	-30.41
2492.15	44.10	PK	309	1.5	V	-13.08	31.02	74.00	-42.98
2492.15	37.54	Ave	309	1.5	V	-13.08	24.46	54.00	-29.54

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
223.45	41.14	QP	129	1.0	H	-11.62	29.52	46.00	-16.48
223.45	40.50	QP	357	1.7	V	-11.62	28.88	46.00	-17.12
4924.00	51.67	PK	344	1.5	V	-0.24	51.43	74.00	-22.57
4924.00	48.37	Ave	344	1.5	V	-0.24	48.13	54.00	-5.87
7386.00	42.50	PK	26	1.7	H	2.84	45.34	74.00	-28.66
7386.00	44.33	Ave	26	1.7	H	2.84	47.17	54.00	-6.83
2323.90	45.71	PK	229	1.3	V	-13.19	32.52	74.00	-41.48
2323.90	37.75	Ave	229	1.3	V	-13.19	24.56	54.00	-29.44
2373.66	42.15	PK	222	1.7	H	-13.14	29.01	74.00	-44.99
2373.66	36.46	Ave	222	1.7	H	-13.14	23.32	54.00	-30.68
2498.35	44.98	PK	209	1.0	V	-13.08	31.90	74.00	-42.10
2498.35	38.65	Ave	209	1.0	V	-13.08	25.57	54.00	-28.43

**Test Frequency: 8GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - a) Set instrument center frequency to DTS channel center frequency.
  - b) Set the span to  $\approx 1.5$  times the DTS bandwidth.
  - c) Set the RBW = 100 kHz.
  - d) Set the VBW  $\approx [3 \times \text{RBW}]$ .
  - e) Detector = peak.
  - f) Sweep time = auto couple.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

### 9.2 Test Result

#### 9KHz – 30MHz


802.11b

#### Low Channel

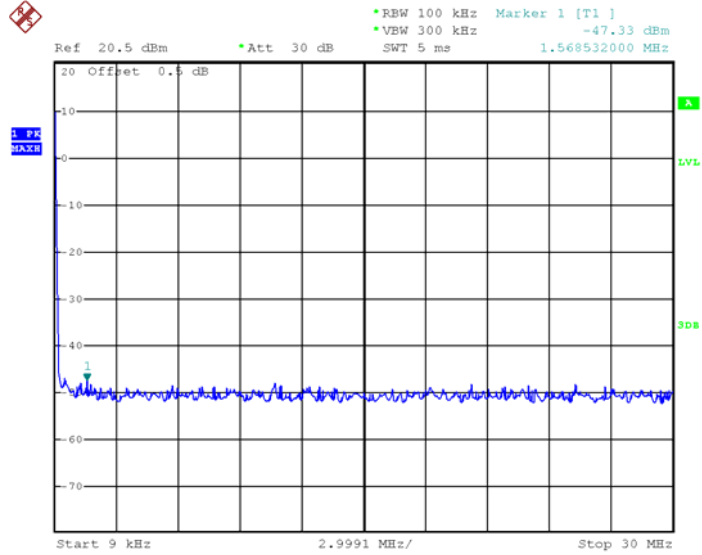


Date: 14.APR.2020 01:36:08

#### Middle Channel

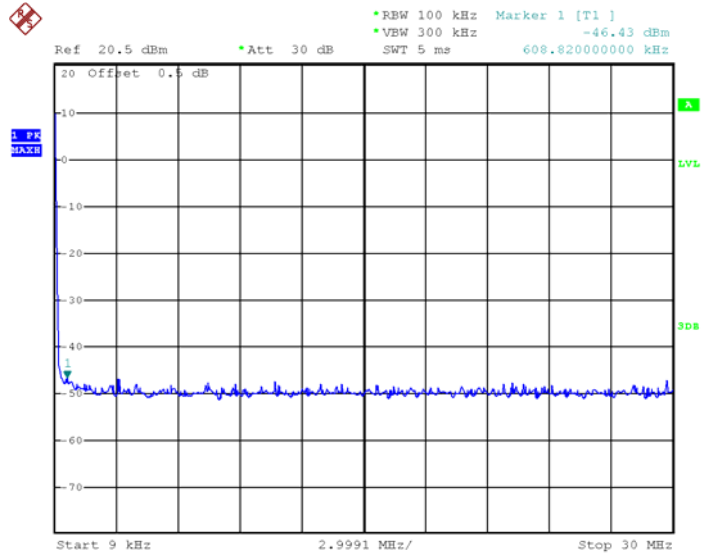

Date: 14.APR.2020 01:36:30


### High Channel

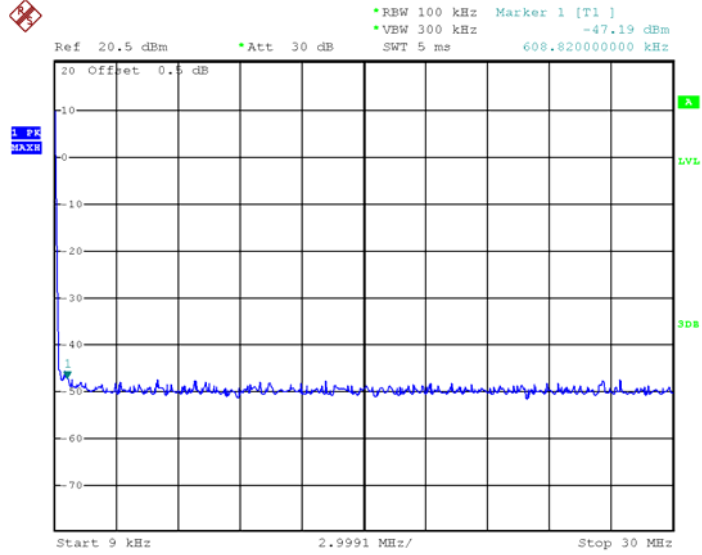


Date: 14.APR.2020 01:36:48

### 802.11g


#### Low Channel

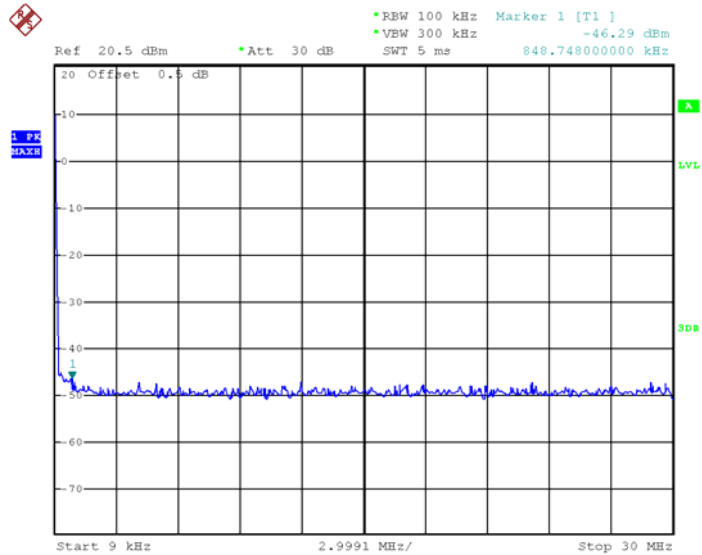

Date: 14.APR.2020 01:37:24

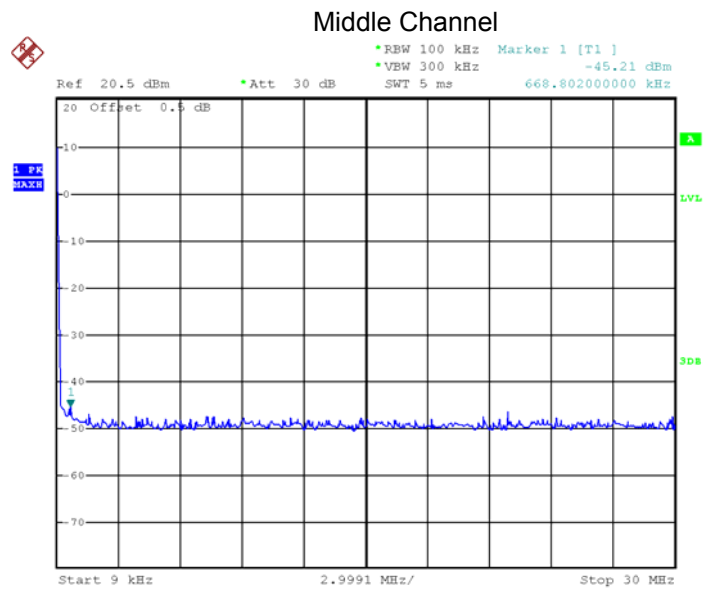


Date: 14.APR.2020 01:38:05

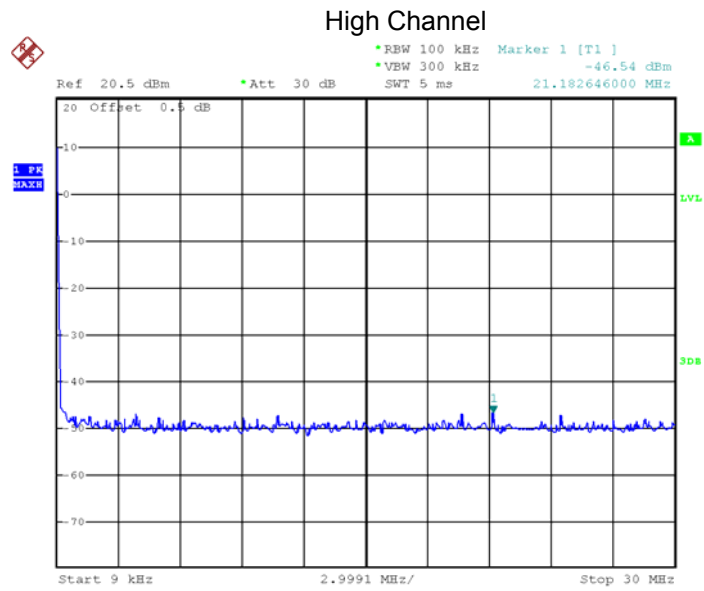

Date: 14.APR.2020 01:38:29


### 802.11n HT20

#### Low Channel

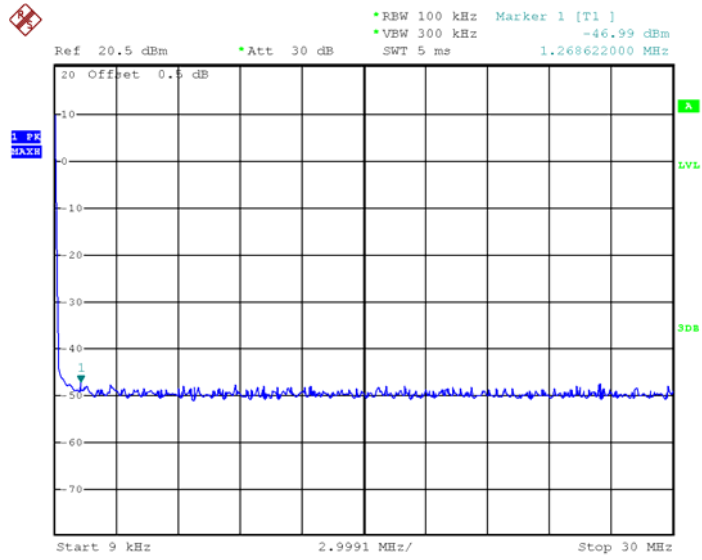

Date: 14.APR.2020 01:38:52


#### Middle Channel

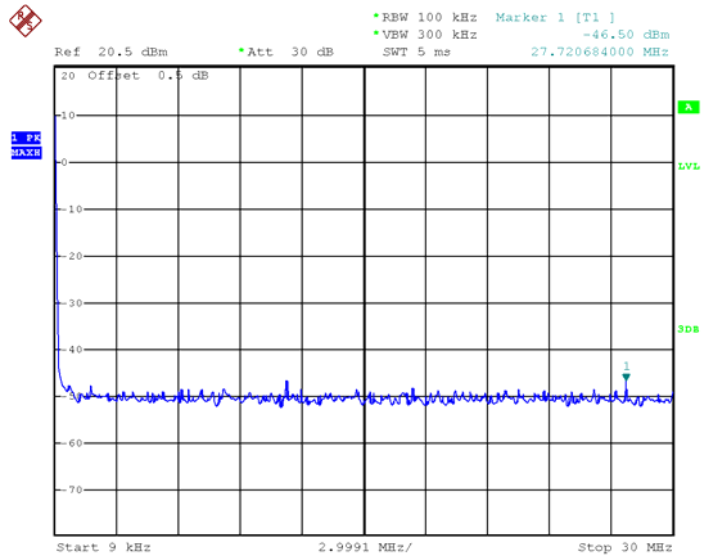

Date: 14.APR.2020 01:39:03




### High Channel

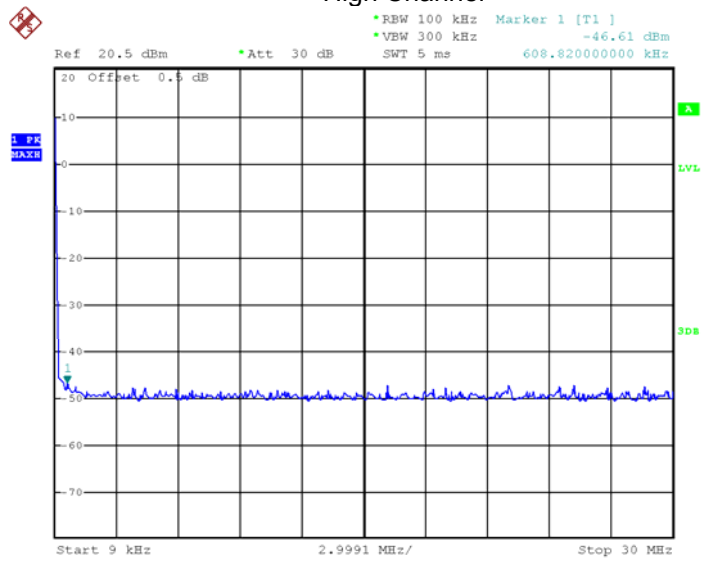


Date: 14.APR.2020 01:39:32

### 802.11n HT40


#### Low Channel

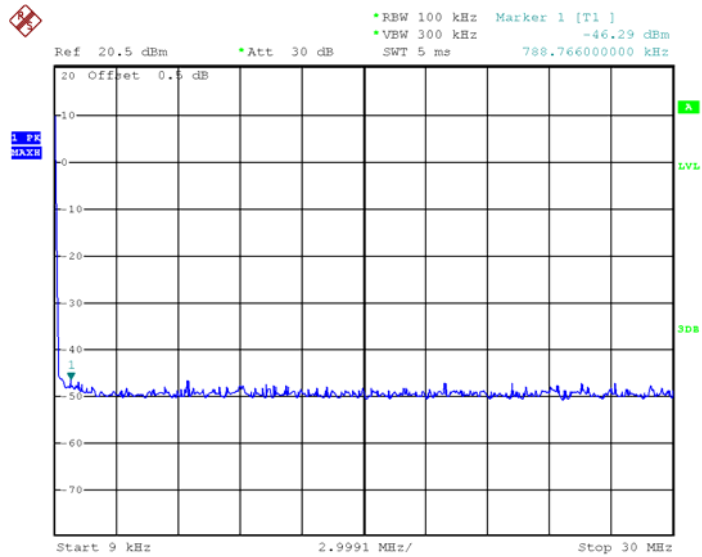

Date: 14.APR.2020 01:40:00

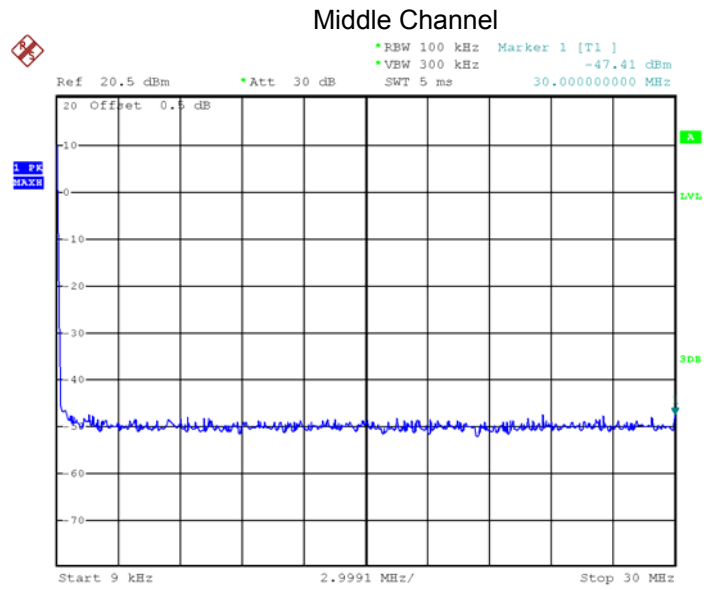


Date: 14.APR.2020 01:40:16

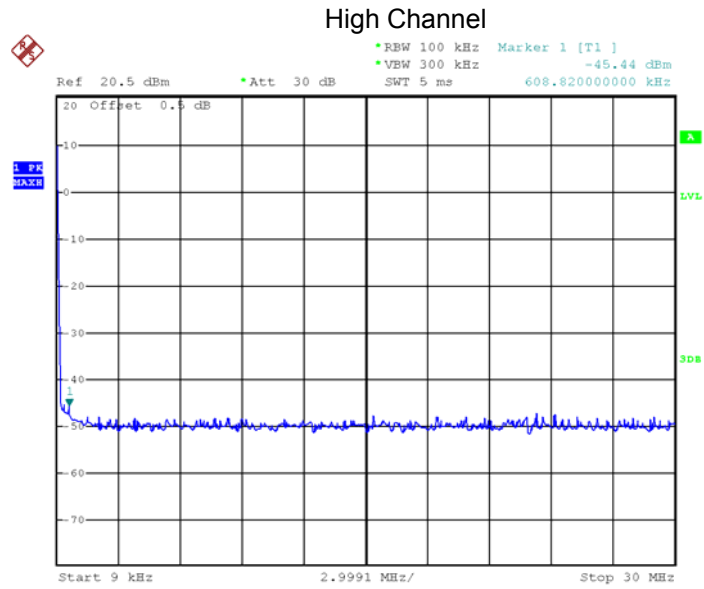


Date: 14.APR.2020 01:40:43

### BLE Low Channel

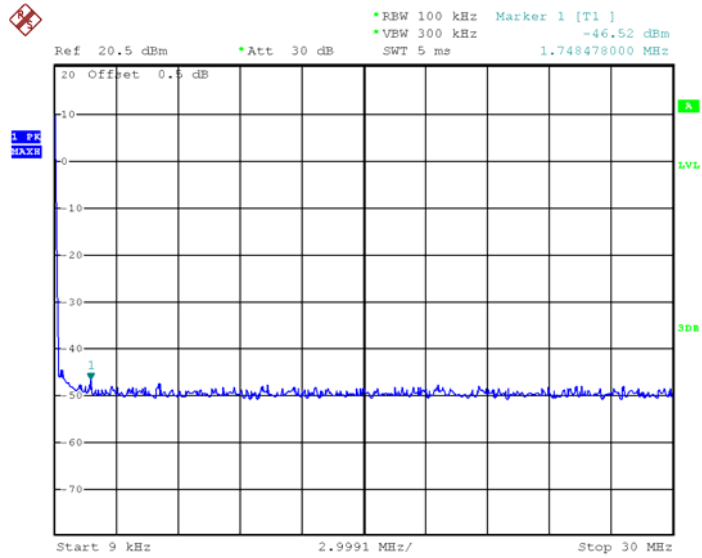


Date: 14.APR.2020 01:35:40

### Middle Channel

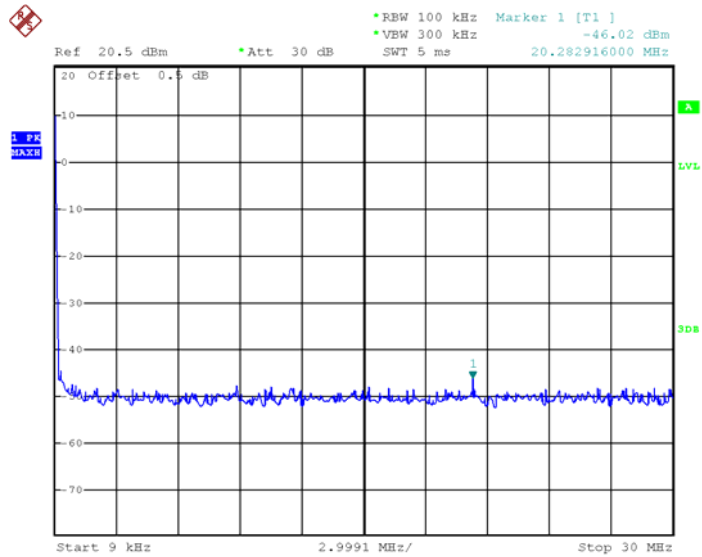

Date: 14.APR.2020 01:35:50

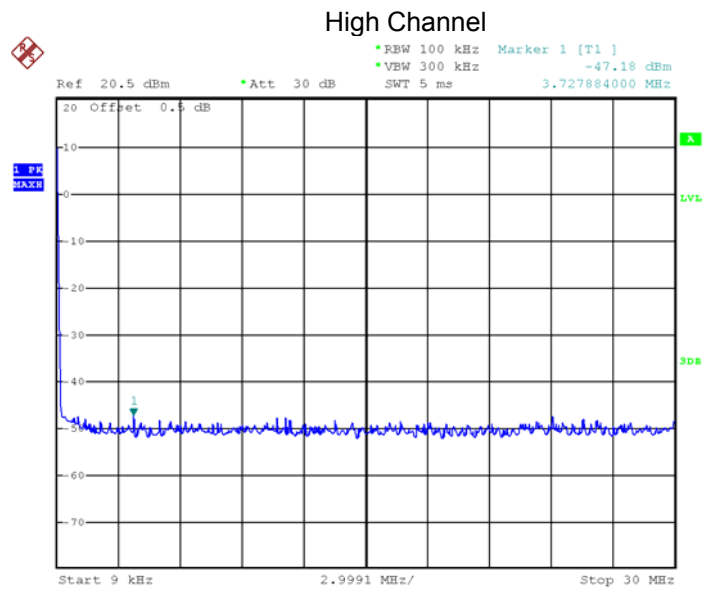


Date: 14.APR.2020 01:36:00

### Above 30MHz

802.11b

Low Channel


Fundamental

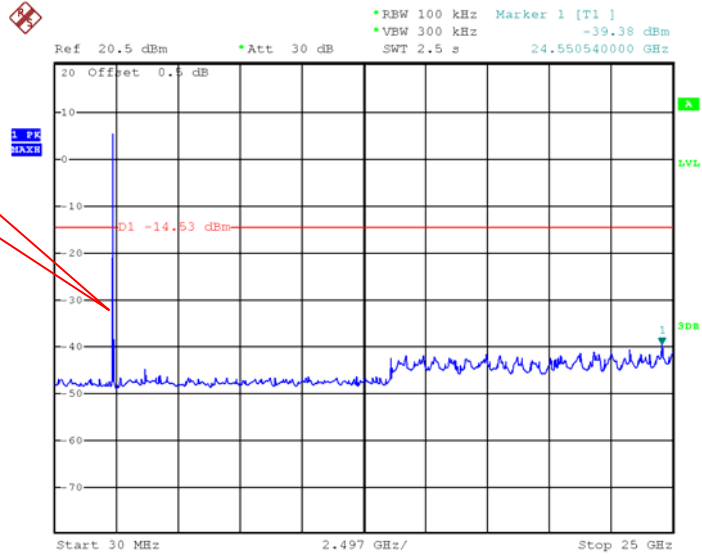

Date: 14.APR.2020 04:22:49

### Middle Channel


Fundamental

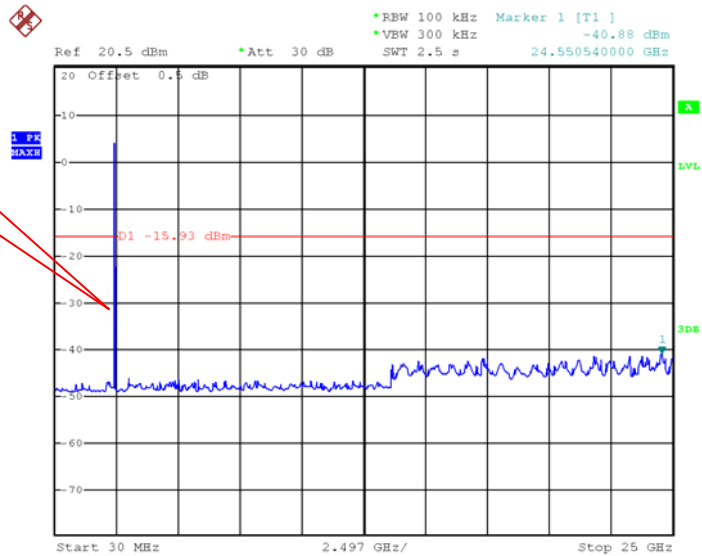

Date: 14.APR.2020 04:21:09

### High Channel

Fundamental

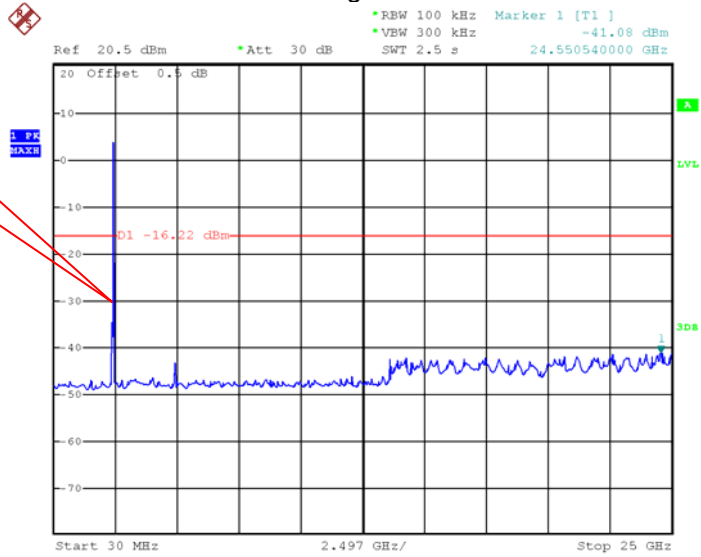


Date: 14.APR.2020 04:20:22

### 802.11g


### Low Channel

Fundamental

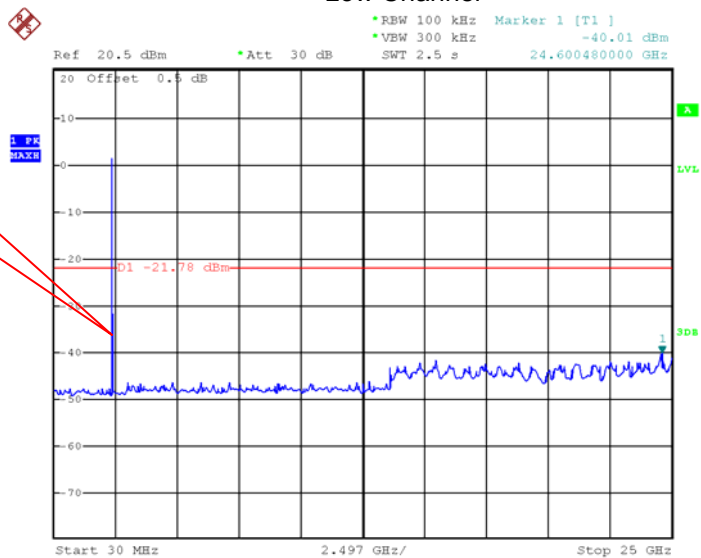

Date: 14.APR.2020 04:23:47


### Middle Channel

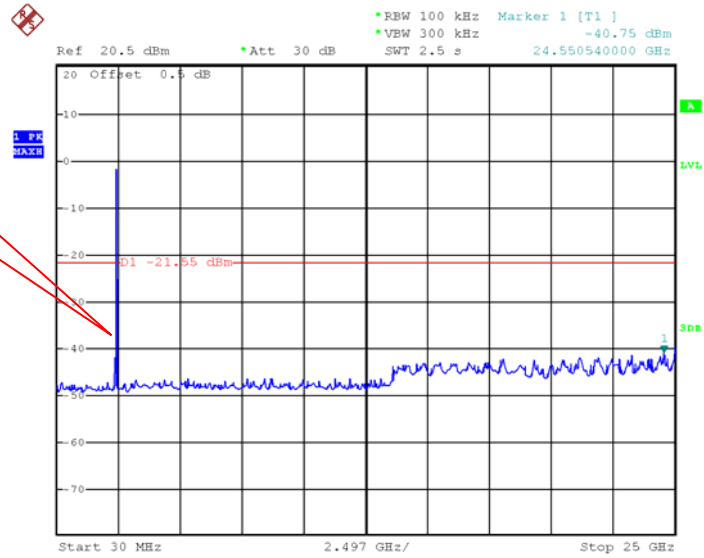

Fundamental

Date: 14.APR.2020 04:24:36

### High Channel

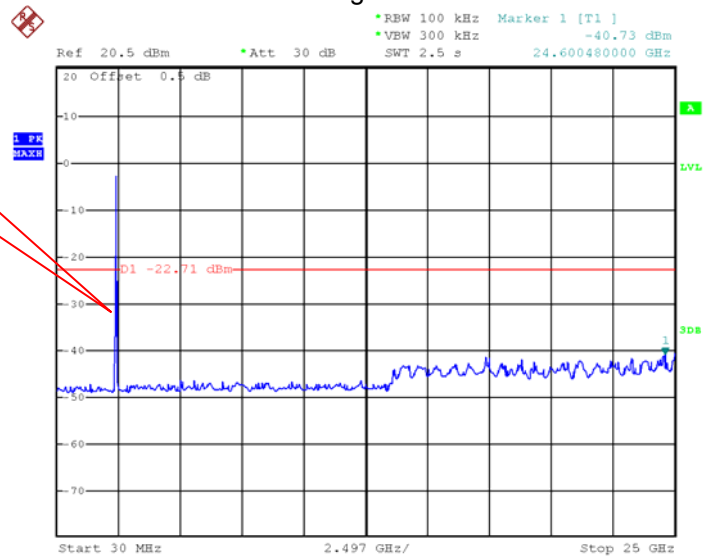


Fundamental

Date: 14.APR.2020 04:25:25


### 802.11n HT20

#### Low Channel

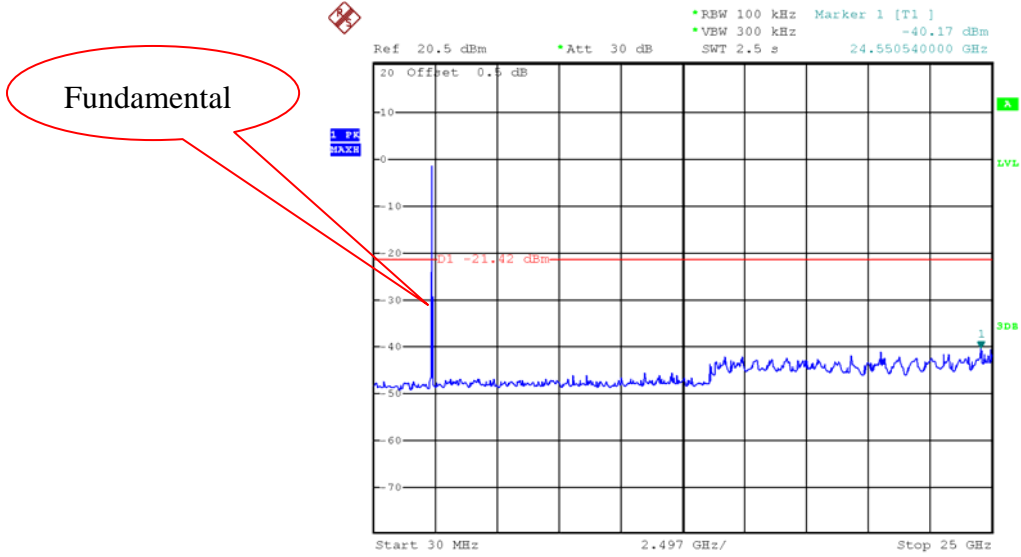

Date: 14.APR.2020 04:28:57


#### Middle Channel

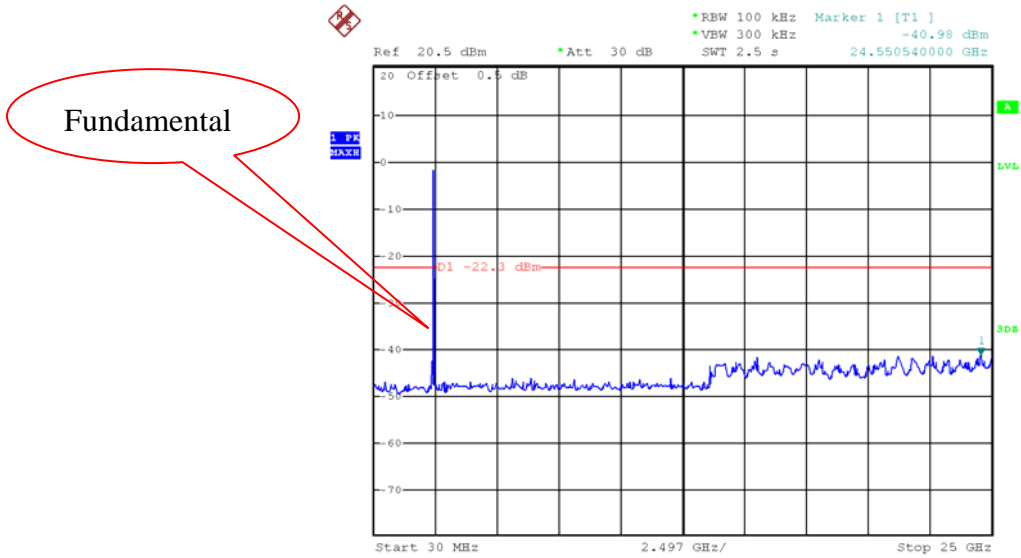

Date: 14.APR.2020 04:28:03



### High Channel

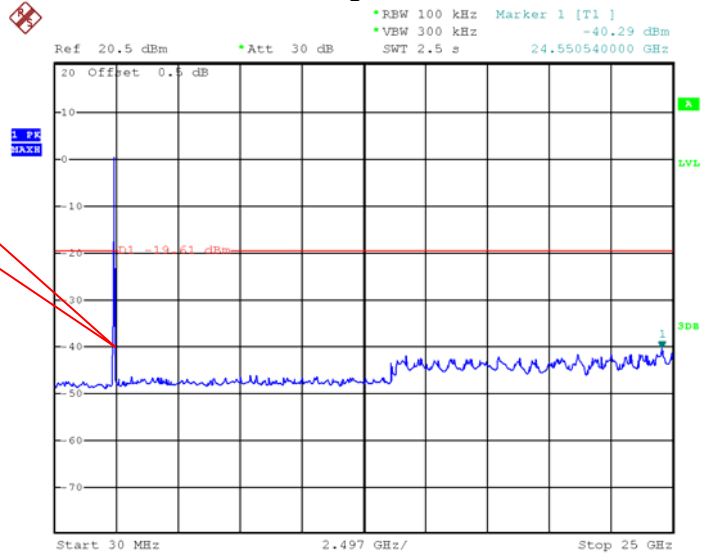


Fundamental

Date: 14.APR.2020 04:27:12

### 802.11n HT40

#### Low Channel

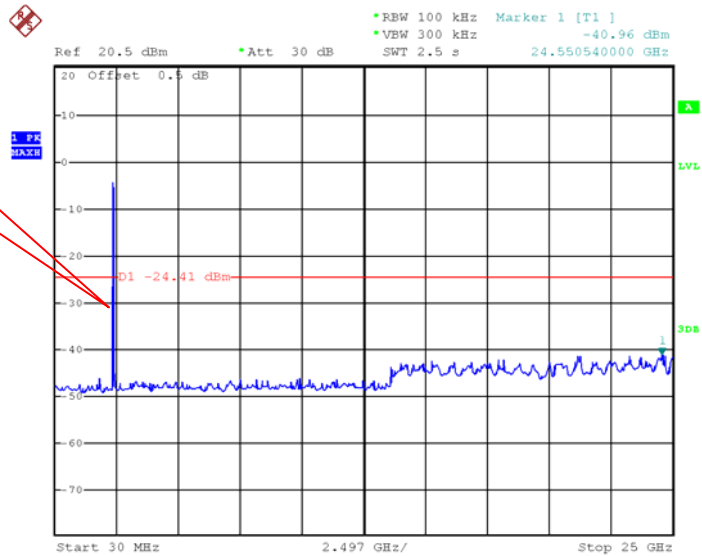


Fundamental

Date: 14.APR.2020 04:29:57

### Middle Channel


Fundamental

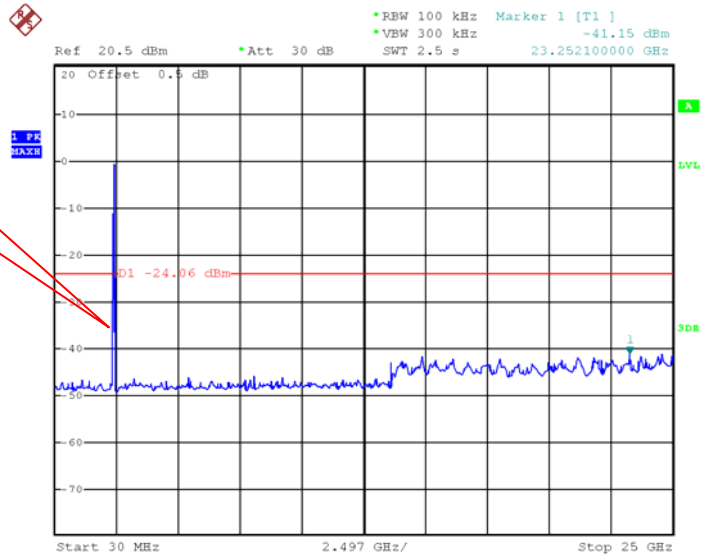

Date: 14.APR.2020 04:30:48

### High Channel


Fundamental

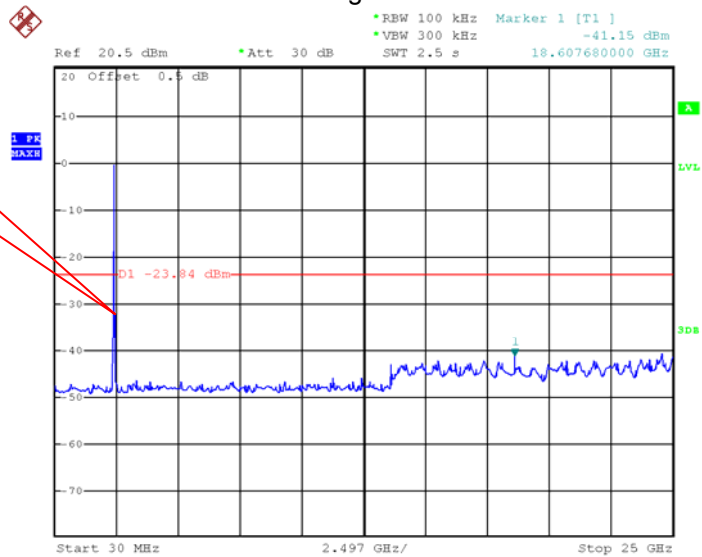

Date: 14.APR.2020 04:31:40

### BLE Low Channel


Fundamental

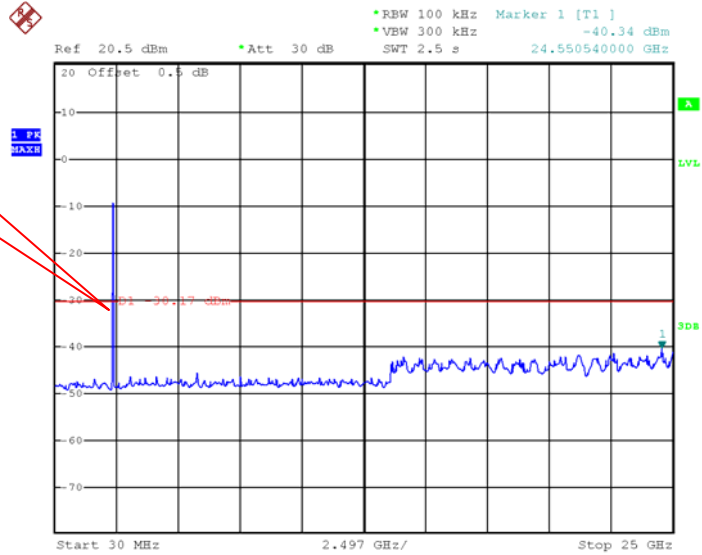

Date: 14.APR.2020 04:33:33

### Middle Channel


Fundamental

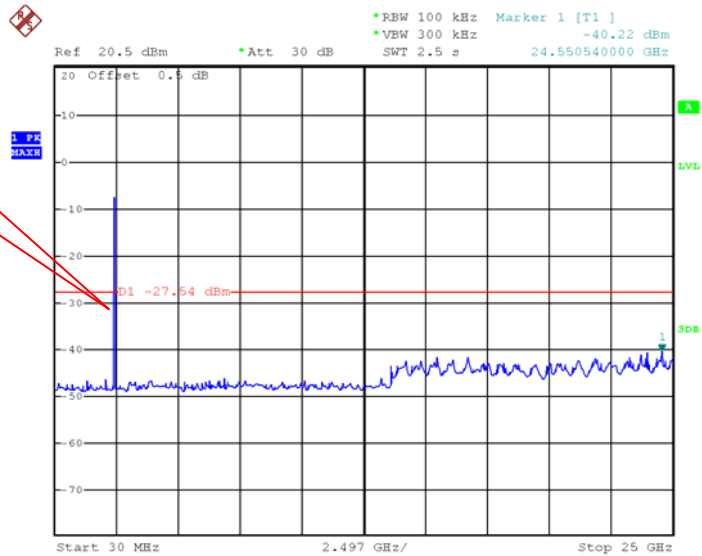

Date: 14.APR.2020 04:34:35

### High Channel

Fundamental

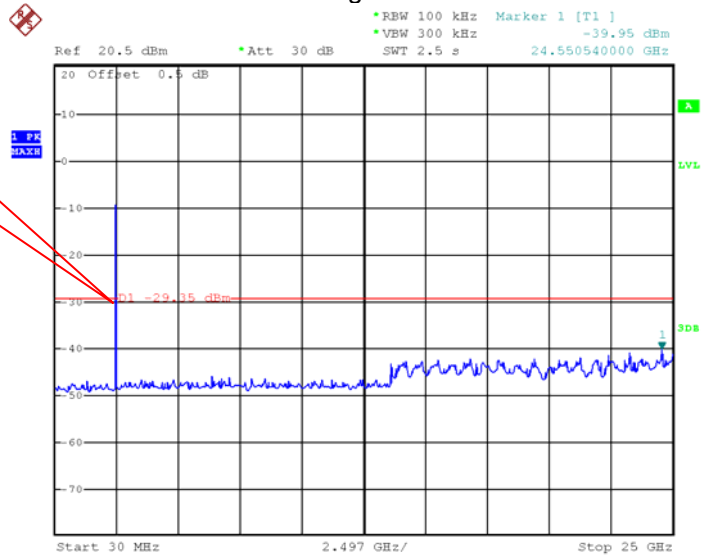

Date: 14.APR.2020 04:35:29

## 10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


Test Mode: Transmitting

### 10.1 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 10.2 Test Result

Test result plots shown as follows:

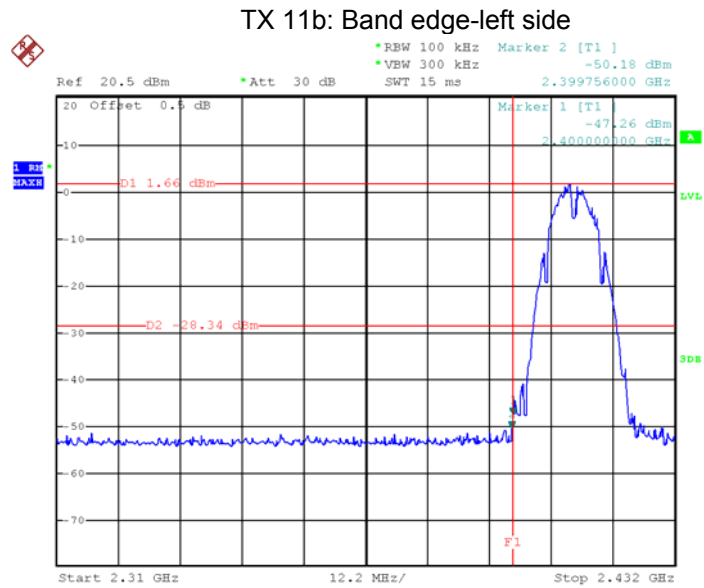


Date: 13.APR.2020 04:27:25

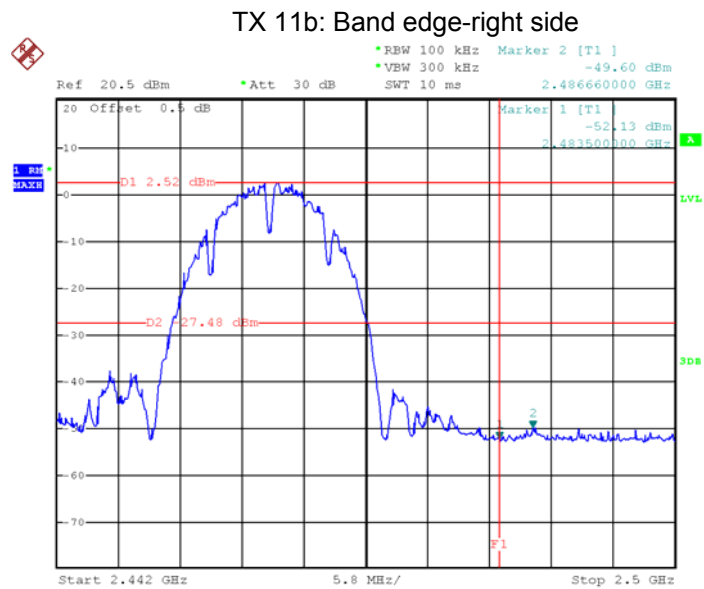


Date: 13.APR.2020 04:29:18

### TX 11g: Band edge-left side

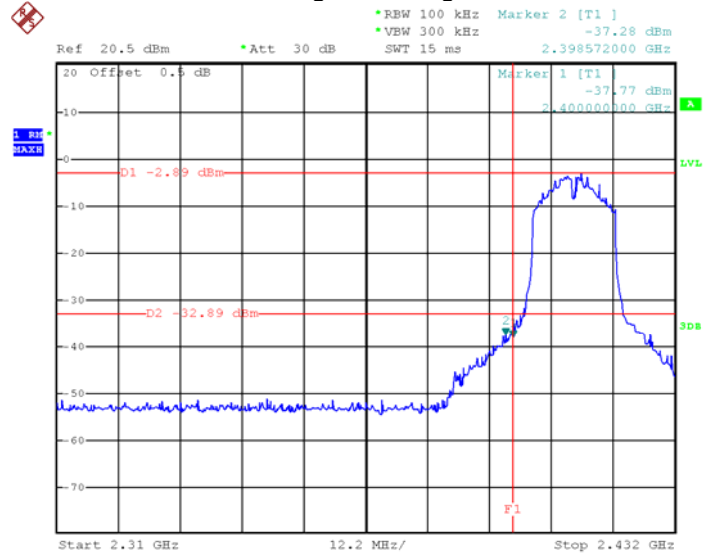


Date: 13.APR.2020 04:26:18

### TX 11g: Band edge-right side

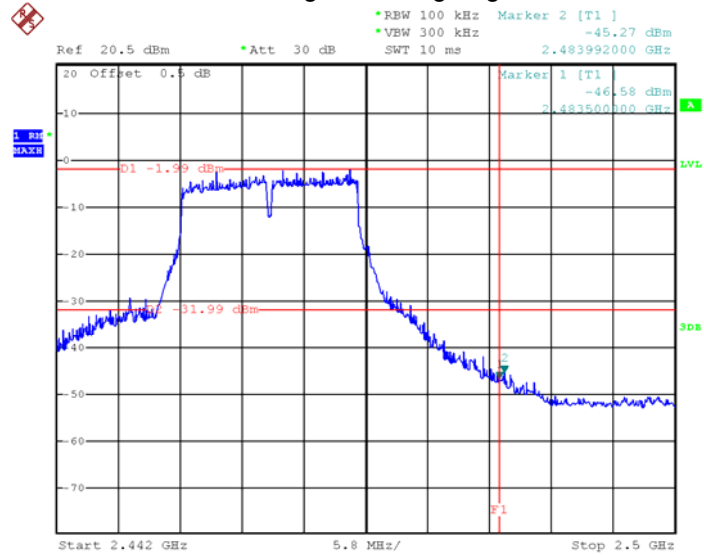


Date: 13.APR.2020 04:31:58

### TX 11n HT20: Band edge-left side

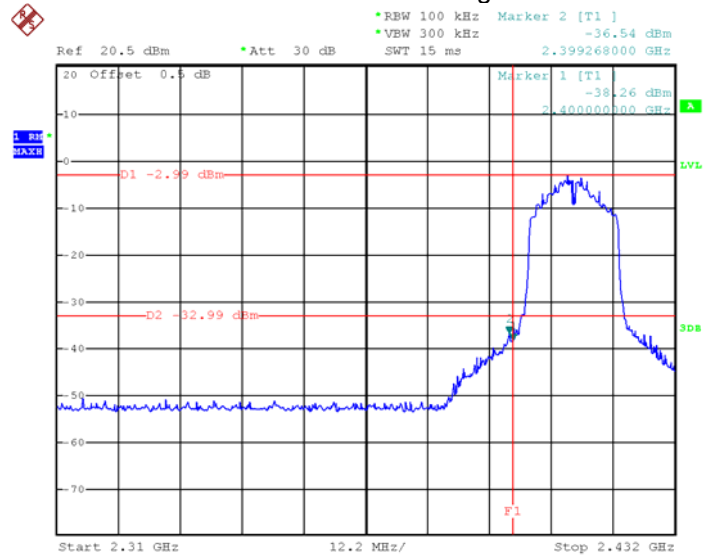

Date: 13.APR.2020 04:22:34


### TX 11n HT20: Band edge-right side

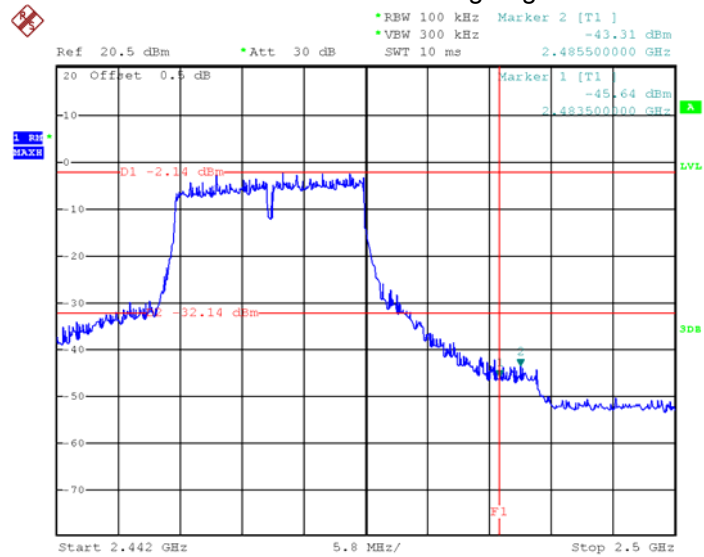

Date: 13.APR.2020 04:34:17




### TX 11n HT40: Band edge-left side

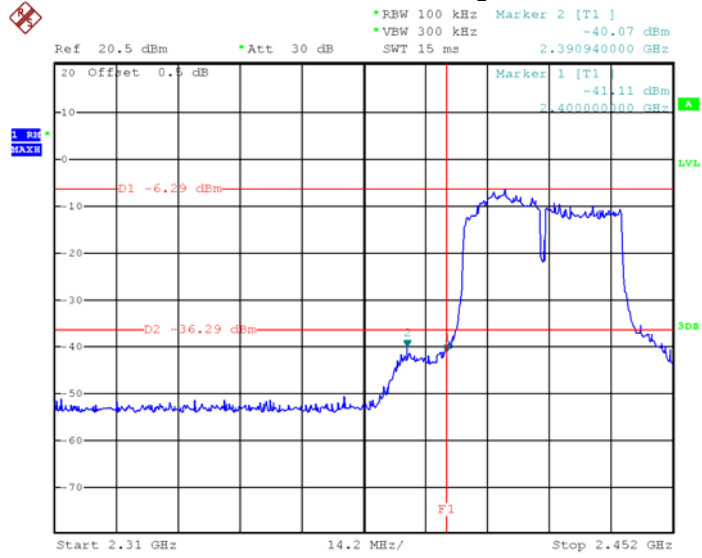


Date: 13.APR.2020 04:15:17

### TX 11n HT40: Band edge-right side

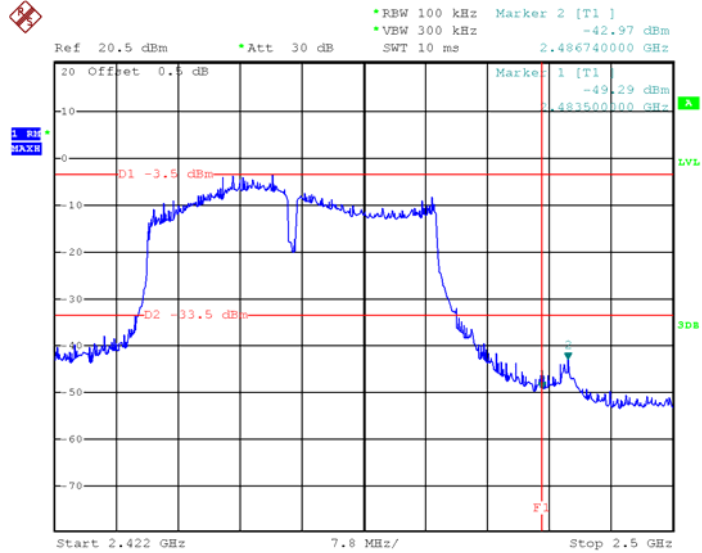


Date: 13.APR.2020 04:14:11

### BLE: Band edge-left side

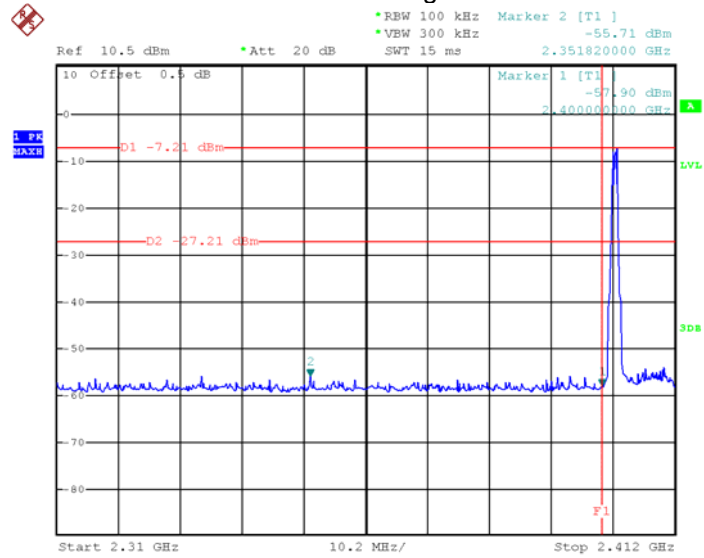

Date: 13.APR.2020 01:04:52

### BLE: Band edge-right side

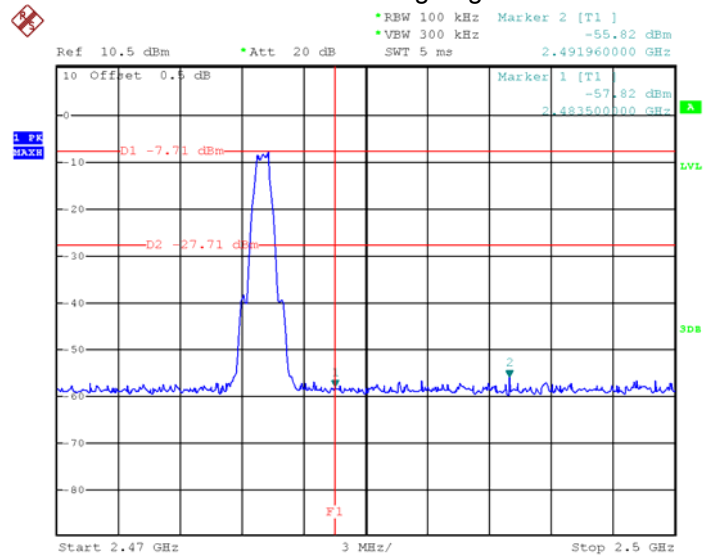

Date: 13.APR.2020 01:03:20

## 11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013


### 11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


### 11.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	7.524	12.160
	Channel 6	8.080	12.920
	Channel 11	9.488	13.650
TX 11g	Channel 1	15.050	16.200
	Channel 6	15.750	16.450
	Channel 11	16.450	16.700
TX 11n HT20	Channel 1	15.028	17.316
	Channel 6	15.028	17.316
	Channel 11	17.658	17.874
TX 11n HT40	Channel 3	35.316	36.072
	Channel 6	33.912	35.748
	Channel 9	32.616	35.856
BLE	Channel 0	0.684	1.062
	Channel 19	0.672	1.062
	Channel 39	0.684	1.062

Test result plot:

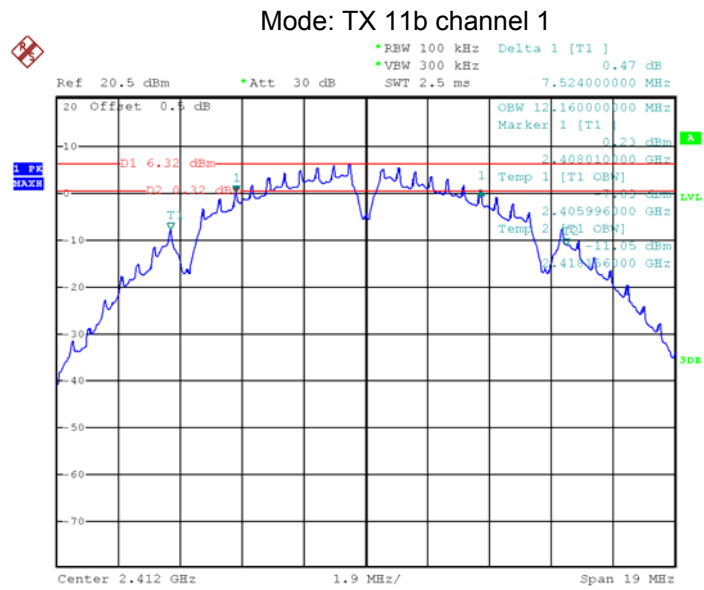


Date: 13.APR.2020 01:25:26

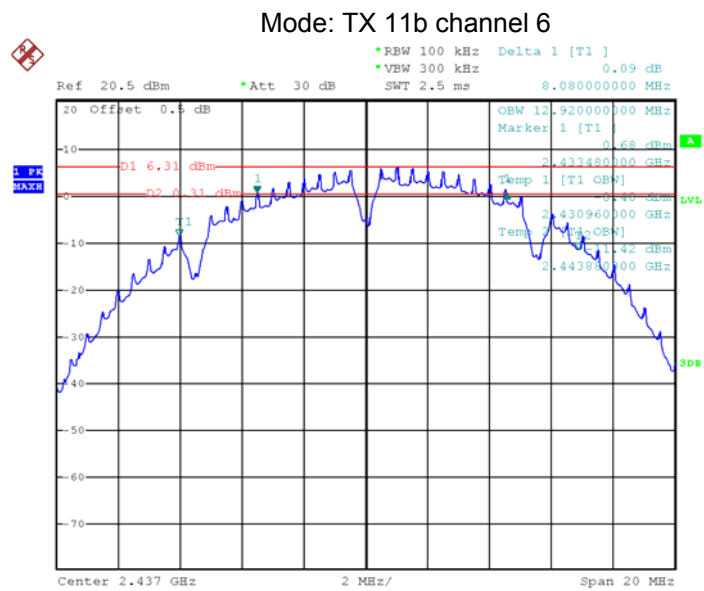


Date: 13.APR.2020 01:35:06

### Mode: TX 11b channel 11

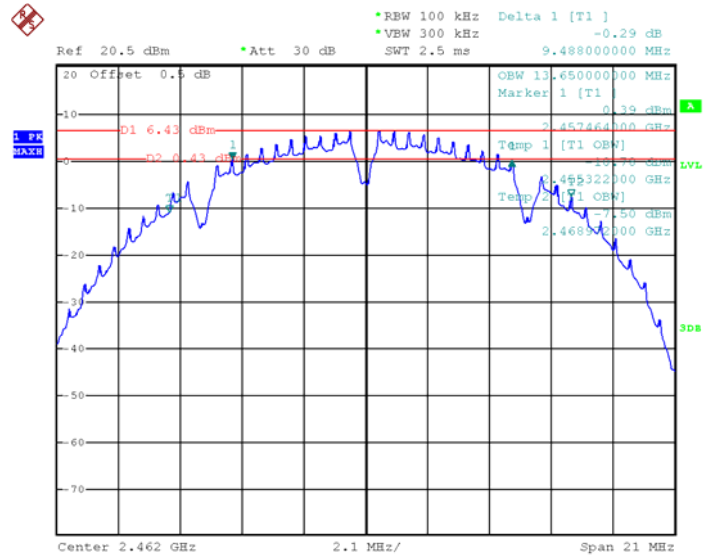


Date: 13.APR.2020 01:37:56

### Mode: TX 11g channel 1

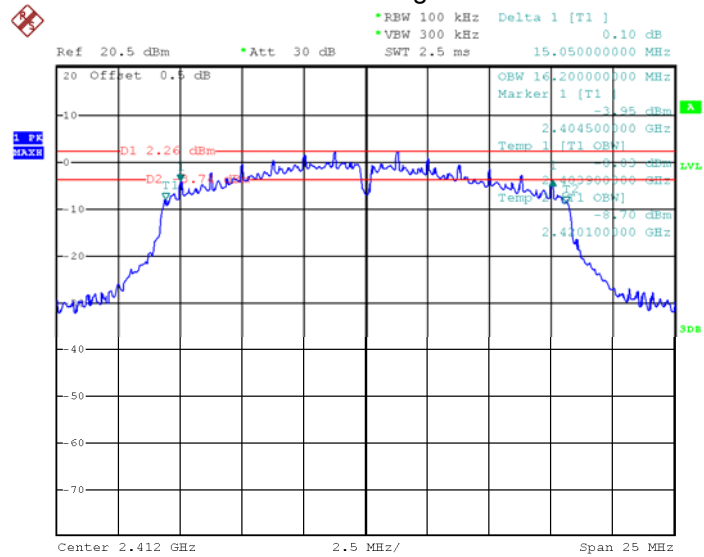


Date: 13.APR.2020 01:50:55

### Mode: TX 11g channel 6

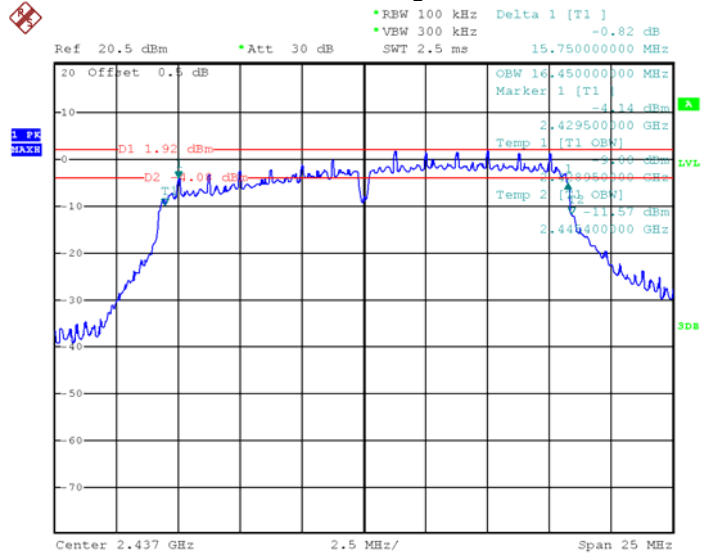


Date: 13.APR.2020 01:45:55

### Mode: TX 11g channel 11

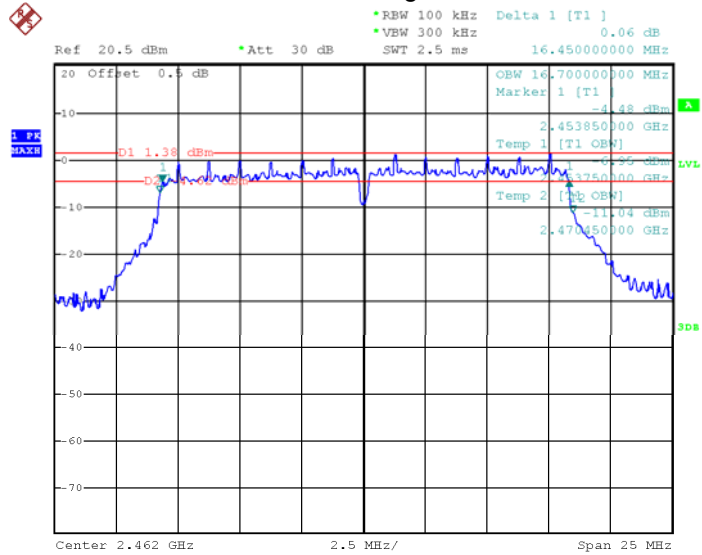


Date: 13.APR.2020 01:43:15

Mode: TX 11n HT20 channel 1

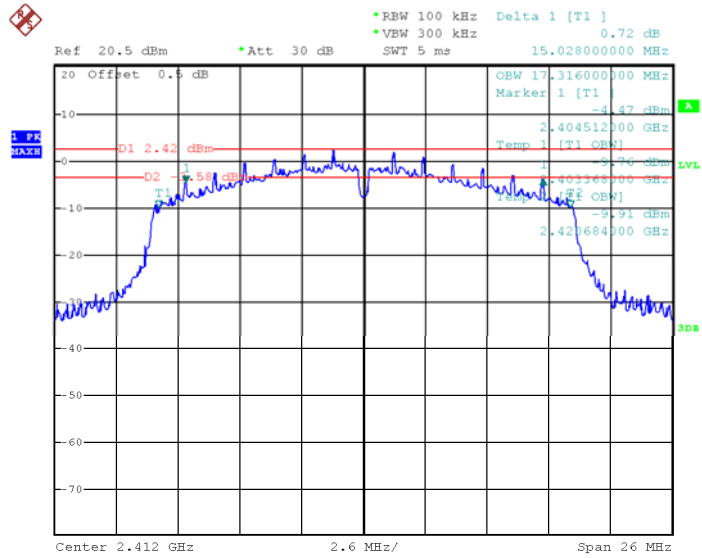


Date: 13.APR.2020 01:54:33

Mode: TX 11n HT20 channel 6

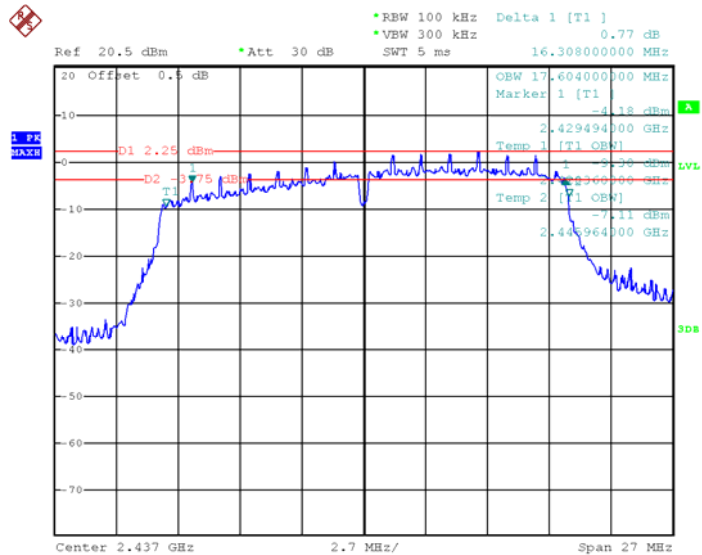


Date: 13.APR.2020 01:57:59

Mode: TX 11n HT20 channel 11

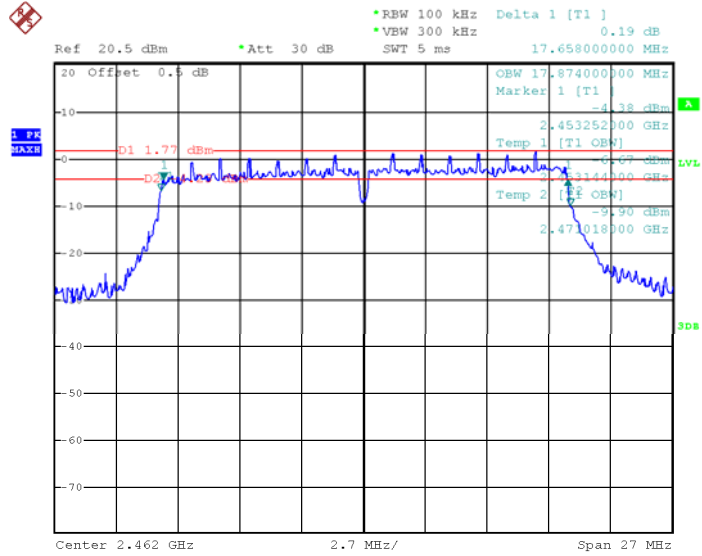

Date: 13.APR.2020 02:01:04


Mode: TX 11n HT40 channel 3

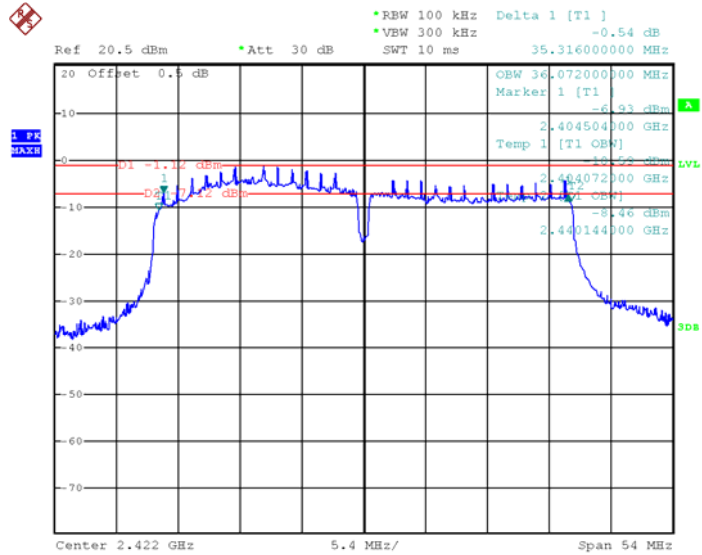

Date: 13.APR.2020 03:06:36




Mode: TX 11n HT40 channel 6

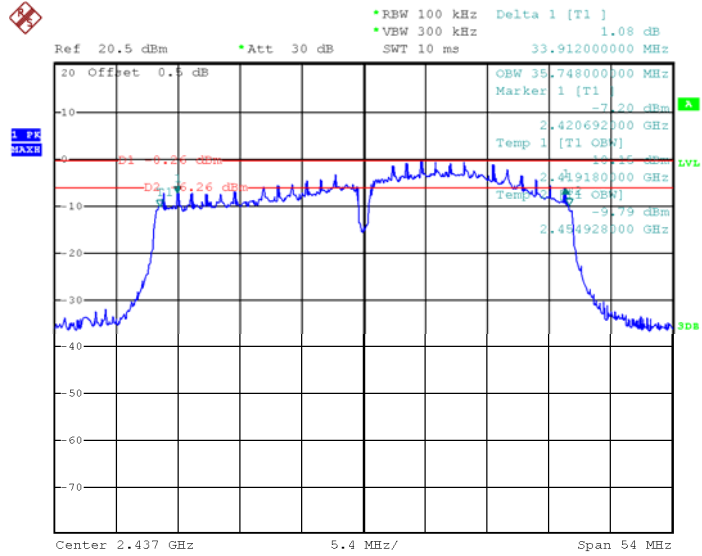


Date: 13.APR.2020 03:02:18

Mode: TX 11n HT40 channel 9

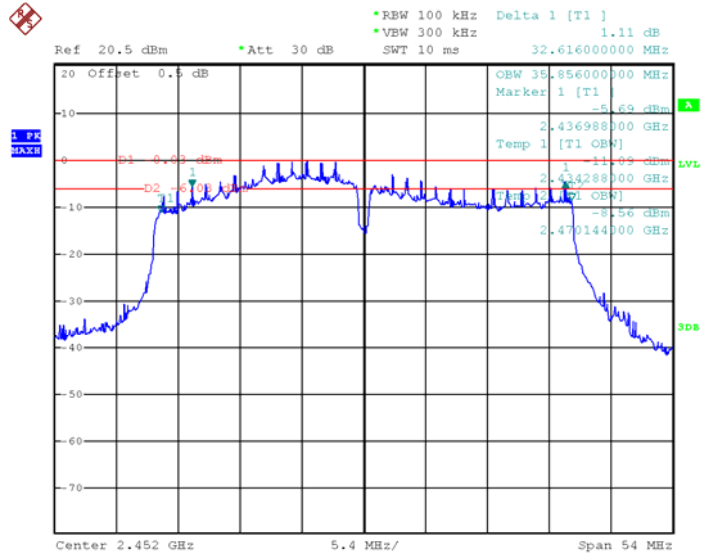


Date: 13.APR.2020 02:12:54

BLE: channel 0

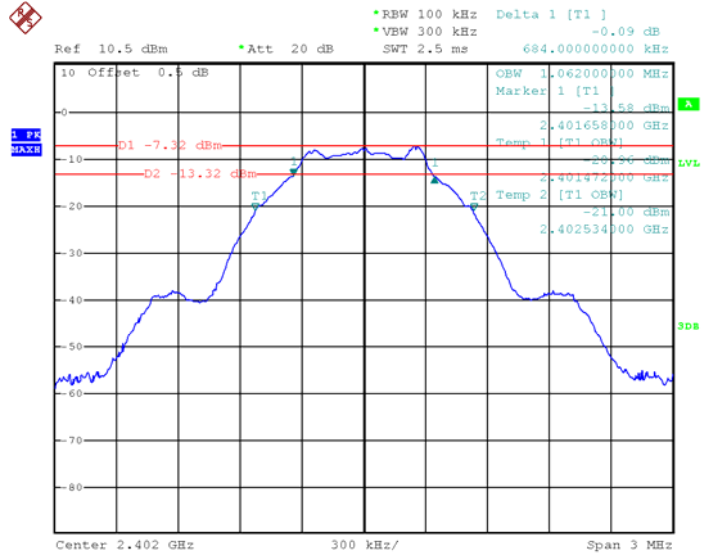


Date: 13.APR.2020 00:59:31

BLE: channel 19

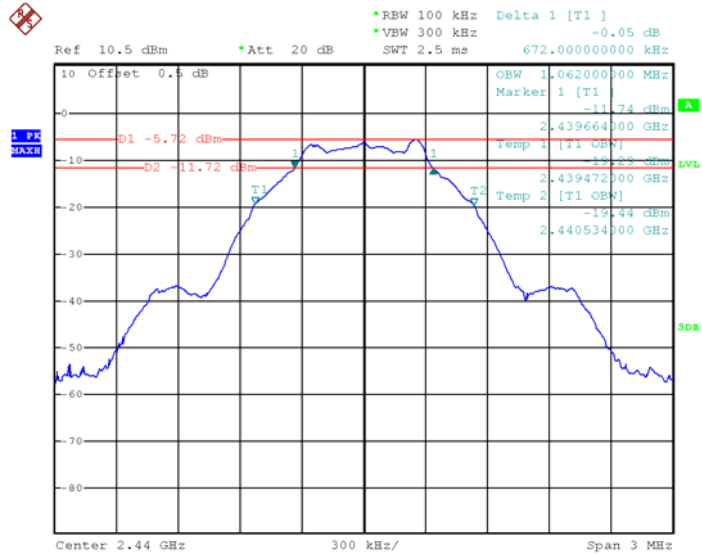

Date: 13.APR.2020 01:00:23

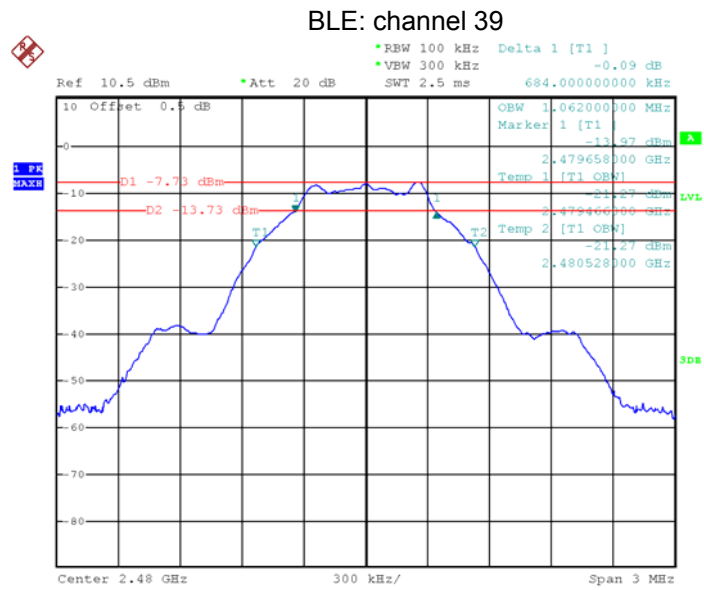

Date: 13.APR.2020 01:01:46

## 12 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW  $\geq 3 \times$  RBW
- c) Set the span  $\geq 1.5 \times$  OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run..
- g) Number of points in sweep  $\geq [2 \times \text{span} / \text{RBW}]$ . (This gives bin-to-bin spacing  $\geq \text{RBW} / 2$ , so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum..

**12.2 Test Result:**

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	13.96	1W/30dBm
	Middle-2437	14.28	1W/30dBm
	High-2462	<b>14.82</b>	1W/30dBm
TX 11g	Low-2412	13.64	1W/30dBm
	Middle-2437	13.66	1W/30dBm
	High-2462	13.91	1W/30dBm
TX 11n HT20	Low-2412	13.11	1W/30dBm
	Middle-2437	13.63	1W/30dBm
	High-2462	14.15	1W/30dBm
TX 11n HT40	Low-2422	12.97	1W/30dBm
	Middle-2437	13.20	1W/30dBm
	High-2452	13.77	1W/30dBm
BLE	Low-2402	-7.31	1W/30dBm
	Middle-2440	<b>-5.77</b>	1W/30dBm
	High-2480	-7.62	1W/30dBm


### Test Plot

Mode: TX 11b channel 1

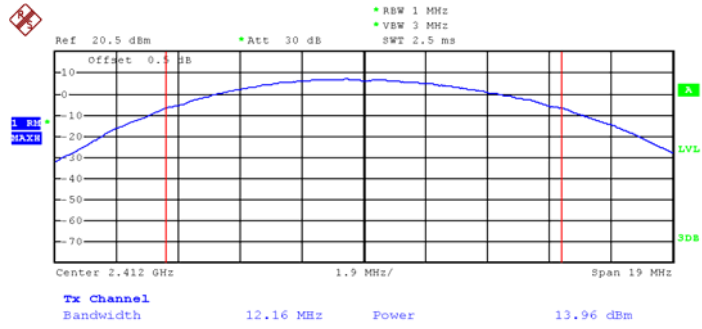


Date: 13.APR.2020 03:38:01


Mode: TX 11b channel 6

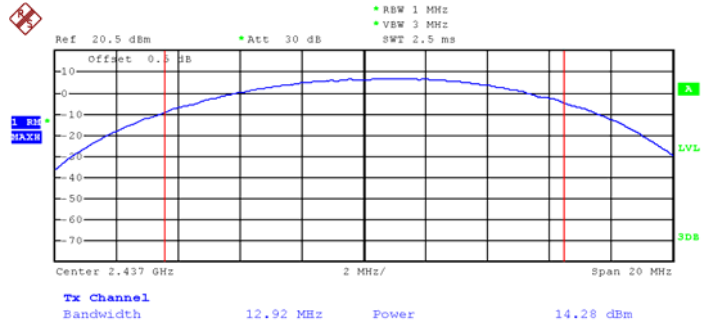

Date: 13.APR.2020 03:37:25

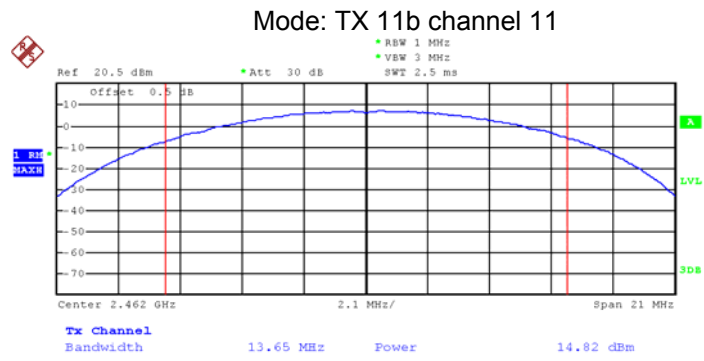


Date: 13.APR.2020 03:36:52

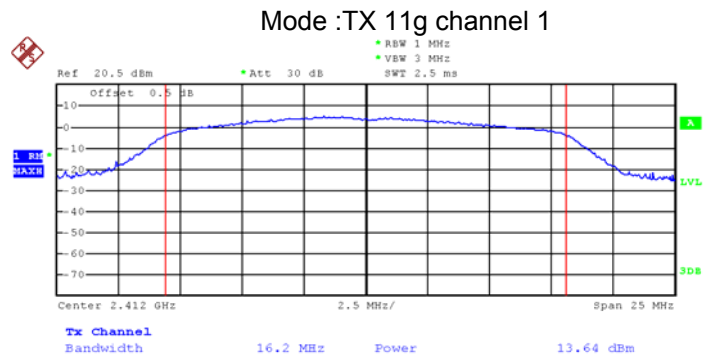


Date: 13.APR.2020 03:33:47

### Mode :TX 11g channel 6

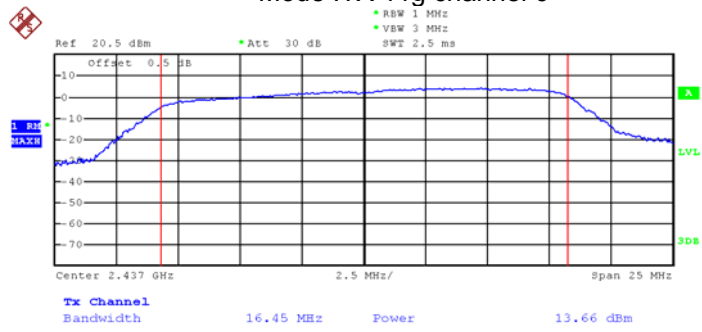

Date: 13.APR.2020 03:35:12


### Mode :TX 11g channel 11

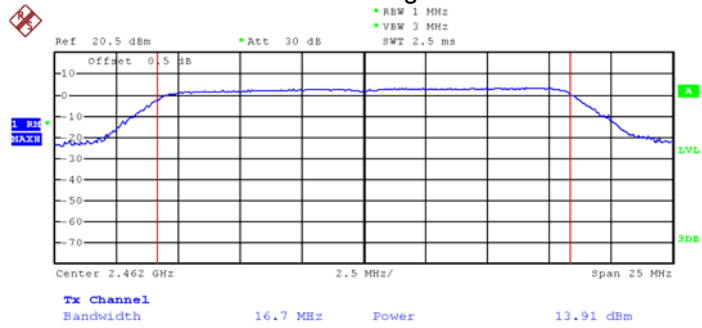

Date: 13.APR.2020 03:36:00




Mode: TX 11n HT20 channel 1

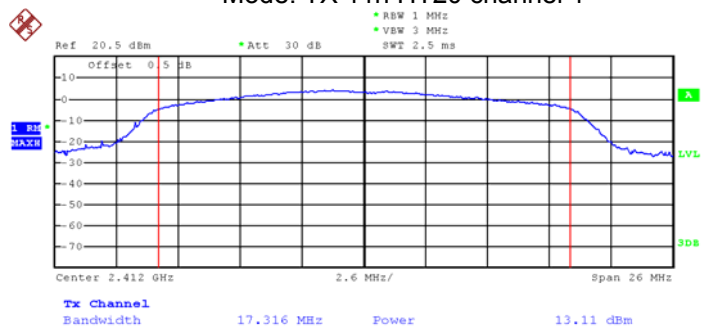


Date: 13.APR.2020 03:31:57


Mode: TX 11n HT20 channel 6

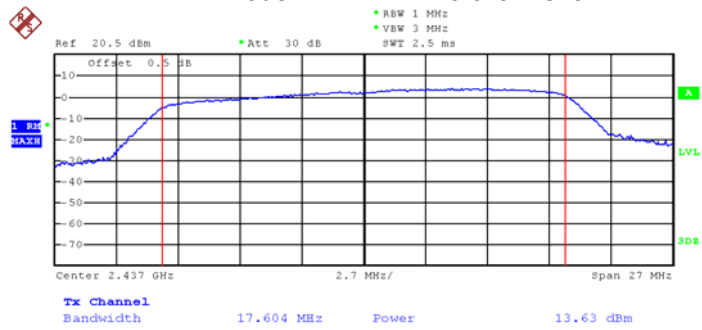

Date: 13.APR.2020 03:30:34

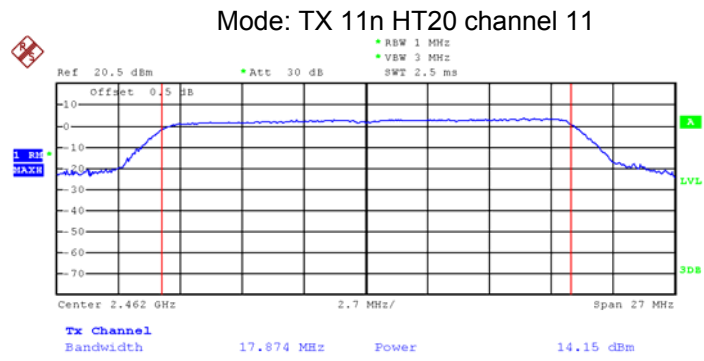


Date: 13.APR.2020 03:29:04

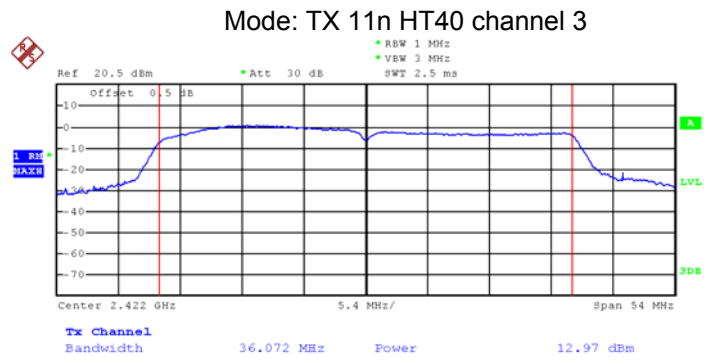


Date: 13.APR.2020 03:08:40

### Mode: TX 11n HT40 channel 6

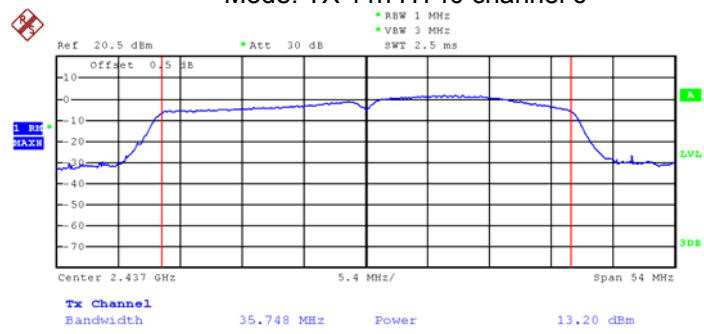


Date: 13.APR.2020 03:10:23


### Mode: TX 11n HT40 channel 9

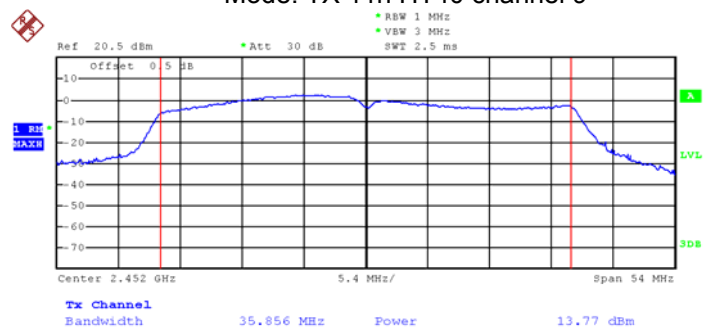


Date: 13.APR.2020 03:15:00

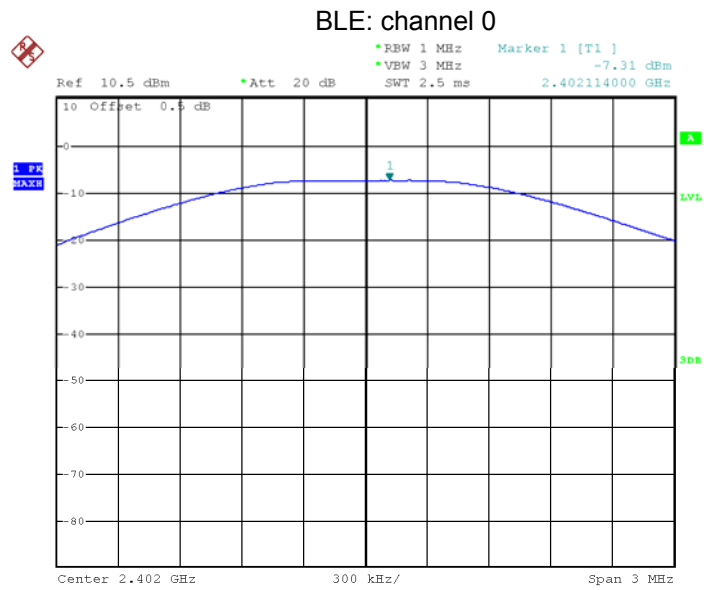

Date: 13.APR.2020 00:55:22

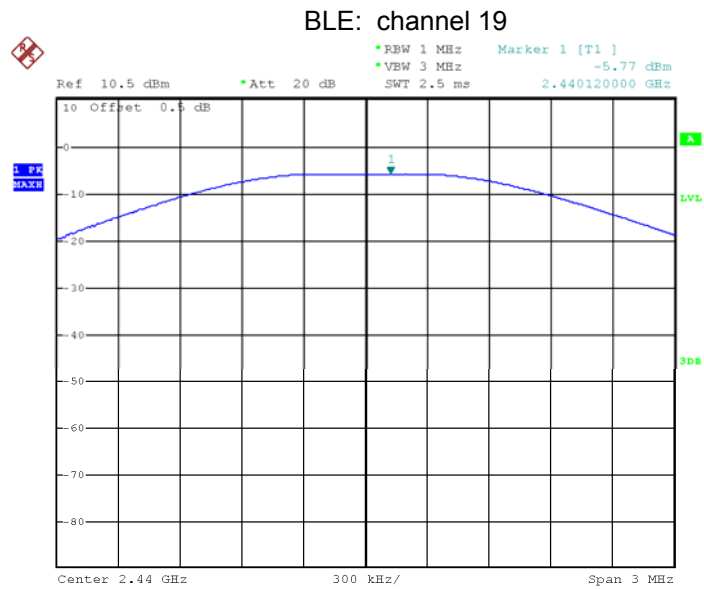

Date: 13.APR.2020 00:56:04

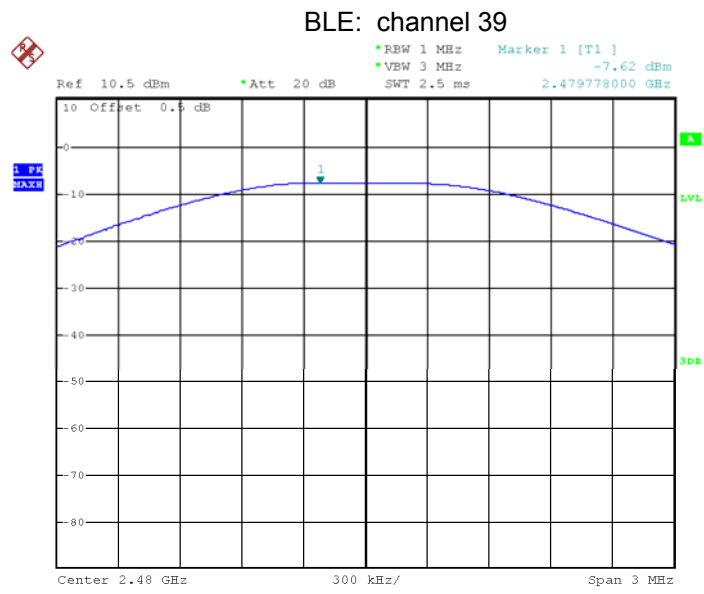

Date: 13.APR.2020 00:56:43

### 13 Duty cycle

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10: 2013
Test Limit:	N/A
Test Result:	PASS
Remark:	EUT transmitting continuously

## 14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019;  
ANSI C63.10:2013

### 14.1 Test Procedure:


KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 14.2 Test Result:


Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-7.27	8dBm per 3kHz
	Middle-2437	-7.76	8dBm per 3kHz
	High-2462	-7.44	8dBm per 3kHz
TX 11g	Low-2412	-11.82	8dBm per 3kHz
	Middle-2437	-11.95	8dBm per 3kHz
	High-2462	-11.95	8dBm per 3kHz
TX 11n HT20	Low-2412	-11.35	8dBm per 3kHz
	Middle-2437	-10.24	8dBm per 3kHz
	High-2462	-12.10	8dBm per 3kHz
TX 11n HT40	Low-2422	-15.94	8dBm per 3kHz
	Middle-2437	-13.82	8dBm per 3kHz
	High-2452	-13.80	8dBm per 3kHz
BLE	Low-2402	-23.72	8dBm per 3kHz
	Middle-2440	-22.14	8dBm per 3kHz
	High-2480	-24.05	8dBm per 3kHz

### Test Plot Mode: TX 11b channel 1

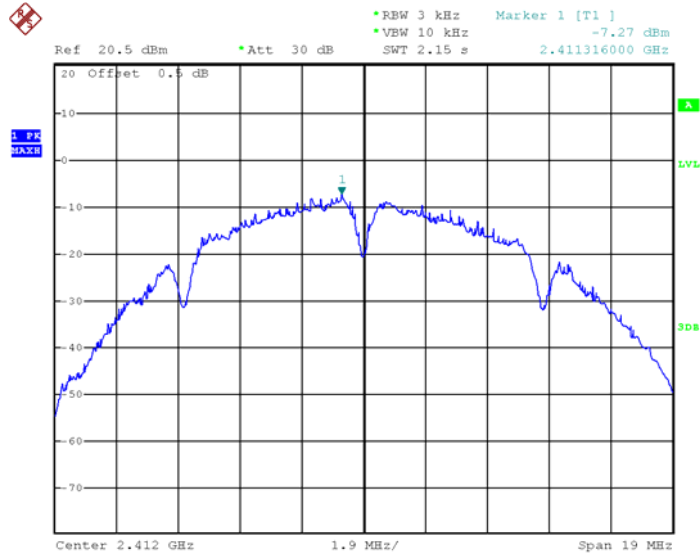

Date: 13.APR.2020 03:40:48


### Mode: TX 11b channel 6

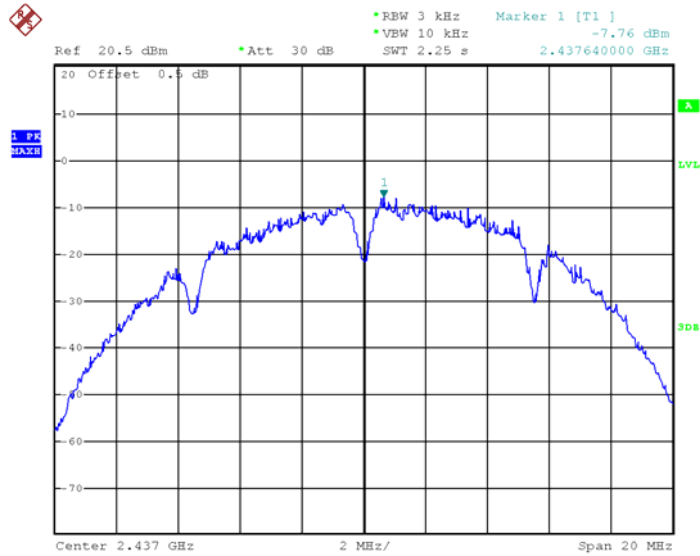

Date: 13.APR.2020 03:41:29




Mode: TX 11b channel 11

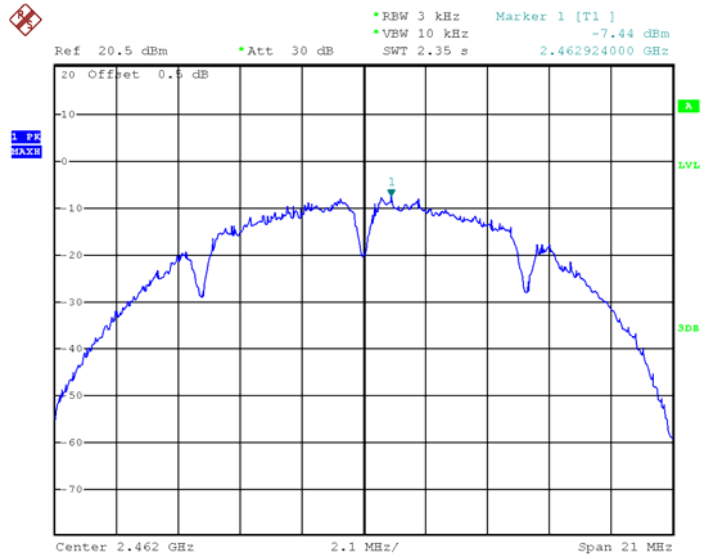


Date: 13.APR.2020 03:44:10


Mode :TX 11g channel 1

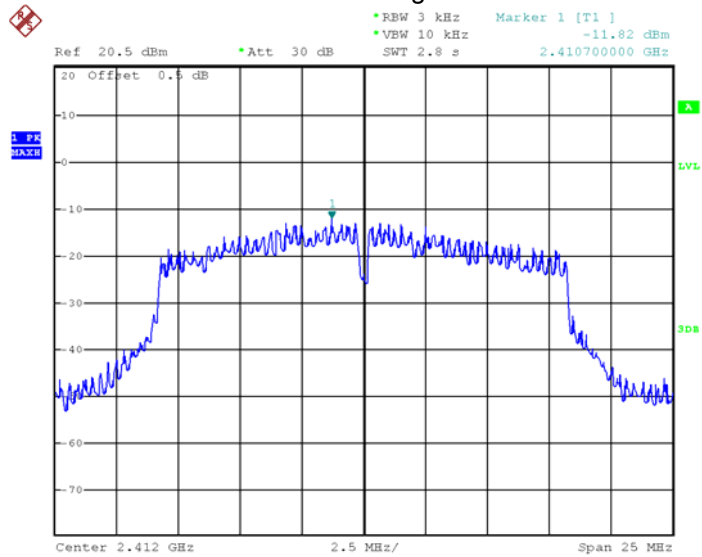

Date: 13.APR.2020 03:47:13

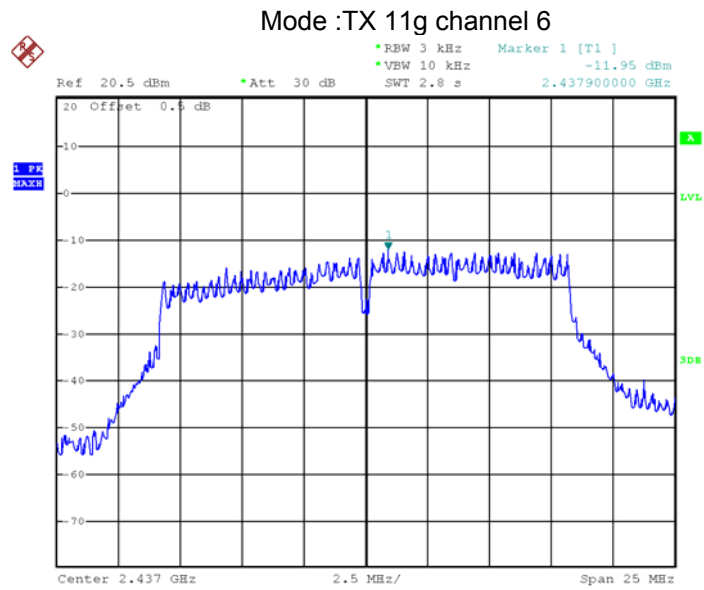


Date: 13.APR.2020 03:46:45

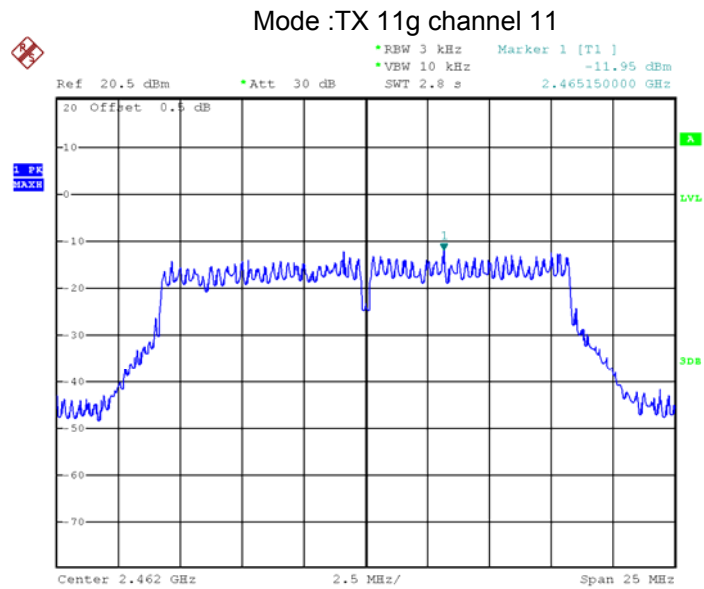


Date: 13.APR.2020 03:45:47

Mode: TX 11n HT20 channel 1

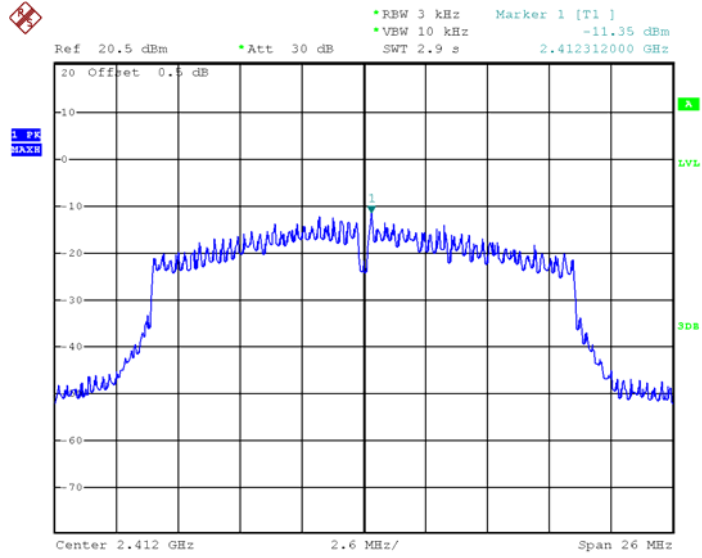


Date: 13.APR.2020 03:47:52

Mode: TX 11n HT20 channel 6

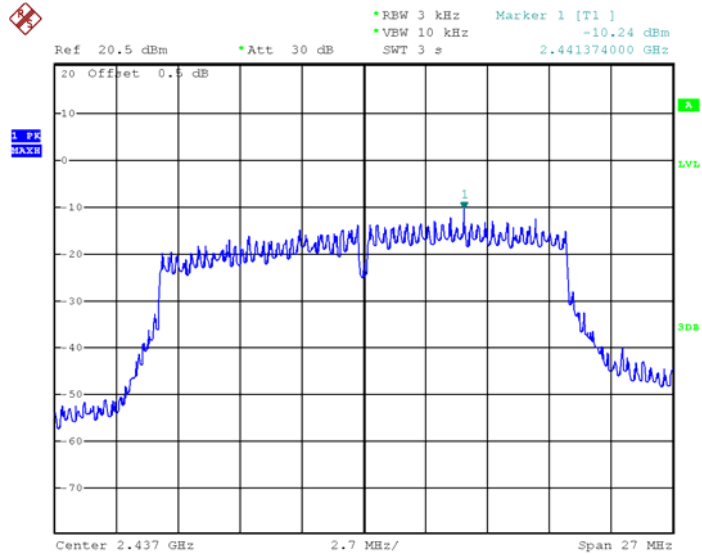


Date: 13.APR.2020 03:51:05

Mode: TX 11n HT20 channel 11

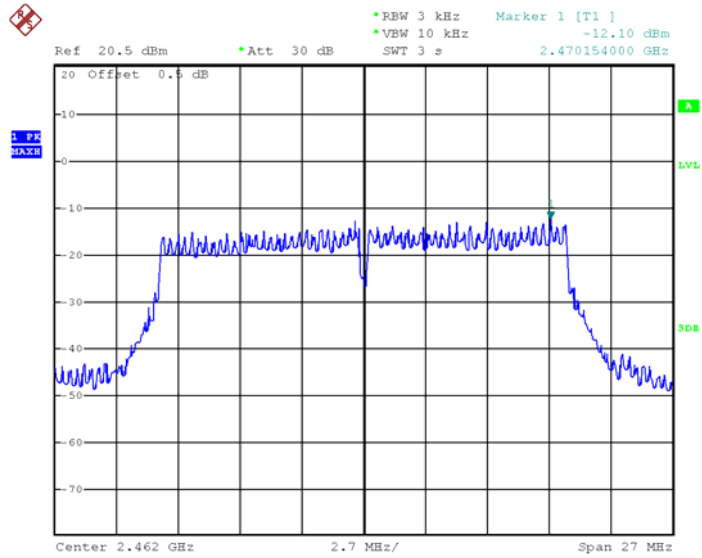


Date: 13.APR.2020 03:51:54

Mode: TX 11n HT40 channel 3

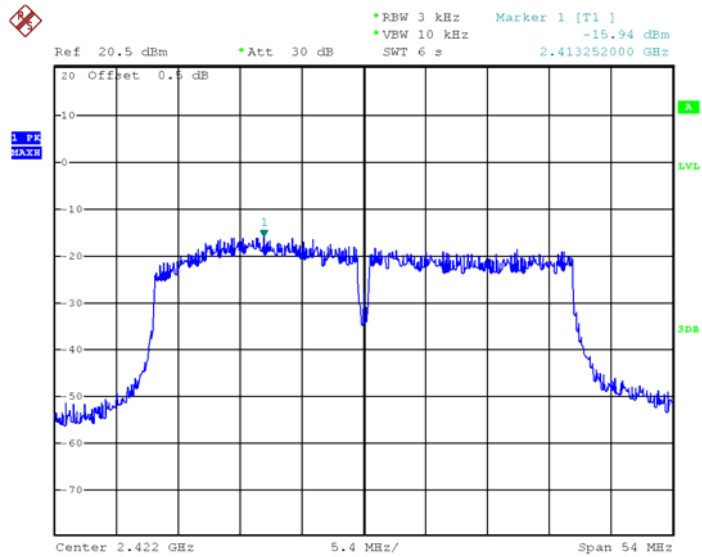


Date: 13.APR.2020 04:03:17

Mode: TX 11n HT40 channel 6

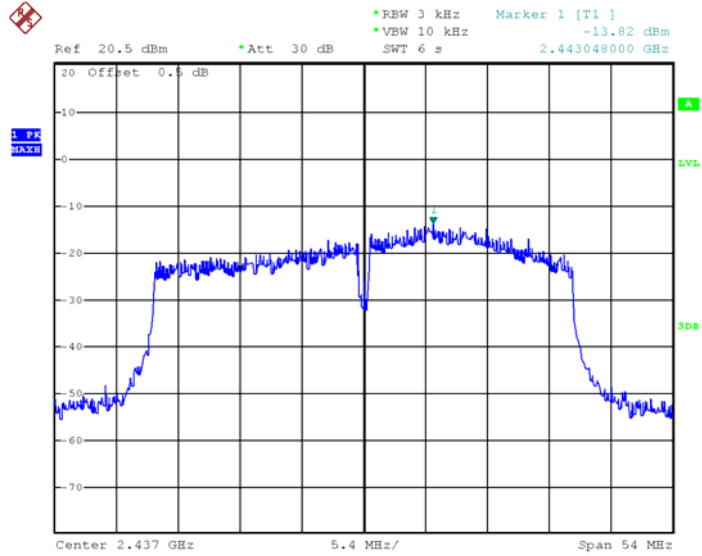


Date: 13.APR.2020 04:00:32

Mode: TX 11n HT40 channel 9

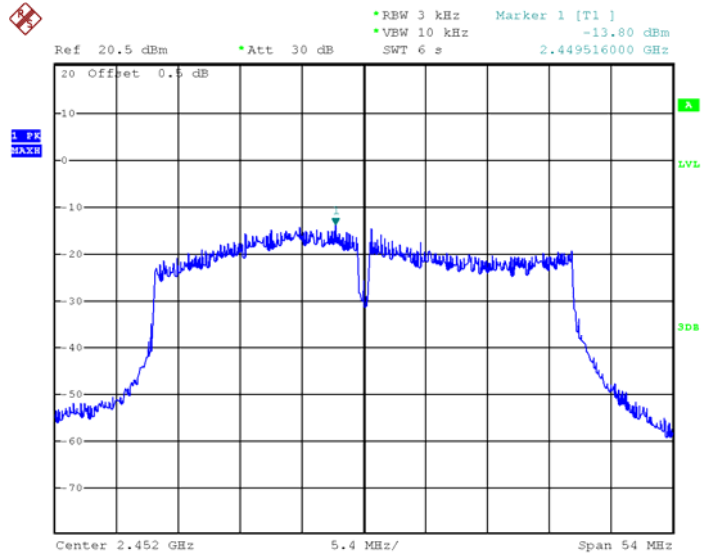


Date: 13.APR.2020 03:56:48

### BLE: channel 0

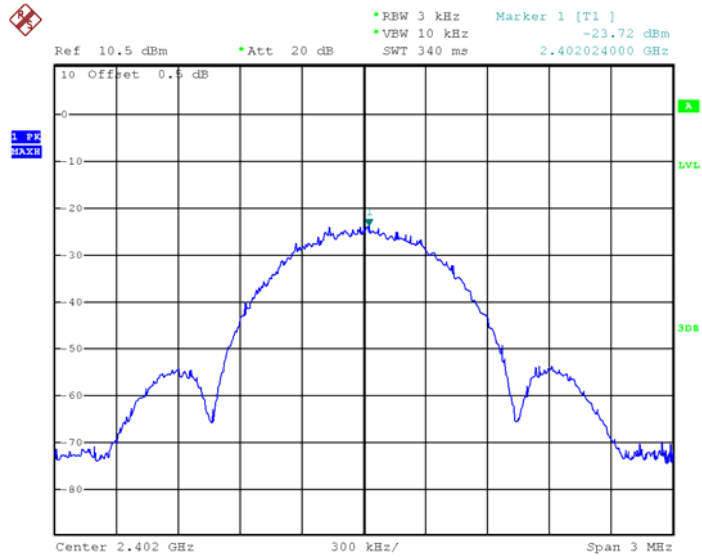


Date: 13.APR.2020 00:58:26

### BLE: channel 19

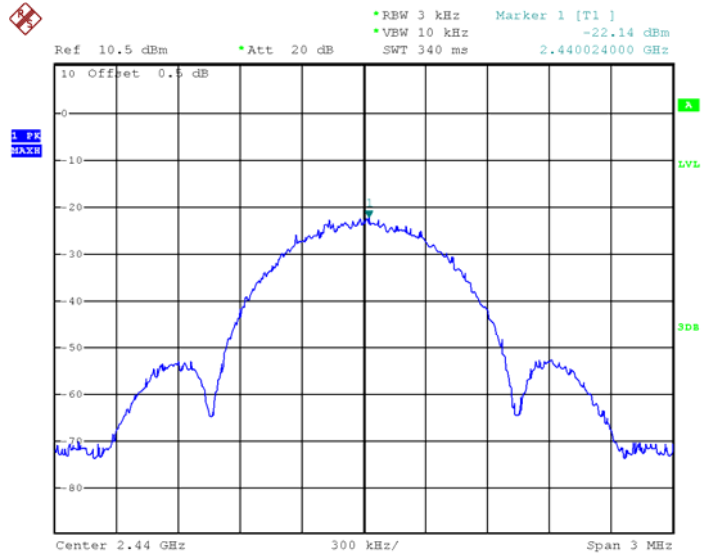

Date: 13.APR.2020 00:57:58

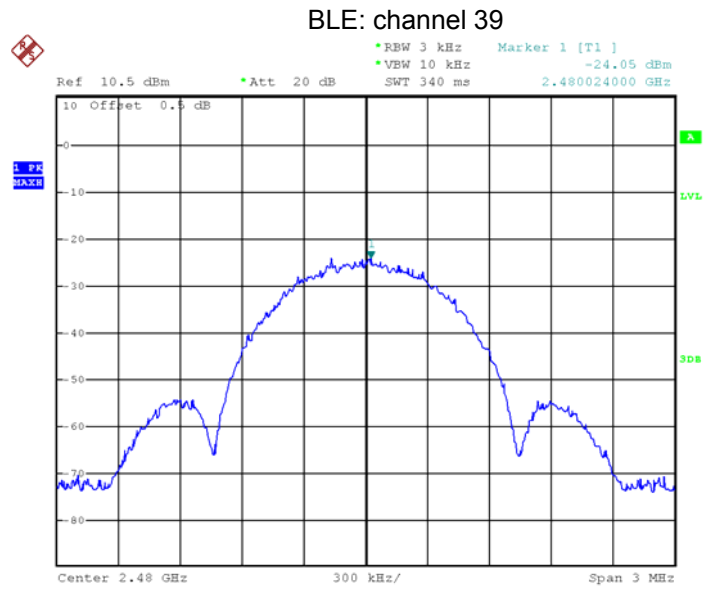

Date: 13.APR.2020 00:57:34

## **15 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.



## **16 RF Exposure**

Remark: refer to SAR test report: WTS20S03012207W001.

## **17 Photographs of test setup and EUT.**

Note: Please refer to appendix: Appendix-KD6-Photos.

=====**End of Report**=====