


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant3	-4.995	30	Pass
NVNT	BLE	2442	Ant3	-3.469	30	Pass
NVNT	BLE	2480	Ant3	-4.36	30	Pass



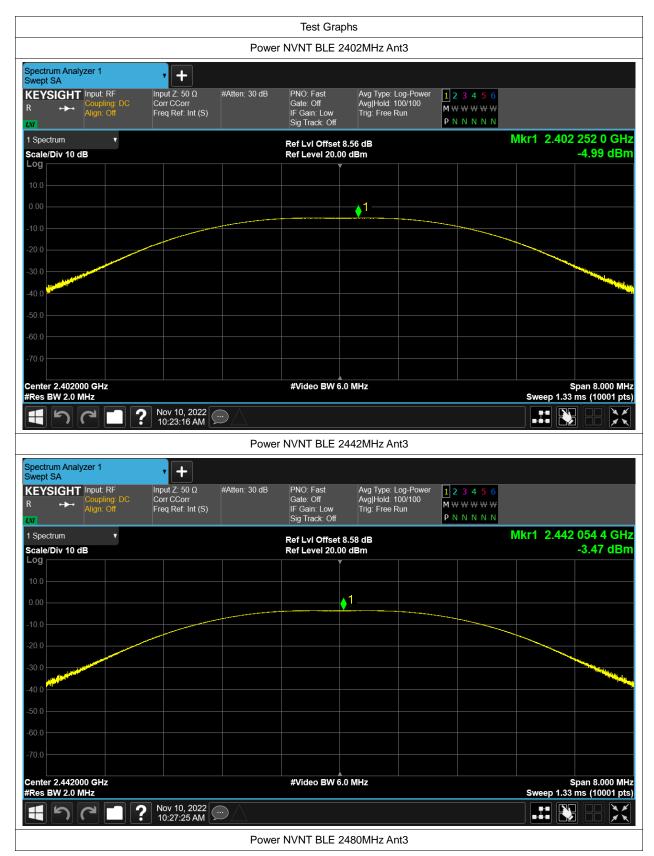



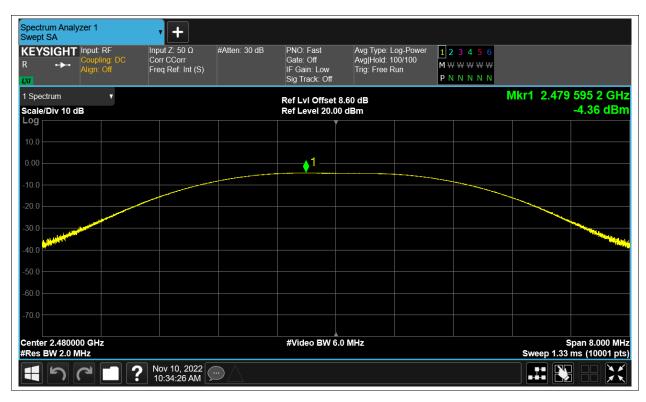




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant3	1.278	0.5	Pass
NVNT	BLE	2442	Ant3	1.179	0.5	Pass
NVNT	BLE	2480	Ant3	1.24	0.5	Pass







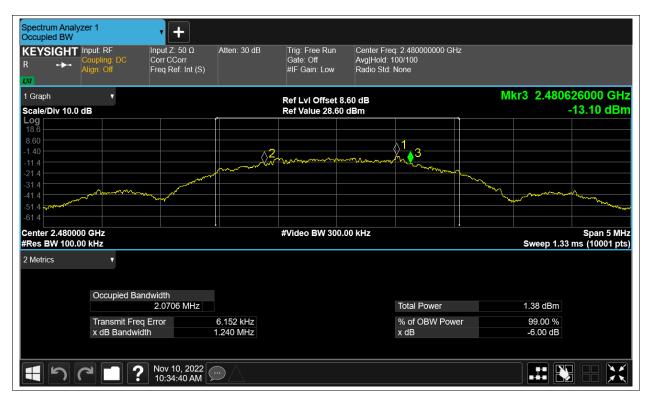




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE	2402	Ant3	2.09
NVNT	BLE	2442	Ant3	2.091
NVNT	BLE	2480	Ant3	2.093



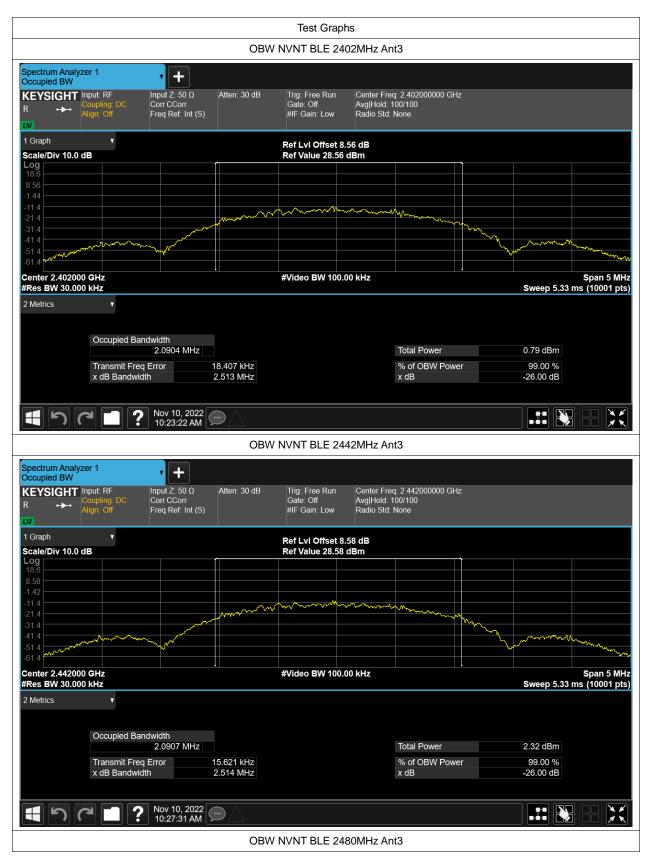








Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant3	-23.78	8	Pass
NVNT	BLE	2442	Ant3	-22.316	8	Pass
NVNT	BLE	2480	Ant3	-23.244	8	Pass







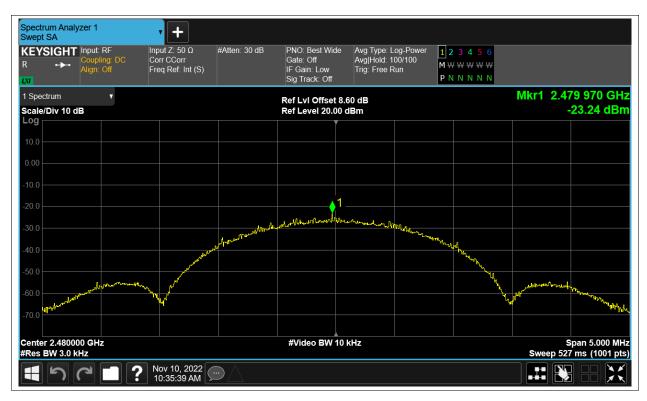




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant3	-44.44	-20	Pass
NVNT	BLE	2480	Ant3	-44.19	-20	Pass



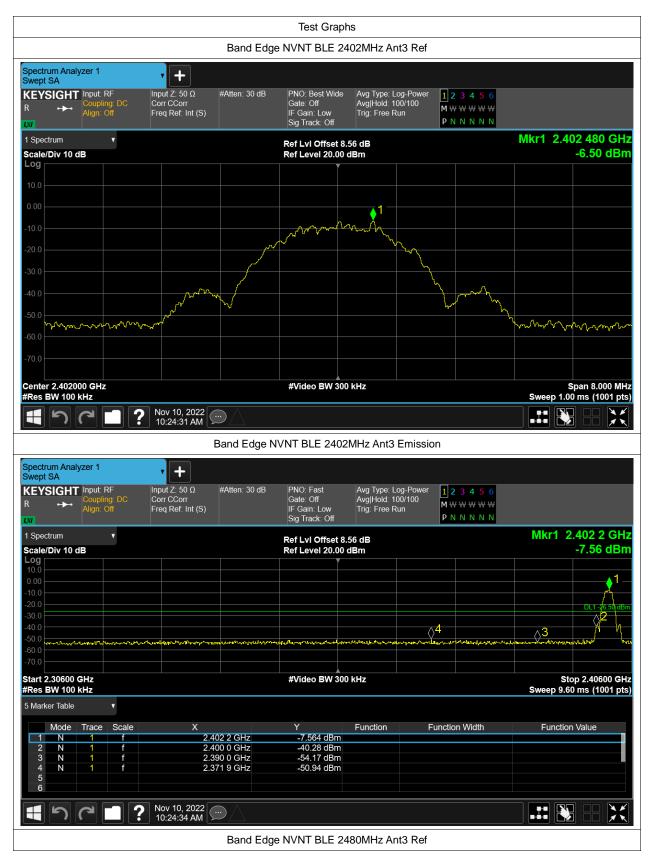







Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant3	-34.35	-20	Pass
NVNT	BLE	2442	Ant3	-36.17	-20	Pass
NVNT	BLE	2480	Ant3	-35.93	-20	Pass



