



Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	5.546	30	Pass
NVNT	BLE	2442	Ant12	6.501	30	Pass
NVNT	BLE	2480	Ant12	6.208	30	Pass







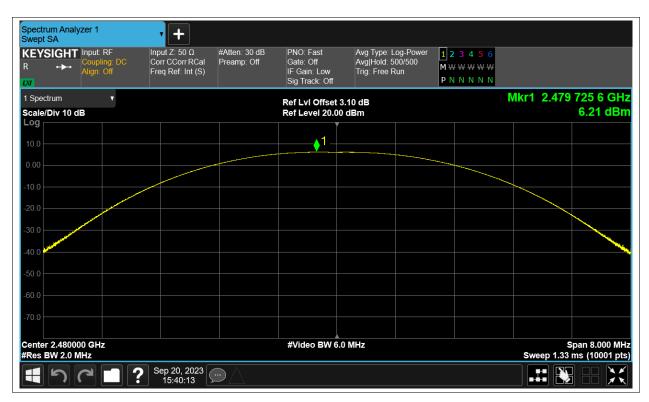





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant12	0.694	0.5	Pass
NVNT	BLE	2442	Ant12	0.7	0.5	Pass
NVNT	BLE	2480	Ant12	0.706	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant12	1.034	
NVNT	BLE	2442	Ant12	1.037	
NVNT	BLE	2480	Ant12	1.035	














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	-9.71	8	Pass
NVNT	BLE	2442	Ant12	-8.708	8	Pass
NVNT	BLE	2480	Ant12	-9.063	8	Pass







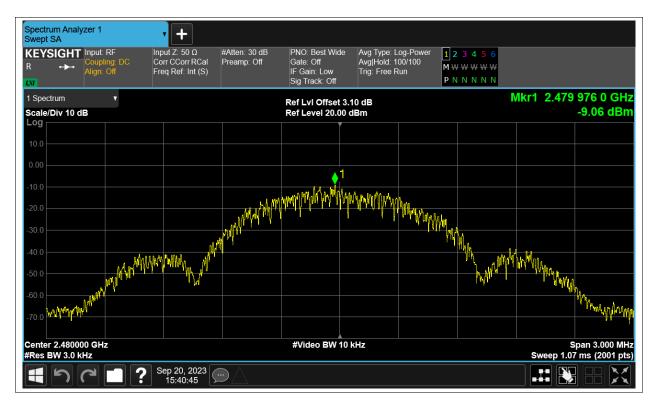







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-61.18	-20	Pass
NVNT	BLE	2480	Ant12	-61.9	-20	Pass



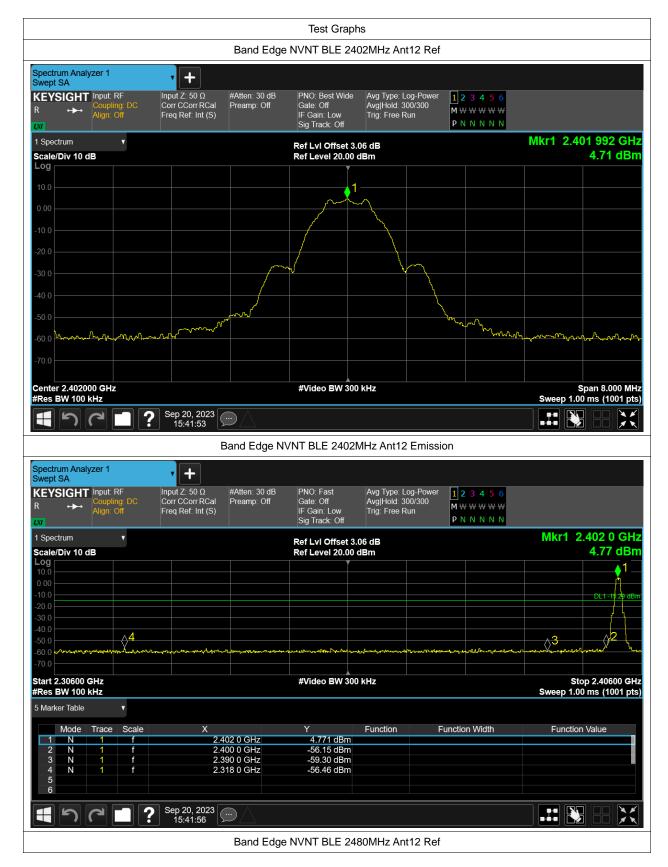



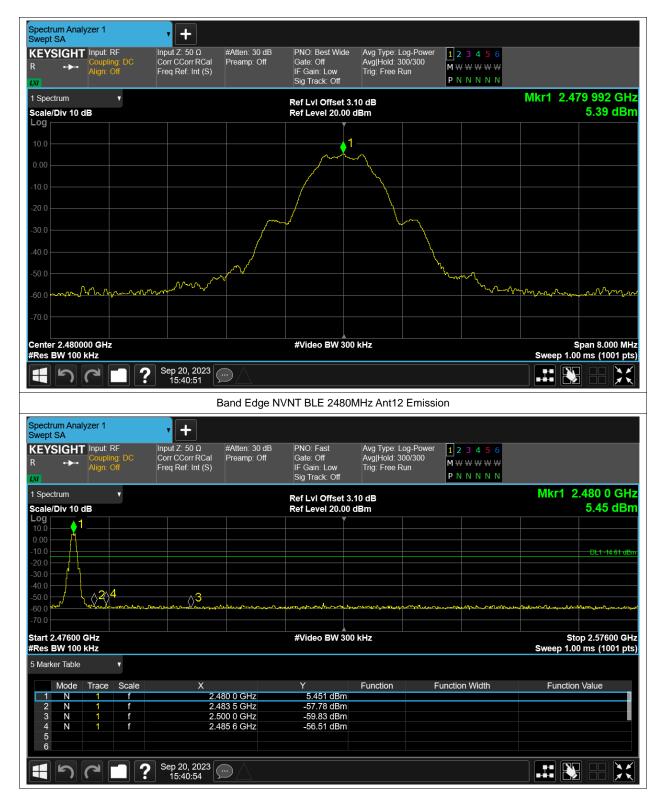





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-53.38	-20	Pass
NVNT	BLE	2442	Ant12	-50.18	-20	Pass
NVNT	BLE	2480	Ant12	-54.01	-20	Pass









Tx. Spurious NVNT BLE 2480MHz Ant12 Ref

-54.20 dBm

3 4 Ν N

5 6

Sep 20, 2023



