

# FCC RF Test Report

## (2.4G Wi-Fi)

**Applicant:** TECNO MOBILE LIMITED

**Address of Applicant:** FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE  
19-25 SHAN MEI STREET FOTAN NT HONGKONG

**Equipment Under Test (EUT)**

Product Name: Mobile Phone

Model No.: KJ6

Trade Mark: TECNO

**FCC ID:** 2ADYY-KJ6

**Applicable Standards:** FCC CFR Title 47 Part 15C (§15.247)

**Date of Sample Receipt:** 14 Sep., 2023

**Date of Test:** 15 Sep., to 19 Oct., 2023


**Date of Report Issued:** 20 Oct., 2023

**Test Result:** PASS

**Project by:** Lucas Ding **Date:** 20 Oct., 2023  
Project Engineer

**Reviewed by:** Jane **Date:** 20 Oct., 2023  
Senior Engineer

**Approved by:** Zhang **Date:** 20 Oct., 2023  
Manager



This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 1 Version

Version No.	Date	Description
00	20 Oct., 2023	Original

## 2 Contents

Page

Cover Page .....	1
1 Version .....	2
2 Contents .....	3
3 General Information .....	4
3.1 Client Information .....	4
3.2 General Description of E.U.T. ....	4
3.3 Test Mode and Environment .....	5
3.4 Description of Test Auxiliary Equipment .....	5
3.5 Measurement Uncertainty .....	5
3.6 Additions to, Deviations, or Exclusions from the Method .....	5
3.7 Laboratory Facility .....	6
3.8 Laboratory Location .....	6
3.9 Test Instruments List .....	6
4 Measurement Setup and Procedure .....	8
4.1 Test Channel .....	8
4.2 Test Setup .....	8
4.3 Test Procedure .....	10
5 Test Results .....	11
5.1 Summary .....	11
5.1.1 Clause and Data Summary .....	11
5.1.2 Test Limit .....	12
5.2 Antenna Requirement .....	13
5.3 AC Power Line Conducted Emission .....	14
5.4 Emissions in Restricted Frequency Bands .....	18
5.5 Emissions in Non-restricted Frequency Bands .....	50

### 3 General Information

#### 3.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Manufacturer:	TECNO MOBILE LIMITED
Address:	FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI STREET FOTAN NT HONGKONG
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

#### 3.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	KJ6
Operation Frequency:	2412 MHz - 2462 MHz (802.11b, g, n-HT20) 2422 MHz - 2452 MHz (802.11n-HT40)
Channel Numbers:	11 (802.11b, g, n-HT20) 7 (802.11n-HT40)
Channel Separation:	5MHz
Modulation Technology: (IEEE 802.11b)	DSSS-DBPSK, DQPSK, CCK
Modulation Technology: (IEEE 802.11g/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM
Antenna Type:	Internal Antenna
Antenna Gain:	ANT12: -2.50 dBi (declare by applicant) ANT14: -4.70 dBi (declare by applicant)
Antenna Transmit Mode:	SISO (1TX, 1RX) (with ANT 12 and ANT 14, and they stand alone to transmit)
Power Supply:	Rechargeable Li-ion Polymer Battery DC3.87V,4900mAh
AC Adapter:	Adapter1: Model: U330TSA Input: AC100-240V, 50/60Hz, 1.5A Output: DC 5.0V, 3.0A 15W or 10.0V, 3.3A 33.0W MAX Adapter2: Model: U330TSB Input: AC100-240V, 50/60Hz, 1.5A Output: DC 5.0V, 3.0A 15W or 5V-10.0V, 3.3A or 11 V3.0A 33.0W MAX
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

### 3.3 Test Mode and Environment

<b>Test Mode:</b>	
Transmitting mode:	Keep the EUT in continuous transmitting with modulation
<b>Per-scan all kind of data rate, the follow list were the worst case:</b>	
<b>Mode</b>	<b>Data rate</b>
802.11b	1Mbps
802.11g	6Mbps
802.11n-HT20	6.5Mbps
802.11n-HT40	13.5Mbps
<b>Remark:</b>	
1. For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11b, g, n modulation mode, found 802.11b modulation mode was worse case mode. The report only reflects the test data of worst mode. 2. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	
<b>Operating Environment:</b>	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.87Vdc, Extreme: Low 3.45Vdc, High 4.45Vdc
Test Engineer:	Logan Li (Conducted measurement) Kiran Zeng (Conducted emission measurement) Robin Gu (Radiated emission measurement)

### 3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.
---

### 3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	3.57 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	3.14 dB
Radiated Emission (30MHz ~ 200MHz) (3m SAC)	4.6 dB
Radiated Emission (200MHz ~ 1000MHz) (3m SAC)	5.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB

**Note:** All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### 3.6 Additions to, Deviations, or Exclusions from the Method

No
----

### 3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

### 3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

### 3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2024
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	02-09-2023	02-08-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	02-09-2023	02-08-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	01-10-2023	01-09-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	01-11-2023	01-10-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-18-2023	01-17-2024
Test Software	Tonscend	TS+	Version: 3.0.0.1		

<b>Radiated Emission(3m FAR):</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-13-2023	07-12-2024
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-02-2021	07-01-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	07-14-2023	07-13-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	01-09-2023	01-08-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	01-09-2023	01-08-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	01-09-2023	01-08-2024
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	05-14-2023	05-13-2024
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	05-14-2023	05-13-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	01-11-2023	01-10-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	01-10-2023	01-09-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-10-2023	01-09-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ081-1	06-13-2023	06-12-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	08-01-2023	07-31-2024
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	08-01-2023	07-31-2024
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	08-01-2023	07-31-2024
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

<b>Conducted Emission:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	07-05-2023	07-04-2024
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	01-10-2023	01-09-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	01-11-2023	01-10-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	02-22-2023	02-21-2024
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

<b>Conducted Method:</b>					
<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Manage No.</b>	<b>Cal. Date (mm-dd-yy)</b>	<b>Cal. Due date (mm-dd-yy)</b>
Spectrum Analyzer	Keysight	N9010B	WXJ081-1	09-25-2023	09-24-2024
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	01-09-2023	01-08-2025
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	09-25-2023	09-24-2024
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

## 4 Measurement Setup and Procedure

### 4.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:


802.11b, 802.11g, 802.11n-HT20					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	6	2437	11	2462

802.11n-HT40					
Lowest channel		Middle channel		Highest channel	
Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
3	2422	6	2437	9	2452

### 4.2 Test Setup

#### 1) Conducted emission measurement:

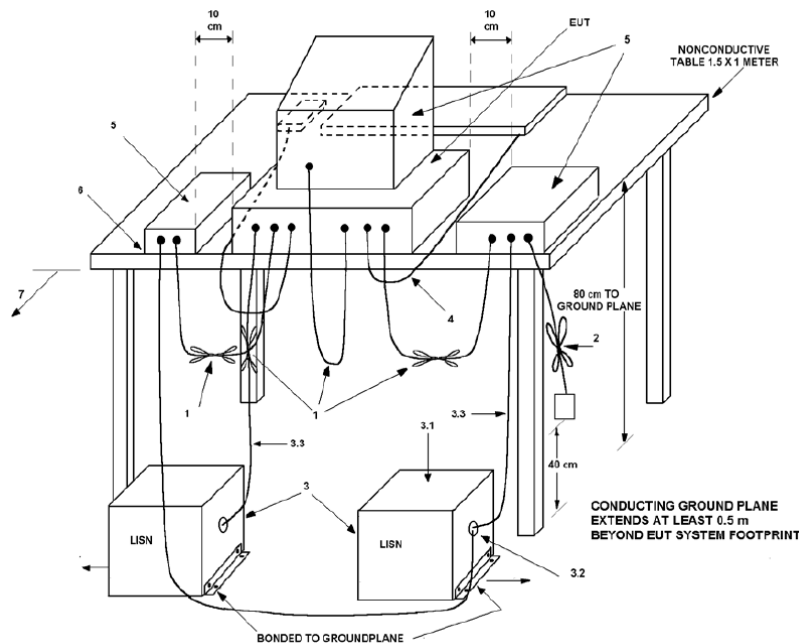


**Note:** The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.


#### 2) Radiated emission measurement:

Below 1GHz (3m SAC)




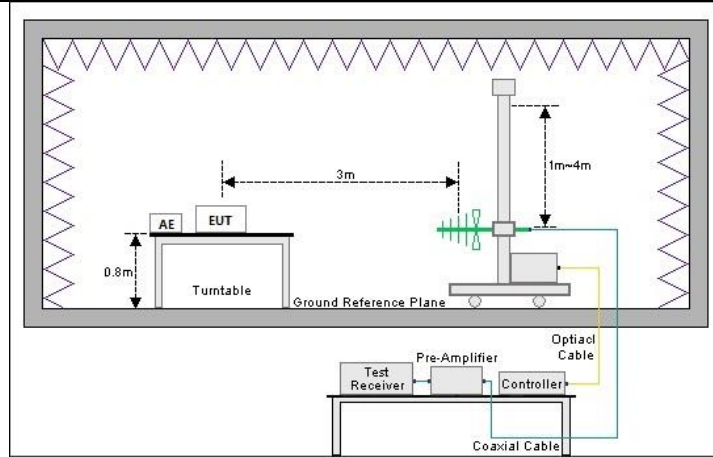

Above 1GHz (3m FAR)

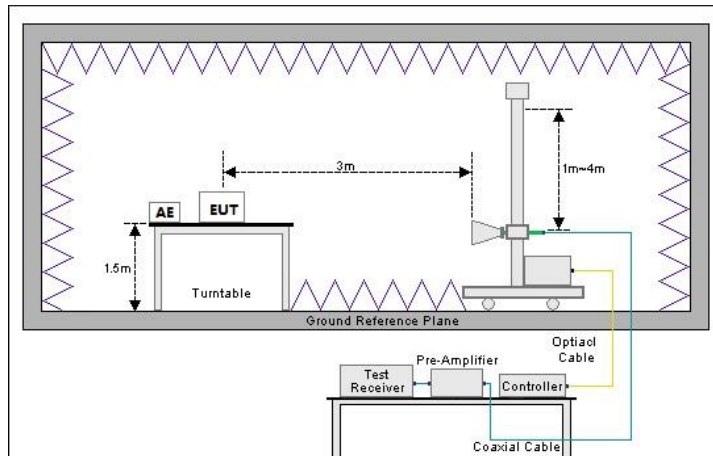

**3) Conducted test method**

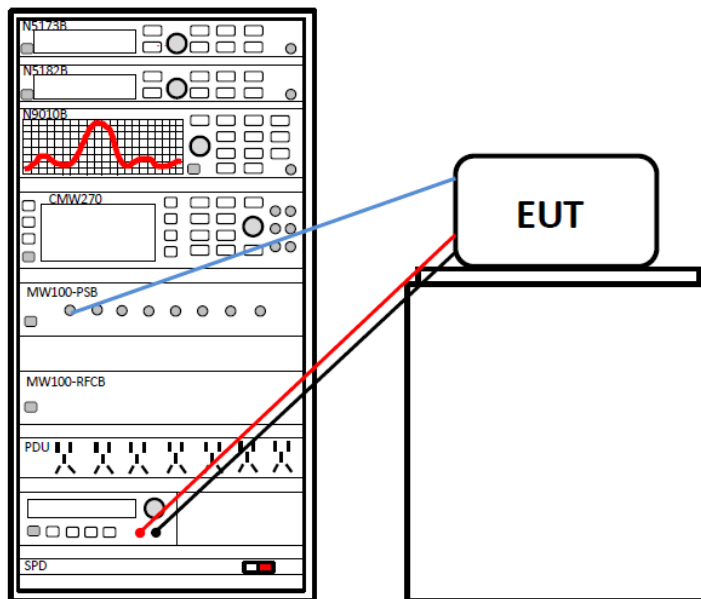

### 4.3 Test Procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> <li>The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>
Radiated emission	<p><b>For below 1GHz:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol> <p><b>For above 1GHz:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m.</li> <li>EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations.</li> <li>Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.</li> </ol>
Conducted test method	<ol style="list-style-type: none"> <li>The Wi-Fi antenna port of EUT was connected to the test port of the test system through an RF cable.</li> <li>The EUT is keeping in continuous transmission mode and tested in all modulation modes.</li> <li>Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.</li> </ol>

## 5 Test Results

### 5.1 Summary

#### 5.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203 15.247 (b)(4)	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207	See Section 5.3	Pass
Duty Cycle	ANSI C63.10-2013	Appendix – 2.4G Wi-Fi ANT12 Appendix – 2.4G Wi-Fi ANT14	Pass
Conducted Output Power	15.247 (b)(3)	Appendix – 2.4G Wi-Fi ANT12 Appendix – 2.4G Wi-Fi ANT14	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Appendix – 2.4G Wi-Fi ANT12 Appendix – 2.4G Wi-Fi ANT14	Pass
Power Spectral Density	15.247 (e)	Appendix – 2.4G Wi-Fi ANT12 Appendix – 2.4G Wi-Fi ANT14	Pass
Band-edge Emission Conduction Spurious Emission	15.247 (d)	Appendix – 2.4G Wi-Fi ANT12 Appendix – 2.4G Wi-Fi ANT14	Pass
Emissions in Restricted Frequency Bands	15.205 15.247 (d)	See Section 5.4	Pass
Emissions in Non-restricted Frequency Bands	15.209 15.247(d)	See Section 5.5	Pass
<p><b>Remark:</b></p> <ol style="list-style-type: none"> <li>1. Pass: The EUT complies with the essential requirements in the standard.</li> <li>2. N/A: Not Applicable.</li> <li>3. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 0.5dB (provided by the customer).</li> </ol>			
<b>Test Method:</b>	ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02		

### 5.1.2 Test Limit

Test items	Limit																														
AC Power Line Conducted Emission	<table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-Peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 – 0.5</td> <td>66 to 56 <small>Note 1</small></td> <td>56 to 46 <small>Note 1</small></td> </tr> <tr> <td>0.5 – 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 – 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p><b>Note 1:</b> The limit level in dB<math>\mu</math>V decreases linearly with the logarithm of frequency.  <b>Note 2:</b> The more stringent limit applies at transition frequencies.</p>	Frequency (MHz)	Limit (dB $\mu$ V)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>	0.5 – 5	56	46	5 – 30	60	50																
Frequency (MHz)	Limit (dB $\mu$ V)																														
	Quasi-Peak	Average																													
0.15 – 0.5	66 to 56 <small>Note 1</small>	56 to 46 <small>Note 1</small>																													
0.5 – 5	56	46																													
5 – 30	60	50																													
Conducted Output Power	For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.																														
6dB Emission Bandwidth	The minimum 6 dB bandwidth shall be at least 500 kHz.																														
99% Occupied Bandwidth	N/A																														
Power Spectral Density	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.																														
Band-edge Emission  Conduction Spurious Emission	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).																														
Emissions in Restricted Frequency Bands  Emissions in Non-restricted Frequency Bands	<table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V/m)</th> <th rowspan="2">Detector</th> </tr> <tr> <th>@ 3m</th> <th>@ 10m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>40.0</td> <td>30.0</td> <td>Quasi-peak</td> </tr> <tr> <td>88 – 216</td> <td>43.5</td> <td>33.5</td> <td>Quasi-peak</td> </tr> <tr> <td>216 – 960</td> <td>46.0</td> <td>36.0</td> <td>Quasi-peak</td> </tr> <tr> <td>960 – 1000</td> <td>54.0</td> <td>44.0</td> <td>Quasi-peak</td> </tr> </tbody> </table> <p><b>Note:</b> The more stringent limit applies at transition frequencies.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="2">Limit (dB<math>\mu</math>V/m) @ 3m</th> </tr> <tr> <th>Average</th> <th>Peake</th> </tr> </thead> <tbody> <tr> <td>Above 1 GHz</td> <td>54.0</td> <td>74.0</td> </tr> </tbody> </table> <p><b>Note:</b> The measurement bandwidth shall be 1 MHz or greater.</p>	Frequency (MHz)	Limit (dB $\mu$ V/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Frequency	Limit (dB $\mu$ V/m) @ 3m		Average	Peake	Above 1 GHz	54.0	74.0
Frequency (MHz)	Limit (dB $\mu$ V/m)		Detector																												
	@ 3m	@ 10m																													
30 – 88	40.0	30.0	Quasi-peak																												
88 – 216	43.5	33.5	Quasi-peak																												
216 – 960	46.0	36.0	Quasi-peak																												
960 – 1000	54.0	44.0	Quasi-peak																												
Frequency	Limit (dB $\mu$ V/m) @ 3m																														
	Average	Peake																													
Above 1 GHz	54.0	74.0																													


## 5.2 Antenna Requirement

<b>Standard Requirement:</b>	FCC Part 15 C Section 15.203/15.247 (b)(4)
<p><b>15.203 requirement:</b> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p><b>15.247 (b)(4) requirement:</b> The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>E.U.T Antenna:</b>	
<p>The Wi-Fi antenna is an internal antenna which cannot replace by end-user, the best case gain of the antenna gain: ANT12 is -2.50 dBi and ANT14 is -4.70 dBi. See product internal photos for details.</p>	

### 5.3 AC Power Line Conducted Emission

Adapter1:

Product name:	Mobile Phone	Product model:	KJ6
Test by:	Kiran	Test mode:	2.4G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

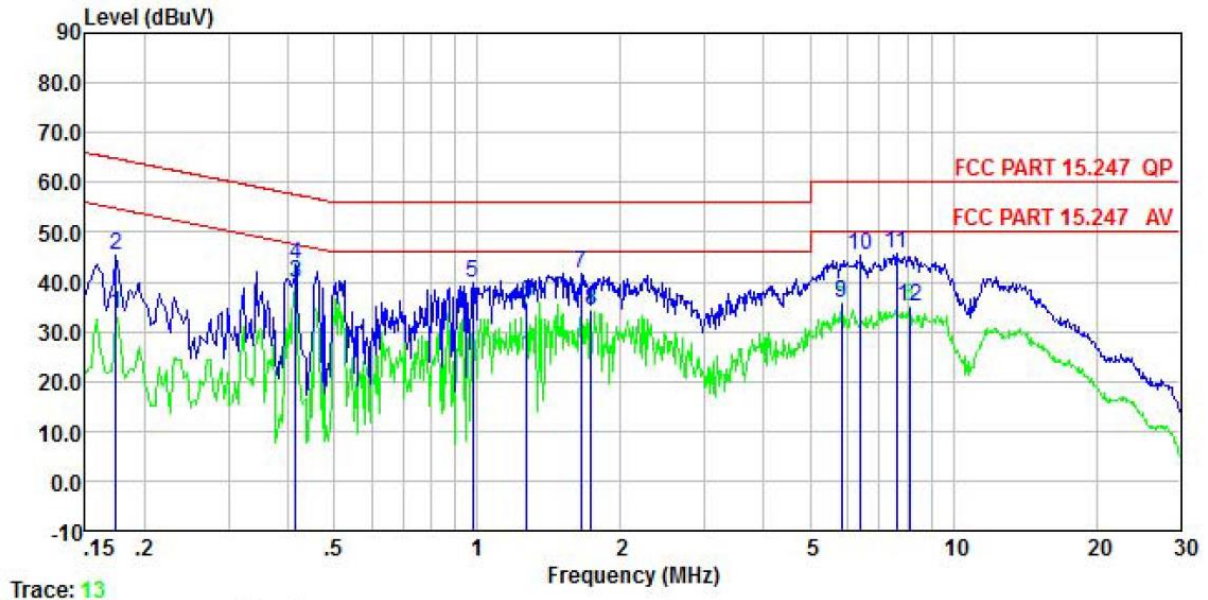


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.174	22.98	0.20	10.50	0.01	33.69	54.77	-21.08	Average
2	0.174	34.58	0.20	10.50	0.01	45.29	64.77	-19.48	QP
3	0.415	29.20	0.20	10.50	0.04	39.94	47.55	-7.61	Average
4	0.415	32.73	0.20	10.50	0.04	43.47	57.55	-14.08	QP
5	0.979	29.06	0.20	10.50	0.05	39.81	56.00	-16.19	QP
6	1.269	24.95	0.20	10.50	0.10	35.75	46.00	-10.25	Average
7	1.654	30.84	0.20	10.50	0.17	41.71	56.00	-14.29	QP
8	1.734	23.41	0.20	10.50	0.18	34.29	46.00	-11.71	Average
9	5.836	24.89	0.20	10.50	0.09	35.68	50.00	-14.32	Average
10	6.386	34.45	0.20	10.50	0.09	45.24	60.00	-14.76	QP
11	7.606	34.94	0.20	10.50	0.10	45.74	60.00	-14.26	QP
12	8.105	24.18	0.20	10.50	0.10	34.98	50.00	-15.02	Average

**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

<b>Product name:</b>	Mobile Phone	<b>Product model:</b>	KJ6
<b>Test by:</b>	Kiran	<b>Test mode:</b>	2.4G Wi-Fi mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz		

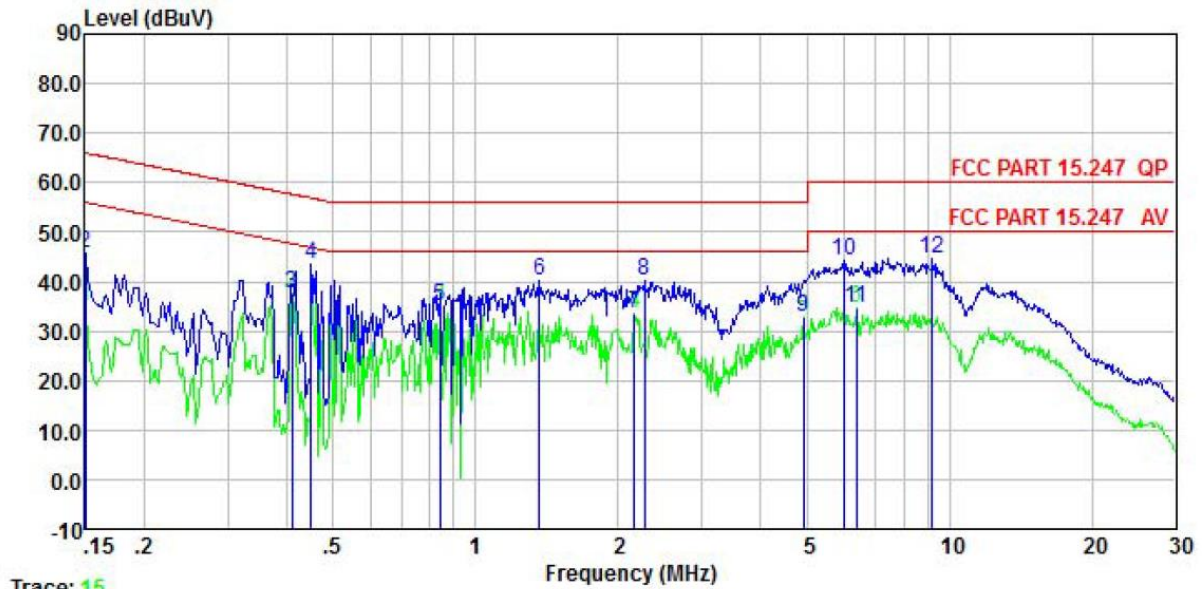

Trace: 15


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	24.26	0.20	10.50	0.01	34.97	56.00	-21.03	Average
2	0.150	34.99	0.20	10.50	0.01	45.70	66.00	-20.30	QP
3	0.410	26.93	0.20	10.50	0.04	37.67	47.64	-9.97	Average
4	0.449	32.78	0.20	10.50	0.03	43.51	56.89	-13.38	QP
5	0.839	24.32	0.20	10.50	0.03	35.05	46.00	-10.95	Average
6	1.367	29.31	0.24	10.50	0.12	40.17	56.00	-15.83	QP
7	2.167	22.63	0.30	10.50	0.18	33.61	46.00	-12.39	Average
8	2.273	29.09	0.30	10.50	0.17	40.06	56.00	-15.94	QP
9	4.926	21.90	0.30	10.50	0.09	32.79	46.00	-13.21	Average
10	5.993	33.19	0.30	10.50	0.09	44.08	60.00	-15.92	QP
11	6.352	23.91	0.30	10.50	0.09	34.80	50.00	-15.20	Average
12	9.204	33.54	0.38	10.50	0.11	44.53	60.00	-15.47	QP

**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

**Adapter2:**

<b>Product name:</b>	Mobile Phone	<b>Product model:</b>	KJ6
<b>Test by:</b>	Kiran	<b>Test mode:</b>	2.4G Wi-Fi mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Line
<b>Test voltage:</b>	AC 120 V/60 Hz		

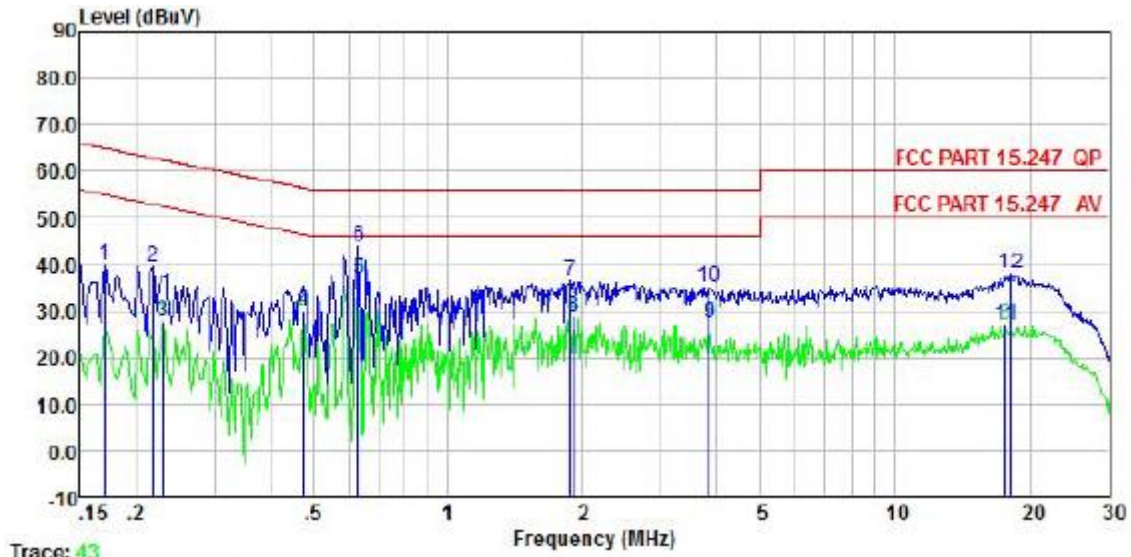

Trace: 43


	Read	LISN	Aux2	Cable	Limit	Over		
	Freq	Level	Factor	Factor	Loss	Level	Line	Limit
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB
1	0.170	28.95	0.20	10.50	0.01	39.66	64.94	-25.28 QP
2	0.219	28.86	0.20	10.50	0.03	39.59	62.88	-23.29 QP
3	0.230	16.84	0.20	10.50	0.02	27.56	52.44	-24.88 Average
4	0.474	19.27	0.20	10.50	0.03	30.00	46.45	-16.45 Average
5	0.630	25.98	0.20	10.50	0.02	36.70	46.00	-9.30 Average
6	0.630	33.15	0.20	10.50	0.02	43.87	56.00	-12.13 QP
7	1.878	25.50	0.20	10.50	0.19	36.39	56.00	-19.61 QP
8	1.918	17.89	0.20	10.50	0.20	28.78	46.00	-17.22 Average
9	3.860	16.33	0.20	10.50	0.08	27.11	46.00	-18.89 Average
10	3.860	24.17	0.20	10.50	0.08	34.95	56.00	-21.05 QP
11	17.755	15.85	0.26	10.50	0.15	26.76	50.00	-23.24 Average
12	18.135	26.93	0.27	10.50	0.15	37.85	60.00	-22.15 QP

**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.



<b>Product name:</b>	Mobile Phone	<b>Product model:</b>	KJ6
<b>Test by:</b>	Kiran	<b>Test mode:</b>	2.4G Wi-Fi mode
<b>Test frequency:</b>	150 kHz ~ 30 MHz	<b>Phase:</b>	Neutral
<b>Test voltage:</b>	AC 120 V/60 Hz		

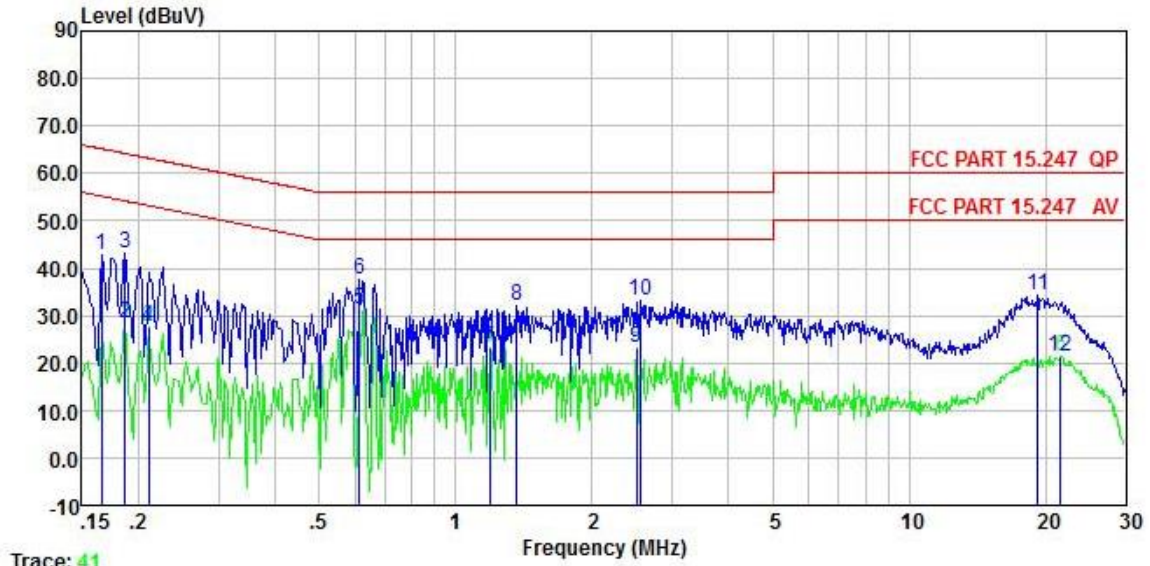

Trace: 41

	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.166	32.15	0.20	10.50	0.01	42.86	65.16	-22.30	QP
2	0.186	17.54	0.20	10.50	0.02	28.26	54.20	-25.94	Average
3	0.186	32.27	0.20	10.50	0.02	42.99	64.20	-21.21	QP
4	0.211	16.78	0.20	10.50	0.03	27.51	53.18	-25.67	Average
5	0.614	20.66	0.20	10.50	0.02	31.38	46.00	-14.62	Average
6	0.614	26.81	0.20	10.50	0.02	37.53	56.00	-18.47	QP
7	1.191	12.38	0.22	10.50	0.09	23.19	46.00	-22.81	Average
8	1.367	21.26	0.24	10.50	0.12	32.12	56.00	-23.88	QP
9	2.500	12.25	0.30	10.50	0.13	23.18	46.00	-22.82	Average
10	2.567	22.12	0.30	10.50	0.12	33.04	56.00	-22.96	QP
11	19.224	23.30	0.40	10.50	0.15	34.35	60.00	-25.65	QP
12	21.600	10.39	0.38	10.50	0.16	21.43	50.00	-28.57	Average


**Remark:**

1. Level = Read level + LISN Factor + Cable Loss.

### 5.4 Emissions in Restricted Frequency Bands

ANT12:

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

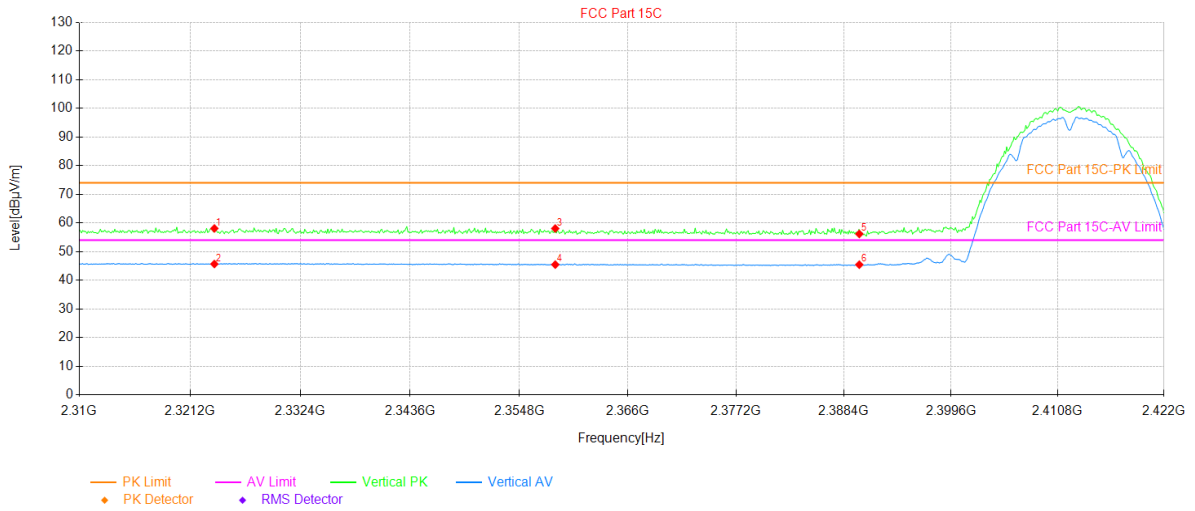


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Fact. [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2323.66	23.90	34.15	58.05	74.00	15.95	146	PK	PASS	Vertical	
2	2323.66	11.50	34.15	45.65	54.00	8.35	142	AV	PASS	Vertical	
3	2358.50	23.83	34.20	58.03	74.00	15.97	161	PK	PASS	Vertical	
4	2358.50	11.24	34.20	45.44	54.00	8.56	154	AV	PASS	Vertical	
5	2390.00	22.01	34.13	56.14	74.00	17.86	358	PK	PASS	Vertical	
6	2390.00	11.29	34.13	45.42	54.00	8.58	306	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

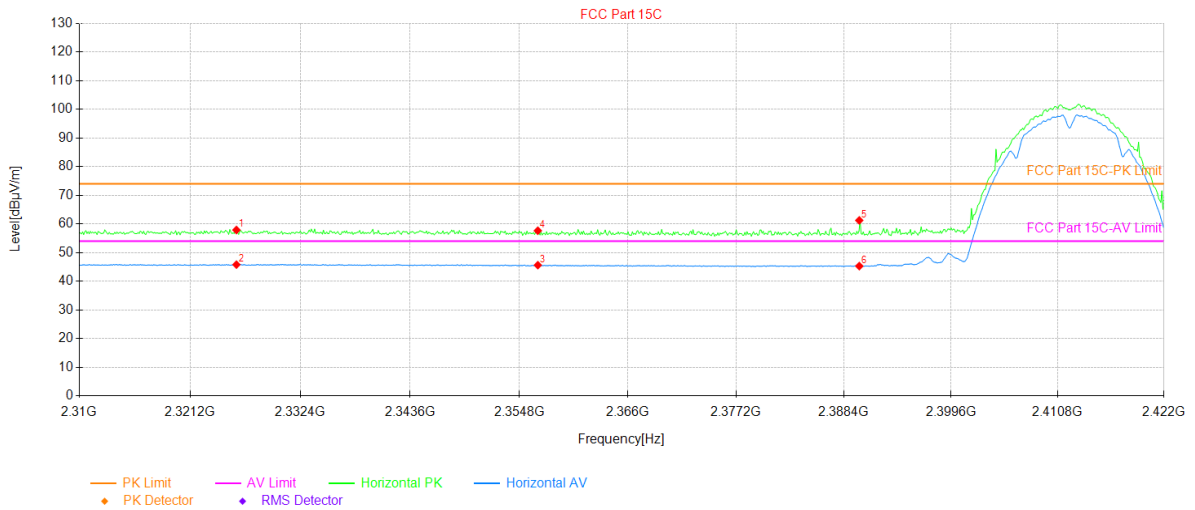


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2325.90	23.69	34.17	57.86	74.00	16.14	210	PK	PASS	Horizontal
2	2325.90	11.62	34.17	45.79	54.00	8.21	136	AV	PASS	Horizontal
3	2356.70	11.41	34.20	45.61	54.00	8.39	307	AV	PASS	Horizontal
4	2356.70	23.41	34.20	57.61	74.00	16.39	23	PK	PASS	Horizontal
5	2390.00	27.10	34.13	61.23	74.00	12.77	274	PK	PASS	Horizontal
6	2390.00	11.14	34.13	45.27	54.00	8.73	86	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

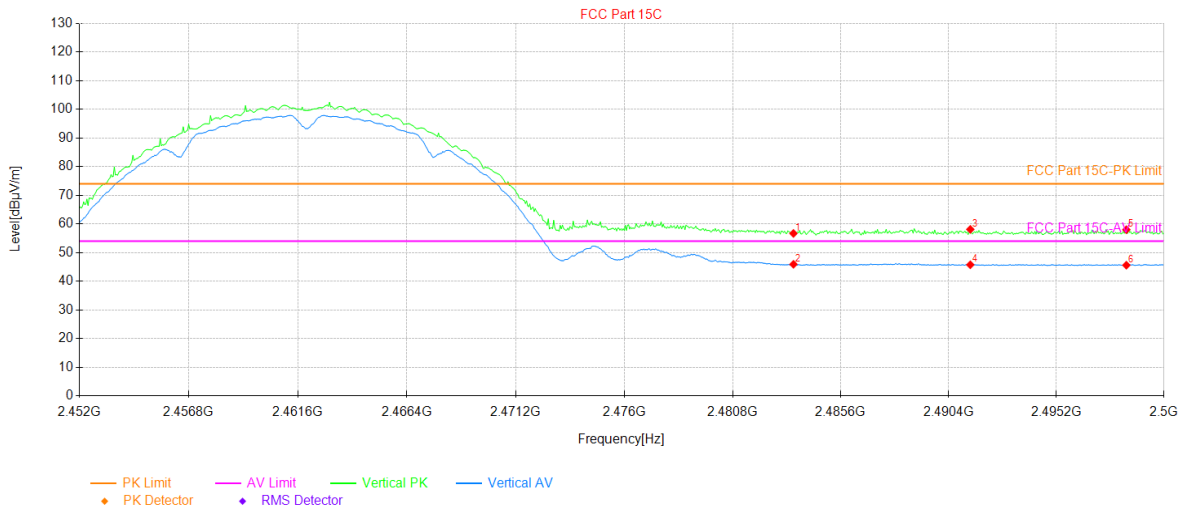


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	22.16	34.51	56.67	74.00	17.33	73	PK	PASS	Vertical
2	2483.50	11.39	34.51	45.90	54.00	8.10	58	AV	PASS	Vertical
3	2491.36	23.56	34.52	58.08	74.00	15.92	197	PK	PASS	Vertical
4	2491.36	11.22	34.52	45.74	54.00	8.26	167	AV	PASS	Vertical
5	2498.32	23.44	34.53	57.97	74.00	16.03	212	PK	PASS	Vertical
6	2498.32	11.05	34.53	45.58	54.00	8.42	337	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

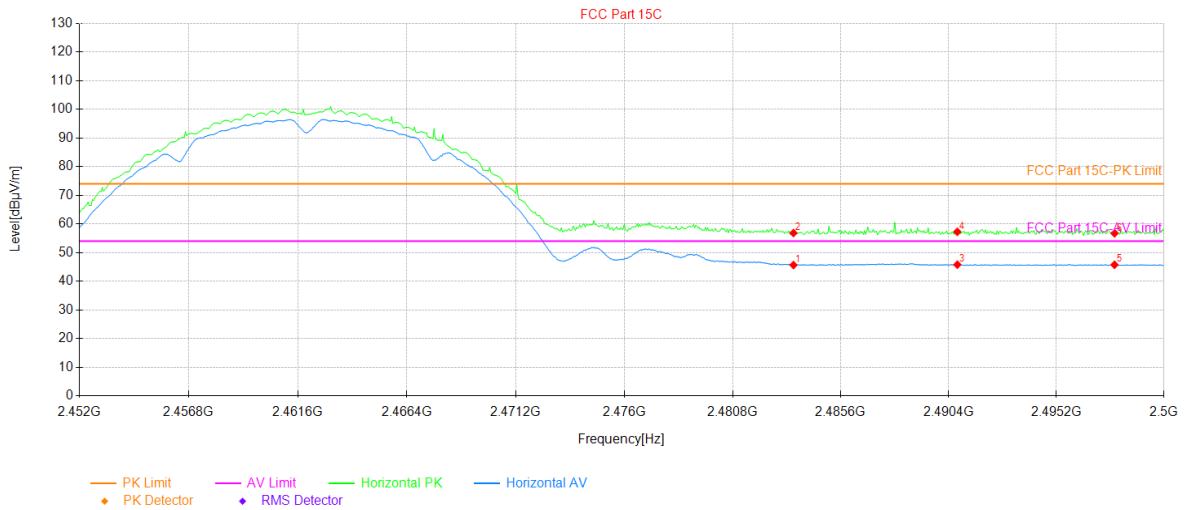


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	11.12	34.51	45.63	54.00	8.37	185	AV	PASS	Horizontal
2	2483.50	22.30	34.51	56.81	74.00	17.19	343	PK	PASS	Horizontal
3	2490.78	11.26	34.52	45.78	54.00	8.22	31	AV	PASS	Horizontal
4	2490.78	22.71	34.52	57.23	74.00	16.77	166	PK	PASS	Horizontal
5	2497.79	11.21	34.53	45.74	54.00	8.26	133	AV	PASS	Horizontal
6	2497.79	22.15	34.53	56.68	74.00	17.32	211	PK	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

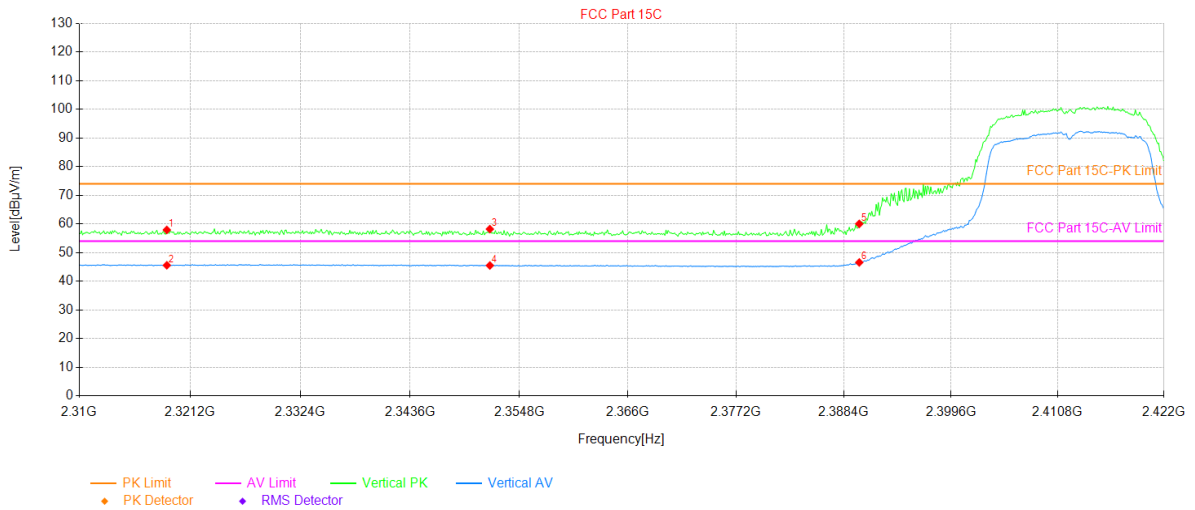


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2318.85	23.79	34.10	57.89	74.00	16.11	254	PK	PASS	Vertical	
2	2318.85	11.46	34.10	45.56	54.00	8.44	88	AV	PASS	Vertical	
3	2351.78	23.97	34.21	58.18	74.00	15.82	160	PK	PASS	Vertical	
4	2351.78	11.28	34.21	45.49	54.00	8.51	276	AV	PASS	Vertical	
5	2390.00	25.87	34.13	60.00	74.00	14.00	84	PK	PASS	Vertical	
6	2390.00	12.43	34.13	46.56	54.00	7.44	80	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

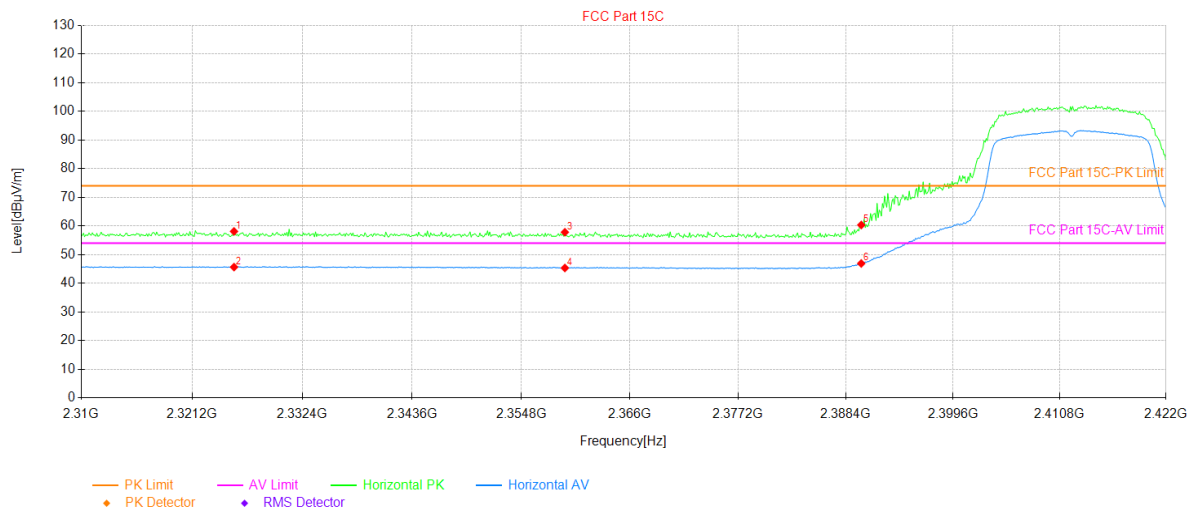


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2325.46	23.90	34.17	58.07	74.00	15.93	40	PK	PASS	Horizontal
2	2325.46	11.45	34.17	45.62	54.00	8.38	128	AV	PASS	Horizontal
3	2359.28	23.59	34.20	57.79	74.00	16.21	139	PK	PASS	Horizontal
4	2359.28	11.11	34.20	45.31	54.00	8.69	291	AV	PASS	Horizontal
5	2390.00	26.18	34.13	60.31	74.00	13.69	185	PK	PASS	Horizontal
6	2390.00	12.76	34.13	46.89	54.00	7.11	169	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

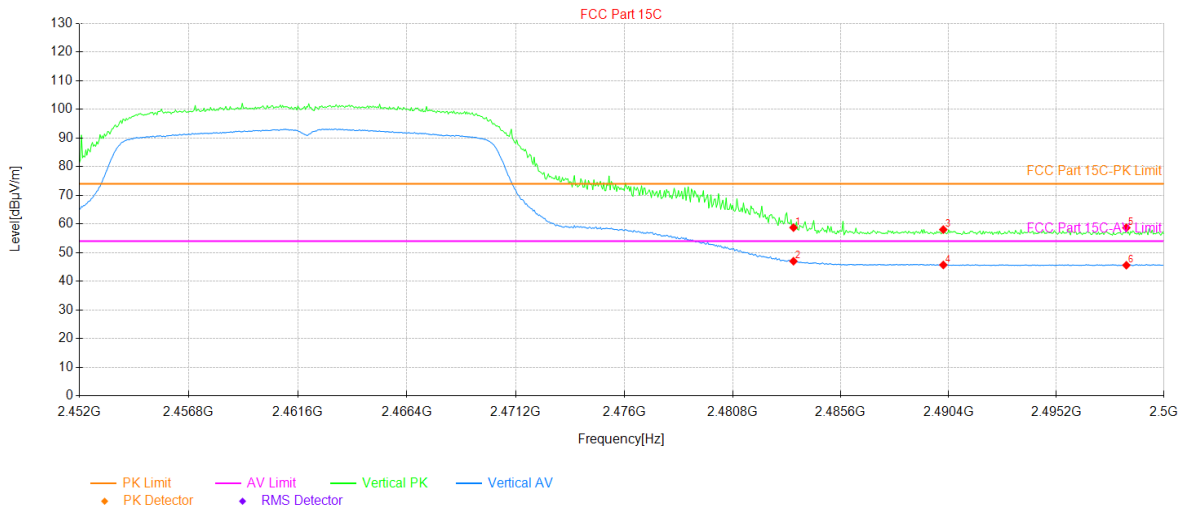


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2483.50	24.19	34.51	58.70	74.00	15.30	80	PK	PASS	Vertical	
2	2483.50	12.46	34.51	46.97	54.00	7.03	88	AV	PASS	Vertical	
3	2490.16	23.49	34.52	58.01	74.00	15.99	309	PK	PASS	Vertical	
4	2490.16	11.16	34.52	45.68	54.00	8.32	46	AV	PASS	Vertical	
5	2498.32	24.13	34.53	58.66	74.00	15.34	328	PK	PASS	Vertical	
6	2498.32	11.04	34.53	45.57	54.00	8.43	190	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

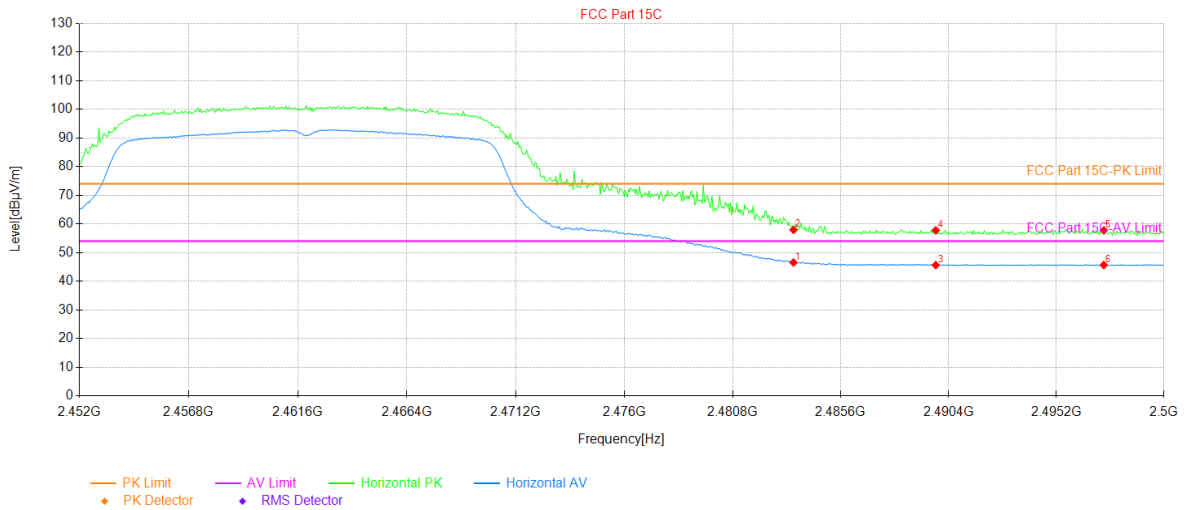


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	12.02	34.51	46.53	54.00	7.47	322	AV	PASS	Horizontal
2	2483.50	23.40	34.51	57.91	74.00	16.09	262	PK	PASS	Horizontal
3	2489.82	11.10	34.52	45.62	54.00	8.38	330	AV	PASS	Horizontal
4	2489.82	23.22	34.52	57.74	74.00	16.26	0	PK	PASS	Horizontal
5	2497.31	23.20	34.53	57.73	74.00	16.27	81	PK	PASS	Horizontal
6	2497.31	11.13	34.53	45.66	54.00	8.34	183	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

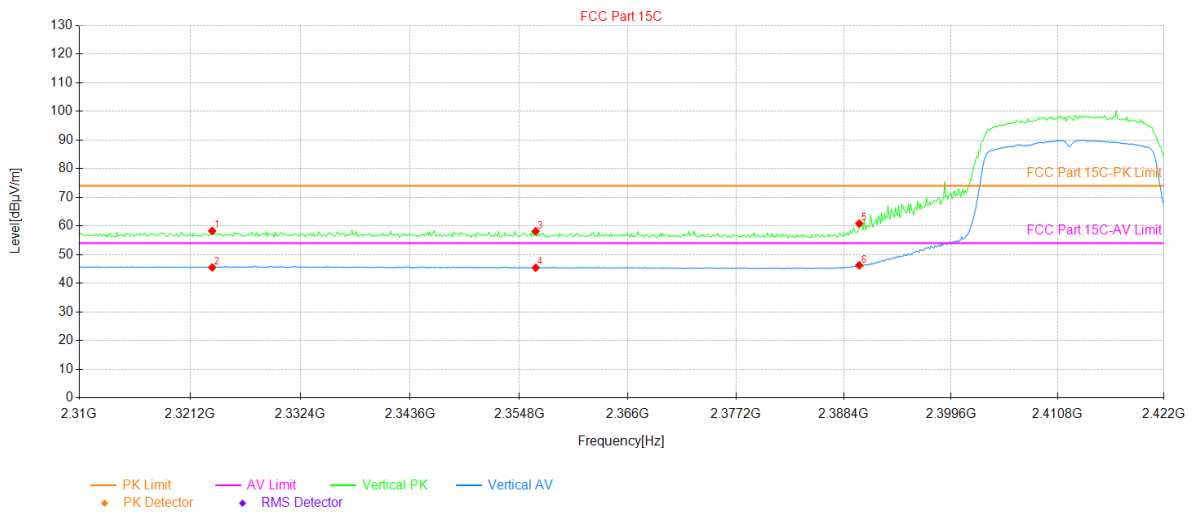


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2323.44	24.07	34.15	58.22	74.00	15.78	246	PK	PASS	Vertical
2	2323.44	11.35	34.15	45.50	54.00	8.50	208	AV	PASS	Vertical
3	2356.48	23.90	34.20	58.10	74.00	15.90	318	PK	PASS	Vertical
4	2356.48	11.21	34.20	45.41	54.00	8.59	359	AV	PASS	Vertical
5	2390.00	26.67	34.13	60.80	74.00	13.20	302	PK	PASS	Vertical
6	2390.00	12.11	34.13	46.24	54.00	7.76	276	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

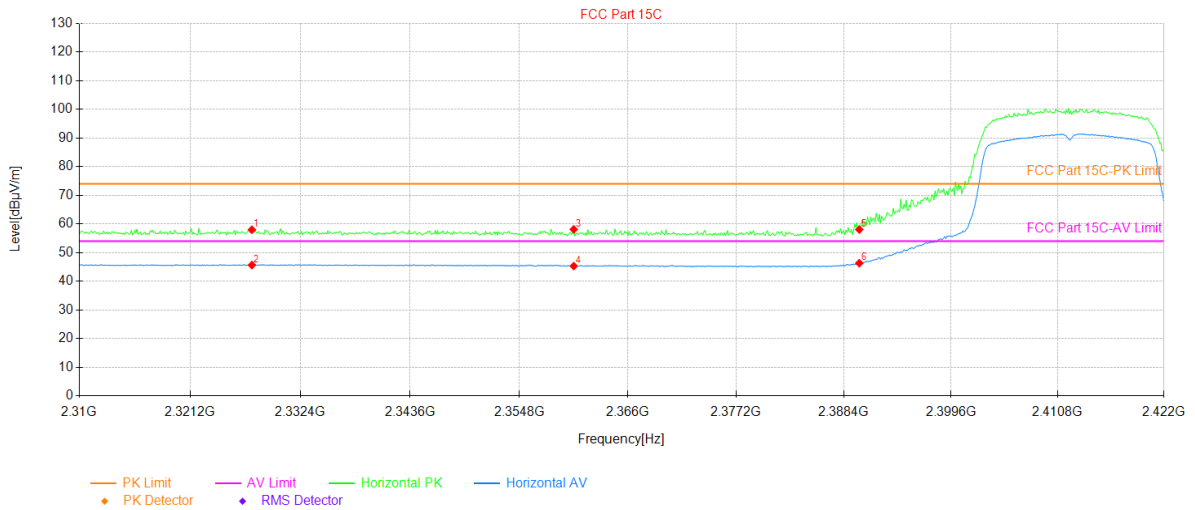


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2327.47	23.77	34.19	57.96	74.00	16.04	41	PK	PASS	Horizontal
2	2327.47	11.45	34.19	45.64	54.00	8.36	202	AV	PASS	Horizontal
3	2360.40	23.90	34.19	58.09	74.00	15.91	206	PK	PASS	Horizontal
4	2360.40	11.08	34.19	45.27	54.00	8.73	123	AV	PASS	Horizontal
5	2390.00	23.90	34.13	58.03	74.00	15.97	169	PK	PASS	Horizontal
6	2390.00	12.17	34.13	46.30	54.00	7.70	154	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

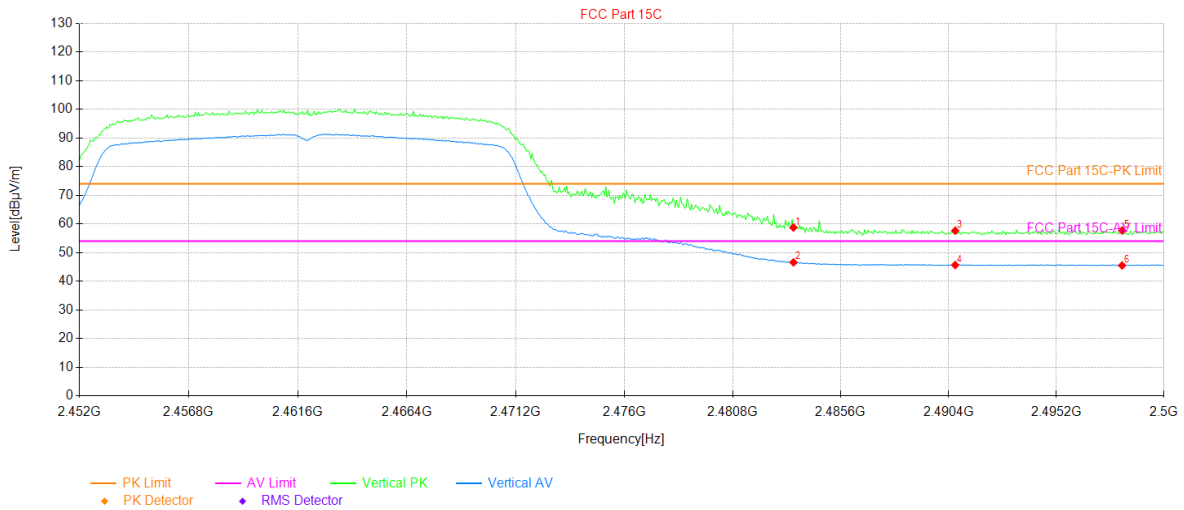


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	24.21	34.51	58.72	74.00	15.28	91	PK	PASS	Vertical
2	2483.50	12.06	34.51	46.57	54.00	7.43	80	AV	PASS	Vertical
3	2490.69	23.09	34.52	57.61	74.00	16.39	31	PK	PASS	Vertical
4	2490.69	11.13	34.52	45.65	54.00	8.35	294	AV	PASS	Vertical
5	2498.13	23.15	34.53	57.68	74.00	16.32	94	PK	PASS	Vertical
6	2498.13	10.97	34.53	45.50	54.00	8.50	128	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

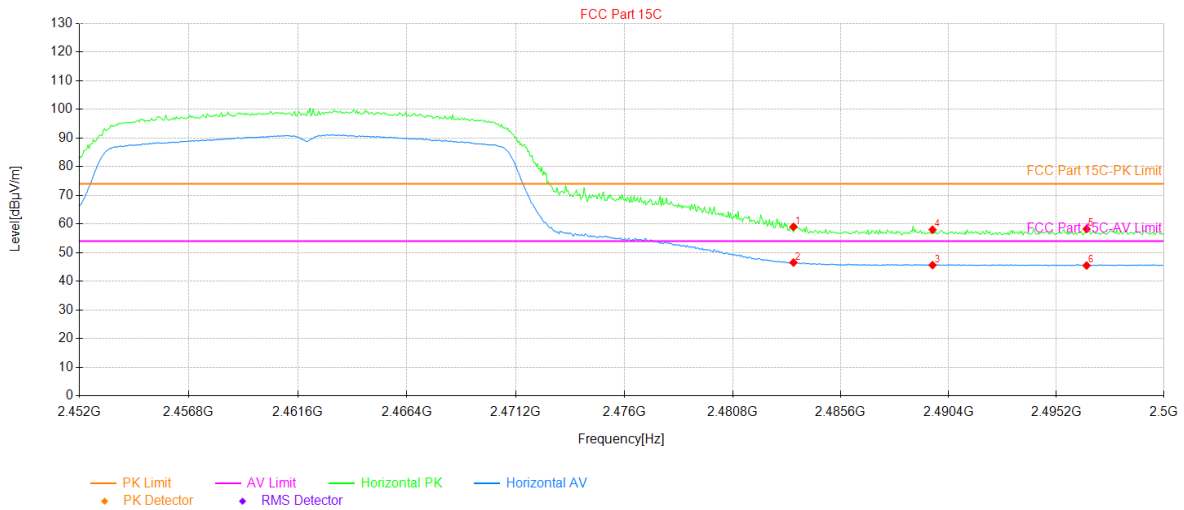


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	24.44	34.51	58.95	74.00	15.05	156	PK	PASS	Horizontal
2	2483.50	11.99	34.51	46.50	54.00	7.50	303	AV	PASS	Horizontal
3	2489.68	11.10	34.52	45.62	54.00	8.38	35	AV	PASS	Horizontal
4	2489.68	23.45	34.52	57.97	74.00	16.03	201	PK	PASS	Horizontal
5	2496.54	23.68	34.52	58.20	74.00	15.80	273	PK	PASS	Horizontal
6	2496.54	10.96	34.52	45.48	54.00	8.52	92	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

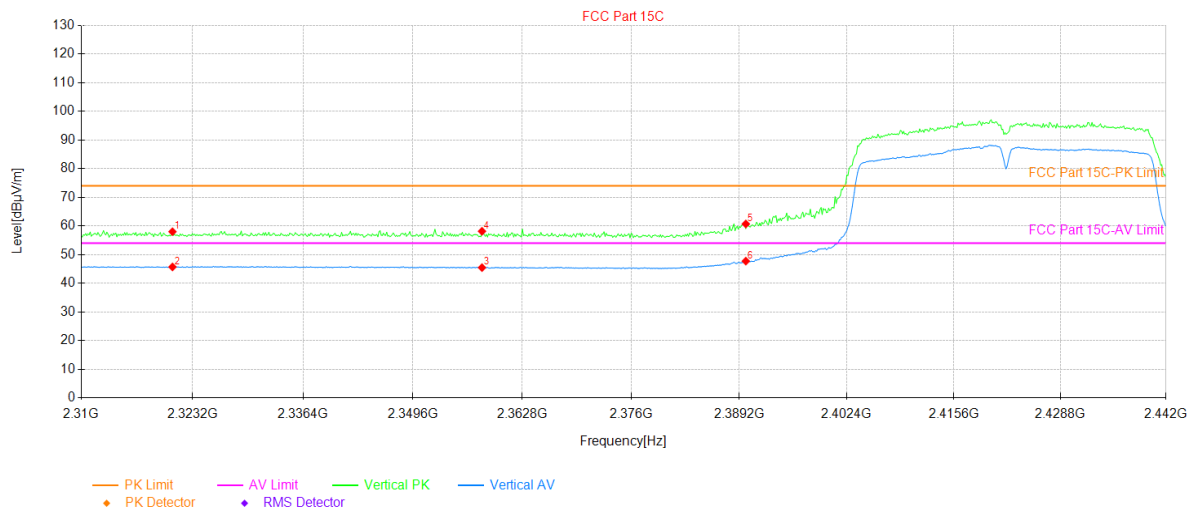


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2320.82	23.85	34.12	57.97	74.00	16.03	325	PK	PASS	Vertical	
2	2320.82	11.55	34.12	45.67	54.00	8.33	53	AV	PASS	Vertical	
3	2357.92	11.25	34.20	45.45	54.00	8.55	288	AV	PASS	Vertical	
4	2357.92	23.92	34.20	58.12	74.00	15.88	19	PK	PASS	Vertical	
5	2390.00	26.55	34.13	60.68	74.00	13.32	307	PK	PASS	Vertical	
6	2390.00	13.58	34.13	47.71	54.00	6.29	71	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

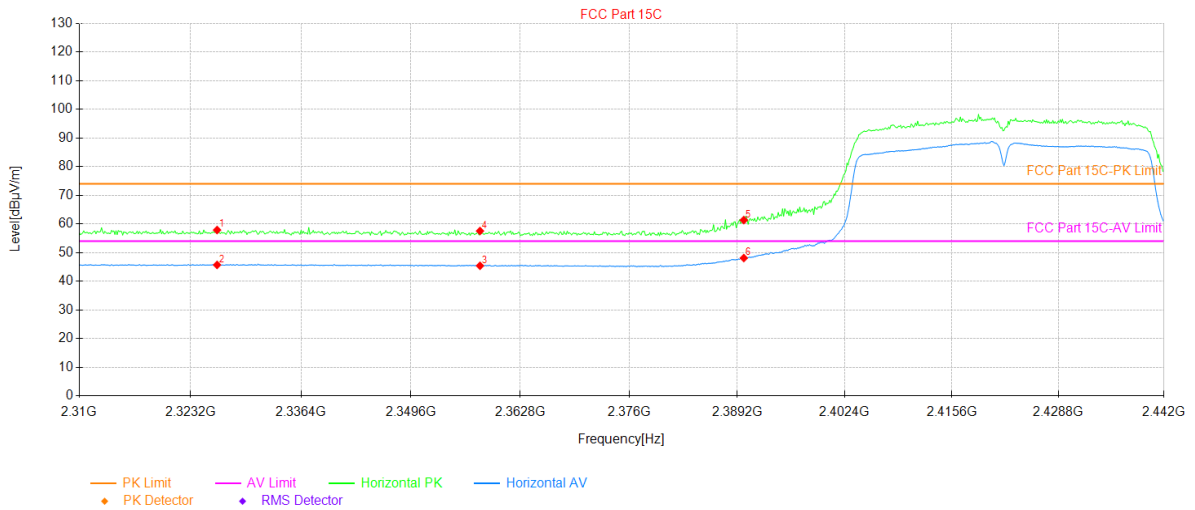


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2326.37	23.67	34.19	57.86	74.00	16.14	30	PK	PASS	Horizontal
2	2326.37	11.49	34.19	45.68	54.00	8.32	228	AV	PASS	Horizontal
3	2357.92	11.18	34.20	45.38	54.00	8.62	71	AV	PASS	Horizontal
4	2357.92	23.32	34.20	57.52	74.00	16.48	296	PK	PASS	Horizontal
5	2390.00	27.19	34.13	61.32	74.00	12.68	172	PK	PASS	Horizontal
6	2390.00	13.95	34.13	48.08	54.00	5.92	176	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

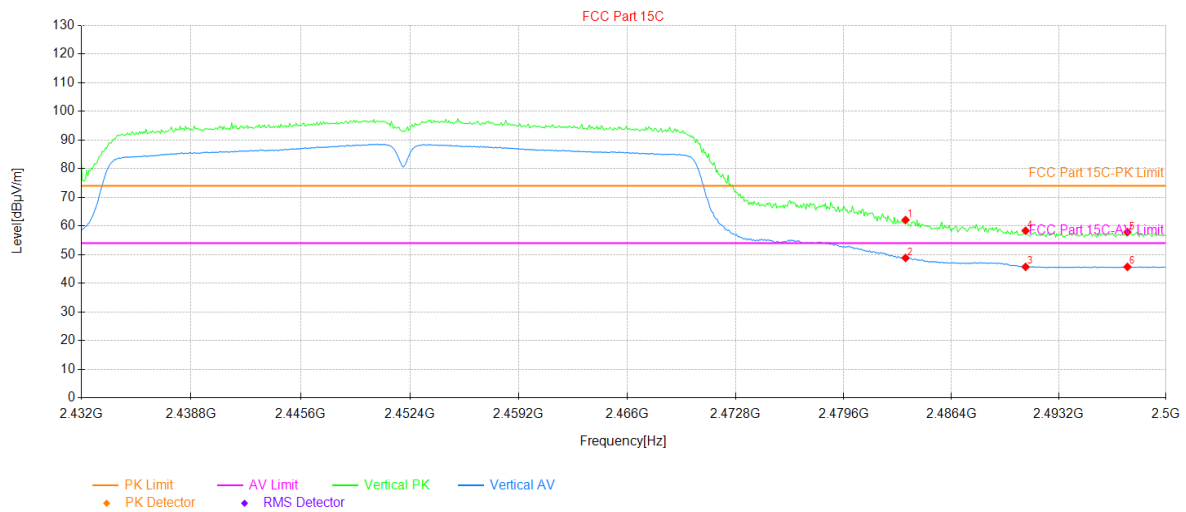


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	27.55	34.51	62.06	74.00	11.94	77	PK	PASS	Vertical
2	2483.50	14.31	34.51	48.82	54.00	5.18	81	AV	PASS	Vertical
3	2491.09	11.19	34.52	45.71	54.00	8.29	92	AV	PASS	Vertical
4	2491.09	23.79	34.52	58.31	74.00	15.69	73	PK	PASS	Vertical
5	2497.55	23.31	34.53	57.84	74.00	16.16	307	PK	PASS	Vertical
6	2497.55	11.16	34.53	45.69	54.00	8.31	221	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

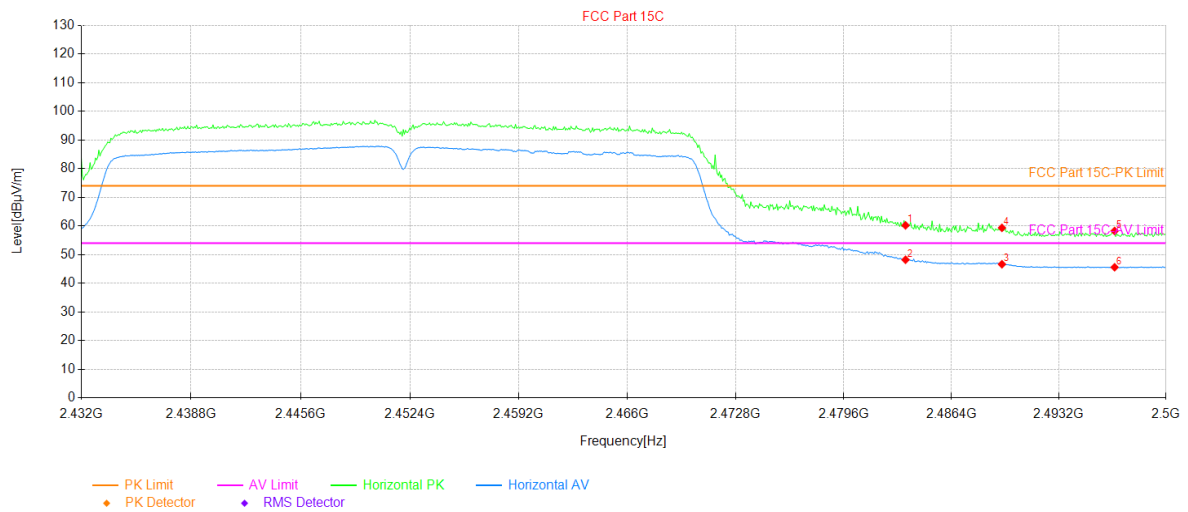


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	25.67	34.51	60.18	74.00	13.82	289	PK	PASS	Horizontal
2	2483.50	13.67	34.51	48.18	54.00	5.82	326	AV	PASS	Horizontal
3	2489.60	12.09	34.52	46.61	54.00	7.39	326	AV	PASS	Horizontal
4	2489.60	24.80	34.52	59.32	74.00	14.68	326	PK	PASS	Horizontal
5	2496.74	23.71	34.52	58.23	74.00	15.77	40	PK	PASS	Horizontal
6	2496.74	11.05	34.52	45.57	54.00	8.43	70	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

**ANT14:**

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

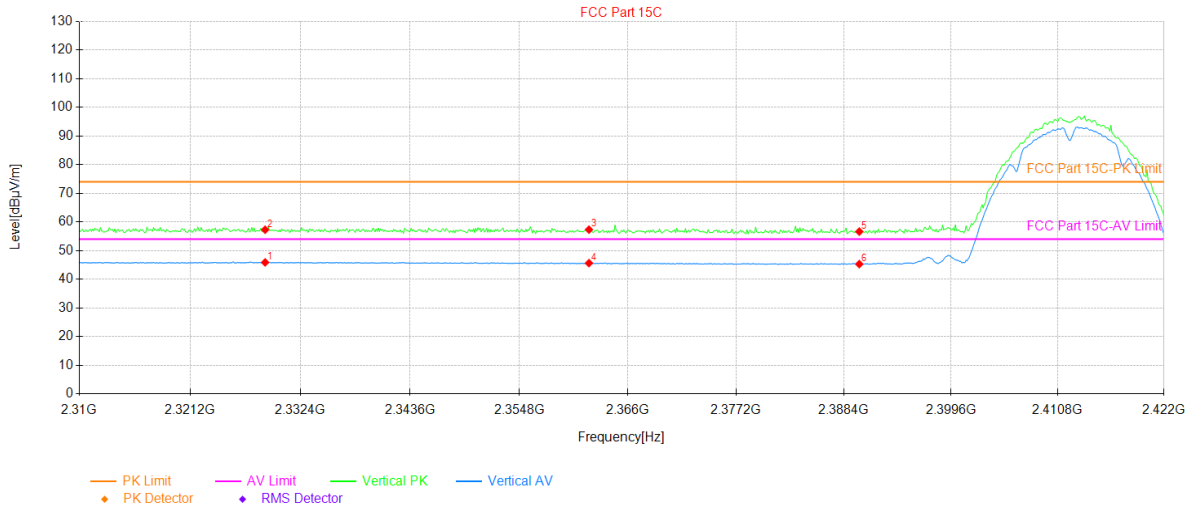


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2328.82	11.66	34.21	45.87	54.00	8.13	167	AV	PASS	Vertical
2	2328.82	23.05	34.21	57.26	74.00	16.74	2	PK	PASS	Vertical
3	2361.97	23.11	34.19	57.30	74.00	16.70	326	PK	PASS	Vertical
4	2361.97	11.42	34.19	45.61	54.00	8.39	205	AV	PASS	Vertical
5	2390.00	22.48	34.13	56.61	74.00	17.39	2	PK	PASS	Vertical
6	2390.00	11.15	34.13	45.28	54.00	8.72	329	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

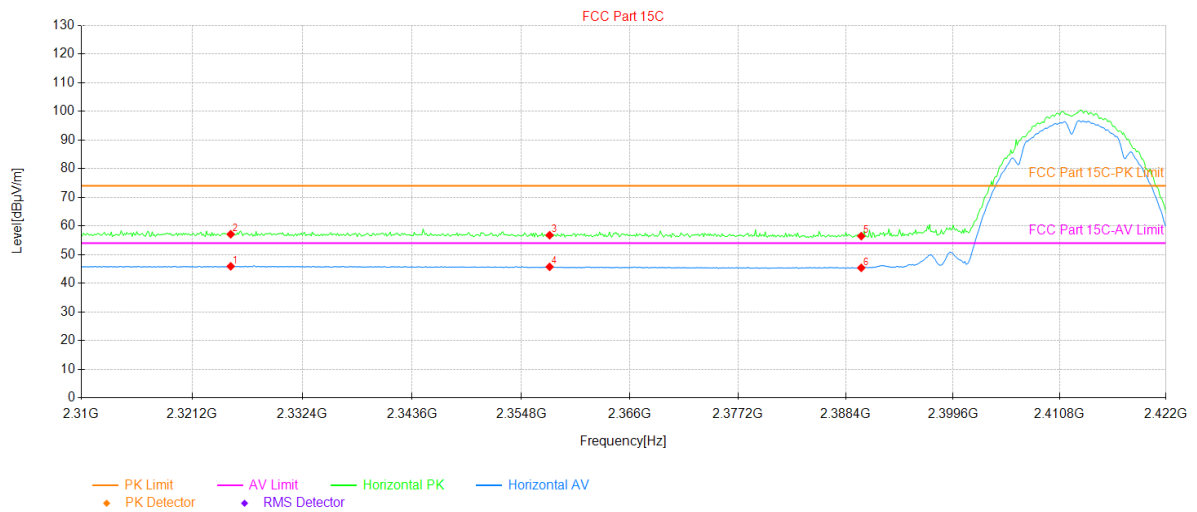


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2325.12	11.72	34.17	45.89	54.00	8.11	278	AV	PASS	Horizontal
2	2325.12	22.92	34.17	57.09	74.00	16.91	23	PK	PASS	Horizontal
3	2357.71	22.53	34.21	56.74	74.00	17.26	188	PK	PASS	Horizontal
4	2357.71	11.50	34.21	45.71	54.00	8.29	278	AV	PASS	Horizontal
5	2390.00	22.29	34.13	56.42	74.00	17.58	132	PK	PASS	Horizontal
6	2390.00	11.24	34.13	45.37	54.00	8.63	57	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

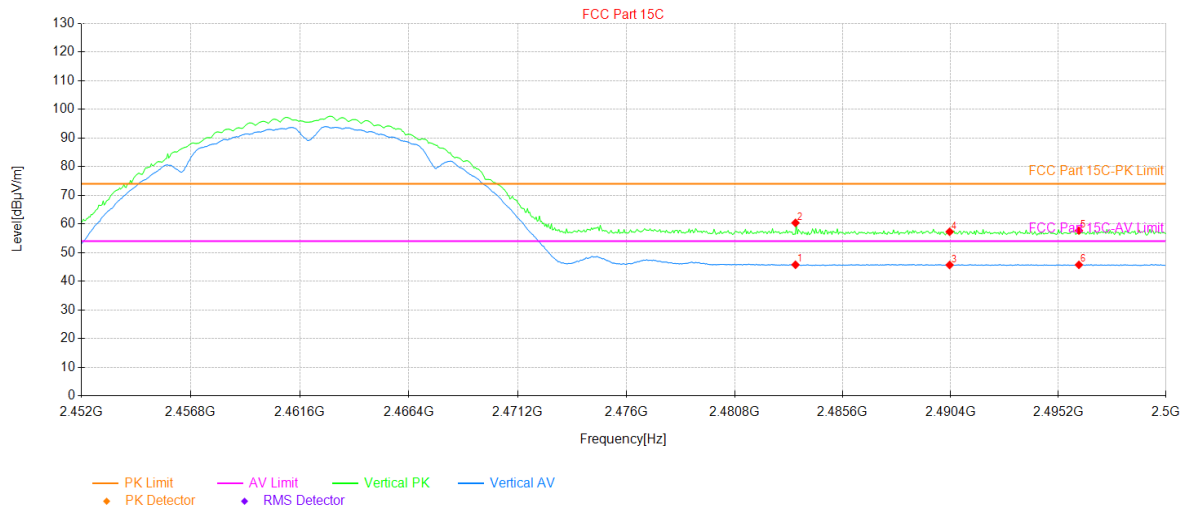


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	11.23	34.51	45.74	54.00	8.26	4	AV	PASS	Vertical
2	2483.50	25.85	34.51	60.36	74.00	13.64	126	PK	PASS	Vertical
3	2490.35	11.15	34.52	45.67	54.00	8.33	89	AV	PASS	Vertical
4	2490.35	22.74	34.52	57.26	74.00	16.74	252	PK	PASS	Vertical
5	2496.11	23.15	34.52	57.67	74.00	16.33	352	PK	PASS	Vertical
6	2496.11	11.20	34.52	45.72	54.00	8.28	70	AV	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11b Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

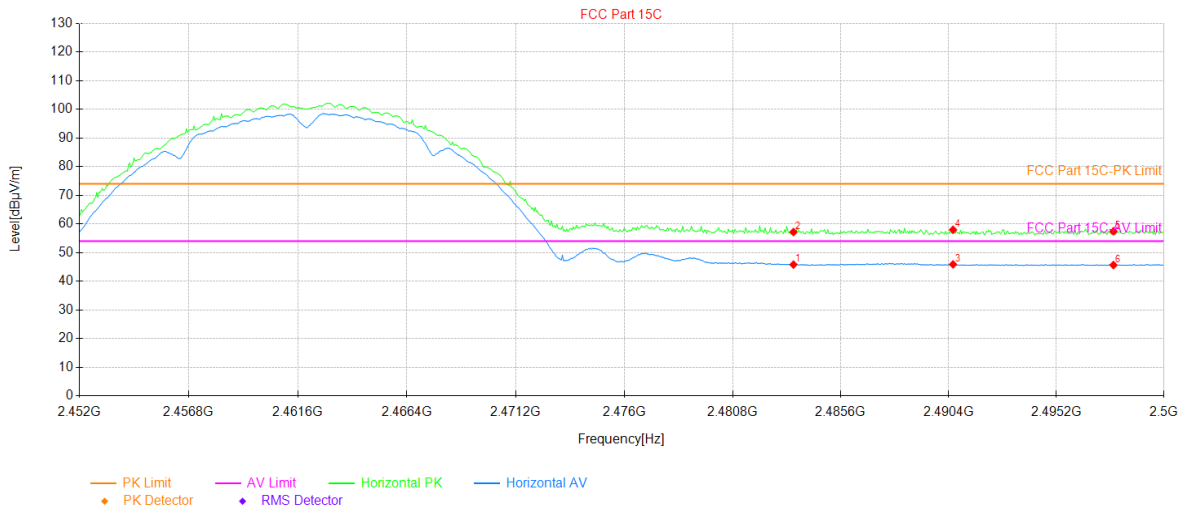


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	11.29	34.51	45.80	54.00	8.20	8	AV	PASS	Horizontal
2	2483.50	22.64	34.51	57.15	74.00	16.85	205	PK	PASS	Horizontal
3	2490.59	11.35	34.52	45.87	54.00	8.13	302	AV	PASS	Horizontal
4	2490.59	23.42	34.52	57.94	74.00	16.06	239	PK	PASS	Horizontal
5	2497.74	22.89	34.53	57.42	74.00	16.58	179	PK	PASS	Horizontal
6	2497.74	11.11	34.53	45.64	54.00	8.36	78	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

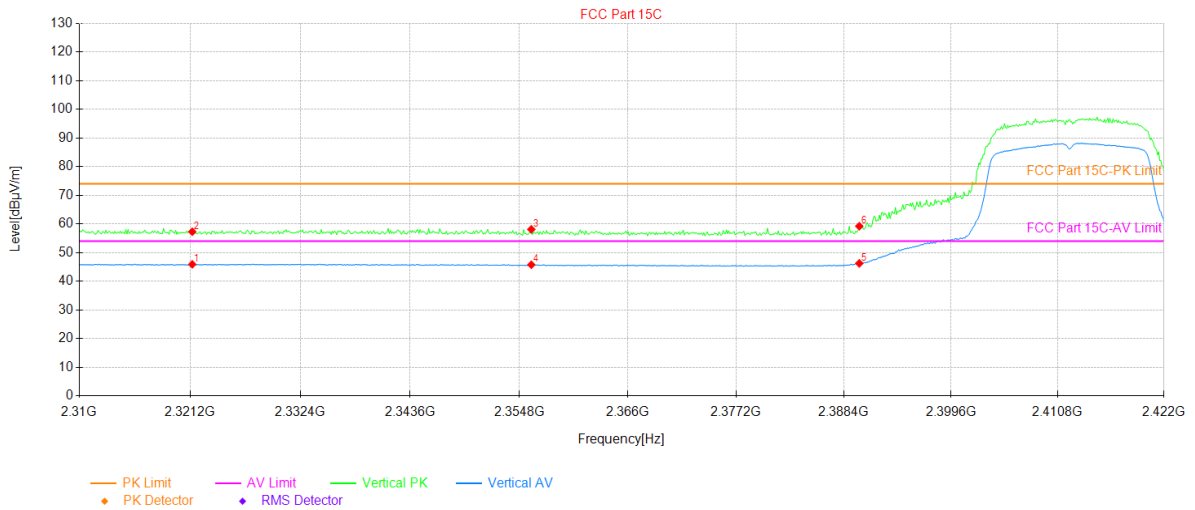


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2321.42	11.76	34.13	45.89	54.00	8.11	68	AV	PASS	Vertical
2	2321.42	23.13	34.13	57.26	74.00	16.74	129	PK	PASS	Vertical
3	2356.03	23.88	34.20	58.08	74.00	15.92	224	PK	PASS	Vertical
4	2356.03	11.55	34.20	45.75	54.00	8.25	303	AV	PASS	Vertical
5	2390.00	12.09	34.13	46.22	54.00	7.78	125	AV	PASS	Vertical
6	2390.00	25.05	34.13	59.18	74.00	14.82	133	PK	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

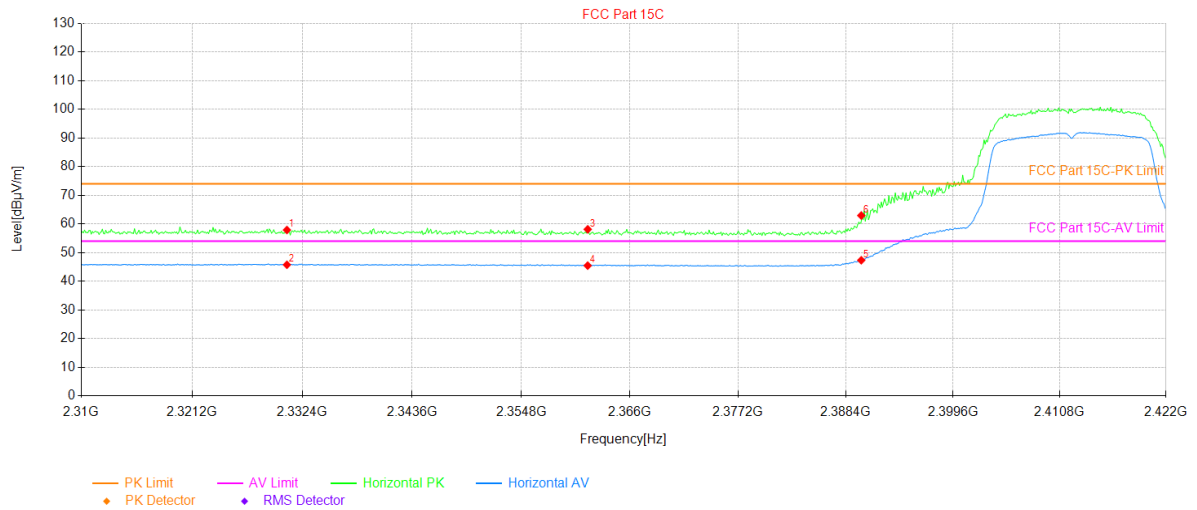


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2330.83	23.65	34.22	57.87	74.00	16.13	282	PK	PASS	Horizontal
2	2330.83	11.52	34.22	45.74	54.00	8.26	297	AV	PASS	Horizontal
3	2361.63	23.91	34.19	58.10	74.00	15.90	214	PK	PASS	Horizontal
4	2361.63	11.25	34.19	45.44	54.00	8.56	305	AV	PASS	Horizontal
5	2390.00	13.19	34.13	47.32	54.00	6.68	32	AV	PASS	Horizontal
6	2390.00	28.78	34.13	62.91	74.00	11.09	112	PK	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

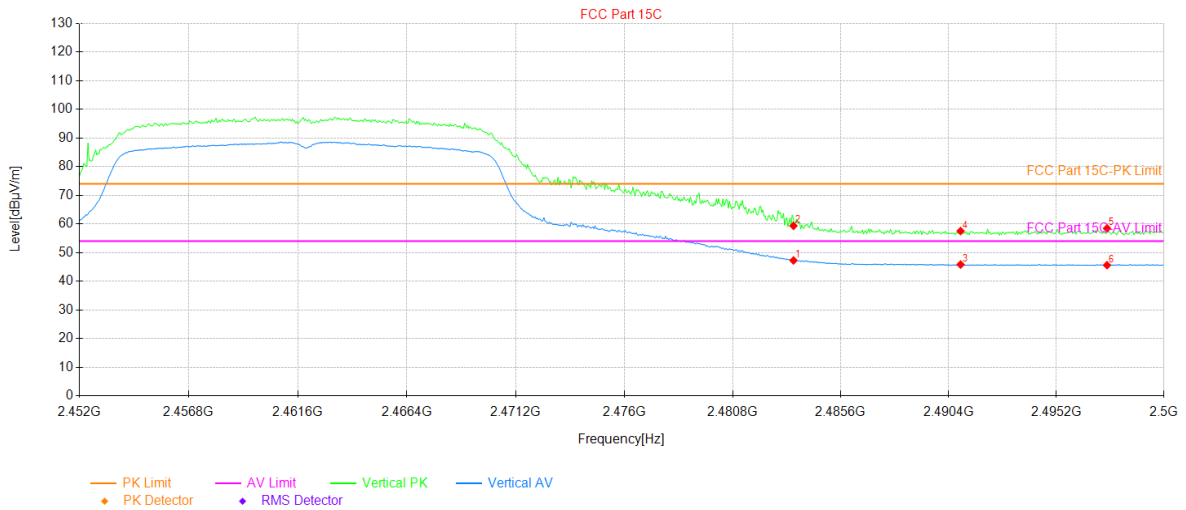


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2483.50	12.73	34.51	47.24	54.00	6.76	140	AV	PASS	Vertical	
2	2483.50	24.81	34.51	59.32	74.00	14.68	126	PK	PASS	Vertical	
3	2490.93	11.30	34.52	45.82	54.00	8.18	278	AV	PASS	Vertical	
4	2490.93	22.98	34.52	57.50	74.00	16.50	133	PK	PASS	Vertical	
5	2497.46	23.91	34.53	58.44	74.00	15.56	237	PK	PASS	Vertical	
6	2497.46	11.06	34.53	45.59	54.00	8.41	304	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11g Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

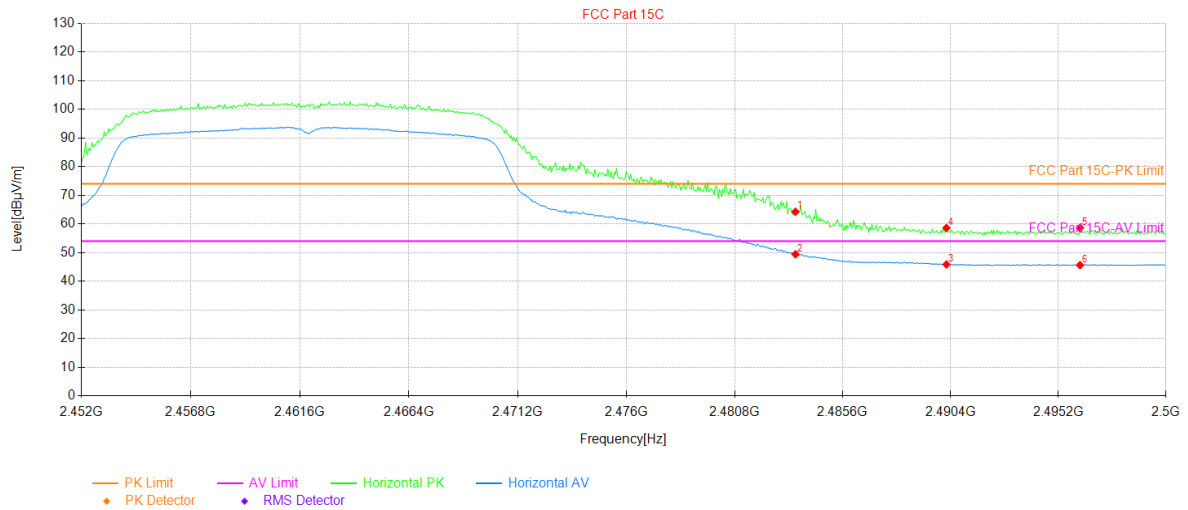


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	29.72	34.51	64.23	74.00	9.77	26	PK	PASS	Horizontal
2	2483.50	14.89	34.51	49.40	54.00	4.60	146	AV	PASS	Horizontal
3	2490.21	11.34	34.52	45.86	54.00	8.14	359	AV	PASS	Horizontal
4	2490.21	24.05	34.52	58.57	74.00	15.43	2	PK	PASS	Horizontal
5	2496.16	24.08	34.52	58.60	74.00	15.40	168	PK	PASS	Horizontal
6	2496.16	11.09	34.52	45.61	54.00	8.39	295	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

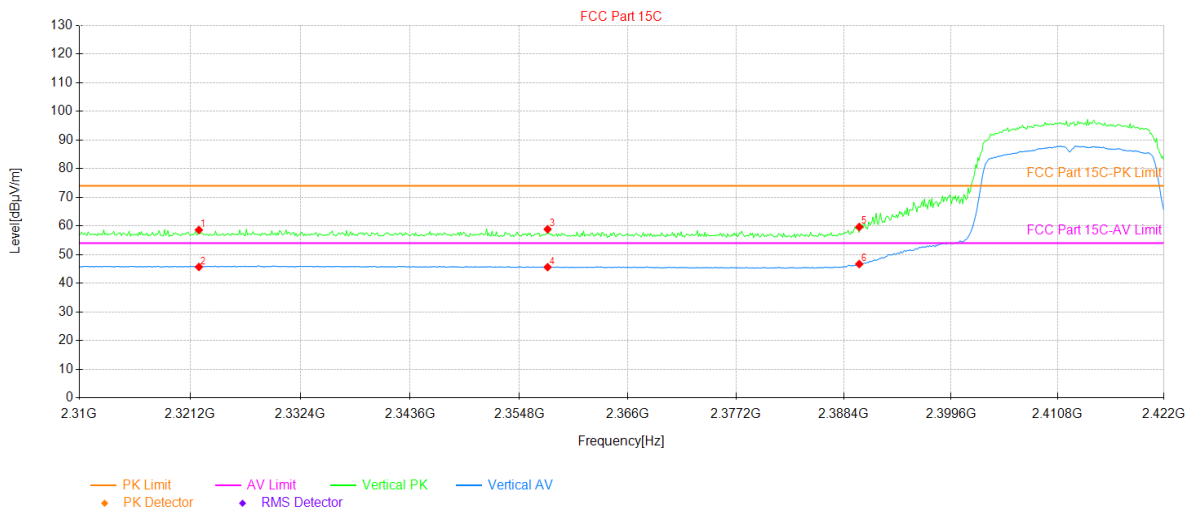


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2322.10	24.43	34.14	58.57	74.00	15.43	15	PK	PASS	Vertical	
2	2322.10	11.54	34.14	45.68	54.00	8.32	41	AV	PASS	Vertical	
3	2357.71	24.62	34.21	58.83	74.00	15.17	174	PK	PASS	Vertical	
4	2357.71	11.39	34.21	45.60	54.00	8.40	300	AV	PASS	Vertical	
5	2390.00	25.50	34.13	59.63	74.00	14.37	93	PK	PASS	Vertical	
6	2390.00	12.55	34.13	46.68	54.00	7.32	115	AV	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Pre-amplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

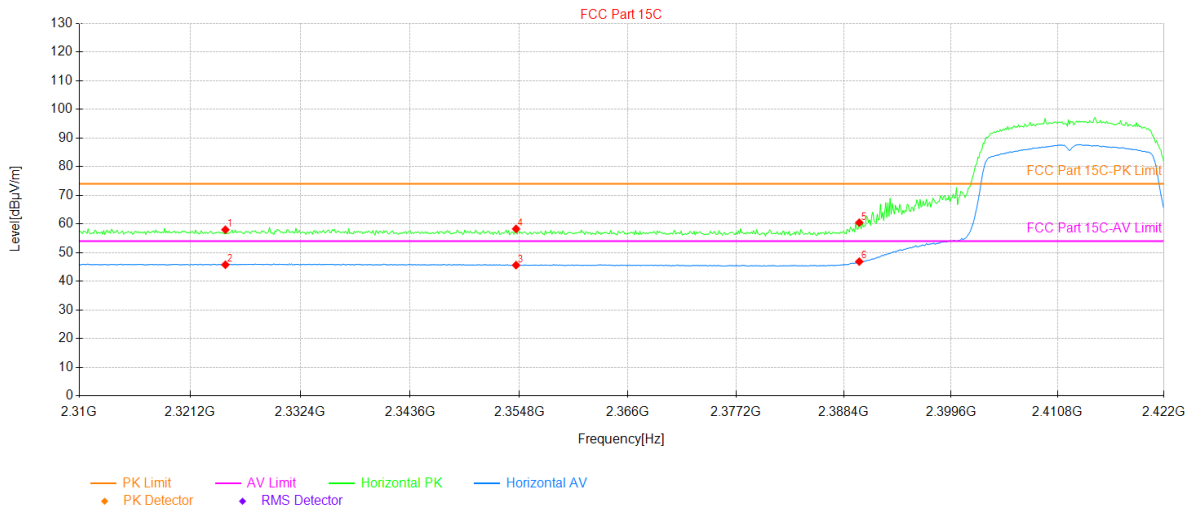


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2324.78	23.80	34.16	57.96	74.00	16.04	189	PK	PASS	Horizontal
2	2324.78	11.59	34.16	45.75	54.00	8.25	41	AV	PASS	Horizontal
3	2354.46	11.39	34.21	45.60	54.00	8.40	74	AV	PASS	Horizontal
4	2354.46	24.04	34.21	58.25	74.00	15.75	241	PK	PASS	Horizontal
5	2390.00	26.30	34.13	60.43	74.00	13.57	119	PK	PASS	Horizontal
6	2390.00	12.72	34.13	46.85	54.00	7.15	115	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

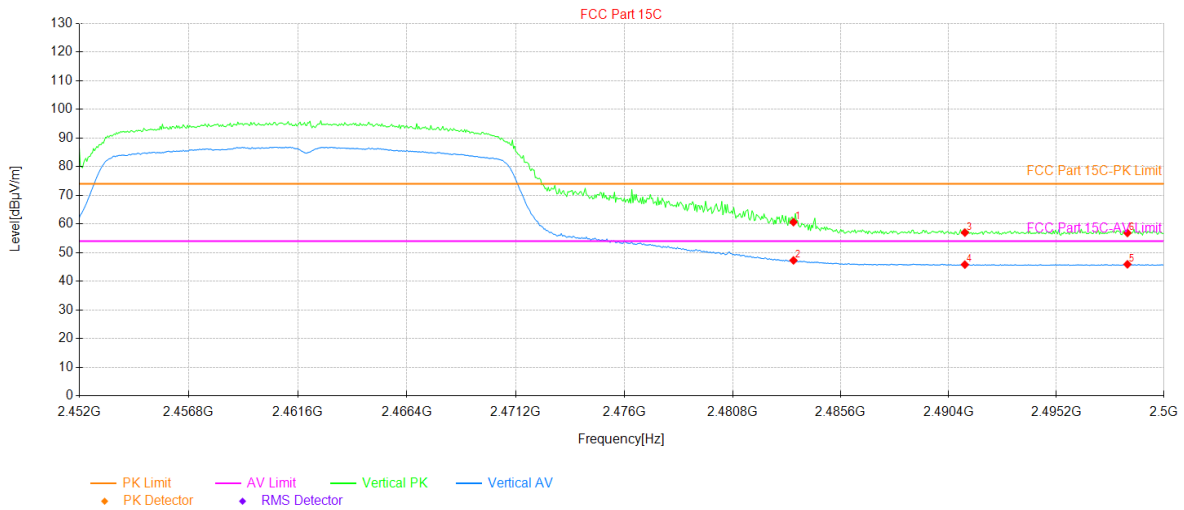


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	26.10	34.51	60.61	74.00	13.39	116	PK	PASS	Vertical
2	2483.50	12.75	34.51	47.26	54.00	6.74	123	AV	PASS	Vertical
3	2491.12	22.44	34.52	56.96	74.00	17.04	289	PK	PASS	Vertical
4	2491.12	11.27	34.52	45.79	54.00	8.21	94	AV	PASS	Vertical
5	2498.37	11.36	34.53	45.89	54.00	8.11	256	AV	PASS	Vertical
6	2498.37	22.31	34.53	56.84	74.00	17.16	8	PK	PASS	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT20 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

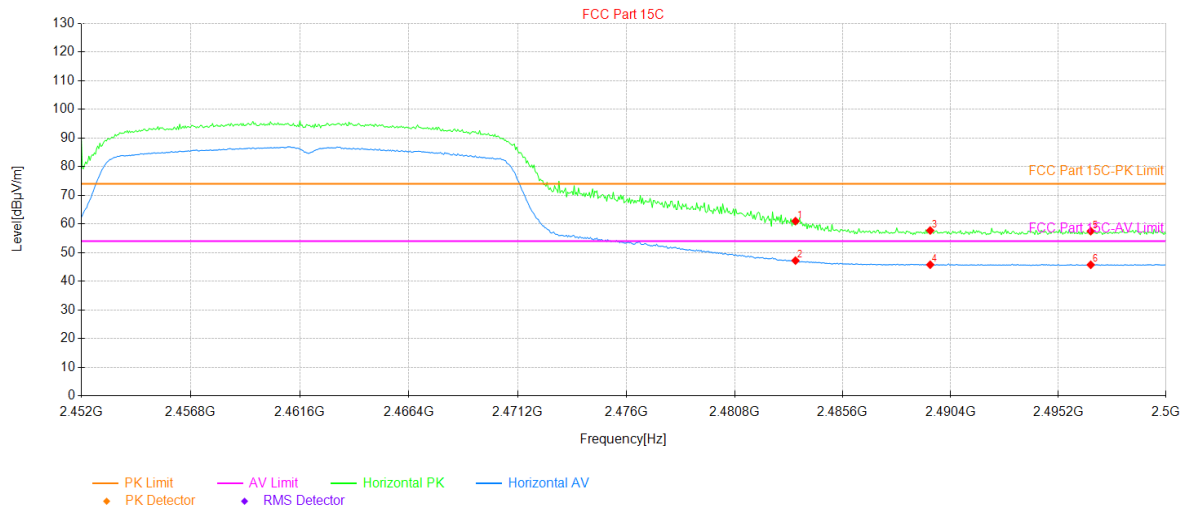


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	26.45	34.51	60.96	74.00	13.04	143	PK	PASS	Horizontal
2	2483.50	12.68	34.51	47.19	54.00	6.81	112	AV	PASS	Horizontal
3	2489.49	23.17	34.52	57.69	74.00	16.31	200	PK	PASS	Horizontal
4	2489.49	11.24	34.52	45.76	54.00	8.24	4	AV	PASS	Horizontal
5	2496.64	22.92	34.52	57.44	74.00	16.56	166	PK	PASS	Horizontal
6	2496.64	11.22	34.52	45.74	54.00	8.26	147	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

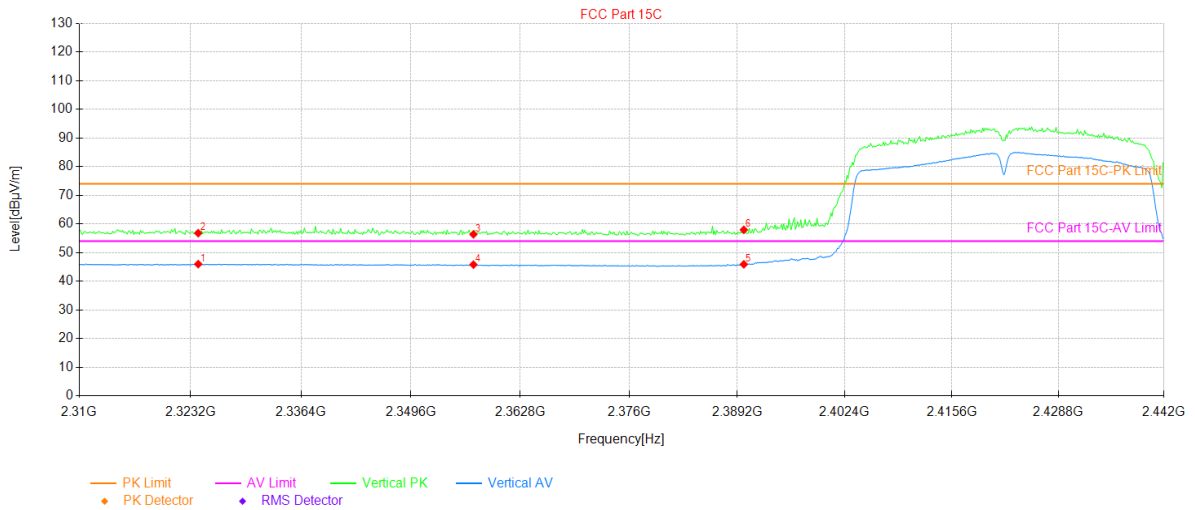


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2324.12	11.80	34.16	45.96	54.00	8.04	251	AV	PASS	Vertical	
2	2324.12	22.60	34.16	56.76	74.00	17.24	188	PK	PASS	Vertical	
3	2357.12	22.15	34.20	56.35	74.00	17.65	10	PK	PASS	Vertical	
4	2357.12	11.60	34.20	45.80	54.00	8.20	259	AV	PASS	Vertical	
5	2390.00	11.76	34.13	45.89	54.00	8.11	129	AV	PASS	Vertical	
6	2390.00	23.78	34.13	57.91	74.00	16.09	136	PK	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Lowest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

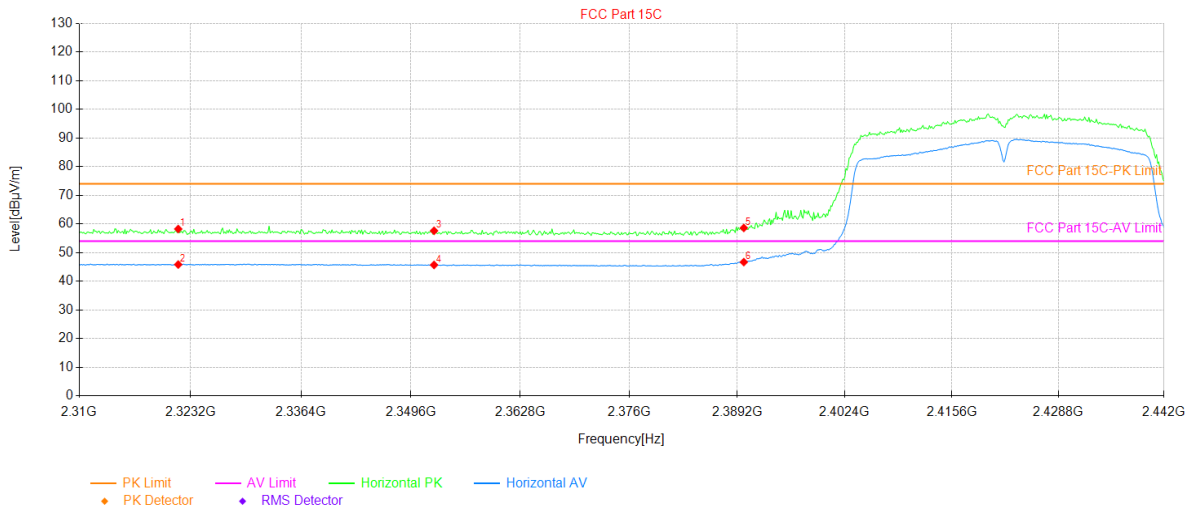


Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2321.75	24.09	34.13	58.22	74.00	15.78	255	PK	PASS	Horizontal
2	2321.75	11.69	34.13	45.82	54.00	8.18	292	AV	PASS	Horizontal
3	2352.37	23.38	34.21	57.59	74.00	16.41	210	PK	PASS	Horizontal
4	2352.37	11.47	34.21	45.68	54.00	8.32	158	AV	PASS	Horizontal
5	2390.00	24.46	34.13	58.59	74.00	15.41	117	PK	PASS	Horizontal
6	2390.00	12.55	34.13	46.68	54.00	7.32	128	AV	PASS	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

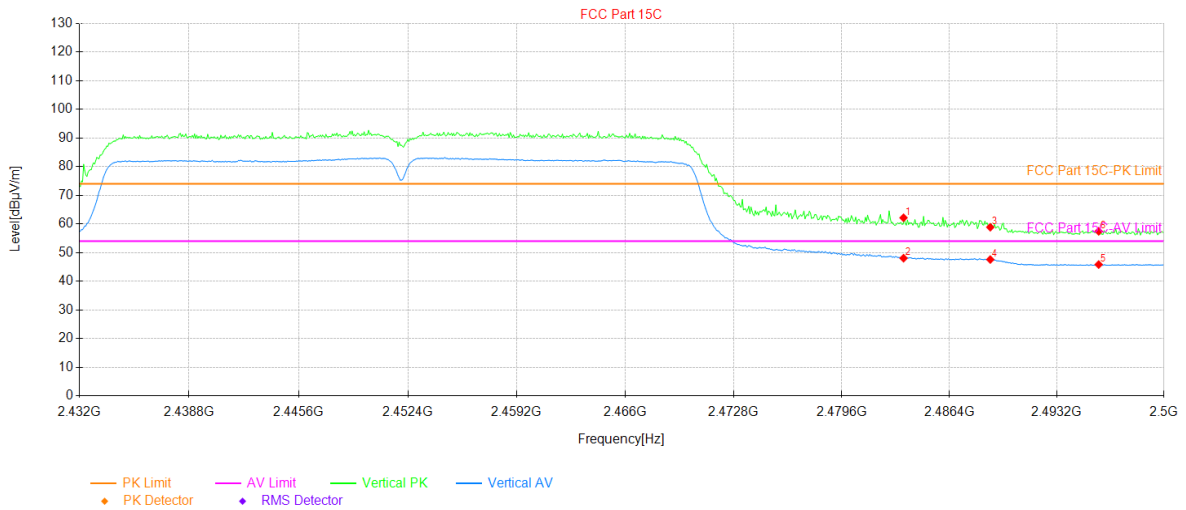


Suspected Data List											
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity	
1	2483.50	27.62	34.51	62.13	74.00	11.87	119	PK	PASS	Vertical	
2	2483.50	13.52	34.51	48.03	54.00	5.97	130	AV	PASS	Vertical	
3	2488.98	24.32	34.51	58.83	74.00	15.17	130	PK	PASS	Vertical	
4	2488.98	13.06	34.51	47.57	54.00	6.43	126	AV	PASS	Vertical	
5	2495.85	11.31	34.52	45.83	54.00	8.17	267	AV	PASS	Vertical	
6	2495.85	22.88	34.52	57.40	74.00	16.60	286	PK	PASS	Vertical	

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)



<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	802.11n-HT40 Tx mode
<b>Test Channel:</b>	Highest channel	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

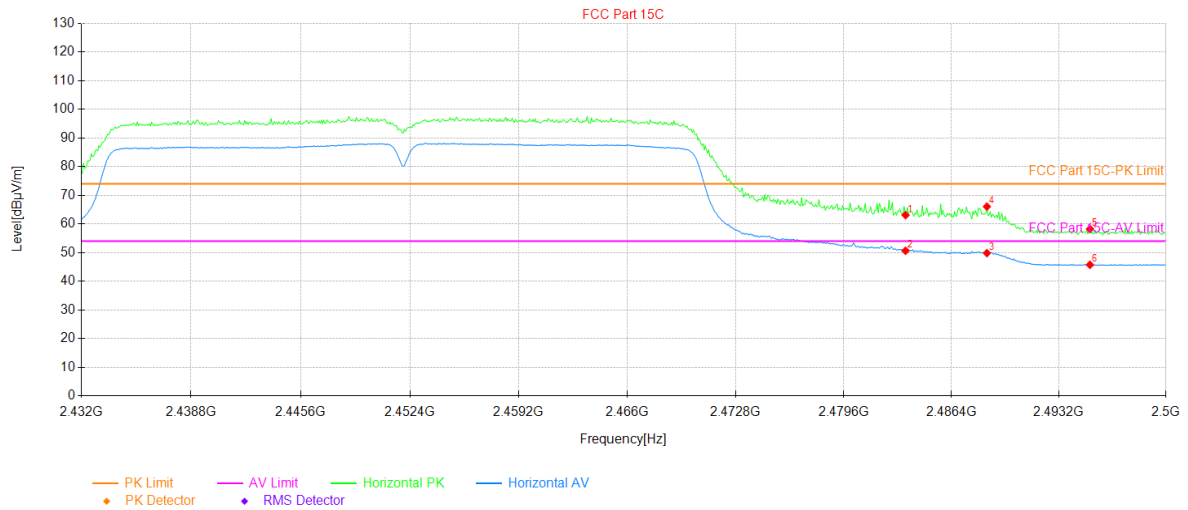

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Factor [dB/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Angle [°]	Detector	Verdict	Polarity
1	2483.50	28.54	34.51	63.05	74.00	10.95	127	PK	PASS	Horizontal
2	2483.50	16.11	34.51	50.62	54.00	3.38	134	AV	PASS	Horizontal
3	2488.64	15.29	34.51	49.80	54.00	4.20	127	AV	PASS	Horizontal
4	2488.64	31.53	34.51	66.04	74.00	7.96	353	PK	PASS	Horizontal
5	2495.17	23.68	34.52	58.20	74.00	15.80	190	PK	PASS	Horizontal
6	2495.17	11.21	34.52	45.73	54.00	8.27	42	AV	PASS	Horizontal


**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor)

### 5.5 Emissions in Non-restricted Frequency Bands

Below 1GHz:

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	2.4G Wi-Fi mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Vertical
<b>Test Voltage:</b>	DC 3.87V		

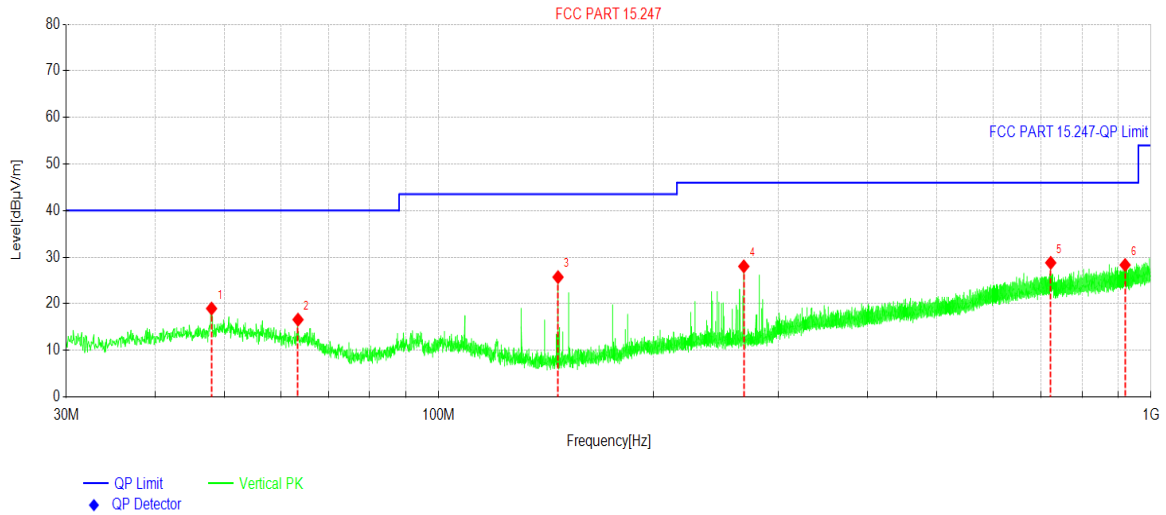


**Suspected Data List**

NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	47.9944	31.67	-12.70	18.97	40.00	21.03	PK	Vertical
2	63.4667	31.19	-14.60	16.59	40.00	23.41	PK	Vertical
3	147.084	43.74	-18.03	25.71	43.50	17.79	PK	Vertical
4	268.146	41.41	-13.39	28.02	46.00	17.98	PK	Vertical
5	723.148	33.39	-4.60	28.79	46.00	17.21	PK	Vertical
6	919.728	30.66	-2.34	28.32	46.00	17.68	PK	Vertical

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Preamplifier Factor)

<b>Product Name:</b>	Mobile Phone	<b>Product Model:</b>	KJ6
<b>Test By:</b>	Robin	<b>Test mode:</b>	2.4G Wi-Fi mode
<b>Test Frequency:</b>	30 MHz ~ 1 GHz	<b>Polarization:</b>	Horizontal
<b>Test Voltage:</b>	DC 3.87V		

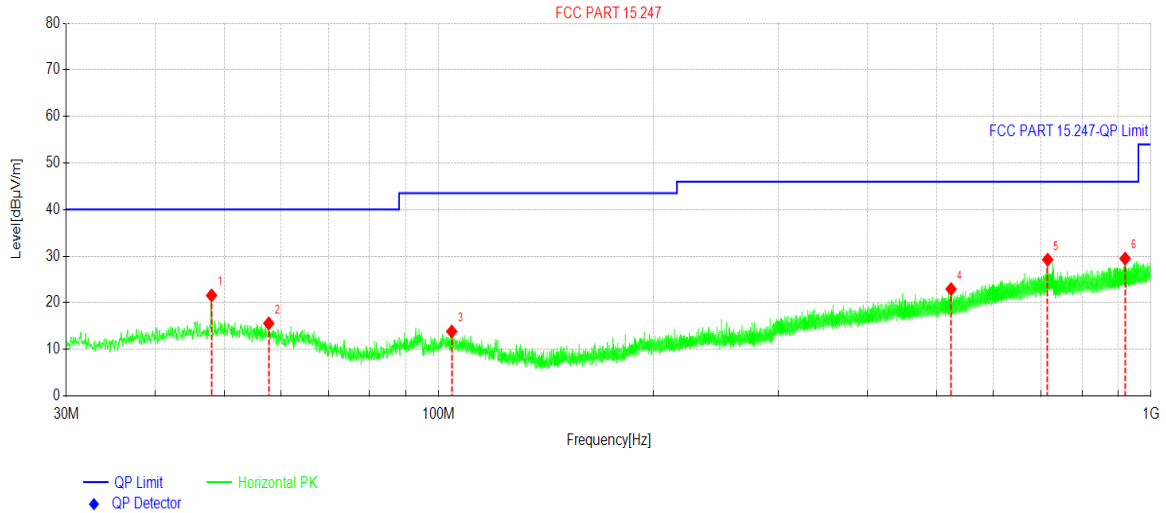

Suspected Data List								
NO.	Freq. [MHz]	Reading[dBµV/m]	Factor [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	47.9944	34.27	-12.70	21.57	40.00	18.43	PK	Horizontal
2	57.7434	29.20	-13.64	15.56	40.00	24.44	PK	Horizontal
3	104.305	28.04	-14.21	13.83	43.50	29.67	PK	Horizontal
4	523.948	31.54	-8.61	22.93	46.00	23.07	PK	Horizontal
5	715.969	33.96	-4.72	29.24	46.00	16.76	PK	Horizontal
6	919.825	31.82	-2.34	29.48	46.00	16.52	PK	Horizontal

**Remark:**

1. Level = Reading + Factor(Antenna Factor + Cable Loss - Pre-amplifier Factor)

**Above 1GHz**

**ANT 12:**

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.72	-8.96	52.76	74.00	21.24	Vertical
4824.00	63.73	-8.96	54.77	74.00	19.23	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.59	-8.96	45.63	54.00	8.37	Vertical
4824.00	57.09	-8.96	48.13	54.00	5.87	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	62.12	-8.64	53.48	74.00	20.52	Vertical
4874.00	63.73	-8.64	55.09	74.00	18.91	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.33	-8.64	45.69	54.00	8.31	Vertical
4874.00	56.73	-8.64	48.09	54.00	5.91	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.74	-8.29	53.45	74.00	20.55	Vertical
4924.00	64.19	-8.29	55.90	74.00	18.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.46	-8.29	46.17	54.00	7.83	Vertical
4924.00	57.33	-8.29	49.04	54.00	4.96	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.76	-8.96	52.80	74.00	21.20	Vertical
4824.00	63.77	-8.96	54.81	74.00	19.19	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.41	-8.96	45.45	54.00	8.55	Vertical
4824.00	57.03	-8.96	48.07	54.00	5.93	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.67	-8.64	53.03	74.00	20.97	Vertical
4874.00	63.57	-8.64	54.93	74.00	19.07	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.91	-8.64	46.27	54.00	7.73	Vertical
4874.00	56.95	-8.64	48.31	54.00	5.69	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.70	-8.29	53.41	74.00	20.59	Vertical
4924.00	64.16	-8.29	55.87	74.00	18.13	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.55	-8.29	46.26	54.00	7.74	Vertical
4924.00	56.81	-8.29	48.52	54.00	5.48	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.33	-8.96	52.37	74.00	21.63	Vertical
4824.00	64.14	-8.96	55.18	74.00	18.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.36	-8.96	45.40	54.00	8.60	Vertical
4824.00	56.85	-8.96	47.89	54.00	6.11	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.97	-8.64	53.33	74.00	20.67	Vertical
4874.00	64.19	-8.64	55.55	74.00	18.45	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.02	-8.64	46.38	54.00	7.62	Vertical
4874.00	57.31	-8.64	48.67	54.00	5.33	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.48	-8.29	53.19	74.00	20.81	Vertical
4924.00	63.27	-8.29	54.98	74.00	19.02	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.09	-8.29	45.80	54.00	8.20	Vertical
4924.00	57.15	-8.29	48.86	54.00	5.14	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	61.98	-8.83	53.15	74.00	20.85	Vertical
4844.00	63.91	-8.83	55.08	74.00	18.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	54.41	-8.83	45.58	54.00	8.42	Vertical
4844.00	57.14	-8.83	48.31	54.00	5.69	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.42	-8.64	52.78	74.00	21.22	Vertical
4874.00	63.92	-8.64	55.28	74.00	18.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.75	-8.64	46.11	54.00	7.89	Vertical
4874.00	57.52	-8.64	48.88	54.00	5.12	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	62.09	-8.44	53.65	74.00	20.35	Vertical
4904.00	63.79	-8.44	55.35	74.00	18.65	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	54.51	-8.44	46.07	54.00	7.93	Vertical
4904.00	57.05	-8.44	48.61	54.00	5.39	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

**ANT 14:**

802.11b						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	64.90	-8.96	55.94	74.00	18.06	Vertical
4824.00	62.13	-8.96	53.17	74.00	20.83	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	58.43	-8.96	49.47	54.00	4.53	Vertical
4824.00	54.77	-8.96	45.81	54.00	8.19	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	65.17	-8.64	56.53	74.00	17.47	Vertical
4874.00	62.14	-8.64	53.50	74.00	20.50	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	58.61	-8.64	49.97	54.00	4.03	Vertical
4874.00	55.10	-8.64	46.46	54.00	7.54	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	65.39	-8.29	57.10	74.00	16.90	Vertical
4924.00	62.43	-8.29	54.14	74.00	19.86	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	58.39	-8.29	50.10	54.00	3.90	Vertical
4924.00	54.42	-8.29	46.13	54.00	7.87	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						



802.11g						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	64.53	-8.96	55.57	74.00	18.43	Vertical
4824.00	61.74	-8.96	52.78	74.00	21.22	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	58.19	-8.96	49.23	54.00	4.77	Vertical
4824.00	55.02	-8.96	46.06	54.00	7.94	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	65.20	-8.64	56.56	74.00	17.44	Vertical
4874.00	62.35	-8.64	53.71	74.00	20.29	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	58.83	-8.64	50.19	54.00	3.81	Vertical
4874.00	54.99	-8.64	46.35	54.00	7.65	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	65.33	-8.29	57.04	74.00	16.96	Vertical
4924.00	62.17	-8.29	53.88	74.00	20.12	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	58.33	-8.29	50.04	54.00	3.96	Vertical
4924.00	54.50	-8.29	46.21	54.00	7.79	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	61.22	-8.96	52.26	74.00	21.74	Vertical
4824.00	64.45	-8.96	55.49	74.00	18.51	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4824.00	54.13	-8.96	45.17	54.00	8.83	Vertical
4824.00	56.39	-8.96	47.43	54.00	6.57	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.49	-8.64	52.85	74.00	21.15	Vertical
4874.00	63.96	-8.64	55.32	74.00	18.68	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	55.07	-8.64	46.43	54.00	7.57	Vertical
4874.00	56.98	-8.64	48.34	54.00	5.66	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	61.05	-8.29	52.76	74.00	21.24	Vertical
4924.00	63.47	-8.29	55.18	74.00	18.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4924.00	54.20	-8.29	45.91	54.00	8.09	Vertical
4924.00	57.43	-8.29	49.14	54.00	4.86	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	61.93	-8.83	53.10	74.00	20.90	Vertical
4844.00	63.98	-8.83	55.15	74.00	18.85	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4844.00	54.53	-8.83	45.70	54.00	8.30	Vertical
4844.00	57.03	-8.83	48.20	54.00	5.80	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	61.09	-8.64	52.45	74.00	21.55	Vertical
4874.00	63.69	-8.64	55.05	74.00	18.95	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4874.00	54.26	-8.64	45.62	54.00	8.38	Vertical
4874.00	57.61	-8.64	48.97	54.00	5.03	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	61.64	-8.44	53.20	74.00	20.80	Vertical
4904.00	63.48	-8.44	55.04	74.00	18.96	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
4904.00	54.37	-8.44	45.93	54.00	8.07	Vertical
4904.00	57.29	-8.44	48.85	54.00	5.15	Horizontal
<b>Remark:</b>						
1. Level = Reading + Factor.						
2. Test Frequency up to 25GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----