




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant14	4.457	30	Pass
NVNT	BLE	2442	Ant14	4.847	30	Pass
NVNT	BLE	2480	Ant14	5.033	30	Pass



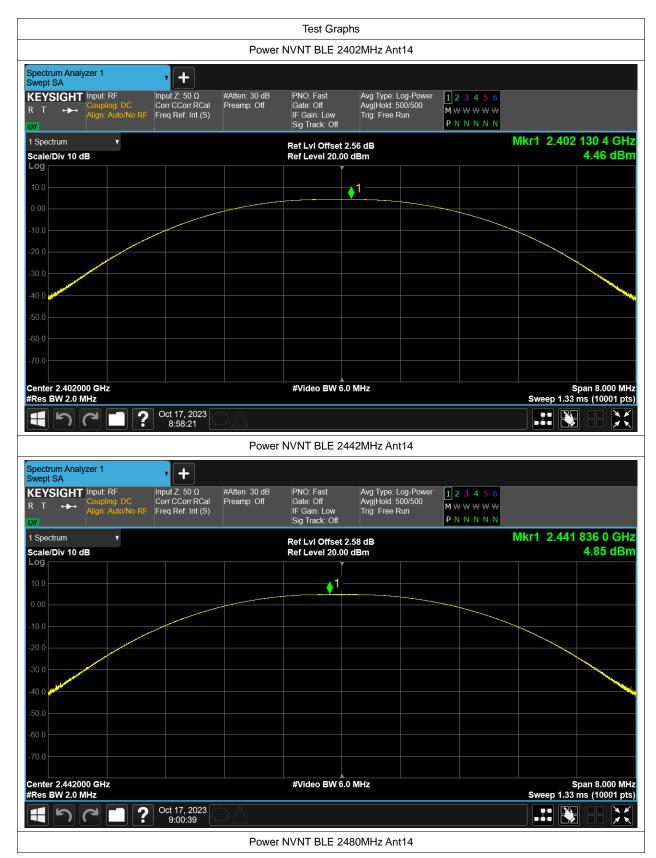



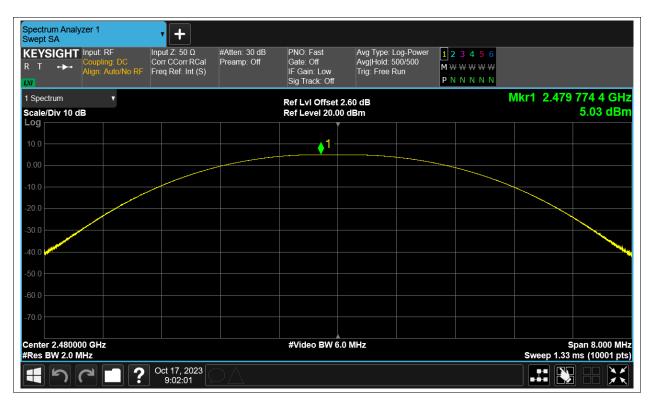






-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant14	0.661	0.5	Pass
NVNT	BLE	2442	Ant14	0.661	0.5	Pass
NVNT	BLE	2480	Ant14	0.661	0.5	Pass







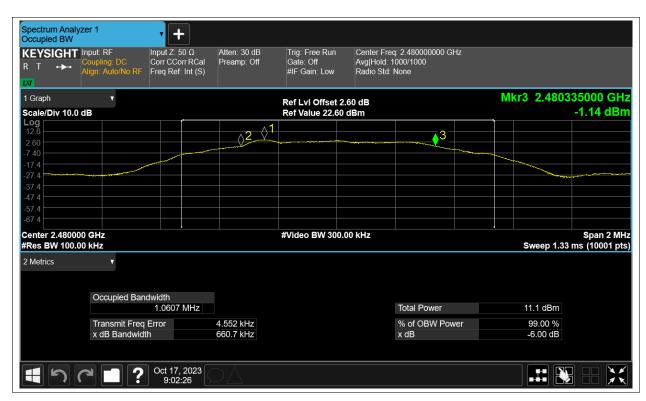





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant14	1.026	
NVNT	BLE	2442	Ant14	1.029	
NVNT	BLE	2480	Ant14	1.028	

Project No.: JYTSZR2310020














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant14	-2.076	8	Pass
NVNT	BLE	2442	Ant14	-1.594	8	Pass
NVNT	BLE	2480	Ant14	-1.419	8	Pass







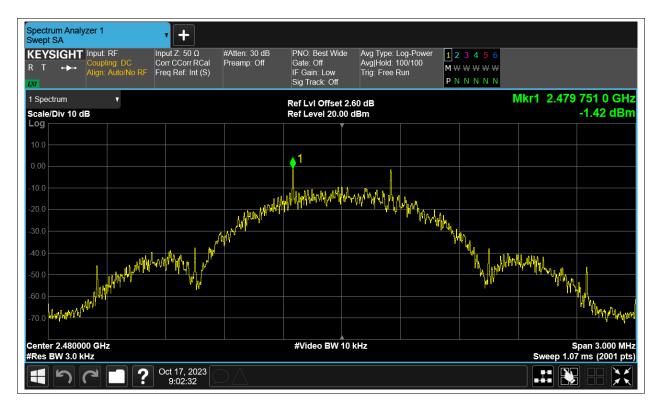







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant14	-60.28	-20	Pass
NVNT	BLE	2480	Ant14	-61.95	-20	Pass



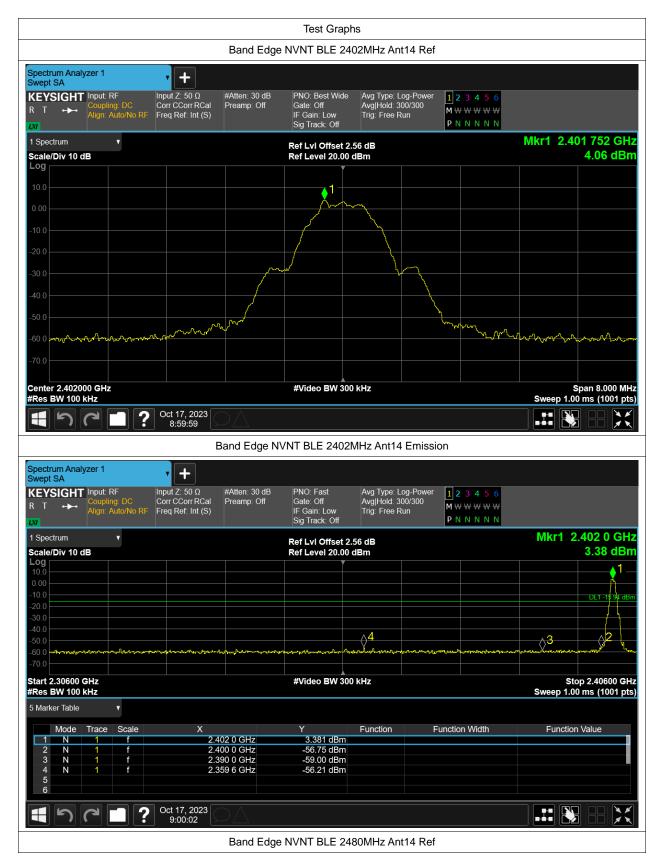



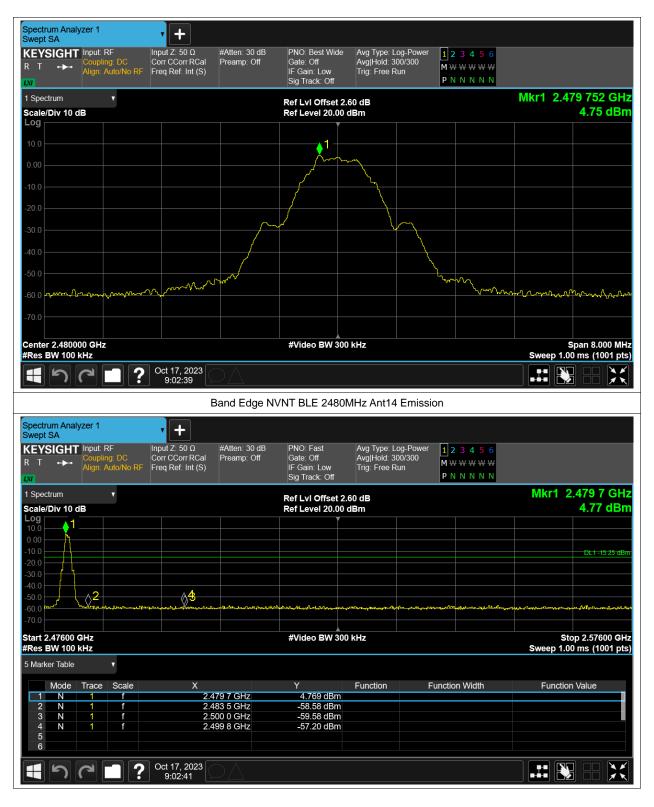





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant14	-51.82	-20	Pass
NVNT	BLE	2442	Ant14	-53.38	-20	Pass
NVNT	BLE	2480	Ant14	-52.41	-20	Pass











