




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant13	1.785	30	Pass
NVNT	BLE	2442	Ant13	2.874	30	Pass
NVNT	BLE	2480	Ant13	2.002	30	Pass



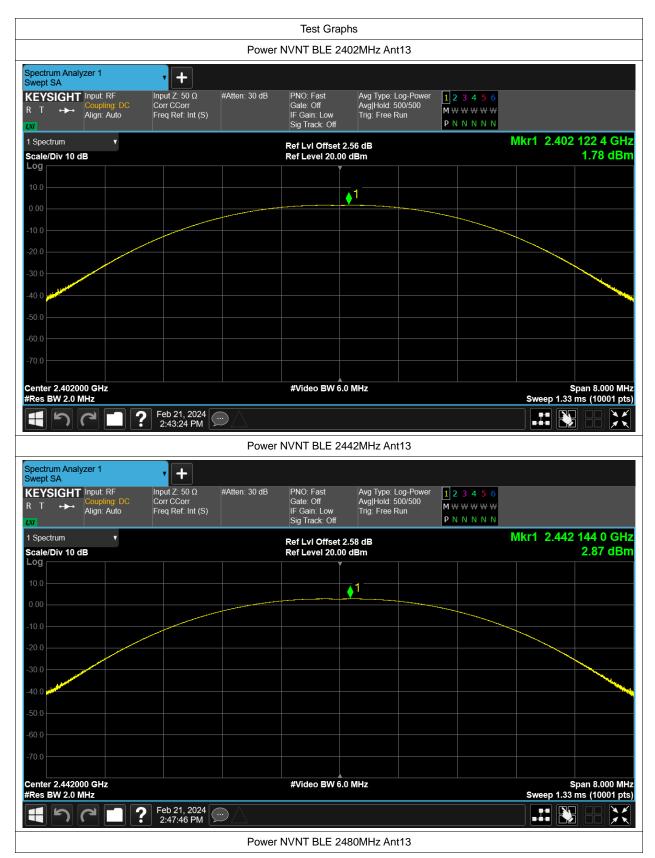









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant13	0.669	0.5	Pass
NVNT	BLE	2442	Ant13	0.668	0.5	Pass
NVNT	BLE	2480	Ant13	0.67	0.5	Pass














Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant13	1.033	
NVNT	BLE	2442	Ant13	1.034	
NVNT	BLE	2480	Ant13	1.033	

Project No.: JYTSZR2402010



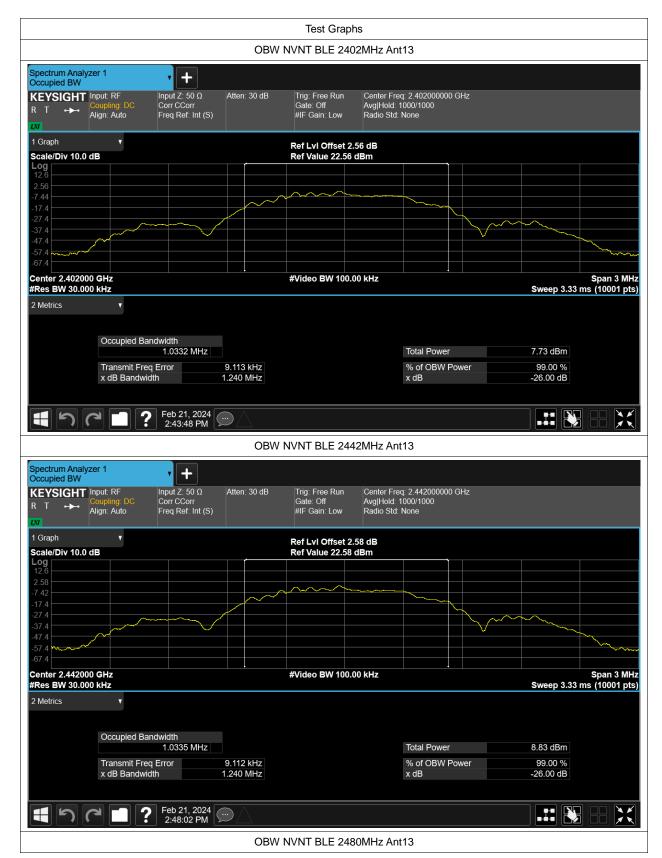











Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant13	-13.32	8	Pass
NVNT	BLE	2442	Ant13	-12.253	8	Pass
NVNT	BLE	2480	Ant13	-13.15	8	Pass



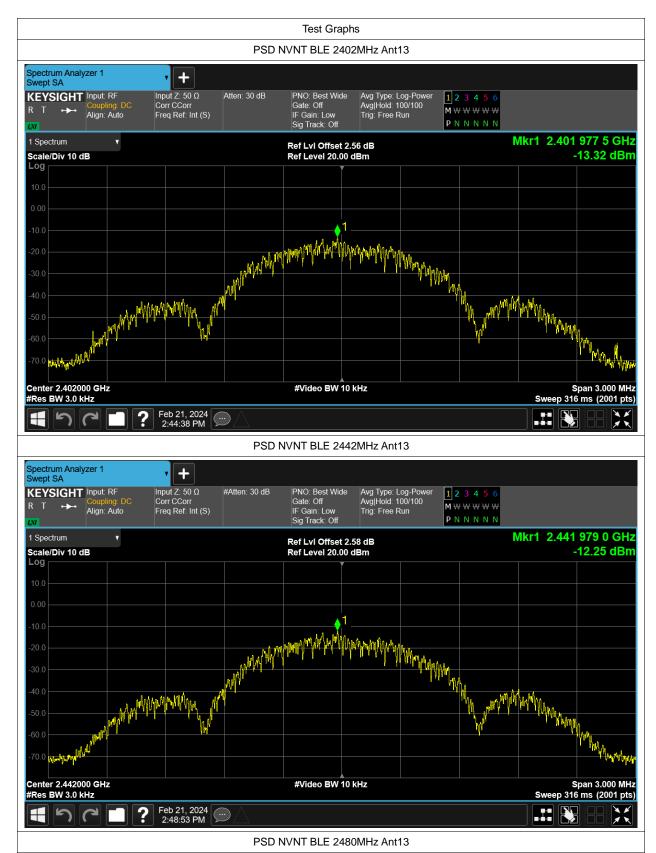



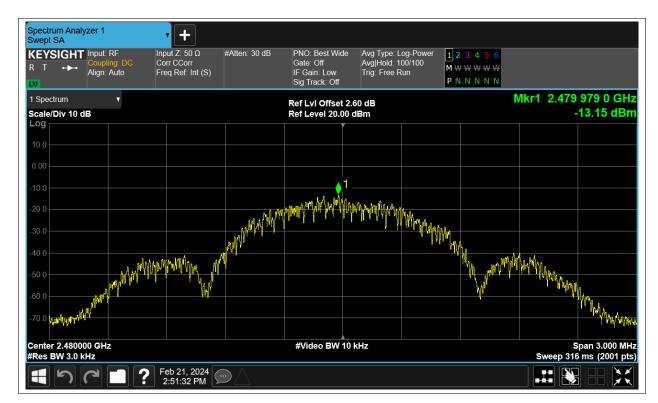






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant13	-56.58	-20	Pass
NVNT	BLE	2480	Ant13	-57.16	-20	Pass







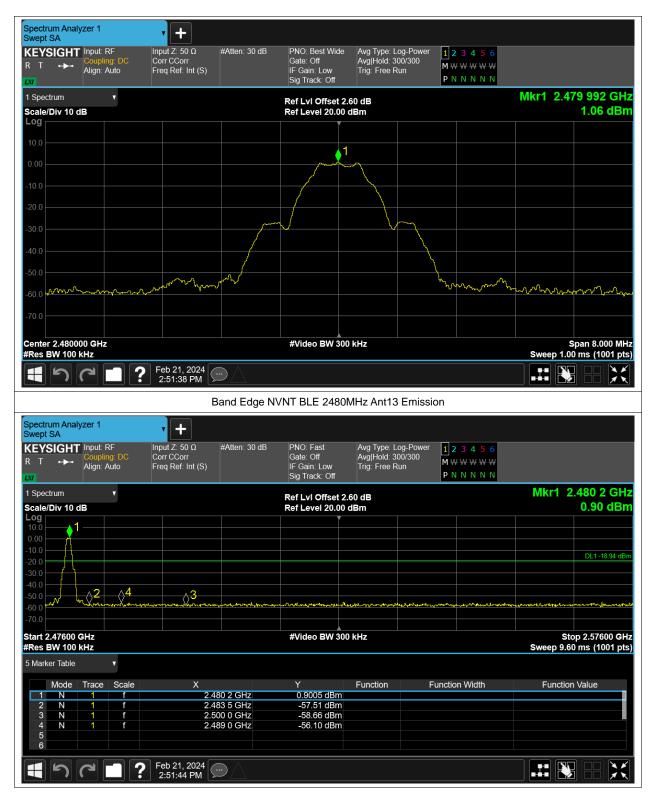





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant13	-50.27	-20	Pass
NVNT	BLE	2442	Ant13	-50.84	-20	Pass
NVNT	BLE	2480	Ant13	-49.78	-20	Pass







