



Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	0.891	30	Pass
NVNT	BLE	2442	Ant12	0.271	30	Pass
NVNT	BLE	2480	Ant12	-1.003	30	Pass







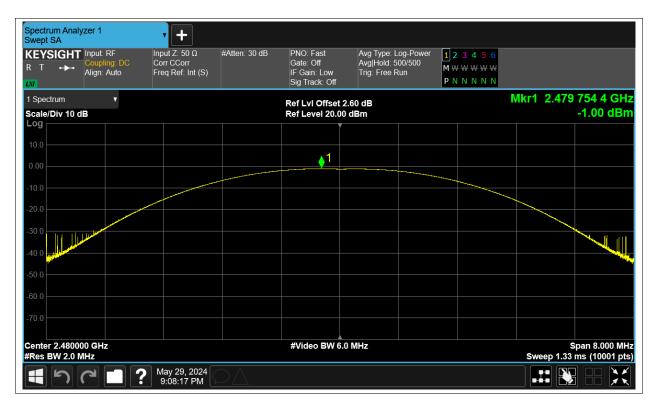





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant12	0.625	0.5	Pass
NVNT	BLE	2442	Ant12	0.625	0.5	Pass
NVNT	BLE	2480	Ant12	0.62	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant12	1.032	
NVNT	BLE	2442	Ant12	1.034	
NVNT	BLE	2480	Ant12	1.032	

Project No.: JYTSZR2405107













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	-5.783	8	Pass
NVNT	BLE	2442	Ant12	-6.38	8	Pass
NVNT	BLE	2480	Ant12	-7.721	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-56.76	-20	Pass
NVNT	BLE	2480	Ant12	-51.04	-20	Pass



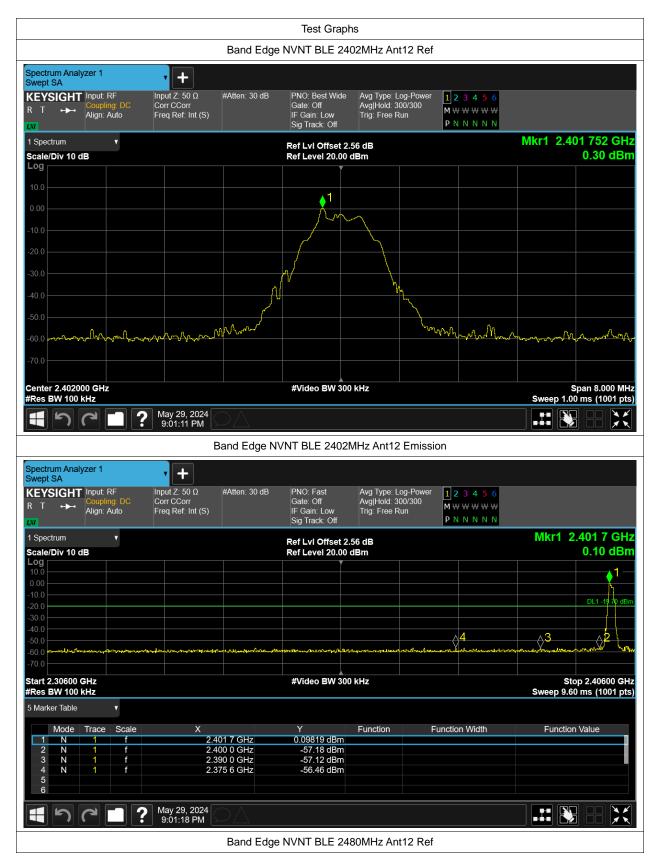



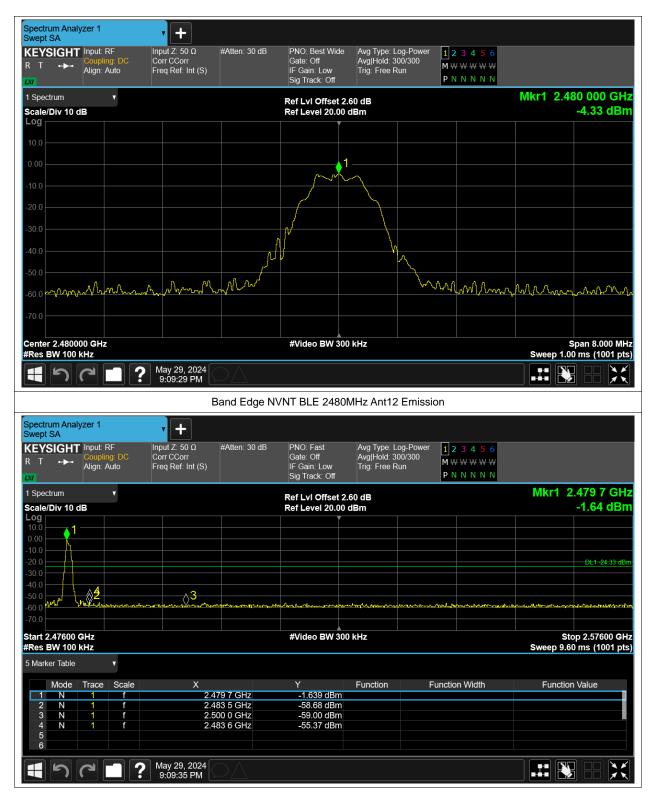





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-49.97	-20	Pass
NVNT	BLE	2442	Ant12	-49.54	-20	Pass
NVNT	BLE	2480	Ant12	-47.17	-20	Pass







