




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant2	-3.847	30	Pass
NVNT	BLE	2442	Ant2	-3.106	30	Pass
NVNT	BLE	2478	Ant2	-3.361	30	Pass



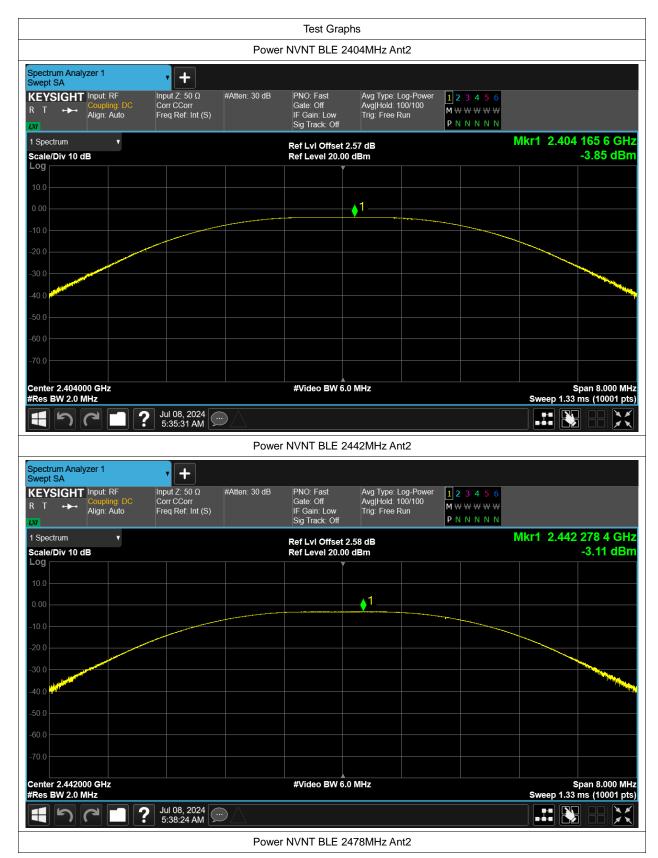



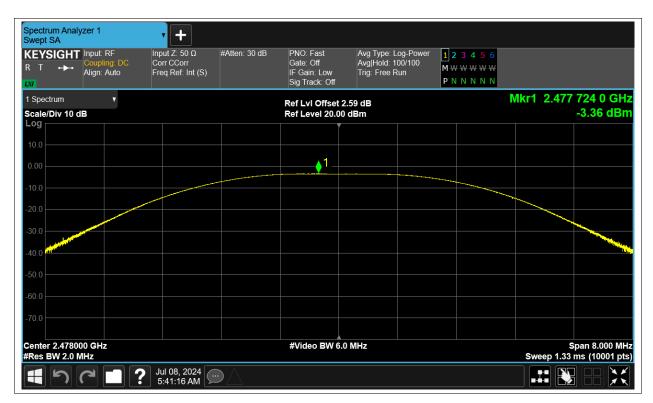

Tel: +86-755-23118282, Fax: +86-755-23116366





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant2	1.168	0.5	Pass
NVNT	BLE	2442	Ant2	1.269	0.5	Pass
NVNT	BLE	2478	Ant2	1.092	0.5	Pass









Tel: +86-755-23118282, Fax: +86-755-23116366 Page 6 of 19





Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2404	Ant2	2.072	
NVNT	BLE	2442	Ant2	2.076	
NVNT	BLE	2478	Ant2	2.074	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant2	-21.205	8	Pass
NVNT	BLE	2442	Ant2	-20.465	8	Pass
NVNT	BLE	2478	Ant2	-20.749	8	Pass














Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant2	-51.17	-20	Pass
NVNT	BLE	2478	Ant2	-53.49	-20	Pass







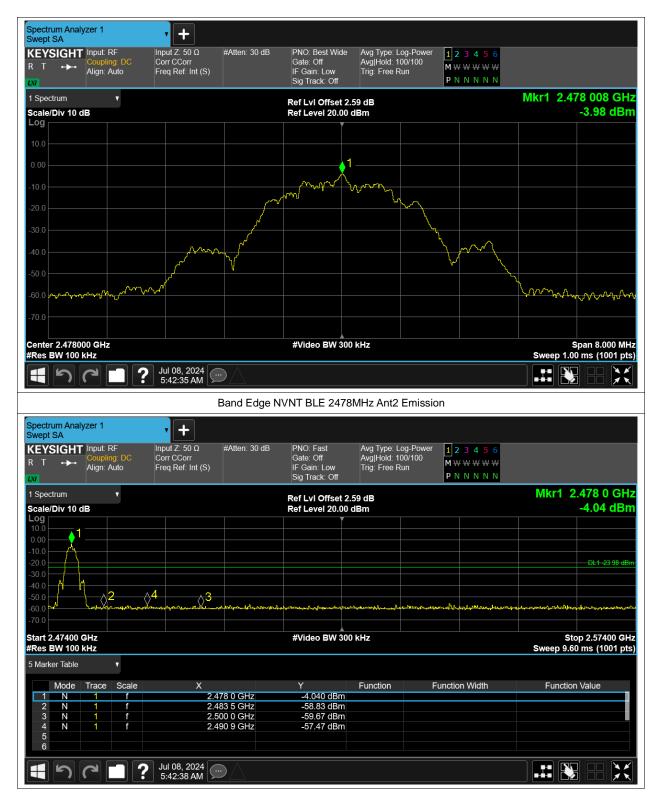





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant2	-43.31	-20	Pass
NVNT	BLE	2442	Ant2	-43.94	-20	Pass
NVNT	BLE	2478	Ant2	-44.08	-20	Pass











