




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant2	-3.871	30	Pass
NVNT	BLE	2442	Ant2	-3.025	30	Pass
NVNT	BLE	2480	Ant2	-3.416	30	Pass



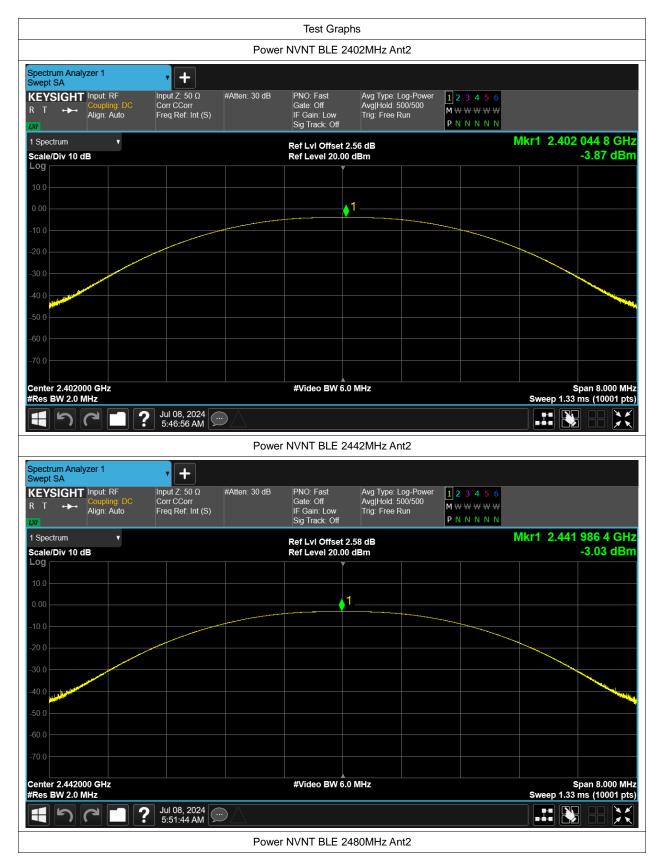



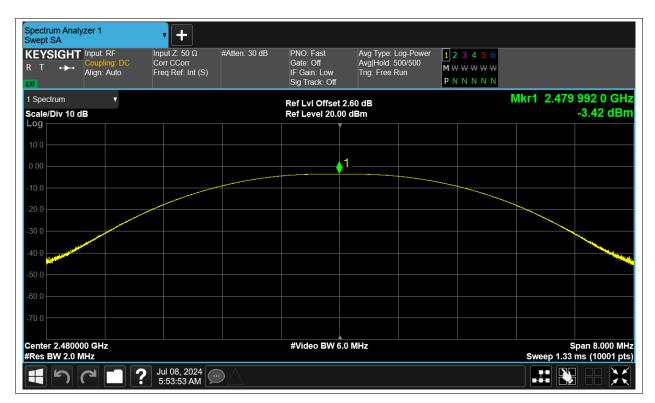





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant2	0.683	0.5	Pass
NVNT	BLE	2442	Ant2	0.683	0.5	Pass
NVNT	BLE	2480	Ant2	0.683	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant2	1.054	
NVNT	BLE	2442	Ant2	1.055	
NVNT	BLE	2480	Ant2	1.056	









Tel: +86-755-23118282, Fax: +86-755-23116366





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant2	-10.153	8	Pass
NVNT	BLE	2442	Ant2	-9.307	8	Pass
NVNT	BLE	2480	Ant2	-9.695	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant2	-49.64	-20	Pass
NVNT	BLE	2480	Ant2	-49.65	-20	Pass



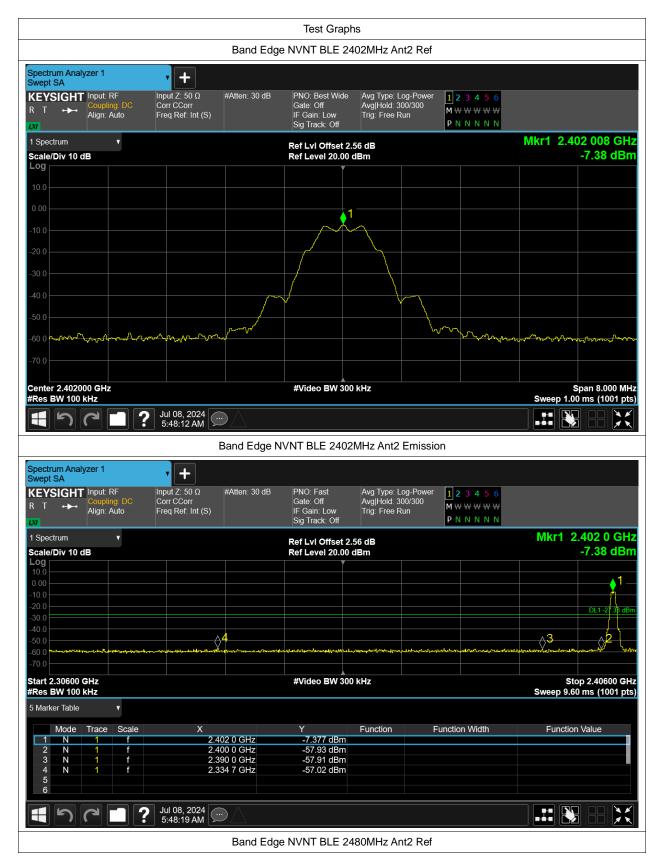



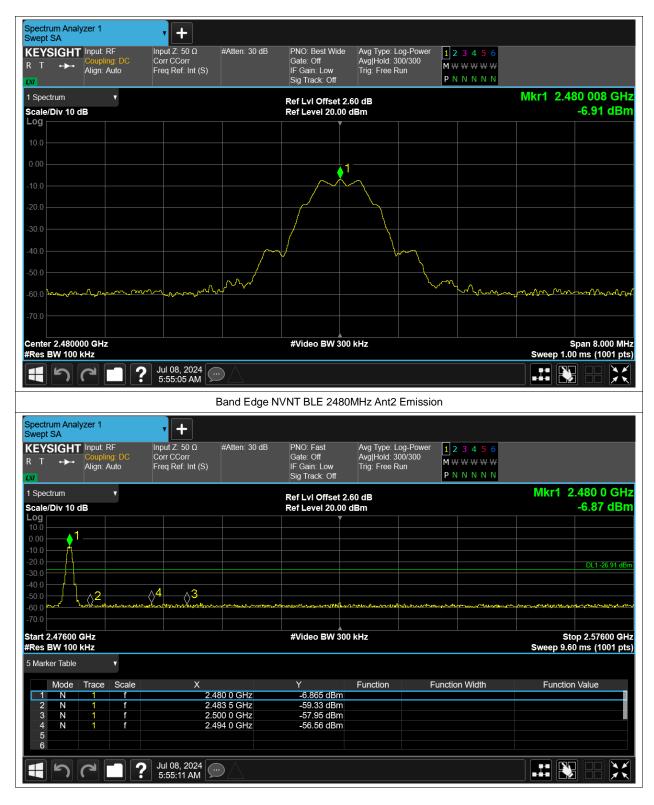





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant2	-42.57	-20	Pass
NVNT	BLE	2442	Ant2	-43.65	-20	Pass
NVNT	BLE	2480	Ant2	-42.55	-20	Pass







