

FCC SAR REPORT

Applicant: TECNO MOBILE LIMITED

Address of Applicant: FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT

Equipment Under Test (EUT)

Product Name: Mobile Phone

Model No.: LE8

Trade mark: TECNO

FCC ID: 2ADYY-LE8

Applicable standards: FCC 47 CFR Part 2.1093

Date of Test: 15 Oct., 2021 ~ 22 Oct., 2021

Test Result: Maximum Reported 1-g SAR (W/kg)
Head: 1.135 Body: 0.435 Hotspot: 0.497

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the JYT product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	28 Oct., 2021	Original

Tested by:*Vieta Zhang***Date:**

28 Oct., 2021

Test Engineer**Reviewed by:***Wiby Zhang***Date:**

28 Oct., 2021

Project Engineer

3 Contents

1	COVER PAGE	1
2	VERSION	2
3	CONTENTS	3
4	SAR RESULTS SUMMARY	5
5	GENERAL INFORMATION	7
5.1	CLIENT INFORMATION.....	7
5.2	GENERAL DESCRIPTION OF EUT	7
5.3	MAXIMUM RF OUTPUT POWER	9
5.4	ENVIRONMENT OF TEST SITE	11
5.5	TEST SAMPLE PLAN	11
5.6	TEST LOCATION	11
6	INTRODUCTION	12
6.1	INTRODUCTION	12
6.2	SAR DEFINITION.....	12
7	RF EXPOSURE LIMITS	13
7.1	UNCONTROLLED ENVIRONMENT.....	13
7.2	CONTROLLED ENVIRONMENT	13
7.3	RF EXPOSURE LIMITS.....	13
8	SAR MEASUREMENT SYSTEM	14
8.1	E-FIELD PROBE.....	15
8.2	ROBOT	16
8.3	PHANTOM.....	17
8.4	DEVICE HOLDER.....	17
8.5	TEST EQUIPMENT LIST	18
9	TISSUE SIMULATING LIQUIDS	19
10	SAR SYSTEM VERIFICATION	21
11	EUT TESTING POSITION	23
11.1	HANDSET REFERENCE POINTS	23
11.2	POSITIONING FOR CHEEK / TOUCH	24
11.3	POSITIONING FOR EAR / 15° TILT	24
11.4	SAR EVALUATIONS NEAR THE MOUTH/JAW REGIONS OF THE SAM PHANTOM	25
11.5	BODY WORN ACCESSORY CONFIGURATIONS	25
11.6	WIRELESS ROUTER (HOTSPOT) CONFIGURATIONS	26
12	MEASUREMENT PROCEDURES	27
12.1	SPATIAL PEAK SAR EVALUATION	27
12.2	POWER REFERENCE MEASUREMENT.....	28
12.3	AREA & ZOOM SCAN PROCEDURES.....	28
12.4	VOLUME SCAN PROCEDURES	29
12.5	SAR AVERAGED METHODS	29
12.6	POWER DRIFT MONITORING	29
13	CONDUCTED RF OUTPUT POWER	30
13.1	GSM CONDUCTED POWER	30
13.2	WCDMA CONDUCTED POWER	32
13.3	LTE CONDUCTED POWER	35
13.4	NR CONDUCTED POWER.....	56
13.5	WLAN 2.4 GHz BAND CONDUCTED POWER	79
13.6	WLAN 5.2GHz BAND CONDUCTED POWER	80
13.7	WLAN 5.8GHz BAND CONDUCTED POWER	81
13.8	BLUETOOTH CONDUCTED POWER	82
14	EXPOSURE POSITIONS CONSIDERATION	83
14.1	EUT ANTENNA LOCATIONS.....	83
14.2	TEST POSITIONS CONSIDERATION	84
15	SAR TEST RESULTS SUMMARY	85
15.1	STANDALONE HEAD SAR DATA.....	85

15.2	STANDALONE BODY SAR	93
15.3	BODY SAR IN HOTSPOT MODE	98
15.4	REPEATED SAR MEASUREMENT	104
15.5	MULTI-BAND SIMULTANEOUS TRANSMISSION CONSIDERATIONS	105
15.6	SAR SIMULTANEOUS TRANSMISSION ANALYSIS	106
15.7	MEASUREMENT UNCERTAINTY	108
16	REFERENCE.....	109
	APPENDIX A: PLOTS OF SAR SYSTEM CHECK	110
	APPENDIX B: PLOTS OF SAR TEST DATA	123
	APPENDIX C: SYSTEM CALIBRATION CERTIFICATE.....	169

4 SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:
 <Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported 1-g SAR (W/kg)
Head	GSM 850	0.650	PCE	1.135
	GSM 1900	0.466		
	WCDMA Band V	0.565		
	WCDMA Band IV	0.709		
	WCDMA Band II	0.432		
	LTE Band 2	0.499		
	LTE Band 4	0.454		
	LTE Band 5	0.506		
	LTE Band 7	0.332		
	LTE Band 17	0.334		
	LTE Band 41	1.024		
	LTE Band 66	0.460		
	NR n5	0.464		
	NR n7	0.673		
	NR n41	1.135		
	NRn77 (3450MHz~3550MHz)	0.780		
	NRn77 (3700MHz~3980MHz)	0.691		
	WLAN 2.4 GHz	0.246	DTS	1.135
WLAN 5.2 GHz	0.201	NII		
WLAN 5.8 GHz	0.234			
Body (10 mm Gap)	GSM 850	0.327	PCE	0.435
	GSM 1900	0.434		
	WCDMA Band V	0.188		
	WCDMA Band IV	0.243		
	WCDMA Band II	0.215		
	LTE Band 2	0.291		
	LTE Band 4	0.254		
	LTE Band 5	0.143		
	LTE Band 7	0.129		
	LTE Band 17	0.121		
	LTE Band 41	0.375		
	LTE Band 66	0.217		
	NR n5	0.109		
	NR n7	0.150		
	NR n41	0.435		
	NRn77 (3450MHz~3550MHz)	0.182		
	NRn77 (3700MHz~3980MHz)	0.297		
	WLAN 2.4GHz	0.164	DTS	0.435
WLAN 5.2 GHz	0.023	NII		
WLAN 5.8 GHz	0.160			
Hotspot (10 mm Gap)	GSM 850	0.327	PCE	0.497
	GSM 1900	0.434		
	WCDMA Band V	0.188		
	WCDMA Band IV	0.243		
	WCDMA Band II	0.215		
	LTE Band 2	0.291		
	LTE Band 4	0.254		

	LTE Band 5	0.143		
	LTE Band 7	0.129		
	LTE Band 12	0.121		
	LTE Band 41	0.375		
	LTE Band 66	0.217		
	NR n5	0.109		
	NR n7	0.150		
	NR n41	0.497		
	NRn77 (3450MHz~3550MHz)	0.495		
	NRn77 (3700MHz~3980MHz)	0.390		
	WLAN 2.4 GHz	0.164	DTS	
	WLAN 5.2 GHz	0.052	NII	
	WLAN 5.8 GHz	0.160		

<Highest Reported simultaneous SAR Summary>

Exposure Position	Frequency Band	Reported 1-g SAR (W/kg)	Equipment Class	Highest Reported Simultaneous Transmission 1-g SAR (W/kg)
Back	EN-DC 5A_n78A	1.286	PCE	1.534
	WLAN 2.4 GHz ANT3	0.101	DTS	
	BT	0.147		

Note:

1. The highest simultaneous transmission is scalar summation of Reported standalone SAR per FCC KDB 690783 D01 v01r03, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.
2. This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013.
3. For FDD-LTE Band 4, is full covered by FDD-LTE Band 66, so only FDD-LTE Band 66 was tested. For TDD-LTE Band 38, is full covered by TDD-LTE Band 41, so only TDD-LTE Band 41 was tested. For NR n38, is full covered by NR n41, so only NR n41 was tested. For NR n78, is full covered by NR n77, so only NR n77 was tested
- 4.

5 General Information

5.1 Client Information

Applicant:	TECNO MOBILE LIMITED
Address of Applicant:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Manufacturer:	TECNO MOBILE LIMITED
Address of Manufacturer:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

5.2 General Description of EUT

Product Name:	Mobile Phone			
Model No.:	LE8			
Category of device	Portable device			
Operation Frequency:	2G :	GSM850: 824.2~848.8 MHz	PCS 1900: 1850.2~1909.8 MHz	
	3G :	Band II: 1852.4~1907.6 MHz	Band V: 826.4~846.6 MHz	
		Band IV: 1712.4~1752.6 MHz		
	4G :	Band 2 :1850MHz~1910MHz	Band 4 :1710MHz~1755MHz	
		Band 5 :824MHz~849MHz	Band 7: 2500MHz~2570MHz	
		Band 17: 704MHz~716MHz	Band 38: 2570MHz~2620MHz	
		Band 41: 2555MHz~2655MHz	Band 66 :1710MHz~1780MHz	
	5G NR	n5: 824MHz~849MHz	n7: 2500MHz~2570MHz	
		n38: 2570MHz~2620MHz	n41: 2535MHz~2655MHz	
		n77: 3300MHz~4200MHz	n78: 3300MHz~3800MHz	
Wi-Fi:	2412MHz~2462MHz	5150MHz-5250MHz		
	5725MHz-5825MHz			
Bluetooth: 2402 MHz ~ 2480 MHz				
Modulation technology:	2G:	<input checked="" type="checkbox"/> Voice(GMSK)	<input checked="" type="checkbox"/> GPRS(GMSK)	<input checked="" type="checkbox"/> EGPRS(GMSK, 8PSK)
	3G:	<input checked="" type="checkbox"/> RCM(QPSK)	<input checked="" type="checkbox"/> HSUPA(QPSK)	<input checked="" type="checkbox"/> HSDPA(QPSK, 16QAM)
	4G:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input checked="" type="checkbox"/> 64QAM
	5G NR:	<input checked="" type="checkbox"/> CP-OFDM(QPSK, 16QAM, 64QAM, 256QAM)		
		<input checked="" type="checkbox"/> DFT-s-OFDM($\pi/2$ -BPSK, QPSK, 16QAM, 64QAM, 256QAM)		
	Wi-Fi:	<input checked="" type="checkbox"/> 802.11b(DSSS)	<input checked="" type="checkbox"/> 802.11a/g/n/ax (OFDM)	
	Bluetooth:	<input checked="" type="checkbox"/> BDR(GFSK)	<input checked="" type="checkbox"/> EDR($\pi/4$ -DQPSK, 8DPSK)	<input checked="" type="checkbox"/> LE(GFSK)
	SA: NR n5, n7, n38, n41, n77, n78			
NSA(EN-DC): DC_5A_n78A				
Antenna Type:	Internal Antenna			
Antenna Gain:	GSM 850: -1.50 dBi; PCS 1900: --0.50 dBi WCDMA Band V: -1.50 dBi ;WCDMA Band II: -0.50 dBi; WCDMA Band IV: -0.70 dBi LTE Band 2: -0.50 dBi; LTE Band 4: -0.70 dBi			

	LTE Band 5: -1.50 dBi; LTE Band 7: -0.40 dBi LTE Band 17: -1.90 dBi ;LTE Band 38: -0.40 dBi LTE Band 41: -0.40 dBi;LTE Band 66: -0.70 dBi n5: -1.5 dBi; n7: -0.4 dBi n38: -0.4 dBi ; n41: 0.9dBi n77: 0.5 dBi ; n78: 0.5 dBi Bluetooth: 1.30 dBi; 2.4G Wi-Fi: 1.30 dBi; 5G Wi-Fi: -0.80 dBi	
(E)GPRS Class:	(E)GPRS Class: 12	
Dimensions (L*W*H):	173 mm (L)× 78 mm (W)× 11 mm (H)	
Accessories information:	Adapter: Model: U180TSA Input:100-240V AC,50/60Hz 0.6A Output: DC 5.0V~9.0V, 2.0A DC 9.0V~12.0V, 1.5A	Battery: Rechargeable Li-ion Battery 3.85V/5850mAh
		Headset: Support headset

5.3 Maximum RF Output Power

Mode	Average Power (dBm)	
	GSM 850	GSM 1900
GSM (Voice)	32.42	29.68
GPRS (1 TX Slot)	32.35	29.69
GPRS (2 TX Slots)	31.76	29.00
GPRS (3 TX Slots)	30.12	27.34
GPRS (4 TX Slots)	28.99	26.23
EGPRS (1 TX Slot)	27.26	27.24
EGPRS (2 TX Slots)	26.10	26.17
EGPRS (3 TX Slots)	23.99	21.62
EGPRS (4 TX Slots)	22.46	20.12

Mode	Average Power (dBm)		
	WCDMA Band V	WCDMA Band IV	WCDMA Band II
AMR 12.2 kbps	23.62	23.30	23.13
RMC 12.2 kbps	23.61	23.28	23.13
HSDPA Sub-test 1	22.56	22.26	22.11
HSDPA Sub-test 2	22.18	21.87	21.69
HSDPA Sub-test 3	22.09	21.79	21.59
HSDPA Sub-test 4	22.07	21.73	21.60
HSUPA Sub-test 1	20.51	20.19	19.99
HSUPA Sub-test 2	21.03	20.73	20.53
HSUPA Sub-test 3	21.51	21.22	21.05
HSUPA Sub-test 4	20.54	20.24	20.05
HSUPA Sub-test 5	22.44	22.16	21.97

Mode	Average Power (dBm)						
	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 7	LTE Band 66	LTE Band 17	LTE Band 41
BW/1.4 MHz	23.43	23.33	23.47	/	23.05	/	/
BW/3.0 MHz	23.37	23.29	23.51	/	23.01	/	/
BW/5.0 MHz	23.50	23.46	23.63	23.36	23.20	23.10	23.31
BW/10 MHz	23.39	23.33	23.52	23.23	23.04	23.03	23.13
BW/15 MHz	23.31	23.24	/	23.24	22.97	/	23.10
BW/20 MHz	23.35	23.41	/	23.26	23.05	/	23.10

Mode	Average Power (dBm)							
	NR Band n5	NR Band n7	NR Band n38	NR Band n41	NR Band n77 3450-3550	NR Band n77 3700-3980	NR Band n78 3450-3550	NR Band n78 3700-3800
BW/10MHz	23.61	23.50	23.35	22.39	26.18	25.82	26.05	25.93
BW/15MHz	23.44	23.54	23.38	/	/	/	/	/
BW/20 MHz	23.39	23.51	/	/	/	/	/	/
BW/30MHz	/	/	/	/	/	/	/	/
BW/40MHz	/	/	23.27	/	/	/	/	/
BW/50MHz	/	/	/	22.23	26.36	25.81	26.29	25.90
BW/60MHz	/	/	/	/	/	/	/	/
BW/80MHz	/	/	/	/	/	/	/	/
BW/90MHz	/	/	/	/	/	/	/	/
BW/100MHz	/	/	/	22.16	25.89	25.68	25.97	25.87

ANT 2

WLAN 2.4 GHz Band Average Power (dBm)						
Mode/Band	b	g	n (HT20)	ax20	n(HT40)	ax40
WLAN 2.4GHz	15.72	15.09	13.97	14.37	13.73	13.49

WLAN 5.2 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ax20	n 20	ac40	ax40	n40	ac80	ax80
WLAN 5.2GHz	10.49	11.79	12.33	12.86	10.78	11.47	12.45	11.4	9.74

WLAN 5.8 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ax20	n20	ac40	ax40	n40	ac80	ax80
WLAN 5.8GHz	10.87	15.08	14.84	11.99	13.14	12.97	13.09	12.60	12.79

ANT 3

WLAN 2.4 GHz Band Average Power (dBm)						
Mode/Band	b	g	n (HT20)	ax20	n(HT40)	ax40
WLAN 2.4GHz	16.31	15.56	15.45	14.56	14.35	13.47

WLAN 5.2 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ax20	n 20	ac40	ax40	n40	ac80	ax80
WLAN 5.2GHz	11.74	11.64	11.06	11.89	10.56	10.28	11.63	10.75	8.93

WLAN 5.8 GHz Band Average Power (dBm)									
Mode/Band	a	ac 20	ax20	n20	ac40	ax40	n40	ac80	ax80
WLAN 5.8GHz	15.36	15.02	15.37	14.77	14.18	14.57	14.49	12.24	12.78

BT

Bluetooth Average Power (dBm)				
Mode/Band	1Mbps(GFSK)	2 Mbps($\pi/4$ DQPSK)	3 Mbps (8DPSK)	LE(BT4.0)
Bluetooth	5.337	4.739	5.233	2.178

5.4 Environment of Test Site

Temperature:	18°C ~25 °C
Humidity:	35%~75% RH
Atmospheric Pressure:	1010 mbar

5.5 Test Sample Plan

Sample Number	Used for Test Items
3#	SAR
<p><i>Remark: JianYan Testing Group Shenzhen Co., Ltd. is only responsible for the test project data of the above samples, and will keep the above samples for a month.</i></p>	

5.6 Test Location

<p>JianYan Testing Group Shenzhen Co., Ltd. No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China. Tel: +86-755-23118282, Fax: +86-755-23116366 Email: info-JYTee@lets.com, Website: http://www.ccis-cb.com</p>
--

6 Introduction

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength. However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

7.3 RF Exposure Limits

SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
SPATIAL PEAK SAR Brain	1.6	8.0
SPATIAL AVERAGE SAR Whole Body	0.08	0.4
SPATIAL PEAK SAR Hands, Feet, Ankles, Wrists	4.0	20

Note:

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

8 SAR Measurement System

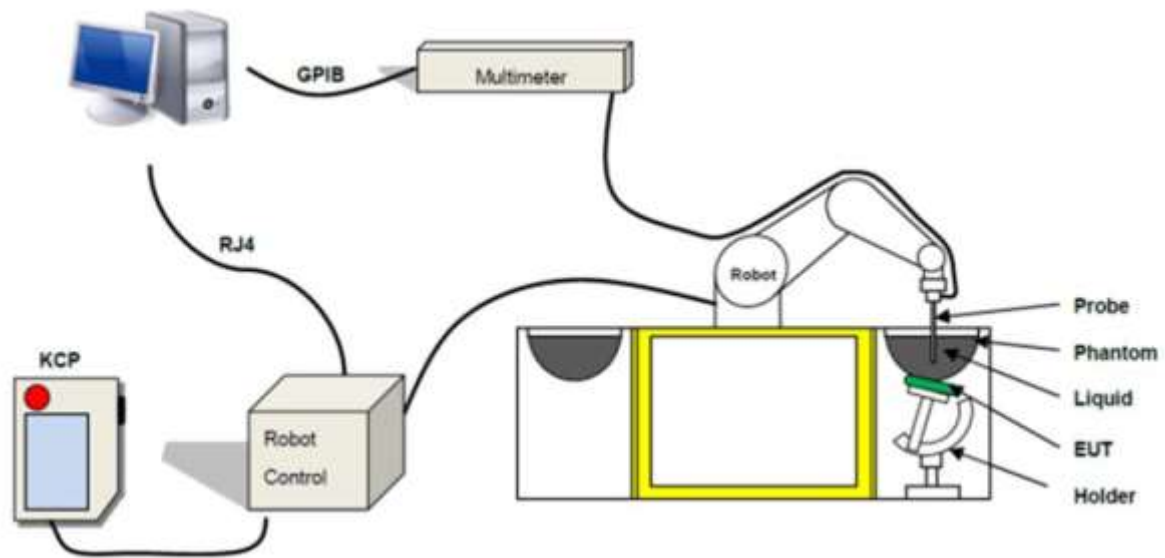


Fig. 8.1 MVG COMOSAR System Configurations

These measurements were performed with the automated near-field scanning system COMOSAR from MVG. The system is based on a high precision robot (working range: 850 mm), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with dosimetric probe (manufactured by MVG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in SAR standard with accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated with the procedure described in SAR standard and found to be better than ± 0.25 dB. The phantom used was the SAM Phantom as described in FCC supplement C, IEEE P1528.

The MVG COMOSAR system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by MVG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ **E-Field Probe Specification**

Device Type	COMOSAR DOSIMETRIC E FIELD PROBE
Model	SSE2
Frequency Range	150 MHz to 6 GHz
Dynamic Range	0.01W/kg to 100W/kg
Probe linearity	<0.25dB
Dimensions	Overall length: 330 mm Tip diameter: 2.5 mm Distance between dipoles / probe extremity: 1 mm


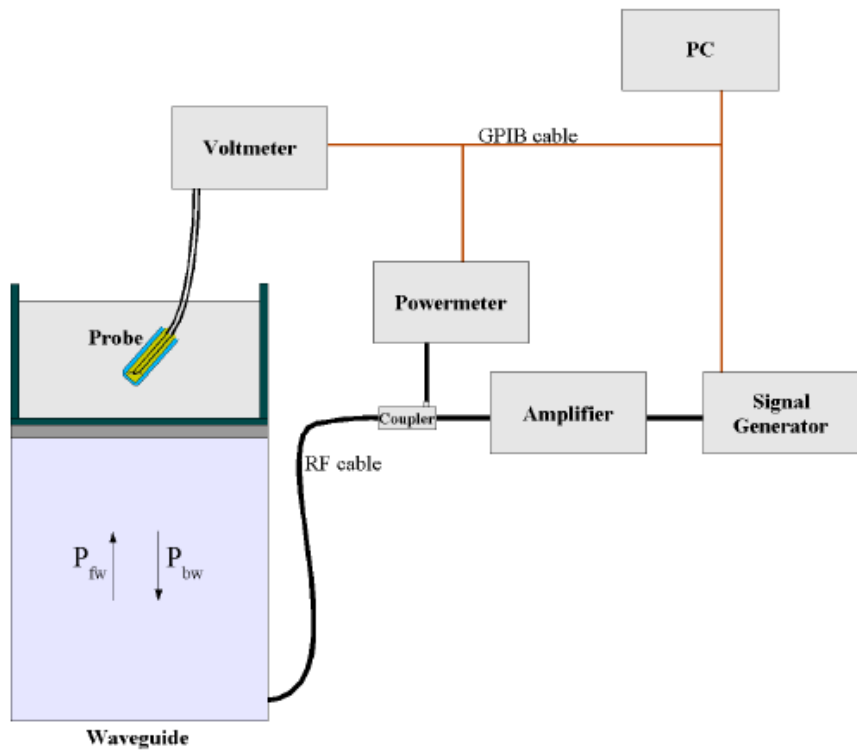


Fig. 8.2 Photo of E-Field Probe

➤ **E-Field Probe Calibration**

Probe calibration is realized, in compliance with EN/IEC 62209-1/-2 and IEEE 1528 std, with CALISAR, MVG proprietary calibration system. The calibration is performed with the technique using reference waveguide.



$$SAR = \frac{4(P_{fw} - P_{bw})}{ab\sigma} \cos^2 \left(\pi \frac{y}{a} \right) e^{-(2\pi/\sigma)z}$$

Where :

- P_{fw} = Forward Power
- P_{bw} = Backward Power
- a and b = Waveguide Dimensions
- σ = Skin Depth

Keithley configuration

Rate=Medium; Filter=ON; RDGS=10; FILTER TYPE=MOVING AVERAGE; RANGE AUTO

After each calibration, a SAR measurement performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The Calibration factors, CF(N), for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N) / V_{lin}(N) \quad (N=1,2,3)$$

The linearized output voltage V_{lin}(N) is obtained from the displayed output voltage V(N) using

$$V_{lin}(N) = V(N) * (1 + V(N) / DCP(N)) \quad N=1,2,3$$

Where the DCP is the dipole compression point in mV

8.2 Robot

The COMOSAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA-KRC2sr) from KUKA is used. The KUKA robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Fig. 8.4 Photo of Robot

8.3 Phantom

<SAM Phantom>


Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume Dimensions	Approx. 27 liters Length: 1000mm; Width: 500mm; Height: 200mm	
Material	Fiberglass based	
Relative permittivity	3-4	
Loss tangent	0.02	
Measurement Areas	Left Head, Right Head, Flat phantom	

Fig. 8.7 Photo of SAM Phantom

The phantom developed by MVG is produced in accordance with the specified in the standards. It has been designed to fit the COMOSAR phantom tables and is delivered with a plastic cover to prevent liquid evaporation.

8.4 Device Holder

The positioning system is made of an extremely stable material, which ensures easy handling and reproducible positioning. It also allows correct positioning of the dipoles referenced by the IEEE, ANSI and IEC.

<Device Holder for SAM Phantom>


Model	Handset Positioning System	
Material properties	The positioning system is made of PETP. This material offers a low permittivity of 3.2 and low loss, with a loss tangent of 0.005 to minimize the influence of the DUT on measurement results.	
Mechanical properties	The positioning system developed by MVG allows a positioning resolution better than 1 mm. The system is fixed on a bottom rail “x axis” so that the positioning system can be quickly moved from the right to the left part of the phantom. In addition, it can be moved on a perpendicular “y axis” and the height can be adapted. The system is also composed of three rotation points for accurate positioning of the device’s acoustical output.	
Accuracy and precision	A curved rail on the top part allows the fast switch from the cheek to the tilt position. The required 15° angle for the tilt position can be easily checked thanks to a printed scale on the curved rail with a tolerance of ± 1°	

Fig. 8.9 Photo of Device Holder

8.5 Test Equipment List

Manufacturer	Equipment Description	Model	Management Number	Cal. Information	
				Last Cal.	Due Date
MVG	COMOSAR DOSIMETRIC E FIELD PROBE	SSE2	WXJ076	05.20.2021	05.19.2022
MVG	COMOSAR 750 MHz REFERENCE DIPOLE	SID750	WXJ076-4	01.14.2021	01.13.2024
MVG	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	WXJ076-5	01.14.2021	01.13.2024
MVG	COMOSAR 1750 MHz REFERENCE DIPOLE	SID1750	WXJ076-8	01.14.2021	01.13.2024
MVG	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	WXJ076-9	01.14.2021	01.13.2024
MVG	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	WXJ076-12	01.14.2021	01.13.2024
MVG	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	WXJ076-13	01.14.2021	01.13.2024
MVG	COMOSAR 3300 MHz REFERENCE DIPOLE	SID3300	WXJ076-14	01.14.2021	01.13.2024
MVG	COMOSAR 3500 MHz REFERENCE DIPOLE	SID3500	WXJ076-15	01.14.2021	01.13.2024
MVG	COMOSAR 3700 MHz REFERENCE DIPOLE	SID3700	WXJ076-16	01.14.2021	01.13.2024
MVG	COMOSAR 3900 MHz REFERENCE DIPOLE	SID3900	WXJ076-17	01.14.2021	01.13.2024
MVG	COMOSAR 5200-5800 MHz REFERENCE DIPOLE	SID5000	WXJ076-21	01.14.2021	01.13.2024
KEITHLEY	DIGIT MULTIMETER	DMM6500	WXJ076-1	12.17.2019	12.16.2022
MVG	MVG Measurement Software	OpenSAR	Version: V5_01_09	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-2	N.C.R	N.C.R
MVG	COMOSAR IEEE SAM PHANTOM	N/A	WXG009-3	N.C.R	N.C.R
MVG	MOBILE PHONE POSITIONNING SYSTEM	N/A	WXG009-4	N.C.R	N.C.R
KUKA	Robot	KR 6 R900 sixx	WXG009-1	N.C.R	N.C.R
KEYSIGHT	UXM 5G Wireless Test Platform	E7515B	WXJ008-6	11.27.2020	11.26.2021
Anritsu	Universal Radio Communication Analyzer	MT8820C	WXJ008-5	03.03.2021	03.02.2022
R&S	Universal Radio Communication Tester	CMU200	WXJ008-2	06.18.2020	06.17.2022
HP	Network Analyzer	8753D	WXJ024	06.18.2020	06.17.2022
KEYSIGHT	EPM Series Power Meter	N1914A	WXJ075	08.29.2021	08.28.2022
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-1	08.29.2021	08.28.2022
KEYSIGHT	E-Series Power Sensor	E9300H	WXJ075-2	08.29.2021	08.28.2022
KEYSIGHT	Signal Generator	N5173B	WXJ006-7	03.25.2021	03.24.2022
Huber Suhner	RF Cable	SUCOFLEX	WXG008-13	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-14	See Note 3	
Huber Suhner	RF Cable	SUCOFLEX	WXG008-15	See Note 3	
Weinschel	Attenuator	23-3-34	WXG008-16	See Note 3	
Anritsu	Directional Coupler	MP654A	WXG008-17	See Note 3	
MVG	LIMESAR DIELECTRIC PROBE	SCLMP	WXG009-5	See Note 4	
TXC	Broadband Amplifier	BBA018000	WXG008-11	See Note 5	

Note:

1. The calibration certificate of MVG can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.

4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by MVG.
5. In system check we need to monitor the level on the spectrum analyzer, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the spectrum analyzer is critical and we do have calibration for it
6. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
7. N.C.R means No Calibration Requirement.

9 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 9.1, for body SAR testing, the liquid height from the center of the flat phantom to liquid top surface is larger than 15 cm, which is shown in Fig. 9.2.

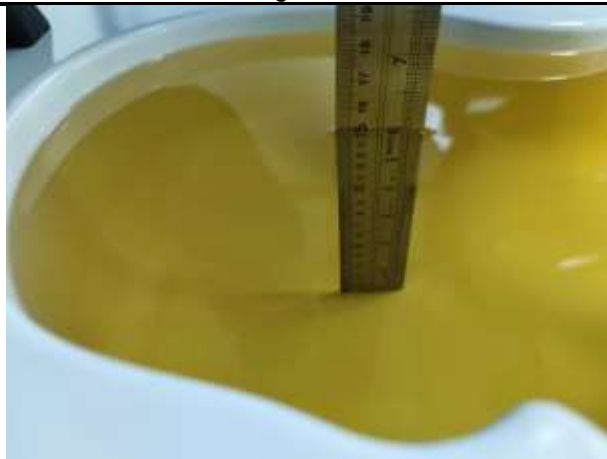


Fig. 9.1 Photo of Liquid Height for Head SAR (depth>15cm)

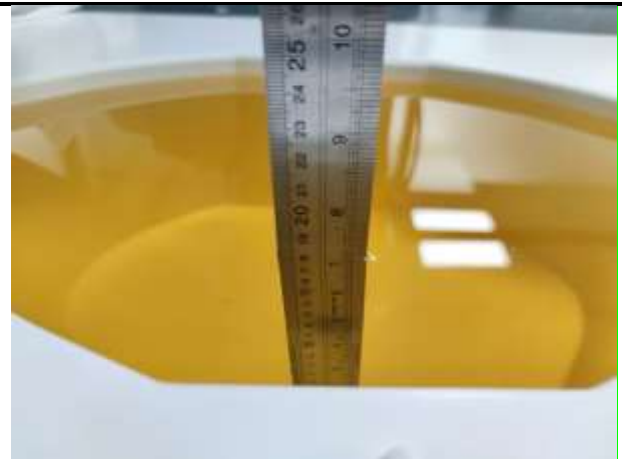


Fig. 9.2 Photo of Liquid Height for Body SAR (depth>15cm)

The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below recommended by the FCC OET 65 supplement C and RSS 102 Issue 5.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m

The dielectric parameters of liquids were verified prior to the SAR evaluation using a MVG Liquid measurement Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target(σ)	Permittivity Target(ϵ_r)	Delta (σ)%	Delta (ϵ_r)%	Limit (%)	Date (mm/dd/yy)
750	21.6	0.92	42.12	0.89	41.9	3.37	0.53	±5	10.19.2021
835	21.6	0.89	41.49	0.90	41.5	-1.11	-0.02	±5	10.19.2021
1750	21.4	1.36	40.13	1.37	40.1	-0.73	0.07	±5	10.15.2021
1900	21.4	1.41	40.01	1.40	40.0	0.71	0.02	±5	10.15.2021
2450	22.5	1.79	39.23	1.80	39.2	-0.56	0.08	±5	10.17.2021
2600	22.5	1.87	39.12	1.96	39.0	-4.59	0.31	±5	10.17.2021
3300	22.1	2.76	38.12	2.71	38.20	1.85	-0.21	±5	10.21.2021
3500	22.1	2.92	37.91	2.91	37.90	0.34	0.03	±5	10.21.2021
3700	22.1	3.12	37.71	3.12	37.70	0.00	0.03	±5	10.21.2021
3900	22.1	3.22	37.05	3.32	37.50	-3.01	-1.20	±5	10.21.2021
5200	23.1	4.66	36.10	4.67	35.96	-0.21	0.28	±5	10.22.2021
5800	23.1	5.30	35.28	5.27	35.30	0.57	-0.06	±5	10.22.2021

10 SAR System Verification

Each ComoSAR system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the OpenSAR software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ **Purpose of System Performance check**

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ **System Setup**

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

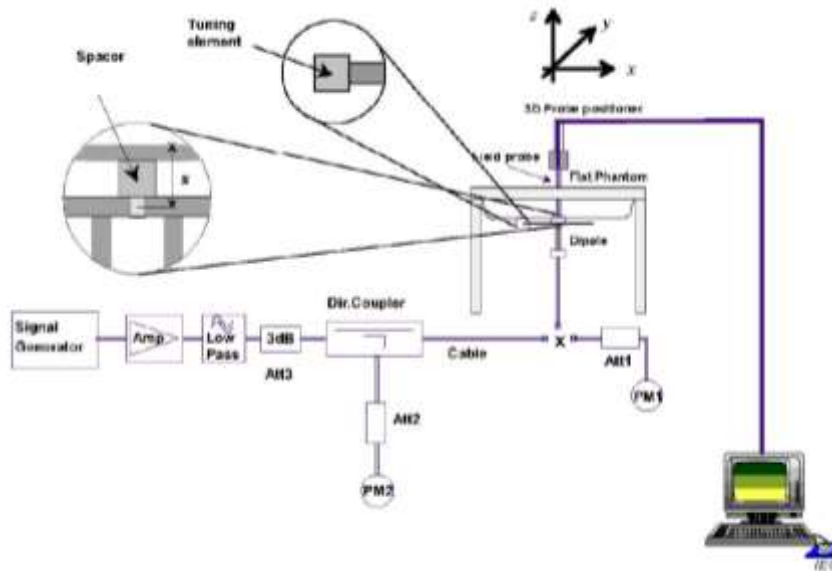


Fig.10.1 System Verification Setup Diagram

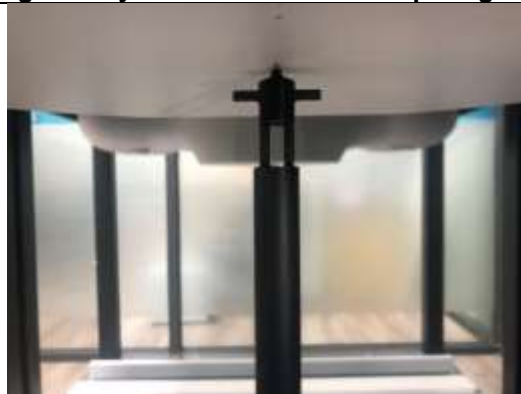


Fig.10.2 Photo of Dipole setup

➤

➤ **System Verification Results**

Comparing to the original SAR value provided by MVG, the verification data should be within its specification of 10%. The table as below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix C of this report.

Date (mm/dd/yy)	Frequency (MHz)	Power fed onto dipole (mW)	Measured 1g SAR (W/kg)	Normalized to 1W 1g SAR (W/kg)	1W Target 1g SAR (W/kg)	Deviation (%)
10.19.2021	750	100	0.79	7.86	8.57	-8.28
10.19.2021	835	100	0.98	9.80	9.57	2.40
10.15.2021	1750	100	3.38	33.80	36.50	-7.40
10.15.2021	1900	100	3.76	37.60	39.60	-5.05
10.17.2021	2450	100	5.75	57.50	52.92	8.65
10.17.2021	2600	100	5.61	56.10	55.47	1.14
10.21.2021	3300	100	6.21	62.10	66.54	-6.67
10.21.2021	3500	100	6.72	67.20	67.11	0.13
10.21.2021	3700	100	6.35	63.50	68.36	-7.11
10.21.2021	3900	100	6.78	67.80	66.92	1.32
10.22.2021	5200	100	6.98	69.80	76.67	-2.93
10.22.2021	5800	100	6.67	66.70	78.36	-8.06

11 EUT Testing Position

This EUT was tested in Nine different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/ Left /Right /Top of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

11.1 Handset Reference Points

- The vertical centreline passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centreline and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig.11.1 Illustration for Front, Back and Side of SAM Phantom

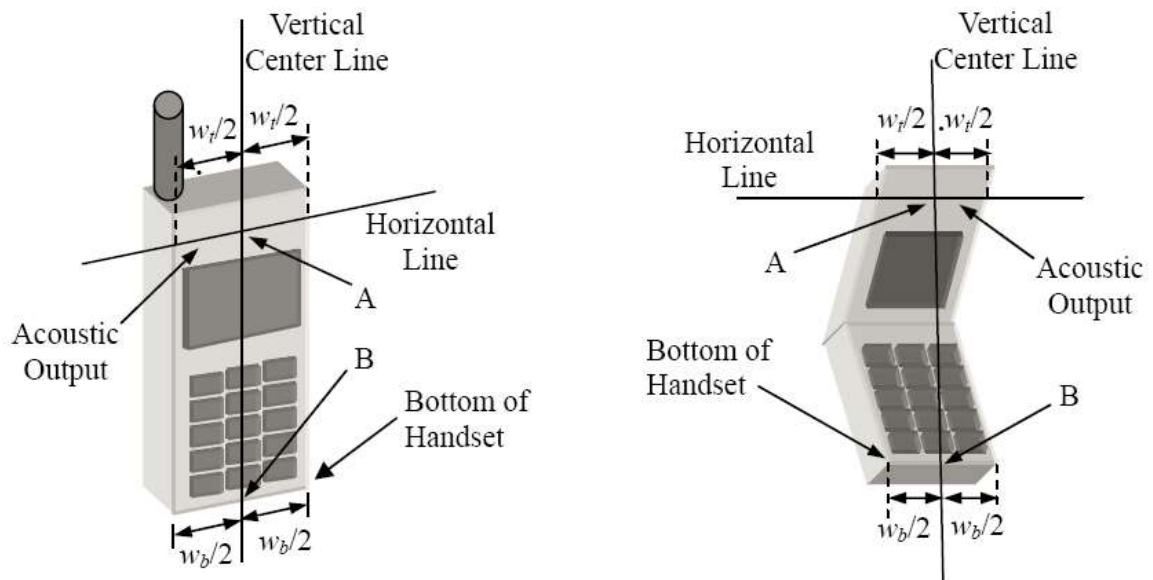


Fig. 11.2 Illustration for Handset Vertical and Horizontal Reference Lines

11.2 Positioning for Cheek / Touch

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)



Fig. 11.3 Illustration for Cheek Position

11.3 Positioning for Ear / 15° Tilt

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).



Fig.11.4 Illustration for Tilted Position

11.4 SAR Evaluations near the Mouth/Jaw Regions of the SAM Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

11.5 Body Worn Accessory Configurations

- To position the device parallel to the phantom surface with either keypad up or down.
- To adjust the device parallel to the flat phantom.
- To adjust the distance between the device surface and the flat phantom to 10 mm or holster surface and the flat phantom to 0 mm.

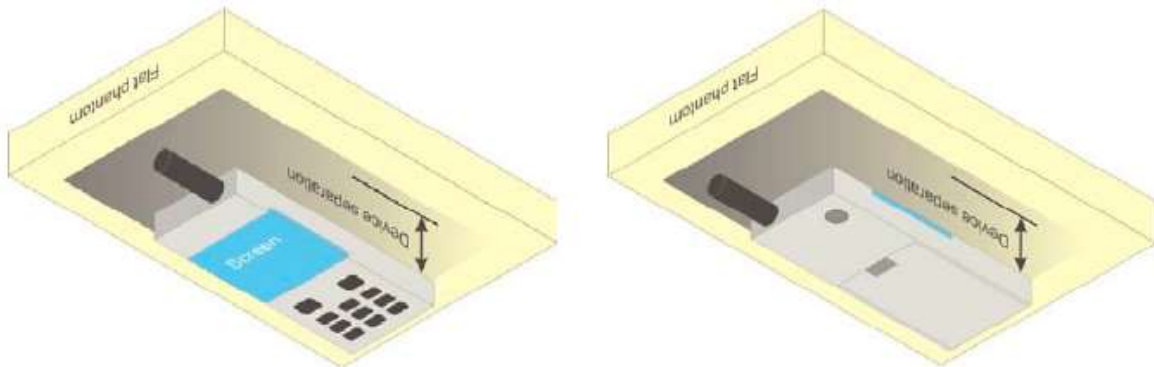


Fig.11.5 Illustration for Body Worn Position

11.6 Wireless Router (Hotspot) Configurations

Some battery-operated handsets have the capability to transmit and receive internet connectivity through simultaneous transmission of WIFI in conjunction with a separate licensed transmitter. The FCC has provided guidance in KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device with antennas 2.5 cm or closer to the edge of the device, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. Therefore, SAR must be evaluated for each frequency transmission and mode separately and summed with the WIFI transmitter according to KDB 648474 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.

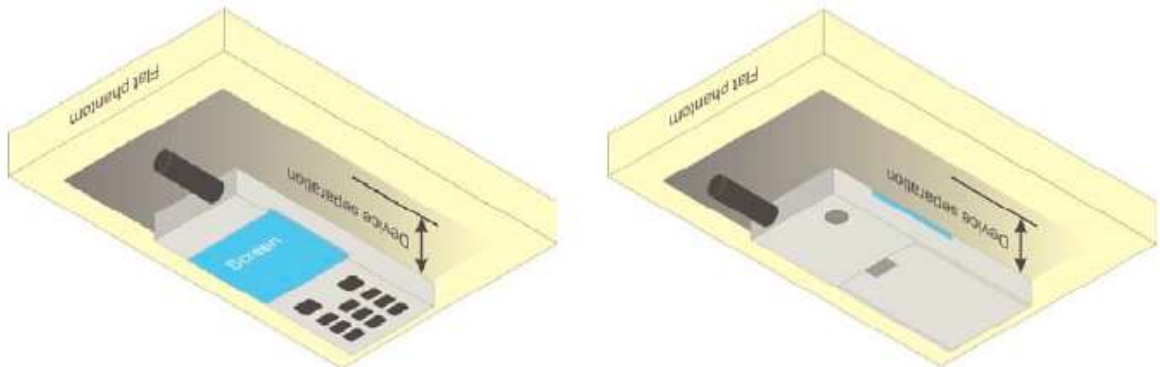


Fig.11.6 Illustration for Hotspot Position

12 Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- For WWAN power measurement, use base station simulator to configure EUT WWAN transition in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- Connect EUT RF port through RF cable to the power meter or spectrum analyzer, and measure WLAN/BT output power.

<Conducted power measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- Place the EUT in positions as Appendix B demonstrates.
- Set scan area, grid size and other setting on the OpenSAR software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band.
- Measure SAR results for other channels in worst SAR testing position if the Reported SAR or highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power drift measurement

12.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The OpenSAR software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a “cube” measurement. The measured volume must include the 1g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan.
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- Generation of a high-resolution mesh within the measured volume.
- Interpolation of all measured values from the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- Calculation of the averaged SAR within masses of 1g and 10g.

12.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

12.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

12.4 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

12.5 SAR Averaged Methods

In COMOSAR system, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1g and 10g cubes, the extrapolation distance should not be larger than 5 mm.

12.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. If the power drifts more than 5%, the SAR will be retested.

13 Conducted RF Output Power

13.1 GSM Conducted Power

Band: GSM 850 Channel	Burst Average Power (dBm)			Frame-Average Power(dBm)		
	128	190	251	128	190	251
Frequency (MHz)	824.2	836.6	848.8	824.2	836.6	848.8
GSM (GMSK, Voice)	32.15	32.42	32.40	23.12	23.39	23.37
GPRS (GMSK, 1 TX slot)	32.15	32.33	32.35	23.12	23.30	23.32
GPRS (GMSK, 2 TX slots)	31.50	31.74	31.76	25.48	25.72	25.74
GPRS (GMSK, 3 TX slots)	29.86	30.10	30.12	25.60	25.84	25.86
GPRS (GMSK, 4 TX slots)	28.71	28.97	28.99	25.70	25.96	25.98
EGPRS (8PSK, 1 TX slot)	27.05	27.12	27.26	18.02	18.09	18.23
EGPRS (8PSK, 2 TX slots)	25.83	26.00	26.10	19.81	19.98	20.08
EGPRS (8PSK, 3 TX slots)	23.70	23.86	23.99	19.44	19.60	19.73
EGPRS (8PSK, 4 TX slots)	22.20	22.40	22.46	19.19	19.39	19.45

Remark:

- The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle “x” of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
- CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

- For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 850 Voice mode.
- For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
- For GPRS multi time slots SAR measurement, when the measured maximum output power levels are within 0.25 dB of each other, test the configuration with the most number of time slots.
- Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Band: PCS 1900 Channel	Burst Average Power (dBm)			Frame-Average Power(dBm)		
	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, Voice)	29.68	29.64	29.55	20.65	20.61	20.52
GPRS (GMSK, 1 TX slot)	29.69	29.61	29.54	20.66	20.58	20.51
GPRS (GMSK, 2 TX slots)	29.00	28.95	28.89	22.98	22.93	22.87
GPRS (GMSK, 3 TX slots)	27.34	27.30	27.24	23.08	23.04	22.98
GPRS (GMSK, 4 TX slots)	26.23	26.21	26.17	23.22	23.20	23.16
EGPRS (8PSK, 1 TX slot)	25.45	26.21	27.24	16.42	17.18	18.21
EGPRS (8PSK, 2 TX slots)	24.12	23.97	26.17	18.10	17.95	20.15
EGPRS (8PSK, 3 TX slots)	21.62	21.54	21.5	17.36	17.28	17.24
EGPRS (8PSK, 4 TX slots)	20.12	20.04	20.1	17.11	17.03	17.09

Remark:

3. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated method are shown as below:
The duty cycle "x" of different time slots as below:
1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8
Based on the calculation formula:
Frame-averaged power = Burst averaged power + 10 log (x)
So,
Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03
Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02
Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26
Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01
4. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

Note:

1. For Head SAR testing, GSM Voice mode should be evaluated, therefore the EUT was set in GSM 1900 Voice mode.
2. For Hotspot mode SAR testing, GPRS and EGPRS mode should be evaluated, therefore the EUT was set in GPRS 4 TX slots mode due to the highest frame-averaged power.
3. Per KDB447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

13.2 WCDMA Conducted Power

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table 1

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

HSDPA Sub-test setup configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Rohde & Schwarz CMU200 referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table 2

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSUPA Sub-test setup configuration

WCDMA Conducted Power:

WCDMA Average power (dBm)			
Band	WCDMA Band V		
Channel	4132	4183	4233
Frequency (MHz)	826.4	836.6	846.6
AMR 12.2 kbps	23.54	23.56	23.62
RMC 12.2 kbps	23.53	23.54	23.61
HSDPA Sub-test 1	22.50	22.52	22.56
HSDPA Sub-test 2	22.14	22.14	22.18
HSDPA Sub-test 3	22.02	22.03	22.09
HSDPA Sub-test 4	22.01	22.01	22.07
HSUPA Sub-test 1	20.46	20.45	20.51
HSUPA Sub-test 2	20.99	20.96	21.03
HSUPA Sub-test 3	21.49	21.49	21.51
HSUPA Sub-test 4	20.50	20.50	20.54
HSUPA Sub-test 5	22.43	22.40	22.44

WCDMA Average power (dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency (MHz)	1712.4	1732.6	1752.6
AMR 12.2 kbps	23.12	23.29	23.30
RMC 12.2 kbps	23.08	23.27	23.28
HSDPA Sub-test 1	22.10	22.25	22.26
HSDPA Sub-test 2	21.71	21.87	21.87
HSDPA Sub-test 3	21.65	21.77	21.79
HSDPA Sub-test 4	21.57	21.73	21.72
HSUPA Sub-test 1	20.05	20.19	20.19
HSUPA Sub-test 2	20.54	20.73	20.73
HSUPA Sub-test 3	21.06	21.19	21.22
HSUPA Sub-test 4	20.07	20.22	20.24
HSUPA Sub-test 5	22.02	22.16	22.16

WCDMA Average power (dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1880.0	1907.6
AMR 12.2 kbps	23.11	23.04	23.13
RMC 12.2 kbps	23.09	23.05	23.13
HSDPA Sub-test 1	22.11	22.04	22.11
HSDPA Sub-test 2	21.69	21.64	21.67
HSDPA Sub-test 3	21.59	21.53	21.55
HSDPA Sub-test 4	21.53	21.52	21.60
HSUPA Sub-test 1	19.98	19.93	19.99
HSUPA Sub-test 2	20.52	20.46	20.53
HSUPA Sub-test 3	21.05	20.97	21.03
HSUPA Sub-test 4	20.05	19.98	20.04
HSUPA Sub-test 5	21.97	21.90	21.96

Note:

1. Applying the subtest setup in Table C.11.1.3 of 3GPP TS 34.121-1
2. Per KDB 941225 D01, RMC 12.2kbps mode is used to evaluate SAR due the highest output power. If AMR 12.2 kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2 kbps can be excluded.

13.3 LTE Conducted Power

13.3.1 Largest channel bandwidth standalone SAR test requirements

QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

QPSK with 50% RB allocation

The procedures required for 1 RB allocation in section 4.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.

QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in sections 4.2.1 and 4.2.2 are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 4.2.1, 5.2.2 and 4.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

13.3.2 Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 4.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth. For example, 50 RB in 10 MHz channel bandwidth does not apply to 5 MHz channel bandwidth; therefore, this cannot be tested in the smaller channel bandwidth. However, 50% RB allocation in 10 MHz channel bandwidth is equivalent to 100% RB allocation in 5 MHz channel bandwidth; therefore, these are the equivalent configurations to be compared to determine the specific channel and configuration in the smaller channel bandwidth that need SAR testing.

13.3.3 TDD LTE configuration setup for SAR measurement

According to KDB 941225 D05v02r03 and April 2013 TCB workshop slides, SAR must be tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- see 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions and must be taken into consideration to determine the transmission duty factor
 - according to the worst case uplink and downlink cyclic prefix requirements for UpPTS to determine the highest SAR test duty factor

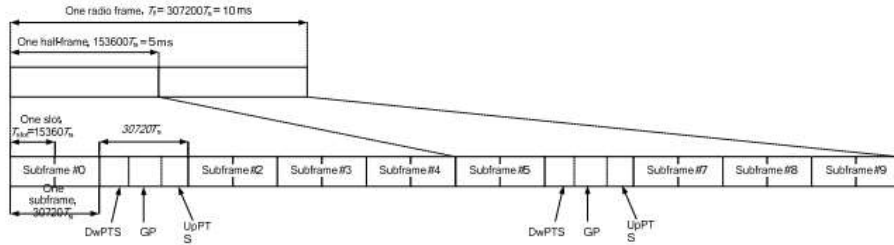


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity)

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink				
	DwPTS	UpPTS		DwPTS	UpPTS			
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$			$7680 \cdot T_s$				
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-			-	-
9	$13168 \cdot T_s$			-			-	-

Per 3GPP 36.211 section 4.2, each radio frame of length $T_f=37200 \cdot T_s = 10$ ms consists of two half-frames of length $153600 \cdot T_s = 5$ ms each. Each half-frame consists of five subframes of length $30720 \cdot T_s = 1$ ms. So, the uplink duty factor in special subframe as below:

Special Subframe configuration	Normal cyclic prefix in downlink		Extended cyclic prefix in downlink	
	Duty factor of Uplink		Duty factor of Uplink	
	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	7.14%	8.33%	7.14%	8.33%
1	7.14%	8.33%	7.14%	8.33%
2	7.14%	8.33%	7.14%	8.33%
3	7.14%	8.33%	7.14%	8.33%
4	7.14%	8.33%	14.27%	16.67%
5	14.27%	16.67%	14.27%	16.67%
6	14.27%	16.67%	14.27%	16.67%
7	14.27%	16.67%	14.27%	16.67%
8	14.27%	16.67%	/	/
9	14.27%	16.67%	/	/

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

According to above table:

1. The highest duty factor is configuration 0;
2. The duty factor of uplink in one half-frame with normal cyclic prefix is: $(3\text{ms} + 0.143\text{ms})/5\text{ms}=62.86\%$;
3. The duty factor of uplink in one half-frame with extended cyclic prefix is: $(3\text{ms} + 0.167\text{ms})/5\text{ms}=63.34\%$;
4. For purpose to get the worst case SAR test duty factor, the duty factor of normal cyclic prefix in uplink scaled-up to the extended cyclic prefix in uplink, the scaling factor is $63.34\%/62.86\%=1.008$, and the scaling factor will be taken into the final measured SAR.

LTE Band 2 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18607	18900	19193
					1850.7MHz	1880.0MHz	1909.3MHz
Band 2	1.4	QPSK	1	0	23.39	23.33	23.27
			1	2	23.38	23.28	23.24
			1	5	23.39	23.31	23.24
			3	0	23.42	23.36	23.31
			3	1	23.42	23.35	23.33
			3	2	23.43	23.35	23.32
			6	0	22.46	22.38	22.45
		16QAM	1	0	22.35	22.23	22.10
			1	2	22.34	22.26	22.10
			1	5	22.31	22.19	22.07
			3	0	22.24	22.17	22.26
			3	1	22.24	22.40	22.26
			3	2	22.24	22.17	22.25
			6	0	21.43	21.36	21.32

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18615	18900	19185
					1851.5MHz	1880.0MHz	1908.5MHz
Band 2	3	QPSK	1	0	23.37	23.21	23.06
			1	7	23.33	23.20	23.05
			1	14	23.34	23.25	23.05
			8	0	22.24	22.24	22.19
			8	4	22.22	22.21	22.21
			8	7	22.23	22.18	22.14
			15	0	22.27	22.16	22.15
		16QAM	1	0	22.32	22.14	21.88
			1	7	22.32	22.05	21.89
			1	14	22.32	22.04	21.88
			8	0	21.25	21.18	21.17
			8	4	21.27	21.14	21.16
			8	7	21.25	21.12	21.16
			15	0	21.25	21.09	21.07

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18625	18900	19175
					1852.5MHz	1880.0MHz	1907.5MHz
Band 2	5	QPSK	1	0	23.49	23.29	23.33
			1	12	23.47	23.31	23.35
			1	24	23.50	23.30	23.36
			12	0	22.31	22.26	22.24
			12	6	22.30	22.25	22.25
			12	11	22.30	22.24	22.22
			25	0	22.29	22.22	22.22
		16QAM	1	0	22.25	22.28	22.09
			1	12	22.24	22.28	22.08
			1	24	22.23	22.28	22.12
			12	0	21.28	21.27	21.22
			12	6	21.30	21.29	21.20
			12	11	21.30	21.28	21.20
			25	0	21.27	21.18	21.19

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18650	18900	19150
					1855.0MHz	1880.0MHz	1905.0MHz
Band 2	10	QPSK	1	0	23.38	23.23	23.15
			1	24	23.39	23.25	23.16
			1	49	23.27	23.22	23.10
			25	0	22.30	22.28	22.19
			25	12	22.30	22.22	22.19
			25	24	22.33	22.27	22.21
			50	0	22.30	22.28	22.19
		16QAM	1	0	22.32	22.06	21.94
			1	24	22.36	22.12	21.97
			1	49	22.23	22.06	21.91
			25	0	21.25	21.26	21.24
			25	12	21.25	21.26	21.25
			25	24	21.26	21.27	21.24
			50	0	21.23	21.27	21.19

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18675	18900	19125
					1857.5MHz	1880.0MHz	1902.5MHz
Band 2	15	QPSK	1	0	23.28	23.08	23.12
			1	37	23.31	23.11	23.11
			1	74	23.21	23.06	23.09
			36	0	22.24	22.21	22.17
			36	16	22.18	22.21	22.16
			36	35	22.19	22.15	22.20
			75	0	22.17	22.18	22.22
		16QAM	1	0	22.27	22.24	21.92
			1	37	22.26	22.26	21.95
			1	74	22.19	22.23	21.86
			36	0	21.19	21.26	21.14
			36	16	21.21	21.24	21.17
			36	35	21.21	21.26	21.16
			75	0	21.12	21.19	21.19

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					18700	18900	19100
					1860.0MHz	1880.0MHz	1900.0MHz
Band 2	20	QPSK	1	0	23.32	23.16	23.08
			1	49	23.35	23.24	23.21
			1	99	23.32	23.15	23.10
			50	0	22.25	22.24	22.30
			50	24	22.23	22.27	22.29
			50	49	22.22	22.27	22.30
			100	0	22.25	22.21	22.25
		16QAM	1	0	22.09	22.40	21.95
			1	49	22.17	22.50	22.12
			1	99	22.09	22.39	22.00
			50	0	21.22	21.25	21.29
			50	24	21.21	21.21	21.30
			50	49	21.21	21.23	21.29
			100	0	21.18	21.20	21.27

LTE Band 4 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19957	20175	20393
					1710.7MHz	1732.5MHz	1754.3MHz
Band 4	1.4	QPSK	1	0	22.92	23.30	23.14
			1	2	22.90	23.24	23.14
			1	5	22.91	23.30	23.13
			3	0	22.98	23.33	23.21
			3	1	22.99	23.33	23.21
			3	2	22.99	23.32	23.19
			6	0	22.03	22.27	22.30
		16QAM	1	0	21.82	22.14	21.98
			1	2	21.93	22.18	22.00
			1	5	21.85	22.12	21.94
			3	0	21.90	22.10	22.12
			3	1	21.84	22.10	22.15
			3	2	21.90	22.10	22.16
			6	0	21.04	21.05	21.22

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19965	20175	20385
					1711.5MHz	1732.5MHz	1753.5MHz
Band 4	3	QPSK	1	0	23.16	23.28	23.16
			1	7	23.12	23.29	23.14
			1	14	23.15	23.26	23.18
			8	0	22.00	22.29	22.25
			8	4	22.00	22.24	22.26
			8	7	22.03	22.18	22.22
			15	0	22.03	22.19	22.21
		16QAM	1	0	22.12	22.17	21.94
			1	7	22.10	22.10	21.96
			1	14	22.09	22.10	21.96
			8	0	21.01	21.22	21.23
			8	4	21.01	21.23	21.21
			8	7	21.07	21.19	21.25
			15	0	21.06	21.12	21.15

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					19975	20175	20375
					1712.5MHz	1732.5MHz	1752.5MHz
Band 4	5	QPSK	1	0	23.25	23.37	23.38
			1	12	23.26	23.36	23.44
			1	24	23.31	23.33	23.46
			12	0	21.99	22.30	22.30
			12	6	21.98	22.27	22.31
			12	11	21.99	22.28	22.29
			25	0	22.06	22.26	22.27
		16QAM	1	0	22.01	22.32	22.20
			1	12	22.01	22.34	22.21
			1	24	22.05	22.35	22.22
			12	0	20.95	21.33	21.24
			12	6	20.94	21.29	21.23
			12	11	20.94	21.30	21.24
			25	0	21.06	21.22	21.28

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20000	20175	20350
					1715.0MHz	1732.5MHz	1750.0MHz
Band 4	10	QPSK	1	0	23.10	23.29	23.10
			1	24	23.23	23.33	23.18
			1	49	23.25	23.23	23.16
			25	0	21.96	22.28	22.15
			25	12	21.94	22.32	22.14
			25	24	21.97	22.31	22.14
			50	0	22.08	22.26	22.22
		16QAM	1	0	22.04	22.09	21.86
			1	24	22.17	22.14	21.99
			1	49	22.23	22.04	21.96
			25	0	20.90	21.30	21.15
			25	12	20.89	21.31	21.16
			25	24	20.91	21.32	21.16
			50	0	21.01	21.26	21.17

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20025	20175	20325
					1717.5MHz	1732.5MHz	1747.5MHz
Band 4	15	QPSK	1	0	23.08	23.06	23.09
			1	37	23.23	23.14	23.16
			1	74	23.24	23.01	23.09
			36	0	21.97	22.23	22.08
			36	16	21.98	22.22	22.09
			36	35	21.98	22.18	22.09
			75	0	22.10	22.20	22.16
		16QAM	1	0	22.00	22.22	21.89
			1	37	22.20	22.32	21.93
			1	74	22.20	22.21	21.92
			36	0	20.92	21.28	21.03
			36	16	20.90	21.30	20.98
			36	35	20.92	21.30	20.99
			75	0	21.03	21.18	21.11

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20050	20175	20300
					1720.0MHz	1732.5MHz	1745.0MHz
Band 4	20	QPSK	1	0	23.10	23.05	23.04
			1	49	23.35	23.25	23.17
			1	99	23.41	23.14	23.13
			50	0	21.97	22.29	22.05
			50	24	21.98	22.25	22.07
			50	49	21.99	22.27	22.06
			100	0	22.11	22.27	22.18
		16QAM	1	0	21.86	22.31	21.90
			1	49	22.11	22.50	22.07
			1	99	22.15	22.36	22.05
			50	0	20.92	21.27	21.09
			50	24	20.92	21.24	21.09
			50	49	20.92	21.24	21.09
			100	0	21.04	21.24	21.15

LTE Band 5 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20407	20525	20643
					824.7MHz	836.5MHz	848.3MHz
Band 5	1.4	QPSK	1	0	23.34	23.43	23.32
			1	2	23.31	23.42	23.33
			1	5	23.34	23.45	23.30
			3	0	23.37	23.45	23.41
			3	1	23.38	23.46	23.38
			3	2	23.36	23.47	23.39
		16QAM	6	0	22.45	22.43	22.47
			1	0	22.27	22.30	22.16
			1	2	22.30	22.36	22.18
			1	5	22.27	22.33	22.13
			3	0	22.21	22.28	22.33
			3	1	22.20	22.26	22.35
			3	2	22.22	22.26	22.35
			6	0	21.42	21.22	21.37

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20415	20525	20635
					825.5MHz	836.5MHz	847.5MHz
Band 5	3	QPSK	1	0	23.51	23.43	23.37
			1	7	23.51	23.45	23.34
			1	14	23.45	23.45	23.36
			8	0	22.46	22.37	22.45
			8	4	22.42	22.35	22.44
			8	7	22.43	22.43	22.38
			15	0	22.37	22.44	22.42
		16QAM	1	0	22.47	22.31	22.17
			1	7	22.47	22.32	22.16
			1	14	22.40	22.32	22.17
			8	0	21.48	21.34	21.46
			8	4	21.49	21.34	21.42
			8	7	21.45	21.37	21.37
			15	0	21.45	21.31	21.34

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20425	20525	20625
					826.5MHz	836.5MHz	846.5MHz
Band 5	5	QPSK	1	0	23.61	23.53	23.58
			1	12	23.60	23.53	23.63
			1	24	23.63	23.54	23.62
			12	0	22.37	22.43	22.50
			12	6	22.39	22.44	22.50
			12	11	22.38	22.45	22.49
			25	0	22.43	22.40	22.42
		16QAM	1	0	22.42	22.55	22.40
			1	12	22.39	22.53	22.43
			1	24	22.41	22.58	22.43
			12	0	21.36	21.47	21.47
			12	6	21.35	21.49	21.50
			12	11	21.37	21.50	21.49
			25	0	21.43	21.37	21.40

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20450	20525	20600
					829MHz	836.5MHz	844MHz
Band 5	10	QPSK	1	0	23.52	23.43	23.36
			1	24	23.50	23.52	23.42
			1	49	23.52	23.49	23.38
			25	0	22.40	22.46	22.47
			25	12	22.39	22.50	22.52
			25	24	22.41	22.42	22.46
			50	0	22.44	22.43	22.46
		16QAM	1	0	22.46	22.28	22.21
			1	24	22.49	22.34	22.19
			1	49	22.45	22.32	22.20
			25	0	21.35	21.50	21.47
			25	12	21.35	21.51	21.51
			25	24	21.35	21.46	21.49
			50	0	21.42	21.45	21.46

LTE Band 7 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20775	21100	21425
					2502.5MHz	2535.0MHz	2567.5MHz
Band 7	5	QPSK	1	0	23.31	23.15	23.17
			1	12	23.32	23.11	23.14
			1	24	23.36	23.17	23.17
			12	0	22.07	22.08	22.05
			12	6	22.09	22.10	22.05
			12	11	22.13	22.03	22.04
			25	0	22.13	22.02	22.03
		16QAM	1	0	22.07	22.14	21.93
			1	12	22.06	22.12	21.97
			1	24	22.10	22.15	21.95
			12	0	21.07	21.09	21.02
			12	6	21.07	21.09	21.01
			12	11	21.04	21.08	21.02
			25	0	21.13	20.98	21.05

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20800	21100	21400
					2505.0MHz	2535.0MHz	2565.0MHz
Band 7	10	QPSK	1	0	23.13	23.05	22.98
			1	24	23.23	23.11	22.96
			1	49	23.21	23.04	22.89
			25	0	22.07	22.05	22.10
			25	12	22.10	22.03	22.05
			25	24	22.06	22.03	22.09
			50	0	22.10	22.10	22.11
		16QAM	1	0	22.11	21.94	21.80
			1	24	22.21	21.94	21.77
			1	49	22.17	21.91	21.75
			25	0	21.06	21.11	21.14
			25	12	21.02	21.05	21.13
			25	24	21.04	21.10	21.12
			50	0	21.10	21.09	21.05

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20825	21100	21375
					2507.5MHz	2535.0MHz	2562.5MHz
Band 7	15	QPSK	1	0	23.07	22.92	22.91
			1	37	23.24	22.99	23.01
			1	74	23.09	22.90	22.88
			36	0	22.04	22.01	22.09
			36	16	22.04	22.03	22.07
			36	35	22.01	22.02	22.08
			75	0	22.07	22.08	22.06
		16QAM	1	0	22.08	22.05	21.77
			1	37	22.18	22.14	21.86
			1	74	22.04	22.04	21.74
			36	0	21.01	21.09	21.05
			36	16	20.98	21.07	21.04
			36	35	21.02	21.07	21.04
			75	0	21.05	21.05	21.04

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					20850	21100	21350
					2510.0MHz	2535.0MHz	2560.0MHz
Band 7	20	QPSK	1	0	23.09	22.89	22.86
			1	49	23.26	23.06	23.05
			1	99	23.15	22.96	22.86
			50	0	22.07	22.06	22.20
			50	24	22.04	22.06	22.24
			50	49	22.06	22.07	22.23
			100	0	22.07	22.13	22.16
		16QAM	1	0	21.91	22.14	21.76
			1	49	22.05	22.30	21.89
			1	99	21.90	22.19	21.88
			50	0	21.00	21.05	21.24
			50	24	21.02	21.07	21.22
			50	49	20.99	21.05	21.21
			100	0	21.03	21.06	21.09

LTE Band 17 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23755	23790	23825
					706.5MHz	710.0MHz	713.5MHz
Band 17	5	QPSK	1	0	22.99	22.98	23.00
			1	12	22.97	22.97	23.00
			1	24	23.05	22.94	23.10
			12	0	21.86	21.85	21.78
			12	6	21.89	21.85	21.80
			12	11	21.90	21.85	21.83
			25	0	21.86	21.90	21.87
		16QAM	1	0	21.79	21.98	21.87
			1	12	21.81	21.97	21.82
			1	24	21.84	21.98	21.91
			12	0	20.82	20.82	20.80
			12	6	20.80	20.83	20.79
			12	11	20.78	20.85	20.78
			25	0	20.85	20.84	20.78

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					23780	23790	23800
					709.0MHz	710.0MHz	711.0MHz
Band 17	10	QPSK	1	0	22.82	22.88	22.87
			1	24	22.91	23.02	22.97
			1	49	23.03	22.95	22.98
			25	0	21.95	21.89	21.86
			25	12	21.94	21.86	21.87
			25	24	21.95	21.85	21.87
			50	0	21.97	21.94	21.90
		16QAM	1	0	21.80	21.73	21.61
			1	24	21.90	21.84	21.70
			1	49	22.03	21.77	21.76
			25	0	20.90	20.90	20.87
			25	12	20.89	20.88	20.88
			25	24	20.90	20.88	20.87
			50	0	20.92	20.93	20.85

LTE Band 38 part:

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					37775	38000	38225
					2572.50MHz	2595.00MHz	2617.50MHz
Band 38	5	QPSK	1	0	23.23	23.21	22.94
			1	12	23.17	23.19	22.93
			1	24	23.18	23.20	22.96
			12	0	21.93	21.97	21.96
			12	6	21.92	21.98	21.92
			12	11	21.94	21.98	21.96
			25	0	21.94	21.94	21.94
		16QAM	1	0	21.96	21.90	21.96
			1	12	21.84	21.87	21.94
			1	24	21.87	21.86	22.00
			12	0	20.90	20.94	20.95
			12	6	20.91	20.93	20.95
			12	11	20.91	20.93	20.95
			25	0	20.90	20.88	20.87

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					378000	38000	38200
					2575.00MHz	2595.00MHz	2615.00MHz
Band 38	10	QPSK	1	0	23.02	23.02	22.90
			1	24	23.00	23.02	22.93
			1	49	23.01	22.93	22.97
			25	0	21.94	21.97	21.96
			25	12	21.94	21.95	21.91
			25	24	21.94	21.95	21.90
			50	0	21.95	21.96	21.98
		16QAM	1	0	21.98	21.97	21.85
			1	24	21.95	22.00	21.86
			1	49	21.98	21.93	21.84
			25	0	20.92	20.94	20.94
			25	12	20.90	20.96	20.94
			25	24	20.89	20.96	20.94
			50	0	20.93	20.90	20.96

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					37825	38000	38175
					2577.50MHz	2595.00MHz	2612.50MHz
Band 38	15	QPSK	1	0	22.97	22.95	22.83
			1	37	22.98	22.99	22.92
			1	74	22.95	22.90	22.82
			36	0	21.90	21.90	21.87
			36	16	21.91	21.92	21.90
			36	35	21.87	21.89	21.87
			75	0	21.83	21.85	21.89
		16QAM	1	0	21.95	21.93	21.91
			1	37	21.94	21.97	22.02
			1	74	21.94	21.90	21.97
			36	0	20.83	20.85	20.98
			36	16	20.84	20.90	20.94
			36	35	20.88	20.85	20.95
			75	0	20.87	20.83	20.91

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					37850	38000	38150
					2580.00MHz	2595.00MHz	2610.00MHz
Band 38	20	QPSK	1	0	22.91	22.79	22.70
			1	49	22.99	22.92	22.85
			1	99	22.88	22.86	22.79
			50	0	21.90	21.93	21.97
			50	24	21.93	21.94	21.98
			50	49	21.95	21.96	21.93
			100	0	21.91	21.87	21.90
		16QAM	1	0	21.81	22.04	21.60
			1	49	21.88	22.20	21.71
			1	99	21.80	22.09	21.67
			50	0	20.90	20.96	20.95
			50	24	20.93	20.96	20.94
			50	49	20.91	20.91	20.95
			100	0	20.87	20.88	20.91

LTE Band 41 part:

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)					
					40065	40353	40640	40928	41215	
					2537.5MHz	2566.5MHz	2595.0MHz	2624.0MHz	2652.5MHz	
Band 41	5	QPSK	1	0	23.26	23.10	23.31	23.11	23.02	
			1	12	23.27	23.25	23.28	23.24	23.04	
			1	24	23.25	23.11	23.28	23.15	23.04	
			12	0	22.04	22.05	22.05	22.04	22.06	
			12	6	22.05	22.03	22.05	22.02	22.06	
			12	11	22.04	22.10	22.05	22.11	22.07	
		16QAM	25	0	22.04	22.03	22.04	22.04	22.04	22.03
			1	0	22.00	22.01	22.02	22.06	22.04	
			1	12	22.00	22.05	21.99	22.05	22.05	
			1	24	21.99	21.98	21.98	21.99	22.08	
			12	0	21.02	21.03	21.03	21.07	21.09	
			12	6	20.99	20.97	20.99	20.96	21.10	
			12	11	20.99	20.98	20.99	20.97	21.10	
			25	0	21.04	21.05	21.03	21.04	20.99	

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40090	40365	40640	40915	41190
					2540.0MHz	2567.5MHz	2595.0MHz	2622.5MHz	2650.0MHz
Band 41	10	QPSK	1	0	23.02	23.01	23.09	23.07	22.99
			1	24	23.06	23.04	23.13	23.06	23.03
			1	49	23.04	23.05	23.02	23.04	23.02
			25	0	22.02	22.06	22.06	22.02	22.02
			25	12	22.05	22.07	22.06	22.08	22.02
			25	24	22.00	22.12	22.07	22.11	22.02
		16QAM	50	0	22.09	22.03	22.09	22.07	22.03
			1	0	22.04	22.06	22.07	22.03	21.91
			1	24	22.08	22.05	22.07	22.02	21.89
			1	49	22.03	21.98	22.04	21.98	21.89
			25	0	21.02	21.07	21.04	21.04	21.05
			25	12	20.98	20.96	21.04	20.98	21.00
			25	24	20.96	20.94	20.99	20.93	21.01
			50	0	21.04	21.06	21.05	21.01	21.00

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40115	40378	40640	40903	41165
					2542.5MHz	2569.0MHz	2595.0MHz	2621.5MHz	2647.5MHz
Band 41	15	QPSK	1	0	22.98	23.01	23.05	23.07	22.88
			1	37	23.10	23.04	23.10	23.08	22.97
			1	74	23.04	23.07	23.01	23.01	22.92
			36	0	22.00	22.05	21.95	22.04	21.99
			36	16	22.00	22.07	21.96	22.00	22.02
			36	35	22.00	22.17	21.96	22.12	21.98
			75	0	22.02	22.01	21.99	22.05	21.97
		16QAM	1	0	21.98	22.08	22.02	22.01	21.98
			1	37	22.07	22.02	22.06	22.06	22.08
			1	74	22.03	21.95	21.99	21.92	22.03
			36	0	20.92	21.04	20.98	21.01	21.07
			36	16	20.92	20.94	20.98	20.95	21.07
			36	35	20.93	20.96	20.98	20.97	21.02
			75	0	20.98	21.04	20.97	21.00	20.97

LTE Band	Band width (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)				
					40140	40390	40640	40890	41140
					2545.0MHz	2570.0MHz	2595.0MHz	2620.0MHz	2645.0MHz
Band 41	20	QPSK	1	0	22.92	22.97	22.90	22.91	22.90
			1	49	23.10	22.88	23.06	22.87	23.04
			1	99	23.00	23.01	22.93	23.00	22.96
			50	0	22.02	21.85	21.99	21.87	21.98
			50	24	22.00	21.90	22.04	21.93	21.98
			50	49	22.01	22.02	22.05	22.00	22.01
			100	0	22.01	21.95	21.99	21.96	21.97
		16QAM	1	0	21.84	21.91	21.82	21.95	22.05
			1	49	22.00	22.06	21.96	22.07	22.23
			1	99	21.88	21.92	21.85	21.97	22.20
			50	0	20.97	21.01	20.94	21.05	20.98
			50	24	20.96	20.95	20.99	20.98	20.99
			50	49	20.97	20.97	20.96	20.94	20.96
			100	0	20.99	21.00	20.97	21.05	21.00

Note:

1. Per KDB 447498 D01v05r02 section 4.1, 6), the required test channels number is 5 for LTE Band 41.

LTE Band 66 part

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131979	132322	132665
					1710.70MHz	1745.00MHz	1779.30MHz
Band 66	1.4	QPSK	1	0	22.66	22.95	22.97
			1	2	22.63	22.92	22.89
			1	5	22.65	22.96	22.95
			3	0	22.73	22.97	23.04
			3	1	22.71	23.01	23.05
			3	2	22.74	23.00	23.04
			6	0	21.72	21.99	22.01
		16QAM	1	0	21.82	22.11	22.14
			1	2	21.87	22.15	22.18
			1	5	21.80	22.10	22.17
			3	0	21.62	21.89	21.92
			3	1	21.65	21.90	21.94
			3	2	21.63	21.92	21.92
			6	0	20.76	21.00	20.86

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131987	132322	132657
					1711.50MHz	1745.00MHz	1778.50MHz
Band 66	3	QPSK	1	0	22.75	22.98	22.94
			1	7	22.80	22.98	22.90
			1	14	22.83	23.01	22.90
			8	0	21.72	22.01	21.99
			8	4	21.70	22.01	21.99
			8	7	21.74	21.95	21.98
			15	0	21.75	21.96	22.01
		16QAM	1	0	21.93	22.19	21.87
			1	7	21.92	22.13	21.85
			1	14	21.98	22.15	21.84
			8	0	20.77	20.98	21.01
			8	4	20.78	20.99	21.00
			8	7	20.78	20.97	21.01
			15	0	20.75	20.86	20.91

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					131997	132322	132647
					1712.50MHz	1745.00MHz	1777.50MHz
Band 66	5	QPSK	1	0	22.90	23.18	23.17
			1	12	22.98	23.13	23.17
			1	24	23.01	23.19	23.20
			12	0	21.78	22.01	22.04
			12	6	21.74	22.06	22.07
			12	11	21.76	22.00	22.08
			25	0	21.79	22.03	22.03
		16QAM	1	0	21.74	22.23	22.10
			1	12	21.79	22.25	22.11
			1	24	21.84	22.34	22.12
			12	0	20.76	21.07	21.05
			12	6	20.74	21.05	21.05
			12	11	20.74	21.04	21.05
			25	0	20.78	20.94	21.07

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132022	132322	132622
					1715.00MHz	1745.00MHz	1775.00MHz
Band 66	10	QPSK	1	0	22.76	22.92	22.83
			1	24	22.84	23.04	22.93
			1	49	22.92	22.98	22.90
			25	0	21.75	22.03	21.99
			25	12	21.74	22.02	22.00
			25	24	21.73	21.96	22.03
			50	0	21.85	22.03	22.05
		16QAM	1	0	21.86	22.14	21.78
			1	24	21.97	22.23	21.90
			1	49	22.08	22.17	21.86
			25	0	20.69	21.02	21.04
			25	12	20.71	21.02	21.04
			25	24	20.71	21.00	21.03
			50	0	20.83	21.03	21.04

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132047	132322	132597
					1717.50MHz	1745.00MHz	1772.50MHz
Band 66	15	QPSK	1	0	22.71	22.86	22.85
			1	37	22.89	22.97	22.91
			1	74	22.94	22.91	22.88
			36	0	21.75	21.94	21.89
			36	16	21.72	21.98	21.88
			36	35	21.69	21.94	21.91
			75	0	21.82	21.98	21.97
		16QAM	1	0	21.84	22.20	21.79
			1	37	22.07	22.29	21.83
			1	74	22.09	22.27	21.82
			36	0	20.68	21.02	20.86
			36	16	20.69	20.98	20.85
			36	35	20.69	21.01	20.87
			75	0	20.73	20.97	20.92

LTE Band	Bandwidth (MHz)	Modulation	RB Size	RB Offset	Average Power (dBm)		
					132072	132322	132572
					1720.00MHz	1745.00MHz	1770.00MHz
Band 66	20	QPSK	1	0	22.74	22.88	22.69
			1	49	23.05	23.01	22.80
			1	99	23.05	22.99	22.76
			50	0	21.72	21.97	21.96
			50	24	21.76	21.99	21.96
			50	49	21.73	22.00	21.98
			100	0	21.82	22.03	21.92
		16QAM	1	0	21.65	22.17	21.85
			1	49	22.03	22.32	21.97
			1	99	21.97	22.28	21.94
			50	0	20.71	20.98	20.95
			50	24	20.71	20.99	20.96
			50	49	20.67	20.98	20.98
			100	0	20.77	20.98	20.92

13.4 NR Conducted Power

NR n5 part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			165800	167300	168800
					829MHz	836.5MHz	844MHz
n5	30	10	12@6	DFT_BPSK	23.58	23.50	23.44
			1@1	DFT_BPSK	23.45	23.45	23.44
			1@22	DFT_BPSK	23.50	23.41	23.32
			12@6	DFT_QPSK	23.61	23.54	23.58
			1@1	DFT_QPSK	23.36	23.38	23.30
			1@22	DFT_QPSK	23.41	23.27	23.37
			12@6	DFT_QAM16	22.57	22.54	22.49
			1@1	DFT_QAM16	22.21	22.54	22.47
			1@22	DFT_QAM16	22.44	22.83	22.47
			12@6	DFT_QAM64	21.13	21.05	21.07
			1@1	DFT_QAM64	21.10	21.05	21.10
			1@22	DFT_QAM64	21.11	20.92	20.99
			12@6	DFT_QAM256	19.19	19.09	19.10
			1@1	DFT_QAM256	19.14	19.26	19.06
			1@22	DFT_QAM256	19.07	19.22	19.03
			12@6	CP_QPSK	22.02	21.92	21.75
			1@1	CP_QPSK	21.97	21.98	21.88
			1@22	CP_QPSK	22.03	21.96	21.90
			12@6	CP_QAM16	21.54	21.49	21.41
			1@1	CP_QAM16	21.56	21.96	21.93
			1@22	CP_QAM16	21.61	21.95	21.83
			12@6	CP_QAM64	20.00	20.02	19.87
			1@1	CP_QAM64	20.09	20.36	19.99
			1@22	CP_QAM64	20.29	19.97	20.04
12@6	CP_QAM256	16.92	17.06	16.99			
1@1	CP_QAM256	16.97	16.86	16.63			
1@22	CP_QAM256	16.95	16.75	16.66			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			166300	167300	168300
					831.5MHz	836.5MHz	841.5MHz
n5	30	15	12@6	DFT_BPSK	23.39	23.40	23.28
			1@1	DFT_BPSK	23.25	23.36	23.26
			1@22	DFT_BPSK	23.35	23.33	23.19
			12@6	DFT_QPSK	23.43	23.44	23.36
			1@1	DFT_QPSK	23.14	23.14	23.16
			1@22	DFT_QPSK	23.22	23.16	23.06
			12@6	DFT_QAM16	22.50	22.48	22.49
			1@1	DFT_QAM16	22.21	22.53	22.51
			1@22	DFT_QAM16	22.25	22.50	22.44
			12@6	DFT_QAM64	20.94	20.87	20.90
			1@1	DFT_QAM64	20.78	20.97	20.77
			1@22	DFT_QAM64	21.00	20.81	20.73
			12@6	DFT_QAM256	18.92	18.85	18.81
			1@1	DFT_QAM256	19.01	19.05	18.95
			1@22	DFT_QAM256	19.01	19.24	19.03
			12@6	CP_QPSK	21.87	21.86	21.84
			1@1	CP_QPSK	21.88	21.98	21.94
			1@22	CP_QPSK	21.91	21.80	21.87
			12@6	CP_QAM16	21.39	21.40	21.26
			1@1	CP_QAM16	21.71	21.79	21.45
			1@22	CP_QAM16	21.80	21.80	21.40
			12@6	CP_QAM64	19.91	19.99	19.86
			1@1	CP_QAM64	19.99	19.83	20.18
			1@22	CP_QAM64	20.23	20.15	20.04
12@6	CP_QAM256	16.70	16.77	16.69			
1@1	CP_QAM256	16.66	16.84	16.90			
1@22	CP_QAM256	16.21	16.20	16.16			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			166800	167300	167800
					834MHz	836.5MHz	839MHz
n5	30	20	12@6	DFT_BPSK	23.38	23.37	23.39
			1@1	DFT_BPSK	23.12	23.22	23.23
			1@22	DFT_BPSK	23.19	23.16	23.23
			12@6	DFT_QPSK	23.39	23.38	23.35
			1@1	DFT_QPSK	23.02	23.04	23.07
			1@22	DFT_QPSK	23.13	23.07	23.07
			12@6	DFT_QAM16	22.48	22.36	22.34
			1@1	DFT_QAM16	22.39	22.08	22.26
			1@22	DFT_QAM16	22.17	22.12	22.21
			12@6	DFT_QAM64	20.91	20.90	20.84
			1@1	DFT_QAM64	20.78	20.82	20.81
			1@22	DFT_QAM64	20.87	20.79	20.78
			12@6	DFT_QAM256	18.83	18.83	18.82
			1@1	DFT_QAM256	18.80	18.90	18.88
			1@22	DFT_QAM256	18.91	18.89	18.84
			12@6	CP_QPSK	21.82	21.78	21.81
			1@1	CP_QPSK	21.85	21.75	21.69
			1@22	CP_QPSK	21.73	21.73	21.73
			12@6	CP_QAM16	21.34	21.35	21.36
			1@1	CP_QAM16	21.52	21.54	21.74
			1@22	CP_QAM16	21.37	21.64	21.66
			12@6	CP_QAM64	19.79	19.80	19.76
			1@1	CP_QAM64	19.71	20.05	19.88
			1@22	CP_QAM64	19.99	19.88	19.93
12@6	CP_QAM256	16.84	16.76	16.64			
1@1	CP_QAM256	16.15	16.58	16.15			
1@22	CP_QAM256	16.21	16.16	16.13			

NR n7 part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			501000	507000	513000
					2505MHz	2535MHz	2565MHz
n7	30	10	12@6	DFT_BPSK	23.47	23.43	23.45
			1@1	DFT_BPSK	23.41	23.41	23.40
			1@22	DFT_BPSK	23.41	23.34	23.46
			12@6	DFT_QPSK	23.34	23.50	23.47
			1@1	DFT_QPSK	23.27	23.07	23.32
			1@22	DFT_QPSK	23.37	23.18	23.29
			12@6	DFT_QAM16	22.30	22.52	22.48
			1@1	DFT_QAM16	22.32	22.43	22.46
			1@22	DFT_QAM16	22.46	22.52	22.32
			12@6	DFT_QAM64	21.00	20.99	20.96
			1@1	DFT_QAM64	21.12	21.08	21.09
			1@22	DFT_QAM64	21.03	21.12	21.07
			12@6	DFT_QAM256	19.01	19.01	19.13
			1@1	DFT_QAM256	19.19	19.12	19.20
			1@22	DFT_QAM256	19.05	19.16	19.11
			12@6	CP_QPSK	21.81	21.78	21.89
			1@1	CP_QPSK	21.82	21.84	21.93
			1@22	CP_QPSK	21.91	21.88	21.97
			12@6	CP_QAM16	21.44	21.43	21.48
			1@1	CP_QAM16	21.98	21.54	21.50
			1@22	CP_QAM16	21.49	21.49	21.48
			12@6	CP_QAM64	19.93	20.02	19.96
			1@1	CP_QAM64	20.19	20.06	20.07
			1@22	CP_QAM64	20.12	20.07	20.00
12@6	CP_QAM256	17.16	17.13	17.16			
1@1	CP_QAM256	17.00	17.11	17.18			
1@22	CP_QAM256	16.92	17.12	17.22			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			501500	507000	512500
					2507.5MHz	2535MHz	2562.5MHz
n7	30	15	12@6	DFT_BPSK	23.40	23.36	23.41
			1@1	DFT_BPSK	23.30	23.36	23.20
			1@22	DFT_BPSK	23.39	23.32	23.28
			12@6	DFT_QPSK	23.45	23.54	23.44
			1@1	DFT_QPSK	23.36	23.24	23.21
			1@22	DFT_QPSK	23.27	23.14	23.33
			12@6	DFT_QAM16	22.53	22.58	22.53
			1@1	DFT_QAM16	22.33	22.52	22.57
			1@22	DFT_QAM16	22.42	22.57	22.76
			12@6	DFT_QAM64	20.85	20.89	20.91
			1@1	DFT_QAM64	21.07	20.91	20.90
			1@22	DFT_QAM64	20.95	20.90	20.98
			12@6	DFT_QAM256	18.92	18.98	18.90
			1@1	DFT_QAM256	19.03	19.12	19.07
			1@22	DFT_QAM256	19.13	19.13	19.24
			12@6	CP_QPSK	21.87	21.83	21.88
			1@1	CP_QPSK	21.86	21.93	21.81
			1@22	CP_QPSK	21.97	21.89	21.87
			12@6	CP_QAM16	21.43	21.44	21.21
			1@1	CP_QAM16	21.93	21.39	21.39
			1@22	CP_QAM16	21.77	21.42	21.55
			12@6	CP_QAM64	20.03	19.97	19.97
			1@1	CP_QAM64	20.26	19.92	19.77
			1@22	CP_QAM64	20.07	20.15	19.84
12@6	CP_QAM256	17.03	16.92	17.05			
1@1	CP_QAM256	16.62	17.16	17.07			
1@22	CP_QAM256	16.91	17.15	17.28			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			502000	507000	512000
					2510MHz	2535MHz	2560MHz
n7	30	20	12@6	DFT_BPSK	23.46	23.39	23.37
			1@1	DFT_BPSK	23.29	23.30	23.09
			1@22	DFT_BPSK	23.22	23.26	23.18
			12@6	DFT_QPSK	23.40	23.51	23.34
			1@1	DFT_QPSK	23.18	23.05	22.95
			1@22	DFT_QPSK	23.12	23.04	23.11
			12@6	DFT_QAM16	22.47	22.14	22.36
			1@1	DFT_QAM16	22.55	22.47	22.45
			1@22	DFT_QAM16	22.54	22.44	22.14
			12@6	DFT_QAM64	20.90	20.91	20.96
			1@1	DFT_QAM64	20.98	21.28	21.14
			1@22	DFT_QAM64	20.87	21.01	21.02
			12@6	DFT_QAM256	18.75	18.79	18.86
			1@1	DFT_QAM256	19.01	18.98	18.87
			1@22	DFT_QAM256	19.13	18.97	19.09
			12@6	CP_QPSK	21.88	21.83	21.87
			1@1	CP_QPSK	21.85	21.74	21.74
			1@22	CP_QPSK	21.80	21.87	21.96
			12@6	CP_QAM16	21.36	21.38	21.38
			1@1	CP_QAM16	21.73	21.30	21.21
			1@22	CP_QAM16	21.58	21.32	21.77
			12@6	CP_QAM64	19.93	19.84	19.59
			1@1	CP_QAM64	19.88	20.12	19.97
			1@22	CP_QAM64	20.07	20.21	20.28
			12@6	CP_QAM256	17.02	16.98	17.10
			1@1	CP_QAM256	16.50	16.50	16.82
			1@22	CP_QAM256	16.49	16.49	16.65

NR n38 part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			515000	519000	523000
					2575MHz	2595MHz	2615MHz
n38	30	10	12@6	DFT_BPSK	23.35	23.21	23.30
			1@1	DFT_BPSK	23.33	23.11	23.21
			1@22	DFT_BPSK	23.30	23.08	23.26
			12@6	DFT_QPSK	23.17	23.16	23.32
			1@1	DFT_QPSK	23.15	23.07	23.15
			1@22	DFT_QPSK	23.12	23.04	23.13
			12@6	DFT_QAM16	22.51	22.30	22.33
			1@1	DFT_QAM16	22.60	22.43	22.48
			1@22	DFT_QAM16	22.72	22.42	22.59
			12@6	DFT_QAM64	20.77	20.75	20.77
			1@1	DFT_QAM64	20.94	20.81	20.90
			1@22	DFT_QAM64	20.73	20.59	20.88
			12@6	DFT_QAM256	18.81	18.74	18.86
			1@1	DFT_QAM256	18.82	18.90	18.91
			1@22	DFT_QAM256	18.88	18.77	18.88
			12@6	CP_QPSK	21.78	21.77	21.75
			1@1	CP_QPSK	21.72	21.45	21.69
			1@22	CP_QPSK	21.66	21.61	21.62
			12@6	CP_QAM16	21.52	21.41	21.46
			1@1	CP_QAM16	21.80	21.50	21.64
			1@22	CP_QAM16	21.66	21.52	21.61
			12@6	CP_QAM64	19.88	19.96	19.88
			1@1	CP_QAM64	20.28	20.05	19.86
			1@22	CP_QAM64	19.82	19.78	19.81
12@6	CP_QAM256	17.04	16.98	16.95			
1@1	CP_QAM256	16.74	16.77	16.92			
1@22	CP_QAM256	16.83	16.88	16.98			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			515500	519000	522500
					2577.5MHz	2595MHz	2612.5MHz
n38	30	15	12@6	DFT_BPSK	23.38	23.15	23.31
			1@1	DFT_BPSK	23.20	23.18	23.17
			1@22	DFT_BPSK	23.19	23.11	23.11
			12@6	DFT_QPSK	23.18	23.15	23.29
			1@1	DFT_QPSK	23.20	22.99	23.03
			1@22	DFT_QPSK	22.96	22.92	23.10
			12@6	DFT_QAM16	22.43	22.25	22.32
			1@1	DFT_QAM16	22.43	22.47	22.48
			1@22	DFT_QAM16	22.57	22.39	22.38
			12@6	DFT_QAM64	20.88	20.75	20.77
			1@1	DFT_QAM64	20.91	20.79	20.54
			1@22	DFT_QAM64	20.84	20.79	20.55
			12@6	DFT_QAM256	18.93	18.76	18.89
			1@1	DFT_QAM256	18.88	18.79	18.94
			1@22	DFT_QAM256	18.83	18.85	18.83
			12@6	CP_QPSK	21.81	21.65	21.79
			1@1	CP_QPSK	21.69	21.58	21.69
			1@22	CP_QPSK	21.53	21.34	21.76
			12@6	CP_QAM16	21.41	21.34	21.38
			1@1	CP_QAM16	21.66	21.57	21.60
			1@22	CP_QAM16	21.56	21.57	21.52
			12@6	CP_QAM64	19.73	19.92	19.83
			1@1	CP_QAM64	19.87	19.71	20.16
			1@22	CP_QAM64	19.79	19.82	20.25
12@6	CP_QAM256	16.90	16.89	16.95			
1@1	CP_QAM256	16.81	16.61	16.68			
1@22	CP_QAM256	16.90	16.87	16.71			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			518000	519000	520000
					2590MHz	2595MHz	2600MHz
n38	30	40	12@6	DFT_BPSK	23.20	23.23	23.27
			1@1	DFT_BPSK	22.87	22.79	22.82
			1@22	DFT_BPSK	22.77	22.88	22.78
			12@6	DFT_QPSK	23.24	23.19	23.23
			1@1	DFT_QPSK	22.74	22.62	22.63
			1@22	DFT_QPSK	22.66	22.70	22.66
			12@6	DFT_QAM16	22.28	22.25	22.28
			1@1	DFT_QAM16	21.93	22.20	22.14
			1@22	DFT_QAM16	22.13	22.00	22.17
			12@6	DFT_QAM64	20.71	20.74	20.77
			1@1	DFT_QAM64	20.26	20.42	20.39
			1@22	DFT_QAM64	20.12	20.36	20.34
			12@6	DFT_QAM256	18.71	18.72	18.75
			1@1	DFT_QAM256	18.51	18.50	18.49
			1@22	DFT_QAM256	18.39	18.49	18.35
			12@6	CP_QPSK	21.62	21.65	21.62
			1@1	CP_QPSK	21.25	21.13	21.22
			1@22	CP_QPSK	21.12	21.27	21.18
			12@6	CP_QAM16	21.18	21.17	21.16
			1@1	CP_QAM16	21.24	21.25	21.08
			1@22	CP_QAM16	21.17	21.26	21.24
			12@6	CP_QAM64	19.65	19.70	19.71
			1@1	CP_QAM64	19.48	19.39	19.32
			1@22	CP_QAM64	19.29	19.42	19.48
12@6	CP_QAM256	16.81	16.88	16.90			
1@1	CP_QAM256	16.51	16.60	16.48			
1@22	CP_QAM256	16.27	16.51	16.49			

NR n41 part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			508002	519000	529998
					2540.01MHz	2595MHz	2649.99MHz
n41	30	10	12@6	DFT_BPSK	22.35	22.04	21.76
			1@1	DFT_BPSK	22.36	21.86	21.78
			1@22	DFT_BPSK	22.24	22.05	21.41
			12@6	DFT_QPSK	22.39	21.99	21.84
			1@1	DFT_QPSK	22.25	21.96	21.69
			1@22	DFT_QPSK	22.05	22.11	21.40
			12@6	DFT_QAM16	21.42	21.09	20.82
			1@1	DFT_QAM16	21.55	21.29	21.17
			1@22	DFT_QAM16	21.15	21.43	21.09
			12@6	DFT_QAM64	20.01	19.64	19.44
			1@1	DFT_QAM64	19.99	19.73	19.43
			1@22	DFT_QAM64	20.15	19.97	19.20
			12@6	DFT_QAM256	17.91	17.72	17.54
			1@1	DFT_QAM256	17.72	17.48	17.50
			1@22	DFT_QAM256	17.82	17.71	17.33
			12@6	CP_QPSK	20.82	20.48	20.29
			1@1	CP_QPSK	20.73	20.23	20.12
			1@22	CP_QPSK	20.49	20.34	19.79
			12@6	CP_QAM16	20.31	20.15	19.83
			1@1	CP_QAM16	20.24	19.72	19.87
			1@22	CP_QAM16	20.10	19.92	19.29
			12@6	CP_QAM64	19.00	18.63	18.60
			1@1	CP_QAM64	18.81	18.49	18.29
			1@22	CP_QAM64	18.61	18.68	17.99
12@6	CP_QAM256	16.07	15.61	15.38			
1@1	CP_QAM256	16.32	15.50	15.71			
1@22	CP_QAM256	15.89	15.83	15.46			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			512004	519000	525996
					2560.02MHz	2595MHz	2629.98MHz
n41	30	50	12@6	DFT_BPSK	22.22	22.08	21.84
			1@1	DFT_BPSK	22.20	21.96	22.04
			1@22	DFT_BPSK	21.56	21.67	21.34
			12@6	DFT_QPSK	22.23	22.14	21.89
			1@1	DFT_QPSK	22.00	21.84	21.95
			1@22	DFT_QPSK	21.48	21.58	21.41
			12@6	DFT_QAM16	21.22	21.18	20.78
			1@1	DFT_QAM16	20.93	20.90	20.85
			1@22	DFT_QAM16	20.49	20.68	20.74
			12@6	DFT_QAM64	19.77	19.73	19.33
			1@1	DFT_QAM64	19.77	19.61	19.88
			1@22	DFT_QAM64	19.53	19.37	19.04
			12@6	DFT_QAM256	17.85	17.66	17.56
			1@1	DFT_QAM256	17.63	17.68	17.65
			1@22	DFT_QAM256	17.38	17.46	16.93
			12@6	CP_QPSK	20.71	20.57	20.35
			1@1	CP_QPSK	20.69	20.37	20.44
			1@22	CP_QPSK	19.81	20.29	19.79
			12@6	CP_QAM16	20.23	20.16	19.78
			1@1	CP_QAM16	20.05	20.04	20.01
			1@22	CP_QAM16	19.58	19.94	19.17
			12@6	CP_QAM64	18.78	18.58	18.37
			1@1	CP_QAM64	18.86	18.61	18.64
			1@22	CP_QAM64	18.25	18.42	17.98
12@6	CP_QAM256	15.84	15.53	15.46			
1@1	CP_QAM256	16.02	15.88	15.95			
1@22	CP_QAM256	15.45	15.76	15.38			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			517002	519000	520998
					2585.01MHz	2595MHz	2604.99MHz
n41	30	100	12@6	DFT_BPSK	22.11	22.14	22.10
			1@1	DFT_BPSK	21.49	21.18	21.23
			1@22	DFT_BPSK	20.92	20.96	20.67
			12@6	DFT_QPSK	22.16	22.12	22.13
			1@1	DFT_QPSK	21.45	21.07	21.27
			1@22	DFT_QPSK	20.88	20.77	20.91
			12@6	DFT_QAM16	21.26	21.21	21.18
			1@1	DFT_QAM16	20.95	20.09	20.65
			1@22	DFT_QAM16	20.30	19.86	20.19
			12@6	DFT_QAM64	19.68	19.61	19.62
			1@1	DFT_QAM64	19.03	18.88	18.87
			1@22	DFT_QAM64	18.42	18.55	18.29
			12@6	DFT_QAM256	14.63	14.61	14.66
			1@1	DFT_QAM256	14.02	13.79	13.88
			1@22	DFT_QAM256	13.45	13.41	13.45
			12@6	CP_QPSK	17.68	17.69	17.63
			1@1	CP_QPSK	16.99	16.85	16.82
			1@22	CP_QPSK	16.38	16.53	16.29
			12@6	CP_QAM16	17.09	17.18	17.16
			1@1	CP_QAM16	16.39	16.06	16.62
			1@22	CP_QAM16	15.91	16.13	15.99
			12@6	CP_QAM64	15.66	15.72	15.72
			1@1	CP_QAM64	15.05	14.78	14.85
			1@22	CP_QAM64	13.99	14.22	14.50
12@6	CP_QAM256	12.78	12.80	12.81			
1@1	CP_QAM256	12.52	12.36	12.33			
1@22	CP_QAM256	12.02	12.11	11.89			

NR n77(3450MHz-3550MHz) part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			630334	633334	636332
					3455.01MHz	3500.01MHz	3544.98MHz
n77 3450MHz- 3550MHz	30	10	12@6	DFT_BPSK	23.38	26.18	26.11
			1@1	DFT_BPSK	23.25	26.06	26.01
			1@22	DFT_BPSK	23.35	26.14	26.06
			12@6	DFT_QPSK	23.35	26.17	26.08
			1@1	DFT_QPSK	23.21	26.00	25.86
			1@22	DFT_QPSK	23.17	26.04	25.88
			12@6	DFT_QAM16	22.37	25.17	25.10
			1@1	DFT_QAM16	22.33	24.83	24.85
			1@22	DFT_QAM16	22.22	25.03	24.84
			12@6	DFT_QAM64	21.05	23.67	23.53
			1@1	DFT_QAM64	21.11	23.57	23.84
			1@22	DFT_QAM64	21.35	23.97	23.52
			12@6	DFT_QAM256	19.10	21.90	21.63
			1@1	DFT_QAM256	18.89	21.70	21.58
			1@22	DFT_QAM256	18.83	21.83	21.51
			12@6	CP_QPSK	21.92	24.64	24.58
			1@1	CP_QPSK	21.74	24.46	24.35
			1@22	CP_QPSK	21.87	24.54	24.35
			12@6	CP_QAM16	21.53	24.12	24.05
			1@1	CP_QAM16	21.32	23.97	24.06
			1@22	CP_QAM16	21.36	24.29	24.11
			12@6	CP_QAM64	20.10	22.64	22.53
			1@1	CP_QAM64	20.10	22.63	22.52
			1@22	CP_QAM64	20.15	22.75	22.59
			12@6	CP_QAM256	17.01	19.83	19.69
			1@1	CP_QAM256	17.03	19.88	19.77
			1@22	CP_QAM256	17.04	19.84	19.85

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			632000	633334	634666
					3480MHz	3500.01MHz	3519.99MHz
n77 3450MHz- 3550MHz	30	50	12@6	DFT_BPSK	26.36	25.99	25.86
			1@1	DFT_BPSK	25.85	26.14	25.69
			1@22	DFT_BPSK	25.63	25.58	25.66
			12@6	DFT_QPSK	26.33	25.98	25.87
			1@1	DFT_QPSK	25.76	25.93	25.57
			1@22	DFT_QPSK	25.58	25.51	25.48
			12@6	DFT_QAM16	25.38	24.98	24.90
			1@1	DFT_QAM16	24.66	24.89	24.51
			1@22	DFT_QAM16	24.53	24.37	24.56
			12@6	DFT_QAM64	23.92	23.47	23.33
			1@1	DFT_QAM64	23.42	23.93	23.58
			1@22	DFT_QAM64	23.29	23.59	23.49
			12@6	DFT_QAM256	22.04	21.61	21.47
			1@1	DFT_QAM256	21.64	21.72	21.38
			1@22	DFT_QAM256	21.51	21.35	21.42
			12@6	CP_QPSK	24.81	24.44	24.21
			1@1	CP_QPSK	24.32	24.54	24.07
			1@22	CP_QPSK	24.11	24.08	24.13
			12@6	CP_QAM16	24.35	23.95	23.81
			1@1	CP_QAM16	23.71	23.88	23.80
			1@22	CP_QAM16	23.84	23.47	23.80
			12@6	CP_QAM64	22.86	22.43	22.34
			1@1	CP_QAM64	22.54	22.64	22.23
			1@22	CP_QAM64	22.37	22.23	22.22
			12@6	CP_QAM256	19.94	19.58	19.42
			1@1	CP_QAM256	19.75	20.00	19.47
			1@22	CP_QAM256	19.64	19.52	19.50

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			630334	633334	636332
					3455.01MHz	3500.01MHz	3544.98MHz
n77 3450MHz- 3550MHz	30	10	12@6	DFT_BPSK	22.80	25.75	25.71
			1@1	DFT_BPSK	22.70	25.59	25.61
			1@22	DFT_BPSK	22.72	25.61	25.56
			12@6	DFT_QPSK	22.72	25.67	25.82
			1@1	DFT_QPSK	22.62	25.56	25.80
			1@22	DFT_QPSK	22.64	25.49	25.74
			12@6	DFT_QAM16	21.96	24.72	24.68
			1@1	DFT_QAM16	21.64	24.75	25.10
			1@22	DFT_QAM16	21.82	24.77	25.07
			12@6	DFT_QAM64	20.44	23.27	23.36
			1@1	DFT_QAM64	20.61	23.09	23.20
			1@22	DFT_QAM64	20.49	23.18	23.10
			12@6	DFT_QAM256	18.49	21.55	21.50
			1@1	DFT_QAM256	18.37	21.34	21.35
			1@22	DFT_QAM256	18.23	21.40	21.32
			12@6	CP_QPSK	21.38	24.15	24.18
			1@1	CP_QPSK	21.35	24.02	24.05
			1@22	CP_QPSK	21.27	24.01	24.03
			12@6	CP_QAM16	20.81	23.60	23.63
			1@1	CP_QAM16	20.99	23.57	23.60
			1@22	CP_QAM16	20.75	23.66	23.59
			12@6	CP_QAM64	19.49	22.23	22.22
			1@1	CP_QAM64	19.42	21.91	21.97
			1@22	CP_QAM64	19.08	21.85	21.96
12@6	CP_QAM256	16.36	19.38	19.28			
1@1	CP_QAM256	16.43	19.55	19.58			
1@22	CP_QAM256	16.46	19.62	19.52			

NR n77(3700MHz-3980MHz) part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			647000	656000	665000
					3705MHz	3840MHz	3975MHz
n77 3700MHz- 3980MHz	30	10	12@6	DFT_BPSK	23.07	25.96	25.91
			1@1	DFT_BPSK	22.94	25.93	25.77
			1@22	DFT_BPSK	23.00	25.94	25.79
			12@6	DFT_QPSK	23.13	26.05	25.94
			1@1	DFT_QPSK	22.88	25.85	25.86
			1@22	DFT_QPSK	22.96	25.78	25.88
			12@6	DFT_QAM16	22.01	24.98	25.06
			1@1	DFT_QAM16	22.23	25.10	25.10
			1@22	DFT_QAM16	22.25	25.14	25.16
			12@6	DFT_QAM64	20.73	23.52	23.50
			1@1	DFT_QAM64	20.82	23.61	23.39
			1@22	DFT_QAM64	20.98	23.68	23.44
			12@6	DFT_QAM256	18.73	21.60	21.60
			1@1	DFT_QAM256	18.64	21.71	21.68
			1@22	DFT_QAM256	18.76	21.71	21.72
			12@6	CP_QPSK	21.69	24.44	24.45
			1@1	CP_QPSK	21.57	24.53	24.28
			1@22	CP_QPSK	21.64	24.48	24.25
			12@6	CP_QAM16	21.30	24.05	23.97
			1@1	CP_QAM16	20.88	23.89	23.99
			1@22	CP_QAM16	21.44	23.82	24.12
			12@6	CP_QAM64	19.77	22.46	22.47
			1@1	CP_QAM64	19.59	22.70	22.49
			1@22	CP_QAM64	19.72	22.69	22.33
			12@6	CP_QAM256	16.79	19.72	19.69
			1@1	CP_QAM256	16.62	19.37	19.31
			1@22	CP_QAM256	16.91	19.80	19.36

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			648334	656000	663666
					3725.01MHz	3840MHz	3954.99MHz
n77 3700MHz- 3980MHz	30	50	12@6	DFT_BPSK	25.74	25.70	25.80
			1@1	DFT_BPSK	25.47	25.24	25.28
			1@22	DFT_BPSK	25.42	25.36	25.46
			12@6	DFT_QPSK	25.74	25.74	25.81
			1@1	DFT_QPSK	25.31	25.15	25.26
			1@22	DFT_QPSK	25.36	25.43	25.31
			12@6	DFT_QAM16	24.75	24.73	24.83
			1@1	DFT_QAM16	24.41	24.19	24.16
			1@22	DFT_QAM16	24.21	24.27	24.33
			12@6	DFT_QAM64	23.19	23.23	23.27
			1@1	DFT_QAM64	23.25	23.04	22.83
			1@22	DFT_QAM64	22.97	22.88	22.90
			12@6	DFT_QAM256	21.49	21.31	21.42
			1@1	DFT_QAM256	21.04	21.00	20.94
			1@22	DFT_QAM256	21.13	20.98	21.05
			12@6	CP_QPSK	24.30	24.26	24.30
			1@1	CP_QPSK	23.81	23.62	23.64
			1@22	CP_QPSK	23.87	23.83	23.85
			12@6	CP_QAM16	23.76	23.64	23.86
			1@1	CP_QAM16	23.58	23.30	23.11
			1@22	CP_QAM16	23.32	23.28	23.42
			12@6	CP_QAM64	22.23	22.16	22.27
			1@1	CP_QAM64	22.01	21.81	21.90
			1@22	CP_QAM64	22.04	22.03	21.93
12@6	CP_QAM256	19.39	19.28	19.34			
1@1	CP_QAM256	19.34	19.21	19.17			
1@22	CP_QAM256	19.34	19.34	19.26			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			650000	656000	662000
					3750MHz	3840MHz	3930MHz
n77 3700MHz- 3980MHz	30	100	12@6	DFT_BPSK	25.67	25.63	25.45
			1@1	DFT_BPSK	24.68	24.43	24.60
			1@22	DFT_BPSK	24.56	24.63	24.58
			12@6	DFT_QPSK	25.68	25.57	25.56
			1@1	DFT_QPSK	24.62	24.21	24.53
			1@22	DFT_QPSK	24.59	24.55	24.43
			12@6	DFT_QAM16	24.74	24.60	24.58
			1@1	DFT_QAM16	23.75	23.24	23.47
			1@22	DFT_QAM16	23.68	23.46	23.36
			12@6	DFT_QAM64	23.24	23.05	23.01
			1@1	DFT_QAM64	22.26	22.13	22.45
			1@22	DFT_QAM64	22.10	22.07	22.09
			12@6	DFT_QAM256	21.39	21.37	21.22
			1@1	DFT_QAM256	20.69	20.20	20.55
			1@22	DFT_QAM256	20.71	20.38	20.51
			12@6	CP_QPSK	24.28	24.16	23.99
			1@1	CP_QPSK	23.18	22.77	23.06
			1@22	CP_QPSK	23.02	22.93	23.15
			12@6	CP_QAM16	23.76	23.53	23.55
			1@1	CP_QAM16	22.81	22.36	22.67
			1@22	CP_QAM16	22.64	22.63	22.67
			12@6	CP_QAM64	22.17	22.06	21.98
			1@1	CP_QAM64	21.03	20.94	21.22
			1@22	CP_QAM64	20.83	21.11	21.25
12@6	CP_QAM256	19.40	19.29	19.12			
1@1	CP_QAM256	18.93	18.38	18.73			
1@22	CP_QAM256	18.76	18.60	18.69			

NR n78(3450MHz-3550MHz) part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			631668	633334	635000
					3475.02MHz	3500.01MHz	3525MHz
n78 3450MHz- 3550MHz	30	50	12@6	DFT_BPSK	26.20	25.98	25.82
			1@1	DFT_BPSK	25.69	25.90	25.74
			1@22	DFT_BPSK	25.63	25.47	25.76
			12@6	DFT_QPSK	26.29	26.01	25.89
			1@1	DFT_QPSK	25.56	25.87	25.51
			1@22	DFT_QPSK	25.56	25.48	25.50
			12@6	DFT_QAM16	25.27	24.99	24.87
			1@1	DFT_QAM16	24.89	25.15	24.80
			1@22	DFT_QAM16	24.83	24.72	24.82
			12@6	DFT_QAM64	23.80	23.48	23.36
			1@1	DFT_QAM64	23.36	23.67	23.38
			1@22	DFT_QAM64	23.38	23.26	23.34
			12@6	DFT_QAM256	21.97	21.70	21.50
			1@1	DFT_QAM256	21.59	21.86	21.56
			1@22	DFT_QAM256	21.51	21.39	21.56
			12@6	CP_QPSK	24.70	24.40	24.38
			1@1	CP_QPSK	24.27	24.58	24.26
			1@22	CP_QPSK	24.10	24.18	24.31
			12@6	CP_QAM16	24.25	23.99	23.84
			1@1	CP_QAM16	23.58	24.14	23.62
			1@22	CP_QAM16	23.85	23.40	23.58
			12@6	CP_QAM64	22.77	22.49	22.35
			1@1	CP_QAM64	22.22	22.79	22.38
			1@22	CP_QAM64	22.07	21.94	22.11
			12@6	CP_QAM256	19.84	19.60	19.44
			1@1	CP_QAM256	19.54	19.67	19.29
			1@22	CP_QAM256	19.42	19.19	19.43

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			633334	/	633332
					3500.01MHz	/	3499.98MHz
n78 3450MHz- 3550MHz	30	100	12@6	DFT_BPSK	25.95	/	25.95
			1@1	DFT_BPSK	25.01	/	24.94
			1@22	DFT_BPSK	25.01	/	24.92
			12@6	DFT_QPSK	25.96	/	25.97
			1@1	DFT_QPSK	24.98	/	24.75
			1@22	DFT_QPSK	24.91	/	24.88
			12@6	DFT_QAM16	24.98	/	25.01
			1@1	DFT_QAM16	24.15	/	24.06
			1@22	DFT_QAM16	24.11	/	24.13
			12@6	DFT_QAM64	23.47	/	23.39
			1@1	DFT_QAM64	22.63	/	22.64
			1@22	DFT_QAM64	22.73	/	22.59
			12@6	DFT_QAM256	21.60	/	21.60
			1@1	DFT_QAM256	21.04	/	21.12
			1@22	DFT_QAM256	21.08	/	21.04
			12@6	CP_QPSK	24.43	/	24.39
			1@1	CP_QPSK	23.53	/	23.48
			1@22	CP_QPSK	23.47	/	23.66
			12@6	CP_QAM16	23.92	/	23.88
			1@1	CP_QAM16	22.72	/	22.83
			1@22	CP_QAM16	23.11	/	22.87
			12@6	CP_QAM64	22.38	/	22.35
			1@1	CP_QAM64	21.25	/	21.68
			1@22	CP_QAM64	21.62	/	21.69
12@6	CP_QAM256	19.61	/	19.53			
1@1	CP_QAM256	18.89	/	18.68			
1@22	CP_QAM256	18.84	/	18.60			

NR n78(3700MHz-3800MHz) part

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			647000	650000	653000
					3705MHz	3750MHz	3795MHz
n78 3700MHz- 3800MHz	30	10	12@6	DFT_BPSK	22.81	25.93	25.71
			1@1	DFT_BPSK	22.85	25.91	25.63
			1@22	DFT_BPSK	22.79	25.72	25.65
			12@6	DFT_QPSK	22.91	25.90	25.72
			1@1	DFT_QPSK	22.81	25.76	25.62
			1@22	DFT_QPSK	22.78	25.63	25.67
			12@6	DFT_QAM16	22.05	24.99	24.76
			1@1	DFT_QAM16	22.42	25.01	24.83
			1@22	DFT_QAM16	22.25	24.86	24.84
			12@6	DFT_QAM64	20.58	23.41	23.31
			1@1	DFT_QAM64	20.64	23.52	23.12
			1@22	DFT_QAM64	20.55	23.56	23.09
			12@6	DFT_QAM256	18.41	21.50	21.34
			1@1	DFT_QAM256	18.58	21.64	21.29
			1@22	DFT_QAM256	18.60	21.60	21.32
			12@6	CP_QPSK	21.53	24.37	24.12
			1@1	CP_QPSK	21.36	24.42	24.01
			1@22	CP_QPSK	21.32	24.34	23.98
			12@6	CP_QAM16	21.11	23.92	23.78
			1@1	CP_QAM16	21.27	23.97	23.35
			1@22	CP_QAM16	21.15	23.64	23.40
			12@6	CP_QAM64	19.52	22.38	22.11
			1@1	CP_QAM64	19.70	22.21	22.44
			1@22	CP_QAM64	19.58	22.25	22.50
			12@6	CP_QAM256	16.53	19.65	19.42
			1@1	CP_QAM256	16.47	19.64	19.03
			1@22	CP_QAM256	16.45	19.60	19.12

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			648334	650000	651666
					3725.01MHz	3750MHz	3774.99MHz
n78 3700MHz- 3800MHz	30	50	12@6	DFT_BPSK	25.82	25.90	25.85
			1@1	DFT_BPSK	25.47	25.58	25.51
			1@22	DFT_BPSK	25.53	25.64	25.53
			12@6	DFT_QPSK	25.83	25.90	25.78
			1@1	DFT_QPSK	25.41	25.55	25.36
			1@22	DFT_QPSK	25.36	25.37	25.42
			12@6	DFT_QAM16	24.85	24.80	24.81
			1@1	DFT_QAM16	24.70	24.71	24.61
			1@22	DFT_QAM16	24.68	24.64	24.68
			12@6	DFT_QAM64	23.32	23.41	23.32
			1@1	DFT_QAM64	23.28	23.37	23.23
			1@22	DFT_QAM64	23.14	23.28	23.22
			12@6	DFT_QAM256	21.52	21.49	21.50
			1@1	DFT_QAM256	21.45	21.48	21.51
			1@22	DFT_QAM256	21.49	21.48	21.50
			12@6	CP_QPSK	24.32	24.37	24.28
			1@1	CP_QPSK	24.21	24.31	24.27
			1@22	CP_QPSK	24.24	24.19	24.20
			12@6	CP_QAM16	23.88	23.97	23.85
			1@1	CP_QAM16	23.40	23.48	23.75
			1@22	CP_QAM16	23.28	23.45	23.35
			12@6	CP_QAM64	22.31	22.31	22.27
			1@1	CP_QAM64	21.98	22.40	22.28
			1@22	CP_QAM64	21.91	22.26	22.25
12@6	CP_QAM256	19.46	19.49	19.38			
1@1	CP_QAM256	19.30	19.42	19.45			
1@22	CP_QAM256	19.03	19.22	19.21			

NR Band	SCS	Bandwidth	RB Allocation	Modulation	Average Power (dBm)		
	(KHz)	(MHz)			/	650000	/
					/	3750MHz	/
n78 3700MHz- 3800MHz	30	100	12@6	DFT_BPSK	/	25.81	/
			1@1	DFT_BPSK	/	24.90	/
			1@22	DFT_BPSK	/	24.91	/
			12@6	DFT_QPSK	/	25.87	/
			1@1	DFT_QPSK	/	24.91	/
			1@22	DFT_QPSK	/	24.91	/
			12@6	DFT_QAM16	/	24.90	/
			1@1	DFT_QAM16	/	24.04	/
			1@22	DFT_QAM16	/	23.99	/
			12@6	DFT_QAM64	/	23.34	/
			1@1	DFT_QAM64	/	22.56	/
			1@22	DFT_QAM64	/	22.53	/
			12@6	DFT_QAM256	/	21.51	/
			1@1	DFT_QAM256	/	20.91	/
			1@22	DFT_QAM256	/	21.01	/
			12@6	CP_QPSK	/	24.35	/
			1@1	CP_QPSK	/	23.26	/
			1@22	CP_QPSK	/	23.18	/
			12@6	CP_QAM16	/	23.79	/
			1@1	CP_QAM16	/	22.80	/
			1@22	CP_QAM16	/	22.78	/
			12@6	CP_QAM64	/	22.31	/
			1@1	CP_QAM64	/	21.82	/
			1@22	CP_QAM64	/	21.70	/
12@6	CP_QAM256	/	19.40	/			
1@1	CP_QAM256	/	18.53	/			
1@22	CP_QAM256	/	18.54	/			

13.5 WLAN 2.4 GHz Band Conducted Power

ANT 2:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)	802.11ax20
CH 01	2412	15.72	15.09	13.97	14.37
CH 06	2437	15.13	14.02	13.84	13.09
CH 11	2462	15.06	14.52	13.19	13.24

Average Power (dBm)			
Channel	Frequency (MHz)	802.11n (HT40)	802.11ax40
CH 03	2422	13.73	13.49
CH 06	2437	13.14	12.42
CH 09	2452	13.48	12.63

ANT 3:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 b	802.11 g	802.11n (HT20)	802.11ax20
CH 01	2412	15.52	15.09	13.87	14.28
CH 06	2437	16.31	15.56	15.45	14.56
CH 11	2462	16.08	15.14	13.81	14.08

Average Power (dBm)			
Channel	Frequency (MHz)	802.11n (HT40)	802.11ax40
CH 03	2422	13.93	13.18
CH 06	2437	14.35	13.47
CH 09	2452	13.96	13.10

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

For ANT 2

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
b/CH 01	2.412	16.0	39.8	5	12.3	3.0
g/CH 01	2.412	15.5	31.6	5	9.8	3.0

For ANT 3

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
b/CH 01	2.412	16.5	44.7	5	13.8	3.0
g/CH 01	2.412	16.0	39.8	5	12.3	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 b mode is required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle of ANT2 and ANT3 is 100%, so the duty cycle factor is 1.

13.6 WLAN 5.2GHz Band Conducted Power

ANT 2:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 ax20	802.11 n20
CH 36	5180	9.69	11.79	12.33	11.85
CH 40	5200	10.49	10.20	9.69	12.86
CH 48	5240	9.82	9.91	8.88	11.78

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 ac40	802.11 ax40	802.11 n40
CH 38	5190	9.83	9.68	12.45
CH 46	5230	10.78	11.47	11.94

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac80	802.11 ax80
CH 42	5210	11.40	9.74

ANT 3:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 ax20	802.11 n20
CH 36	5180	11.61	11.64	11.06	11.70
CH 40	5200	10.72	8.12	8.31	10.92
CH 48	5240	11.74	10.06	8.07	11.89

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 ac40	802.11 ax40	802.11 n40
CH 38	5190	9.50	7.80	11.44
CH 46	5230	10.56	10.28	11.63

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac80	802.11 ax80
CH 42	5210	10.75	8.93

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

For ANT 2

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
a/CH 40	5.200	13.0	19.95	5	9.10	3.0

For ANT 3

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
a/CH 48	5.240	12.0	15.85	5	7.26	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 a mode is not required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle of ANT2 and ANT3 is 100%, so the duty cycle factor is 1.

13.7 WLAN 5.8GHz Band Conducted Power

ANT 2:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 ax20	802.11 n20
CH 149	5745	8.09	9.41	13.82	10.57
CH 157	5785	8.67	13.79	13.34	9.99
CH 165	5825	10.87	15.08	14.84	11.99

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 ac40	802.11 ax40	802.11 n40
CH 151	5755	9.74	12.96	13.09
CH 159	5795	13.14	12.97	9.99

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac80	802.11 ax80
CH 155	5775	12.60	12.79

ANT 3:

Average Power (dBm)					
Channel	Frequency (MHz)	802.11 a	802.11 ac20	802.11 ax20	802.11 n20
CH 149	5745	15.02	14.36	13.83	13.05
CH 157	5785	13.56	13.26	13.39	13.57
CH 165	5825	15.36	15.02	15.37	14.77

Average Power (dBm)				
Channel	Frequency (MHz)	802.11 ac40	802.11 ax40	802.11 n40
CH 151	5755	14.18	13.35	12.74
CH 159	5795	12.88	14.57	14.49

Average Power (dBm)			
Channel	Frequency (MHz)	802.11 ac80	802.11 ax80
CH 155	5775	12.24	12.78

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

For ANT 2

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
ac20/CH 165	5.825	15.5	35.48	5.0	17.10	3.0

For ANT 3

Channel	Frequency (GHz)	Max. Tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
a/CH 165	5.825	7.5	35.48	5.0	17.10	3.0

- Base on the result of note1, RF exposure evaluation of 802.11 a mode is not required.
- Per KDB 248227 D01v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion.
- The output power of all data rate were pre-scan, just the worst case (the lowest data rate) of all mode were shown in report.
- Per KDB 248227 D01V02r02 section 2.2, when the EUT in continuously transmitting mode, the actual duty cycle of ANT2 and ANT3 is 100%, so the duty cycle factor is 1.

13.8 Bluetooth Conducted Power

Average Power (dBm)				
Channel	Frequency (MHz)	GFSK	$\pi/4$ -DQPSK	8DPSK
CH 00	2402	5.337	4.739	5.233
CH 39	2441	5.255	4.663	5.173
CH 78	2480	4.027	3.432	3.982

Average Power (dBm)					
Channel	Frequency (MHz)	BLE 1M PHY	BLE 2M PHY	BLE-Coded PHY S=2	BLE-Coded PHY S=8
CH 00	2402	1.728	1.691	1.825	1.758
CH 20	2442	2.178	2.181	2.272	2.219
CH 39	2480	0.339	0.428	0.434	0.378

Note:

- Per KDB 447498 D01v06, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* \leq 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR, where
 - $f(\text{GHz})$ is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Channel	Frequency (GHz)	Max. tune-up Power (dBm)	Max. Power (mW)	Test distance (mm)	Result	exclusion thresholds for 1-g SAR
CH 00	2.402	5.5	3.55	5	1.10	3.0

- The max. tune-up power was provided by manufacturer, base on the result of note 1, RF exposure evaluation is not required.
- The output power of all data rate were pre-scan, just the worst case of all mode were shown in report.
- When the minimum *test separation distance* is $<$ 5 mm, a distance of 5 mm according is applied to determine SAR test exclusion.

14 Exposure Positions Consideration

14.1 EUT Antenna Locations

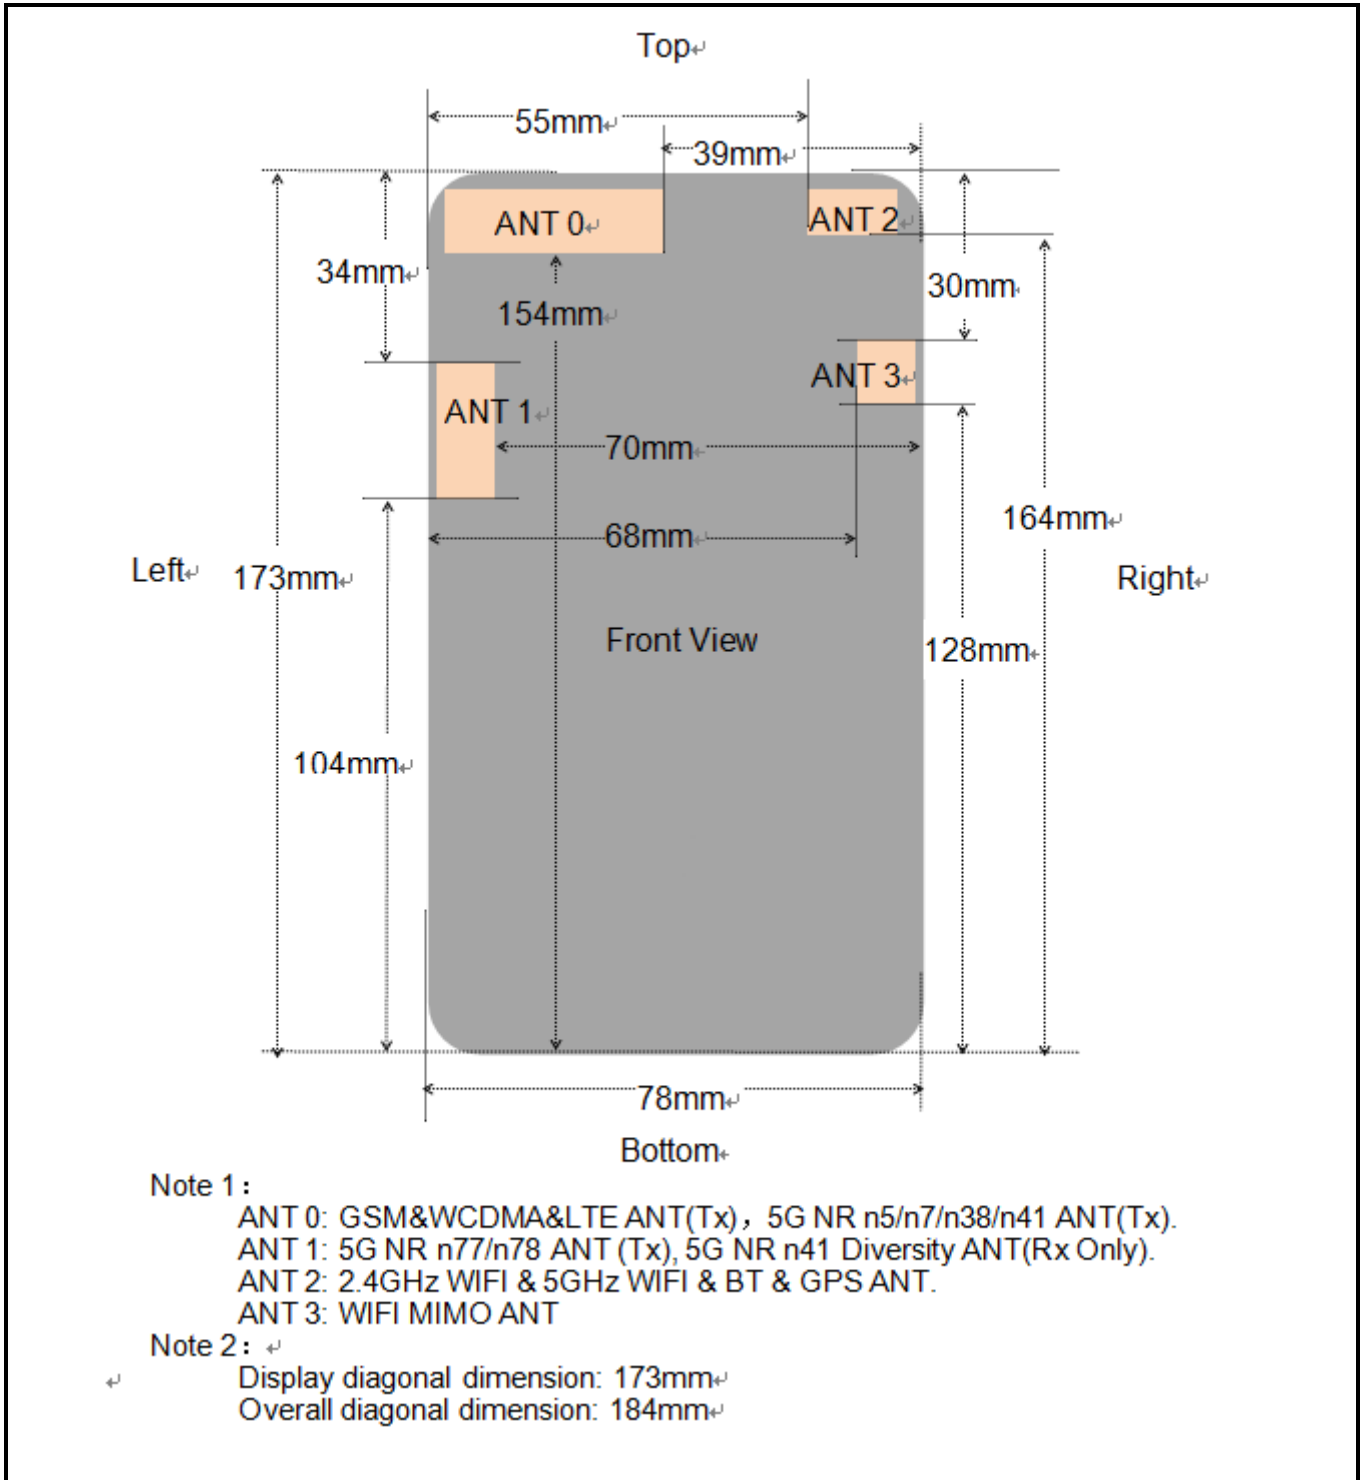


Fig.14.1 EUT Antenna Locations

Note: This antenna diagram is only used as a reference for the distance from the antenna to each edge. For the specific shape of the antenna, please refer to the physical photo.

14.2 Test Positions Consideration

Distance of Antennas to EUT edge/surface Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
ANT 0	<25mm	<25mm	<25mm	154mm	39mm	<25mm
ANT 1	<25mm	<25mm	34mm	104mm	70mm	<25mm
ANT 2	<25mm	<25mm	<25mm	164mm	<25mm	55mm
ANT 3	<25mm	<25mm	30mm	128mm	<25mm	68mm

Test Positions Test distance: 10mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
ANT 0	Yes	Yes	Yes	No	No	Yes
ANT 1	Yes	Yes	No	No	No	Yes
ANT 2	Yes	Yes	Yes	No	Yes	No
ANT 3	Yes	Yes	No	No	Yes	No

Note:

1. ANT 0: GSM&WCDMA<E ANT(Tx), 5G NR n5/n7/n38/n41 ANT(Tx).
2. ANT 1: 5G NR n77/n78 ANT (Tx), 5G NR n41 Diversity ANT(Rx Only).
3. ANT 2: 2.4GHz WIFI & 5GHz WIFI & BT & GPS ANT.
4. ANT 3: WIFI MIMO ANT
5. Head/Body-worn/Hotspot mode SAR assessments are required.
6. Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} * 5\text{cm}$, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
7. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for hotspot SAR, and 10 mm for body-worn SAR.

15 SAR Test Results Summary

15.1 Standalone Head SAR Data

➤ GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
1	GSM850/Voice	Right Cheek	190	836.6	32.42	-2.74	32.50	0.638	1.019	0.650
	GSM850/Voice	Right Tilted	190	836.6	32.42	3.88	32.50	0.539	1.019	0.549
	GSM850/Voice	Left Cheek	190	836.6	32.42	-1.24	32.50	0.453	1.019	0.462
	GSM850/Voice	Left Tilted	190	836.6	32.42	1.34	32.50	0.448	1.019	0.457
	GSM1900/Voice	Right Cheek	512	1850.2	29.68	2.53	30.00	0.329	1.076	0.354
2	GSM1900/Voice	Right Tilted	512	1850.2	29.68	2.44	30.00	0.433	1.076	0.466
	GSM1900/Voice	Left Cheek	512	1850.2	29.68	3.43	30.00	0.256	1.076	0.275
	GSM1900/Voice	Left Tilted	512	1850.2	29.68	-3.04	30.00	0.226	1.076	0.243
	ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g		

➤ WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
3	Band V/RMC	Right Cheek	4233	846.6	23.61	-1.00	24.00	0.516	1.094	0.565
	Band V/RMC	Right Tilted	4233	846.6	23.61	-0.36	24.00	0.451	1.094	0.493
	Band V/RMC	Left Cheek	4233	846.6	23.61	-3.38	24.00	0.394	1.094	0.431
	Band V/RMC	Left Tilted	4233	846.6	23.61	-2.11	24.00	0.376	1.094	0.411
	Band IV/RMC	Right Cheek	1513	1752.6	23.28	-2.36	23.50	0.418	1.052	0.440
4	Band IV/RMC	Right Tilted	1513	1752.6	23.28	-2.69	23.50	0.674	1.052	0.709
	Band IV/RMC	Left Cheek	1513	1752.6	23.28	-3.20	23.50	0.378	1.052	0.398
	Band IV/RMC	Left Tilted	1513	1752.6	23.28	-4.36	23.50	0.426	1.052	0.448
	Band II/RMC	Right Cheek	9538	1907.6	23.13	-3.21	23.50	0.310	1.089	0.338
5	Band II/RMC	Right Tilted	9538	1907.6	23.13	-1.54	23.50	0.397	1.089	0.432
	Band II/RMC	Left Cheek	9538	1907.6	23.13	-2.26	23.50	0.212	1.089	0.231
	Band II/RMC	Left Tilted	9538	1907.6	23.13	-1.78	23.50	0.237	1.089	0.258
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 2(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
6	Band2/1RB#49	Right Cheek	18700	1860	23.35	-3.27	23.50	0.371	1.035	0.384
	Band2/1RB#49	Right Tilted	18700	1860	23.35	-3.21	23.50	0.482	1.035	0.499
	Band2/1RB#49	Left Cheek	18700	1860	23.35	-3.51	23.50	0.361	1.035	0.374
	Band2/1RB#49	Left Tilted	18700	1860	23.35	1.32	23.50	0.341	1.035	0.353
	Band2/50%RB#0	Right Cheek	19100	1900	22.30	-3.12	22.50	0.362	1.047	0.379
	Band2/50%RB#0	Right Tilted	19100	1900	22.30	-2.35	22.50	0.405	1.047	0.424
	Band2/50%RB#0	Left Cheek	19100	1900	22.30	-1.23	22.50	0.322	1.047	0.337
	Band2/50%RB#0	Left Tilted	19100	1900	22.30	-4.13	22.50	0.251	1.047	0.263
	ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g		

➤ FDD-LTE Band 4(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#99	Right Cheek	20050	1720	23.41	-2.40	24.00	0.378	1.146	0.433
7	Band4/1RB#99	Right Tilted	20050	1720	23.41	-4.10	24.00	0.396	1.146	0.454
	Band4/1RB#99	Left Cheek	20050	1720	23.41	1.25	24.00	0.305	1.146	0.350
	Band4/1RB#99	Left Tilted	20050	1720	23.41	-3.21	24.00	0.312	1.146	0.358
	Band4/50%RB#0	Right Cheek	20175	1732.5	22.29	-4.28	22.50	0.301	1.050	0.316
	Band4/50%RB#0	Right Tilted	20175	1732.5	22.29	4.21	22.50	0.317	1.050	0.333
	Band4/50%RB#0	Left Cheek	20175	1732.5	22.29	-1.36	22.50	0.297	1.050	0.312
	Band4/50%RB#0	Left Tilted	20175	1732.5	22.29	-4.26	22.50	0.246	1.050	0.258
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 5(10MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
8	Band5/1RB#24	Right Cheek	20525	836.5	23.52	-1.43	24.00	0.453	1.117	0.506
	Band5/1RB#24	Right Tilted	20525	836.5	23.52	1.36	24.00	0.407	1.117	0.455
	Band5/1RB#24	Left Cheek	20525	836.5	23.52	2.65	24.00	0.318	1.117	0.355
	Band5/1RB#24	Left Tilted	20525	836.5	23.52	-1.56	24.00	0.298	1.117	0.333
	Band5/50%RB#24	Right Cheek	20600	844	22.52	2.35	23.00	0.421	1.117	0.470
	Band5/50%RB#24	Right Tilted	20600	844	22.52	1.87	23.00	0.347	1.117	0.388
	Band5/50%RB#24	Left Cheek	20600	844	22.52	-3.22	23.00	0.307	1.117	0.343
	Band5/50%RB#24	Left Tilted	20600	844	22.52	2.77	23.00	0.232	1.117	0.259
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	Right Cheek	20850	2510	23.26	0.05	23.50	0.279	1.057	0.295
9	Band7/1RB#49	Right Tilted	20850	2510	23.26	-4.00	23.50	0.314	1.057	0.332
	Band7/1RB#49	Left Cheek	20850	2510	23.26	2.78	23.50	0.061	1.057	0.064
	Band7/1RB#49	Left Tilted	20850	2510	23.26	-4.48	23.50	0.164	1.057	0.173
	Band7/50%RB#24	Right Cheek	21350	2560	22.24	-4.58	22.50	0.253	1.062	0.269
	Band7/50%RB#24	Right Tilted	21350	2560	22.24	-3.52	22.50	0.263	1.062	0.279
	Band7/50%RB#24	Left Cheek	21350	2560	22.24	1.16	22.50	0.053	1.062	0.056
	Band7/50%RB#24	Left Tilted	21350	2560	22.24	-3.26	22.50	0.151	1.062	0.160
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 17(10MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
10	Band17/1RB#49	Right Cheek	23780	709	23.03	-0.60	23.5	0.300	1.114	0.334
	Band17/1RB#49	Right Tilted	23780	709	23.03	-1.11	23.5	0.256	1.114	0.285
	Band17/1RB#49	Left Cheek	23780	709	23.03	3.67	23.5	0.288	1.114	0.321
	Band17/1RB#49	Left Tilted	23780	709	23.03	2.58	23.5	0.247	1.114	0.275
	Band17/50%RB#0	Right Cheek	23780	709	21.95	1.37	23.00	0.224	1.274	0.285
	Band17/50%RB#0	Right Tilted	23780	709	21.95	-3.66	23.00	0.252	1.274	0.321
	Band17/50%RB#0	Left Cheek	23780	709	21.95	-3.86	23.00	0.203	1.274	0.259
	Band17/50%RB#0	Left Tilted	23780	709	23.03	-0.60	23.5	0.300	1.114	0.334
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g) Averaged over 1g			

Uncontrolled Exposure/General Population

➤ TDD-LTE Band 41(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Right Cheek	40140	2545	23.10	1.22	23.5	0.714	1.096	1.008	0.789
11	Band41/1RB#49	Right Tilted	40140	2545	23.10	-2.51	23.5	0.927	1.096	1.008	1.024
	Band41/1RB#49	Right Tilted	40140	2545	23.10	-2.51	23.5	0.920	1.096	1.008	1.016
	Band41/1RB#49	Right Tilted	40390	2570	23.01	0.48	23.5	0.876	1.119	1.008	0.988
	Band41/1RB#49	Right Tilted	40640	2595	23.06	3.65	23.5	0.772	1.107	1.008	0.861
	Band41/1RB#49	Right Tilted	40890	2620	23.00	2.57	23.5	0.855	1.122	1.008	0.967
	Band41/1RB#49	Right Tilted	41140	2645	23.04	-2.77	23.5	0.908	1.112	1.008	1.018
	Band41/1RB#49	Left Cheek	40140	2545	23.10	-2.76	23.5	0.467	1.096	1.008	0.516
	Band41/1RB#49	Left Tilted	40140	2545	23.10	1.88	23.5	0.419	1.096	1.008	0.463
	Band41/50%RB#49	Right Cheek	40640	2595	22.05	3.14	22.5	0.543	1.109	1.008	0.602
	Band41/50%RB#49	Right Tilted	40640	2595	22.05	2.87	22.5	0.681	1.109	1.008	0.761
	Band41/50%RB#49	Left Cheek	40640	2595	22.05	-1.32	22.5	0.399	1.109	1.008	0.446
	Band41/50%RB#49	Left Tilted	40640	2595	22.05	1.56	22.5	0.325	1.109	1.008	0.363
	Band41/100%RB#0	Right Cheek	41140	2645	22.01	2.58	22.5	0.503	1.119	1.008	0.563
	Band41/100%RB#0	Right Tilted	41140	2645	22.01	2.14	22.5	0.621	1.119	1.008	0.700
	Band41/100%RB#0	Left Cheek	41140	2645	22.01	1.69	22.5	0.309	1.119	1.008	0.349
	Band41/100%RB#0	Left Tilted	41140	2645	22.01	-1.22	22.5	0.255	1.119	1.008	0.288
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population							Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band66/1RB#49	Right Cheek	132072	1720	23.05	3.98	23.50	0.284	1.109	0.315	
12	Band66/1RB#49	Right Tilted	132072	1720	23.05	-4.80	23.50	0.415	1.109	0.460	
	Band66/1RB#49	Left Cheek	132072	1720	23.05	-4.22	23.50	0.247	1.109	0.274	
	Band66/1RB#49	Left Tilted	132072	1720	23.05	3.35	23.50	0.345	1.109	0.383	
	Band66/50%RB#49	Right Cheek	132322	1745	22.00	1.45	22.50	0.222	1.122	0.249	
	Band66/50%RB#49	Right Tilted	132322	1745	22.00	3.68	22.50	0.330	1.122	0.370	
	Band66/50%RB#49	Left Cheek	132322	1745	22.00	-1.55	22.50	0.201	1.122	0.226	
	Band66/50%RB#49	Left Tilted	132322	1745	22.00	3.35	22.50	0.311	1.122	0.349	
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population							Averaged over 1g				

> NR n5 DFT-BPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
13	NR n5 DFT-BPSK /1@104 20M	Right Cheek	167300	836.5	23.32	2.88	24.00	0.397	1.169	0.464
	NR n5 DFT-BPSK /1@104 20M	Right Tilted	167300	836.5	23.32	0.03	24.00	0.341	1.169	0.399
	NR n5 DFT-BPSK /1@104 20M	Left Cheek	167300	836.5	23.32	0.32	24.00	0.288	1.169	0.337
	NR n5 DFT-BPSK /1@104 20M	Left Tilted	167300	836.5	23.32	-0.36	24.00	0.251	1.169	0.293
	NR n5 DFT-BPSK /50RB#25 20M	Right Cheek	167300	836.5	23.54	-2.36	24.00	0.361	1.112	0.401
	NR n5 DFT-BPSK /50RB#25 20M	Right Tilted	167300	836.5	23.54	-1.25	24.00	0.298	1.112	0.331
	NR n5 DFT-BPSK /50RB#25 20M	Left Cheek	167300	836.5	23.54	-3.03	24.00	0.321	1.112	0.357
	NR n5 DFT-BPSK /50RB#25 20M	Left Tilted	167300	836.5	23.54	2.39	24.00	0.196	1.112	0.218
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

> NR n7 DFT-BPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n7 DFT-BPSK /1@1 20M	Right Cheek	507000	2535	23.30	-1.54	24.50	0.427	1.318	0.563
14	NR n7 DFT-BPSK /1@1 20M	Right Tilted	507000	2535	23.30	-2.65	24.50	0.511	1.318	0.673
	NR n7 DFT-BPSK /1@1 20M	Left Cheek	507000	2535	23.30	-2.68	24.50	0.413	1.318	0.544
	NR n7 DFT-BPSK /1@1 20M	Left Tilted	507000	2535	23.30	-2.63	24.50	0.501	1.318	0.660
	NR n7 DFT-BPSK /25RB#12 20M	Right Cheek	502000	2510	23.46	2.01	24.50	0.389	1.271	0.494
	NR n7 DFT-BPSK /25RB#12 20M	Right Tilted	502000	2510	23.46	-3.39	24.50	0.501	1.271	0.637
	NR n7 DFT-BPSK /25RB#12 20M	Left Cheek	502000	2510	23.46	-0.26	24.50	0.376	1.271	0.478
	NR n7 DFT-BPSK /25RB#12 20M	Left Tilted	502000	2510	23.46	-0.05	24.50	0.425	1.271	0.540
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)			

Spatial Peak Uncontrolled Exposure/General Population						Averaged over 1g				
➤ NR n41 DFT-BPSK Head SAR										
Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n41 DFT-BPSK /1@1 100M	Right Cheek	517002	2585.01	21.49	1.22	22.00	0.688	1.125	0.774
	NR n41 DFT-BPSK /1@1 100M	Right Tilted	517002	2585.01	21.49	-2.36	22.00	0.674	1.125	0.758
	NR n41 DFT-BPSK /1@1 100M	Left Cheek	517002	2585.01	21.49	-1.56	22.00	0.389	1.125	0.438
	NR n41 DFT-BPSK /1@1 100M	Left Tilted	517002	2585.01	21.49	-1.02	22.00	0.326	1.125	0.367
	NR n41 DFT-BPSK /137RB#67 100M	Right Cheek	519000	2585.01	22.14	-2.37	22.50	0.705	1.086	0.766
15	NR n41 DFT-BPSK /137RB#67 100M	Right Tilted	519000	2595	22.14	-3.39	22.50	1.045	1.086	1.135
	NR n41 DFT-BPSK /137RB#67 100M	Right Tilted	519000	2595	22.14	0.84	22.50	1.017	1.086	1.104
	NR n41 DFT-BPSK /137RB#67 100M	Right Tilted	517002	2585.01	22.11	0.05	22.50	0.998	1.094	1.092
	NR n41 DFT-BPSK /137RB#67 100M	Right Tilted	520998	2604.99	22.10	0.22	22.50	0.982	1.096	1.076
	NR n41 DFT-BPSK /137RB#67 100M	Left Cheek	519000	2595	22.14	-4.56	22.50	0.346	1.086	0.376
	NR n41 DFT-BPSK /137RB#67 100M	Left Tilted	519000	2595	22.14	-1.32	22.50	0.716	1.086	0.778
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population						1.6 W/kg (mW/g) Averaged over 1g				

➤ NR n77(3450MHz~3550MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
16	NR n77 DFT-BPSK /1@1 100M	Right Cheek	633334	3500.01	25.03	-1.88	25.5	0.700	1.114	0.780
	NR n77 DFT-BPSK /1@1 100M	Right Tilted	633334	3500.01	25.03	2.32	25.5	0.327	1.114	0.364
	NR n77 DFT-BPSK /1@1 100M	Left Cheek	633334	3500.01	25.03	0.00	25.5	0.470	1.114	0.524
	NR n77 DFT-BPSK /1@1 100M	Left Tilted	633334	3500.01	25.03	2.30	25.5	0.125	1.114	0.139
	NR n77 DFT-BPSK /137RB#67 100M	Right Cheek	633334	3500.01	25.89	-1.30	26.5	0.602	1.151	0.693
	NR n77 DFT-BPSK /137RB#67 100M	Right Tilted	633334	3500.01	25.89	1.30	26.5	0.231	1.151	0.266
	NR n77 DFT-BPSK /137RB#67 100M	Left Cheek	633334	3500.01	25.89	3.36	26.5	0.401	1.151	0.462
	NR n77 DFT-BPSK /137RB#67 100M	Left Tilted	633334	3500.01	25.89	2.53	26.5	0.111	1.151	0.128
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g					

➤ NR n77(3700MHz~3980MHz) DFT-BPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
17	NR n77 DFT-BPSK /1@1 100M	Right Cheek	650000	3750	24.68	0.03	25.00	0.642	1.076	0.691
	NR n77 DFT-BPSK /1@1 100M	Right Tilted	650000	3750	24.68	-1.42	25.00	0.170	1.076	0.183
	NR n77 DFT-BPSK /1@1 100M	Left Cheek	650000	3750	24.68	-0.62	25.00	0.625	1.076	0.673
	NR n77 DFT-BPSK /1@1 100M	Left Tilted	650000	3750	24.68	-0.20	25.00	0.144	1.076	0.155
	NR n77 DFT-BPSK /137RB#67 100M	Right Cheek	650000	3750	25.67	4.47	26.00	0.609	1.079	0.657
	NR n77 DFT-BPSK /137RB#67 100M	Right Tilted	650000	3750	25.67	1.32	26.00	0.155	1.079	0.167
	NR n77 DFT-BPSK /137RB#67 100M	Left Cheek	650000	3750	25.67	3.21	26.00	0.573	1.079	0.618
	NR n77 DFT-BPSK /137RB#67 100M	Left Tilted	650000	3750	25.67	2.03	26.00	0.143	1.079	0.154
ANSI / IEEE C95.1 – SAFETY LIMIT					1.6 W/kg (mW/g)					

Spatial Peak Uncontrolled Exposure/General Population								Averaged over 1g			
➤ WLAN 2.4 GHz Head SAR											
Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b ANT 2	Right Cheek	1	2412	15.72	4.12	16	0.078	1.067	1.00	0.083
	2.4GHz/802.11b ANT 2	Right Tilted	1	2412	15.72	3.33	16	0.098	1.067	1.00	0.105
	2.4GHz/802.11b ANT 2	Left Cheek	1	2412	15.72	-2.10	16	0.191	1.067	1.00	0.204
	2.4GHz/802.11b ANT 2	Left Tilted	1	2412	15.72	-3.63	16	0.189	1.067	1.00	0.202
	2.4GHz/802.11b ANT 3	Right Cheek	6	2437	16.31	-0.32	16.5	0.097	1.045	1.00	0.101
	2.4GHz/802.11b ANT 3	Right Tilted	6	2437	16.31	-0.02	16.5	0.167	1.045	1.00	0.175
	2.4GHz/802.11b ANT 3	Left Cheek	6	2437	16.31	-0.72	16.5	0.215	1.045	1.00	0.225
18	2.4GHz/802.11b ANT 3	Left Tilted	6	2437	16.31	-1.36	16.5	0.235	1.045	1.00	0.246
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g			

➤ WLAN 5.2 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n20 ANT 2	Right Cheek	40	5200	12.86	-1.52	13.00	0.084	1.033	1.00	0.087
	5.2GHz/802.11n20 ANT 2	Right Tilted	40	5200	12.86	1.57	13.00	0.072	1.033	1.00	0.074
19	5.2GHz/802.11n20 ANT 2	Left Cheek	40	5200	12.86	2.36	13.00	0.195	1.033	1.00	0.201
	5.2GHz/802.11n20 ANT 2	Left Tilted	40	5200	12.86	3.95	13.00	0.058	1.033	1.00	0.060
	5.2GHz/802.11a ANT 3	Right Cheek	48	5240	11.74	1.30	12.00	0.094	1.062	1.00	0.100
	5.2GHz/802.11a ANT 3	Right Tilted	48	5240	11.74	3.30	12.00	0.081	1.062	1.00	0.086
	5.2GHz/802.11a ANT 3	Left Cheek	48	5240	11.74	3.09	12.00	0.164	1.062	1.00	0.174
	5.2GHz/802.11a ANT 3	Left Tilted	48	5240	11.74	-3.07	12.00	0.074	1.062	1.00	0.079
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) Averaged over 1g			

➤ WLAN 5.8 GHz Head SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11ac20 ANT 2	Right Cheek	165	5825	15.08	1.20	15.50	0.088	1.102	1.00	0.097
	5.2GHz/802.11ac20 ANT 2	Right Tilted	165	5825	15.08	1.69	15.50	0.075	1.102	1.00	0.083
	5.2GHz/802.11ac20 ANT 2	Left Cheek	165	5825	15.08	0.05	15.50	0.205	1.102	1.00	0.226
	5.2GHz/802.11ac20 ANT 2	Left Tilted	165	5825	15.08	-0.36	15.50	0.084	1.102	1.00	0.093
	5.8GHz/802.11a	Right Cheek	165	5825	15.36	4.36	15.50	0.081	1.159	1.00	0.094

	ANT 3										
	5.8GHz/802.11a ANT 3	Right Tilted	165	5825	15.36	-2.33	15.50	0.067	1.159	1.00	0.078
20	5.8GHz/802.11a ANT 3	Left Cheek	165	5825	15.36	-3.30	15.50	0.227	1.159	1.00	0.263
	5.8GHz/802.11a ANT 3	Left Tilted	165	5825	15.36	0.21	15.50	0.101	1.159	1.00	0.117
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population					1.6 W/kg (mW/g) Averaged over 1g						

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR $\leq 0.8W/kg$, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is $\geq 0.8W/kg$.
3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 W/kg$.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS , when the reported SAR of the highest measured maximum output power channel for the exposure configuration is $\leq 0.8 W/kg$, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is $\leq 1.2 W/kg$. For ANT 2 Cuz the maximum output power specified for OFDM and DSSS are 32.28mW(15.09dBm) and 37.32mW(15.72dBm), the scaled SAR would be $0.204 \times (32.28/37.32) = 0.176W/Kg < 1.2 W/kg$, For ANT 3 Cuz the maximum output power specified for OFDM and DSSS are 35.97mW(15.56dBm) and 42.76mW(16.31 dBm), the scaled SAR would be $0.246 \times (35.97/42.76) = 0.207W/Kg < 1.2 W/kg$ therefore, SAR is not required for OFDM.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.

15.2 Standalone Body SAR

➤ GSM Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GSM850/Voice	Front	251	848.8	28.99	3.88	29.50	0.135	1.125	0.152
21	GSM850/Voice	Back	251	848.8	28.99	-3.38	29.50	0.291	1.125	0.327
	GSM1900/Voice	Front	512	1850.2	26.23	2.53	26.50	0.267	1.064	0.284
22	GSM1900/Voice	Back	512	1850.2	26.23	1.14	26.50	0.408	1.064	0.434
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WCDMA Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band V/RMC	Front	4233	846.6	23.61	2.84	24.00	0.126	1.094	0.138
23	Band V/RMC	Back	4233	846.6	23.61	-3.01	24.00	0.172	1.094	0.188
	Band IV/RMC	Front	1513	1752.6	23.28	-2.36	23.50	0.064	1.052	0.067
24	Band IV/RMC	Back	1513	1752.6	23.28	0.43	23.50	0.231	1.052	0.243
	Band II/RMC	Front	9538	1907.6	23.13	-2.36	23.50	0.164	1.089	0.179
25	Band II/RMC	Back	9538	1907.6	23.13	-1.68	23.50	0.197	1.089	0.215
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Front	18700	1860	23.35	1.23	24.00	0.198	1.161	0.230
26	Band2/1RB#49	Back	18700	1860	23.35	-3.31	24.00	0.251	1.161	0.291
	Band2/50%RB#0	Front	19100	1900	22.30	-1.36	22.50	0.221	1.047	0.231
	Band2/50%RB#0	Back	19100	1900	22.30	-3.39	22.50	0.244	1.047	0.255
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 4(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#99	Front	20050	1720	23.41	-3.66	24.00	0.201	1.146	0.230
27	Band4/1RB#99	Back	20050	1720	23.41	3.25	24.00	0.222	1.146	0.254
	Band4/50%RB#0	Front	20175	1732.50	22.29	2.16	22.50	0.135	1.050	0.142
	Band4/50%RB#0	Back	20175	1732.50	22.29	-3.52	22.50	0.147	1.050	0.154
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	Front	20525	836.5	23.52	2.65	24.00	0.119	1.117	0.133
28	Band5/1RB#24	Back	20525	836.5	23.52	4.84	24.00	0.128	1.117	0.143

	Band5/50%RB#24	Front	20600	844	22.52	1.22	23.00	0.101	1.117	0.113
	Band5/50%RB#24	Back	20600	844	22.52	1.36	23.00	0.110	1.117	0.123
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	Front	20850	2510	23.26	0.19	23.50	0.101	1.057	0.107
29	Band7/1RB#49	Back	20850	2510	23.26	-2.00	23.50	0.122	1.057	0.129
	Band7/50%RB#24	Front	21350	2560	22.24	1.29	22.50	0.068	1.062	0.072
	Band7/50%RB#24	Back	21350	2560	22.24	-0.05	22.50	0.077	1.062	0.082
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 17(10MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band17/1RB#49	Front	23780	709	23.03	-3.21	23.5	0.084	1.114	0.094
30	Band17/1RB#49	Back	23780	709	23.03	1.03	23.5	0.109	1.114	0.121
	Band17/50%RB#0	Front	23780	709	21.95	-1.30	22.00	0.078	1.012	0.079
	Band17/50%RB#0	Back	23780	709	21.95	-0.26	22.00	0.102	1.012	0.103
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Front	40140	2545	23.10	0.01	23.50	0.106	1.096	1.008	0.117
31	Band41/1RB#49	Back	40140	2545	23.10	0.04	23.50	0.339	1.096	1.008	0.375
	Band41/50%RB#49	Front	40640	2595	22.05	3.14	22.50	0.095	1.109	1.008	0.106
	Band41/50%RB#49	Back	40640	2595	22.05	3.14	22.50	0.265	1.109	1.008	0.296
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band66/1RB#49	Front	132072	1720	23.05	-3.22	23.50	0.156	1.109	0.173
32	Band66/1RB#49	Back	132072	1720	23.05	-0.21	23.50	0.196	1.109	0.217
	Band66/50%RB#49	Front	132322	1745	22.00	-3.74	22.50	0.135	1.122	0.151
	Band66/50%RB#49	Back	132322	1745	22.00	2.21	22.50	0.172	1.122	0.193
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n5 DFT-BPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n5 DFT-BPSK /1@104 20M	Front	167300	836.5	23.32	-2.14	23.50	0.088	1.042	0.092
33	NR n5 DFT-BPSK /1@104 20M	Back	167300	836.5	23.32	-4.83	23.50	0.105	1.042	0.109
	NR n5 DFT-BPSK /50RB#25 20M	Front	167300	836.5	23.54	-3.07	24.00	0.068	1.112	0.076
	NR n5 DFT-BPSK /50RB#25 20M	Back	167300	836.5	23.54	-0.25	24.00	0.084	1.112	0.093
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n7 DFT-BPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n7 DFT-BPSK /1@1 20M	Front	507000	2535	23.30	-2.52	23.50	0.130	1.047	0.136
34	NR n7 DFT-BPSK /1@1 20M	Back	507000	2535	23.30	0.87	23.50	0.143	1.047	0.150
	NR n7 DFT-BPSK /25RB#12 20M	Front	502000	2510	23.46	3.53	24.00	0.133	1.132	0.151
	NR n7 DFT-BPSK /25RB#12 20M	Back	502000	2510	23.46	-1.78	24.00	0.125	1.132	0.142
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n41 DFT-BPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n41 DFT-BPSK /1@1 100M	Front	517002	2585.01	21.49	1.32	22.00	0.226	1.125	0.254
35	NR n41 DFT-BPSK /1@1 100M	Back	517002	2585.01	21.49	-0.57	22.00	0.387	1.125	0.435
	NR n41 DFT-BPSK /137RB#67 100M	Front	519000	2585.01	22.14	0.36	22.50	0.235	1.086	0.255
	NR n41 DFT-BPSK /137RB#67 100M	Back	519000	2595	22.14	-0.23	22.50	0.330	1.086	0.358
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g) Averaged over 1g			

Uncontrolled Exposure/General Population	
---	--

➤ NR n77(3450MHz~3550MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n77 DFT-BPSK /1@1 100M	Front	633334	3500.01	25.03	1.02	25.50	0.075	1.114	0.084
36	NR n77 DFT-BPSK /1@1 100M	Back	633334	3500.01	25.03	3.20	25.50	0.163	1.114	0.182
	NR n77 DFT-BPSK /137RB#67 100M	Front	633334	3500.01	25.89	1.01	26.50	0.065	1.151	0.075
	NR n77 DFT-BPSK /137RB#67 100M	Back	633334	3500.01	25.89	-1.02	26.50	0.156	1.151	0.180
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n77(3700MHz~3980MHz) DFT-BPSK Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n77 DFT-BPSK /1@1 100M	Front	650000	3750	24.68	0.03	25.00	0.089	1.076	0.096
37	NR n77 DFT-BPSK /1@1 100M	Back	650000	3750	24.68	1.62	25.00	0.276	1.076	0.297
	NR n77 DFT-BPSK /137RB#67 100M	Front	650000	3750	25.67	-0.17	26.00	0.076	1.079	0.082
	NR n77 DFT-BPSK /137RB#67 100M	Back	650000	3750	25.67	0.11	26.00	0.259	1.079	0.279
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WLAN 2.4 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b ANT 2	Front	1	2412	15.72	-0.14	17.00	0.031	1.343	1.00	0.042
	2.4GHz/802.11b ANT 2	Back	1	2412	15.72	0.10	17.00	0.058	1.343	1.00	0.078
	2.4GHz/802.11b ANT 3	Front	6	2437	16.31	-0.19	17.00	0.045	1.172	1.00	0.053
38	2.4GHz/802.11b ANT 3	Back	6	2437	16.31	0.20	17.00	0.140	1.172	1.00	0.164
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> WLAN 5.2 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n20 ANT 2	Front	40	5200	12.86	0.21	13.00	0.012	1.033	1.00	0.012
39	5.2GHz/802.11n20 ANT 2	Back	40	5200	12.86	0.01	13.00	0.022	1.033	1.00	0.023
	5.2GHz/802.11a ANT 3	Front	48	5240	11.74	-0.08	12.00	0.004	1.062	1.00	0.004
	5.2GHz/802.11a ANT 3	Back	48	5240	11.74	-0.09	12.00	0.015	1.062	1.00	0.016
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

> WLAN 5.8 GHz Body SAR

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11ac20 ANT 2	Front	165	5825	15.08	0.16	15.50	0.008	1.102	1.00	0.009
	5.8GHz/802.11ac20 ANT 2	Back	165	5825	15.08	0.13	15.50	0.113	1.102	1.00	0.125
	5.8GHz/802.11a ANT 3	Front	165	5825	15.36	-0.18	15.50	0.016	1.033	1.00	0.017
40	5.8GHz/802.11a ANT 3	Back	165	5825	15.36	-0.15	16.00	0.155	1.033	1.00	0.160
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

Note:

- Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
- Per KDB 941225 D06v02r01, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories.
- Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call is selected to be tested.
- Per KDB 648474 D04v01r03, when the *Reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- The WLAN SAR perform the front and back position, due considered the simultaneous SAR for body-worn.
- Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
- Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
- According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
- Highlight part of test data means repeated test.

15.3 Body SAR in Hotspot Mode

➤ GSM Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	GPRS850/4 slots	Front	251	848.8	28.99	3.88	29.50	0.135	1.125	0.152
21	GPRS850/4 slots	Back	251	848.8	28.99	-3.38	29.50	0.291	1.125	0.327
	GPRS850/4 slots	Left	251	848.8	28.99	1.23	29.50	0.122	1.125	0.137
	GPRS850/4 slots	Top	251	848.8	28.99	-2.69	29.50	0.128	1.125	0.144
	GPRS1900/4 slots	Front	512	1850.2	26.23	2.53	26.50	0.267	1.064	0.284
22	GPRS1900/4 slots	Back	512	1850.2	26.23	1.14	26.50	0.408	1.064	0.434
	GPRS1900/4 slots	Left	512	1850.2	26.23	2.56	26.50	0.221	1.064	0.235
	GPRS1900/4 slots	Top	512	1850.2	26.23	1.69	26.50	0.198	1.064	0.211
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WCDMA Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band V/RMC	Front	4233	846.6	23.61	2.84	24.00	0.126	1.094	0.138
23	Band V/RMC	Back	4233	846.6	23.61	-3.01	24.00	0.172	1.094	0.188
	Band V/RMC	Left	4233	846.6	23.61	1.22	24.00	0.078	1.094	0.085
	Band V/RMC	Top	4233	846.6	23.61	-2.11	24.00	0.069	1.094	0.075
	Band IV/RMC	Front	1513	1752.6	23.28	-2.36	23.50	0.064	1.052	0.067
24	Band IV/RMC	Back	1513	1752.6	23.28	0.43	23.50	0.231	1.052	0.243
	Band IV/RMC	Left	1513	1752.6	23.28	2.21	23.50	0.033	1.052	0.035
	Band IV/RMC	Top	1513	1752.6	23.28	-1.25	23.50	0.076	1.052	0.080
	Band II/RMC	Front	9538	1907.6	23.13	-2.36	23.50	0.164	1.089	0.179
25	Band II/RMC	Back	9538	1907.6	23.13	-1.68	23.50	0.197	1.089	0.215
	Band II/RMC	Left	9538	1907.6	23.13	2.21	23.50	0.133	1.089	0.145
	Band II/RMC	Top	9538	1907.6	23.13	-1.25	23.50	0.176	1.089	0.192
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 2(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band2/1RB#49	Front	18700	1860	23.35	1.23	24.00	0.198	1.161	0.230
26	Band2/1RB#49	Back	18700	1860	23.35	-3.31	24.00	0.251	1.161	0.291
	Band2/1RB#49	Left	18700	1860	23.35	3.21	24.00	0.129	1.161	0.150
	Band2/1RB#49	Top	18700	1860	23.35	-4.10	24.00	0.250	1.161	0.290
	Band2/50%RB#0	Front	19100	1900	22.30	-1.36	22.50	0.221	1.047	0.231
	Band2/50%RB#0	Back	19100	1900	22.30	-3.39	22.50	0.244	1.047	0.255
	Band2/50%RB#0	Left	19100	1900	22.30	-2.29	22.50	0.121	1.047	0.127
	Band2/50%RB#0	Top	19100	1900	22.30	3.21	22.50	0.211	1.047	0.221
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ FDD-LTE Band 4(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band4/1RB#99	Front	20050	1720	23.41	-3.66	24.00	0.201	1.146	0.230
27	Band4/1RB#99	Back	20050	1720	23.41	3.25	24.00	0.222	1.146	0.254
	Band4/1RB#99	Left	20050	1720	23.41	-1.63	24.00	0.188	1.146	0.215
	Band4/1RB#99	Top	20050	1720.00	23.41	-2.36	24.00	0.195	1.146	0.223

	Band4/50%RB#0	Front	20175	1732.50	22.29	2.16	22.50	0.135	1.050	0.142
	Band4/50%RB#0	Back	20175	1732.50	22.29	-3.52	22.50	0.147	1.050	0.154
	Band4/50%RB#0	Left	20175	1732.50	22.29	1.56	22.50	0.125	1.050	0.131
	Band4/50%RB#0	Top	20175	1732.50	22.29	-4.23	22.50	0.142	1.050	0.149
ANSI / IEEE C95.1 – SAFETY LIMIT										
Spatial Peak							1.6 W/kg (mW/g)			
Uncontrolled Exposure/General Population							Averaged over 1g			

➤ FDD-LTE Band 5(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band5/1RB#24	Front	20525	836.5	23.52	2.65	24.00	0.119	1.117	0.133
28	Band5/1RB#24	Back	20525	836.5	23.52	4.84	24.00	0.128	1.117	0.143
	Band5/1RB#24	Left	20525	836.5	23.52	1.53	24.00	0.126	1.117	0.141
	Band5/1RB#24	Top	20525	836.5	23.52	1.47	24.00	0.116	1.117	0.130
	Band5/50%RB#24	Front	20600	844	22.52	1.22	23.00	0.101	1.117	0.113
	Band5/50%RB#24	Back	20600	844	22.52	1.36	23.00	0.110	1.117	0.123
	Band5/50%RB#24	Left	20600	844	22.52	-2.55	23.00	0.103	1.117	0.115
	Band5/50%RB#24	Top	20600	844	22.52	3.76	23.00	0.105	1.117	0.117
ANSI / IEEE C95.1 – SAFETY LIMIT										
Spatial Peak							1.6 W/kg (mW/g)			
Uncontrolled Exposure/General Population							Averaged over 1g			

➤ FDD-LTE Band 7(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band7/1RB#49	Front	20850	2510	23.26	0.19	23.50	0.101	1.057	0.107
29	Band7/1RB#49	Back	20850	2510	23.26	-2.00	23.50	0.122	1.057	0.129
	Band7/1RB#49	Left	20850	2510	23.26	0.26	23.50	0.112	1.057	0.118
	Band7/1RB#49	Top	20850	2510	23.26	1.35	23.50	0.102	1.057	0.108
	Band7/50%RB#24	Front	21350	2560	22.24	1.29	22.50	0.068	1.062	0.072
	Band7/50%RB#24	Back	21350	2560	22.24	-0.05	22.50	0.077	1.062	0.082
	Band7/50%RB#24	Left	21350	2560	22.24	2.10	22.50	0.058	1.062	0.062
	Band7/50%RB#24	Top	21350	2560	22.24	1.35	22.50	0.048	1.062	0.051
ANSI / IEEE C95.1 – SAFETY LIMIT										
Spatial Peak							1.6 W/kg (mW/g)			
Uncontrolled Exposure/General Population							Averaged over 1g			

➤ FDD-LTE Band 17(10MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)
	Band17/1RB#49	Front	23780	709	23.03	-3.21	23.5	0.084	1.114	0.094
30	Band17/1RB#49	Back	23780	709	23.03	1.03	23.5	0.109	1.114	0.121
	Band17/1RB#49	Left	23780	709	23.03	0.12	23.5	0.086	1.114	0.096
	Band17/1RB#49	Top	23780	709	23.03	0.30	23.5	0.076	1.114	0.085
	Band17/50%RB#0	Front	23780	709	21.95	-1.30	22.00	0.078	1.012	0.079
	Band17/50%RB#0	Back	23780	709	21.95	-0.26	22.00	0.102	1.012	0.103
	Band17/50%RB#0	Left	23780	709	21.95	-2.60	22.00	0.082	1.012	0.083
	Band17/50%RB#0	Top	23780	709	21.95	1.37	22.00	0.065	1.012	0.066
ANSI / IEEE C95.1 – SAFETY LIMIT										
Spatial Peak							1.6 W/kg (mW/g)			
Uncontrolled Exposure/General Population							Averaged over 1g			

➤ TDD-LTE Band 41(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	Band41/1RB#49	Front	40140	2545	23.10	0.01	23.50	0.106	1.096	1.008	0.117
31	Band41/1RB#49	Back	40140	2545	23.10	0.04	23.50	0.339	1.096	1.008	0.375
	Band41/1RB#49	Left	40140	2545	23.10	-1.25	23.50	0.120	1.096	1.008	0.133
	Band41/1RB#49	Top	40140	2545	23.10	3.01	23.50	0.113	1.096	1.008	0.125
	Band41/50%RB#49	Front	40640	2595	22.05	3.14	22.50	0.095	1.109	1.008	0.106
	Band41/50%RB#49	Back	40640	2595	22.05	3.14	22.50	0.265	1.109	1.008	0.296
	Band41/50%RB#49	Left	40640	2595	22.05	3.14	22.50	0.104	1.109	1.008	0.116
	Band41/50%RB#49	Top	40640	2595	22.05	3.14	22.50	0.086	1.109	1.008	0.096
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ FDD-LTE Band 66(20MHz) QPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	
	Band66/1RB#49	Front	132072	1720	23.05	-3.22	23.50	0.156	1.109	0.173	
32	Band66/1RB#49	Back	132072	1720	23.05	-0.21	23.50	0.196	1.109	0.217	
	Band66/1RB#49	Left	132072	1720	23.05	-1.08	23.50	0.135	1.109	0.150	
	Band66/1RB#49	Top	132072	1720	23.05	3.69	23.50	0.176	1.109	0.195	
	Band66/50%RB#49	Front	132322	1745	22.00	-3.74	22.50	0.135	1.122	0.151	
	Band66/50%RB#49	Back	132322	1745	22.00	2.21	22.50	0.172	1.122	0.193	
	Band66/50%RB#49	Left	132322	1745	22.00	-3.05	22.50	0.113	1.122	0.127	
	Band66/50%RB#49	Top	132322	1745	22.00	1.87	22.50	0.158	1.122	0.177	
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ NR n5 DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)	
	NR n5 DFT-BPSK /1@104 20M	Front	167300	836.5	23.32	-2.14	23.50	0.088	1.042	0.092	
33	NR n5 DFT-BPSK /1@104 20M	Back	167300	836.5	23.32	-4.83	23.50	0.105	1.042	0.109	
	NR n5 DFT-BPSK /1@104 20M	Left	167300	836.5	23.32	-3.43	23.50	0.047	1.042	0.049	
	NR n5 DFT-BPSK /1@104 20M	Top	167300	836.5	23.32	2.77	23.50	0.089	1.042	0.093	
	NR n5 DFT-BPSK /50RB#25 20M	Front	167300	836.5	23.54	-3.07	24.00	0.068	1.112	0.076	
	NR n5 DFT-BPSK /50RB#25 20M	Back	167300	836.5	23.54	-0.25	24.00	0.084	1.112	0.093	
	NR n5 DFT-BPSK /50RB#25 20M	Left	167300	836.5	23.54	-3.21	24.00	0.035	1.112	0.039	
	NR n5 DFT-BPSK /50RB#25 20M	Top	167300	836.5	23.54	2.73	24.00	0.070	1.112	0.078	
ANSI / IEEE C95.1 – SAFETY LIMIT							1.6 W/kg (mW/g)				

Spatial Peak Uncontrolled Exposure/General Population	Averaged over 1g
--	-------------------------

➤ NR n7 DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n7 DFT-BPSK /1@1 20M	Front	507000	2535	23.30	-2.52	23.50	0.130	1.047	0.136
	NR n7 DFT-BPSK /1@1 20M	Back	507000	2535	23.30	0.87	23.50	0.143	1.047	0.150
	NR n7 DFT-BPSK /1@1 20M	Left	507000	2535	23.30	-3.42	23.50	0.112	1.047	0.117
	NR n7 DFT-BPSK /1@1 20M	Top	507000	2535	23.30	3.48	23.50	0.212	1.047	0.222
	NR n7 DFT-BPSK /25RB#12 20M	Front	502000	2510	23.46	3.53	24.00	0.133	1.132	0.151
	NR n7 DFT-BPSK /25RB#12 20M	Back	502000	2510	23.46	-1.78	24.00	0.125	1.132	0.142
	NR n7 DFT-BPSK /25RB#12 20M	Left	502000	2510	23.46	3.01	24.00	0.119	1.132	0.135
41	NR n7 DFT-BPSK /25RB#12 20M	Top	502000	2510	23.46	-1.08	24.00	0.237	1.132	0.268
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n41 DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n41 DFT-BPSK /1@1 100M	Front	517002	2585.01	21.49	1.32	22.00	0.226	1.125	0.254
	NR n41 DFT-BPSK /1@1 100M	Back	517002	2585.01	21.49	-0.57	22.00	0.387	1.125	0.435
	NR n41 DFT-BPSK /1@1 100M	Left	517002	2585.01	21.49	0.06	22.00	0.158	1.125	0.178
	NR n41 DFT-BPSK /1@1 100M	Top	517002	2585.01	21.49	-0.20	22.00	0.415	1.125	0.467
	NR n41 DFT-BPSK /137RB#67 100M	Front	519000	2585.01	22.14	0.36	22.50	0.235	1.086	0.255
	NR n41 DFT-BPSK /137RB#67 100M	Back	519000	2595	22.14	-0.23	22.50	0.330	1.086	0.358
	NR n41 DFT-BPSK /137RB#67 100M	Left	519000	2595	22.14	2.01	22.50	0.163	1.086	0.177
42	NR n41 DFT-BPSK /137RB#67 100M	Top	517002	2585.01	22.11	0.30	22.50	0.458	1.086	0.497

ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population	1.6 W/kg (mW/g) Averaged over 1g
---	---

➤ NR n77(3450MHz~3550MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n77 DFT-BPSK /1@1 100M	Front	633334	3500.01	25.03	1.02	25.50	0.075	1.114	0.084
	NR n77 DFT-BPSK /1@1 100M	Back	633334	3500.01	25.03	3.20	25.50	0.163	1.114	0.182
43	NR n77 DFT-BPSK /1@1 100M	Left	633334	3500.01	25.03	-0.06	25.50	0.444	1.114	0.495
	NR n77 DFT-BPSK /137RB#67 100M	Front	633334	3500.01	25.89	1.01	26.50	0.065	1.151	0.075
	NR n77 DFT-BPSK /137RB#67 100M	Back	633334	3500.01	25.89	-1.02	26.50	0.156	1.151	0.180
	NR n77 DFT-BPSK /137RB#67 100M	Left	633334	3500.01	25.89	2.31	26.50	0.412	1.151	0.474
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ NR n77(3700MHz~3980MHz) DFT-BPSK Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{10g} (W/kg)	Scaling Factor	Reported SAR _{10g} (W/kg)
	NR n77 DFT-BPSK /1@1 100M	Front	650000	3750	24.68	0.03	25.00	0.089	1.076	0.096
	NR n77 DFT-BPSK /1@1 100M	Back	650000	3750	24.68	1.62	25.00	0.276	1.076	0.297
44	NR n77 DFT-BPSK /1@1 100M	Left	650000	3750	24.68	-0.20	25.00	0.362	1.076	0.390
	NR n77 DFT-BPSK /137RB#67 100M	Front	650000	3750	25.67	-0.17	26.00	0.076	1.079	0.082
	NR n77 DFT-BPSK /137RB#67 100M	Back	650000	3750	25.67	0.11	26.00	0.259	1.079	0.279
	NR n77 DFT-BPSK /137RB#67 100M	Left	650000	3750	25.67	0.01	26.00	0.335	1.079	0.361
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g			

➤ WLAN 2.4GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	2.4GHz/802.11b ANT2	Front	1	2412	15.72	-0.14	17.00	0.031	1.343	1.00	0.042
	2.4GHz/802.11b ANT2	Back	1	2412	15.72	0.10	17.00	0.058	1.343	1.00	0.078
	2.4GHz/802.11b ANT2	Right	1	2412	15.72	0.08	17.00	0.026	1.343	1.00	0.035
	2.4GHz/802.11b ANT2	Top	1	2412	15.72	0.09	17.00	0.091	1.343	1.00	0.122
	2.4GHz/802.11b ANT3	Front	6	2437	16.31	-0.19	17.00	0.045	1.172	1.00	0.053
38	2.4GHz/802.11b ANT3	Back	6	2437	16.31	0.20	17.00	0.140	1.172	1.00	0.164
	2.4GHz/802.11b ANT3	Right	6	2437	16.31	0.16	17.00	0.035	1.172	1.00	0.041
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 5.2GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.2GHz/802.11n20 ANT 2	Front	40	5200	12.86	0.21	13.00	0.012	1.033	1.00	0.012
	5.2GHz/802.11n20 ANT 2	Back	40	5200	12.86	0.01	13.00	0.022	1.033	1.00	0.023
	5.2GHz/802.11n20 ANT 2	Right	40	5200	12.86	0.11	13.00	0.002	1.033	1.00	0.002
45	5.2GHz/802.11n20 ANT 2	Top	40	5200	12.86	0.20	13.00	0.050	1.033	1.00	0.052
	5.2GHz/802.11a ANT 3	Front	48	5240	11.74	-0.08	12.00	0.004	1.062	1.00	0.004
	5.2GHz/802.11a ANT 3	Back	48	5240	11.74	-0.09	12.00	0.015	1.062	1.00	0.016
	5.2GHz/802.11a ANT 3	Right	48	5240	11.74	0.11	12.00	0.013	1.062	1.00	0.014
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							1.6 W/kg (mW/g) Averaged over 1g				

➤ WLAN 5.8GHz Body SAR in Hotspot mode

Plot No.	Band/Mode	Test Position	CH.	Freq. (MHz)	Ave. Power (dBm)	Variation (%)	Tune-Up Limit (dBm)	Meas. SAR _{1g} (W/kg)	Scaling Factor	D.C Factor	Reported SAR _{1g} (W/kg)
	5.8GHz/802.11ac20 ANT 2	Front	165	5825	15.08	0.16	15.50	0.008	1.102	1.00	0.009
	5.8GHz/802.11ac20 ANT 2	Back	165	5825	15.08	0.13	15.50	0.113	1.102	1.00	0.125
	5.8GHz/802.11ac20 ANT 2	Right	165	5825	15.08	0.04	15.50	0.012	1.102	1.00	0.013
	5.8GHz/802.11ac20 ANT 2	Top	165	5825	15.08	-0.12	15.50	0.004	1.102	1.00	0.004
	5.8GHz/802.11a ANT 3	Front	165	5825	15.36	-0.18	15.50	0.016	1.033	1.00	0.017
40	5.8GHz/802.11a ANT 3	Back	165	5825	15.36	-0.15	15.50	0.155	1.033	1.00	0.160
	5.8GHz/802.11a ANT 3	Right	165	5825	15.36	0.19	15.50	0.014	1.033	1.00	0.014
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak							1.6 W/kg (mW/g) Averaged over 1g				

Uncontrolled Exposure/General Population

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
2. Additional WLAN SAR testing was performed for simultaneous transmission analysis.
3. For Hotspot SAR testing, per KDB 941225 D06v02r01, for EUT dimension ≥ 9 cm*5cm, the test distance is 10mm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.
4. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA output power is < 0.25 dB higher than RMC 12.2kbps, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2 W/kg, HSDPA SAR evaluation can be excluded.
5. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.
6. Per KDB 648474 D04v01r03, when the Reported SAR for a body-worn accessory measured without a headset connected to the handset is > 1.2 W/kg, SAR testing with a headset connected to the handset is required.
7. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel.
8. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
9. Highlight part of test data means repeated test.

15.4 Repeated SAR measurement

Band/ Mode	Test Position	CH.	Freq. (MHz)	Measured SAR (W/kg)				
				Original	1 st Repeated		2 nd Repeated	
					Value	Ratio	Value	Ratio
Band41/1RB#49	Right Tilted	40140	2545	0.927	0.920	1.01	/	/
NR n41 DFT-BPSK /137RB#67 100M	Right Tilted	519000	2595	1.045	1.017	1.03	/	/
ANSI / IEEE C95.1 – SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population				1.6 W/kg (mW/g) Averaged over 1g				

Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01r04, if the ratio of *original* and *repeated* is ≤ 1.2 and the measured SAR < 1.45 W/kg, only one repeated measurement is required.

15.5 Multi-Band Simultaneous Transmission Considerations

➤ **Simultaneous Transmission Capabilities**

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the EUT are shown in below Figure and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.



Fig.15.1 Simultaneous Transmission Paths

➤ **Simultaneous Transmission Procedures**

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When standalone SAR is not required to be measured, per FCC KDB 447498 D01v06 4.3.2), the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} \cdot \frac{\text{Max. power of channel, mW}}{\text{Min. Separation Distance, mm}}$$

Mode	Max. tune-up Power (dBm)	Exposure Position	Head	Body	Hotspot
		Test Distance (mm)	0	10	10
Bluetooth	5.5	Estimated SAR (W/kg)	0.147	0.073	0.073

Note:

- When the minimum *test separation distance* is < 5 mm, a distance of 5 mm according is applied to determine estimated SAR.

➤ **Multi-Band simultaneous Transmission Consideration**

Simultaneous Transmission Consideration	Position	Applicable Combination
	Head	WWAN (Voice) + WLAN (MIMO)
		WWAN (Voice) + Bluetooth
	Body	WWAN (Data) + WLAN (MIMO)
		WWAN (Data) + WLAN+ Bluetooth
	Hotspot	WWAN (Data) + WLAN (MIMO)
WWAN (Data) + WLAN+ Bluetooth		

Note:

- For ANT 2 WLAN 2.4GHz Band and Bluetooth share the same antenna, and cannot transmit simultaneously.
- GSM/WCDMA/LTE shares the same antenna, and cannot transmit simultaneously.
- The Report SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6 W/kg.
 - SPLSR = $(\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the Reported multi-band SAR < 1.6 W/kg

15.6 SAR Simultaneous Transmission Analysis

➤ Head Simultaneous Transmission

Position		Standalone SAR(W/kg)		Σ SAR _{1g} (W/kg)
		LTE Band 5	NR n77 SA	5G NR EN-DC
Head	Right Cheek	0.506	0.780	1.286
	Right Tilted	0.455	0.364	0.819
	Left Cheek	0.355	0.673	1.028
	Left Tilted	0.333	0.155	0.488
Body- worn	Front	0.133	0.096	0.229
	Back	0.143	0.297	0.440
Hotspot	Front	0.133	0.096	0.229
	Back	0.143	0.297	0.440
	Left	0.141	0.495	0.636
	Right	0.000	0.000	0.000
	Top	0.130	0.000	0.130
	Bottom	0.000	0.000	0.000

Position		Standalone SAR(W/kg)				Σ SAR _{1g} (W/kg)	
		1	2	3	4	1+2+3	1+3+4
		WWAN	2.4G WLAN ANT2	2.4G WLAN ANT3	BT ANT2		
Head	Right Cheek	1.286	0.083	0.101	0.147	1.470	1.534
	Right Tilted	1.135	0.105	0.175	0.147	1.415	1.457
	Left Cheek	1.028	0.204	0.225	0.147	1.457	1.400
	Left Tilted	0.778	0.202	0.246	0.147	1.226	1.171
Body-worn	Front	0.284	0.042	0.053	0.073	0.379	0.410
	Back	0.440	0.078	0.164	0.073	0.682	0.677
Hotspot	Front	0.284	0.042	0.053	0.073	0.379	0.410
	Back	0.440	0.078	0.164	0.073	0.682	0.677
	Left	0.636	0.000	0.000	0.073	0.636	0.709
	Right	0.000	0.035	0.041	0.073	0.076	0.114
	Top	0.497	0.122	0.000	0.073	0.619	0.570
	Bottom	0.000	0.000	0.000	0.073	0.000	0.073

Position		Standalone SAR(W/kg)				Σ SAR _{1g} (W/kg)	
		1	2	3	4	1+2+3	1+3+4
		WWAN	5.2G WLAN ANT2	5.2G WLAN ANT3	BT ANT2		
Head	Right Cheek	1.286	0.087	0.100	0.147	1.473	1.533
	Right Tilted	1.135	0.074	0.086	0.147	1.295	1.368
	Left Cheek	1.028	0.201	0.174	0.147	1.403	1.349
	Left Tilted	0.778	0.060	0.079	0.147	0.917	1.004
Body-worn	Front	0.284	0.012	0.004	0.073	0.300	0.361
	Back	0.440	0.023	0.016	0.073	0.479	0.529
Hotspot	Front	0.284	0.012	0.004	0.073	0.300	0.361
	Back	0.440	0.023	0.016	0.073	0.479	0.529
	Left	0.636	0.000	0.000	0.073	0.636	0.709

	Right	0.000	0.002	0.014	0.073	0.016	0.087
	Top	0.497	0.052	0.000	0.073	0.549	0.570
	Bottom	0.000	0.000	0.000	0.073	0.000	0.073

Position		Standalone SAR(W/kg)				Σ SAR _{1g} (W/kg)	
		1	2	3	4	1+2+3	1+3+4
		WWAN	5.8G WLAN ANT2	5.8G WLAN ANT3	BT ANT2		
Head	Right Cheek	1.286	0.097	0.084	0.147	1.467	1.517
	Right Tilted	1.135	0.083	0.069	0.147	1.287	1.351
	Left Cheek	1.028	0.226	0.234	0.147	1.488	1.409
	Left Tilted	0.778	0.093	0.104	0.147	0.975	1.029
Body-worn	Front	0.284	0.009	0.017	0.073	0.310	0.374
	Back	0.440	0.125	0.180	0.073	0.745	0.693
Hotspot	Front	0.284	0.009	0.017	0.073	0.310	0.374
	Back	0.440	0.125	0.180	0.073	0.745	0.693
	Left	0.636	0.000	0.000	0.073	0.636	0.709
	Right	0.000	0.013	0.016	0.073	0.029	0.089
	Top	0.497	0.004	0.000	0.073	0.501	0.570
	Bottom	0.000	0.000	0.000	0.073	0.000	0.073

➤ **Simultaneous Transmission Conclusion**

The above numerical summed SAR results for all the case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06.

15.7 Measurement Uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

16 Reference

- [1]. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2]. ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3]. IEEE Std. 1528-2013, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, September 2013
- [4]. OpenSAR V5 Software User Manual
- [5]. FCC KDB 248227 D01 v02r02, “SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS”, October 2015
- [6]. FCC KDB 447498 D01 v06, “RF EXPOSURE PROCEDURES AND EQUIPMENT AUTHORIZATION POLICIES FOR MOBILE AND PORTABLE DEVICES”, October 2015
- [7]. FCC KDB 648474 D04 v01r03, “SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS”, October 2015
- [8]. FCC KDB 941225 D01 v03r01, “3G SAR MEASUREMENT PROCEDURES”, October 2015
- [9]. FCC KDB 941225 D05 v02r05, “SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES”, Dec 2015
- [10]. FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [11]. FCC KDB 941225 D06 v02r01, “SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES”, October 2015
- [12]. FCC KDB 865664 D01 v01r04, “SAR MEASUREMENT REQUIREMENTS FOR 100 MHz TO 6 GHz”, August 2015

Appendix A: Plots of SAR System Check

System check at 750 MHz

Date of measurement: 19/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.73
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	750.000000
Relative permittivity (real part)	42.123142
Conductivity (S/m)	0.916261

C. SAR Surface and Volume

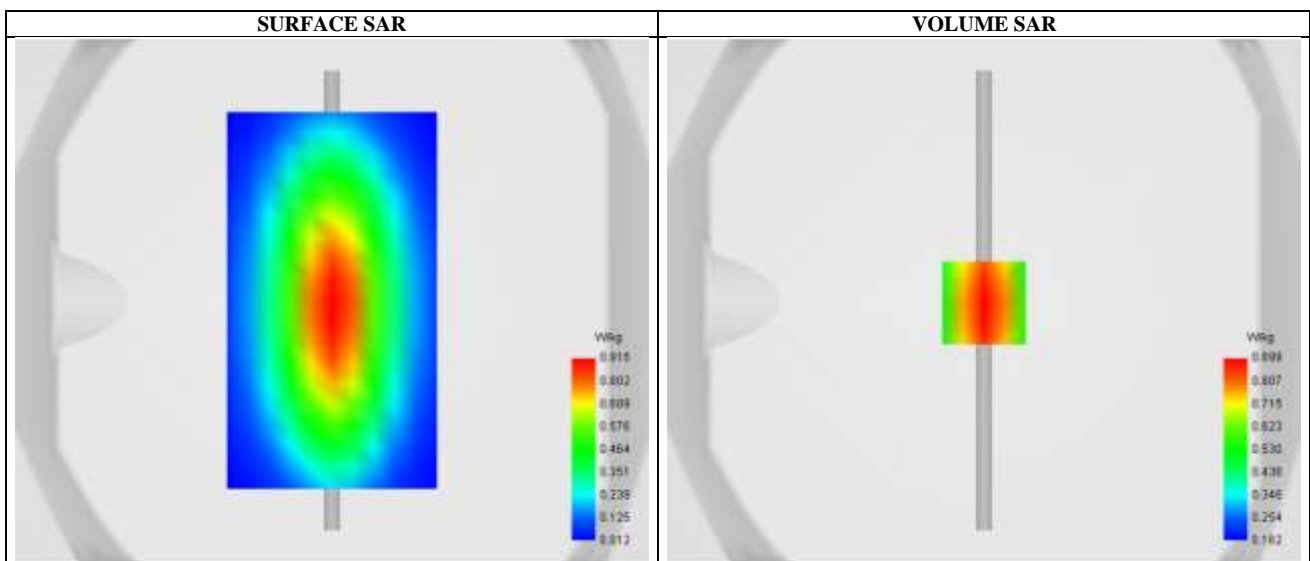


Maximum location: X=0.00, Y=0.00; SAR Peak: 1.26 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.512254
SAR 1g (W/Kg)	0.786431
Variation (%)	0.230000

E. Z Axis Scan

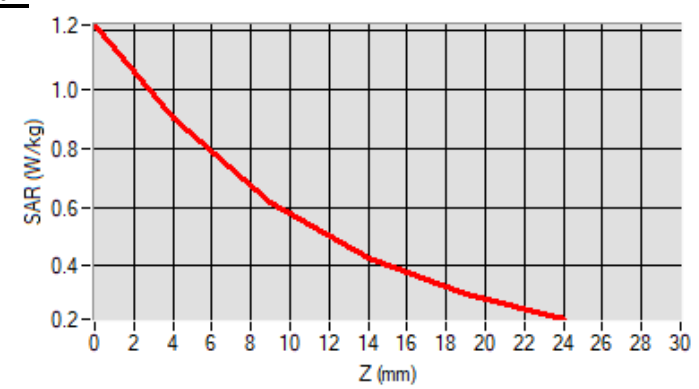

System check at 835 MHz

Date of measurement: 19/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	1.68
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW835
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.491142
Conductivity (S/m)	0.893521

C. SAR Surface and Volume

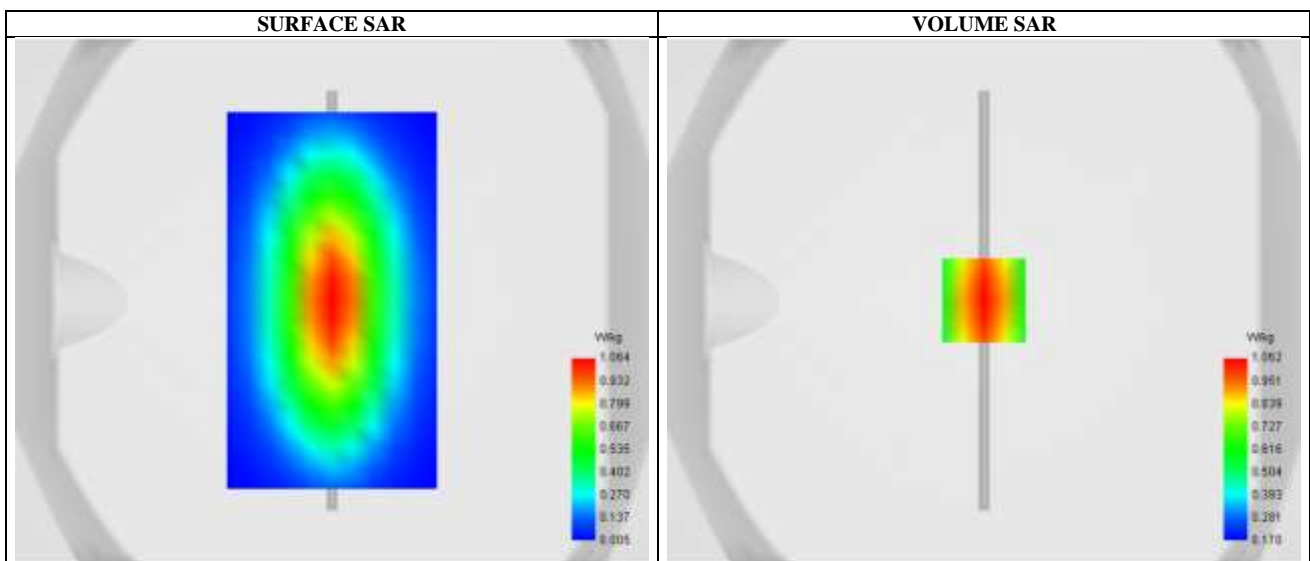


Maximum location: X=0.00, Y=0.00; SAR Peak: 1.47 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.635422
SAR 1g (W/Kg)	0.983412
Variation (%)	0.850000

E. Z Axis Scan

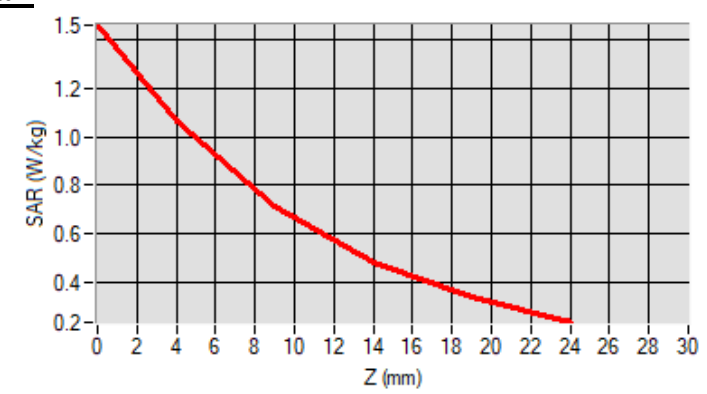

System check at 1750 MHz

Date of measurement: 15/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.07
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1750
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1750.000000
Relative permittivity (real part)	40.13236
Conductivity (S/m)	1.361472

C. SAR Surface and Volume

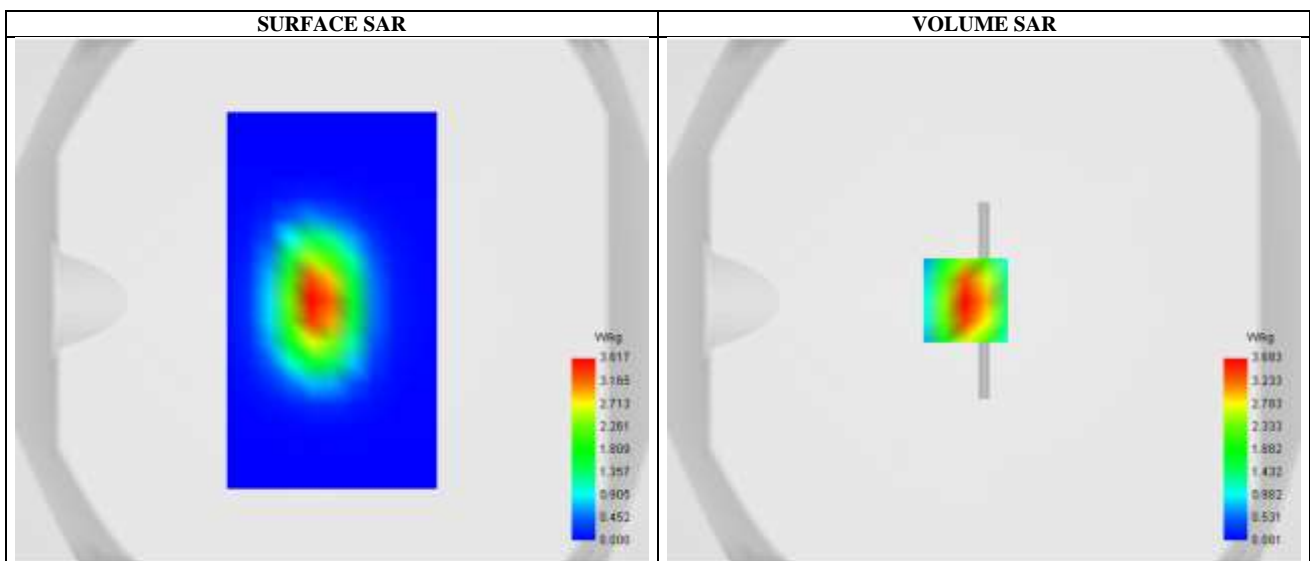


Maximum location: X=-7.00, Y=0.00; SAR Peak: 5.35 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.895213
SAR 1g (W/Kg)	3.383342
Variation (%)	1.030000

E. Z Axis Scan

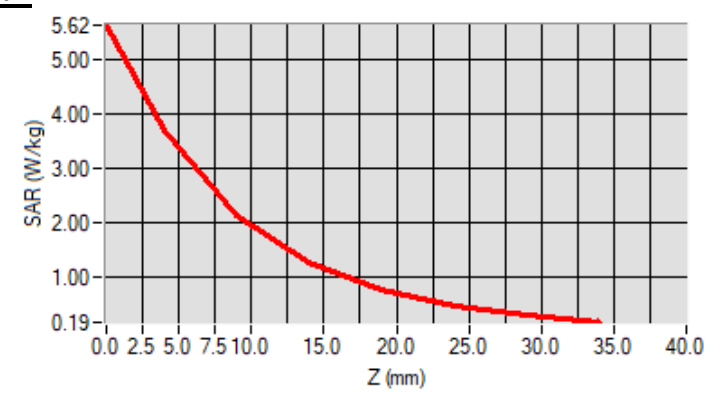

System check at 1900 MHz

Date of measurement: 15/10/2021


A. Experimental conditions.

Probe	SN 36/20 EPGO354
ConvF	2.14
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW1900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	1900.000000
Relative permittivity (real part)	40.006108
Conductivity (S/m)	1.411651

C. SAR Surface and Volume

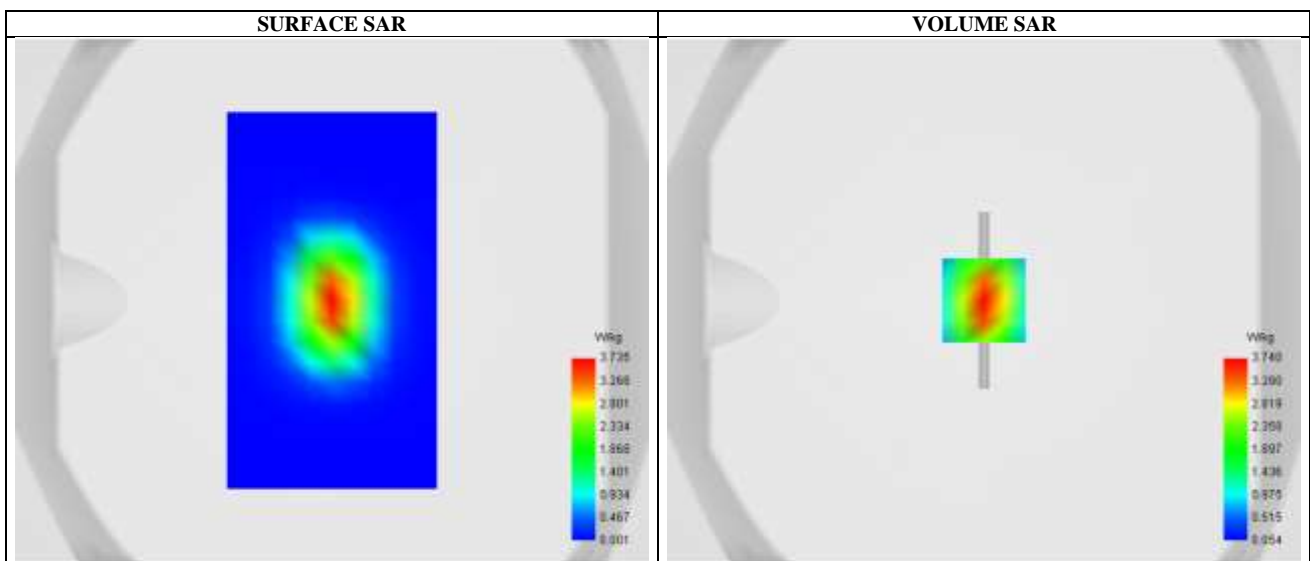


Maximum location: X=0.00, Y=0.00; SAR Peak: 5.59 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	1.915267
SAR 1g (W/Kg)	3.761825
Variation (%)	-1.92000

E. Z Axis Scan

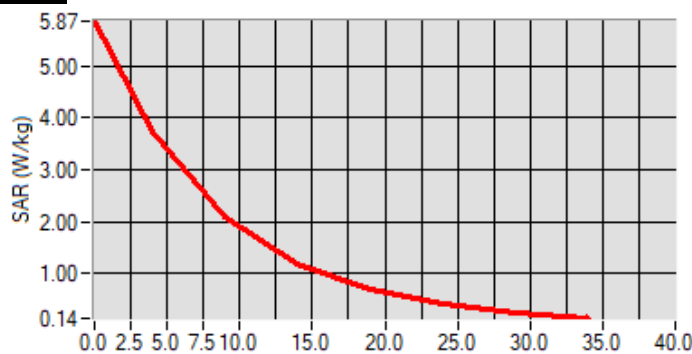

System check at 2450 MHz

Date of measurement: 17/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.23
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.233437
Conductivity (S/m)	1.788145

C. SAR Surface and Volume

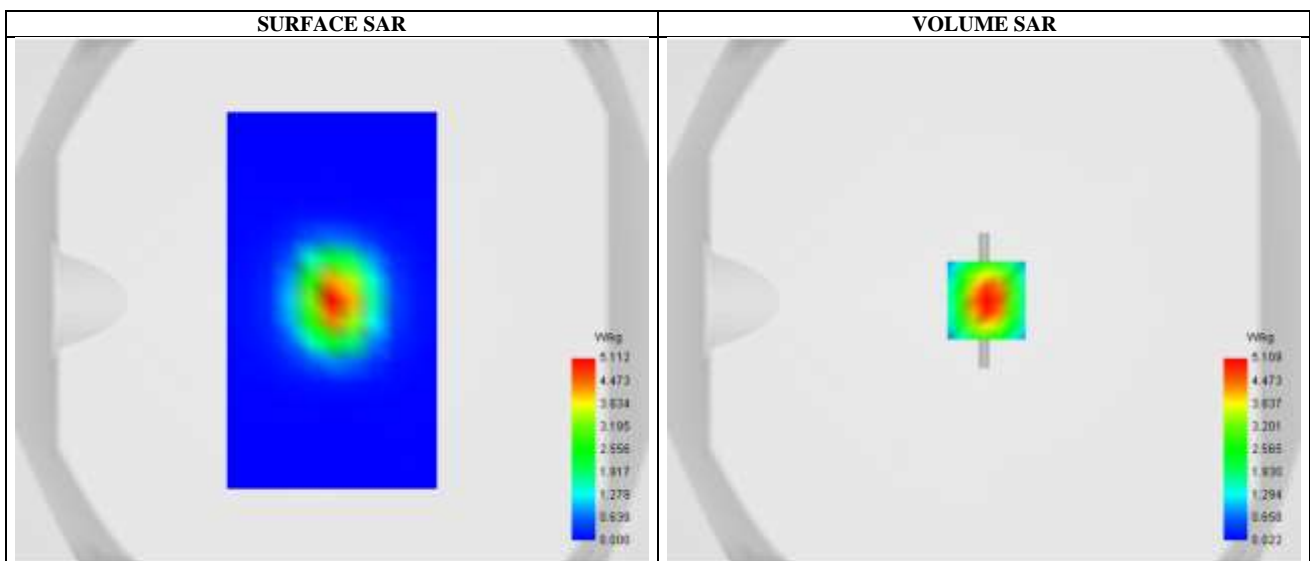


Maximum location: X=1.00, Y=0.00; SAR Peak: 8.53 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.461814
SAR 1g (W/Kg)	5.745305
Variation (%)	-1.110000

E. Z Axis Scan

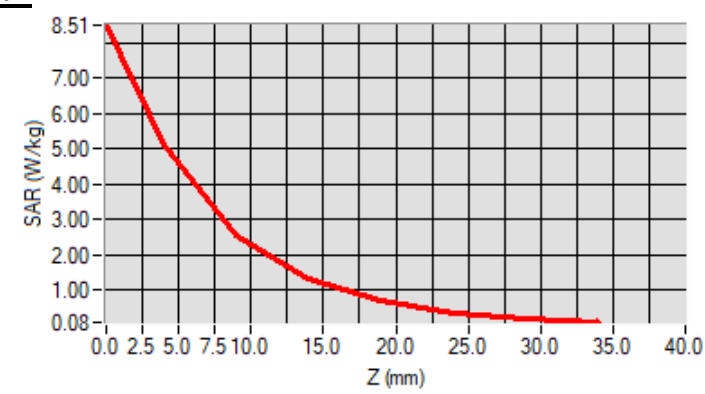

System check at 2600 MHz

Date of measurement: 17/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.15
Area Scan	surf_sam_plan.txt
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	2600.000000
Relative permittivity (real part)	39.117528
Conductivity (S/m)	1.871864

C. SAR Surface and Volume

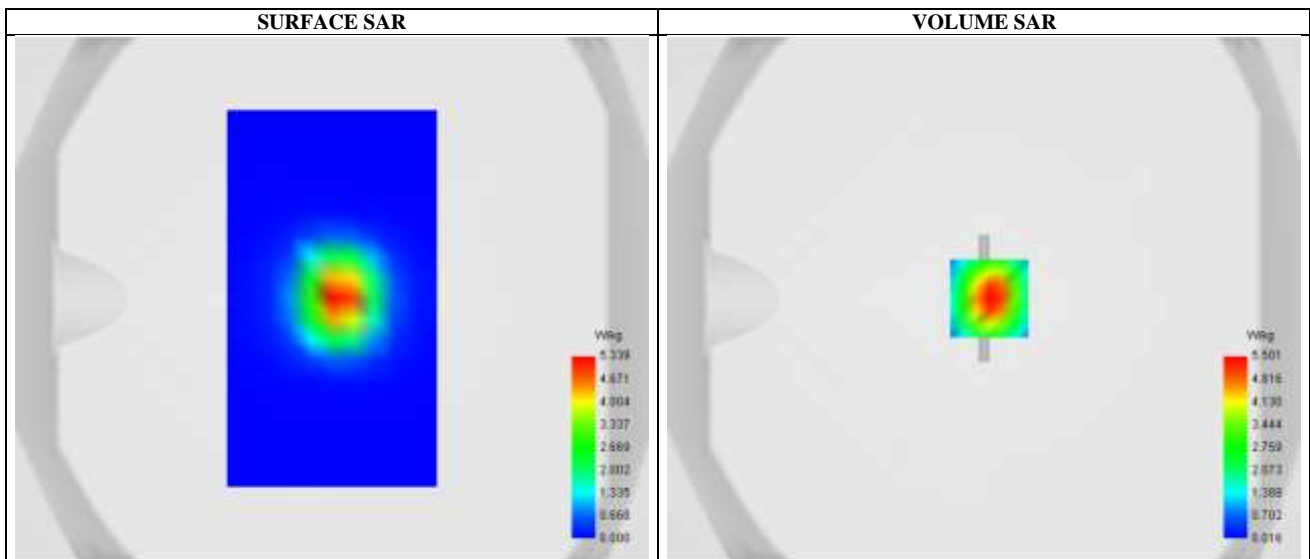


Maximum location: X=2.00, Y=0.00; SAR Peak: 9.58 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.492214
SAR 1g (W/Kg)	5.613451
Variation (%)	-0.120000

E. Z Axis Scan

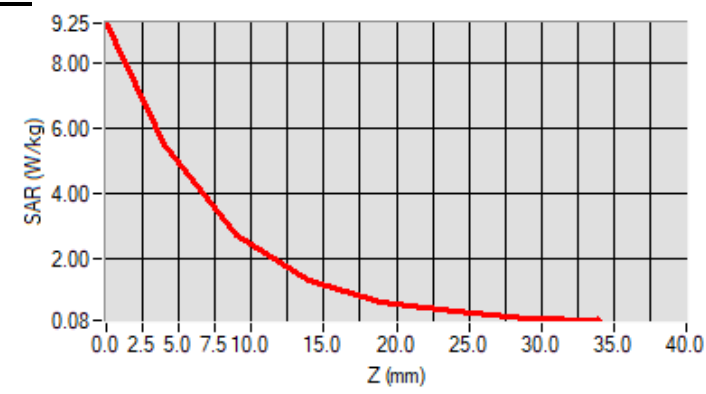

System check at 3300 MHz

Date of measurement: 21/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.02
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW3300
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	3300.000000
Relative permittivity (real part)	38.121341
Conductivity (S/m)	2.761232

C. SAR Surface and Volume

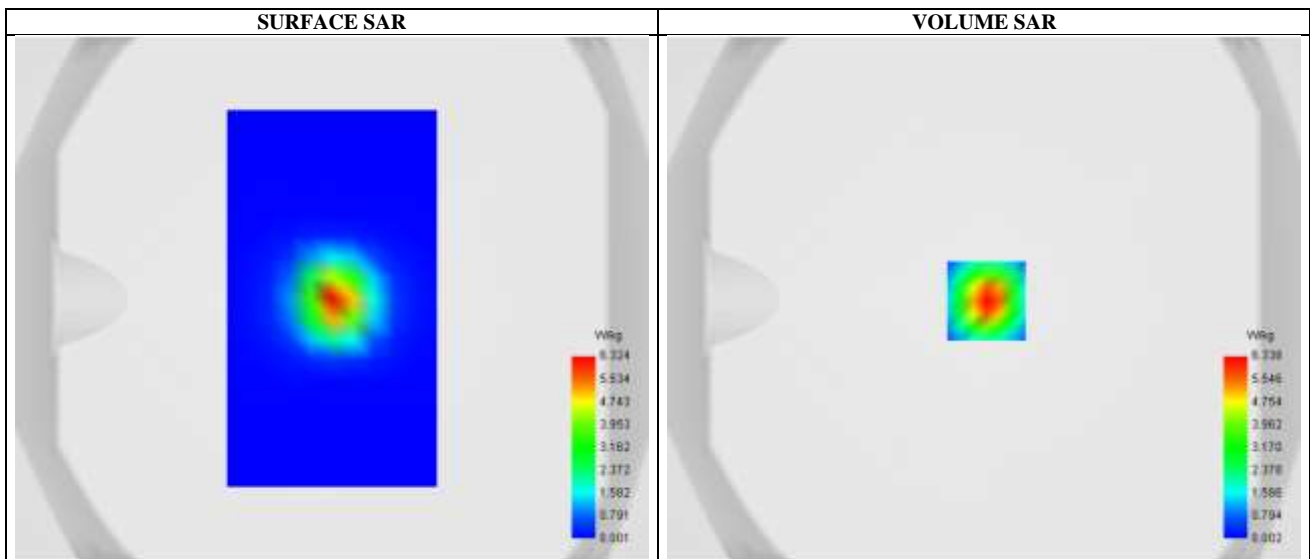


Maximum location: X=0.00, Y=0.00; SAR Peak: 11.68 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.388824
SAR 1g (W/Kg)	6.212745
Variation (%)	-0.170000

E. Z Axis Scan

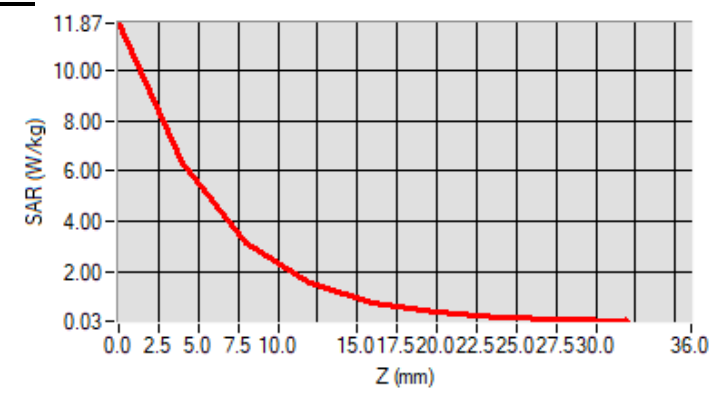

System check at 3500 MHz

Date of measurement: 21/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.11
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW3500
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	3500.000000
Relative permittivity (real part)	37.912553
Conductivity (S/m)	2.916212

C. SAR Surface and Volume

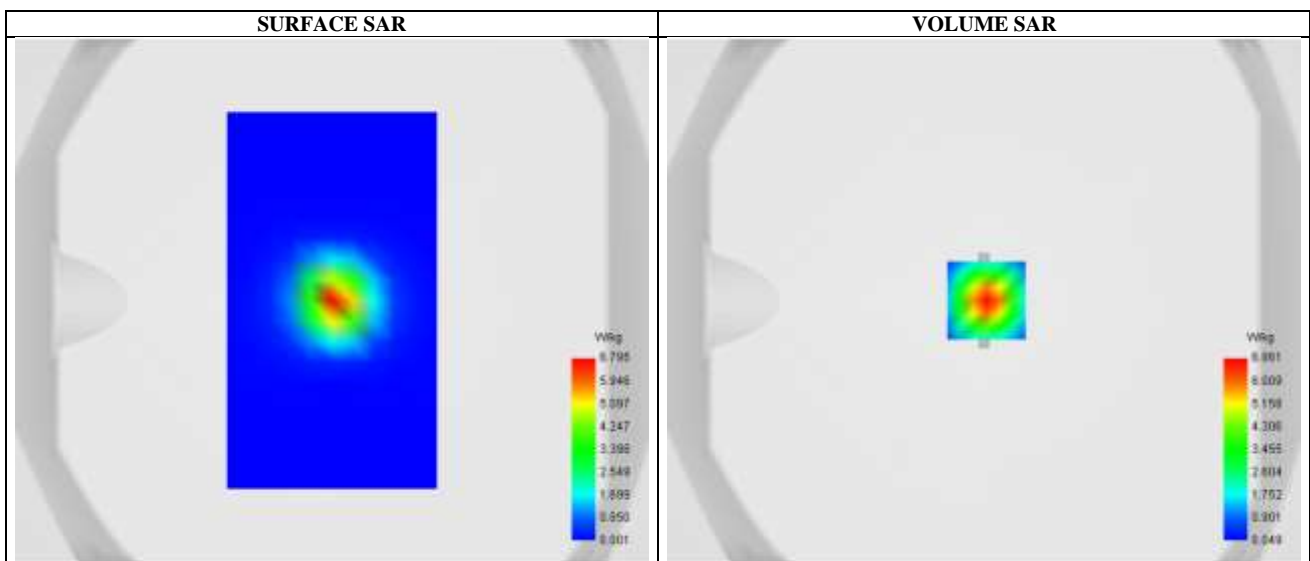


Maximum location: X=0.00, Y=0.00; SAR Peak: 13.81 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.564113
SAR 1g (W/Kg)	6.717334
Variation (%)	-1.340000

E. Z Axis Scan

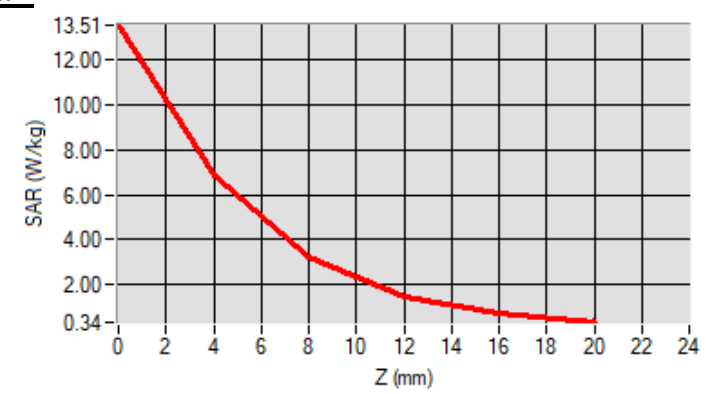

System check at 3700 MHz

Date of measurement: 21/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.13
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW3700
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	3700.000000
Relative permittivity (real part)	37.713556
Conductivity (S/m)	3.121518

C. SAR Surface and Volume

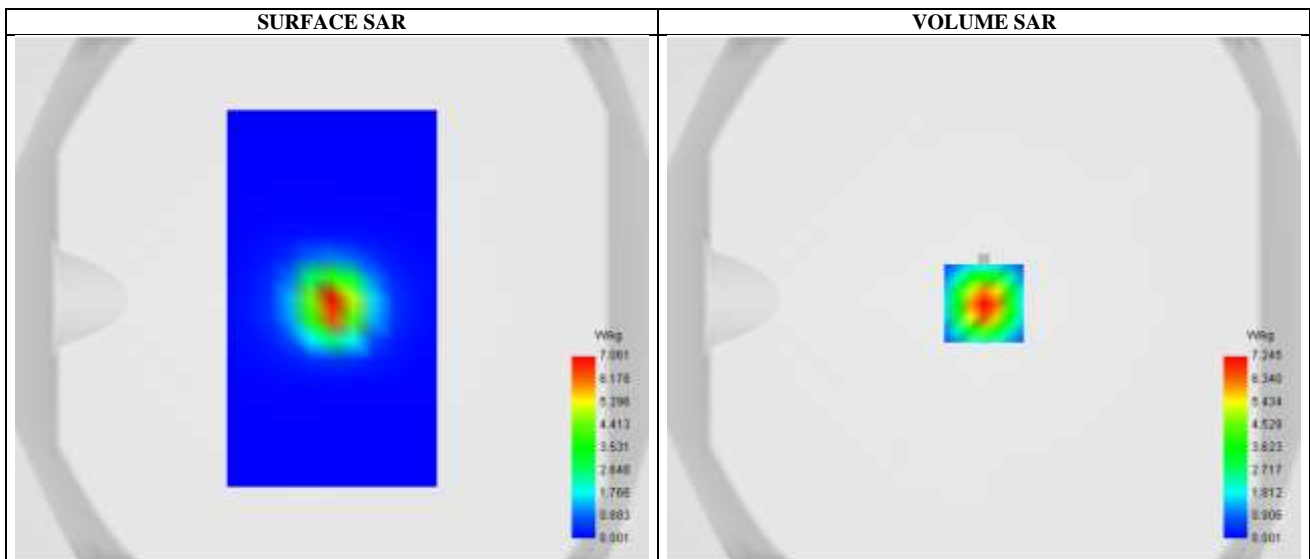


Maximum location: X=0.00, Y=-2.00; SAR Peak: 14.01 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.374948
SAR 1g (W/Kg)	6.354954
Variation (%)	1.510000

E. Z Axis Scan

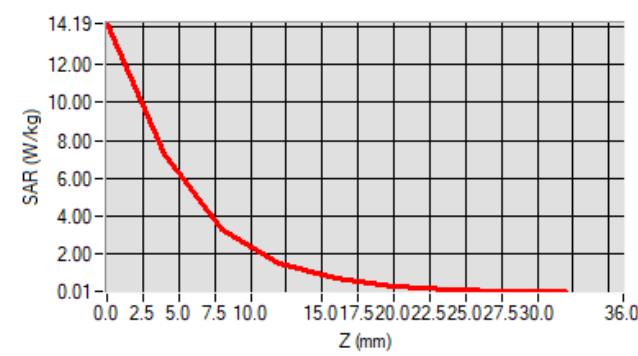

System check at 3900 MHz

Date of measurement: 21/10/2021


A. Experimental conditions.

Probe	SN 18/21 EPGO354
ConvF	2.26
Area Scan	surf_sam_plan.txt
Zoom Scan	7x7x8,dx=5mm dy=5mm dz=4mm,Complete
Phantom	Validation plane
Device Position	Dipole
Band	CW3900
Channels	Middle
Signal	CW (Crest factor: 1.0)

B. Permittivity

Frequency (MHz)	3700.000000
Relative permittivity (real part)	37.053556
Conductivity (S/m)	3.221531

C. SAR Surface and Volume

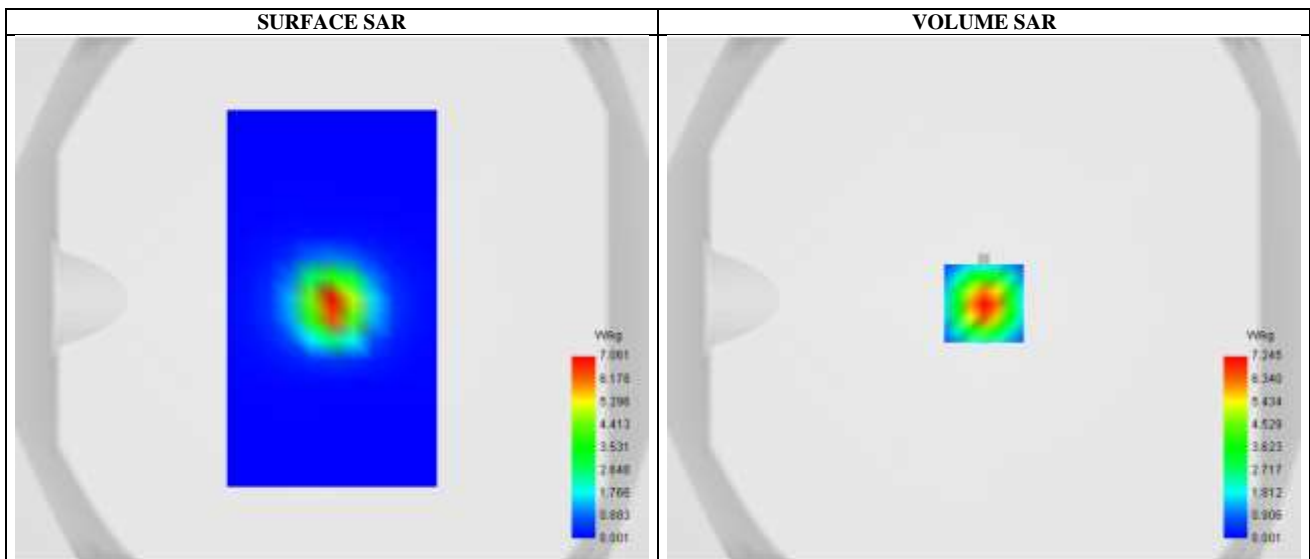

Maximum location: X=0.00, Y=-2.00; SAR Peak: 15.11 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	2.381658
SAR 1g (W/Kg)	6.781584
Variation (%)	2.010000

E. Z Axis Scan

