

Project No.: JYTSZR2206004




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.178	30	Pass
NVNT	BLE	2442	Ant1	-3.723	30	Pass
NVNT	BLE	2480	Ant1	-3.281	30	Pass

Page 1 of 19



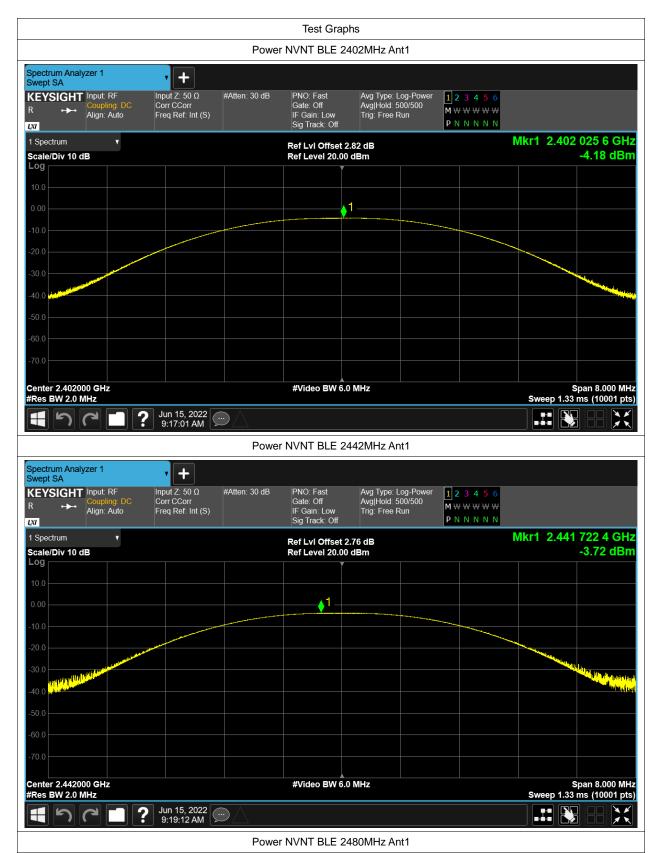









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.658	0.5	Pass
NVNT	BLE	2442	Ant1	0.658	0.5	Pass
NVNT	BLE	2480	Ant1	0.657	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.024214502	
NVNT	BLE	2442	Ant1	1.028066946	
NVNT	BLE	2480	Ant1	1.027627089	

Project No.: JYTSZR2206004














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.744	8	Pass
NVNT	BLE	2442	Ant1	-10.331	8	Pass
NVNT	BLE	2480	Ant1	-9.757	8	Pass







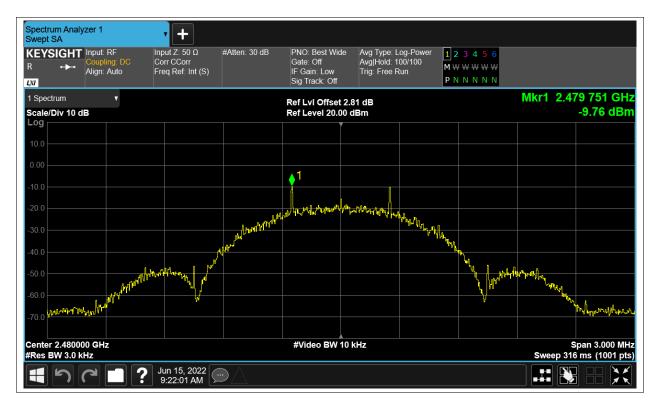







Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-46.12	-20	Pass
NVNT	BLE	2480	Ant1	-47.13	-20	Pass



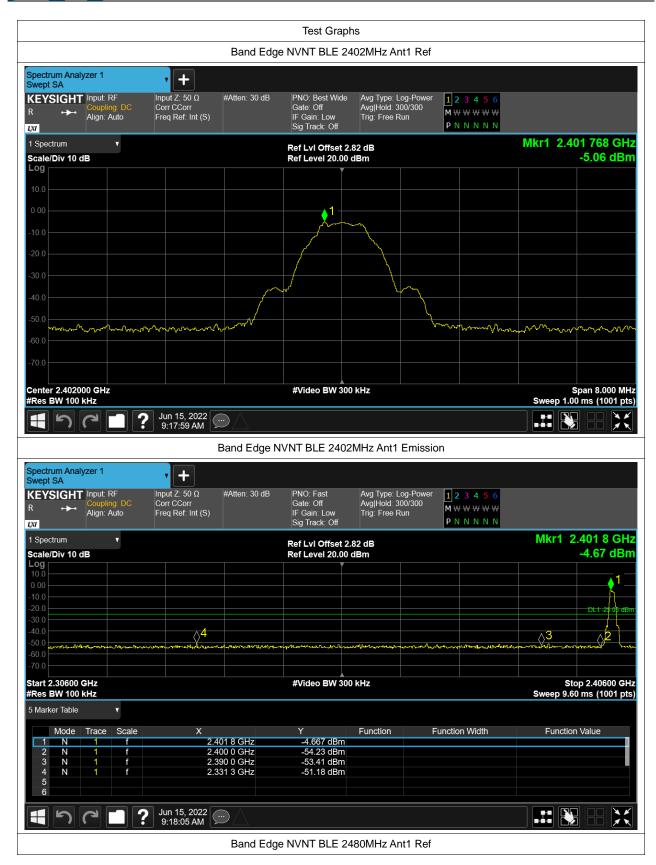



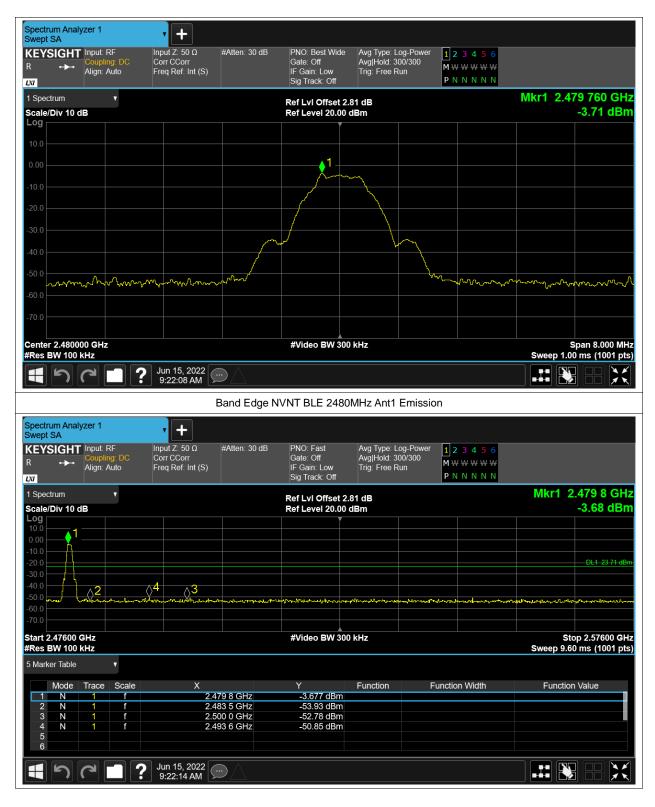





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.38	-20	Pass
NVNT	BLE	2442	Ant1	-32.44	-20	Pass
NVNT	BLE	2480	Ant1	-41.62	-20	Pass







