


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	4.448	30	Pass
NVNT	BLE	2442	Ant12	5.057	30	Pass
NVNT	BLE	2478	Ant12	5.586	30	Pass



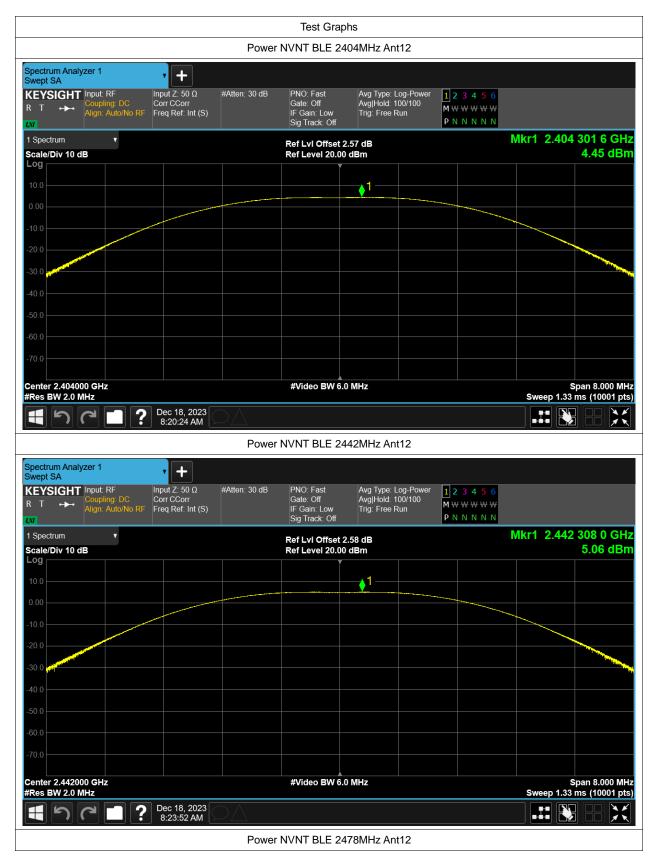



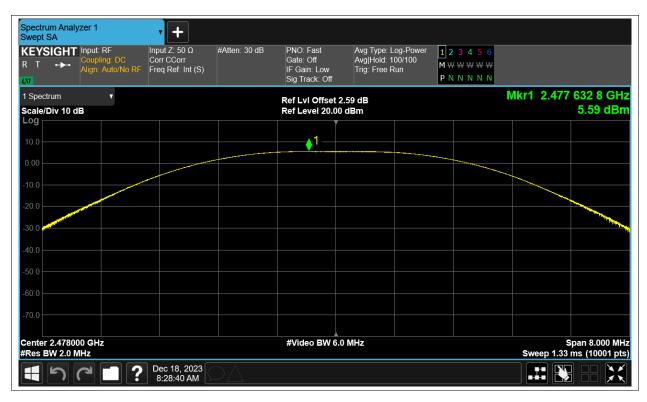



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2404	Ant12	1.143	0.5	Pass
NVNT	BLE	2442	Ant12	1.13	0.5	Pass
NVNT	BLE	2478	Ant12	1.172	0.5	Pass











Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2404	Ant12	2.07	
NVNT	BLE	2442	Ant12	2.075	
NVNT	BLE	2478	Ant12	2.077	












Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2404	Ant12	-12.687	8	Pass
NVNT	BLE	2442	Ant12	-12.139	8	Pass
NVNT	BLE	2478	Ant12	-11.631	8	Pass







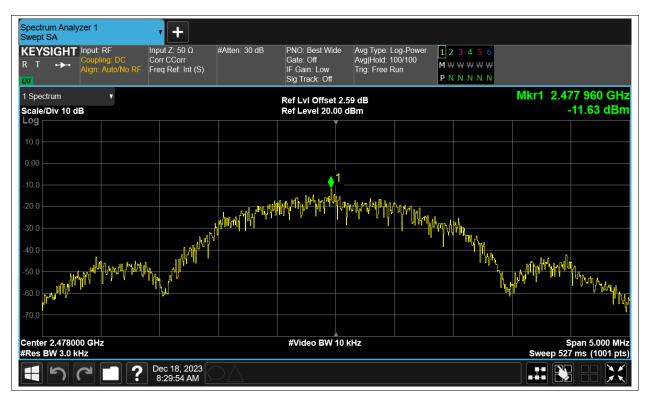



Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-60.53	-20	Pass
NVNT	BLE	2478	Ant12	-60.09	-20	Pass











Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2404	Ant12	-52.58	-20	Pass
NVNT	BLE	2442	Ant12	-52.5	-20	Pass
NVNT	BLE	2478	Ant12	-53.66	-20	Pass



