




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	4.698	30	Pass
NVNT	BLE	2442	Ant12	5.375	30	Pass
NVNT	BLE	2480	Ant12	5.769	30	Pass



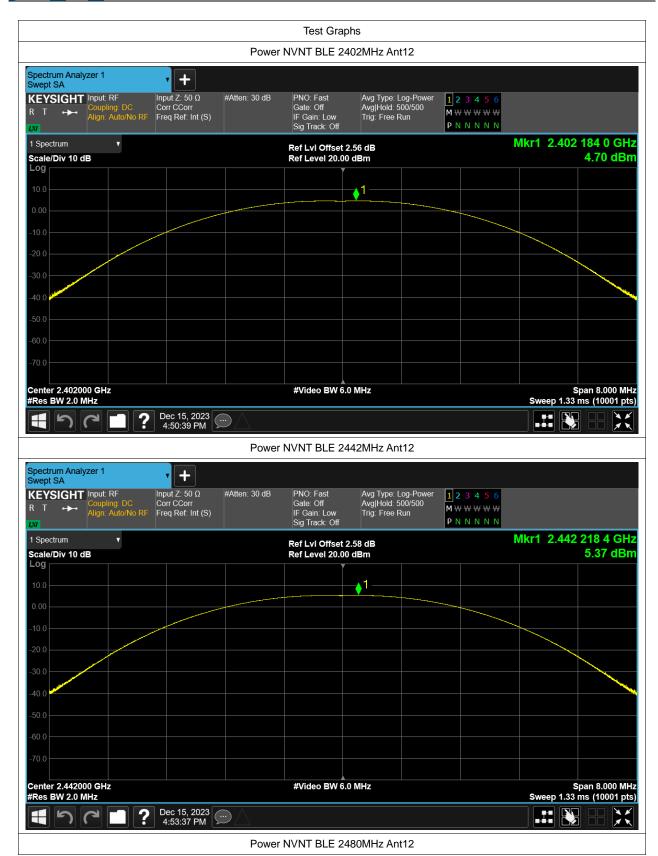









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant12	0.686	0.5	Pass
NVNT	BLE	2442	Ant12	0.687	0.5	Pass
NVNT	BLE	2480	Ant12	0.687	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant12	1.057	
NVNT	BLE	2442	Ant12	1.06	
NVNT	BLE	2480	Ant12	1.058	













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant12	-1.603	8	Pass
NVNT	BLE	2442	Ant12	-0.882	8	Pass
NVNT	BLE	2480	Ant12	-0.517	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-56.97	-20	Pass
NVNT	BLE	2480	Ant12	-57.45	-20	Pass



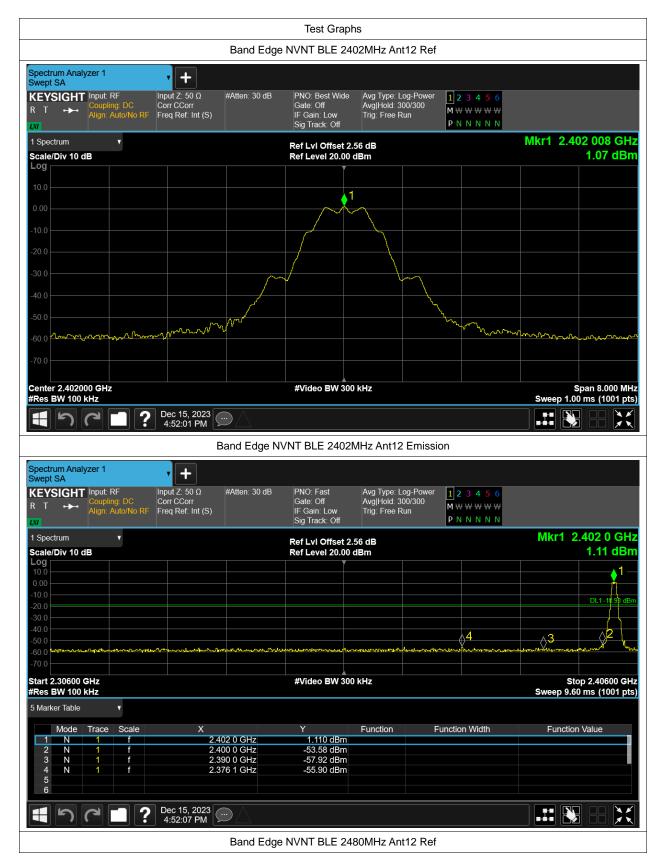



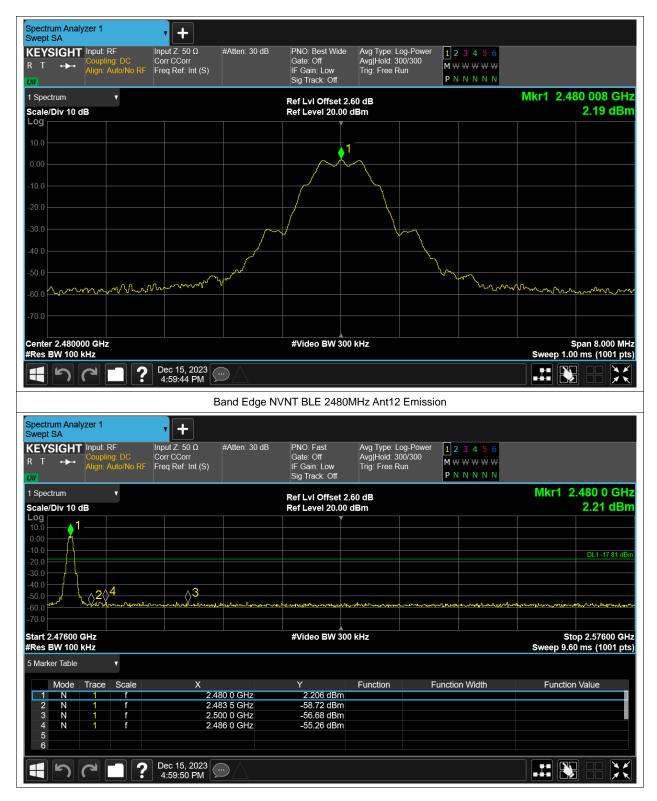





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant12	-50.47	-20	Pass
NVNT	BLE	2442	Ant12	-50.78	-20	Pass
NVNT	BLE	2480	Ant12	-51.25	-20	Pass









Tx. Spurious NVNT BLE 2480MHz Ant12 Ref



