

FCC SAR Compliance Test Report

For

TECNO MOBILE LIMITED

ROOMS 05-15, 13A/F., SOUTH TOWER,

WORLD FINANCE CENTRE, HARBOUR CITY, 17 CANTON ROAD, TSIM SHA TSUI,

KOWLOON, HONG KONG

Model: N2

Test Engineer: Stars Liang

Report Number: FCC16073807-6

Report Date: 2016-08-04

FCC ID: 2ADYY-N2

Check By: Hank Huang



Approved By: Michal Ling



Prepared By:

QTC Certification & Testing Co., Ltd.
2nd Floor, BI Building, Fengyeyuan Industrial Plant,,
Liuxian 2st. Road, Xin'an Street, Bao'an
District, Shenzhen, 518000
Tel: +86-755-26996144 EXT:8164
Fax: +86-755-26996253

Table of contents

1 General information4

1.1 Notes4

1.2 Application details4

1.3 Statement of Compliance.....5

1.4 EUT Information6

2 Testing laboratory7

3 Test Environment7

4 Applicant and Manufacturer7

5 Test standard/s:.....8

5.1 RF exposure limits.....9

5.2 SAR Definition9

6 SAR Measurement System10

6.1 The Measurement System10

6.2 Robot.....11

6.4 Probe11

6.5 Measurement procedure12

6.6 Description of interpolation/extrapolation scheme.....12

6.7 Phantom.....13

6.8 Device Holder14

6.9 Video Positioning System.....15

6.10 Tissue simulating liquids: dielectric properties16

6.11 Tissue simulating liquids: parameters17

7 System Check.....18

7.1 System check procedure18

7.2 System check results19

8 SAR Test Test Configuration20

8.1 GSM Test Configurations.....20

8.2 Wi-Fi Test Configuration20

9 Detailed Test Results.....21

- 9.1 Conducted Power measurements21
 - 9.1.1 Conducted Power of GSM850.....21
 - 9.1.2 Conducted Power of GSM1900.....22
 - 9.1.3 Conducted Power of UMTS Band II.....23
 - 9.1.4 Conducted Power of UMTS Band V24
 - 9.1.5 Conducted Power of Wi-Fi 2.4G25
 - 9.1.6 Conducted Power of BT25
- 9.2 SAR test results26
 - 9.2.1 Results overview of GSM850.....27
 - 9.2.2 Results overview of GSM1900.....29
 - 9.2.3 Results overview of Wi-Fi 2.4G31
 - 9.2.4 Results overview of UMTS Band II.....32
 - 9.2.5 Results overview of UMTS Band V33
- 10 Multiple Transmitter Information.....34
 - 10.1.1 Stand-alone SAR test exclusion.....35
 - 10.1.2 Simultaneous Transmission Possibilities.....36
 - 10.1.3 SAR Summation Scenario37
- 11 Measurement uncertainty evaluation41
 - 11.1 Measurement uncertainty evaluation for SAR test41
 - 11.2 Measurement uncertainty evaluation for system check.....42
- 12 Test equipment and ancillaries used for tests43
- Annex A: System performance verification.....44
- Annex B: Measurement results.....44
- Annex C: Calibration reports44
- Annex D: Photo documentation.....45

Modified History

REV.	Modification Description	Issued Date	Remark
REV.1.0	Initial Test Report Release	2016-08-04	Hank Huang
REV.1.0	Modify attachments and report issues	2016-08-19	Hank Huang

1 General information**1.1 Notes**

The test results of this test report relate exclusively to the test item specified in this test report. Shenzhen Timeway Testing Laboratories does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report is not to be reproduced or published in full without the prior written permission.

1.2 Application details

Date of receipt of test item: 2016-07-14
Start of test: 2016-07-16
End of test: 2016-07-20

1.3 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for N2 is as below:

Band	Position	MAX Reported SAR _{1g} (W/kg)
GSM850	Head	0.773
	Body 10mm	0.761
	Hotspot 10mm	0.603
GSM1900	Head	0.087
	Body 10mm	0.385
	Hotspot 10mm	0.396
UMTS Band II	Head	0.133
	Body 10mm	0.586
	Hotspot 10mm	0.570
UMTS Band V	Head	0.564
	Body 10mm	0.754
	Hotspot 10mm	0.710
Wi-Fi 2450	Head	0.705
	Body 10mm	0.063
	Hotspot 10mm	0.068
The highest simultaneous SAR is 1.124W/kg per KDB690783 D01		

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:2005, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.4 EUT Information

Device Information:			
Product Type:	Mobile Phone		
Model:	N2		
Device Type:	Portable device		
Exposure Category:	uncontrolled environment / general population		
Production Unit or Identical Prototype:	Production Unit		
Software version:	D2030_TECNO_M_CO_E1_V0.1.2_S0712		
Hardware version :	V1.1		
Antenna Type :	Internal Antenna		
Device Operating Configurations:			
Supporting Mode(s) :	GSM850/1900, UMTS Band II /V,Wi-Fi , BT		
Modulation:	GMSK,QPSK/16QAM, OFDM/CCK, GFSK/π/4-DQPSK/ 8-DPSK		
Device Class :	Class B, No DTM Mode		
Operating Frequency Range(s)	Band	TX(MHz)	RX(MHz)
	GSM850	824~849	869~894
	GSM1900	1850~1910	1930~1990
	UMTS Band II	1850~1910	1930~1990
	UMTS Band V	824~840	869~894
	Wi-Fi	2412~2462	2412~2462
	BT	2402~2480	2402~2480
GPRS class level:	GPRS class 12		
Test Channels (low-mid-high):	128-190-251(GSM850)		
	512-661-810(GSM1900)		
	9262-9400-9538(UMTS Band II)		
	4132-4182-4233(UMTS Band V)		
	1-6-11 (Wi-Fi)		
	0-39-78(BT)		
Power Source:	3.8 VDC/1800mAh Rechargeable Battery		

2 Testing laboratory

Test Site	QTC Certification & Testing Co., Ltd.
Test Location	2nd Floor, BI Building, Fengyeyuan Industrial Plant,, Liuxian 2st. Road, Xin'an Street, Bao'an District,, Shenzhen, 518000
Telephone	+86-755-26996144 EXT:8164
Fax	+86-755-26996253

3 Test Environment

	Required	Actual
Ambient temperature:	18 – 25 °C	22 ± 2 °C
Tissue Simulating liquid:	22 ± 2 °C	22 ± 2 °C
Relative humidity content:	30 – 70 %	30 – 70 %

4 Applicant and Manufacturer

Applicant/Client Name:	TECNO MOBILE LIMITED
Applicant Address:	ROOMS 05-15, 13A/F, SOUTH TOWER, WORLD FINANCE CENTRE, HARBOUR CITY, 17 CANTON ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG
Manufacturer Name:	SHENZHEN TECNO TECHNOLOGY CO.,LTD.
Manufacturer Address:	1-4th Floor, 3rd Building, Pacific Industrial Park, No.2088, Shenyang Road, Yantian District, Shenzhen, Guangdong, China

5 Test standard/s:

ANSI Std C95.1-2005	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 March 2015)
KDB447498	General RF Exposure Guidance v06
KDB648474	Head set SAR v01r03
KDB941225	Hot Spot SAR V01r01
KDB248227	SAR meas for 802.11 a/b/g v01r02
KDB865664	SAR Measurement 100 MHz to 6 GHz v01r04
KDB865664	RF Exposure Reporting v01r02

5.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Head s/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

The limit applied in this test report is shown in bold letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

5.2 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

6 SAR Measurement System

6.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Device holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


6.2 Robot

The COMOSAR system uses the high precision robots KR 6 R900 sixx type out of the newer series from Satimo SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used. The KR 6 R900 sixx robot series have many features that are important for

our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

6.3 Data Acquisition Electronics (DAE)

Model	SATIMO SUPR72	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with test system. Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV	
Input Offset Voltage	< 5uV	
Input Bias Current	< 50 fA	

6.4 Probe

For the measurements the Specific Dosimetric E-Field Probe SSE 5 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.5mm
- Distance between sensor center and the inner phantom surface: 4 mm
(repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 300 to 2600MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

6.5 Measurement procedure

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors can not directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

6.6 Description of interpolation/extrapolation scheme

- The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.
- An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.
- The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR average over 10 grams and 1 gram requires a very fine resolution in the three-dimensional scanned data array.

6.7 Phantom


For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.



System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

6.8 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

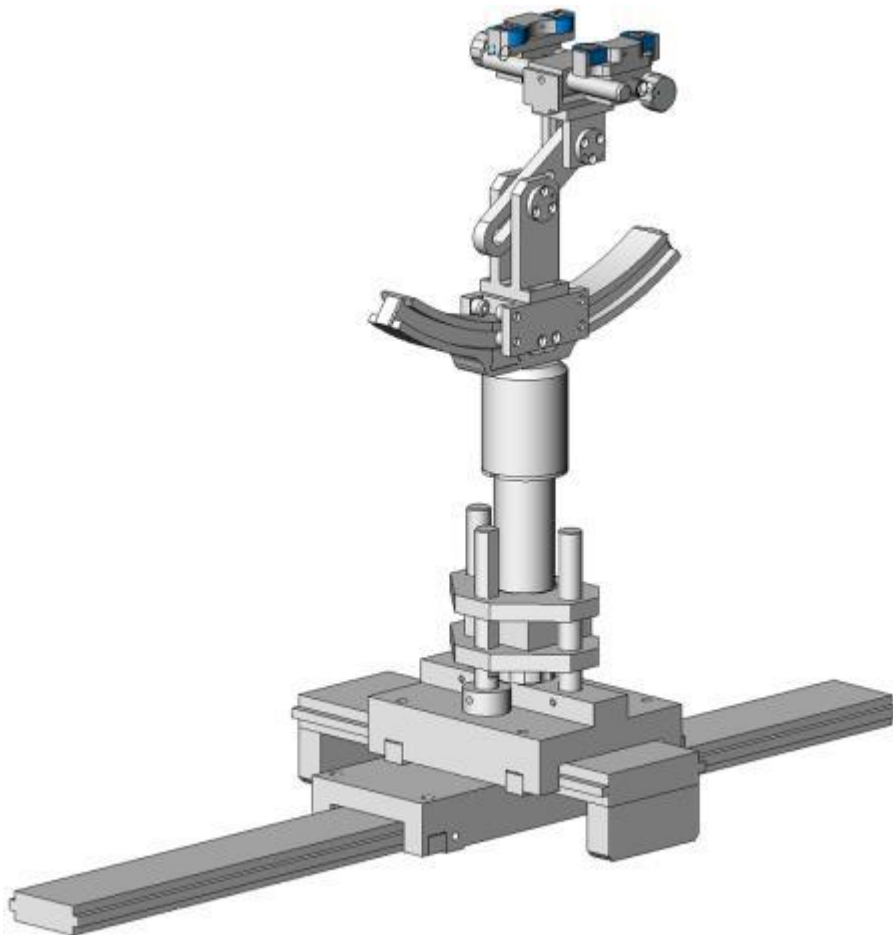

Device holder

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

6.9 Video Positioning System

- The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.
- During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.
- The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



6.10 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(Liquids used for tests are marked with☒):

Ingredients(% of weight)	Frequency (MHz)				
frequency band	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450
Tissue Type	Head	Head	Head	Head	Head
Water	38.56	41.45	52.64	55.242	62.7
Salt (NaCl)	3.95	1.45	0.36	0.306	0.5
Sugar	56.32	56.0	0.0	0.0	0.0
HEC	0.98	1.0	0.0	0.0	0.0
Bactericide	0.19	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	36.8
DGBE	0.0	0.0	47.0	44.542	0.0
Ingredients(% of weight)	Frequency (MHz)				
frequency band	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input checked="" type="checkbox"/> 2450
Tissue Type	Body	Body	Body	Body	Body
Water	51.16	52.4	69.91	69.91	73.2
Salt (NaCl)	1.49	1.40	0.13	0.13	0.04
Sugar	46.78	45.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

6.11 Tissue simulating liquids: parameters

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835MHz Head	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	41.51	0.89	21.6°C	2016-7-16
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	41.50	0.90		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.97)	41.35	0.92		
835MHz Body	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.26	0.95	21.6°C	2016-7-16
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	55.25	0.97		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	55.10	0.99		
1900MHz Head	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.79	1.41	21.6°C	2016-7-18
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.09	1.39		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.73	1.41		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.40	1.43		
1900MHz Body	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.22	1.52	21.6°C	2016-7-18
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.54	1.51		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.15	1.53		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	53.86	1.55		
2450MHz Head	2410	39.30 (37.34~41.26)	1.76 (1.67~1.85)	39.49	1.77	21.6°C	2016-7-20
	2435	39.20 (37.24~41.16)	1.79 (1.70~1.88)	39.32	1.79		
	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.29	1.80		
	2460	39.20 (37.24~41.16)	1.81 (1.72~1.90)	39.29	1.81		
2450MHz Body	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	53.00	1.92	21.6°C	2016-7-20
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	52.78	1.94		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	52.74	1.95		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	52.78	1.96		


ϵ_r = Relative permittivity, σ = Conductivity

7 System Check

7.1 System check procedure

The System check is performed by using a System check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the System check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

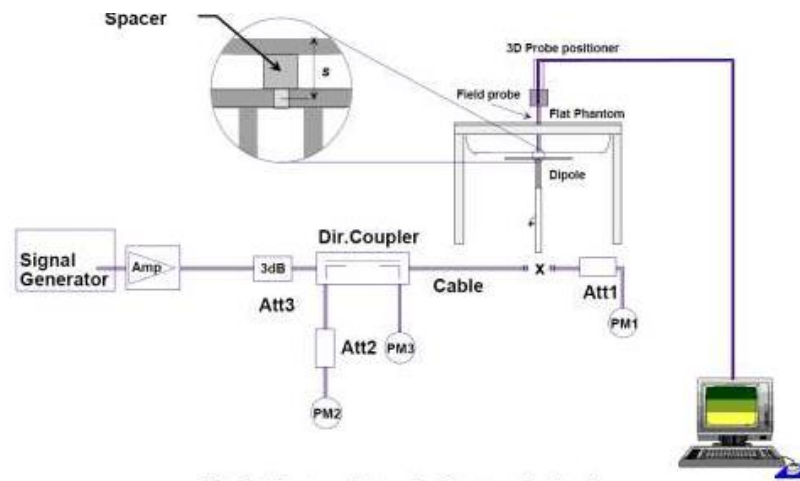

7.2 System check results

The system Check is performed for verifying the accuracy of the complete measurement system and performance of the software. The following table shows System check results for all frequency bands and tissue liquids used during the tests (plot(s) see annex A).

System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Head	9.56 (8.60~10.52)	6.19 (5.57~6.81)	9.135	5.912	21.6°C	2016-7-16
D1900V2 Head	39.46 (35.51~43.41)	20.42 (18.38~22.46)	41.144	20.622	21.6°C	2016-7-18
D2450V2 Head	53.08 (47.77~58.39)	23.79 (21.41~26.17)	52.417	23.793	21.6°C	2016-7-20
D835V2 Body	9.86 (8.87~10.85)	6.38 (5.74~7.02)	9.607	6.227	21.6°C	2016-7-16
D1900V2 Body	40.06 (36.05~44.07)	20.76 (18.68~22.84)	42.785	21.447	21.6°C	2016-7-18
D2450V2 Body	54.76 (49.28~60.24)	24.47 (22.02~26.92)	56.439	25.762	21.6°C	2016-7-20

Note: All SAR values are normalized to 1W forward power.

8 SAR Test Test Configuration

8.1 GSM Test Configurations

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

8.2 Wi-Fi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for Wi-Fi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1 ,6 and 11 respectively in the case of 2450 MHz.During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. 802.11b/g operating modes are tested independently according to the service requirements in each frquency band. 802.11b/g modes are tested on channel 1, 6, 11; however,if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	“Default Test Channels”	
				802.11b	802.11g
802.11b/g	2.4 GHz	2412	1#	√	Δ
		2437	6	√	Δ
		2462	11#	√	Δ

Notes:

√ = “default test channels”

Δ= possible 802.11g channels with maximum average output ¼ dB the “default test channels”

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

9 Detailed Test Results

9.1 Conducted Power measurements

The output power was measured using an integrated RF connector and attached RF cable.

9.1.1 Conducted Power of GSM850

GSM850(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		33.14	33.20	33.26	-9.03	24.11	24.17	24.23
GPRS (GMSK)	32.55	32.58	32.62	-9.03	23.52	23.55	23.59	24.31
	31.15	31.19	31.24	-6.02	25.13	25.17	25.22	26.39
	30.48	30.51	30.53	-4.26	26.22	26.25	26.27	26.25
	29.90	29.89	29.88	-3.01	26.89	26.88	26.87	26.67
EGPRS (8-PSK)	29.29	29.32	29.35	-9.03	20.26	20.29	20.32	22.39
	28.03	28.10	28.15	-6.02	22.01	22.08	22.13	24.35
	26.19	26.24	26.35	-4.26	21.93	21.98	22.09	24.06
	25.68	25.83	25.63	-3.01	22.67	22.82	22.62	24.55

GSM850(SIM2)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GSM(CS)		33.20	33.37	33.38	-9.03	24.17	24.34	24.35
GPRS (GMSK)	1 Tx Slot	33.26	33.31	33.42	-9.03	24.23	24.28	24.39
	2 Tx Slots	32.18	32.33	32.37	-6.02	26.16	26.31	26.35
	3 Tx Slots	30.31	30.46	30.32	-4.26	26.05	26.20	26.06
	4 Tx Slots	29.70	29.58	29.56	-3.01	26.69	26.57	26.55
EGPRS (8-PSK)	1 Tx Slot	31.26	31.31	31.42	-9.03	22.23	22.28	22.39
	2 Tx Slots	30.18	30.33	30.37	-6.02	24.16	24.31	24.35
	3 Tx Slots	28.31	28.46	28.32	-4.26	24.05	24.2	24.06
	4 Tx Slots	27.7	27.58	27.56	-3.01	24.69	24.57	24.55

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Source Based time Average Power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) The bolded GPRS 4Tx slots mode was selected for SAR testing according to the highest Source Based time Average Power table.

4) channel /Frequency: 128/824.2; 190/836.6; 251/848.8

5) For Dual SIM Operation, when the power deviation of SIM1 and SIM2 is not more than 0.5dB, which tested SIM1 mode first, and then tested SIM2 mode at the worst position from SIM1 mode.

9.1.2 Conducted Power of GSM1900

GSM1900(SIM1)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		30.31	29.67	29.10	-9.03	21.28	20.64	20.07
GPRS (GMSK)	29.89	28.96	28.22	-9.03	20.86	19.93	19.19	21.46
	28.45	28.06	27.71	-6.02	22.43	22.04	21.69	23.25
	27.79	27.54	27.13	-4.26	23.53	23.28	22.87	22.93
	27.18	26.58	26.53	-3.01	24.17	23.57	23.52	23.42
EGPRS (8-PSK)	26.75	26.00	26.03	-9.03	17.72	16.97	17.00	21.46
	26.15	25.36	25.43	-6.02	20.13	19.34	19.41	23.25
	25.03	24.98	25.16	-4.26	20.77	20.72	20.90	22.93
	24.45	24.27	24.87	-3.01	21.44	21.26	21.86	23.42

GSM1900(SIM2)		Burst-Averaged output Power (dBm)			Division Factors	Source Based time Average Power(dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM(CS)		30.54	30.50	30.36	-9.03	21.51	21.47	21.33
GPRS (GMSK)	1 Tx Slot	30.67	30.47	30.50	-9.03	21.64	21.44	21.47
	2 Tx Slots	29.34	29.42	29.23	-6.02	23.32	23.40	23.21
	3 Tx Slots	27.33	27.24	27.24	-4.26	23.07	22.98	22.98
	4 Tx Slots	26.49	26.57	26.61	-3.01	23.48	23.56	23.60
EGPRS (8-PSK)	1 Tx Slot	30.61	30.47	30.49	-9.03	21.58	21.44	21.46
	2 Tx Slots	29.39	29.38	29.27	-6.02	23.37	23.36	23.25
	3 Tx Slots	27.34	27.18	27.19	-4.26	23.08	22.92	22.93
	4 Tx Slots	26.49	26.59	26.43	-3.01	23.48	23.58	23.42

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Source Based time Average Power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3)The bolded GPRS 4Tx slots mode was selected for SAR testing according the highest Source Based time Average Power table.

4) channel /Frequency: 512/1850.2; 661/1880; 810/1909.8

5) For Dual SIM Operation, when the power of deviation of SIM1 and SIM2 not more than 0.5dB, which tested SIM1 mode first,and then tested SIM2 mode at the worst position from SIM1 mode .

9.1.3 Conducted Power of UMTS Band II

UMTS Band I		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	22.68	20.90	21.25
HSDPA	Subtest 1	22.90	20.71	21.73
	Subtest 2	22.91	20.87	21.96
	Subtest 3	22.24	20.58	21.16
	Subtest 4	22.89	20.46	21.76
HSUPA	Subtest 1	22.09	20.99	21.01
	Subtest 2	22.51	20.62	21.03
	Subtest 3	22.45	20.36	21.42
	Subtest 4	22.95	20.81	21.77
	Subtest 5	22.05	20.53	21.48

Note: 1) channel /Frequency: 9262/1852.4, 9400/1880, 9538/1907.6

9.1.4 Conducted Power of UMTS Band V

UMTS Band I		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.08	22.52	22.56
HSDPA	Subtest 1	22.79	22.49	22.65
	Subtest 2	22.70	22.80	22.88
	Subtest 3	22.13	22.47	22.96
	Subtest 4	22.84	22.45	22.53
HSUPA	Subtest 1	22.98	22.82	22.89
	Subtest 2	22.31	22.48	22.87
	Subtest 3	22.24	22.17	22.39
	Subtest 4	22.76	22.72	22.77
	Subtest 5	21.91	22.47	22.34

Note: 1) channel /Frequency: 4132/826.4, 4182/836.4, 4233/846.6

9.1.5 Conducted Power of Wi-Fi 2.4G

Wi-Fi 2450MHz	Channel	Average Power (dBm) for Data Rates (Mbps)							
		1	2	5.5	11	/	/	/	/
802.11b	1	14.21	14.26	14.22	14.08	/	/	/	/
	6	14.29	14.32	14.36	14.12	/	/	/	/
	11	14.27	14.37	12.32	14.13	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	1	12.88	12.85	12.94	12.92	12.85	12.96	12.89	12.92
	6	12.832	12.92	13.02	13.04	12.91	12.98	12.94	12.98
	11	13.03	13.09	13.04	13.14	13.10	12.09	12.99	13.13
802.11n (20M)	Channel	6.5	13	19.5	26	39	52	58.5	65
	1	12.93	13.01	13.05	13.11	12.98	13.08	13.10	12.99
	6	13.17	13.25	13.21	13.17	13.07	13.14	13.27	13.11
	11	13.17	13.22	13.34	13.21	13.12	13.28	13.26	13.31

Note:

1. The Average conducted power of Wi-Fi is measured with RMS detector.
2. Per KDB248227, For each frequency band, Testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.
- 3) channel /Frequency:1/2412,3/2422,6/2437,9/2452,11/2462,

9.1.6 Conducted Power of BT

The maximum output power of BT is:

BT	Average Conducted Power (dBm)		
	0CH	39CH	78CH
	2.29	3.29	2.81

Note: 1) channel /Frequency:0/2402,39/2441,78/2480.

9.2 SAR test results

Notes:

1) Per KDB447498 D01v05 r02, the SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the scaled SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit ($< 0.8 \text{ W/kg}$), testing at the high and low channels is optional.

2) Per KDB447498 D01v05r02, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: $\leq 0.8 \text{ W/kg}$ or 2.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\leq 100 \text{ MHz}$. When the maximum output power variation across the required test channels is $> \frac{1}{2} \text{ dB}$, instead of the middle channel, the highest output power channel must be used.

3) Per KDB447498 D01v05r02, All measurement SAR result is scaled-up to account for tune-up tolerance is compliant.

4) Per KDB648474 D04v01r02, body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn with headset SAR.

5) Per KDB248227 D01v01r02, the procedures required to establish specific device operating configurations for testing the SAR of 802.11 a/b/g transmitters.

6) Per KDB865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8 \text{ W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45 \text{ W/Kg}$, only one repeated measurement is required.

7) Per KDB865664 D02v01r01, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5 \text{ W/kg}$, or $> 7.0 \text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing (Refer to appendix B for details).

8) Per KDB941225 D06v01r01, the DUT Dimension is bigger than $9 \text{ cm} \times 5 \text{ cm}$, so 10 mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5 cm , such position does not need to be tested.

9.2.1 Results overview of GSM850

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
SIM1 Card Slot									
Left Head Touched	190/836.6	GSM	0.641	0.430	1.180	31.940	32.000	0.650	4.93
Left Head Tilted 15°	190/836.6	GSM	0.326	0.228	1.320	31.940	32.000	0.331	4.93
Right Head Touched	190/836.6	GSM	0.695	0.482	0.000	31.940	32.000	0.705	4.93
Right Head Tilted 15°	190/836.6	GSM	0.303	0.207	3.150	31.940	32.000	0.307	4.93
Right Head Touched	128/824.2	GSM	0.588	0.399	0.520	31.940	32.000	0.596	4.93
Right Head Touched	251/848.8	GSM	0.727	0.502	1.840	31.940	32.000	0.737	4.93
SIM2 Card Slot									
Right Head Touched	251/848.8	GSM	0.762	0.548	1.370	31.940	32.000	0.773	4.93
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
SIM1 Card Slot									
Towards Phantom	190/836.6	GPRS 4TS	0.504	0.373	1.390	29.490	30.000	0.567	5.07
Towards Ground	190/836.6	GPRS 4TS	0.565	0.391	-2.520	29.490	30.000	0.635	5.07
Towards Ground	128/824.2	GPRS 4TS	0.507	0.369	-3.830	29.490	30.000	0.570	5.07
Towards Ground	251/848.8	GPRS 4TS	0.545	0.398	3.320	29.490	30.000	0.613	5.07
Towards Ground	190/836.6	EDGE 4TS	0.137	0.084	-1.850	29.490	30.000	0.154	5.07
Towards Ground with Headset	190/836.6	GSM	0.751	0.484	-2.620	31.940	32.000	0.761	5.07
SIM2 Card Slot									
Towards Ground with Headset	190/836.6	GSM	0.512	0.375	1.230	29.490	30.000	0.576	5.07
SAR Results for Hotspot Exposure Condition									
Towards Phantom	190/836.6	GPRS 4TS	0.511	0.366	4.550	29.490	30.000	0.575	5.07
Towards Ground	190/836.6	GPRS 4TS	0.536	0.383	-1.33	29.490	30.000	0.603	5.07
Towards Ground	128/824.2	GPRS 4TS	0.512	0.372	-2.660	29.490	30.000	0.576	5.07

Towards Ground	251/848.8	GPRS 4TS	0.523	0.387	-1.890	29.490	30.000	0.588	5.07
Right Side	190/836.6	GPRS 4TS	0.093	0.235	0.780	29.490	30.000	0.105	5.07
Bottom Side	190/836.6	GPRS 4TS	0.430	0.143	-0.320	29.490	30.000	0.613	5.07

9.2.2 Results overview of GSM1900

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
SIM1 Card Slot									
Left Head Touched	661/1880	GSM	0.023	0.072	0.000	29.410	30.000	0.026	4.63
Left Head Tilted 15°	661/1880	GSM	0.007	0.006	0.000	29.410	30.000	0.008	4.63
Right Head Touched	661/1880	GSM	0.076	0.027	0.000	29.410	30.000	0.087	4.63
Right Head Tilted 15°	661/1880	GSM	0.009	0.005	0.000	29.410	30.000	0.010	4.63
Right Head Touched	512/1850.2	GSM	0.010	0.002	0.000	29.410	30.000	0.011	4.63
Right Head Touched	810/1909.8	GSM	0.003	0.001	0.000	29.410	30.000	0.003	4.63
SIM2 Card Slot									
Right Head Touched	661/1880	GSM	0.008	0.003	0.000	29.410	30.000	0.009	4.63
Test Position of Body with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
SIM1 Card Slot									
Towards Phantom	661/1880	GPRS 4TS	0.293	0.147	2.680	26.210	27.000	0.351	4.78
Towards Ground	661/1880	GPRS 4TS	0.270	0.140	-1.390	26.210	27.000	0.324	4.78
Towards Phantom	512/1850.2	GPRS 4TS	0.321	0.162	0.210	26.210	27.000	0.385	4.78
Towards Phantom	810/1909.8	GPRS 4TS	0.297	0.145	-2.070	26.210	27.000	0.356	4.78
Towards Phantom	512/1850.2	EDGE 4TS	0.052	0.017	3.560	26.210	27.000	0.062	4.78
Towards Phantom with Headset	512/1850.2	GSM	0.137	0.077	-4.560	26.210	27.000	0.164	4.78
SIM2 Card Slot									
Towards Ground	512/1850.2	GPRS 4TS	0.263	0.134	1.870	26.210	27.000	0.315	4.78
SAR Results for Hotspot Exposure Condition									
Towards Phantom	661/1880	GPRS 4TS	0.233	0.103	1.770	26.210	27.000	0.279	4.78
Towards Ground	661/1880	GPRS 4TS	0.253	0.126	-2.560	26.210	27.000	0.303	4.78
Towards Phantom	512/1850.2	GPRS 4TS	0.330	0.138	0.580	26.210	27.000	0.396	4.78

Towards Phantom	810/1909.8	GPRS 4TS	0.281	0.124	2.100	26.210	27.000	0.337	4.78
Right Side	661/1880	GPRS 4TS	0.196	0.098	-1.150	26.210	27.000	0.235	4.78
Bottom Side	661/1880	GPRS 4TS	0.134	0.062	-2.630	26.210	27.000	0.161	4.78

9.2.3 Results overview of Wi-Fi 2.4G

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Left Head Touched	6/2437	802.11b	0.208	0.078	0.000	9.890	12.000	0.338	4.00
Left Head Tilted 15°	6/2437	802.11b	0.003	0.001	0.000	9.890	12.000	0.003	4.00
Right Head Touched	6/2437	802.11b	0.216	0.115	0.060	9.890	12.000	0.351	4.00
Right Head Tilted 15°	6/2437	802.11b	0.279	0.101	-0.300	9.890	12.000	0.454	4.00
Right Head Tilted 15°	1/2412	802.11b	0.325	0.116	1.750	9.890	12.000	0.528	4.00
Right Head Tilted 15°	11/2462	802.11b	0.434	0.162	2.800	9.890	12.000	0.705	4.00
Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Towards Phantom	6/2437	802.11b	0.030	0.007	1.580	9.890	12.000	0.049	4.11
Towards Ground	6/2437	802.11b	0.039	0.013	-2.230	9.890	12.000	0.063	4.11
Towards Ground	1/2412	802.11b	0.016	0.004	-0.870	9.890	12.000	0.026	4.11
Towards Ground	11/2462	802.11b	0.029	0.013	-0.840	9.890	12.000	0.047	4.11
SAR Results for Hotspot Exposure Condition									
Towards Phantom	6/2437	802.11b	0.035	0.013	1.230	9.890	12.000	0.057	4.11
Towards Ground	6/2437	802.11b	0.042	0.019	1.860	9.890	12.000	0.068	4.11
Towards Ground	1/2412	802.11b	0.018	0.011	-0.360	9.890	12.000	0.029	4.11
Towards Ground	11/2462	802.11b	0.026	0.016	-0.720	9.890	12.000	0.042	4.11
Right Side	6/2437	802.11b	0.041	0.035	0.280	9.890	12.000	0.067	4.11
Top Side	6/2437	802.11b	0.026	0.028	-3.460	9.890	12.000	0.042	4.11

9.2.4 Results overview of UMTS Band II

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Left Head Touched	9400/1880	RMC	0.120	0.053	0.000	22.630	23.000	0.131	4.63
Left Head Tilted 15°	9400/1880	RMC	0.017	0.013	0.050	22.630	23.000	0.018	4.63
Right Head Touched	9400/1880	RMC	0.048	0.016	0.000	22.630	23.000	0.052	4.63
Right Head Tilted 15°	9400/1880	RMC	0.006	0.004	0.090	22.630	23.000	0.007	4.63
Left Head Touched	9262/1852.4	RMC	0.122	0.054	0.000	22.630	23.000	0.133	4.63
Left Head Touched	9538/1907.6	RMC	0.112	0.048	0.000	22.630	23.000	0.122	4.63
Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Towards Phantom	9400/1880	RMC	0.297	0.146	1.230	22.630	23.000	0.323	4.78
Towards Ground	9400/1880	RMC	0.404	0.210	-0.140	22.630	23.000	0.440	4.78
Towards Ground	9262/1852.4	RMC	0.538	0.289	1.840	22.630	23.000	0.586	4.78
Towards Ground	9538/1907.6	RMC	0.264	0.135	-0.260	22.630	23.000	0.287	4.78
Towards Ground with Headset	9262/1852.4	RMC	0.186	0.092	1.250	22.630	23.000	0.203	4.78
SAR Results for Hotspot Exposure Condition									
Towards Phantom	9400/1880	RMC	0.288	0.152	1.350	22.630	23.000	0.314	4.78
Towards Ground	9400/1880	RMC	0.395	0.221	-1.160	22.630	23.000	0.430	4.78
Towards Ground	9262/1852.4	RMC	0.523	0.276	1.720	22.630	23.000	0.570	4.78
Towards Ground	9538/1907.6	RMC	0.235	0.129	-0.186	22.630	23.000	0.256	4.78
Right Side	9400/1880	RMC	0.153	0.072	0.201	22.630	23.000	0.167	4.78
Bottom Side	9400/1880	RMC	0.312	0.158	1.070	22.630	23.000	0.340	4.78

9.2.5 Results overview of UMTS Band V

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Left Head Touched	4182/836.4	RMC	0.530	0.378	3.020	22.730	23.000	0.564	4.53
Left Head Tilted 15°	4182/836.4	RMC	0.289	0.198	1.860	22.730	23.000	0.308	4.53
Right Head Touched	4182/836.4	RMC	0.477	0.340	2.520	22.730	23.000	0.508	4.53
Right Head Tilted 15°	4182/836.4	RMC	0.202	0.137	2.400	22.730	23.000	0.215	4.53
Left Head Touched	4132/826.4	RMC	0.332	0.234	0.000	22.730	23.000	0.353	4.53
Left Head Touched	4233/846.6	RMC	0.436	0.308	0.000	22.730	23.000	0.464	4.53
Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (%)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Conversion factor
			1-g	10-g					
Towards Phantom	4182/836.4	RMC	0.634	0.440	1.720	22.730	23.000	0.675	5.07
Towards Ground	4182/836.4	RMC	0.643	0.444	-1.620	22.730	23.000	0.684	5.07
Towards Ground	4132/826.4	RMC	0.658	0.459	0.710	22.730	23.000	0.700	5.07
Towards Ground	4233/846.6	RMC	0.709	0.493	0.780	22.730	23.000	0.754	5.07
Towards Ground with Headset	4233/846.6	RMC	0.336	0.222	0.860	22.730	23.000	0.358	5.07
SAR Results for Hotspot Exposure Condition									
Towards Phantom	4182/836.4	RMC	0.356	0.361	-3.220	22.730	23.000	0.379	5.07
Towards Ground	4182/836.4	RMC	0.443	0.436	-0.340	22.730	23.000	0.471	5.07
Towards Ground	4132/826.4	RMC	0.496	0.426	0.710	22.730	23.000	0.528	5.07
Towards Ground	4233/846.6	RMC	0.667	0.394	0.920	22.730	23.000	0.710	5.07
Right Side	4182/836.4	RMC	0.345	0.189	2.100	22.730	23.000	0.367	5.07
Bottom Side	4182/836.4	RMC	0.461	0.258	-0.690	22.730	23.000	0.491	5.07

10 Multiple Transmitter Information

The SAR measurement positions of each side are as below:

Mode	Front Side	Rear Side	Left Side	Right Side	Top Side	Bottom Side
2G/3G Antenna	Yes	Yes	No	Yes	Yes	No
Wi-Fi	Yes	Yes	No	Yes	No	Yes

1) Per KDB941225 D06v01r01, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

10.1.1 Stand-alone SAR test exclusion

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances \leq 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

a) Head position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	3.29	2.13	5.00	2.450	0.67	3.00	Yes

b) Body-Worn position

Mode	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	Calculation Result	exclusion Threshold	SAR test exclusion
BT	3.29	2.13	10.00	2.450	0.33	3.00	Yes

When the standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion

$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x]$ W/kg for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	Pmax(dBm)	Pmax(mW)	Distance(mm)	f(GHz)	X	Estimated SAR(W/Kg)
BT	Head	3.29	2.13	5.00	2.45	7.50	0.089
BT	Body	3.29	2.13	10.00	2.45	7.50	0.045

10.1.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities				
Simultaneous Tx Combination	Configuration	Head	Body	Hotspot
1	GSM/GPRS/UMTS +Wi-Fi	YES	YES	YES
2	GSM/GPRS/UMTS +BT	YES	YES	NO

Note: The device does not support simultaneous BT and Wi-Fi ,because the BT and Wi-Fi share the same antenna and can't transmit simultaneously.

10.1.3 SAR Summation Scenario

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		GSM850	Wi-Fi		
Head	Left Head Touched	0.650	0.338	0.988	NA
	Left Head Tilted 15°	0.331	0.005	0.336	NA
	Right Head Touched	0.773	0.351	1.124	NA
	Right Head Tilted 15°	0.307	0.705	1.012	NA
Body	Towards Phantom	0.567	0.049	0.616	NA
	Towards Ground	0.635	0.063	0.698	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.751	0.063	0.824	NA
Hotspot	Left Side	0	0	0	NA
	Right Side	0.105	0.067	0.112	NA
	Top Side	0	0.042	0.042	NA
	Bottom Side	0.613	0	0	NA

Note: Simultaneous Tx Combination of GSM850 and Wi-Fi

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		GSM1900	Wi-Fi		
Head	Left Head Touched	0.026	0.338	0.364	NA
	Left Head Tilted 15°	0.008	0.005	0.013	NA
	Right Head Touched	0.087	0.351	0.438	NA
	Right Head Tilted 15°	0.010	0.705	0.715	NA
Body	Towards Phantom	0.385	0.049	0.434	NA
	Towards Ground	0.324	0.063	0.387	NA
	Towards Phantom with headset	0.164	0.049	0.213	NA
	Towards Ground with headset	/	/	/	NA
Hotspot	Left Side	0	0	0	NA
	Right Side	0.235	0.067	0.302	NA
	Top Side	0	0.042	0.042	NA
	Bottom Side	0.161	0	0.161	NA

Note: Simultaneous Tx Combination of GSM1900 and Wi-Fi

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		UMTS Band II	Wi-Fi		
Head	Left Head Touched	0.133	0.338	0.471	NA
	Left Head Tilted 15°	0.008	0.005	0.013	NA
	Right Head Touched	0.052	0.351	0.403	NA
	Right Head Tilted 15°	0.007	0.705	0.712	NA
Body	Towards Phantom	0.323	0.049	0.372	NA

	Towards Ground	0.586	0.063	0.649	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.203	0.063	0.266	NA
Hotspot	Left Side	0	0	0	NA
	Right Side	0.167	0.067	0.234	NA
	Top Side	0	0.042	0.042	NA
	Bottom Side	0.340	0	0.340	NA

Note: Simultaneous Tx Combination of UMTS Band II and Wi-Fi

Test Position		Scaled SAR _{Max}		Σ _{1-g} SAR	SPLSP
		UMTS Band V	Wi-Fi		
Head	Left Head Touched	0.564	0.338	0.902	NA
	Left Head Tilted 15°	0.308	0.005	0.313	NA
	Right Head Touched	0.508	0.351	0.859	NA
	Right Head Tilted 15°	0.215	0.705	0.920	NA
Body	Towards Phantom	0.675	0.049	0.724	NA
	Towards Ground	0.754	0.063	0.817	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.358	0.063	0.421	NA
Hotspot	Left Side	0	0	0	NA
	Right Side	0.367	0.067	0.434	NA
	Top Side	0	0.042	0.042	NA
	Bottom Side	0.491	0	0.491	NA

Note: Simultaneous Tx Combination of UMTS Band V and Wi-Fi

MAX.ΣSAR_{1g} = 1.124W/kg < 1.6 W/kg, so the Simultaneous SAR is not required for Wi-Fi and GSM&UMTS antenna.

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		GSM850	BT		
Head	Left Head Touched	0.650	0.089	0.739	NA
	Left Head Tilted 15°	0.331	0.089	0.420	NA
	Right Head Touched	0.773	0.089	0.862	NA
	Right Head Tilted 15°	0.307	0.089	0.396	NA
Body	Towards Phantom	0.567	0.045	0.612	NA
	Towards Ground	0.635	0.045	0.680	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.751	0.045	0.796	NA

Note: Simultaneous Tx Combination of GSM850 and BT

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		GSM1900	BT		
Head	Left Head Touched	0.026	0.089	0.115	NA
	Left Head Tilted 15°	0.008	0.089	0.097	NA
	Right Head Touched	0.087	0.089	0.176	NA
	Right Head Tilted 15°	0.01	0.089	0.099	NA
Body	Towards Phantom	0.385	0.045	0.430	NA
	Towards Ground	0.324	0.045	0.369	NA
	Towards Phantom with headset	0.164	0.045	0.209	NA
	Towards Ground with headset	/	/	/	NA

Note: Simultaneous Tx Combination of GSM1900 and BT

Test Position		Scaled SAR _{Max}		\sum_{1-g} SAR	SPLSP
		UMTS Band II	BT		
Head	Left Head Touched	0.133	0.089	0.222	NA
	Left Head Tilted 15°	0.008	0.089	0.097	NA
	Right Head Touched	0.052	0.089	0.141	NA
	Right Head Tilted 15°	0.007	0.089	0.096	NA
Body	Towards Phantom	0.323	0.045	0.368	NA
	Towards Ground	0.586	0.045	0.631	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.203	0.045	0.248	NA

Note: Simultaneous Tx Combination of UMTS Band II and BT

Test Position		Scaled SAR _{Max}		Σ _{1-g} SAR	SPLSP
		UMTS Band V	BT		
Head	Left Head Touched	0.564	0.089	0.653	NA
	Left Head Tilted 15°	0.308	0.089	0.397	NA
	Right Head Touched	0.508	0.089	0.597	NA
	Right Head Tilted 15°	0.215	0.089	0.304	NA
Body	Towards Phantom	0.675	0.045	0.720	NA
	Towards Ground	0.754	0.045	0.799	NA
	Towards Phantom with headset	/	/	/	NA
	Towards Ground with headset	0.358	0.045	0.403	NA

Note: Simultaneous Tx Combination of UMTS Band V and BT

MAX.ΣSAR_{1g} = 0.862W/kg < 1.6 W/kg, so the Simultaneous SAR is not required for BT and GSM&UMTS antenna.

11 Measurement uncertainty evaluation

11.1 Measurement uncertainty evaluation for SAR test

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Measurement Uncertainty evaluation for SAR test								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.8	5.8	∞
Axial Isotropy	3.5	R	$\sqrt{3}$	$(1-C_p)^{1/2}$	$(1-C_p)^{1/2}$	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
Boundary Effect	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
system Detection Limits	1	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3	N	1	1	1	3.00	3.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	$\sqrt{3}$	1	1	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF Ambient Conditions-Noise	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Conditions-Reflections	3	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner Mechanical Tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation and Integration Algorithms for Max.SAR Evaluation	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test Sample Positioning	2.6	N	1	1	1	2.60	2.60	11
Device Holder Uncertainty	3	N	1	1	1	3.00	3.00	7
Output Power Variation-SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	2	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	$\sqrt{3}$	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	$\sqrt{3}$	0.60	0.49	1.73	1.42	∞
Combined Standard Uncertainly		Rss				10.63	10.54	
Expanded Uncertainty{95% CONFIDENCE INTERVAL}		k				21.26	21.08	

11.2 Measurement uncertainty evaluation for system check

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Satimo. The breakdown of the individual uncertainties is as follows:

Uncertainty For System Performance Check								
Uncertainty Component	Tol. (±%)	Prob. Dist.	Div.	C _i 1g	C _i 10g	1g U _i (±%)	10g U _i (±%)	V _i
measurement system								
Probe Calibration	5.8	N	1	1	1	5.80	5.80	∞
Axial Isotropy	3.5	R	√3	(1-C _p) ^{1/2}	(1-C _p) ^{1/2}	1.43	1.43	∞
Hemispherical Isotropy	5.9	R	√3	√C _p	√C _p	2.41	2.41	∞
Boundary Effect	1	R	√3	1	1	0.58	0.58	∞
Linearity	4.7	R	√3	1	1	2.71	2.71	∞
system detection Limits	1	R	√3	1	1	0.58	0.58	∞
Modulation response	0	N	1	1	1	0.00	0.00	∞
Readout Electronics	0.5	N	1	1	1	0.50	0.50	∞
Response Time	0	R	√3	1	1	0.00	0.00	∞
Integration Time	1.4	R	√3	1	1	0.81	0.81	∞
RF ambient Conditions - Noise	3	R	√3	1	1	1.73	1.73	∞
RF ambient Conditions – Reflections	3	R	√3	1	1	1.73	1.73	∞
Probe positioned Mechanical Tolerance	1.4	R	√3	1	1	0.81	0.81	∞
Probe positioning with respect to Phantom Shell	1.4	R	√3	1	1	0.81	0.81	∞
Extrapolation, interpolation and integration Algorithms for Max. SAR Evaluation	2.3	R	√3	1	1	1.33	1.33	∞
Dipole								
Deviation of experimental source from numerical source	4	N	1	1	1	4.00	4.00	∞
Input power and SAR drift measurement	5	R	√3	1	1	2.89	2.89	∞
Dipole axis to liquid Distance	2	R	√3	1	1	1.16	1.16	∞
Phantom and Tissue Parameters								
Phantom Uncertainty (shape and thickness tolerances)	4	R	√3	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviation (in permittivity and conductivity)	2	N	1	1	0.84	2.00	1.68	∞
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.60	1.08	5
Liquid conductivity (target.)	5	R	√3	0.64	0.43	1.85	1.24	5
Liquid Permittivity (meas.)	2.5	N	1	0.60	0.49	1.50	1.23	∞
Liquid Permittivity (target.)	5	R	√3	0.60	0.49	1.73	1.41	∞
Combined Standard Uncertainty		Rss				10.28	9.98	
Expanded Uncertainty (95% Confidence interval)		k				20.57	19.95	

12 Test equipment and ancillaries used for tests

To simplify the identification of the test equipment and/or ancillaries which were used, the reporting of the relevant test cases only refer to the test item number as specified in the table below.

	Manufacturer	Device Type	Type(Model)	Serial number	calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	SATIMO	COMOSAR DOSIMETRIC E FIELD PROBE	SSE5	SN 09/13 EP170	2015-07-25	2016-07-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 835 MHz REFERENCE DIPOLE	SID835	SN 14/13 DIP0G835-235	2015-07-25	2016-07-24
<input type="checkbox"/>	SATIMO	COMOSAR 900 MHz REFERENCE DIPOLE	SID900	SN 14/13 DIP0G900-231	2015-07-25	2016-07-24
<input type="checkbox"/>	SATIMO	COMOSAR 1800 MHz REFERENCE DIPOLE	SID1800	SN 14/13 DIP1G800-232	2015-07-25	2016-07-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 1900 MHz REFERENCE DIPOLE	SID1900	SN 14/13 DIP1G900-236	2015-07-25	2016-07-24
<input type="checkbox"/>	SATIMO	COMOSAR 2000 MHz REFERENCE DIPOLE	SID2000	SN 14/13 DIP2G000-237	2015-07-25	2016-07-24
<input checked="" type="checkbox"/>	SATIMO	COMOSAR 2450 MHz REFERENCE DIPOLE	SID2450	SN 14/13 DIP2G450-238	2015-07-25	2016-07-24
<input type="checkbox"/>	SATIMO	COMOSAR 2600 MHz REFERENCE DIPOLE	SID2600	SN 28/14 DIP2G600-327	2015-07-25	2016-07-24
<input checked="" type="checkbox"/>	SATIMO	Software	OPENSAR	N/A	N/A	N/A
<input checked="" type="checkbox"/>	SATIMO	Phantom	COMOSAR IEEE SAM PHANTOM	SN 14/13 SAM99	N/A	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	117528	2015-08-19	2016-08-18
<input checked="" type="checkbox"/>	HP	Network Analyser	8753D	3410A08889	2015-08-19	2016-08-18
<input checked="" type="checkbox"/>	HP	Signal Generator	E4421B	GB39340770	2015-08-19	2016-08-18
<input checked="" type="checkbox"/>	Keithley	Multimeter	Keithley 2000	4014539	2015-08-19	2016-08-18
<input checked="" type="checkbox"/>	SATIMO	Amplifier	Power Amplifier	MODU-023-A- 0004	2015-10-13	2016-10-12
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4418B	GB43312909	2015-10-13	2016-10-12
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E4412A	MY41500046	2015-10-13	2016-10-12
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	GB41291826	2015-10-13	2016-10-12
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	8481H	MY41091215	2015-10-13	2016-10-12
<input checked="" type="checkbox"/>	SATIMO	DAE	SUPR72	SN 42/13	2015-07-25	2016-07-24

Annex A: System performance verification

(Please See the SAR Measurement Plots of annex A.)

Annex B: Measurement results

(Please See the SAR Measurement Plots of annex B.)

Annex C: Calibration reports

(Please See the Calibration reports of annex C.)

Annex D: Photo documentation

Photo 1: Measurement System OPENSAR



Photo 2: Front view



Photo 3: Rear View-1/3



Photo 4: Rear View-2/3



Photo 5: Rear View-3/3



Photo 6: Left Head Touched



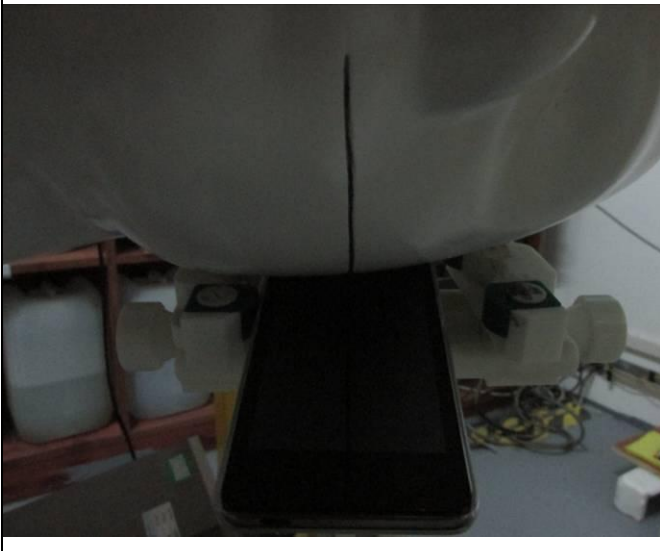
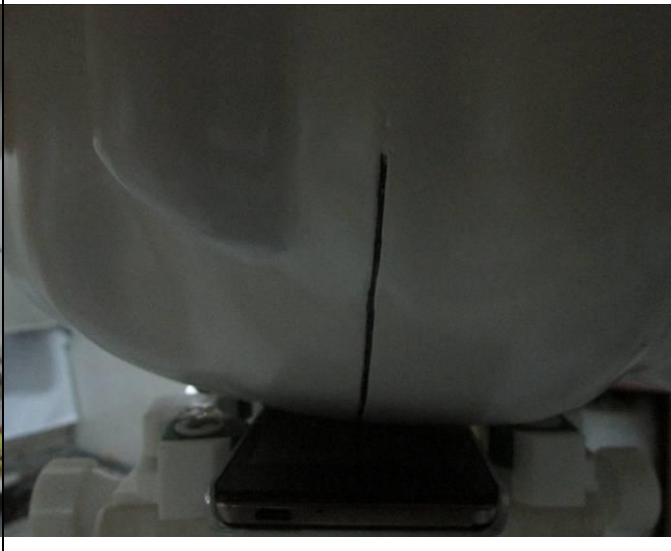


Photo 7: Left Head Tilted 15°	Photo 8: Right Head Touched
 A photograph showing a white mannequin head tilted to the left. A black smartphone is positioned vertically below the chin of the head. The background shows a laboratory setting with various equipment and cables.	 A photograph showing a white mannequin head tilted to the right. A black smartphone is positioned vertically below the chin of the head, appearing to be in contact with the neck area. The background is similar to Photo 7.
Photo 9: Right Head Tilted 15°	Photo 10: Towards Phantom 10mm
 A photograph showing a white mannequin head tilted to the right. A black smartphone is positioned vertically below the chin of the head. The background shows a laboratory setting with various equipment and cables.	 A close-up photograph of a black smartphone lying horizontally on a white surface. A red horizontal line is drawn above the phone, with a vertical line segment indicating a 10mm distance from the top edge of the phone to the red line. The background is a plain white wall.

Photo 11: Towards Ground 10mm



Photo 5: Towards Phantom with Headset 10mm



Photo 13: Towards Ground with Headset 10mm



Photo 14: Left Side 10mm


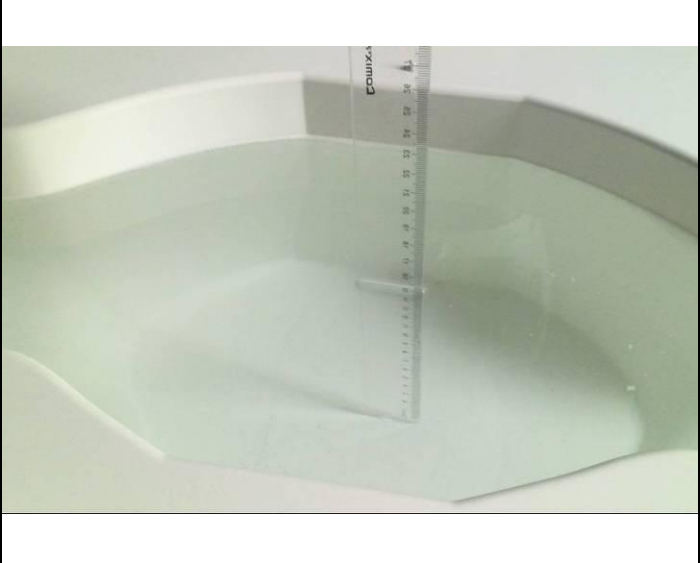




Photo 15: Right Side 10mm



Photo 16: Top Side 10mm



Photo 17: Bottom Side 10mm	Photo 18: 850MHz Liquid Depth \geq 15.0cm
 A photograph showing the bottom side of a white container with a 10mm scale. The container is filled with a light green liquid. A ruler is placed vertically inside the container to measure the liquid depth. The liquid level is clearly visible above the 15.0cm mark on the ruler.	 A photograph showing the bottom side of a white container with a 10mm scale. The container is filled with a light green liquid. A ruler is placed vertically inside the container to measure the liquid depth. The liquid level is clearly visible above the 15.0cm mark on the ruler.
Photo 19: 1800~1900MHz Liquid Depth \geq 15.0cm	Photo 20: 2450MHz Liquid Depth \geq 15.0cm
 A photograph showing the bottom side of a white container with a 10mm scale. The container is filled with a light green liquid. A ruler is placed vertically inside the container to measure the liquid depth. The liquid level is clearly visible above the 15.0cm mark on the ruler.	 A photograph showing the bottom side of a white container with a 10mm scale. The container is filled with a light green liquid. A ruler is placed vertically inside the container to measure the liquid depth. The liquid level is clearly visible above the 15.0cm mark on the ruler.

End