

**Test Plot 1#: GSM 850\_Head Left Cheek\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 40.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.623 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.60 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.770 W/kg

**SAR(1 g) = 0.580 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 0.603 W/kg

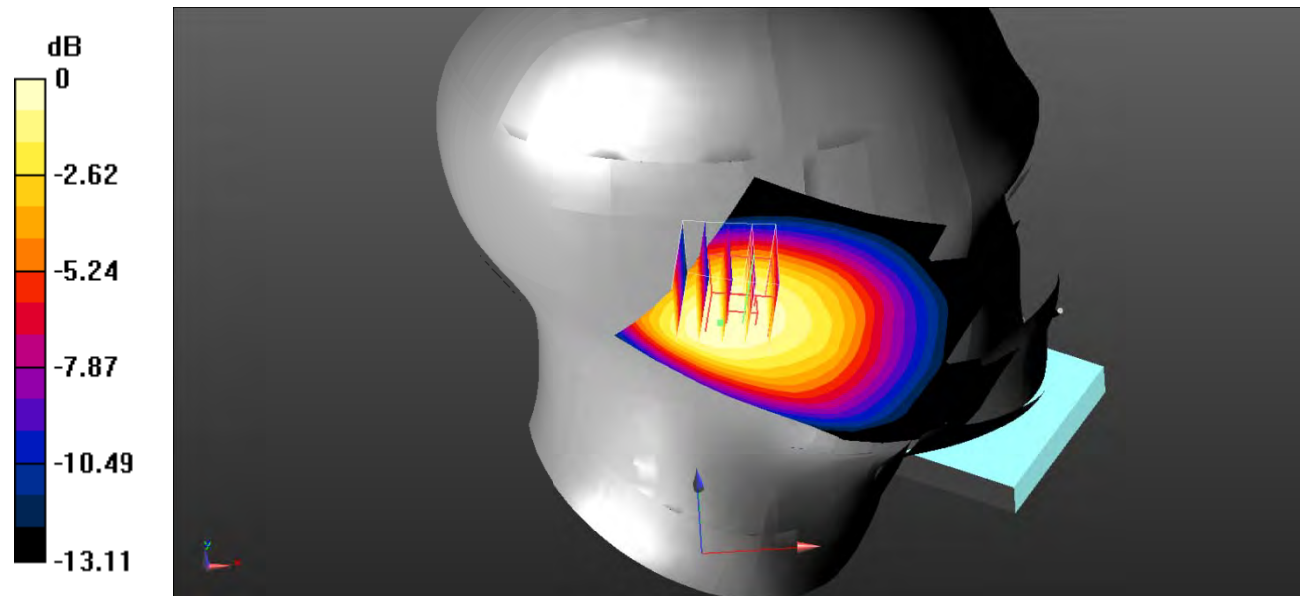

0 dB = 0.603 W/kg = -2.20 dBW/kg

**Test Plot 2#: GSM 850\_Head Left Tilt\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 40.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.642 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.35 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.867 W/kg

**SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.617 W/kg

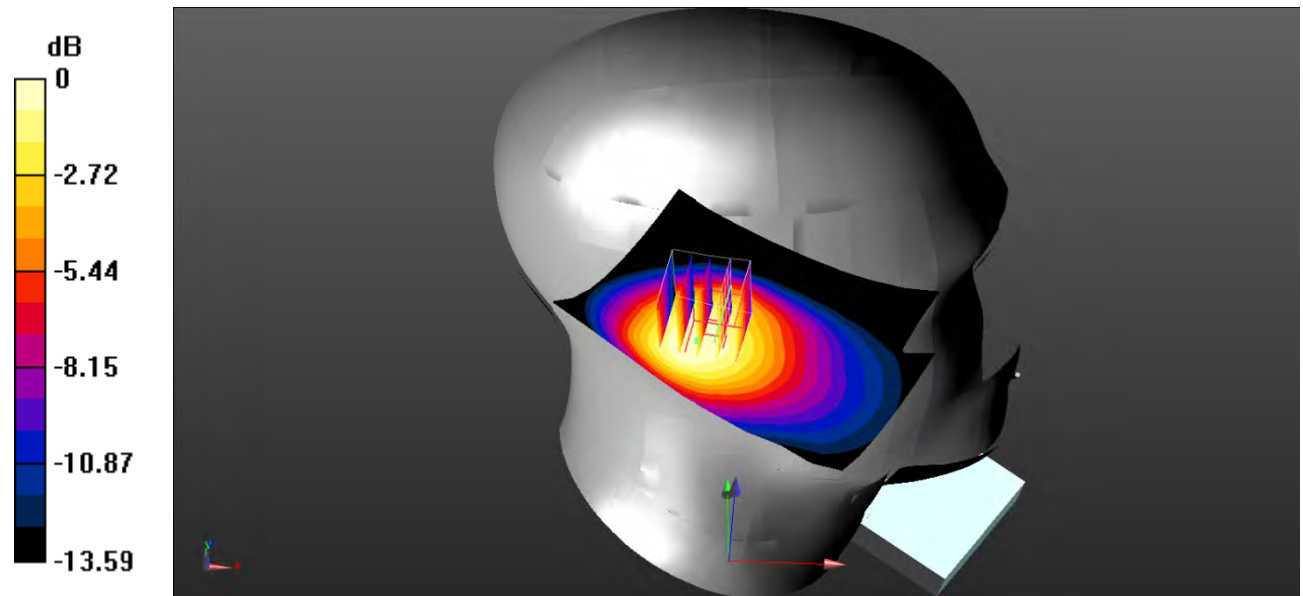

0 dB = 0.617 W/kg = -2.10 dBW/kg

**Test Plot 3#: GSM 850\_Head Right Check\_Low**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.873 \text{ S/m}$ ;  $\epsilon_r = 40.595$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.629 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.72 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.907 \text{ W/kg}$   
**SAR(1 g) =  $0.505 \text{ W/kg}$ ; SAR(10 g) =  $0.320 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.528 \text{ W/kg}$

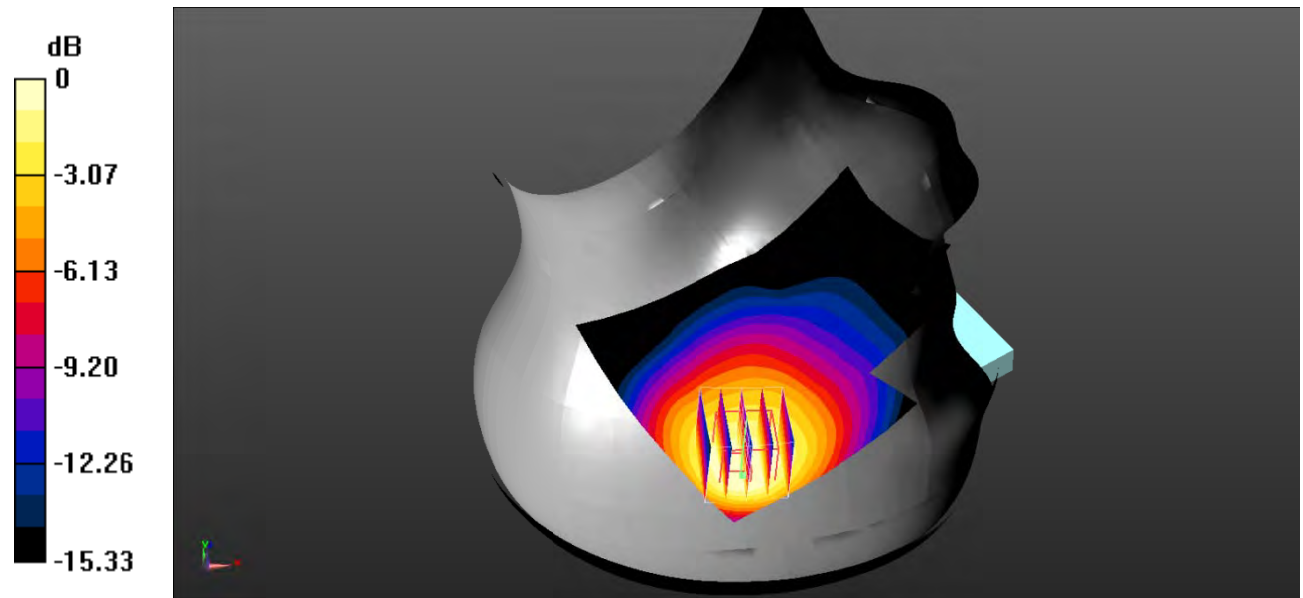

0 dB =  $0.528 \text{ W/kg}$  =  $-2.77 \text{ dBW/kg}$

**Test Plot 4#: GSM 850\_Head Right Cheek\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 40.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.940 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.21 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.41 W/kg

**SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.537 W/kg**

Maximum value of SAR (measured) = 0.860 W/kg

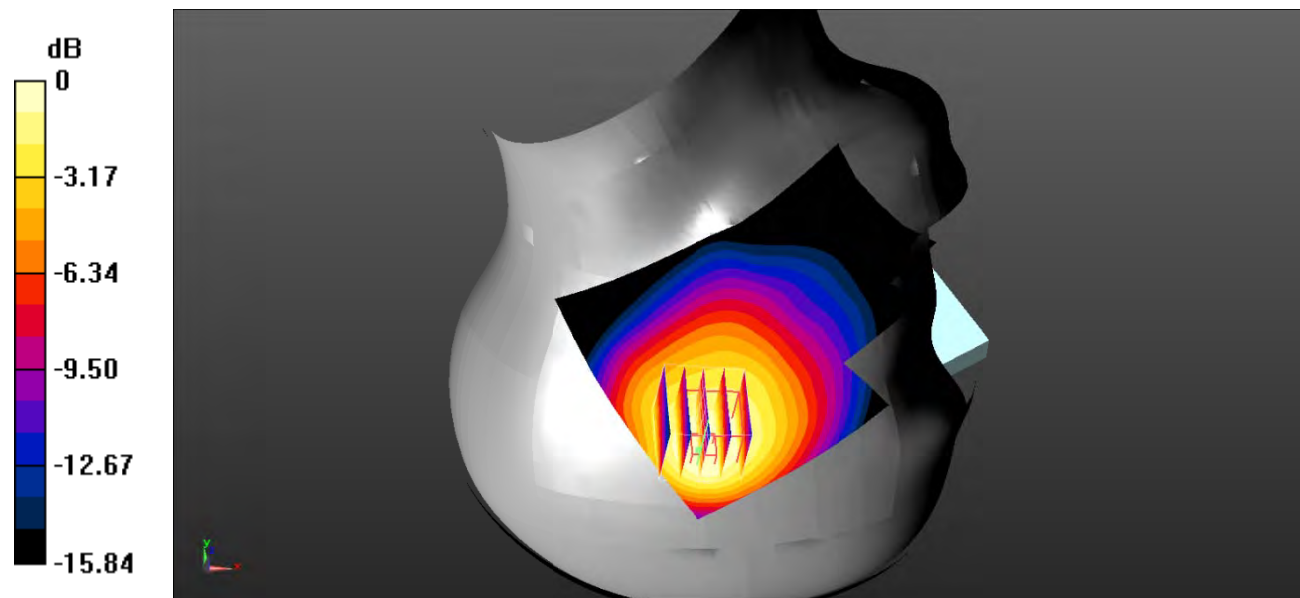

**Test Plot 5#: GSM 850\_Head Right Check\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 40.694$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.913 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $20.16 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.39 \text{ W/kg}$   
**SAR(1 g) =  $0.777 \text{ W/kg}$ ; SAR(10 g) =  $0.486 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.818 \text{ W/kg}$

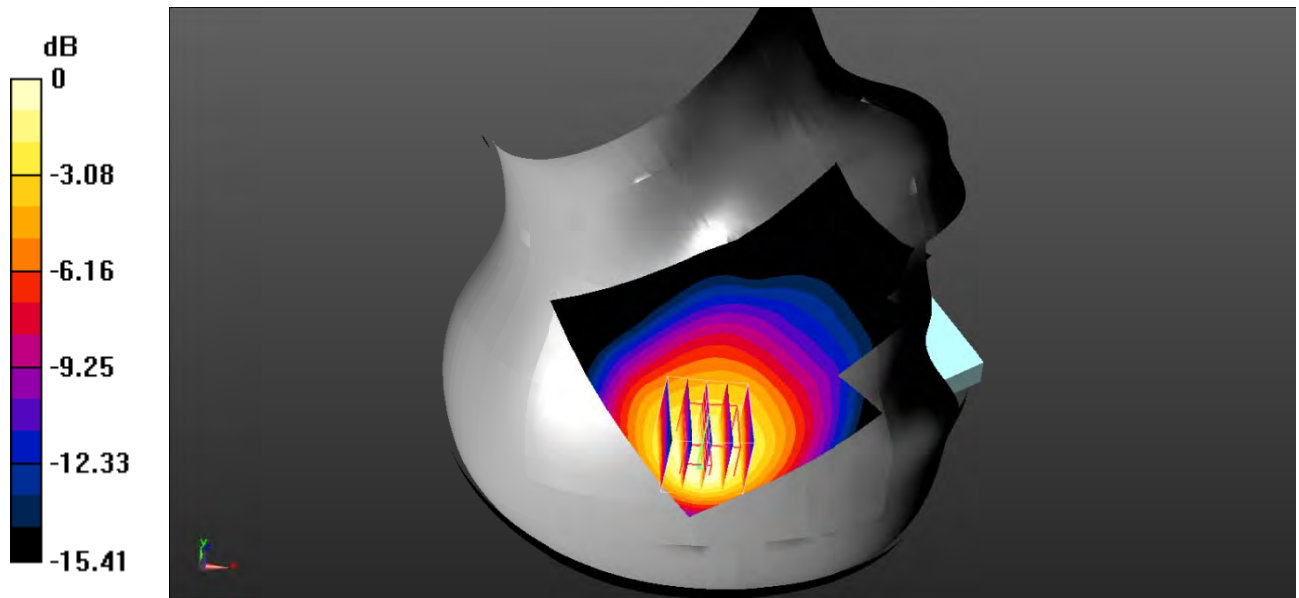

0 dB =  $0.818 \text{ W/kg}$  =  $-0.87 \text{ dBW/kg}$

**Test Plot 6#: GSM 850\_Head Right Tilt\_Low**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.873 \text{ S/m}$ ;  $\epsilon_r = 40.595$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.483 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.90 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.875 W/kg  
**SAR(1 g) = 0.440 W/kg; SAR(10 g) = 0.260 W/kg**  
 Maximum value of SAR (measured) = 0.449 W/kg

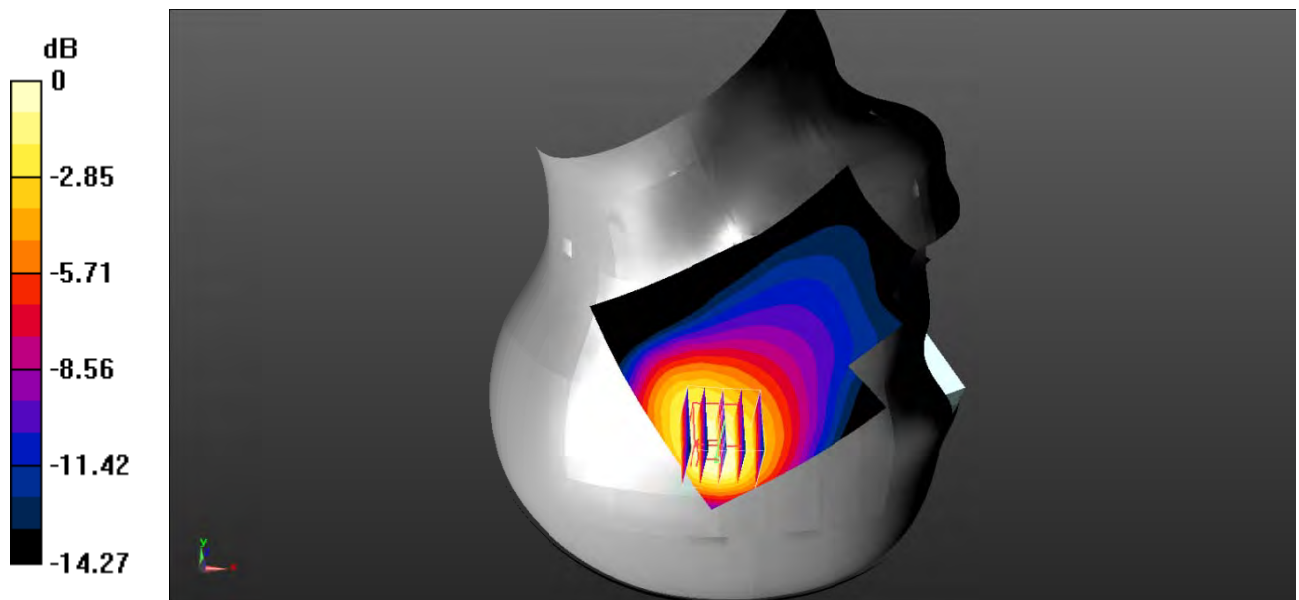

0 dB = 0.449 W/kg = -3.48 dBW/kg

**Test Plot 7#: GSM 850\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.891 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $25.71 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.50 \text{ W/kg}$   
**SAR(1 g) =  $0.773 \text{ W/kg}$ ; SAR(10 g) =  $0.463 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.828 \text{ W/kg}$

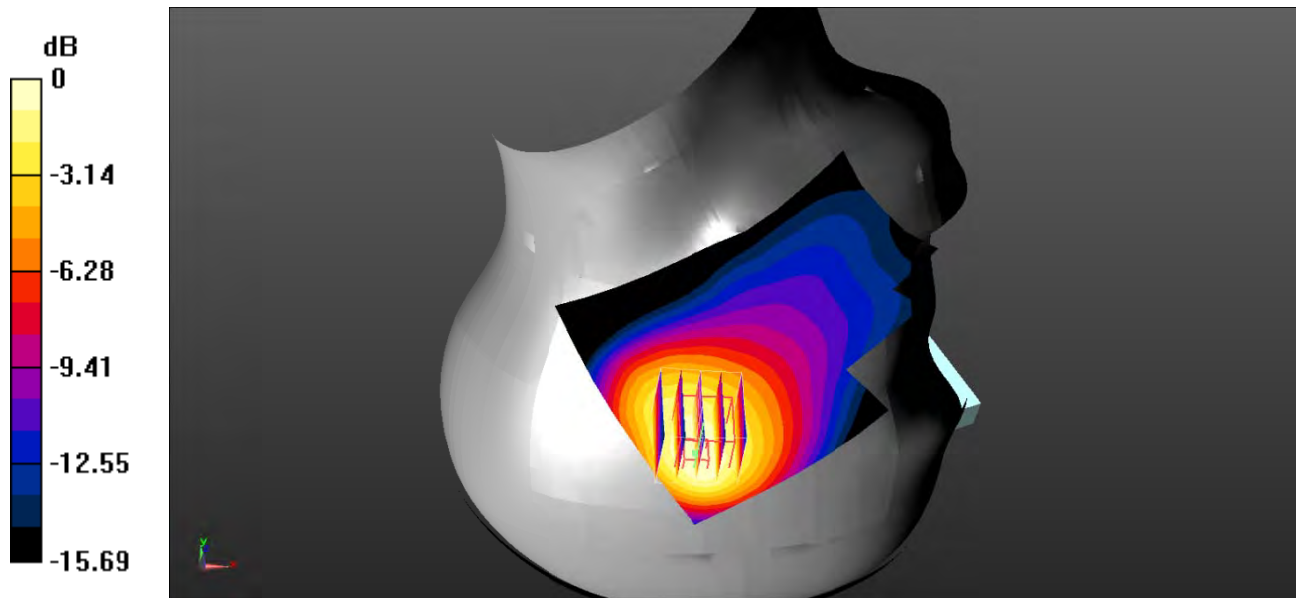

0 dB =  $0.828 \text{ W/kg}$  =  $-0.82 \text{ dBW/kg}$

**Test Plot 8#: GSM 850\_Head Right Tilt\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 40.694$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.726 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.74 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.35 \text{ W/kg}$   
**SAR(1 g) =  $0.670 \text{ W/kg}$ ; SAR(10 g) =  $0.392 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.683 \text{ W/kg}$

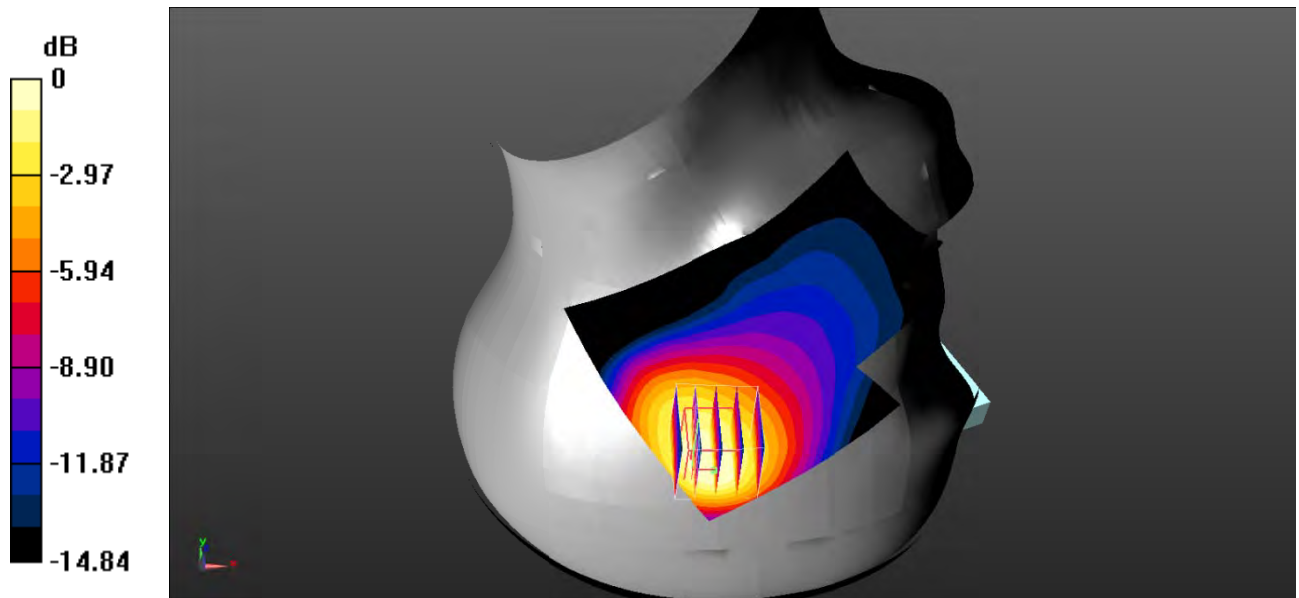

0 dB =  $0.683 \text{ W/kg}$  =  $-1.66 \text{ dBW/kg}$



**Test Plot 9#: GSM 850\_Body Worn Back\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 40.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.233 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.07 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.299 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.153 W/kg**

Maximum value of SAR (measured) = 0.224 W/kg

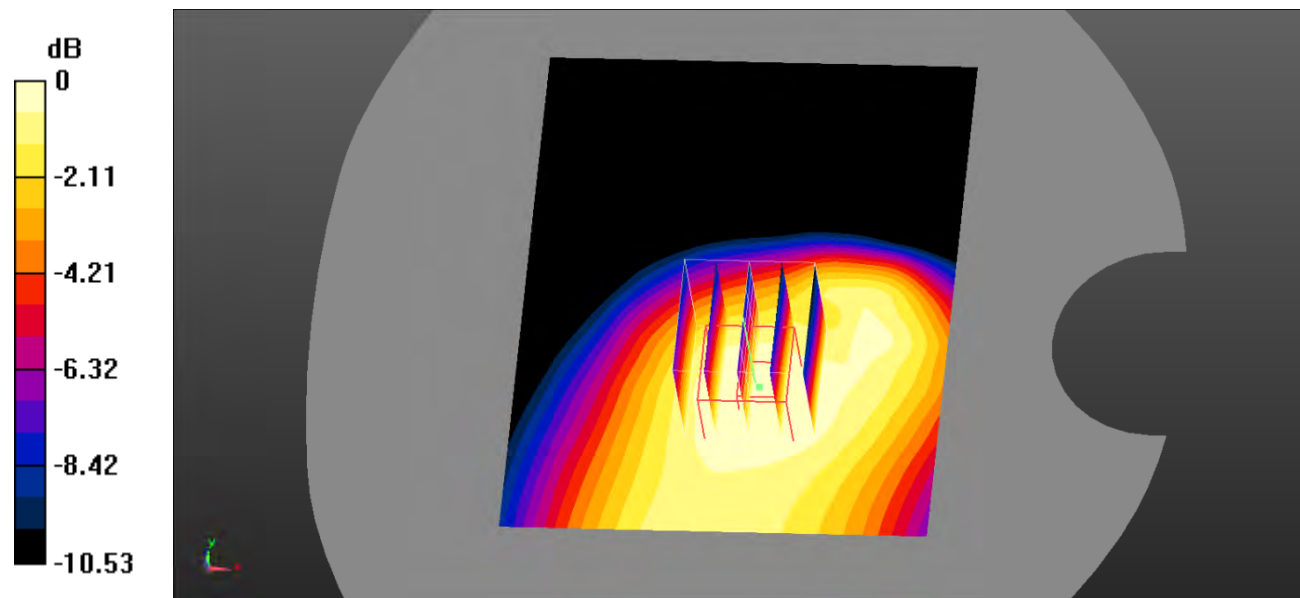

0 dB = 0.224 W/kg = -6.50 dBW/kg

**Test Plot 10#: GSM 850\_Body Back\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 40.754$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.164 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.203 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.156 W/kg

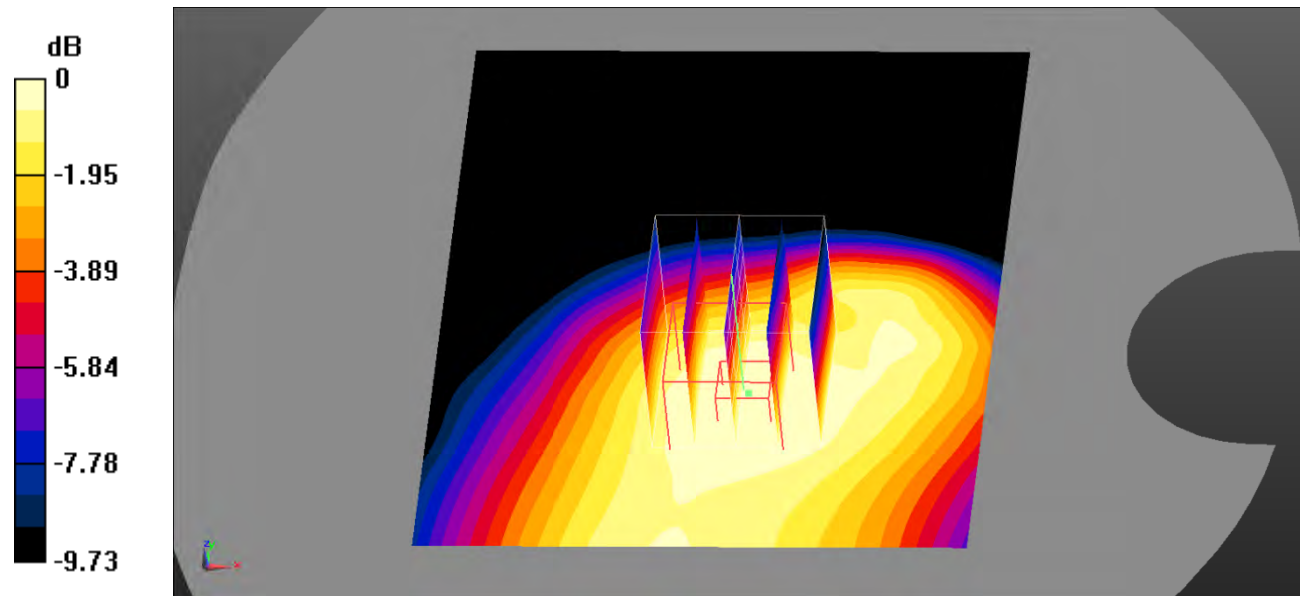

0 dB = 0.156 W/kg = -8.07 dBW/kg

**Test Plot 11#: GSM 850\_Body Left\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0432 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.071 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0540 \text{ W/kg}$   
**SAR(1 g) =  $0.041 \text{ W/kg}$ ; SAR(10 g) =  $0.029 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0428 \text{ W/kg}$

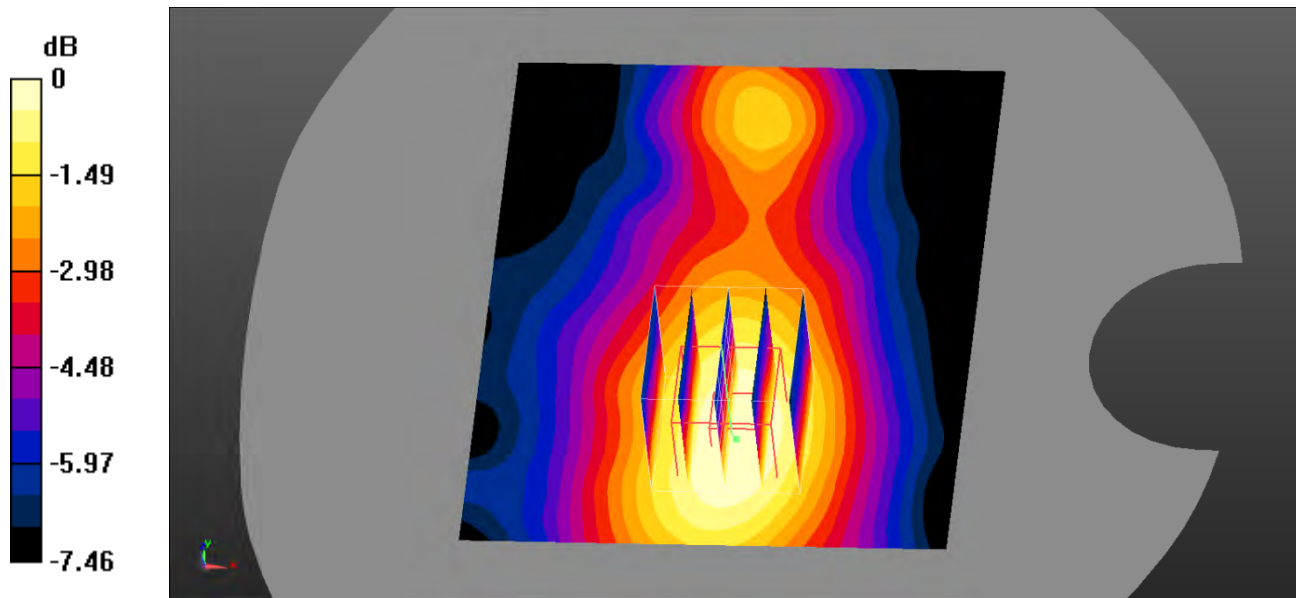

0 dB =  $0.0428 \text{ W/kg}$  =  $-13.69 \text{ dBW/kg}$

**Test Plot 12#: GSM 850\_Body Top\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.104 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.51 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.141 \text{ W/kg}$   
**SAR(1 g) =  $0.095 \text{ W/kg}$ ; SAR(10 g) =  $0.063 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.100 \text{ W/kg}$

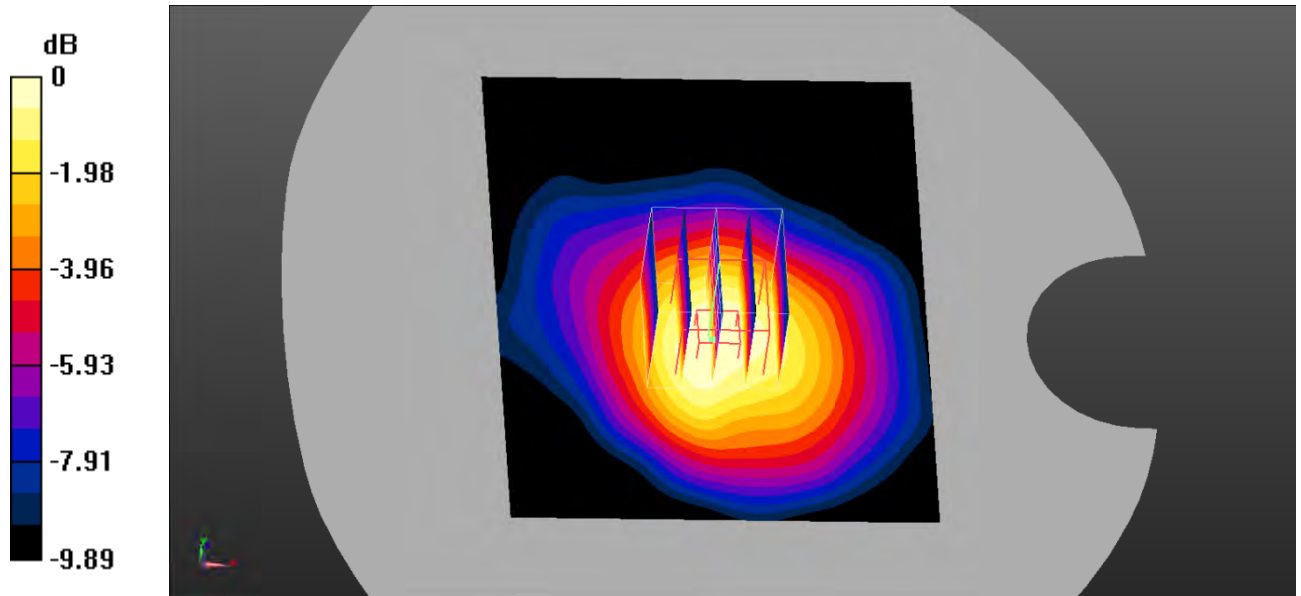

0 dB =  $0.100 \text{ W/kg}$  =  $-10.00 \text{ dBW/kg}$

**Test Plot 13#: PCS 1900\_Head Left Cheek\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  S/m;  $\epsilon_r = 39.945$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.646 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.97 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.977 W/kg

**SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.312 W/kg**

Maximum value of SAR (measured) = 0.632 W/kg

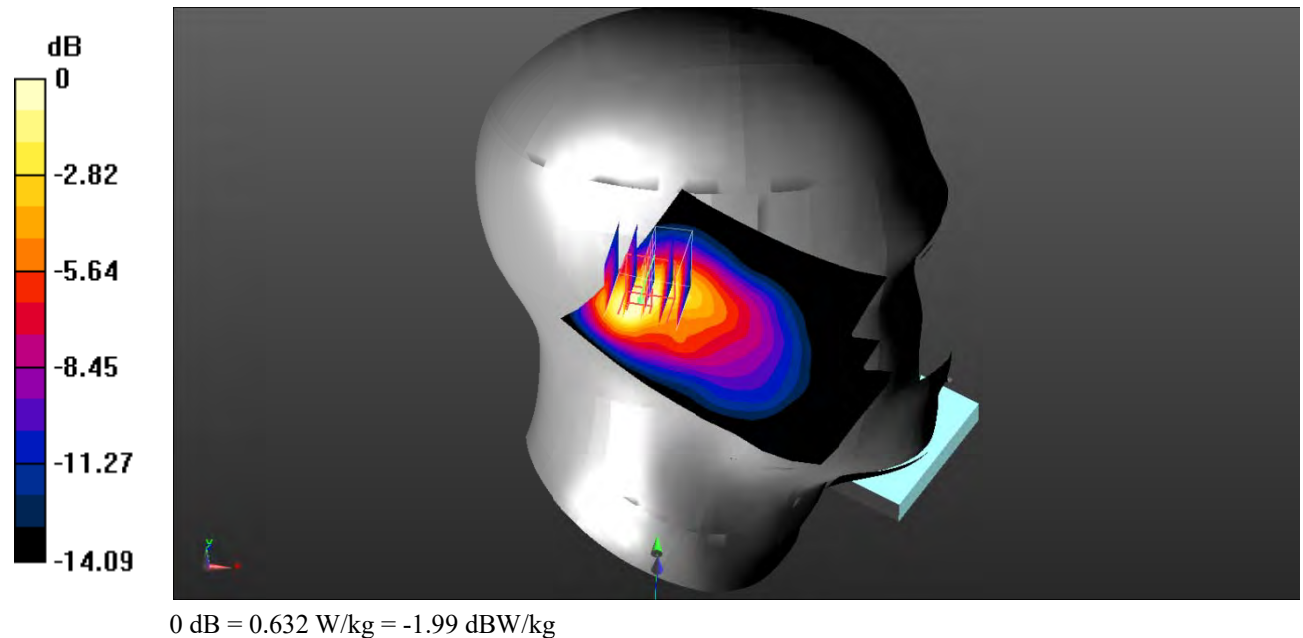

**Test Plot 14#: PCS 1900\_Head Left Tilt\_Low**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.376 \text{ S/m}$ ;  $\epsilon_r = 39.711$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.826 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $18.42 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.36 \text{ W/kg}$   
**SAR(1 g) =  $0.784 \text{ W/kg}$ ; SAR(10 g) =  $0.414 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.817 \text{ W/kg}$

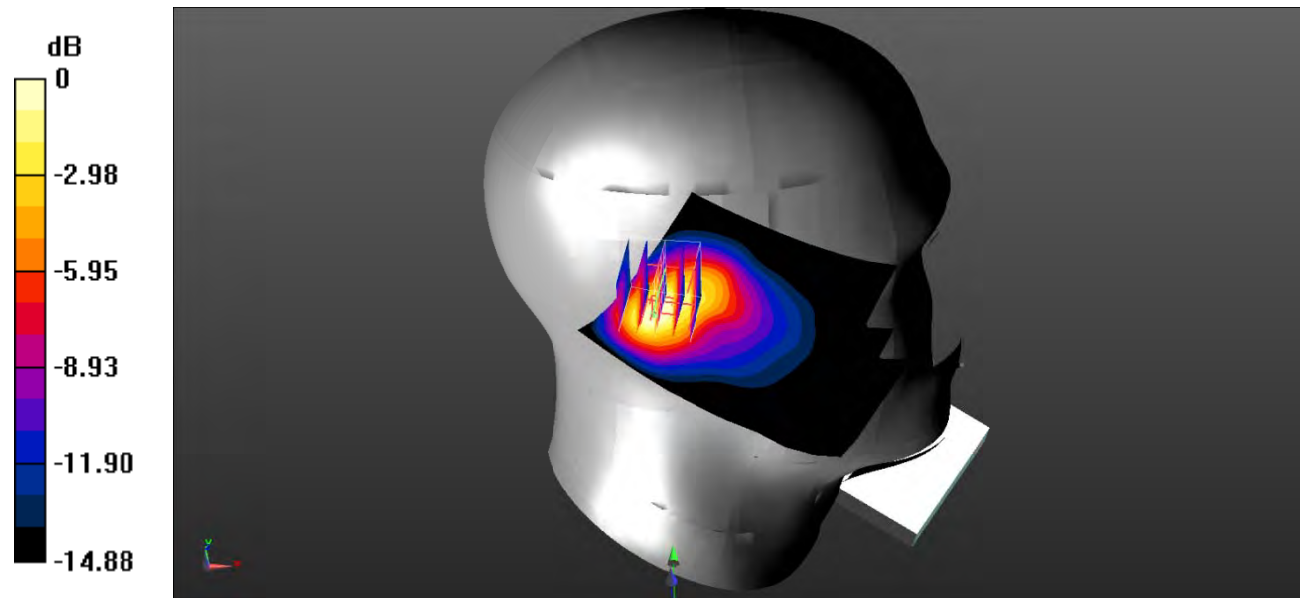

0 dB =  $0.817 \text{ W/kg}$  =  $-0.88 \text{ dBW/kg}$

**Test Plot 15#: PCS 1900\_Head Left Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.918 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.87 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.49 \text{ W/kg}$   
**SAR(1 g) =  $0.813 \text{ W/kg}$ ; SAR(10 g) =  $0.411 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.935 \text{ W/kg}$

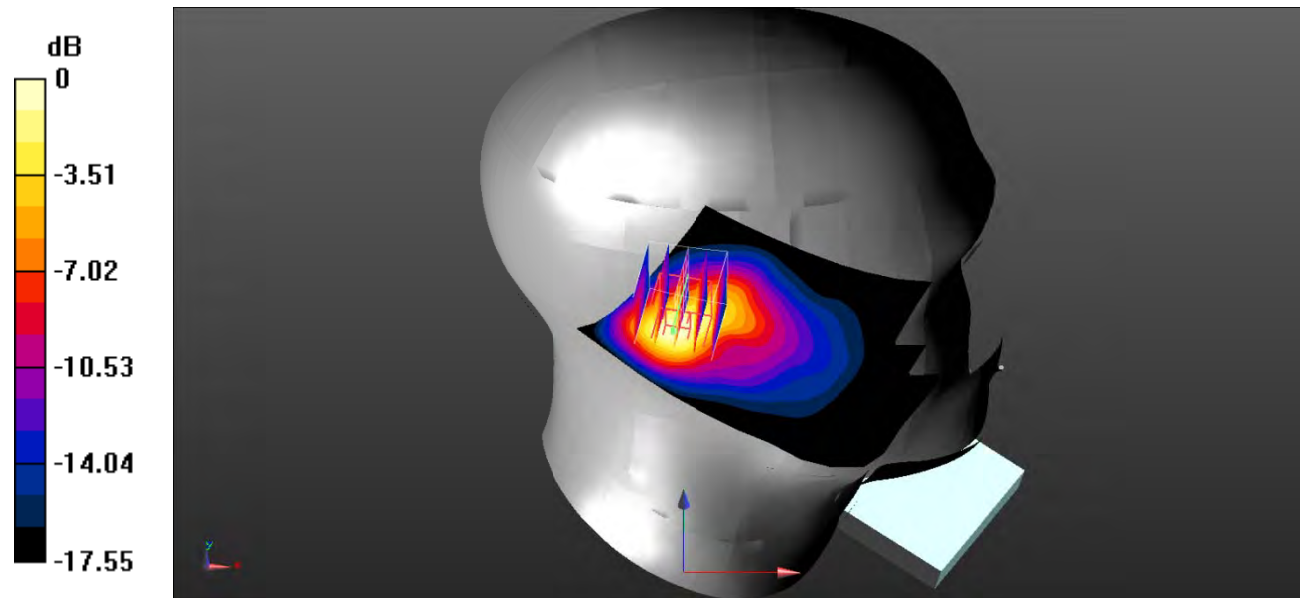

0 dB =  $0.935 \text{ W/kg}$  =  $-0.29 \text{ dBW/kg}$

**Test Plot 16#: PCS 1900\_Head Left Tilt\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 40.159$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.680 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.64 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.11 \text{ W/kg}$   
**SAR(1 g) =  $0.634 \text{ W/kg}$ ; SAR(10 g) =  $0.332 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.672 \text{ W/kg}$

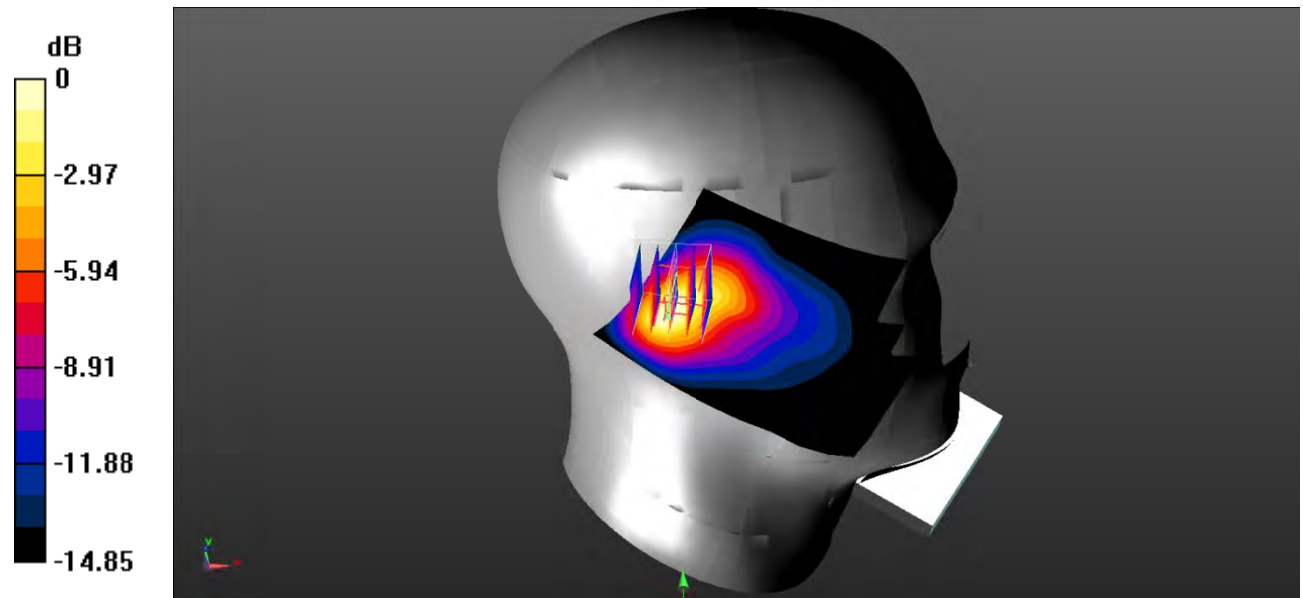

0 dB =  $0.672 \text{ W/kg} = -1.73 \text{ dBW/kg}$



**Test Plot 17#: PCS 1900\_Head Right Cheek\_Low****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.376$  S/m;  $\epsilon_r = 39.711$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.479 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

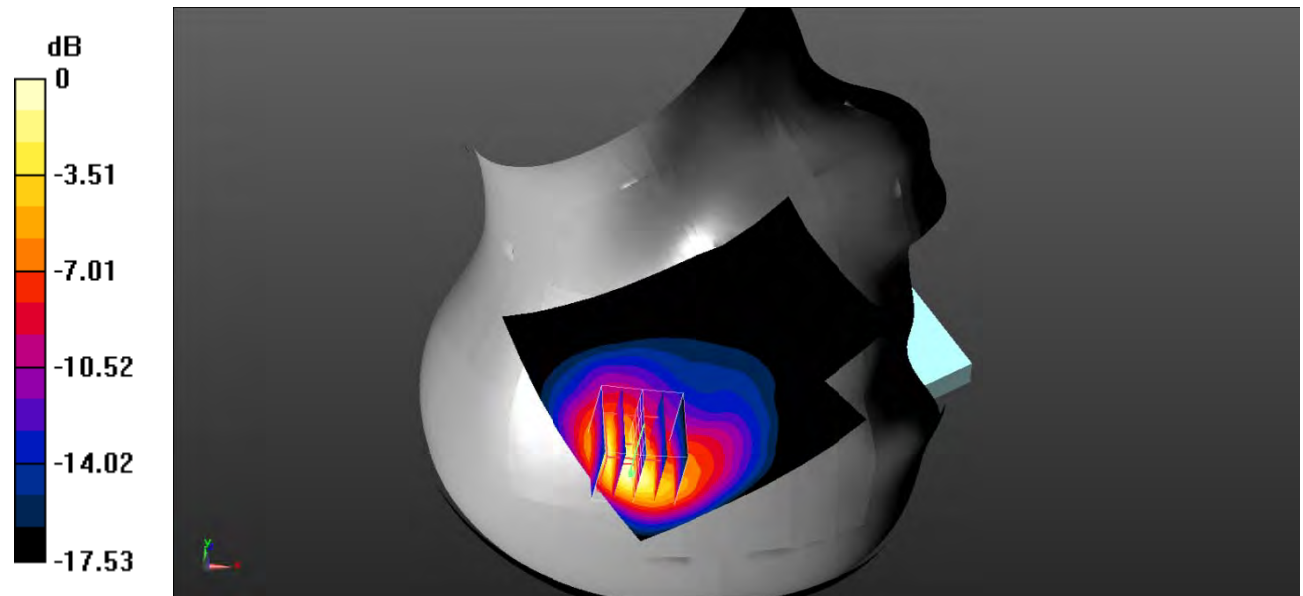

0 dB = 1.18 W/kg = 0.72 dBW/kg

**Test Plot 18#: PCS 1900\_Head Right Cheek\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.4$  S/m;  $\epsilon_r = 39.945$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.877 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.91 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.365 W/kg**

Maximum value of SAR (measured) = 0.915 W/kg

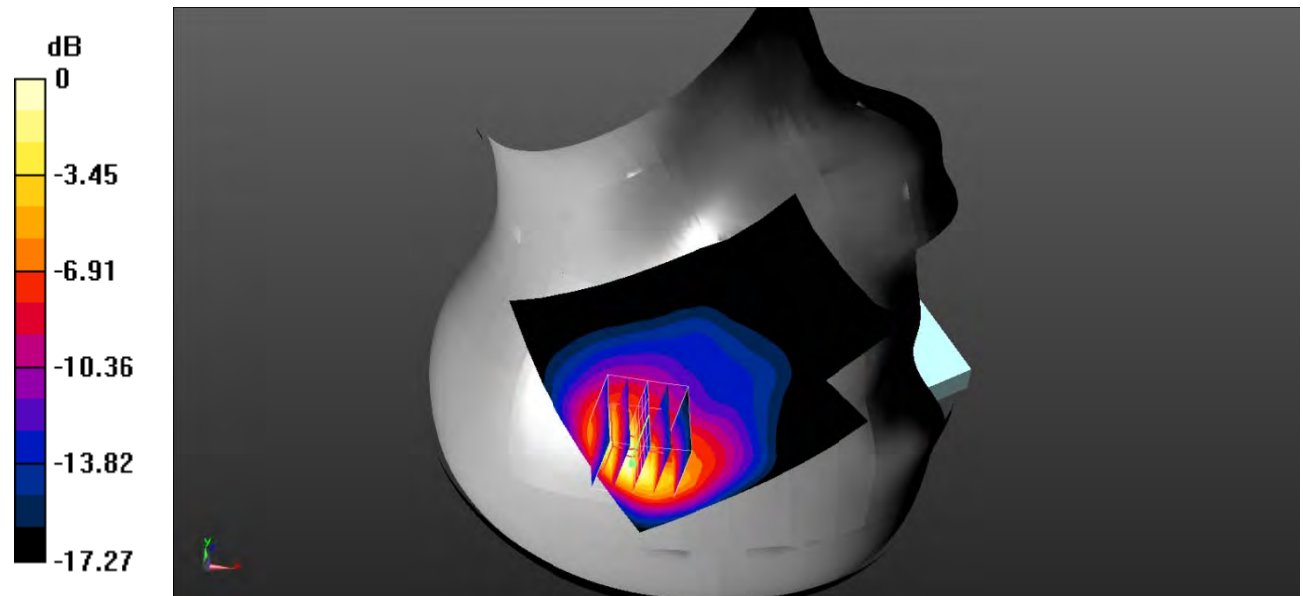

0 dB = 0.915 W/kg = -0.39 dBW/kg

**Test Plot 19#: PCS 1900\_Head Right Cheek\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 40.159$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.04 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.82 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.937 W/kg; SAR(10 g) = 0.446 W/kg**

Maximum value of SAR (measured) = 1.12 W/kg

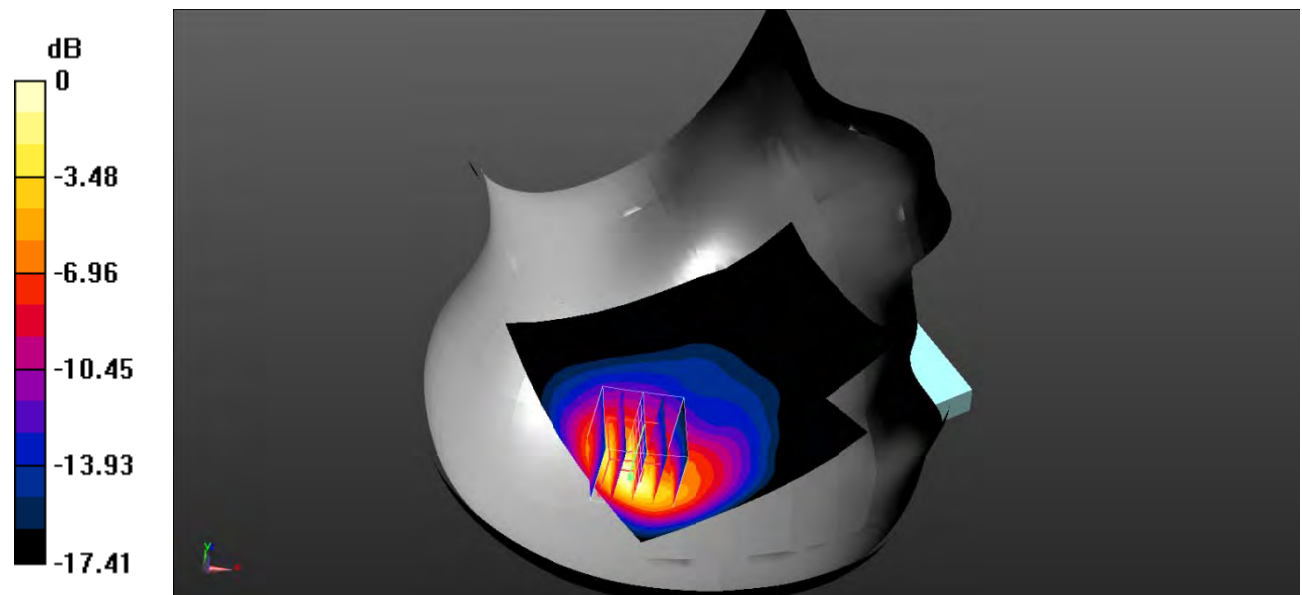

0 dB = 1.12 W/kg = 0.49 dBW/kg

**Test Plot 20#: PCS 1900\_Head Right Tilt\_Low**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.376 \text{ S/m}$ ;  $\epsilon_r = 39.711$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.63 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.12 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 2.70 W/kg  
**SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.624 W/kg**  
 Maximum value of SAR (measured) = 1.64 W/kg

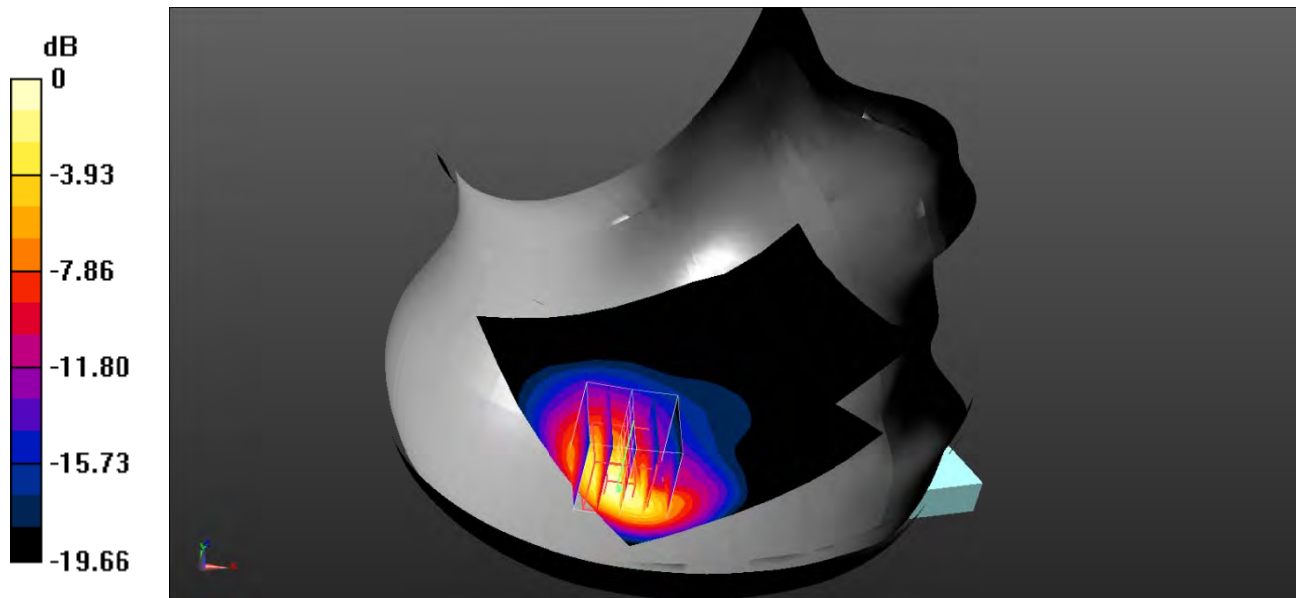

0 dB = 1.64 W/kg = 2.15 dBW/kg

**Test Plot 21#: PCS 1900\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.62 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.43 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 2.61 W/kg  
**SAR(1 g) = 1.29 W/kg; SAR(10 g) = 0.591 W/kg**  
 Maximum value of SAR (measured) = 1.58 W/kg

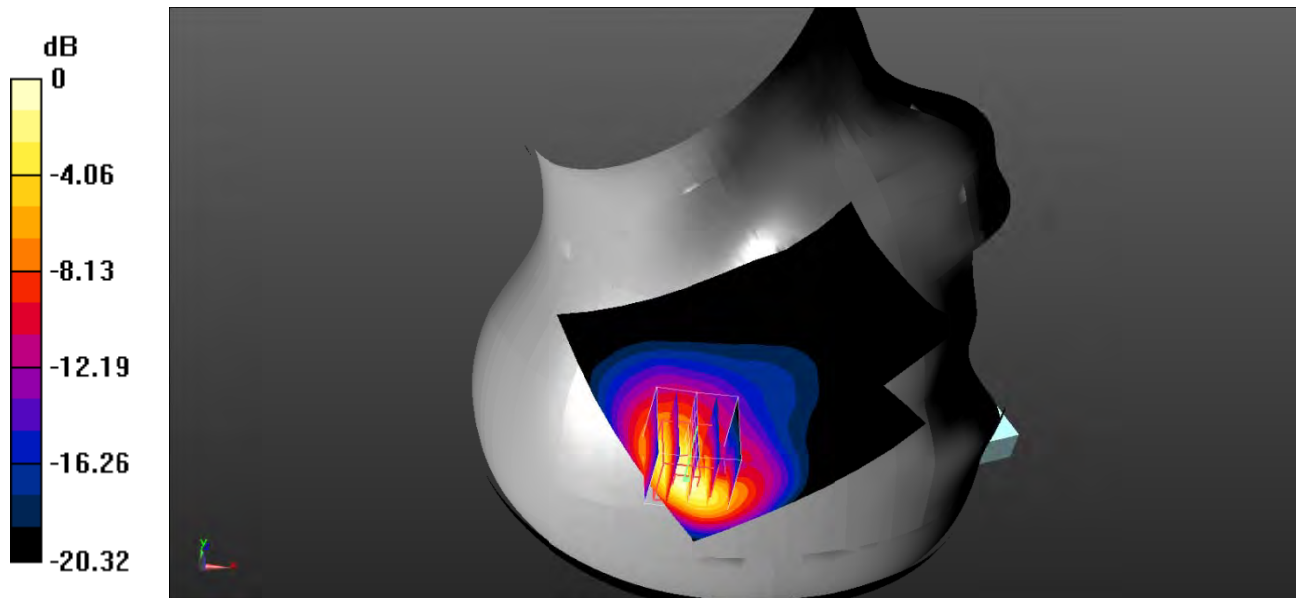

0 dB = 1.58 W/kg = 1.99 dBW/kg

**Test Plot 22#: PCS 1900\_Head Right Tilt\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 40.159$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 1.33 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.19 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.496 W/kg**

Maximum value of SAR (measured) = 1.33 W/kg

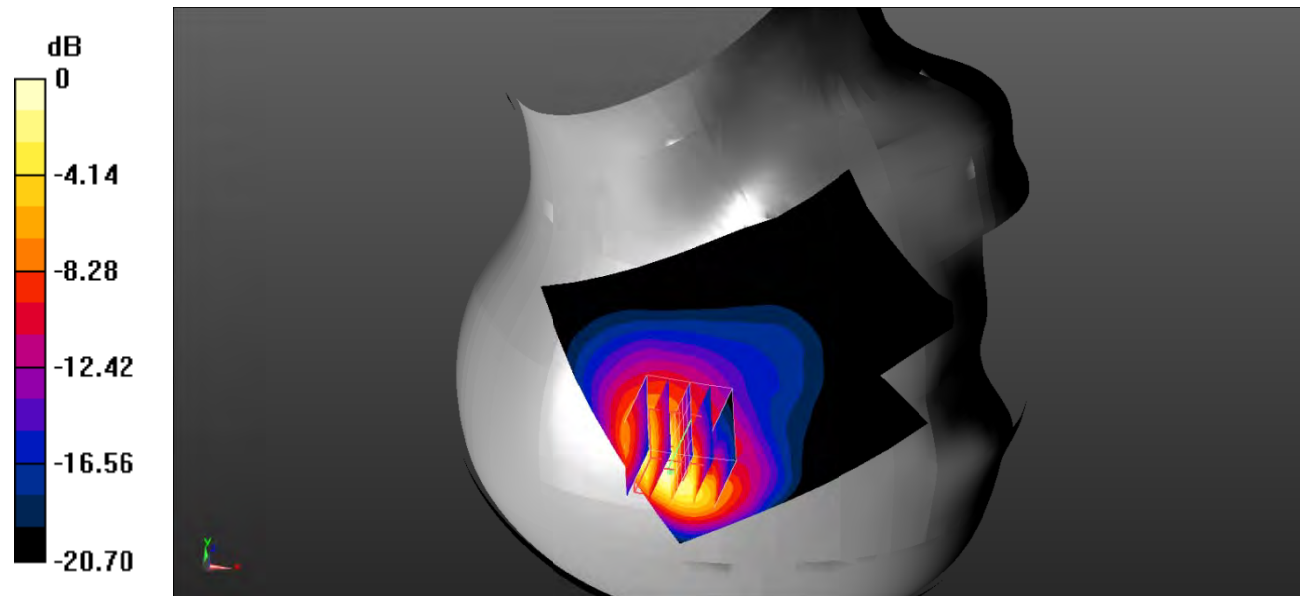

0 dB = 1.33 W/kg = 1.24 dBW/kg

**Test Plot 23#: PCS 1900\_Body Worn Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.304 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.580 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.433 \text{ W/kg}$

**SAR(1 g) =  $0.267 \text{ W/kg}$ ; SAR(10 g) =  $0.154 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.293 \text{ W/kg}$

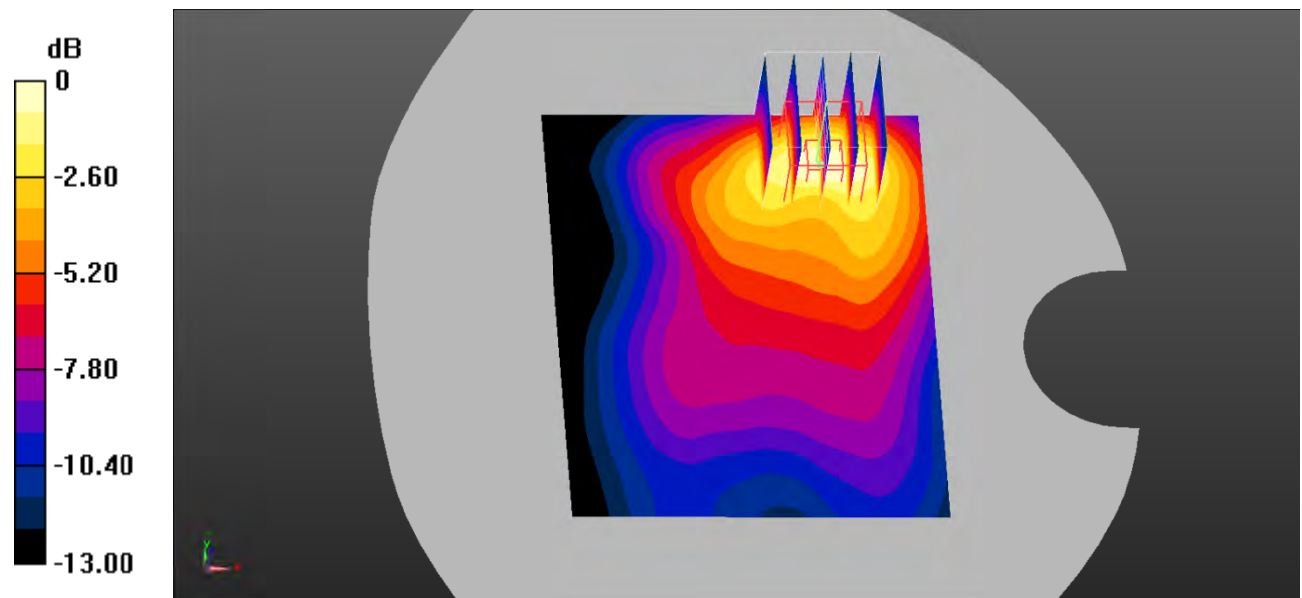

0 dB =  $0.293 \text{ W/kg} = -5.33 \text{ dBW/kg}$

**Test Plot 24#: PCS 1900\_Body Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.526 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.797 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.746 \text{ W/kg}$   
**SAR(1 g) =  $0.457 \text{ W/kg}$ ; SAR(10 g) =  $0.263 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.512 \text{ W/kg}$

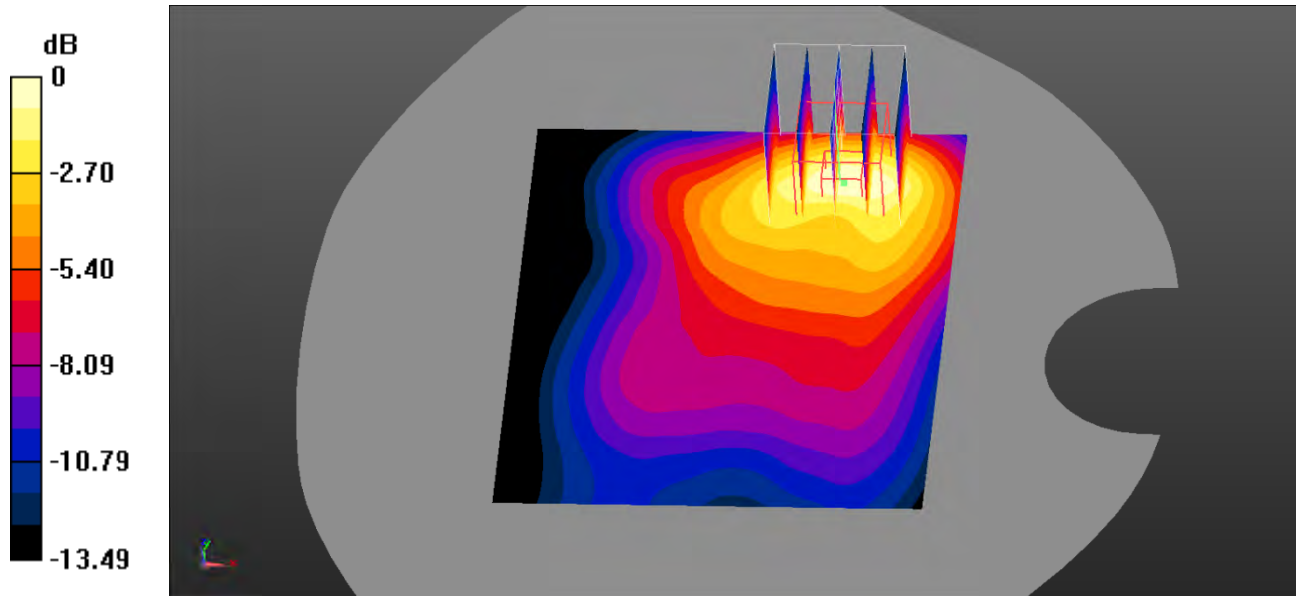

0 dB =  $0.512 \text{ W/kg} = -2.91 \text{ dBW/kg}$



**Test Plot 25#: PCS 1900\_Body Left\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0868 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.704 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.122 \text{ W/kg}$   
**SAR(1 g) =  $0.081 \text{ W/kg}$ ; SAR(10 g) =  $0.054 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0876 \text{ W/kg}$

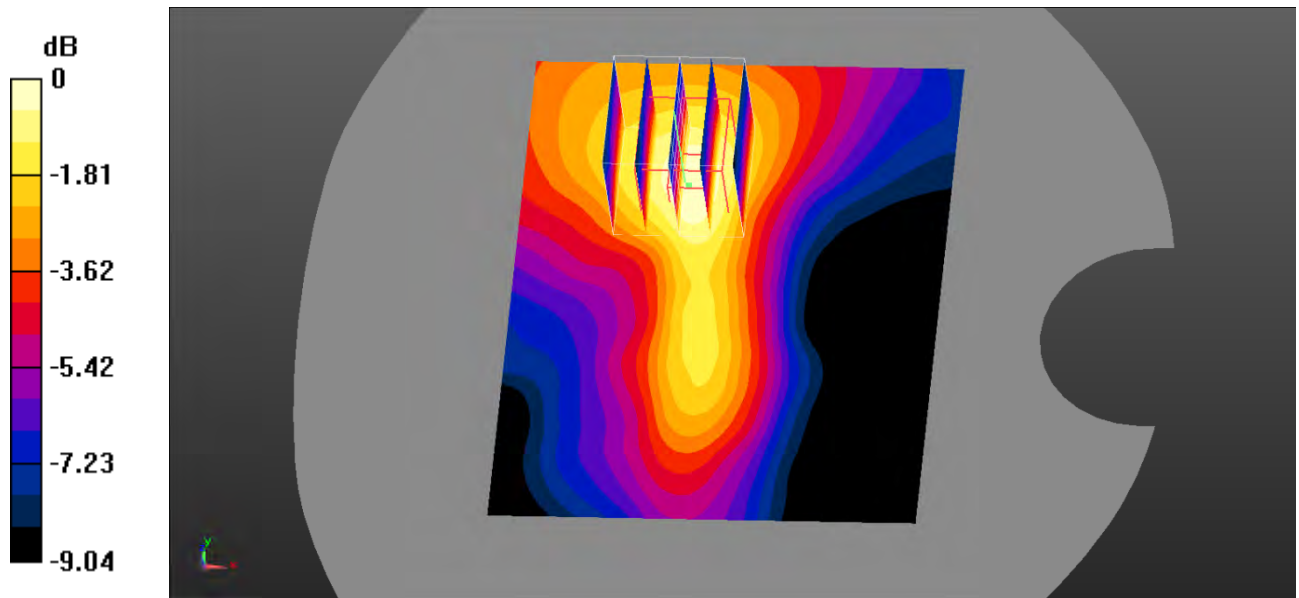

0 dB =  $0.0876 \text{ W/kg}$  =  $-10.57 \text{ dBW/kg}$

**Test Plot 26#: PCS 1900\_Body Top\_Low**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.376 \text{ S/m}$ ;  $\epsilon_r = 39.711$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.958 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.16 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.42 \text{ W/kg}$   
**SAR(1 g) =  $0.823 \text{ W/kg}$ ; SAR(10 g) =  $0.435 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.904 \text{ W/kg}$

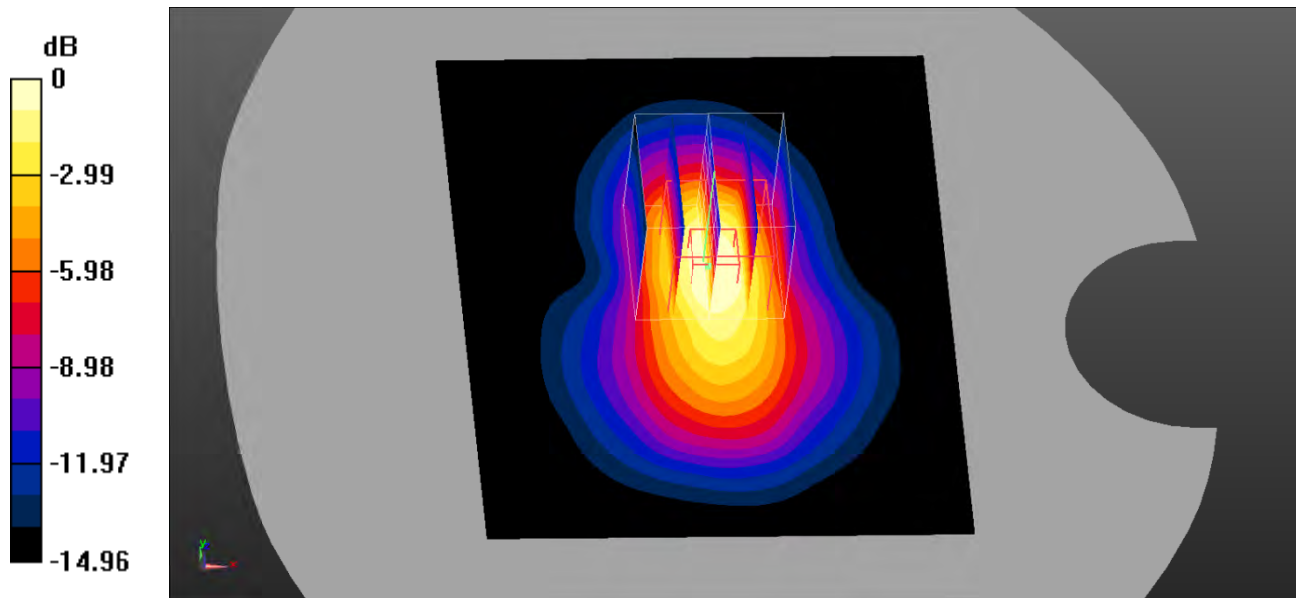

0 dB =  $0.904 \text{ W/kg}$  =  $-0.44 \text{ dBW/kg}$

**Test Plot 27#: PCS 1900\_Body Top\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.918 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $20.40 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.36 \text{ W/kg}$   
**SAR(1 g) =  $0.772 \text{ W/kg}$ ; SAR(10 g) =  $0.401 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.876 \text{ W/kg}$

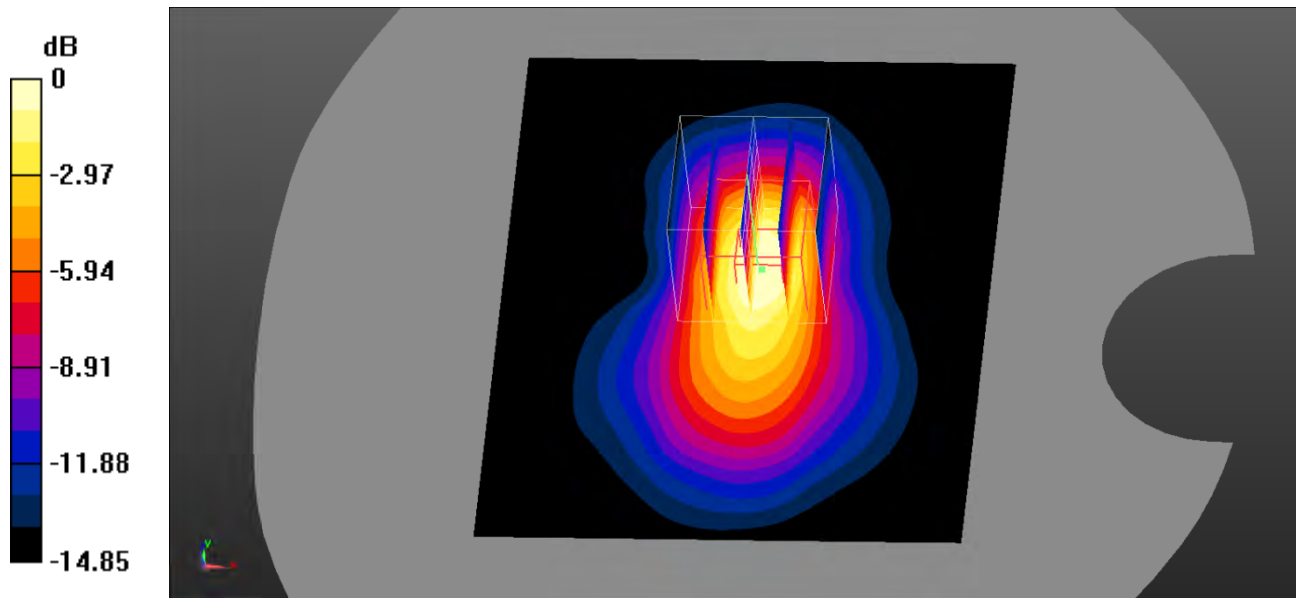

0 dB =  $0.876 \text{ W/kg}$  =  $-0.57 \text{ dBW/kg}$

**Test Plot 28#: PCS 1900\_Body Top\_High**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic GPRS-2 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.438 \text{ S/m}$ ;  $\epsilon_r = 40.159$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.709 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.01 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.08 \text{ W/kg}$   
**SAR(1 g) =  $0.602 \text{ W/kg}$ ; SAR(10 g) =  $0.311 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.667 \text{ W/kg}$

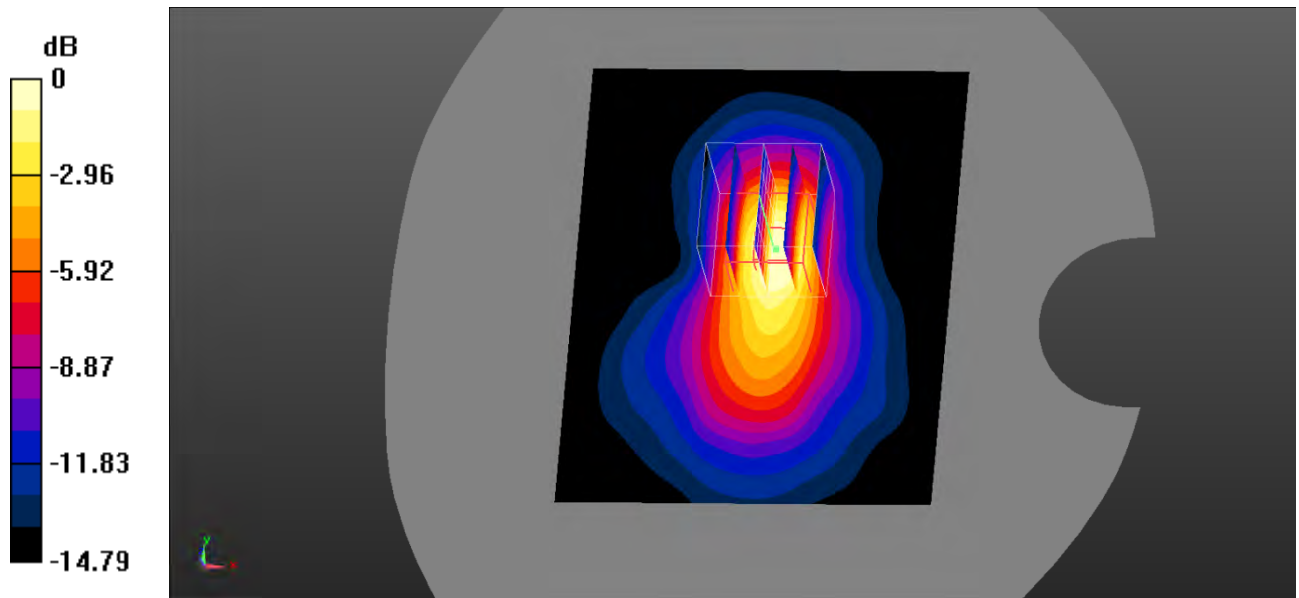

0 dB =  $0.667 \text{ W/kg}$  =  $-1.76 \text{ dBW/kg}$

**Test Plot 29#: WCDMA Band 2\_Head Left Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.297 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.30 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.467 \text{ W/kg}$   
**SAR(1 g) =  $0.275 \text{ W/kg}$ ; SAR(10 g) =  $0.152 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.296 \text{ W/kg}$

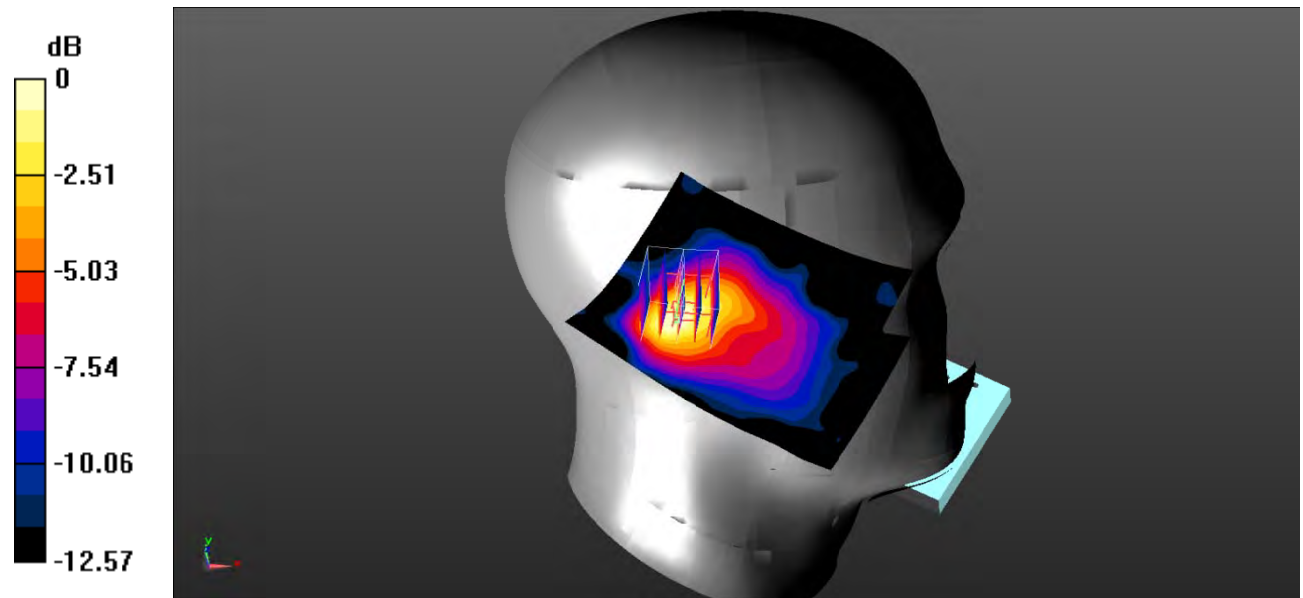

0 dB =  $0.296 \text{ W/kg}$  =  $-5.29 \text{ dBW/kg}$

**Test Plot 30#: WCDMA Band 2\_Head Left Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.362 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.30 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.605 \text{ W/kg}$   
**SAR(1 g) =  $0.329 \text{ W/kg}$ ; SAR(10 g) =  $0.162 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.371 \text{ W/kg}$

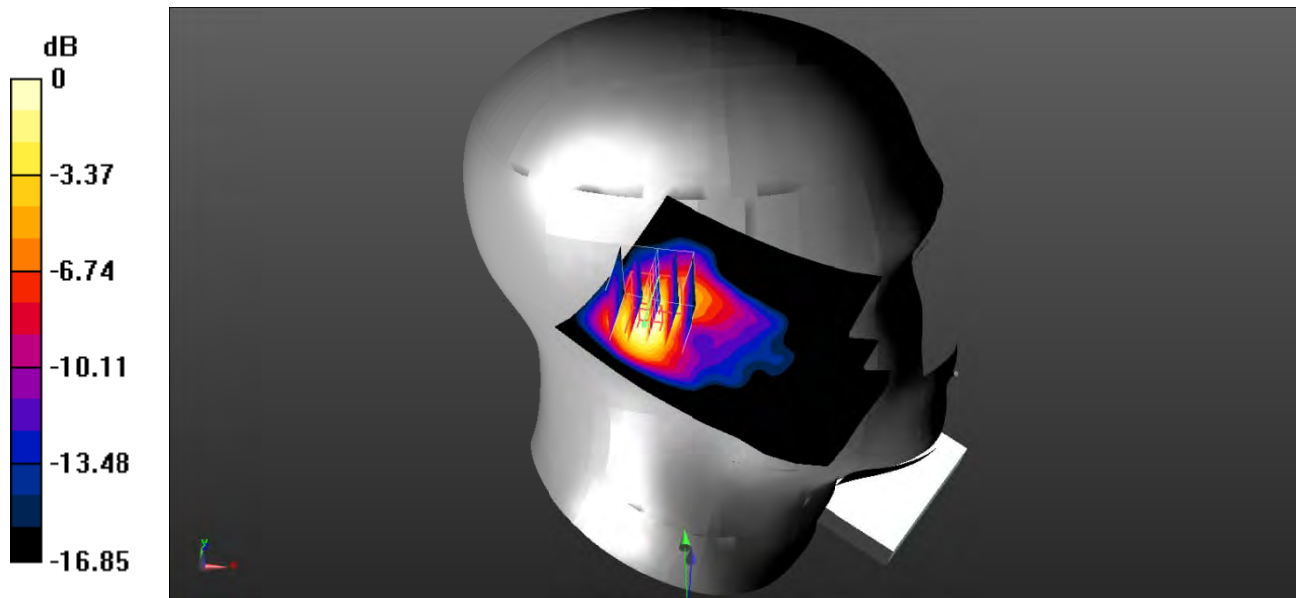

0 dB =  $0.371 \text{ W/kg}$  =  $-4.31 \text{ dBW/kg}$

**Test Plot 31#: WCDMA Band 2\_Head Right Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.388 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.947 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.629 \text{ W/kg}$   
**SAR(1 g) =  $0.324 \text{ W/kg}$ ; SAR(10 g) =  $0.154 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.390 \text{ W/kg}$

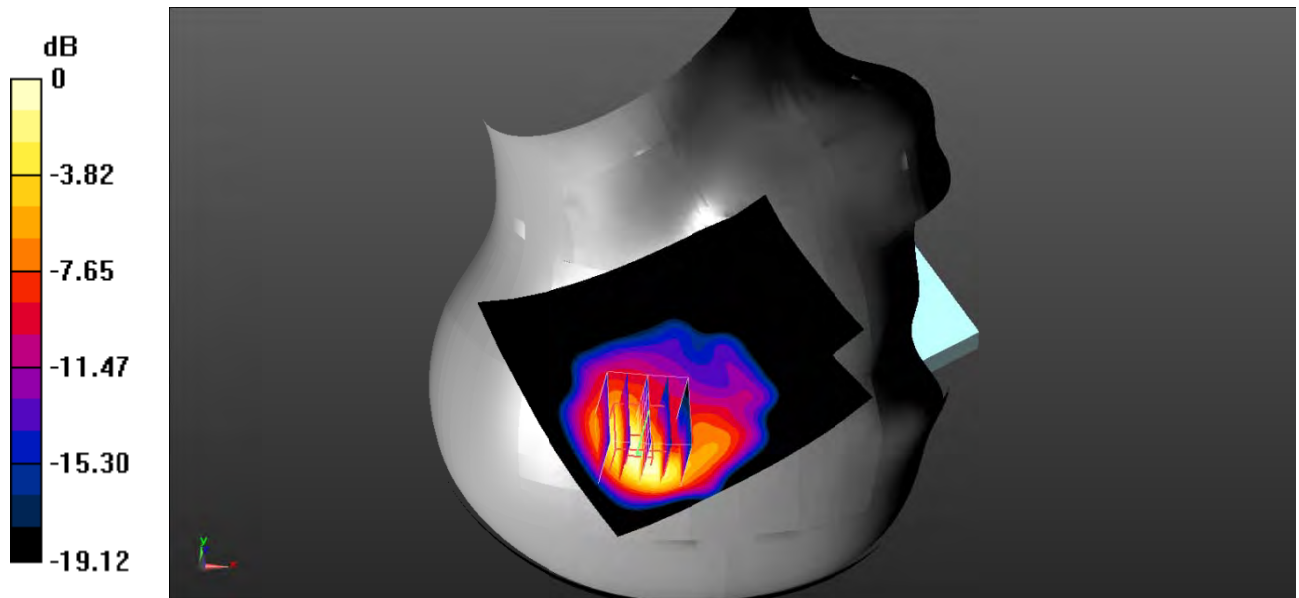

0 dB =  $0.390 \text{ W/kg}$  =  $-4.09 \text{ dBW/kg}$

**Test Plot 32#: WCDMA Band 2\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.538 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.40 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.07 \text{ W/kg}$   
**SAR(1 g) =  $0.514 \text{ W/kg}$ ; SAR(10 g) =  $0.232 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.574 \text{ W/kg}$

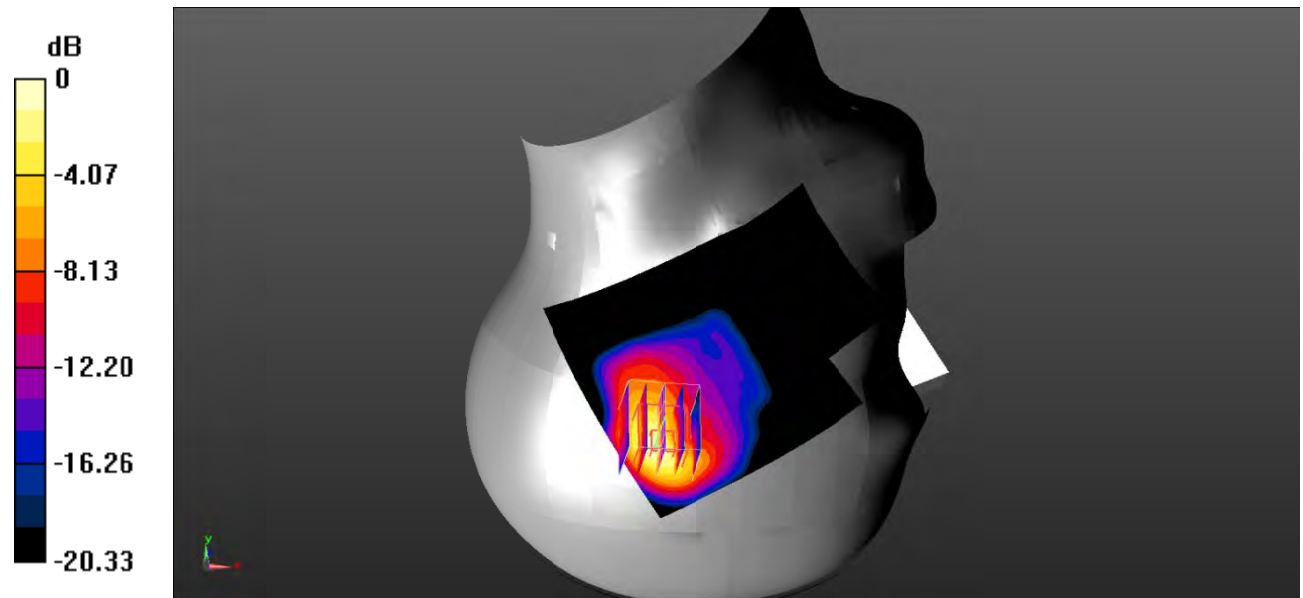

0 dB =  $0.574 \text{ W/kg}$  =  $-2.41 \text{ dBW/kg}$



**Test Plot 33#: WCDMA Band 2\_Body Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.267 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.92 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.346 \text{ W/kg}$   
**SAR(1 g) =  $0.205 \text{ W/kg}$ ; SAR(10 g) =  $0.130 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.224 \text{ W/kg}$

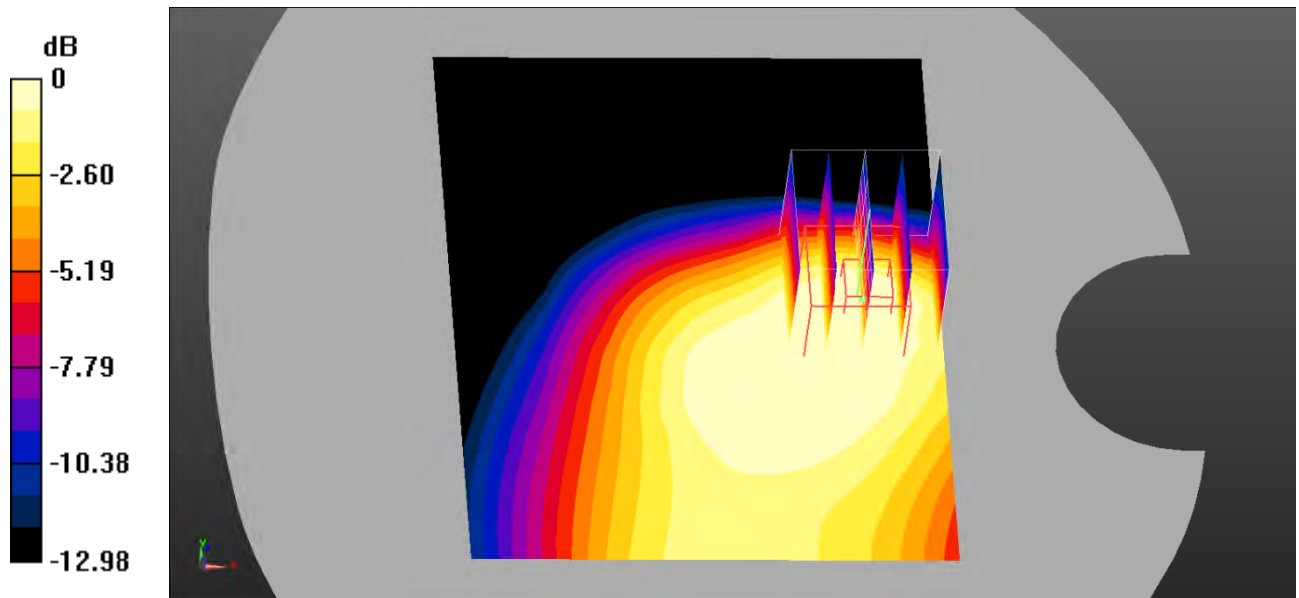

0 dB =  $0.224 \text{ W/kg}$  =  $-6.50 \text{ dBW/kg}$

**Test Plot 34#: WCDMA Band 2\_Body Left\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0246 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.731 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0370 \text{ W/kg}$   
**SAR(1 g) =  $0.021 \text{ W/kg}$ ; SAR(10 g) =  $0.014 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0222 \text{ W/kg}$

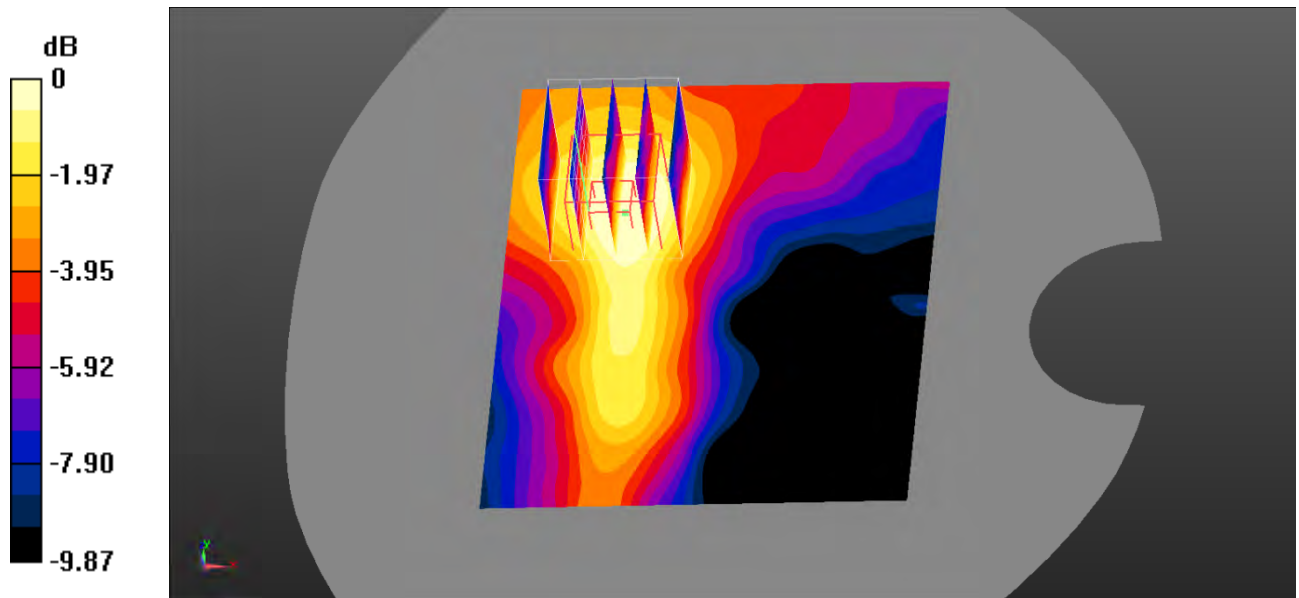

0 dB =  $0.0222 \text{ W/kg}$  =  $-16.54 \text{ dBW/kg}$

**Test Plot 35#: WCDMA Band 2\_Body Top\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.243 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.739 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.375 \text{ W/kg}$   
**SAR(1 g) =  $0.212 \text{ W/kg}$ ; SAR(10 g) =  $0.109 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.234 \text{ W/kg}$

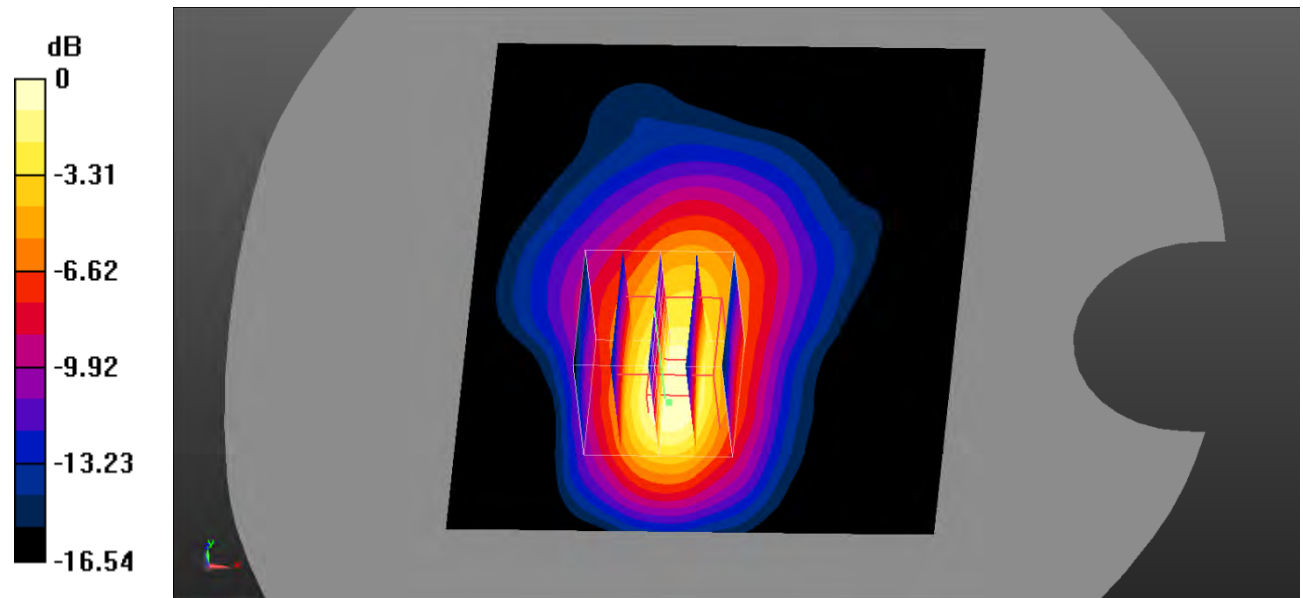

0 dB =  $0.234 \text{ W/kg}$  =  $-6.31 \text{ dBW/kg}$

**Test Plot 36#: WCDMA Band 4\_Head Left Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.216 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.82 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.301 \text{ W/kg}$   
**SAR(1 g) =  $0.195 \text{ W/kg}$ ; SAR(10 g) =  $0.113 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.203 \text{ W/kg}$

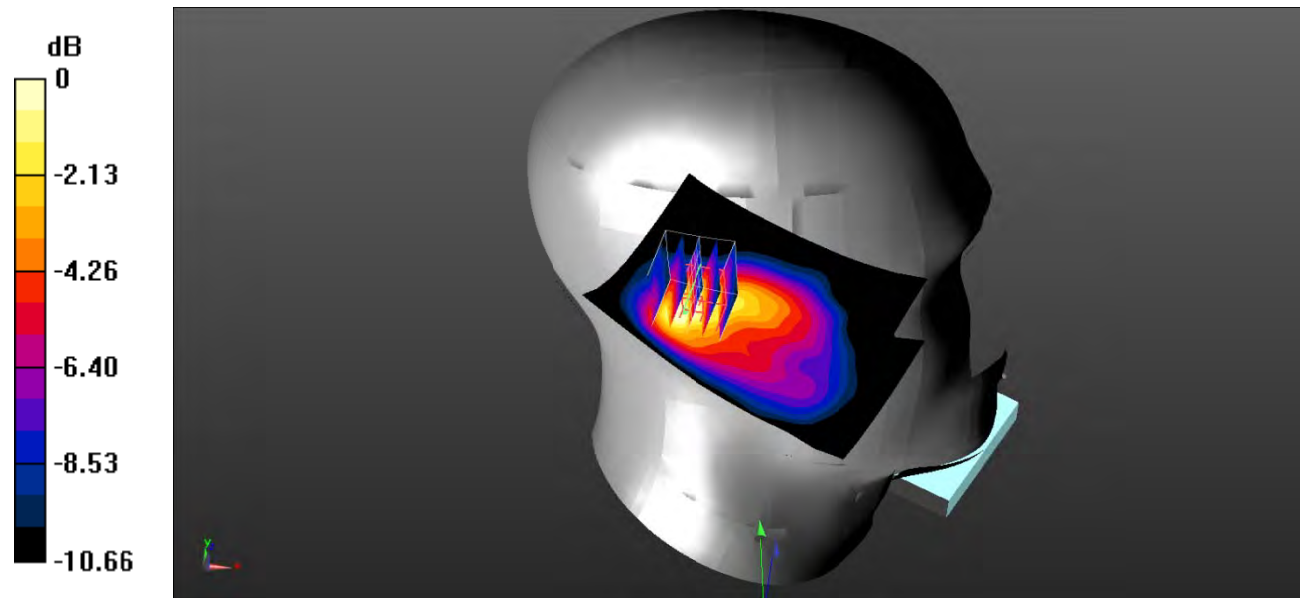

0 dB =  $0.203 \text{ W/kg}$  =  $-6.93 \text{ dBW/kg}$

**Test Plot 37#: WCDMA Band 4\_Head Left Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.428 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $14.99 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.576 \text{ W/kg}$   
**SAR(1 g) =  $0.341 \text{ W/kg}$ ; SAR(10 g) =  $0.179 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.360 \text{ W/kg}$

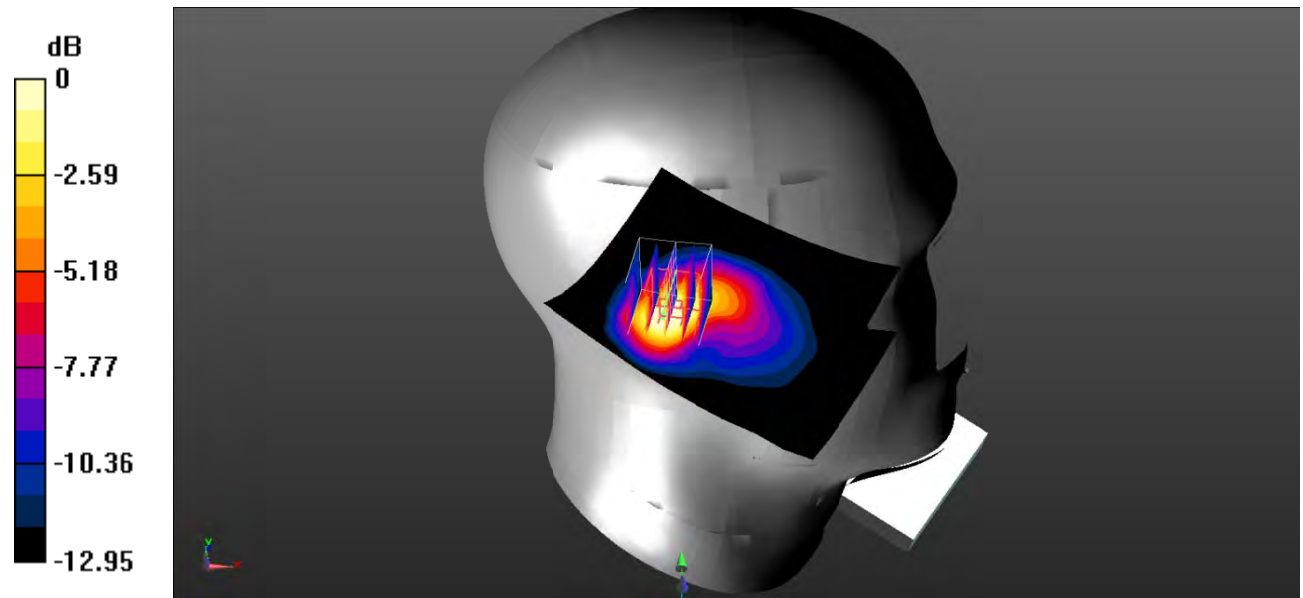

0 dB =  $0.360 \text{ W/kg}$  =  $-4.44 \text{ dBW/kg}$

**Test Plot 38#: WCDMA Band 4\_Head Right Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.402 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.800 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.794 \text{ W/kg}$   
**SAR(1 g) =  $0.405 \text{ W/kg}$ ; SAR(10 g) =  $0.191 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.424 \text{ W/kg}$

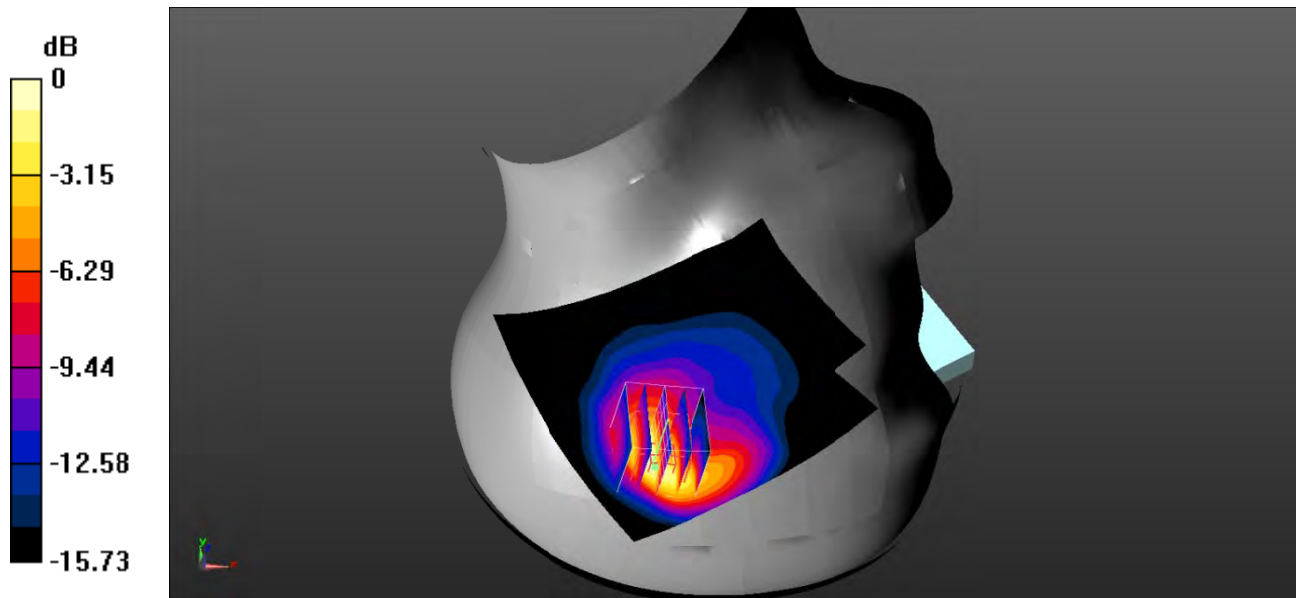

0 dB =  $0.424 \text{ W/kg}$  =  $-3.73 \text{ dBW/kg}$

**Test Plot 39#: WCDMA Band 4\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.452 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.10 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.992 W/kg  
**SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.224 W/kg**  
 Maximum value of SAR (measured) = 0.535 W/kg

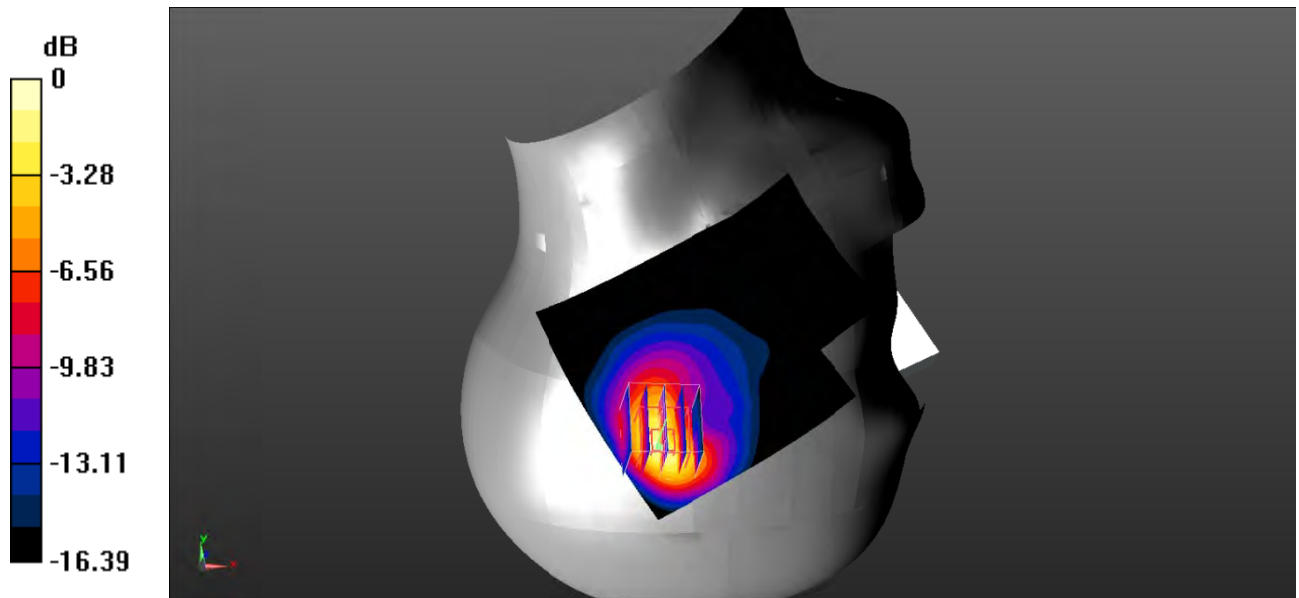

0 dB = 0.535 W/kg = -2.72 dBW/kg

**Test Plot 40#: WCDMA Band 4\_Body Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0725 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.515 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.101 \text{ W/kg}$   
**SAR(1 g) =  $0.068 \text{ W/kg}$ ; SAR(10 g) =  $0.043 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0731 \text{ W/kg}$

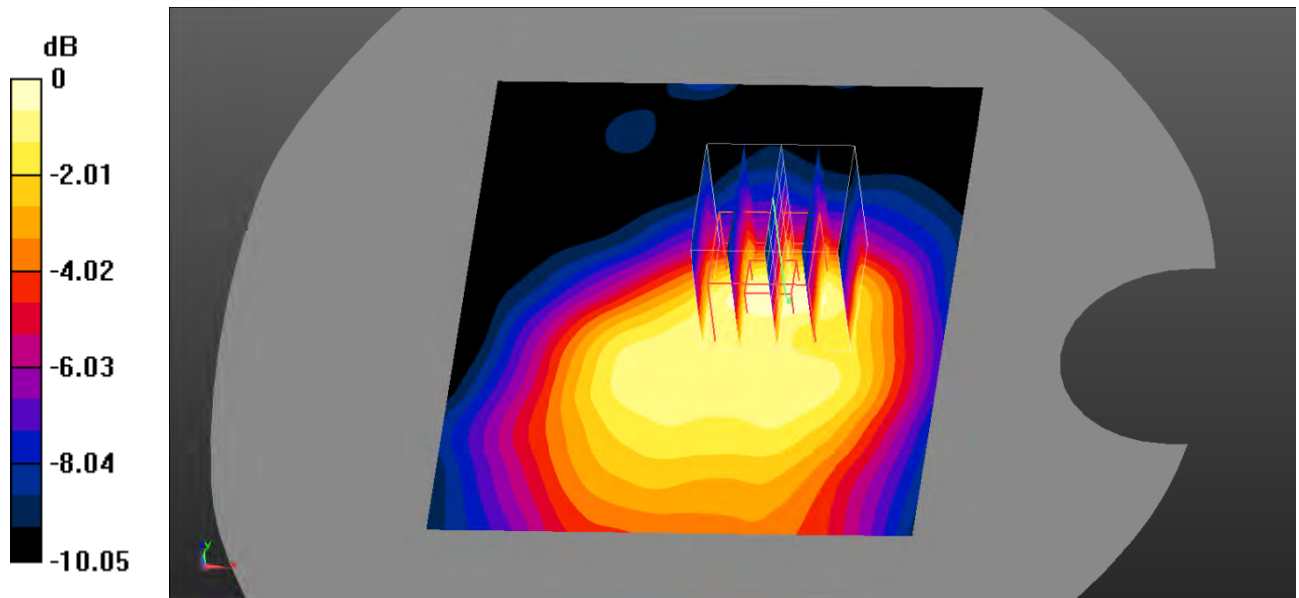

0 dB =  $0.0731 \text{ W/kg}$  =  $-11.36 \text{ dBW/kg}$



**Test Plot 41#: WCDMA Band 4\_Body Left\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0251 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.908 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0370 \text{ W/kg}$   
**SAR(1 g) =  $0.023 \text{ W/kg}$ ; SAR(10 g) =  $0.016 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0248 \text{ W/kg}$

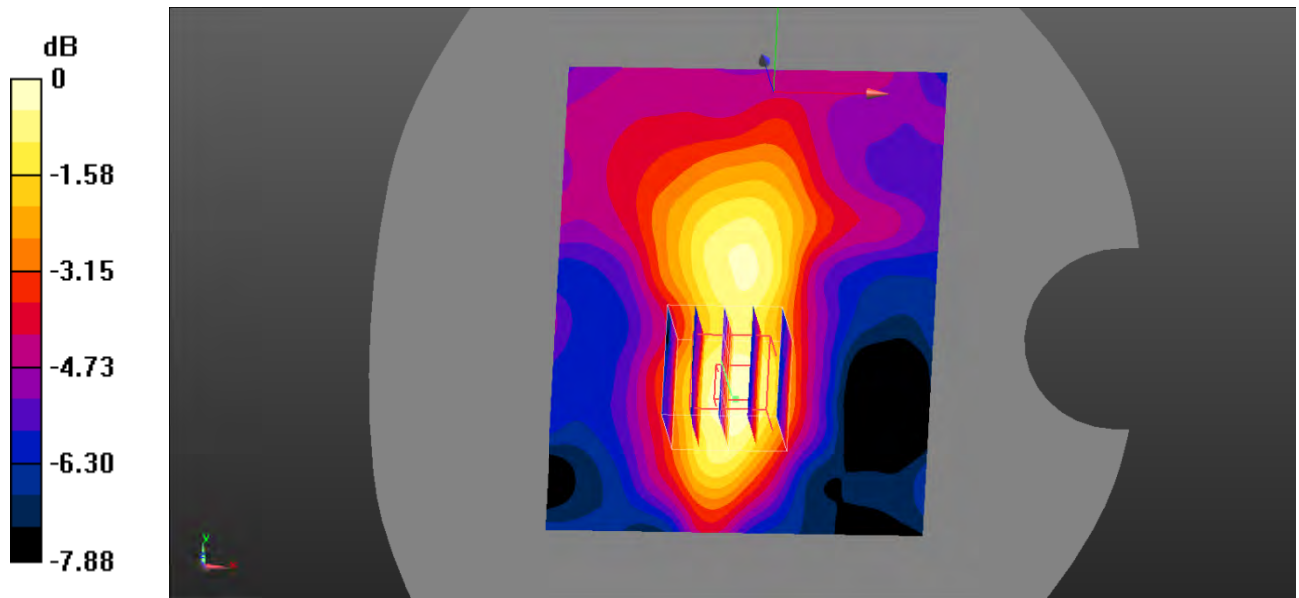

0 dB =  $0.0248 \text{ W/kg}$  =  $-16.06 \text{ dBW/kg}$

**Test Plot 42#: WCDMA Band 4\_Body Top\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.334 \text{ S/m}$ ;  $\epsilon_r = 40.773$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.235 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.92 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.370 \text{ W/kg}$   
**SAR(1 g) =  $0.209 \text{ W/kg}$ ; SAR(10 g) =  $0.105 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.229 \text{ W/kg}$

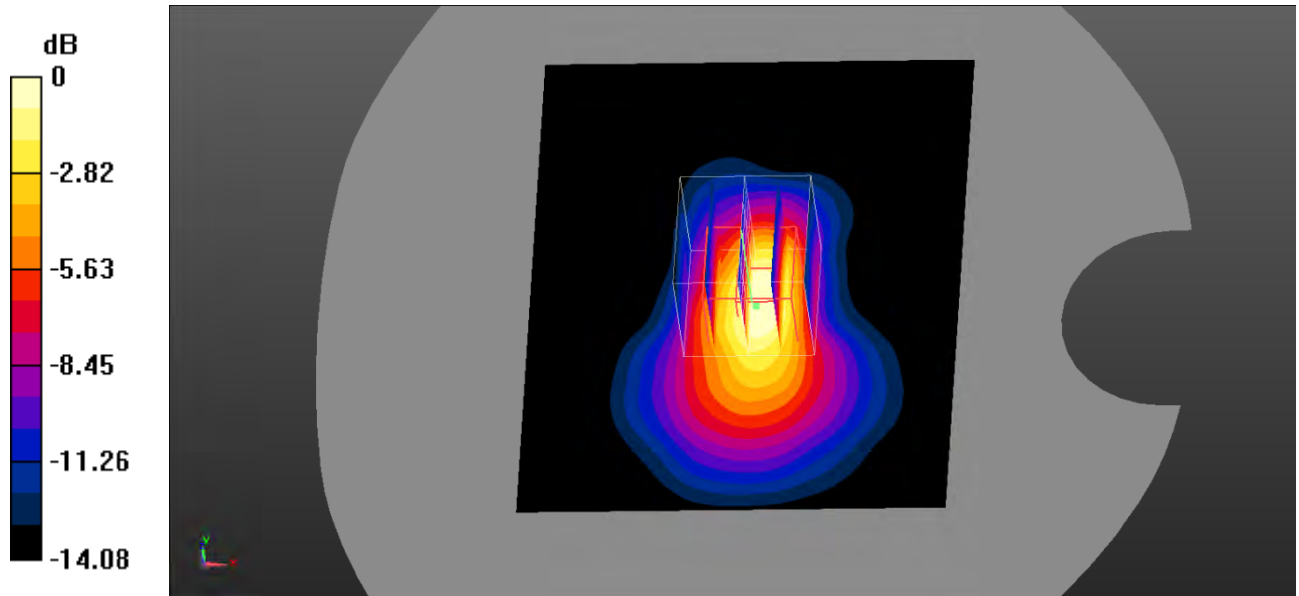

0 dB =  $0.229 \text{ W/kg}$  =  $-6.40 \text{ dBW/kg}$

**Test Plot 43#: WCDMA Band 5\_Head Left Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0671 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.667 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0810 \text{ W/kg}$   
**SAR(1 g) =  $0.063 \text{ W/kg}$ ; SAR(10 g) =  $0.046 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0661 \text{ W/kg}$

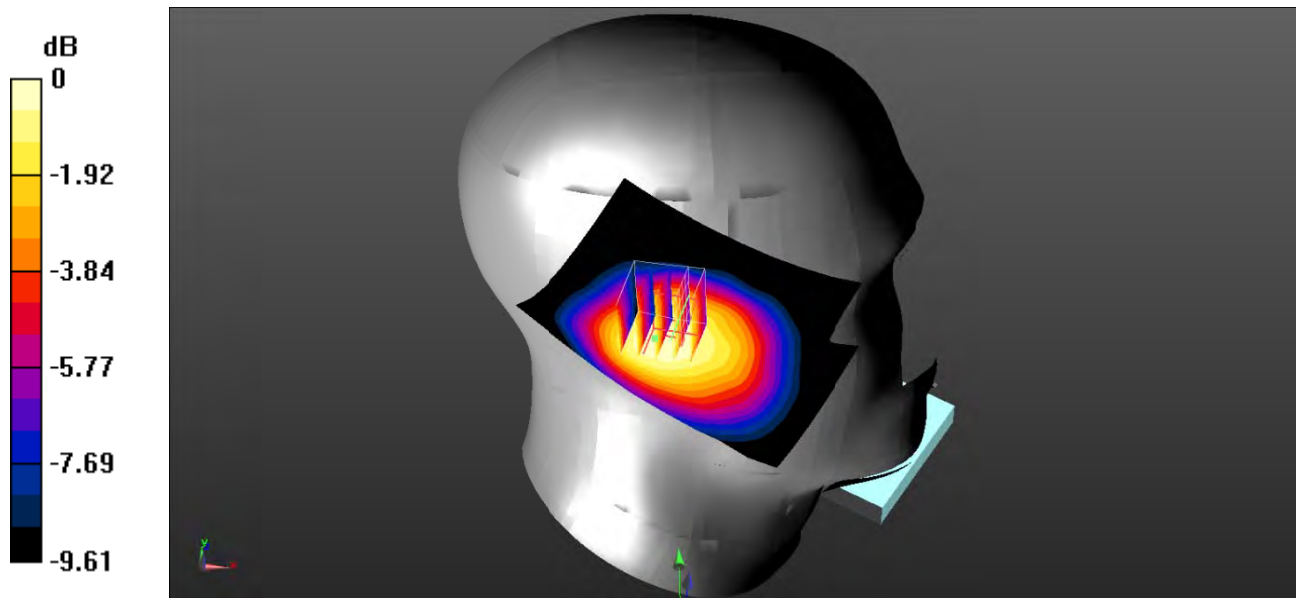

0 dB =  $0.0661 \text{ W/kg}$  =  $-11.80 \text{ dBW/kg}$

**Test Plot 44#: WCDMA Band 5\_Head Left Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0777 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.829 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0980 \text{ W/kg}$   
**SAR(1 g) =  $0.070 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0736 \text{ W/kg}$

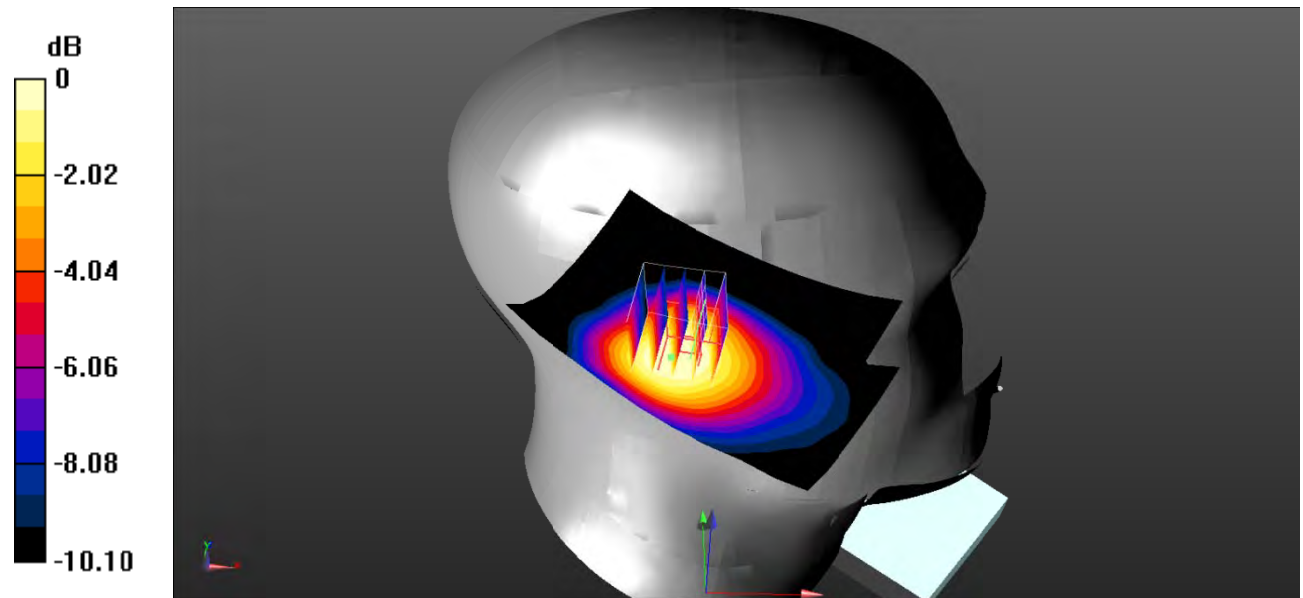

0 dB =  $0.0736 \text{ W/kg}$  =  $-11.33 \text{ dBW/kg}$

**Test Plot 45#: WCDMA Band 5\_Head Right Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.385 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.64 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.556 \text{ W/kg}$   
**SAR(1 g) =  $0.327 \text{ W/kg}$ ; SAR(10 g) =  $0.210 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.334 \text{ W/kg}$

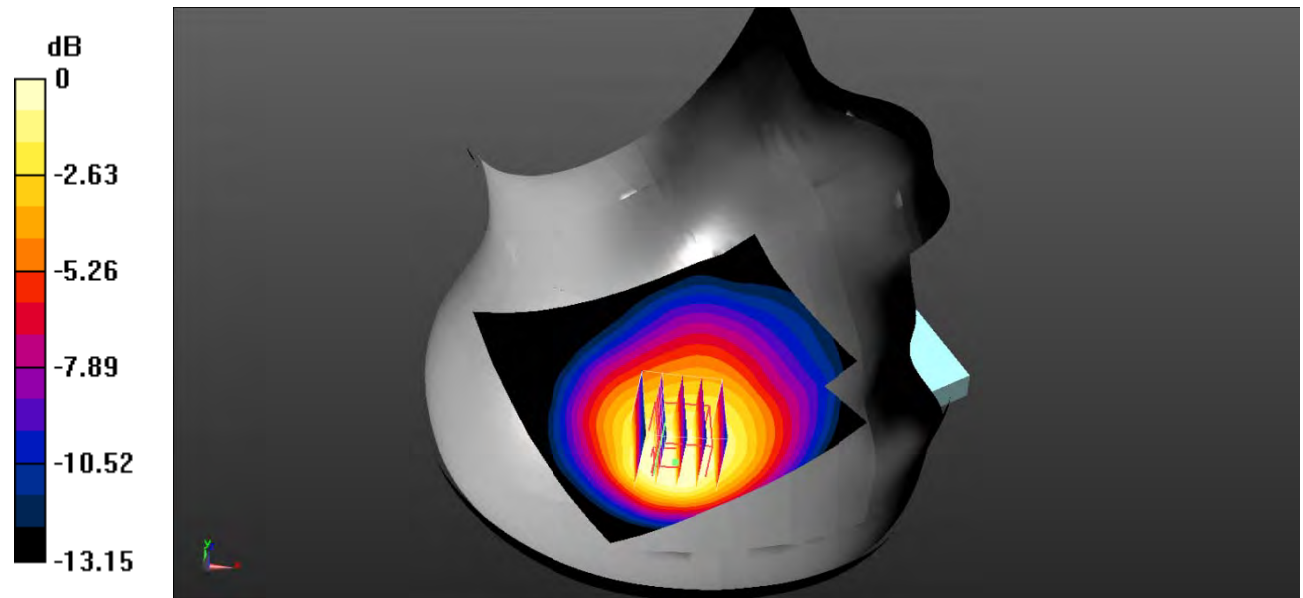

0 dB =  $0.334 \text{ W/kg}$  =  $-4.76 \text{ dBW/kg}$

**Test Plot 46#: WCDMA Band 5\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.122 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.765 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.224 \text{ W/kg}$   
**SAR(1 g) =  $0.102 \text{ W/kg}$ ; SAR(10 g) =  $0.059 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.105 \text{ W/kg}$

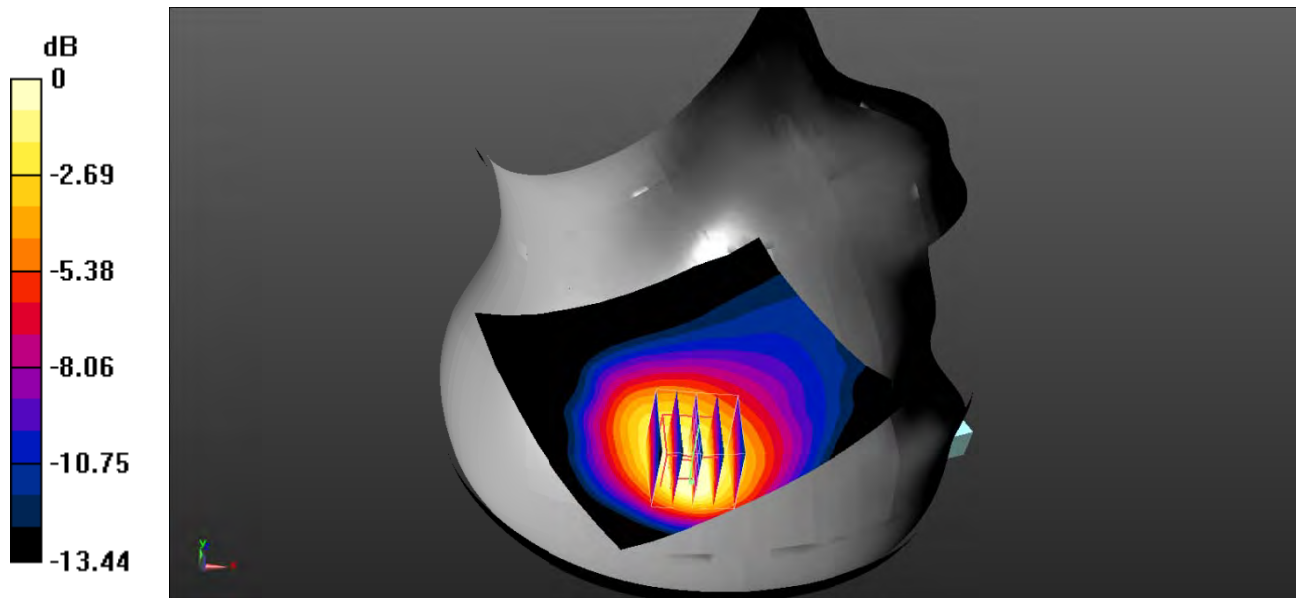

0 dB =  $0.105 \text{ W/kg}$  =  $-9.79 \text{ dBW/kg}$

**Test Plot 47#: WCDMA Band 5\_Body Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.135 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.36 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.179 \text{ W/kg}$   
**SAR(1 g) =  $0.107 \text{ W/kg}$ ; SAR(10 g) =  $0.068 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.117 \text{ W/kg}$

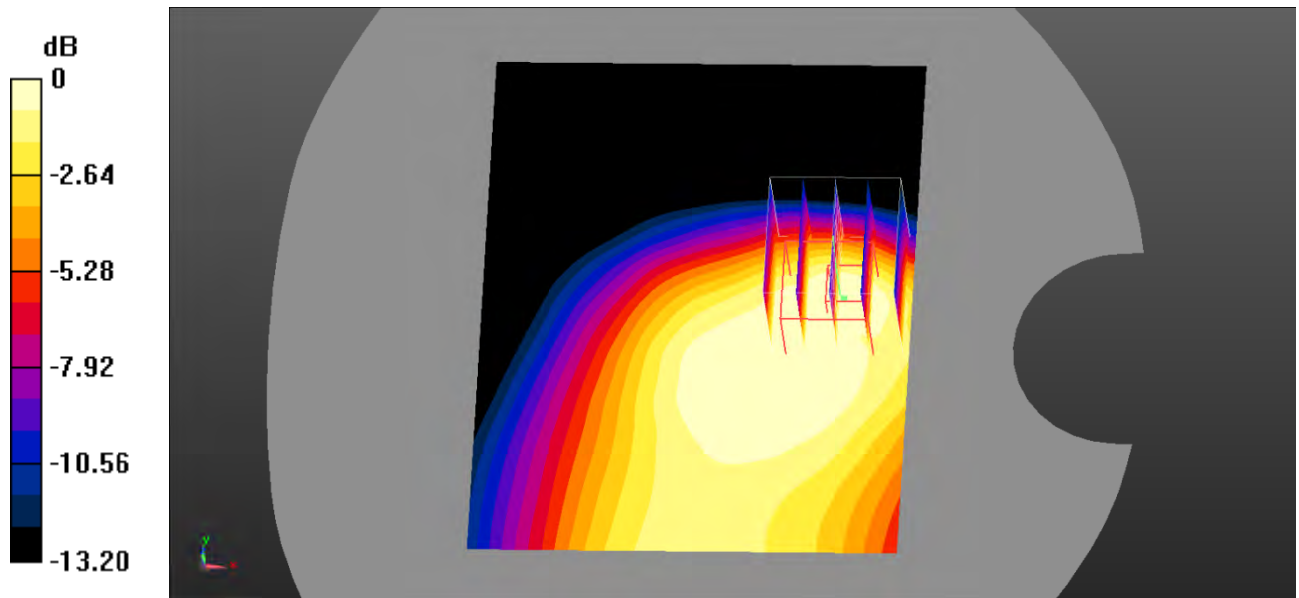

0 dB =  $0.117 \text{ W/kg}$  =  $-9.32 \text{ dBW/kg}$

**Test Plot 48#: WCDMA Band 5\_Body Left\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0337 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.872 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0440 \text{ W/kg}$   
**SAR(1 g) =  $0.032 \text{ W/kg}$ ; SAR(10 g) =  $0.023 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0337 \text{ W/kg}$

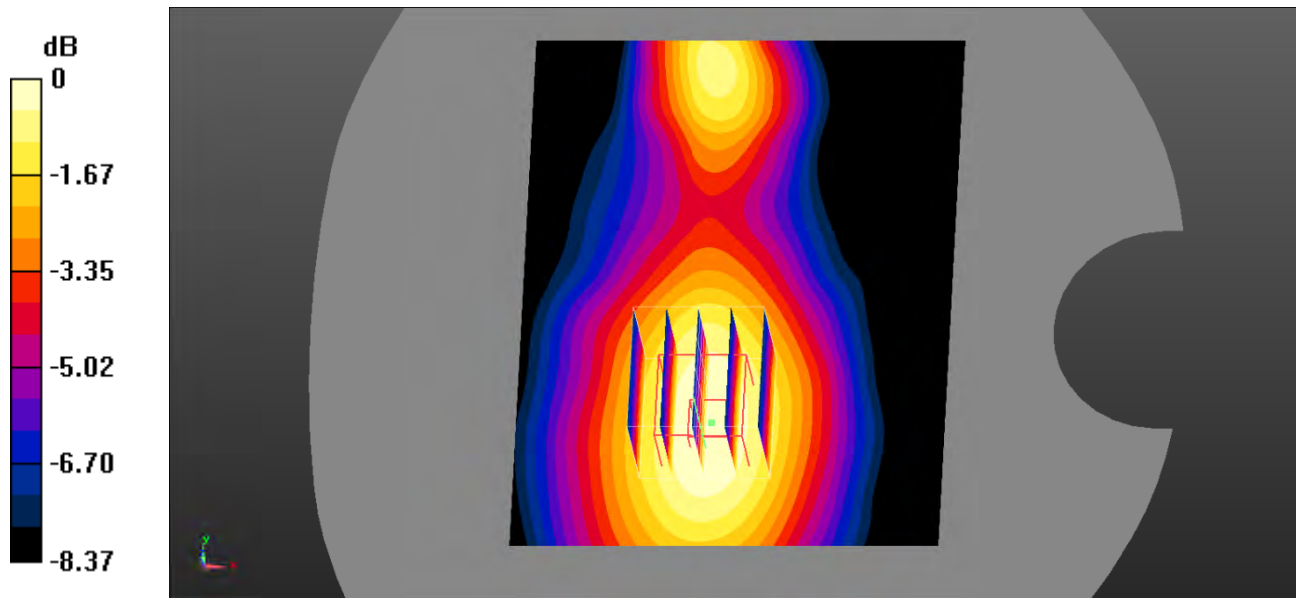

0 dB =  $0.0337 \text{ W/kg}$  =  $-14.72 \text{ dBW/kg}$



**Test Plot 49#: WCDMA Band 5\_Body Top\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 40.754$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0901 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 9.553 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.125 W/kg  
**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.054 W/kg**  
 Maximum value of SAR (measured) = 0.0870 W/kg

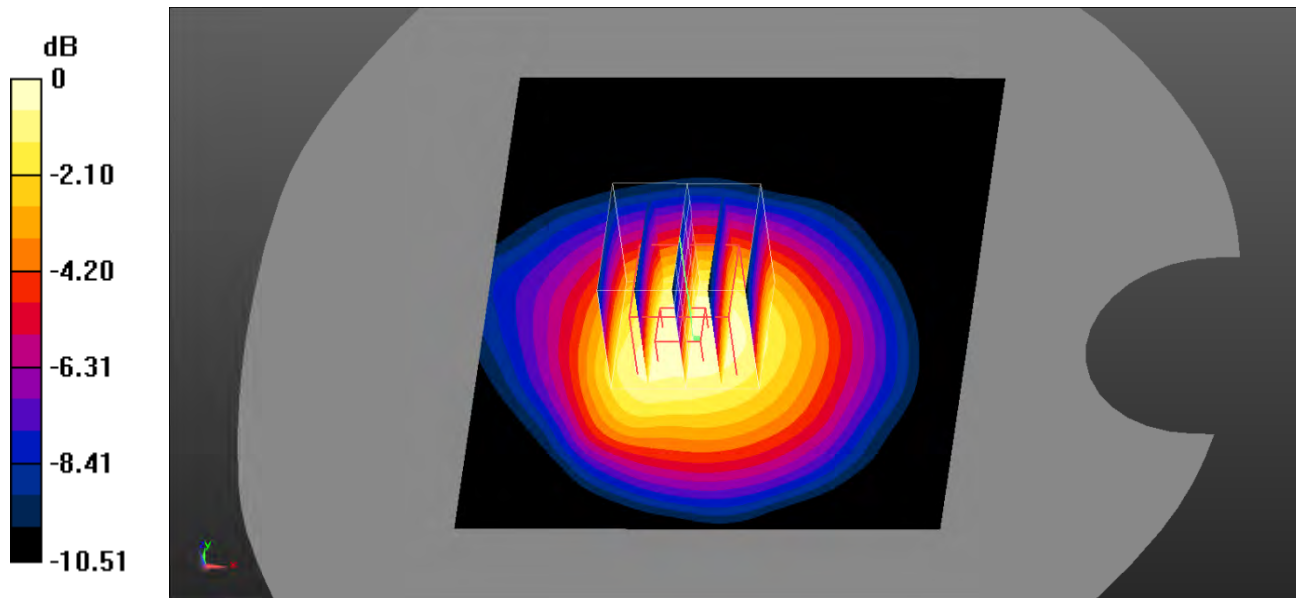

0 dB = 0.0870 W/kg = -10.60 dBW/kg

**Test Plot 50#: LTE Band 2\_Head Left Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.218 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.698 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.334 \text{ W/kg}$   
**SAR(1 g) =  $0.199 \text{ W/kg}$ ; SAR(10 g) =  $0.111 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.208 \text{ W/kg}$

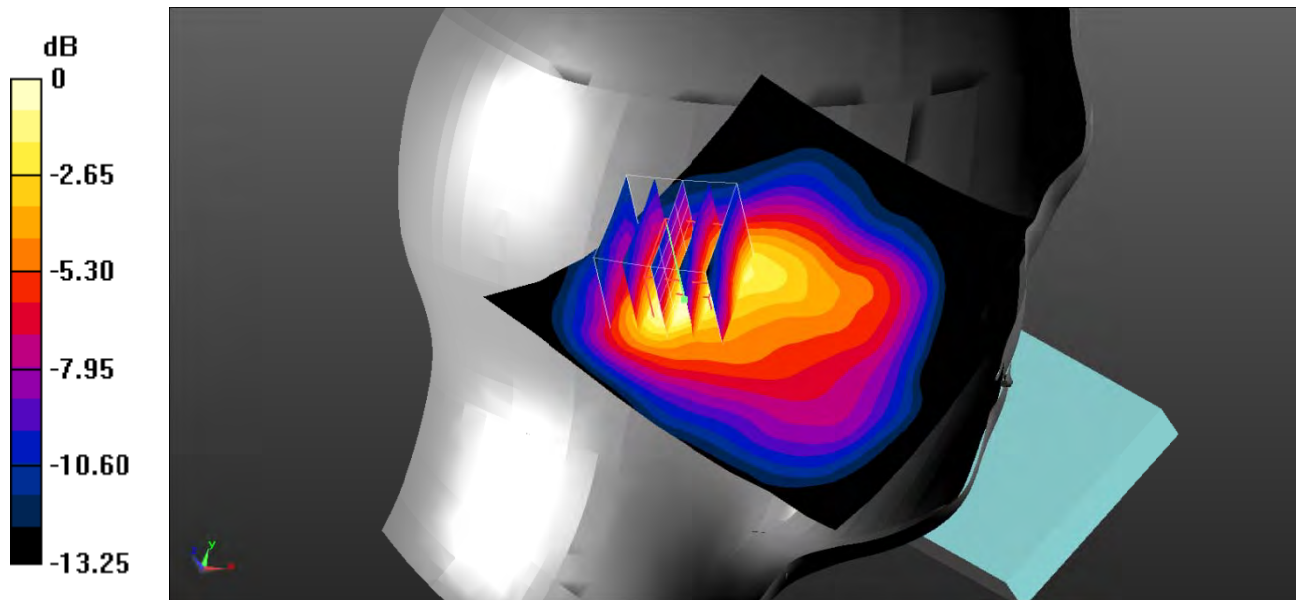

0 dB =  $0.208 \text{ W/kg} = -6.82 \text{ dBW/kg}$

**Test Plot 51#: LTE Band 2\_Head Left Check\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.165 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.293 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.243 \text{ W/kg}$   
**SAR(1 g) =  $0.144 \text{ W/kg}$ ; SAR(10 g) =  $0.081 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.158 \text{ W/kg}$

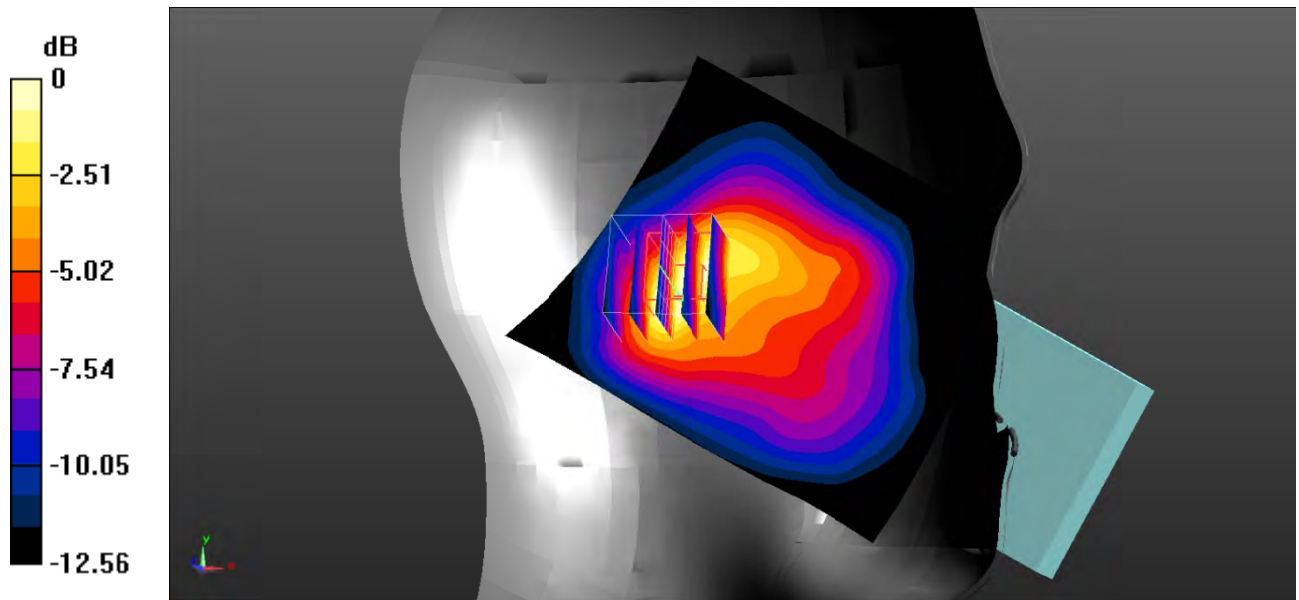

0 dB =  $0.158 \text{ W/kg} = -8.01 \text{ dBW/kg}$

**Test Plot 52#: LTE Band 2\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.457 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.20 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.796 \text{ W/kg}$   
**SAR(1 g) =  $0.434 \text{ W/kg}$ ; SAR(10 g) =  $0.216 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.477 \text{ W/kg}$

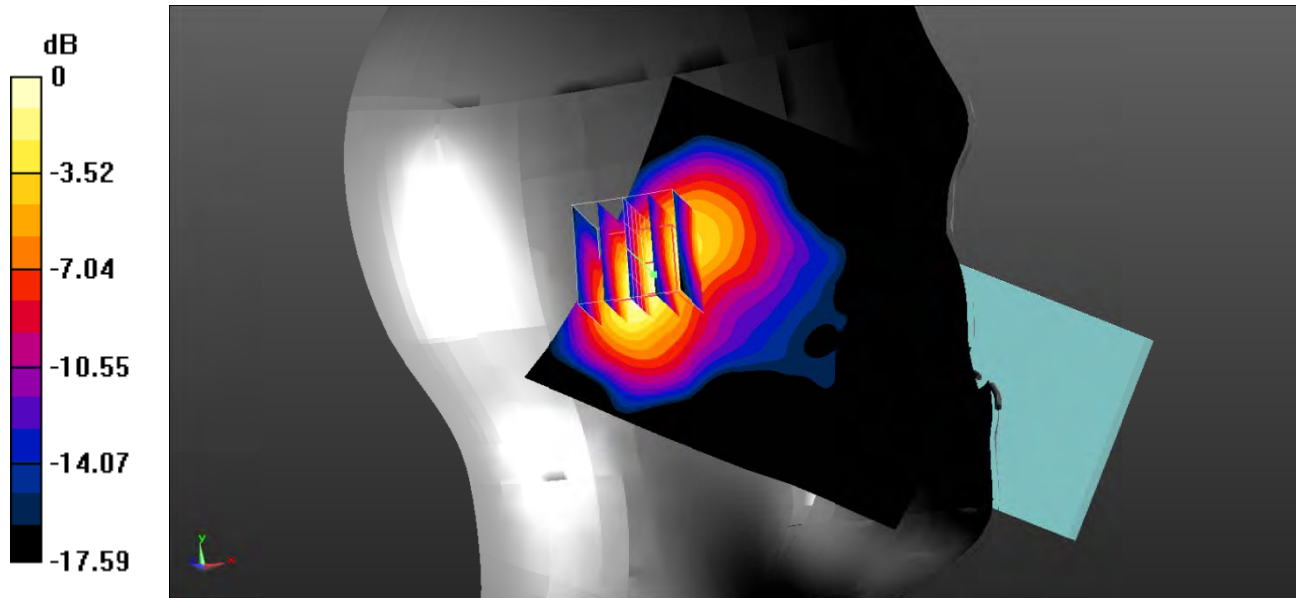

0 dB =  $0.477 \text{ W/kg} = -3.21 \text{ dBW/kg}$

**Test Plot 53#: LTE Band 2\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.341 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.472 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.584 \text{ W/kg}$   
**SAR(1 g) =  $0.312 \text{ W/kg}$ ; SAR(10 g) =  $0.155 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.350 \text{ W/kg}$

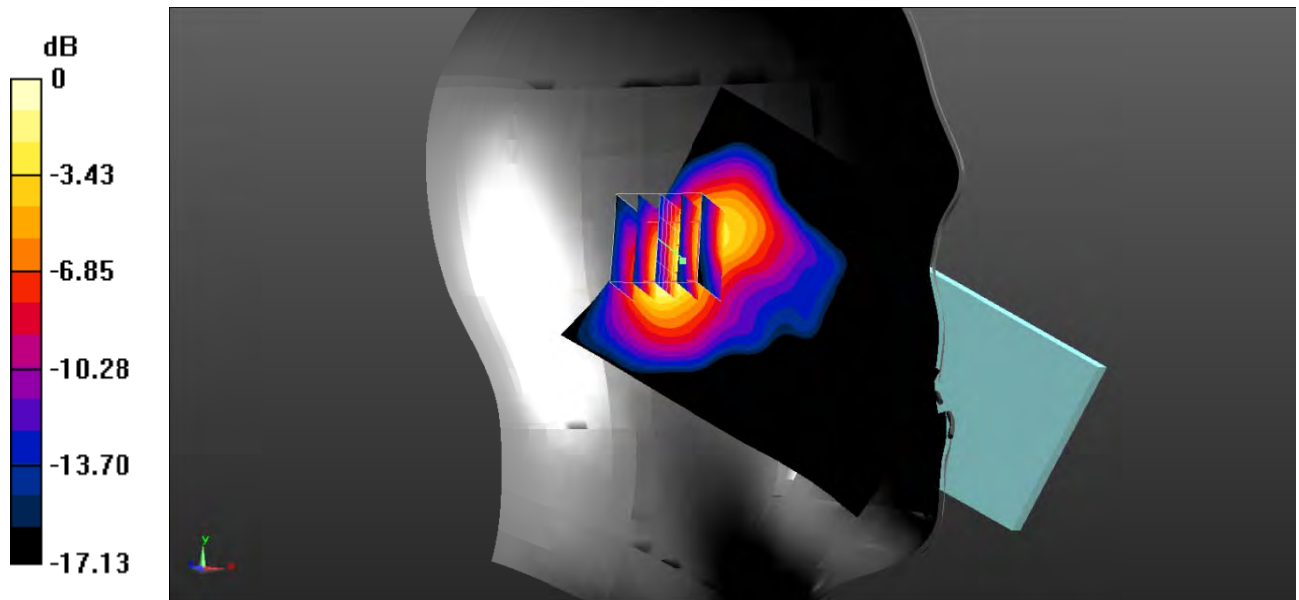

0 dB =  $0.350 \text{ W/kg}$  =  $-4.56 \text{ dBW/kg}$

**Test Plot 54#: LTE Band 2\_Head Right Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.514 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.841 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.865 \text{ W/kg}$   
**SAR(1 g) =  $0.440 \text{ W/kg}$ ; SAR(10 g) =  $0.205 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.534 \text{ W/kg}$

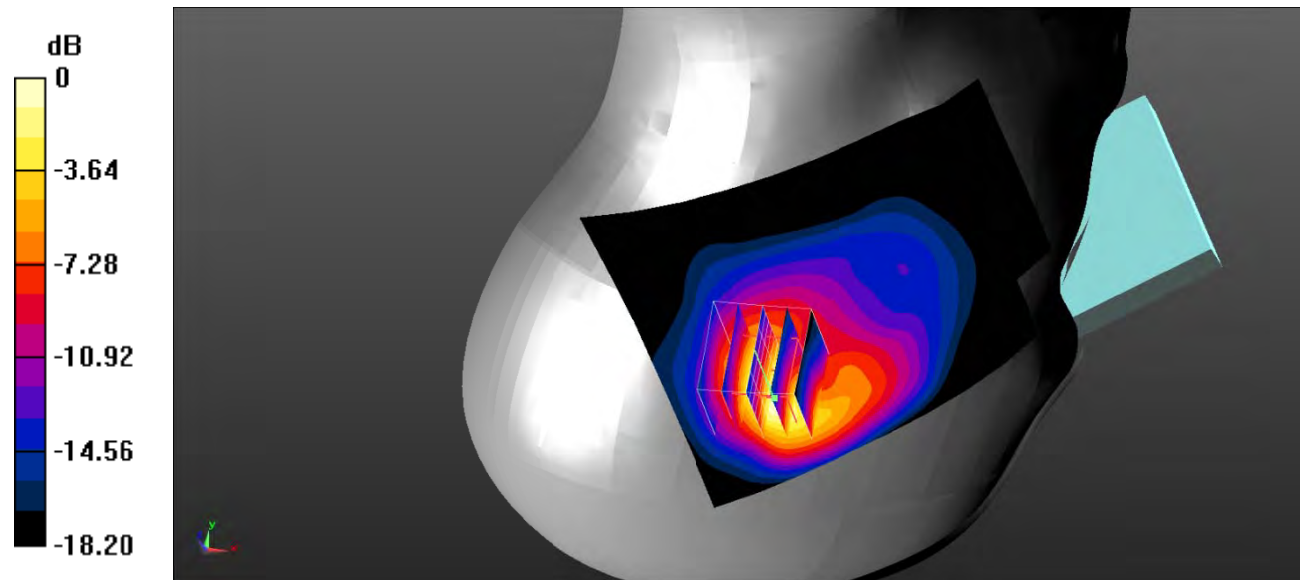

0 dB =  $0.534 \text{ W/kg}$  =  $-2.72 \text{ dBW/kg}$

**Test Plot 55#: LTE Band 2\_Head Right Check\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.373 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.162 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.636 \text{ W/kg}$   
**SAR(1 g) =  $0.323 \text{ W/kg}$ ; SAR(10 g) =  $0.152 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.391 \text{ W/kg}$

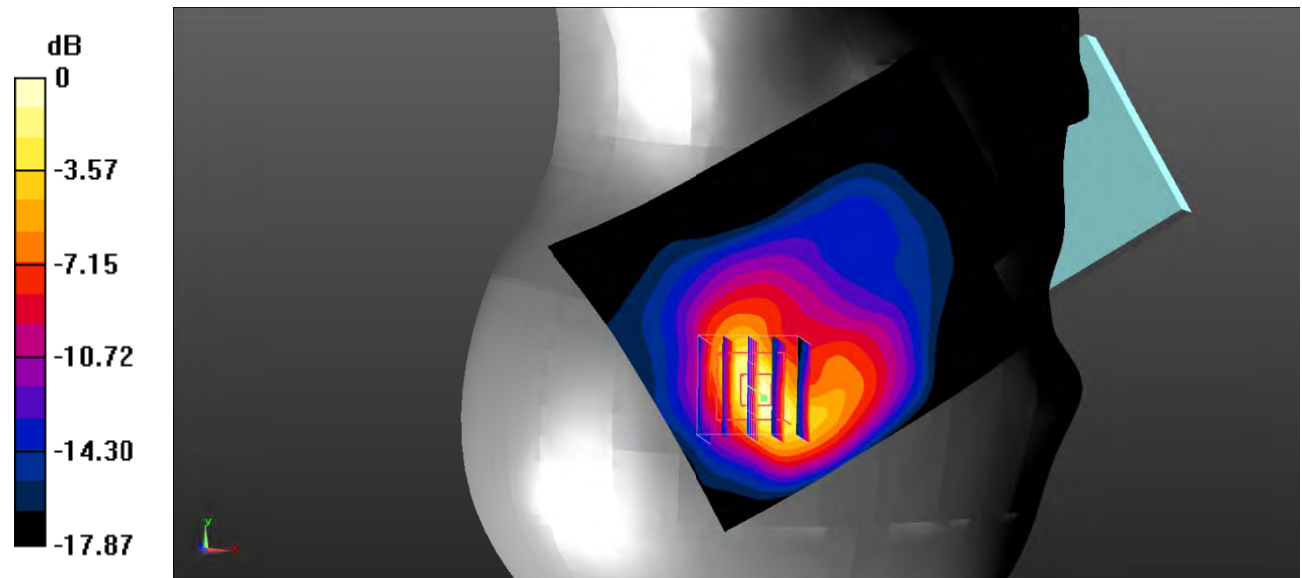

0 dB =  $0.391 \text{ W/kg}$  =  $-4.08 \text{ dBW/kg}$

**Test Plot 56#: LTE Band 2\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.613 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $14.01 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.20 \text{ W/kg}$   
**SAR(1 g) =  $0.589 \text{ W/kg}$ ; SAR(10 g) =  $0.269 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.711 \text{ W/kg}$

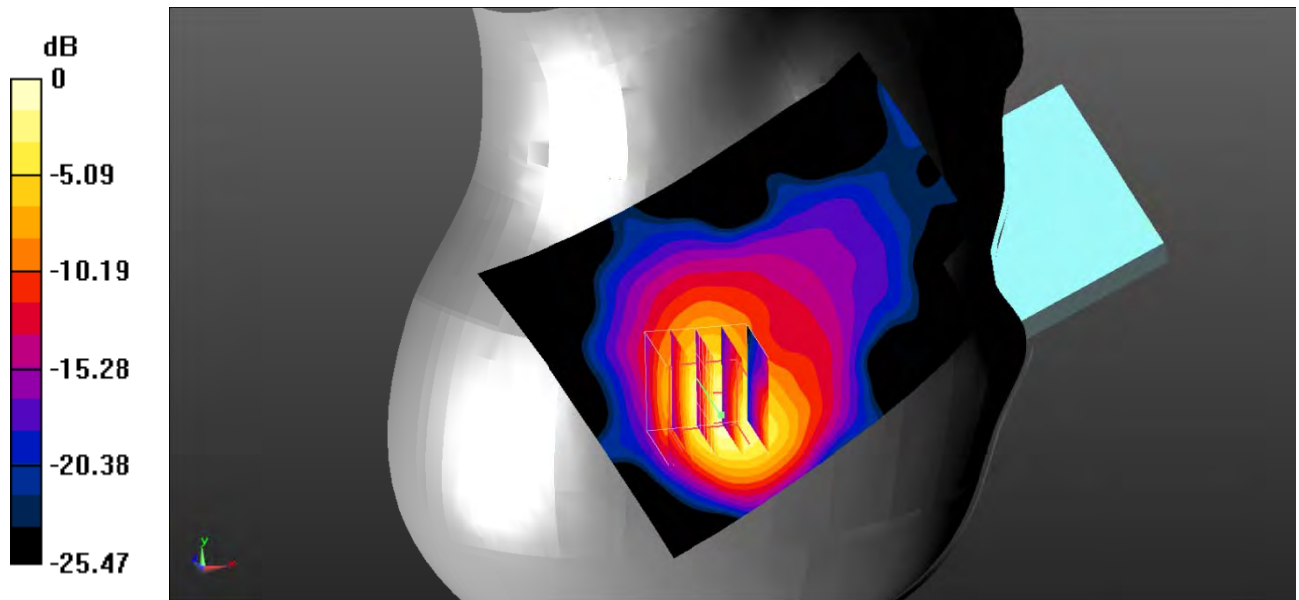

0 dB =  $0.711 \text{ W/kg} = -1.48 \text{ dBW/kg}$



**Test Plot 57#: LTE Band 2\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.444 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.07 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.843 \text{ W/kg}$   
**SAR(1 g) =  $0.417 \text{ W/kg}$ ; SAR(10 g) =  $0.190 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.505 \text{ W/kg}$

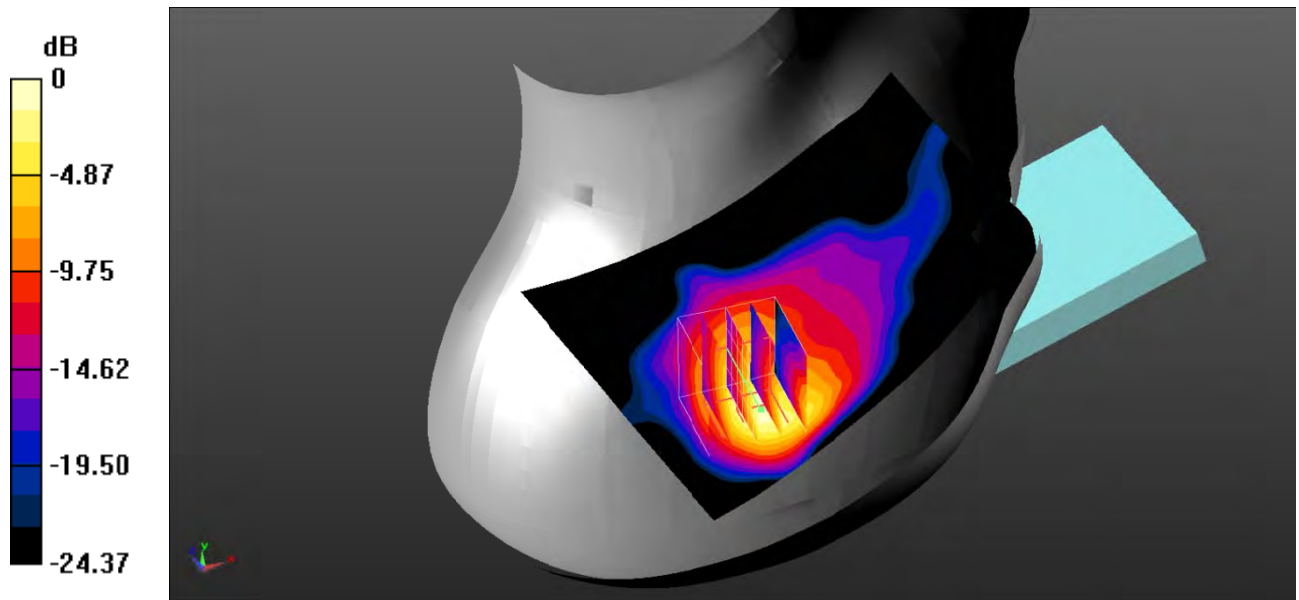

0 dB =  $0.505 \text{ W/kg}$  =  $-2.97 \text{ dBW/kg}$

**Test Plot 58#: LTE Band 2\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.125 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.264 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.182 \text{ W/kg}$   
**SAR(1 g) =  $0.113 \text{ W/kg}$ ; SAR(10 g) =  $0.065 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.127 \text{ W/kg}$

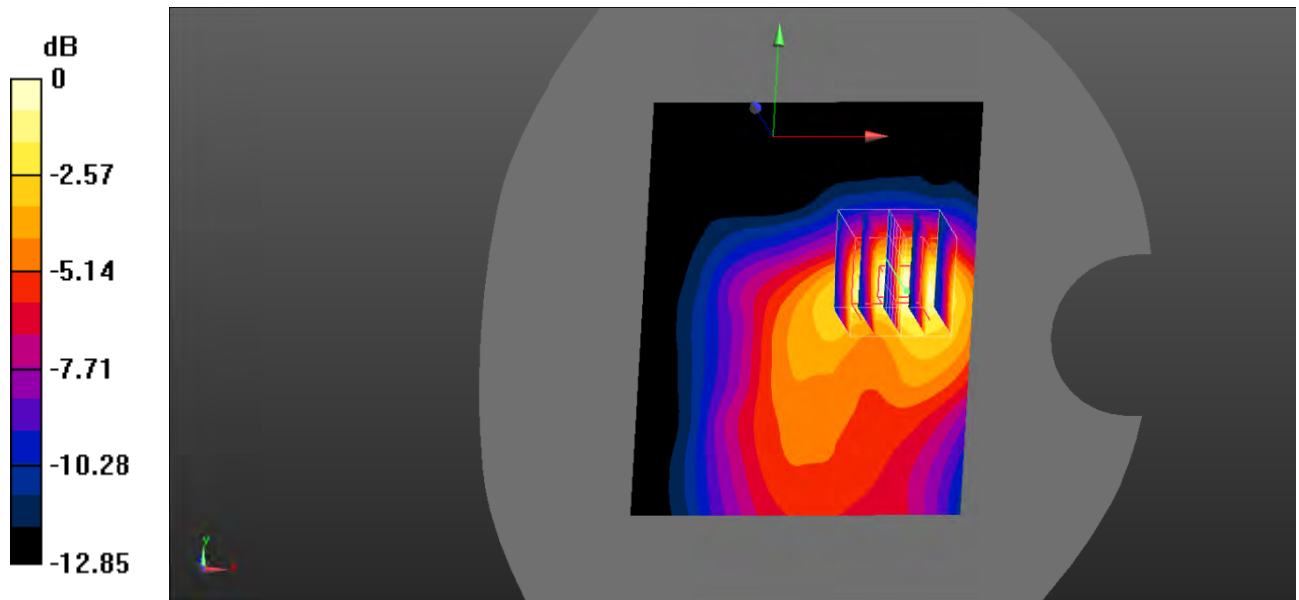

0 dB =  $0.127 \text{ W/kg}$  =  $-8.96 \text{ dBW/kg}$

**Test Plot 59#: LTE Band 2\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0920 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.435 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.131 \text{ W/kg}$   
**SAR(1 g) =  $0.081 \text{ W/kg}$ ; SAR(10 g) =  $0.047 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0893 \text{ W/kg}$

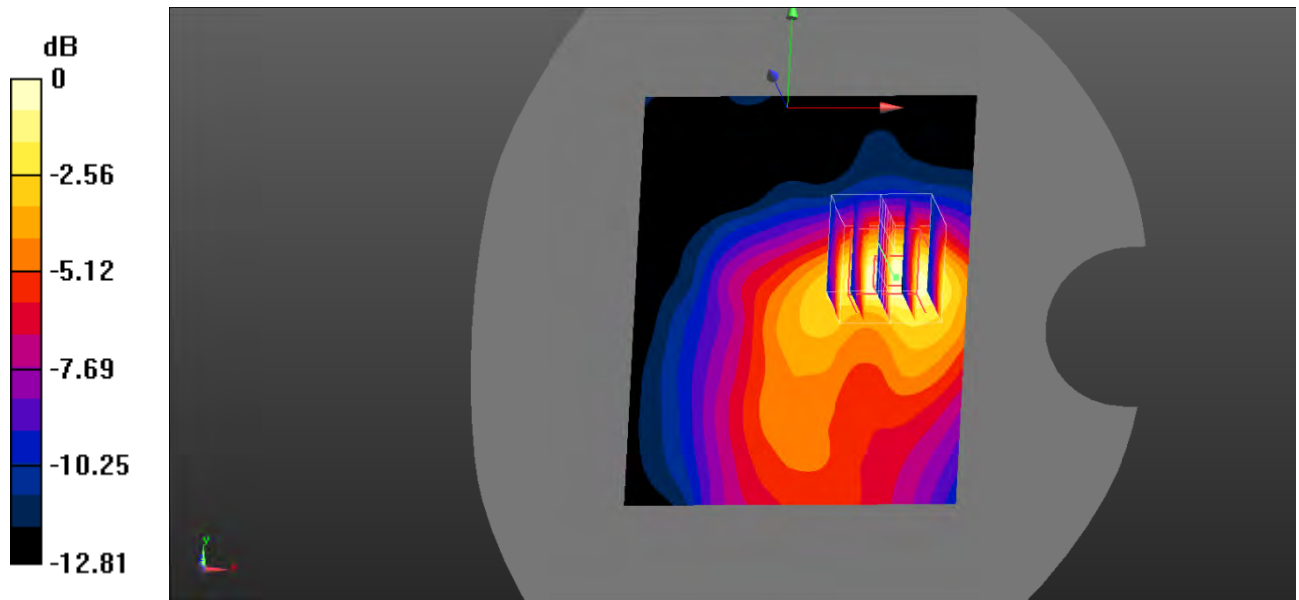

0 dB =  $0.0893 \text{ W/kg}$  =  $-10.49 \text{ dBW/kg}$

**Test Plot 60#: LTE Band 2\_Body Left\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0231 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.443 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0360 \text{ W/kg}$   
**SAR(1 g) =  $0.022 \text{ W/kg}$ ; SAR(10 g) =  $0.014 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0236 \text{ W/kg}$

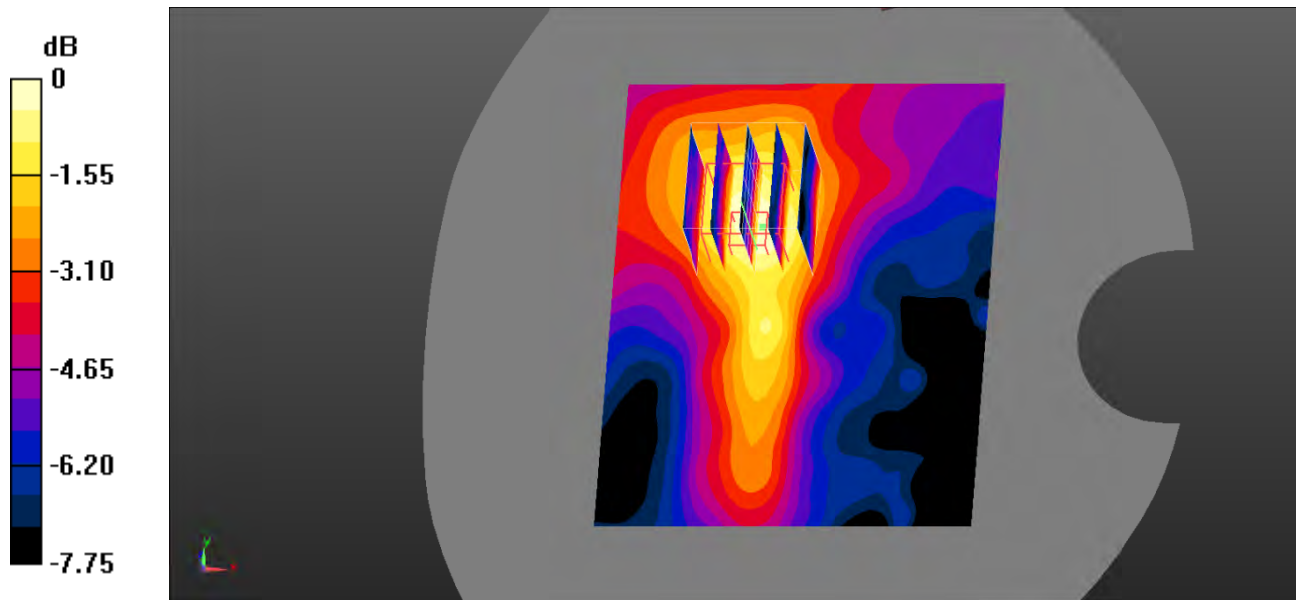

0 dB =  $0.0236 \text{ W/kg}$  =  $-16.27 \text{ dBW/kg}$

**Test Plot 61#: LTE Band 2\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0177 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.468 \text{ V/m}$ ; Power Drift =  $-0.00 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0260 \text{ W/kg}$   
**SAR(1 g) =  $0.016 \text{ W/kg}$ ; SAR(10 g) =  $0.011 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0171 \text{ W/kg}$

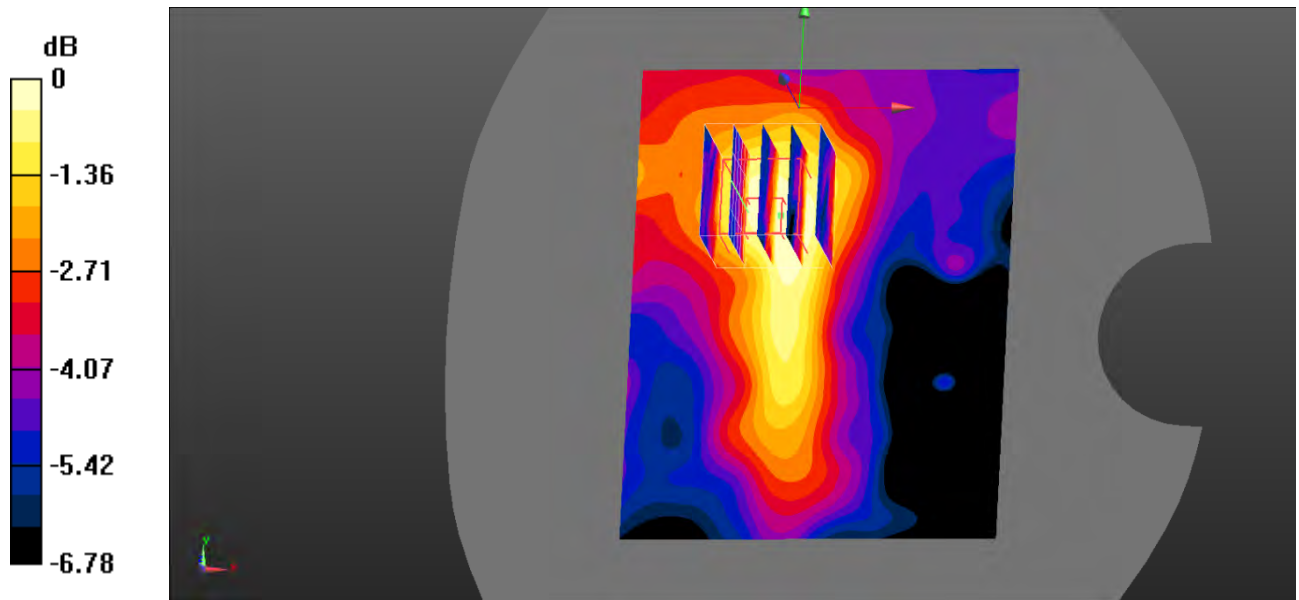

0 dB =  $0.0171 \text{ W/kg} = -17.67 \text{ dBW/kg}$

**Test Plot 62#: LTE Band 2\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.274 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.13 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.388 \text{ W/kg}$   
**SAR(1 g) =  $0.220 \text{ W/kg}$ ; SAR(10 g) =  $0.114 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.248 \text{ W/kg}$

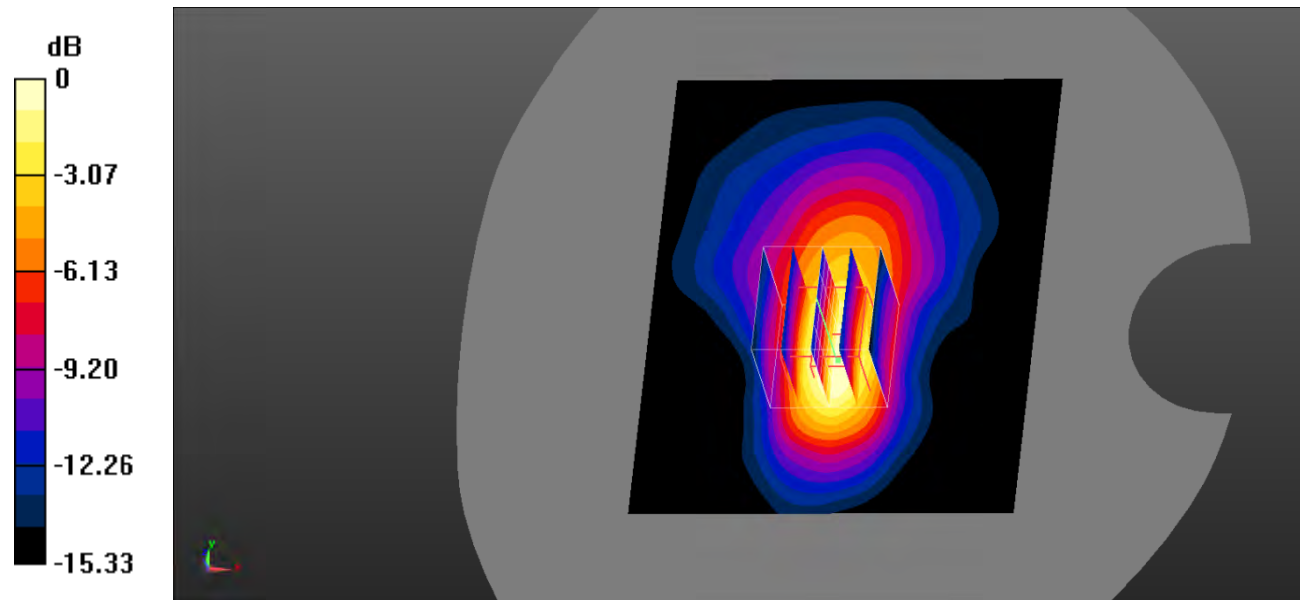

0 dB =  $0.248 \text{ W/kg}$  =  $-6.06 \text{ dBW/kg}$

**Test Plot 63#: LTE Band 2\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.4 \text{ S/m}$ ;  $\epsilon_r = 39.945$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.02, 8.02, 8.02)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.192 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.218 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

Peak SAR (extrapolated) =  $0.270 \text{ W/kg}$

**SAR(1 g) =  $0.151 \text{ W/kg}$ ; SAR(10 g) =  $0.079 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.170 \text{ W/kg}$

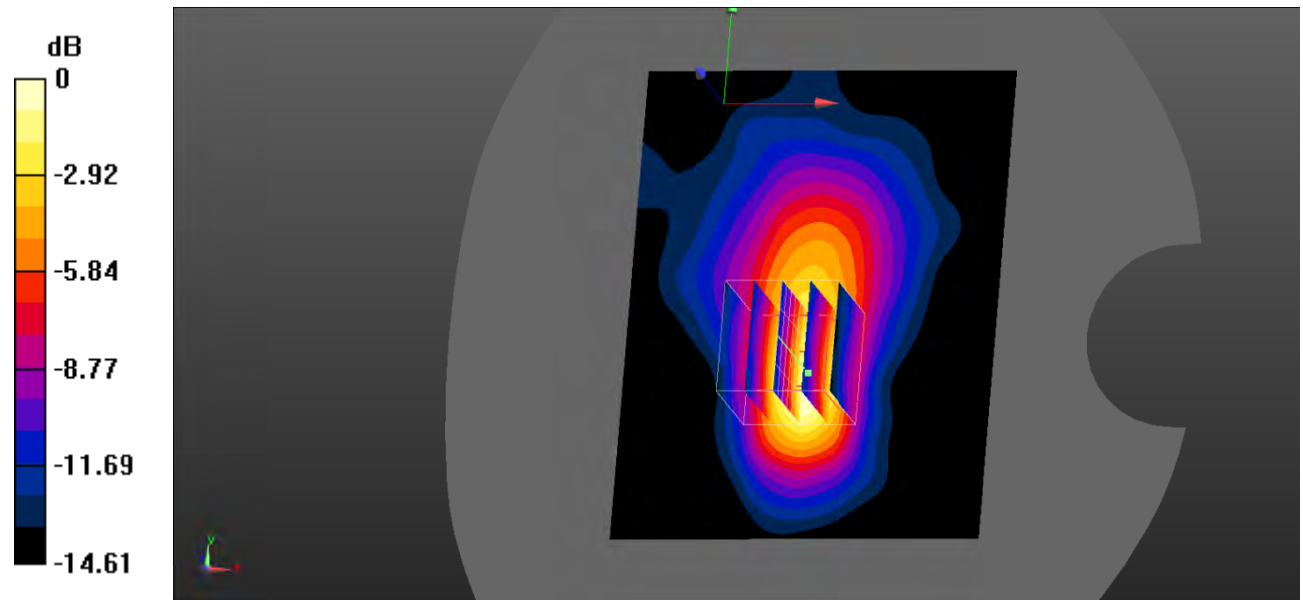

0 dB =  $0.170 \text{ W/kg} = -7.70 \text{ dBW/kg}$

**Test Plot 64#: LTE Band 5\_Head Left Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.333 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.64 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.414 \text{ W/kg}$   
**SAR(1 g) =  $0.296 \text{ W/kg}$ ; SAR(10 g) =  $0.207 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.306 \text{ W/kg}$

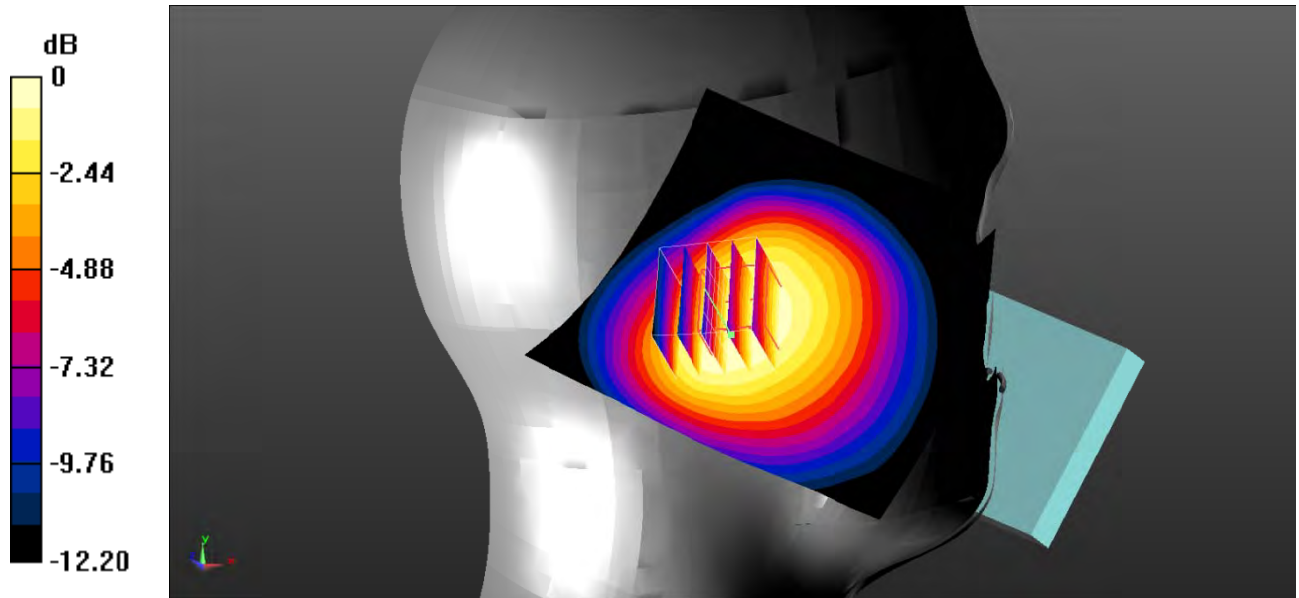

0 dB =  $0.306 \text{ W/kg}$  =  $-5.14 \text{ dBW/kg}$



**Test Plot 65#: LTE Band 5\_Head Left Check\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.284 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 16.40 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.358 W/kg  
**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.180 W/kg**  
 Maximum value of SAR (measured) = 0.267 W/kg

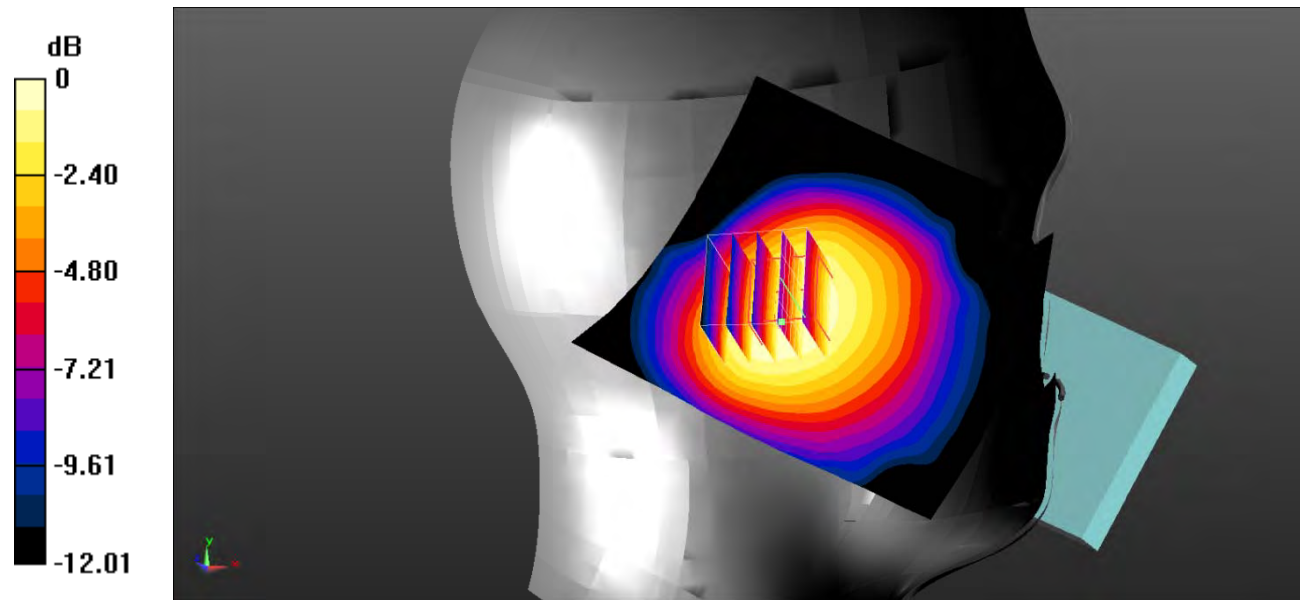

0 dB = 0.267 W/kg = -5.73 dBW/kg

**Test Plot 66#: LTE Band 5\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.315 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $18.47 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.438 \text{ W/kg}$   
**SAR(1 g) =  $0.293 \text{ W/kg}$ ; SAR(10 g) =  $0.195 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.304 \text{ W/kg}$

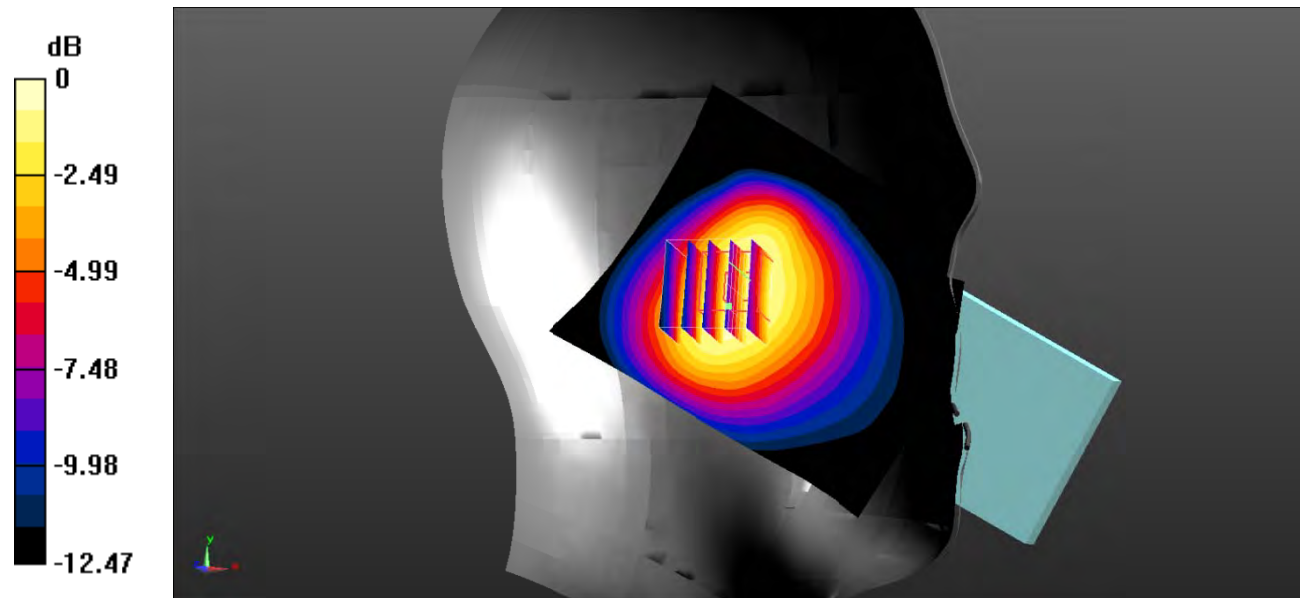

0 dB =  $0.304 \text{ W/kg}$  =  $-5.17 \text{ dBW/kg}$

**Test Plot 67#: LTE Band 5\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.267 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.60 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.370 \text{ W/kg}$   
**SAR(1 g) =  $0.249 \text{ W/kg}$ ; SAR(10 g) =  $0.166 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.258 \text{ W/kg}$

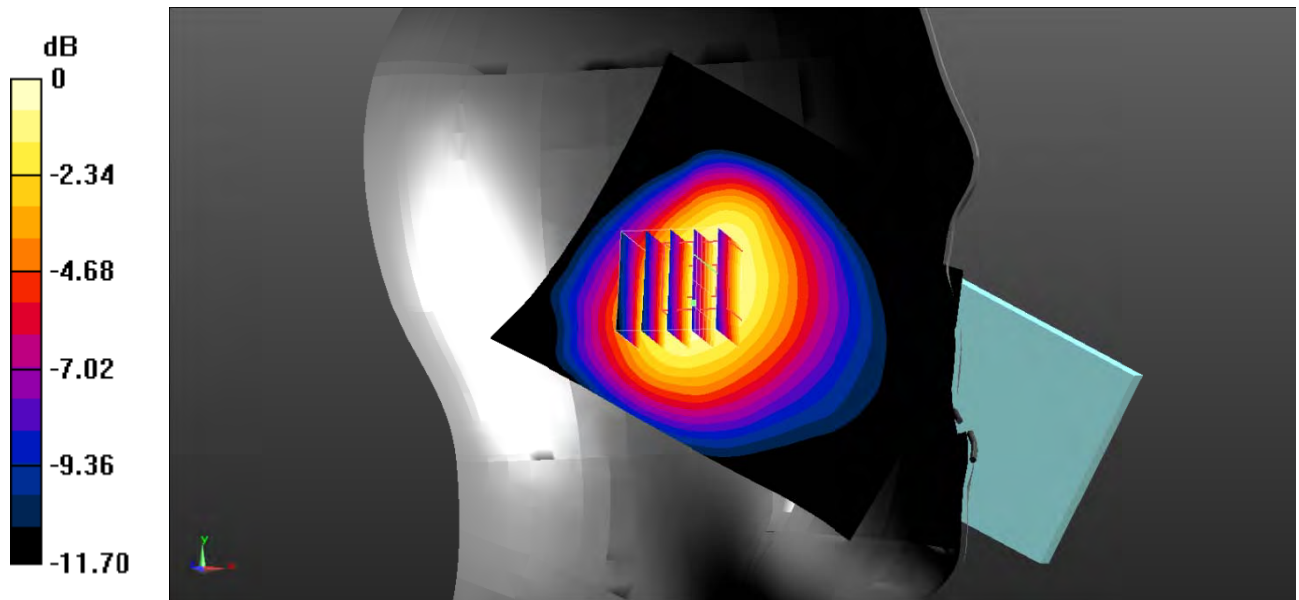

0 dB =  $0.258 \text{ W/kg}$  =  $-5.88 \text{ dBW/kg}$

**Test Plot 68#: LTE Band 5\_Head Right Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.640 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.48 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.05 \text{ W/kg}$   
**SAR(1 g) =  $0.553 \text{ W/kg}$ ; SAR(10 g) =  $0.338 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.565 \text{ W/kg}$

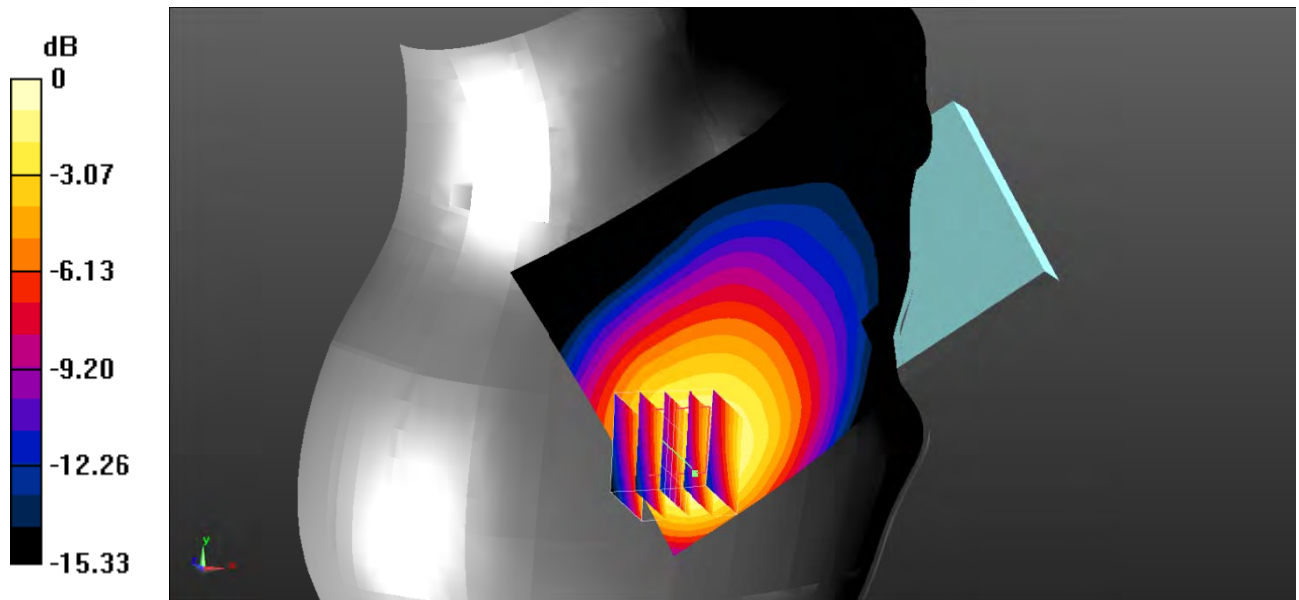

0 dB =  $0.565 \text{ W/kg}$  =  $-2.48 \text{ dBW/kg}$

**Test Plot 69#: LTE Band 5\_Head Right Check\_50%RB\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 40.314$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.521 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.47 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.869 W/kg

**SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.278 W/kg**

Maximum value of SAR (measured) = 0.467 W/kg

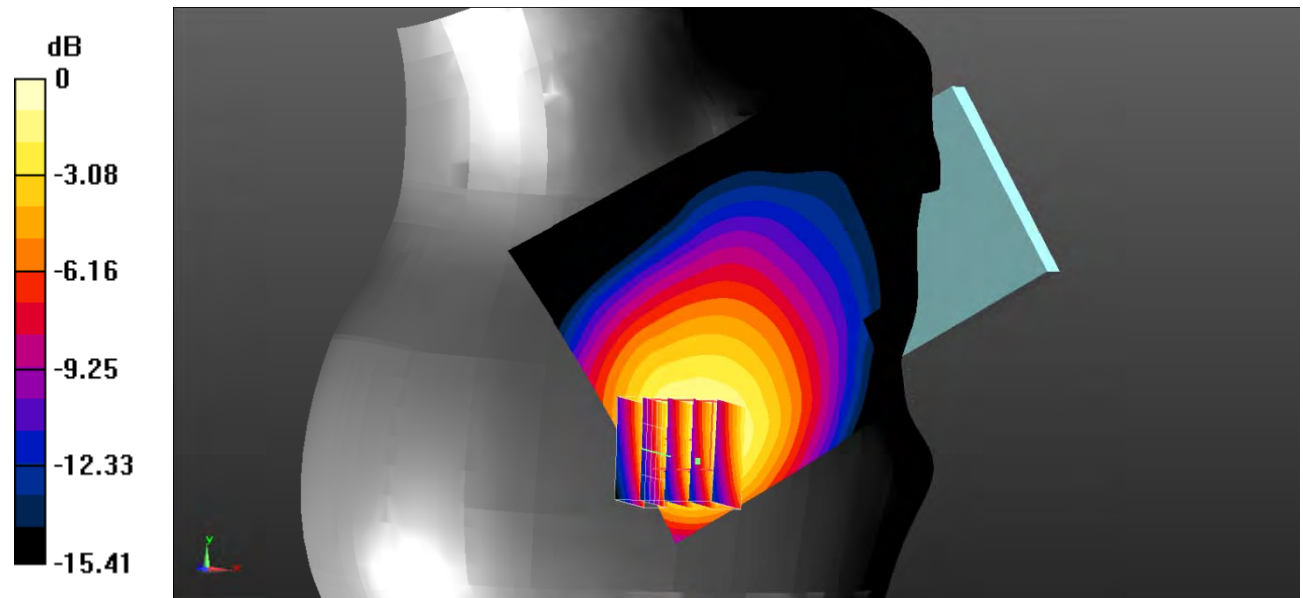

0 dB = 0.467 W/kg = -3.31 dBW/kg

**Test Plot 70#: LTE Band 5\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.378 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $18.06 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.699 \text{ W/kg}$   
**SAR(1 g) =  $0.358 \text{ W/kg}$ ; SAR(10 g) =  $0.212 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.390 \text{ W/kg}$

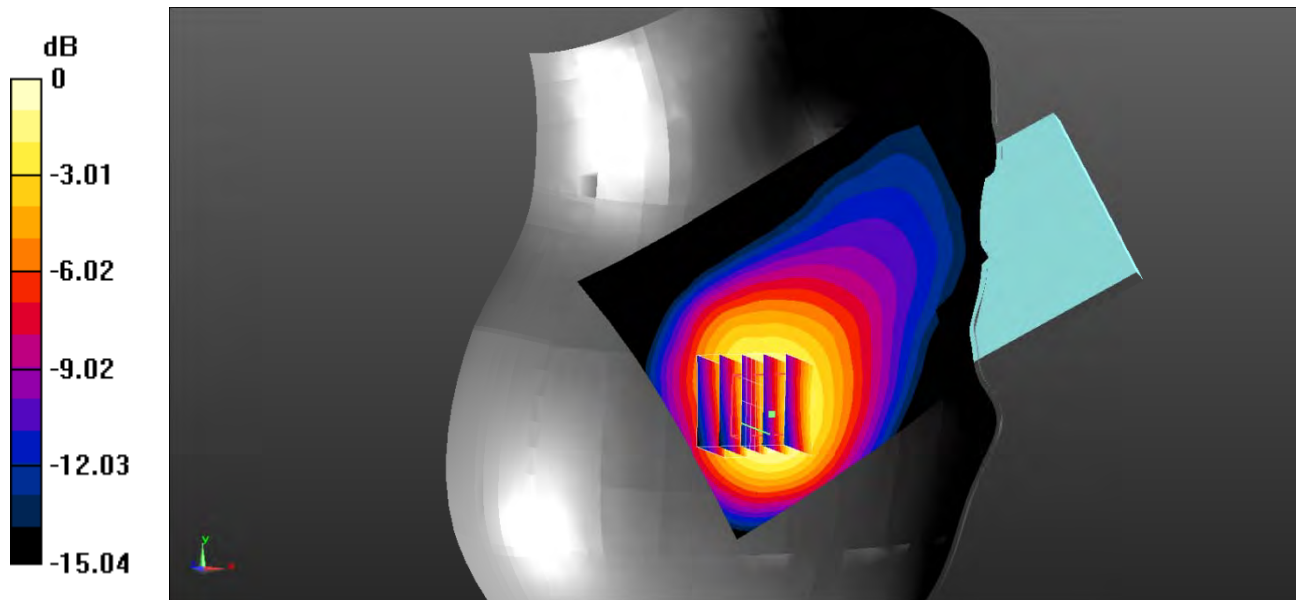

0 dB =  $0.390 \text{ W/kg}$  =  $-4.09 \text{ dBW/kg}$

**Test Plot 71#: LTE Band 5\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.357 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $17.96 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.645 \text{ W/kg}$   
**SAR(1 g) =  $0.339 \text{ W/kg}$ ; SAR(10 g) =  $0.204 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.367 \text{ W/kg}$

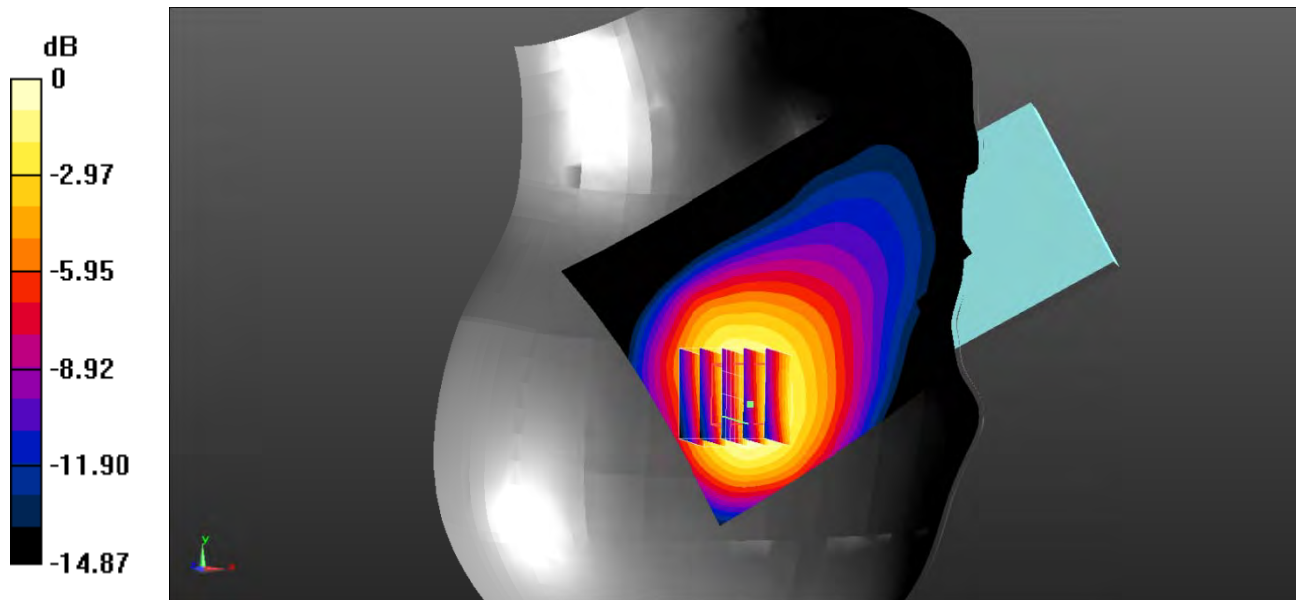

0 dB =  $0.367 \text{ W/kg}$  =  $-4.35 \text{ dBW/kg}$

**Test Plot 72#: LTE Band 5\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.117 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.689 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.152 \text{ W/kg}$   
**SAR(1 g) =  $0.111 \text{ W/kg}$ ; SAR(10 g) =  $0.081 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.116 \text{ W/kg}$

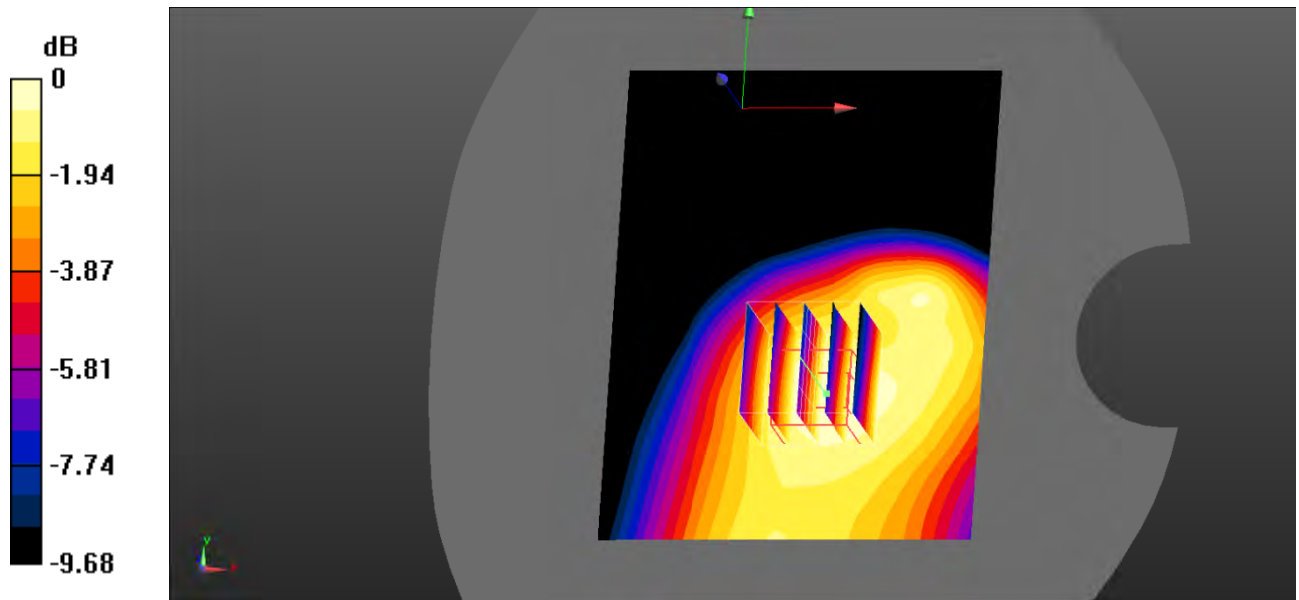

0 dB =  $0.116 \text{ W/kg}$  =  $-9.36 \text{ dBW/kg}$



**Test Plot 73#: LTE Band 5\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0973 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.415 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.125 \text{ W/kg}$   
**SAR(1 g) =  $0.091 \text{ W/kg}$ ; SAR(10 g) =  $0.066 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0954 \text{ W/kg}$

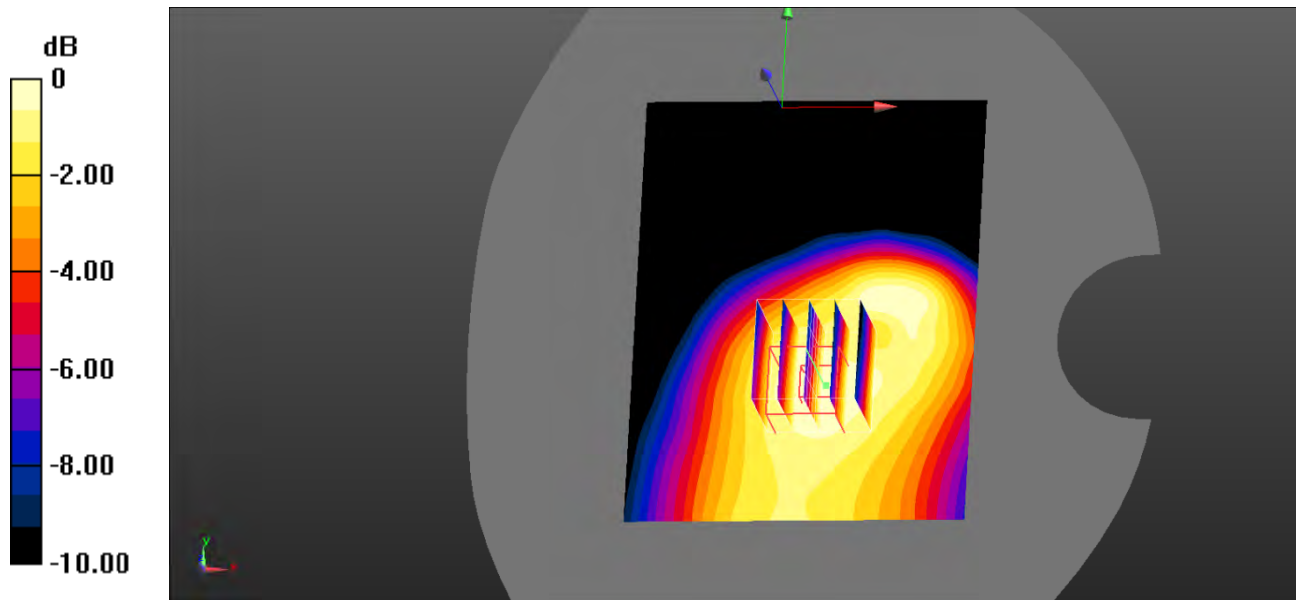

0 dB =  $0.0954 \text{ W/kg}$  =  $-10.20 \text{ dBW/kg}$

**Test Plot 74#: LTE Band 5\_Body Left\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.89$  S/m;  $\epsilon_r = 40.314$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0315 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.940 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.0420 W/kg  
**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.021 W/kg**  
 Maximum value of SAR (measured) = 0.0307 W/kg

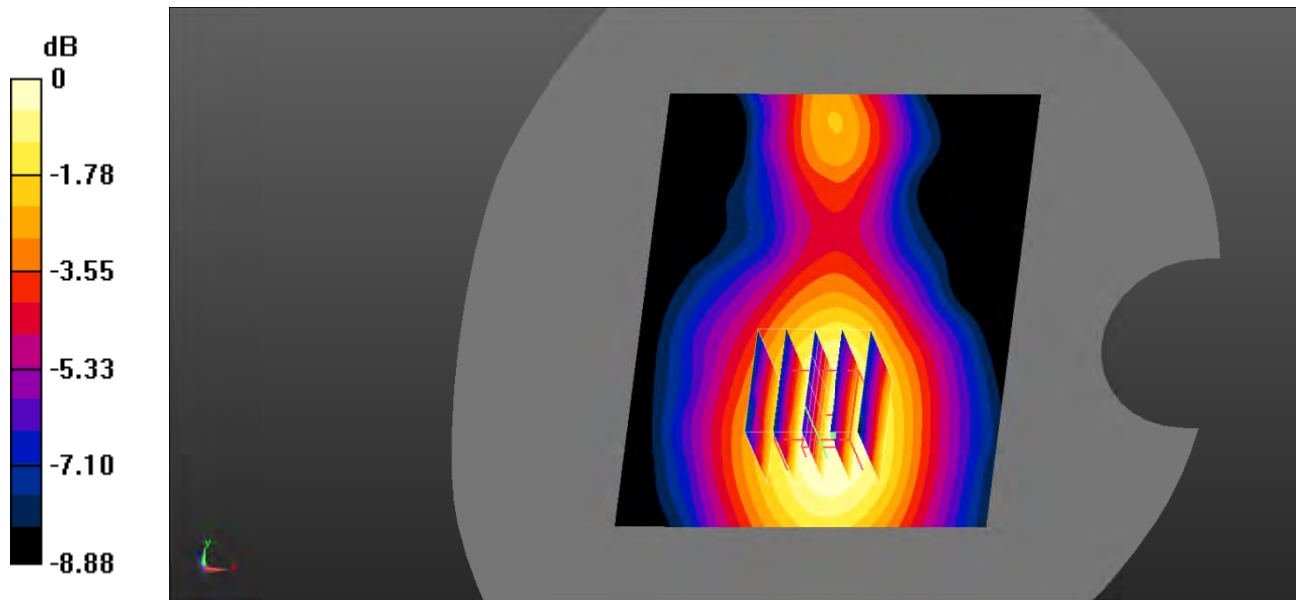

0 dB = 0.0307 W/kg = -15.13 dBW/kg

**Test Plot 75#: LTE Band 5\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0261 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.567 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0340 \text{ W/kg}$   
**SAR(1 g) =  $0.025 \text{ W/kg}$ ; SAR(10 g) =  $0.018 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0261 \text{ W/kg}$

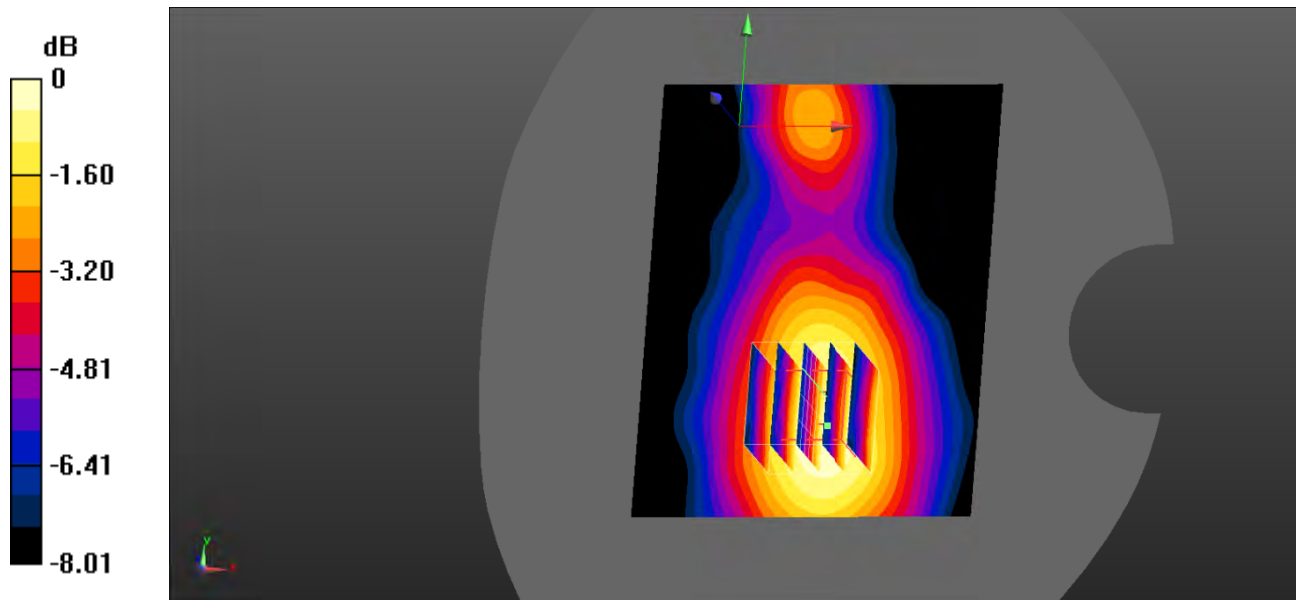

0 dB =  $0.0261 \text{ W/kg}$  =  $-15.83 \text{ dBW/kg}$

**Test Plot 76#: LTE Band 5\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0815 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.315 \text{ V/m}$ ; Power Drift =  $0.00 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.122 \text{ W/kg}$   
**SAR(1 g) =  $0.079 \text{ W/kg}$ ; SAR(10 g) =  $0.051 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0848 \text{ W/kg}$

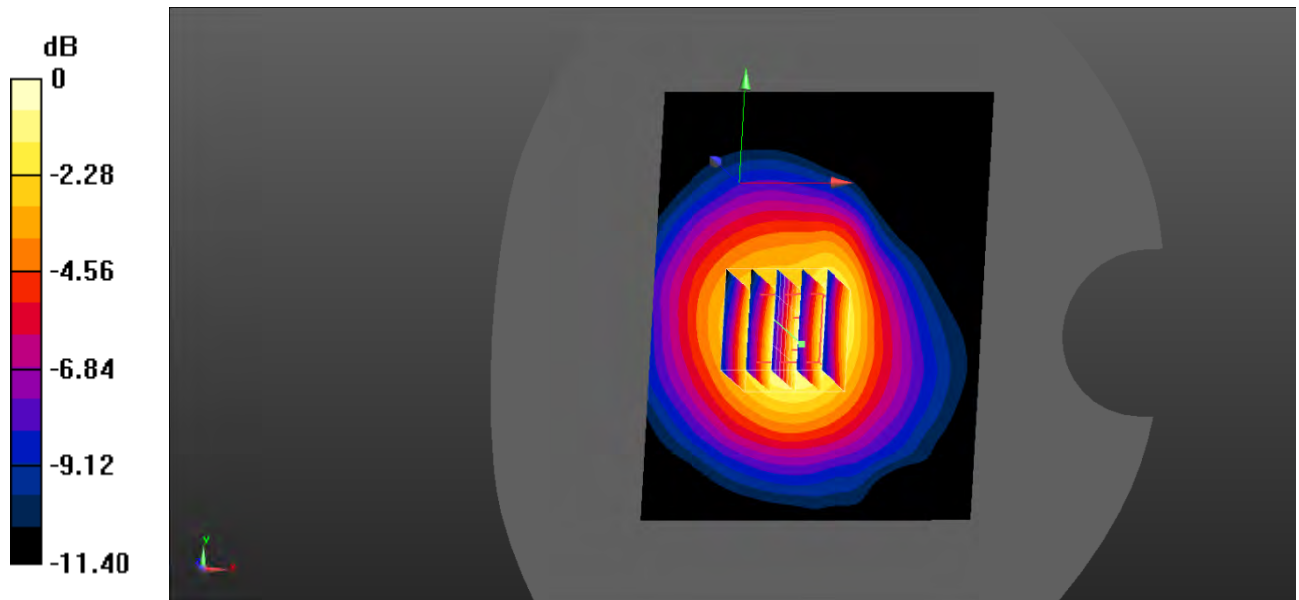

0 dB =  $0.0848 \text{ W/kg}$  =  $-10.72 \text{ dBW/kg}$

**Test Plot 77#: LTE Band 5\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.314$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0700 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.651 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.101 \text{ W/kg}$   
**SAR(1 g) =  $0.067 \text{ W/kg}$ ; SAR(10 g) =  $0.044 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0708 \text{ W/kg}$

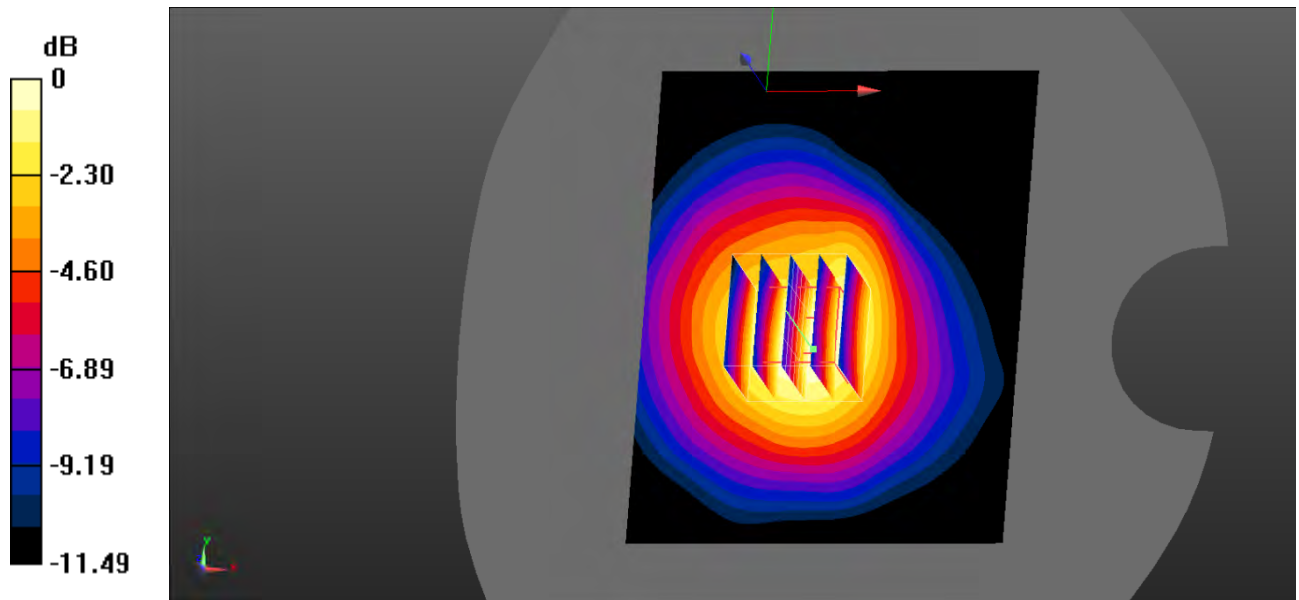

0 dB =  $0.0708 \text{ W/kg}$  =  $-11.50 \text{ dBW/kg}$

**Test Plot 78#: LTE Band 7\_Head Left Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.240 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.996 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.426 \text{ W/kg}$   
**SAR(1 g) =  $0.214 \text{ W/kg}$ ; SAR(10 g) =  $0.106 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.241 \text{ W/kg}$

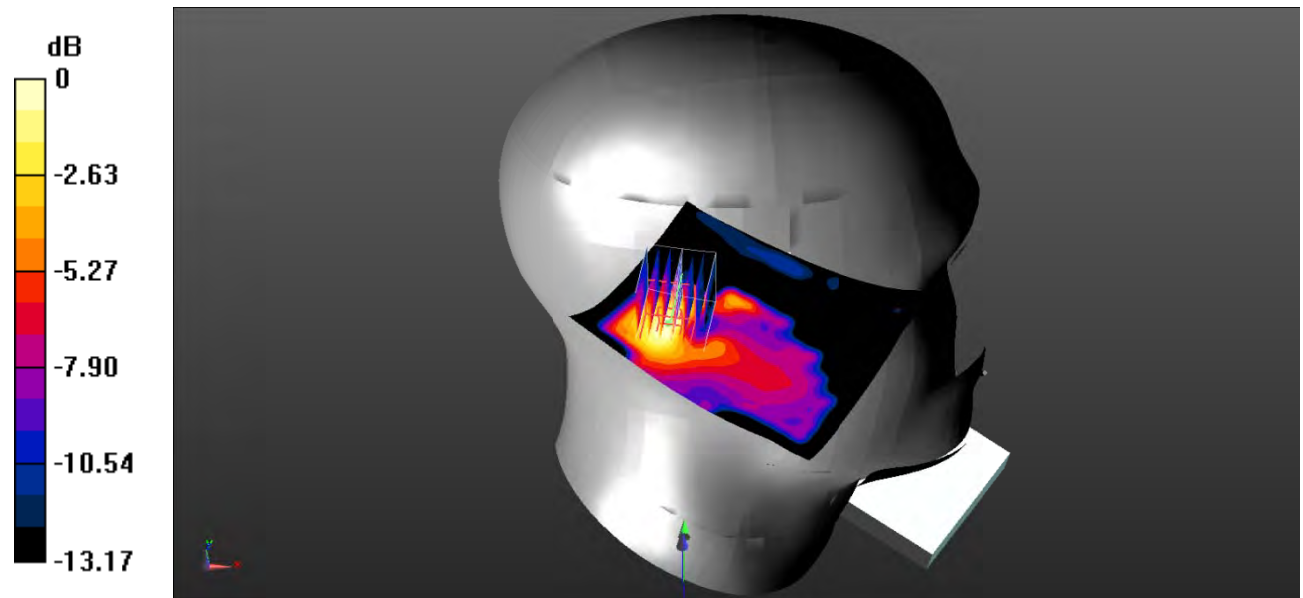

0 dB =  $0.241 \text{ W/kg}$  =  $-6.18 \text{ dBW/kg}$

**Test Plot 79#: LTE Band 7\_Head Left Check\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.227 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.343 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.322 \text{ W/kg}$   
**SAR(1 g) =  $0.162 \text{ W/kg}$ ; SAR(10 g) =  $0.076 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.180 \text{ W/kg}$

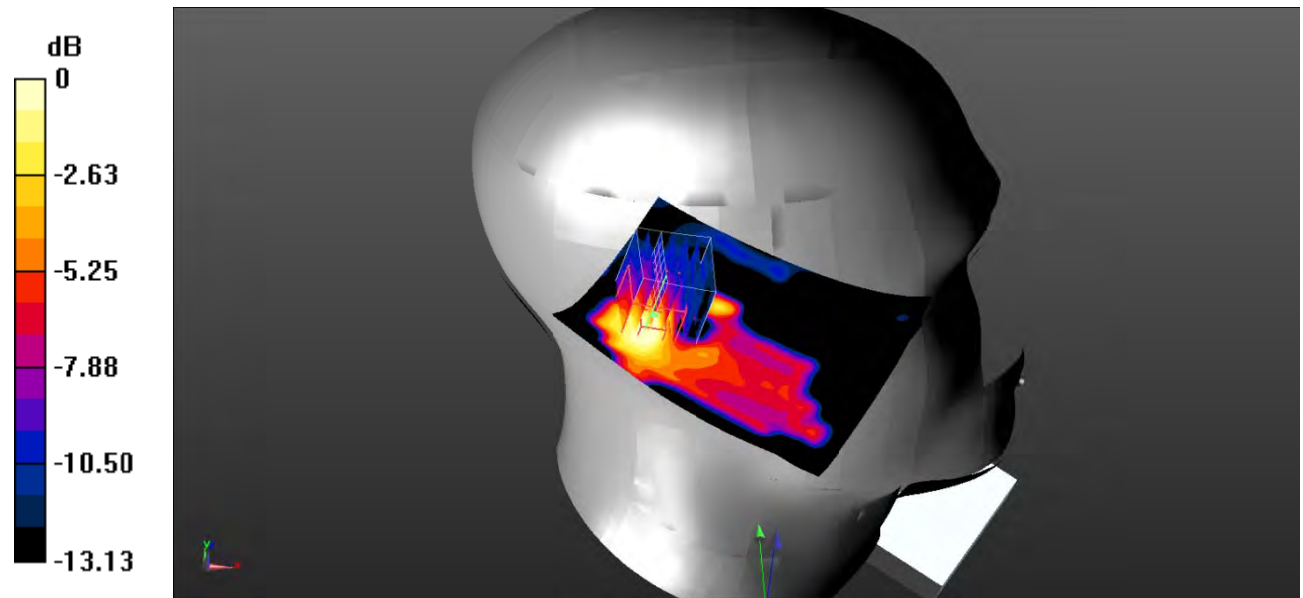

0 dB =  $0.180 \text{ W/kg}$  =  $-7.45 \text{ dBW/kg}$

**Test Plot 80#: LTE Band 7\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.349 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.120 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.602 \text{ W/kg}$   
**SAR(1 g) =  $0.317 \text{ W/kg}$ ; SAR(10 g) =  $0.153 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.361 \text{ W/kg}$

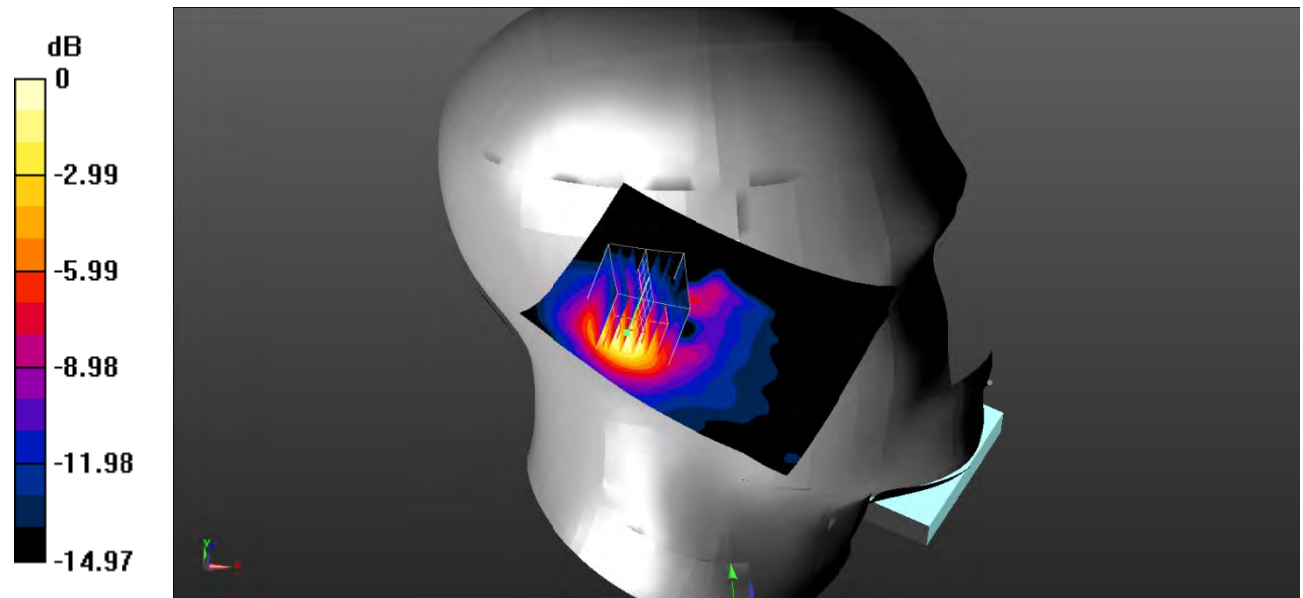

0 dB =  $0.361 \text{ W/kg}$  =  $-4.42 \text{ dBW/kg}$



**Test Plot 81#: LTE Band 7\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.269 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $6.094 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.483 \text{ W/kg}$   
**SAR(1 g) =  $0.243 \text{ W/kg}$ ; SAR(10 g) =  $0.119 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.276 \text{ W/kg}$

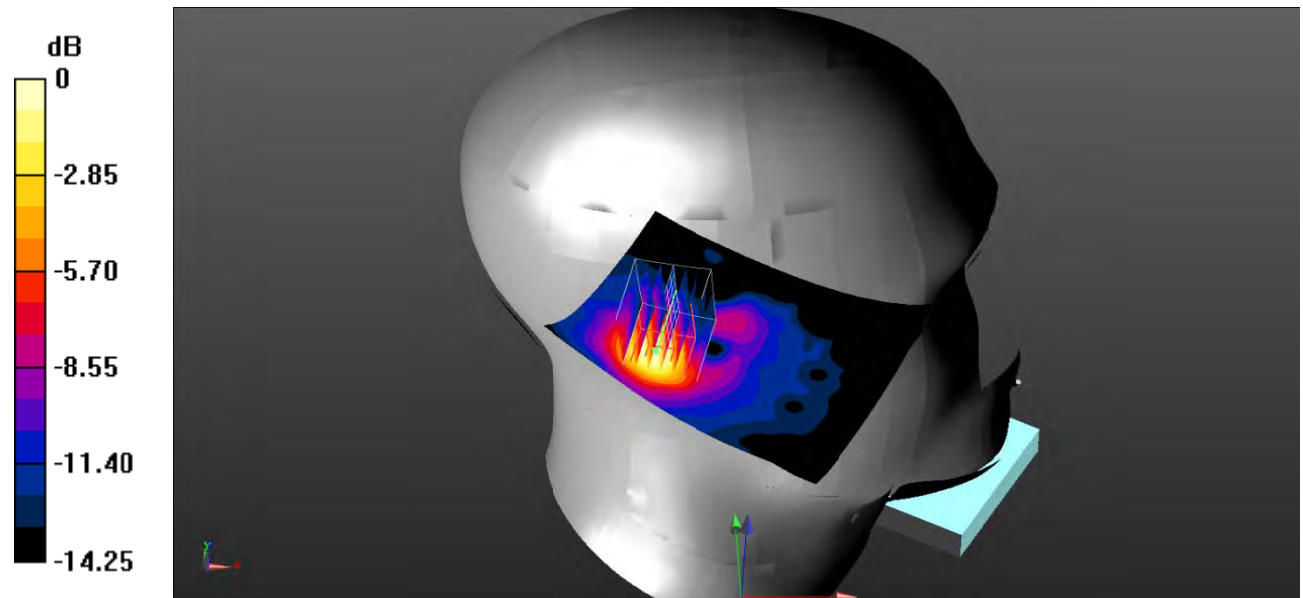

0 dB =  $0.276 \text{ W/kg}$  =  $-5.59 \text{ dBW/kg}$

**Test Plot 82#: LTE Band 7\_Head Right Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.551 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.174 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.953 \text{ W/kg}$   
**SAR(1 g) =  $0.450 \text{ W/kg}$ ; SAR(10 g) =  $0.214 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.514 \text{ W/kg}$

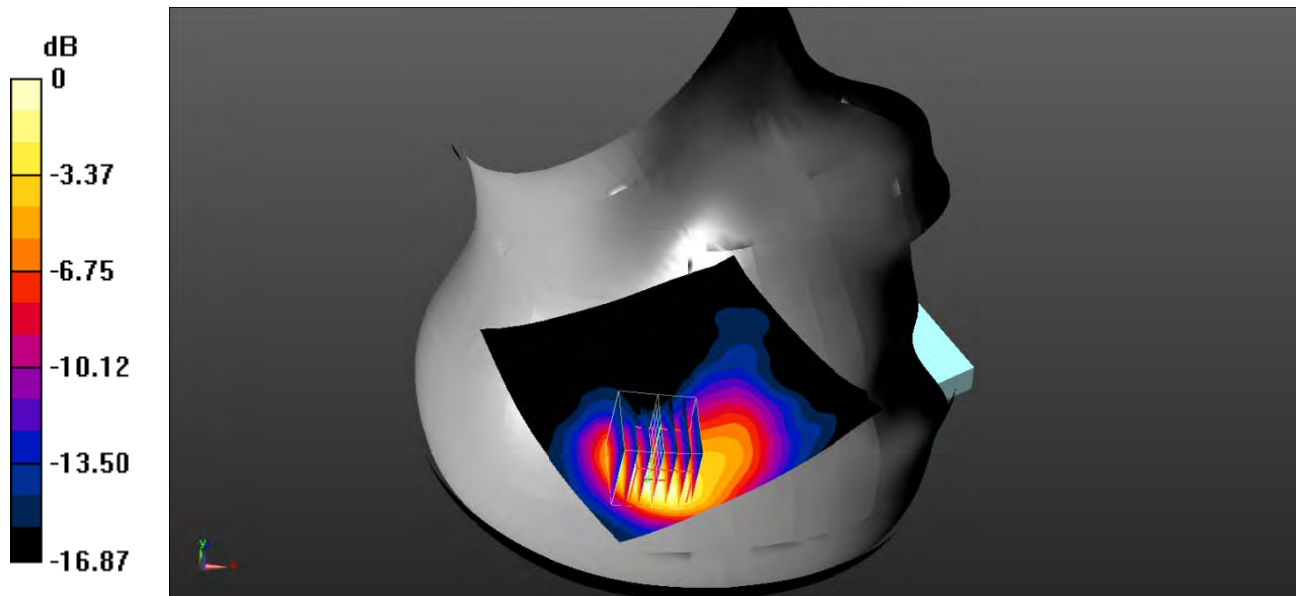

0 dB =  $0.514 \text{ W/kg}$  =  $-2.89 \text{ dBW/kg}$

**Test Plot 83#: LTE Band 7\_Head Right Check\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.426 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.135 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.724 \text{ W/kg}$   
**SAR(1 g) =  $0.339 \text{ W/kg}$ ; SAR(10 g) =  $0.161 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.388 \text{ W/kg}$

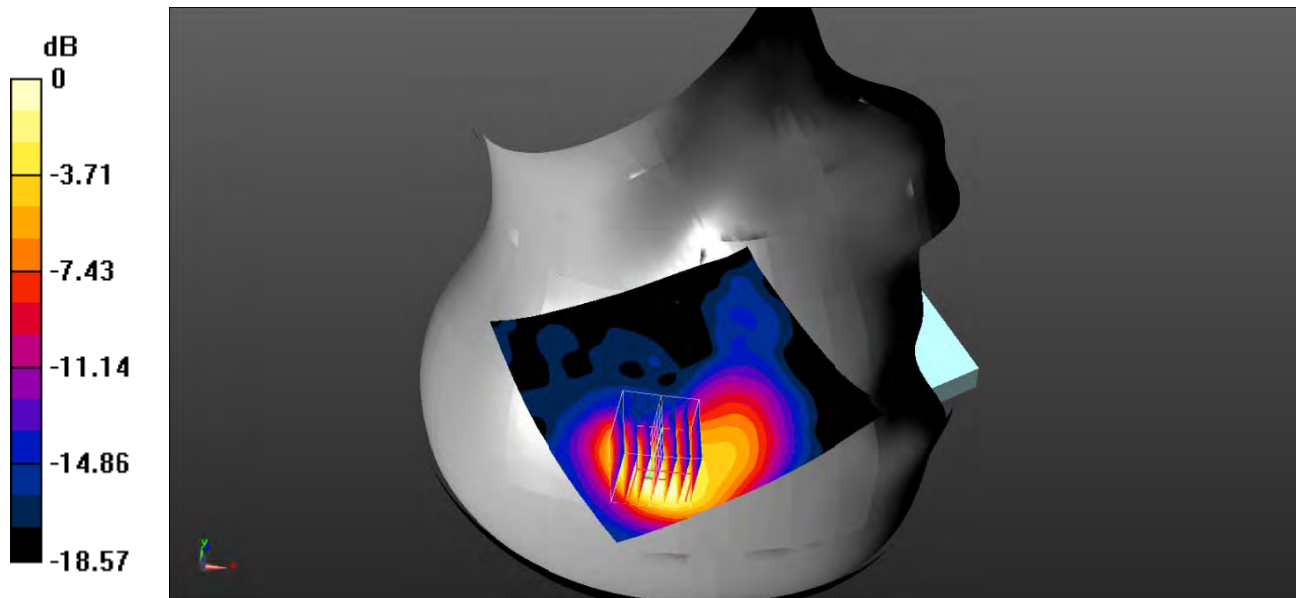

0 dB =  $0.388 \text{ W/kg}$  =  $-4.11 \text{ dBW/kg}$

**Test Plot 84#: LTE Band 7\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.663 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.729 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.28 \text{ W/kg}$   
**SAR(1 g) =  $0.579 \text{ W/kg}$ ; SAR(10 g) =  $0.251 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.675 \text{ W/kg}$

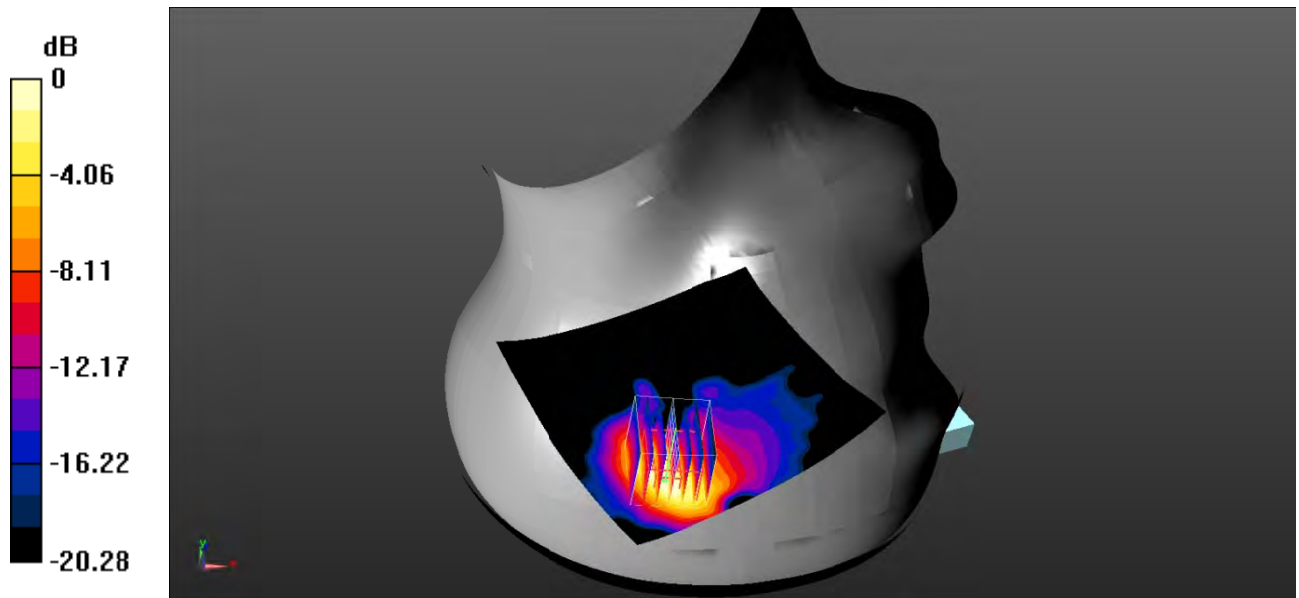

0 dB =  $0.675 \text{ W/kg}$  =  $-1.71 \text{ dBW/kg}$

**Test Plot 85#: LTE Band 7\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.493 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.087 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.978 \text{ W/kg}$   
**SAR(1 g) =  $0.434 \text{ W/kg}$ ; SAR(10 g) =  $0.188 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.502 \text{ W/kg}$

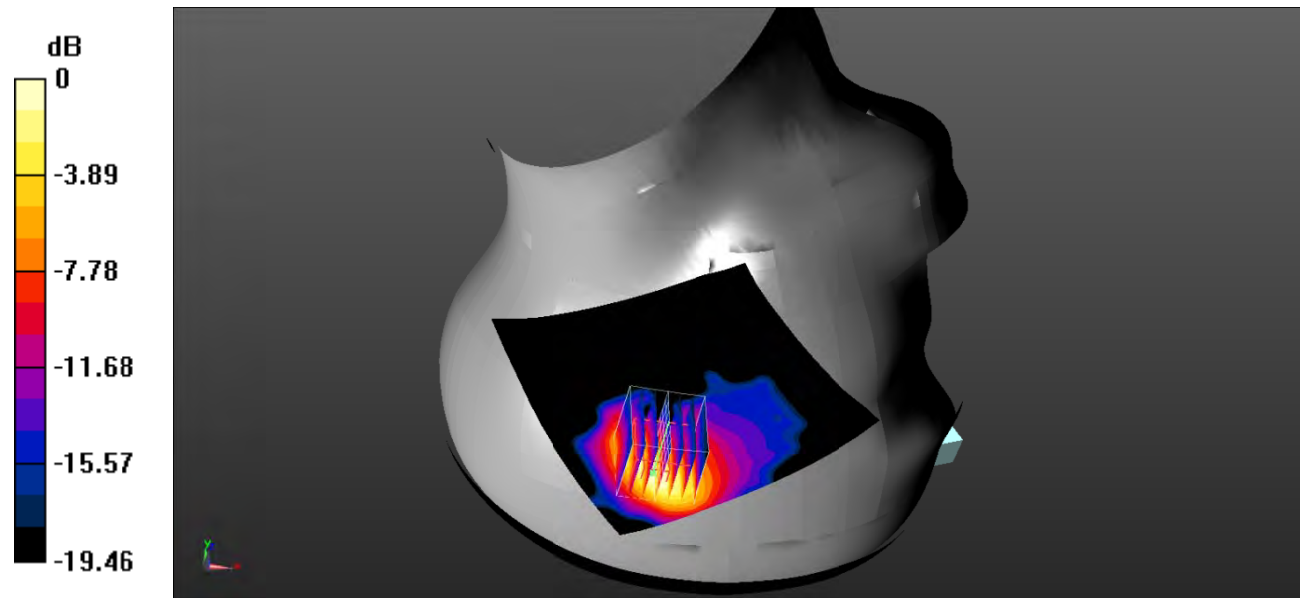

0 dB =  $0.502 \text{ W/kg}$  =  $-2.99 \text{ dBW/kg}$

**Test Plot 86#: LTE Band 7\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.354 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.386 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.581 \text{ W/kg}$   
**SAR(1 g) =  $0.309 \text{ W/kg}$ ; SAR(10 g) =  $0.148 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.347 \text{ W/kg}$

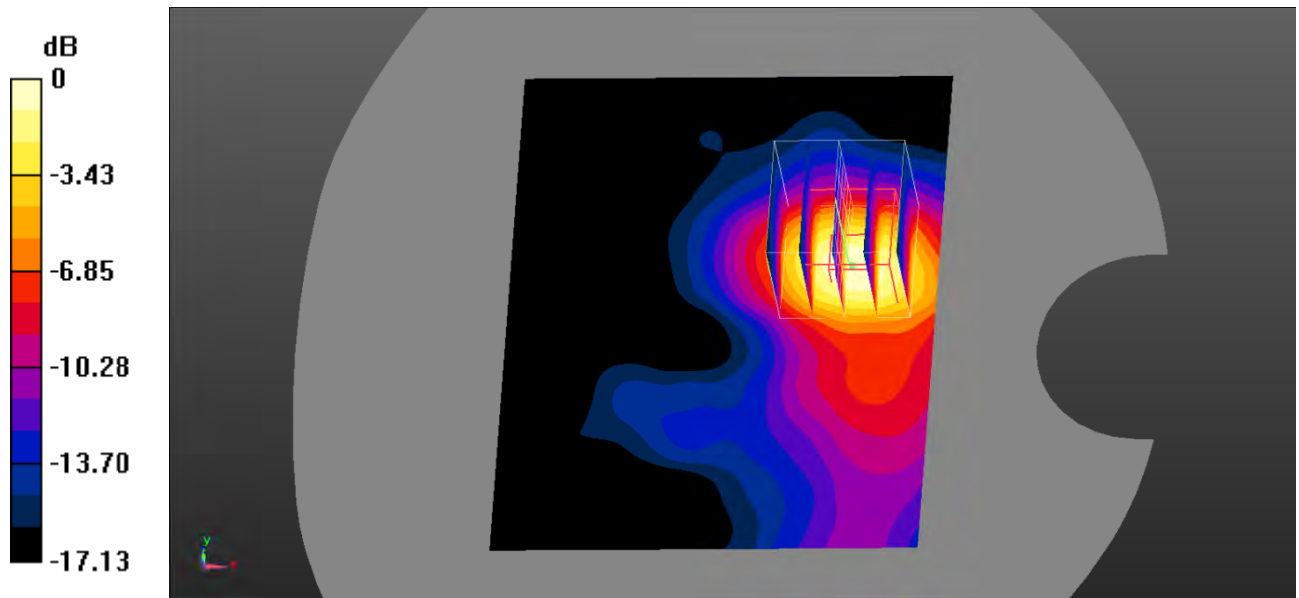

0 dB =  $0.347 \text{ W/kg}$  =  $-4.60 \text{ dBW/kg}$

**Test Plot 87#: LTE Band 7\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.242 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.929 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.418 \text{ W/kg}$   
**SAR(1 g) =  $0.221 \text{ W/kg}$ ; SAR(10 g) =  $0.106 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.251 \text{ W/kg}$

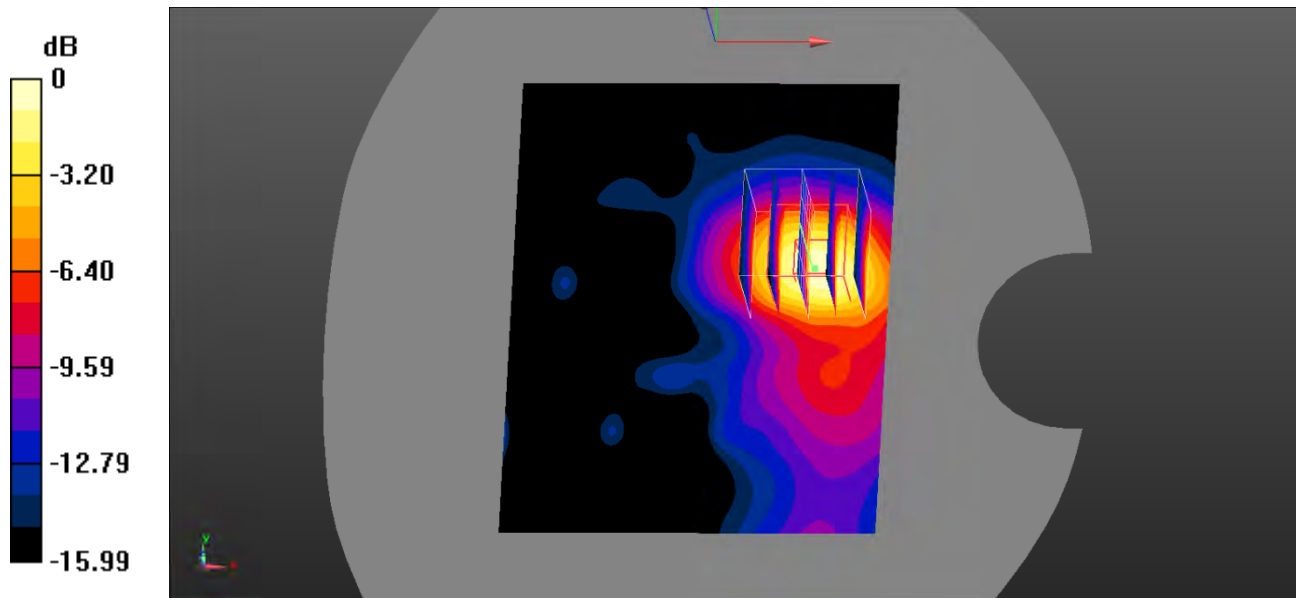

0 dB =  $0.251 \text{ W/kg}$  =  $-6.00 \text{ dBW/kg}$

**Test Plot 88#: LTE Band 7\_Body Left\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.227 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.06 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.363 \text{ W/kg}$   
**SAR(1 g) =  $0.199 \text{ W/kg}$ ; SAR(10 g) =  $0.111 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.218 \text{ W/kg}$

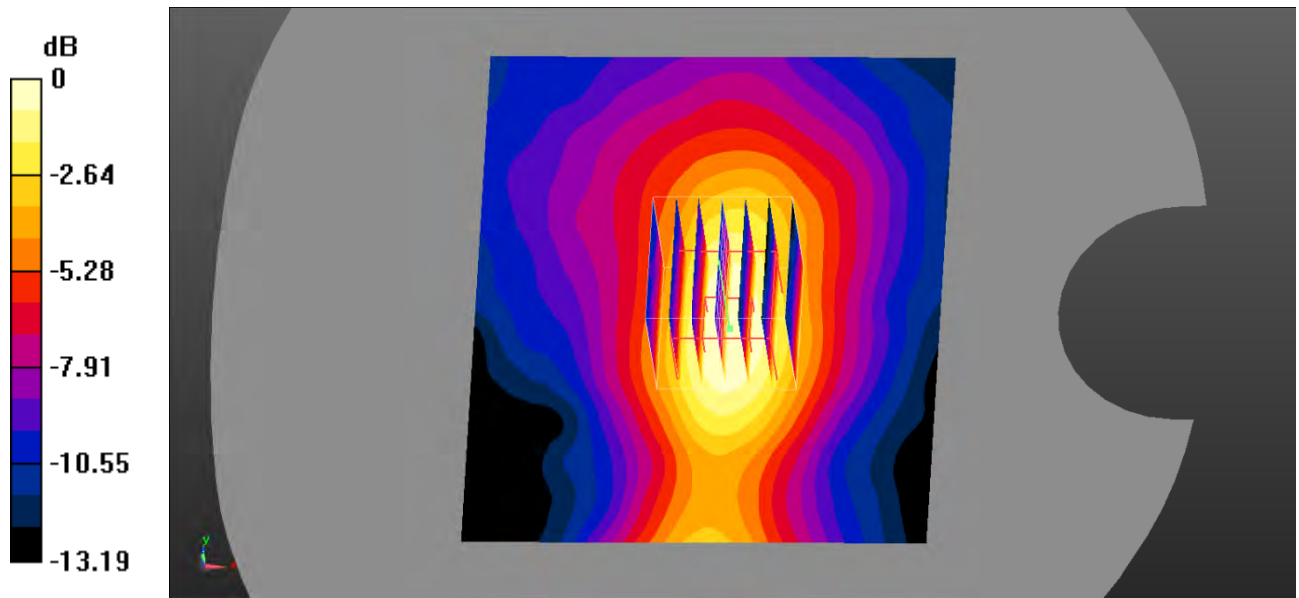

0 dB =  $0.218 \text{ W/kg}$  =  $-6.62 \text{ dBW/kg}$



**Test Plot 89#: LTE Band 7\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.182 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.136 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.321 \text{ W/kg}$   
**SAR(1 g) =  $0.166 \text{ W/kg}$ ; SAR(10 g) =  $0.095 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.179 \text{ W/kg}$

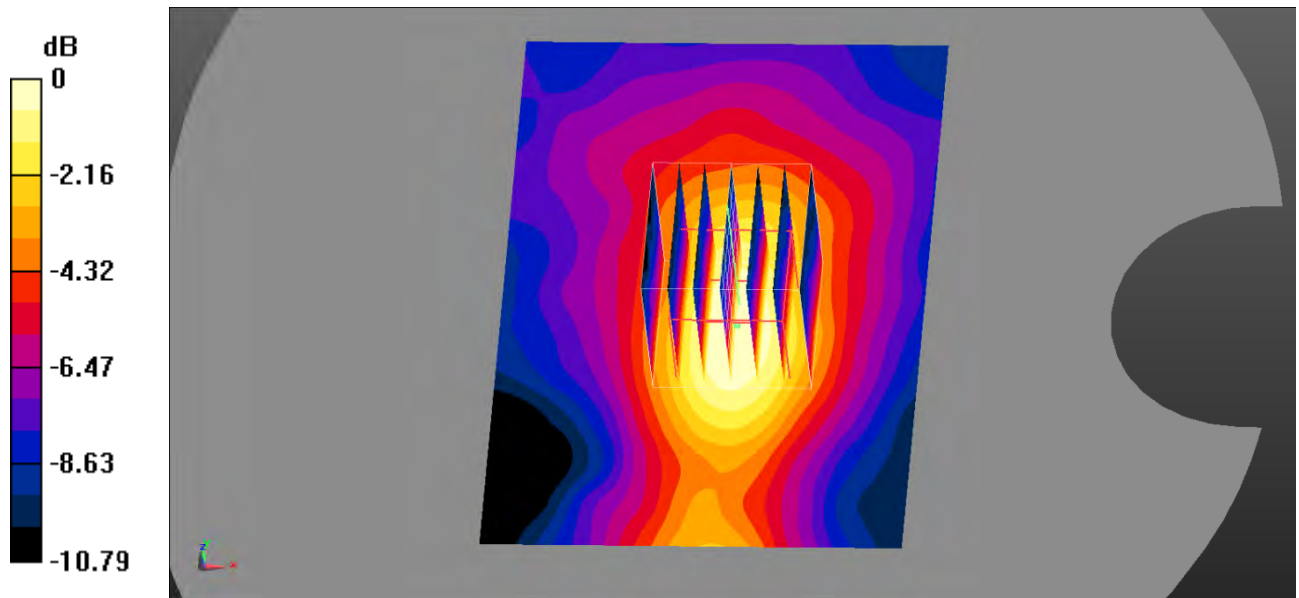

0 dB =  $0.179 \text{ W/kg}$  =  $-7.47 \text{ dBW/kg}$

**Test Plot 90#: LTE Band 7\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.382 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.041 \text{ V/m}$ ; Power Drift =  $0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.684 \text{ W/kg}$   
**SAR(1 g) =  $0.351 \text{ W/kg}$ ; SAR(10 g) =  $0.166 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.390 \text{ W/kg}$

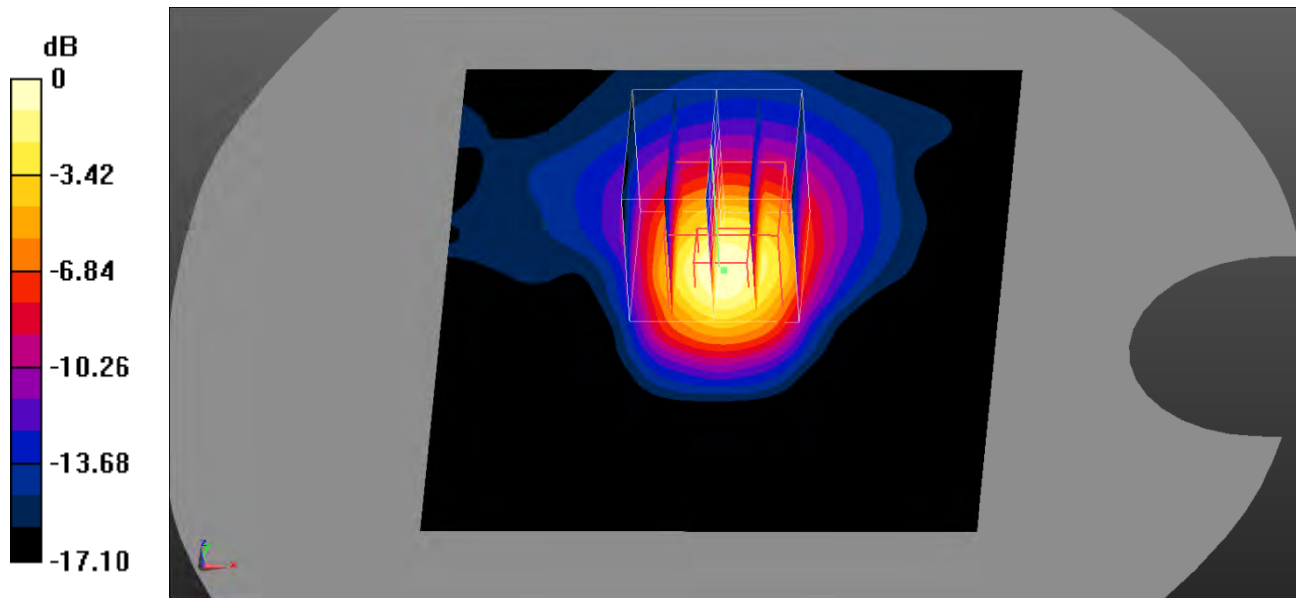

0 dB =  $0.390 \text{ W/kg}$  =  $-4.09 \text{ dBW/kg}$

**Test Plot 91#: LTE Band 7\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.929 \text{ S/m}$ ;  $\epsilon_r = 38.257$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.293 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.551 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.471 W/kg  
**SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.116 W/kg**  
 Maximum value of SAR (measured) = 0.269 W/kg

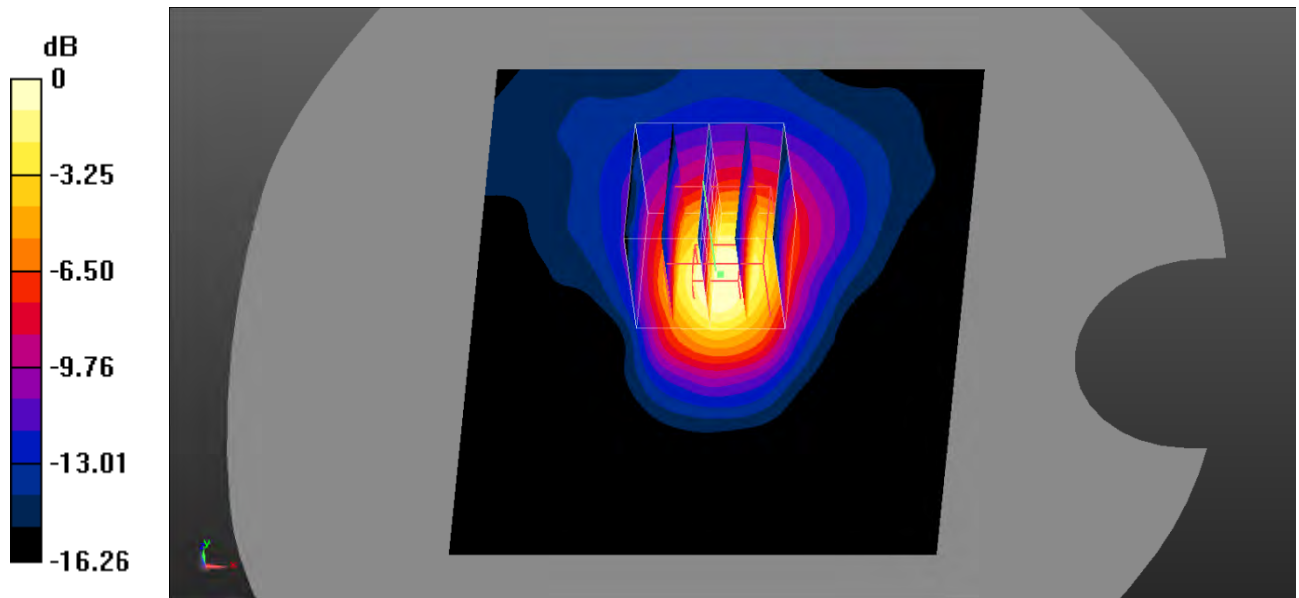

0 dB = 0.269 W/kg = -5.70 dBW/kg

**Test Plot 92#: LTE Band 17\_Head Left Cheek\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0197 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.088 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0250 \text{ W/kg}$   
**SAR(1 g) =  $0.017 \text{ W/kg}$ ; SAR(10 g) =  $0.012 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0168 \text{ W/kg}$

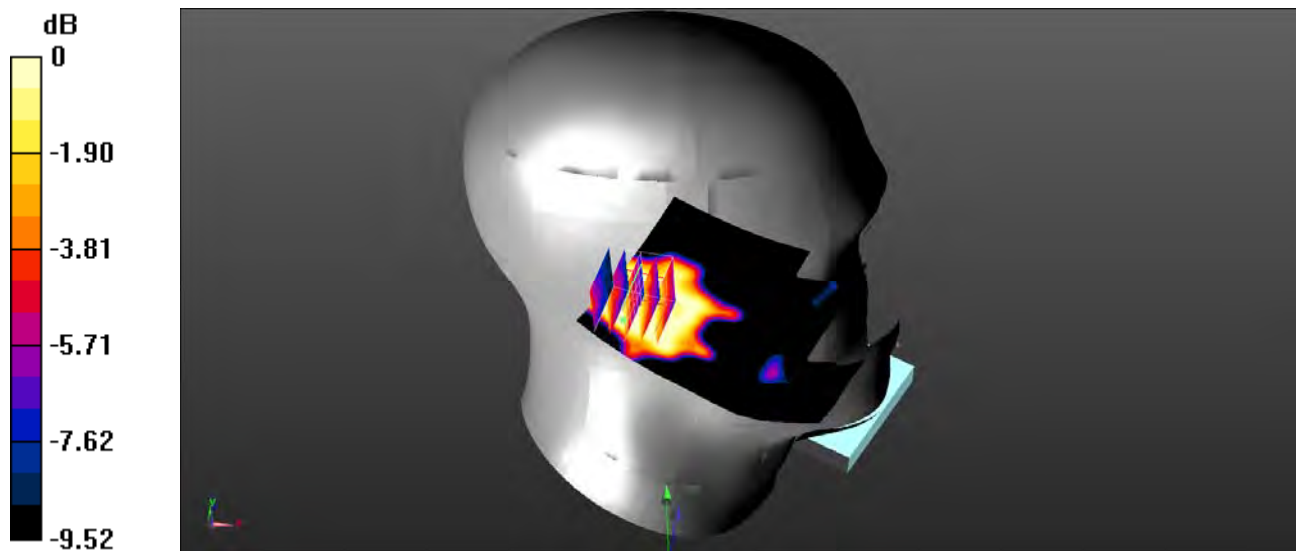

0 dB =  $0.0168 \text{ W/kg} = -17.75 \text{ dBW/kg}$

**Test Plot 93#: LTE Band 17\_Head Left Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0230 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.538 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0380 \text{ W/kg}$   
**SAR(1 g) =  $0.022 \text{ W/kg}$ ; SAR(10 g) =  $0.017 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0224 \text{ W/kg}$

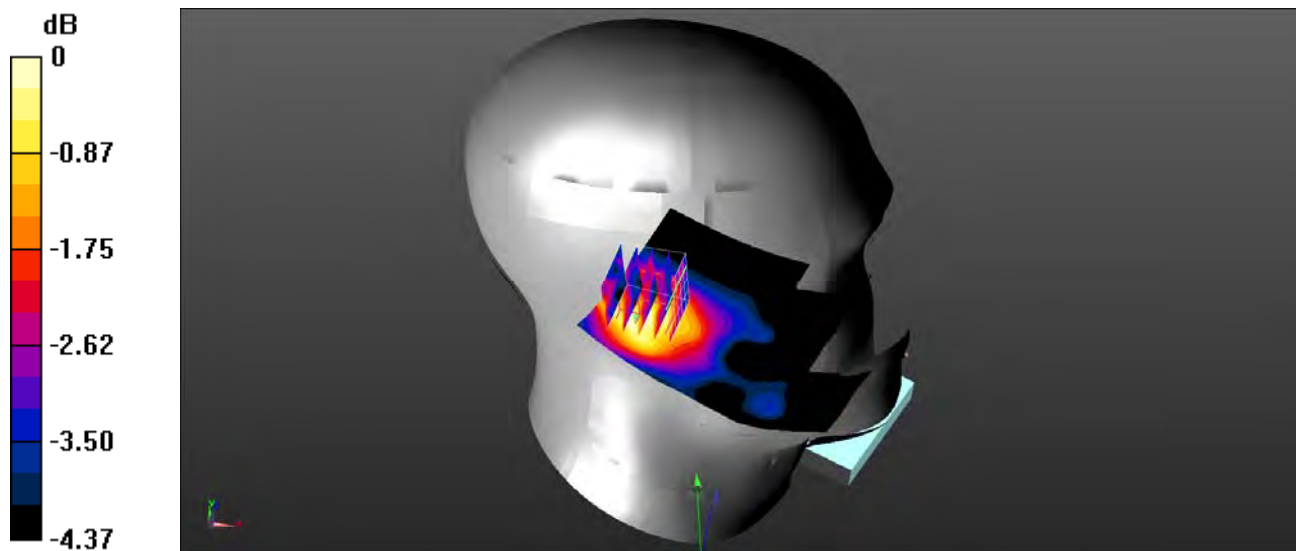

0 dB =  $0.0224 \text{ W/kg} = -16.50 \text{ dBW/kg}$

**Test Plot 94#: LTE Band 17\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.0256 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.158 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$

Peak SAR (extrapolated) =  $0.0400 \text{ W/kg}$

**SAR(1 g) =  $0.023 \text{ W/kg}$ ; SAR(10 g) =  $0.017 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0233 \text{ W/kg}$

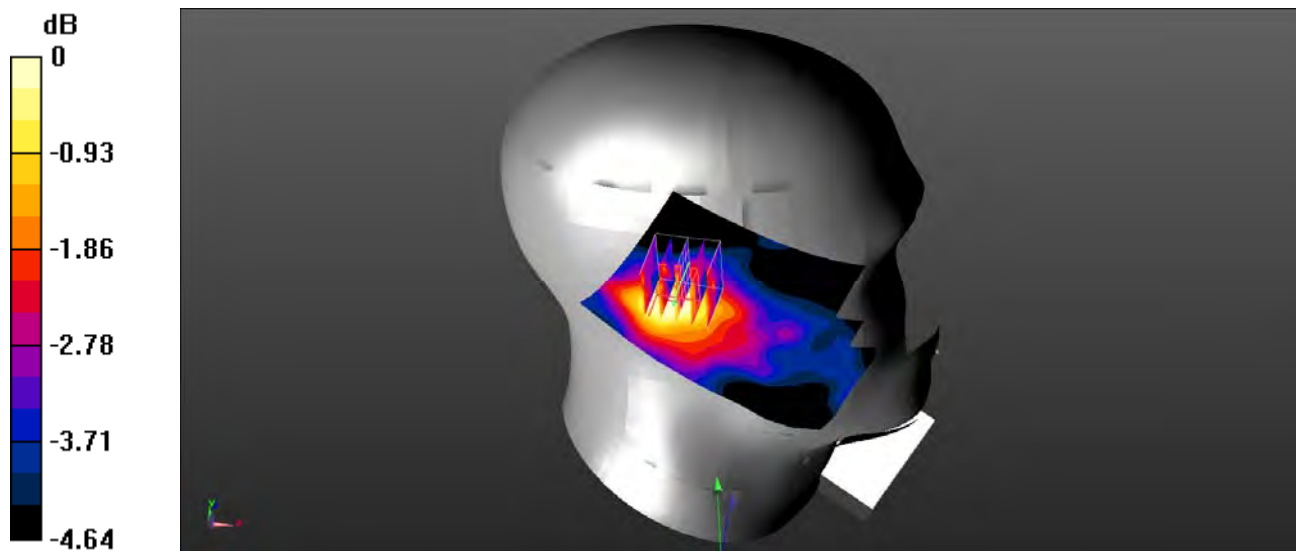

$0 \text{ dB} = 0.0233 \text{ W/kg} = -16.33 \text{ dBW/kg}$

**Test Plot 95#: LTE Band 17\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0209 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.686 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0370 \text{ W/kg}$   
**SAR(1 g) =  $0.020 \text{ W/kg}$ ; SAR(10 g) =  $0.016 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0207 \text{ W/kg}$

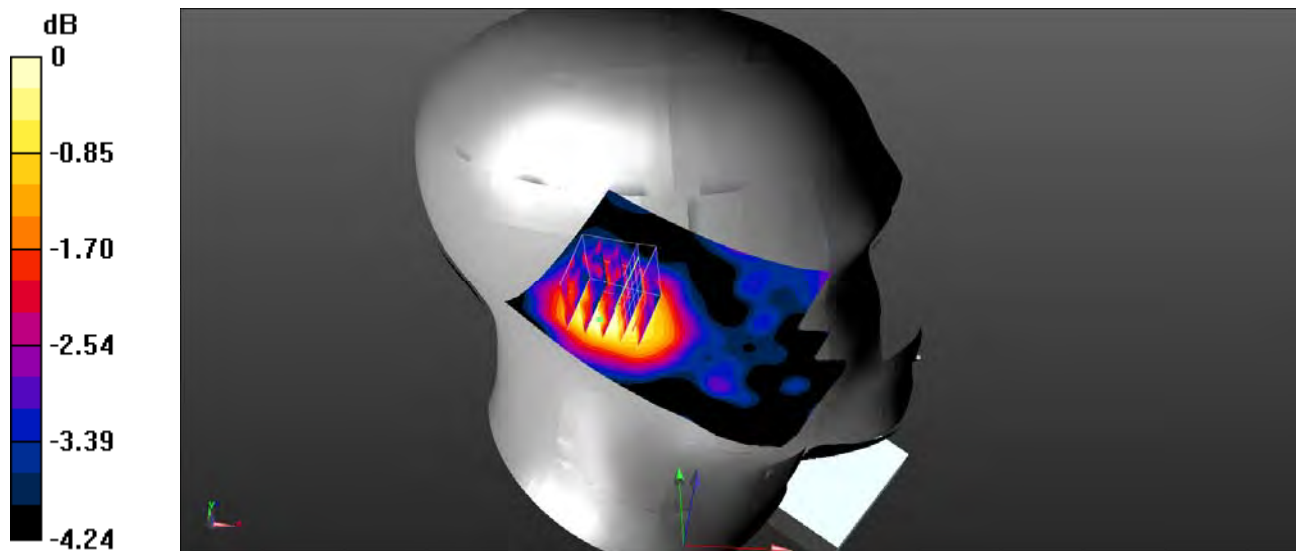

0 dB =  $0.0207 \text{ W/kg} = -16.84 \text{ dBW/kg}$

**Test Plot 96#: LTE Band 17\_Head Right Cheek\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0320 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.447 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0620 \text{ W/kg}$   
**SAR(1 g) =  $0.031 \text{ W/kg}$ ; SAR(10 g) =  $0.020 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0296 \text{ W/kg}$

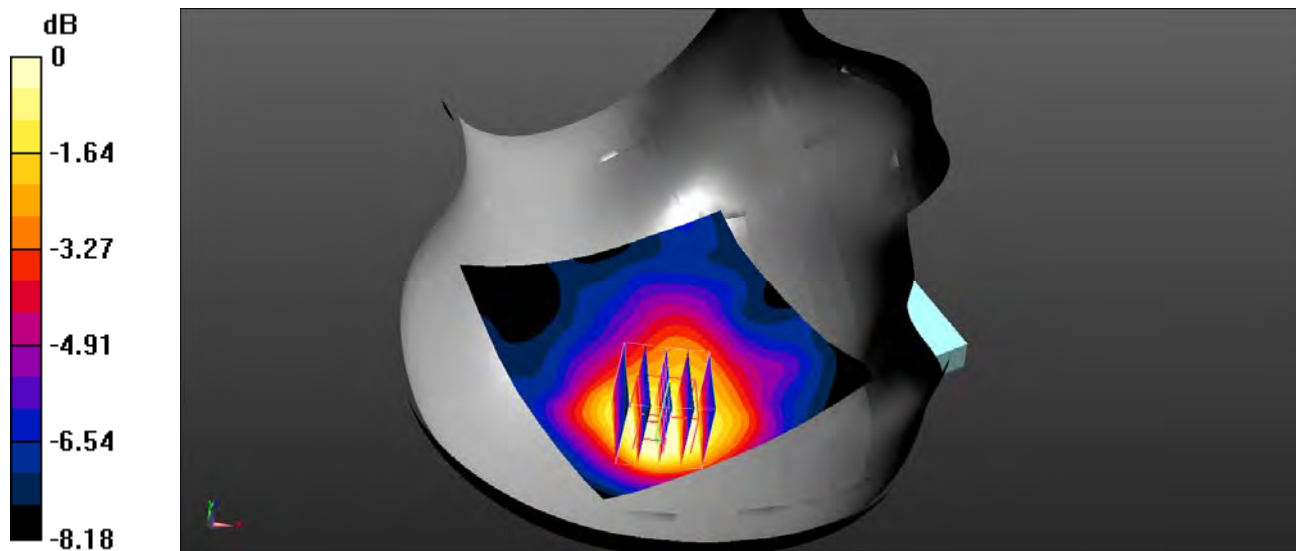

0 dB =  $0.0296 \text{ W/kg} = -15.29 \text{ dBW/kg}$



**Test Plot 97#: LTE Band 17\_Head Right Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0259 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.833 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0450 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0232 W/kg

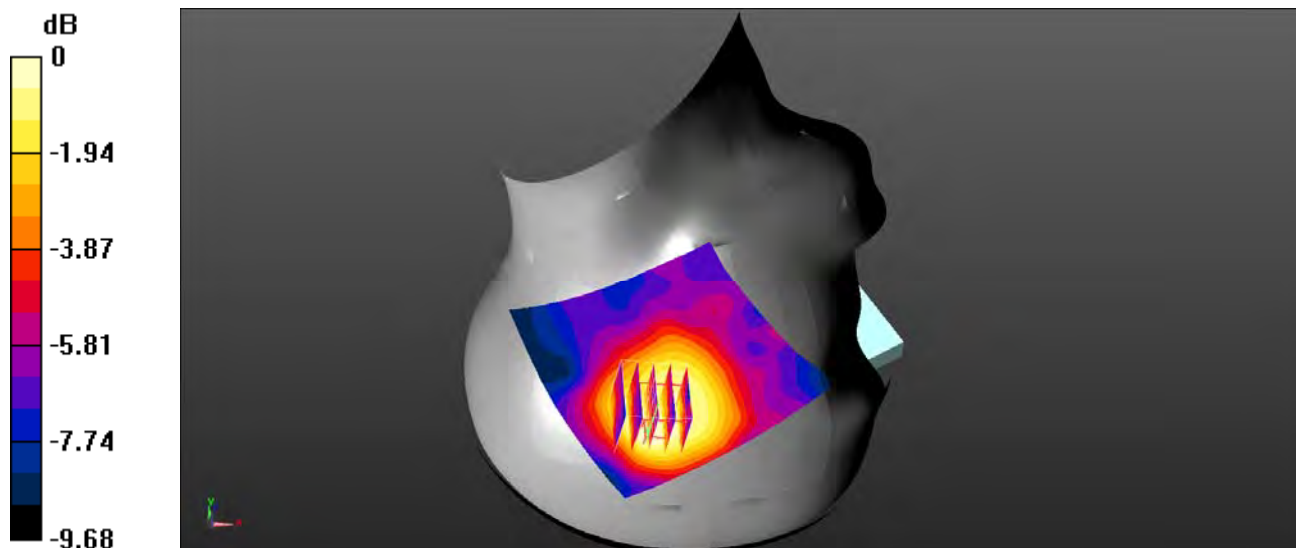

0 dB = 0.0232 W/kg = -16.35 dBW/kg

**Test Plot 98#: LTE Band 17\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN7441; ConvF(6.59, 6.59, 6.59) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 1/19/2021
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0343 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.994 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0580 \text{ W/kg}$   
**SAR(1 g) =  $0.029 \text{ W/kg}$ ; SAR(10 g) =  $0.017 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0302 \text{ W/kg}$

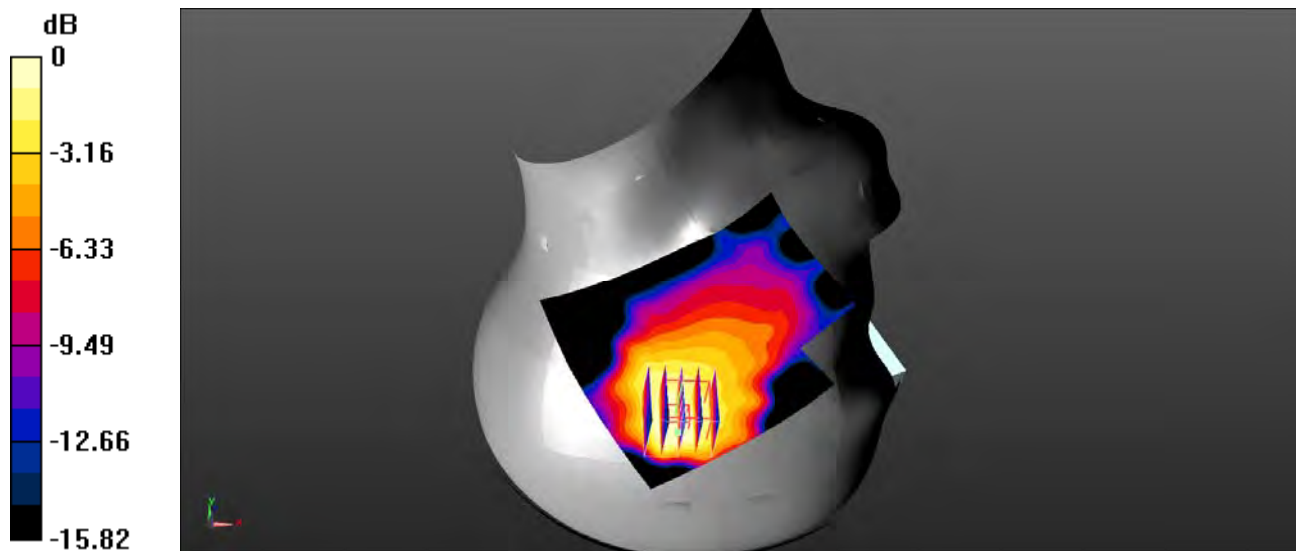

0 dB =  $0.0302 \text{ W/kg} = -15.20 \text{ dBW/kg}$

**Test Plot 99#: LTE Band 17\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN7441; ConvF(6.59, 6.59, 6.59) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 1/19/2021
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0241 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.810 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0520 \text{ W/kg}$   
**SAR(1 g) =  $0.025 \text{ W/kg}$ ; SAR(10 g) =  $0.014 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0263 \text{ W/kg}$

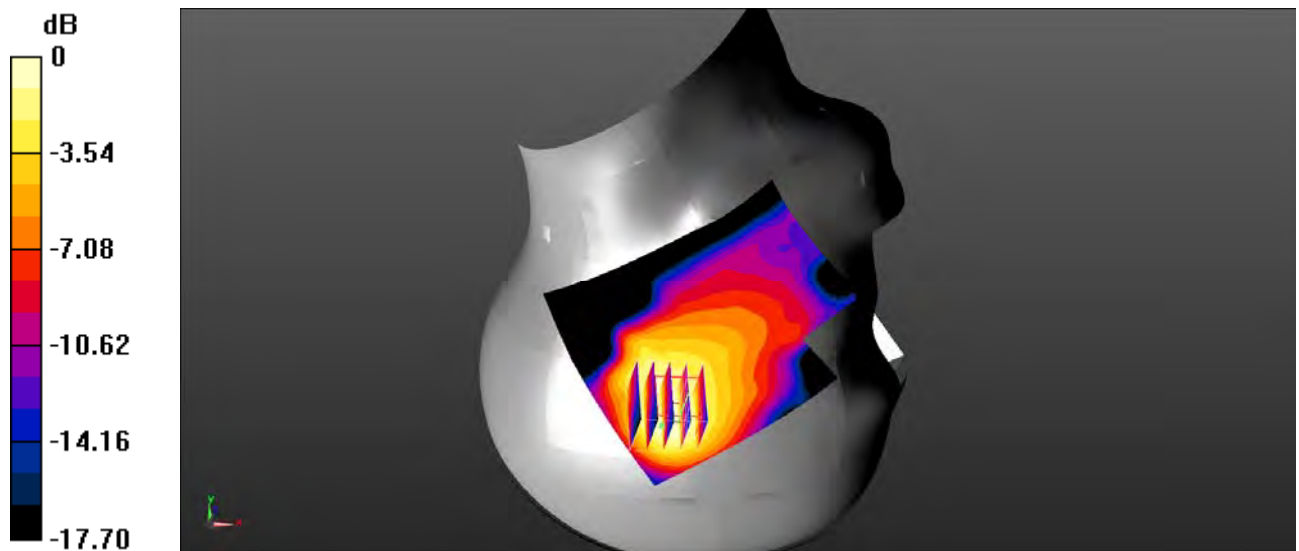

0 dB =  $0.0263 \text{ W/kg} = -15.80 \text{ dBW/kg}$

**Test Plot 100#: LTE Band 17\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0154 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.972 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0155 W/kg

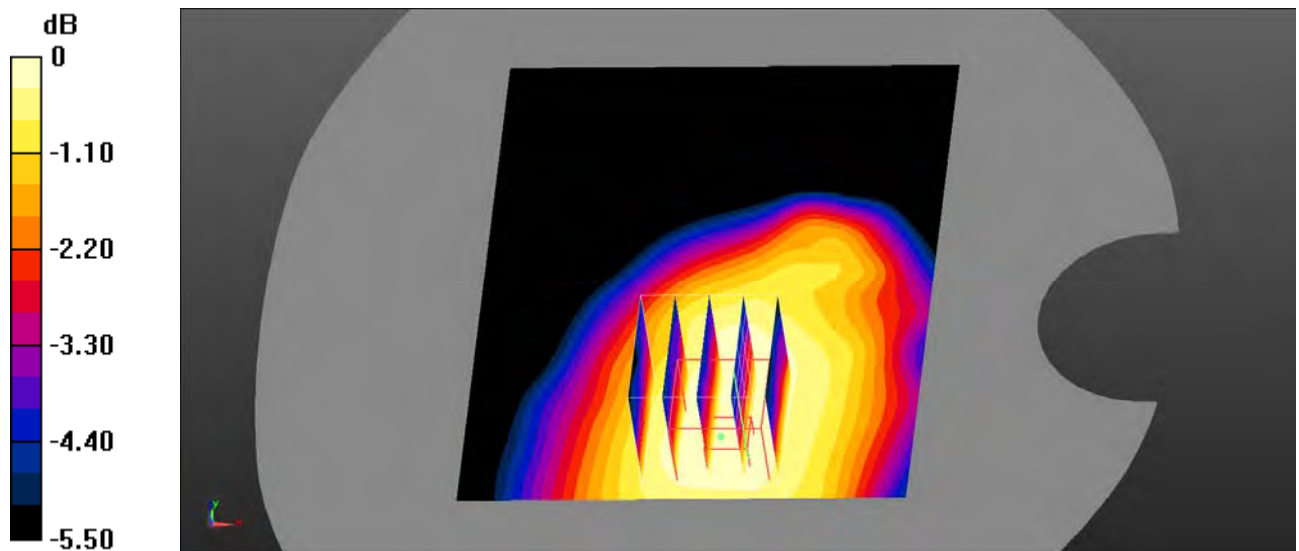

0 dB = 0.0155 W/kg = -18.10 dBW/kg

**Test Plot 101#: LTE Band 17\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.0138 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.609 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.0150 \text{ W/kg}$

**SAR(1 g) =  $0.013 \text{ W/kg}$ ; SAR(10 g) =  $0.011 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0140 \text{ W/kg}$

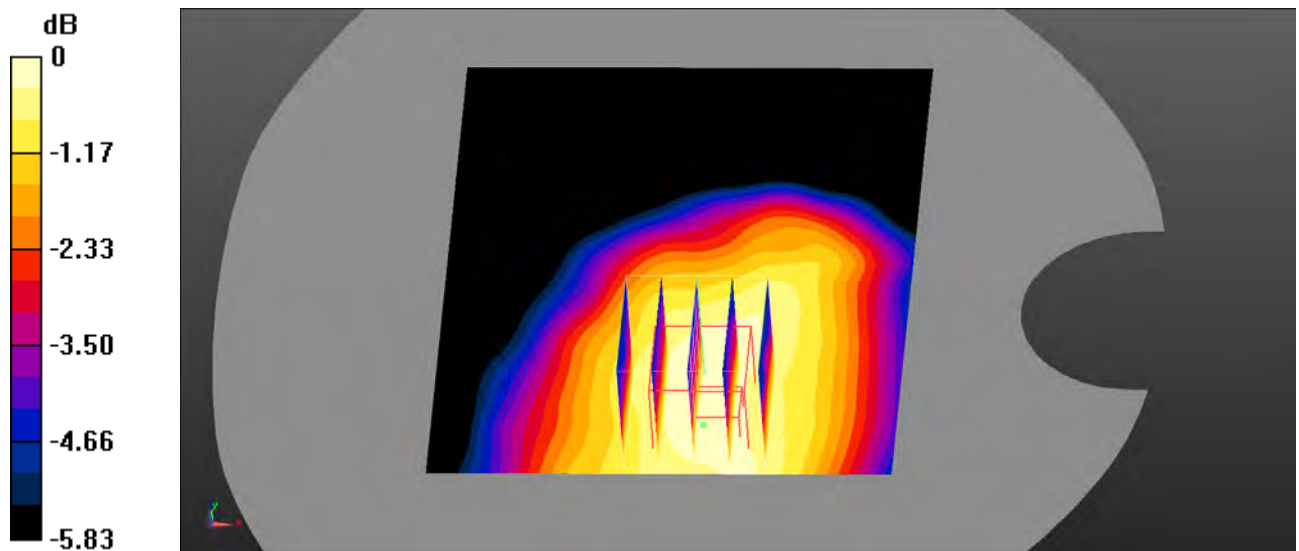

0 dB =  $0.0140 \text{ W/kg} = -18.54 \text{ dBW/kg}$

**Test Plot 102#: LTE Band 17\_Body Left\_1RB\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 710$  MHz;  $\sigma = 0.891$  S/m;  $\epsilon_r = 42.654$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0108 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.812 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0160 W/kg

**SAR(1 g) = 0.010 W/kg; SAR(10 g) = 0.00742 W/kg**

Maximum value of SAR (measured) = 0.0106 W/kg

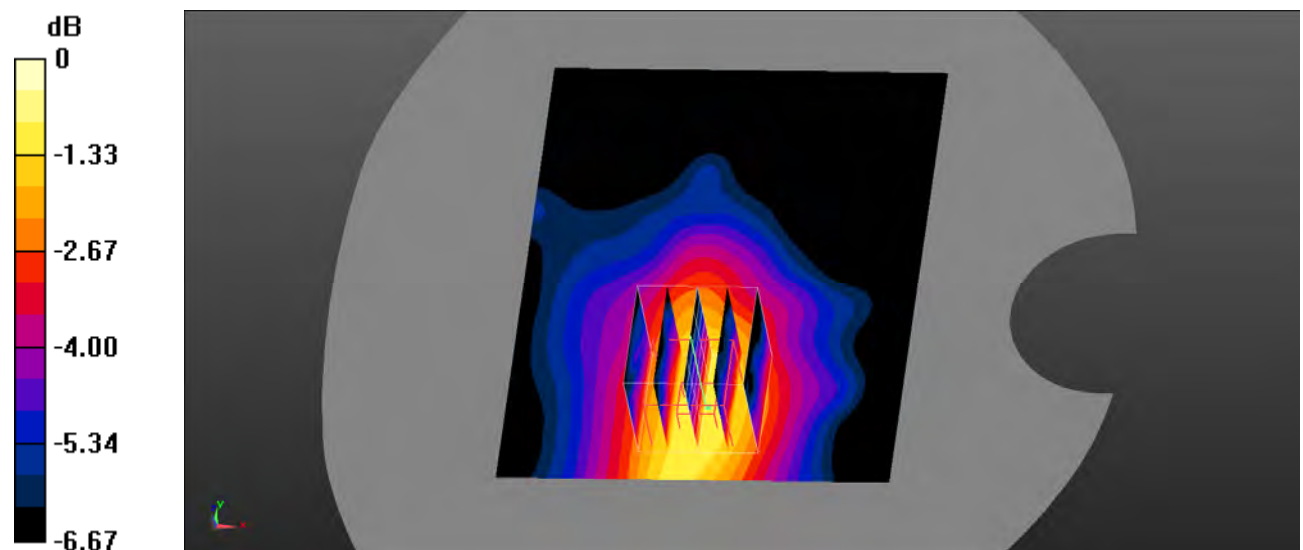

0 dB = 0.0135 W/kg = -18.70 dBW/kg

**Test Plot 103#: LTE Band 17\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.00938 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.716 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0150 \text{ W/kg}$   
**SAR(1 g) = 0.00907 W/kg; SAR(10 g) = 0.0068 W/kg**  
 Maximum value of SAR (measured) =  $0.00919 \text{ W/kg}$

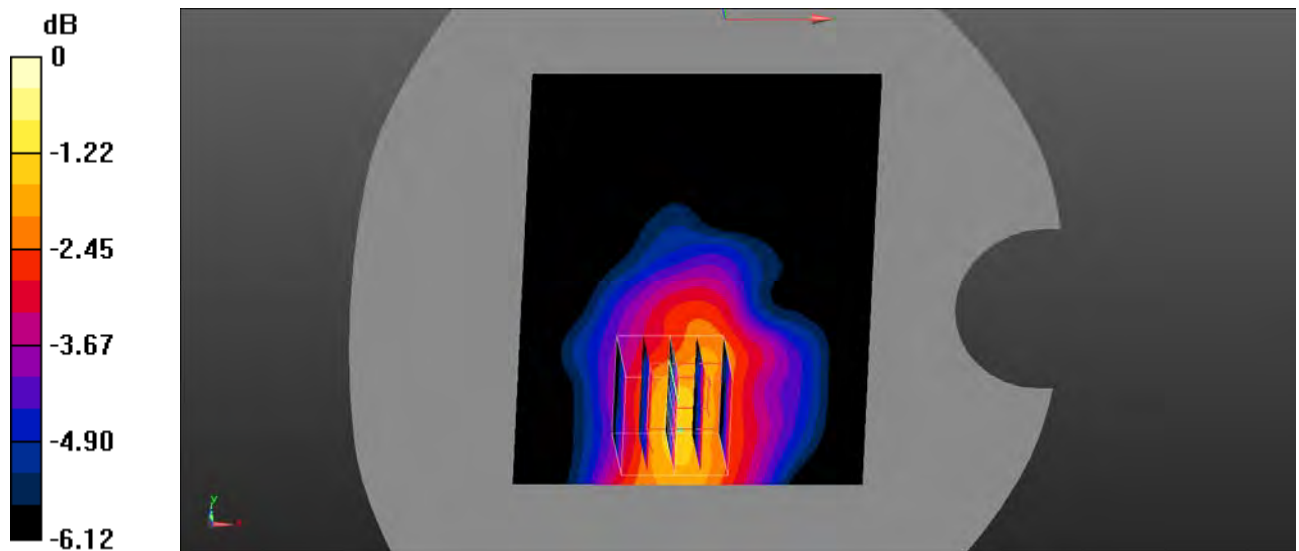

0 dB =  $0.0130 \text{ W/kg} = -18.86 \text{ dBW/kg}$

**Test Plot 104#: LTE Band 17\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.00653 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.583 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.0120 \text{ W/kg}$

**SAR(1 g) =  $0.00615 \text{ W/kg}$ ; SAR(10 g) =  $0.00428 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.00639 \text{ W/kg}$

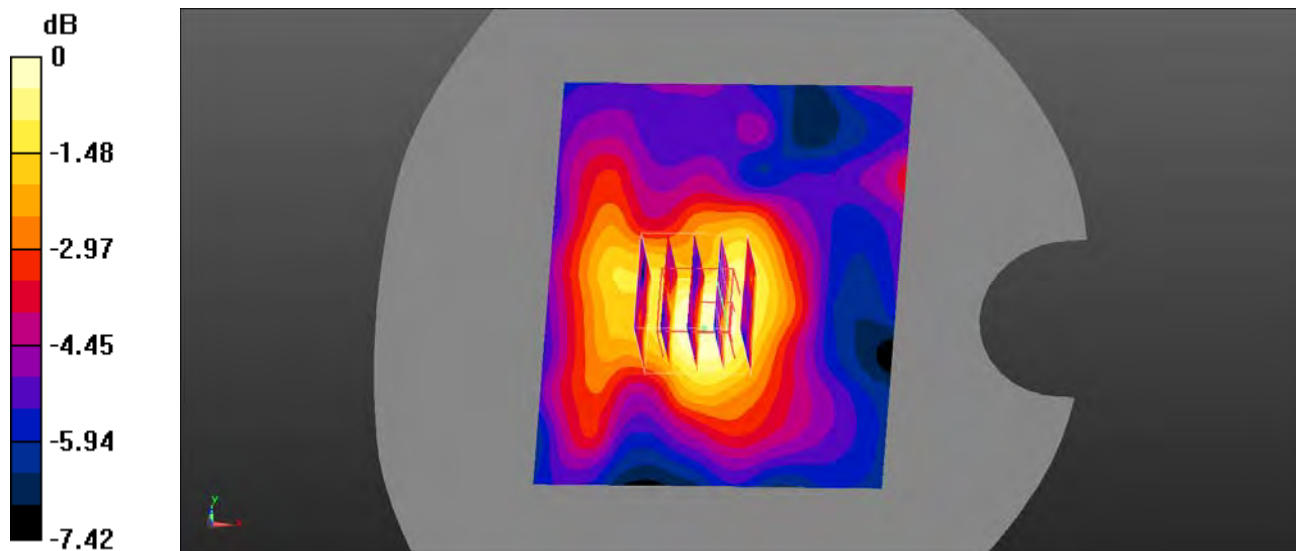

0 dB =  $0.00639 \text{ W/kg}$  =  $-21.94 \text{ dBW/kg}$



**Test Plot 105#: LTE Band 17\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 710 \text{ MHz}$ ;  $\sigma = 0.891 \text{ S/m}$ ;  $\epsilon_r = 42.654$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(10.28, 10.28, 10.28) @ 710 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.00554 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.484 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$

Peak SAR (extrapolated) =  $0.00752 \text{ W/kg}$

**SAR(1 g) =  $0.00548 \text{ W/kg}$ ; SAR(10 g) =  $0.00385 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.00566 \text{ W/kg}$

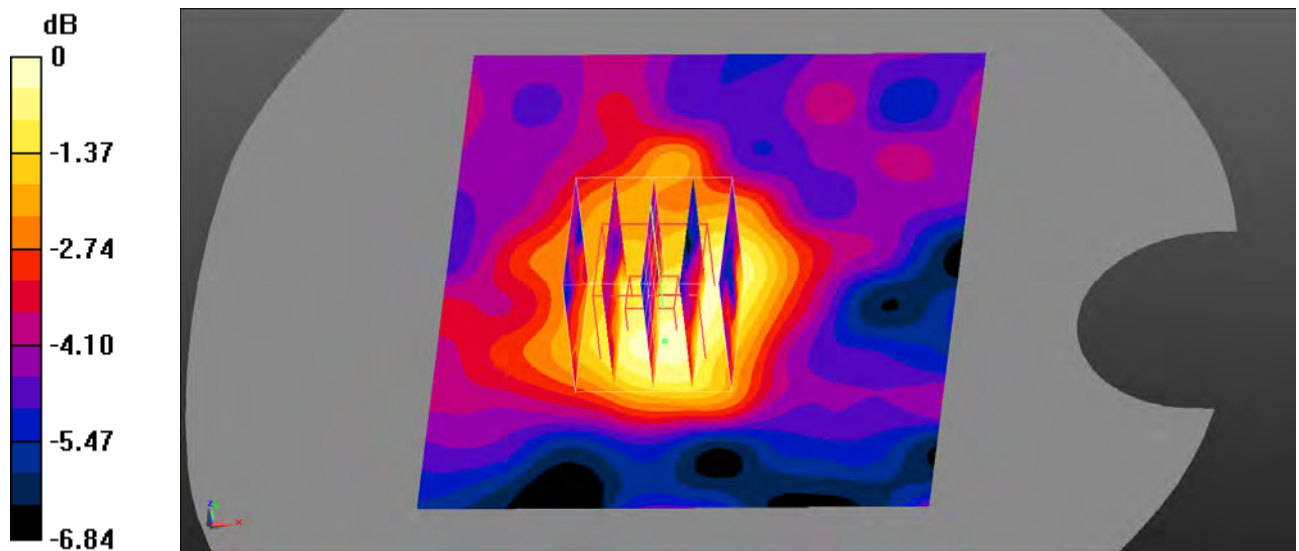

0 dB =  $0.00566 \text{ W/kg}$  =  $-22.47 \text{ dBW/kg}$

**Test Plot 106#: LTE Band 41\_Head Left Cheek\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.455 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.455 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.765 \text{ W/kg}$   
**SAR(1 g) =  $0.413 \text{ W/kg}$ ; SAR(10 g) =  $0.207 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.463 \text{ W/kg}$

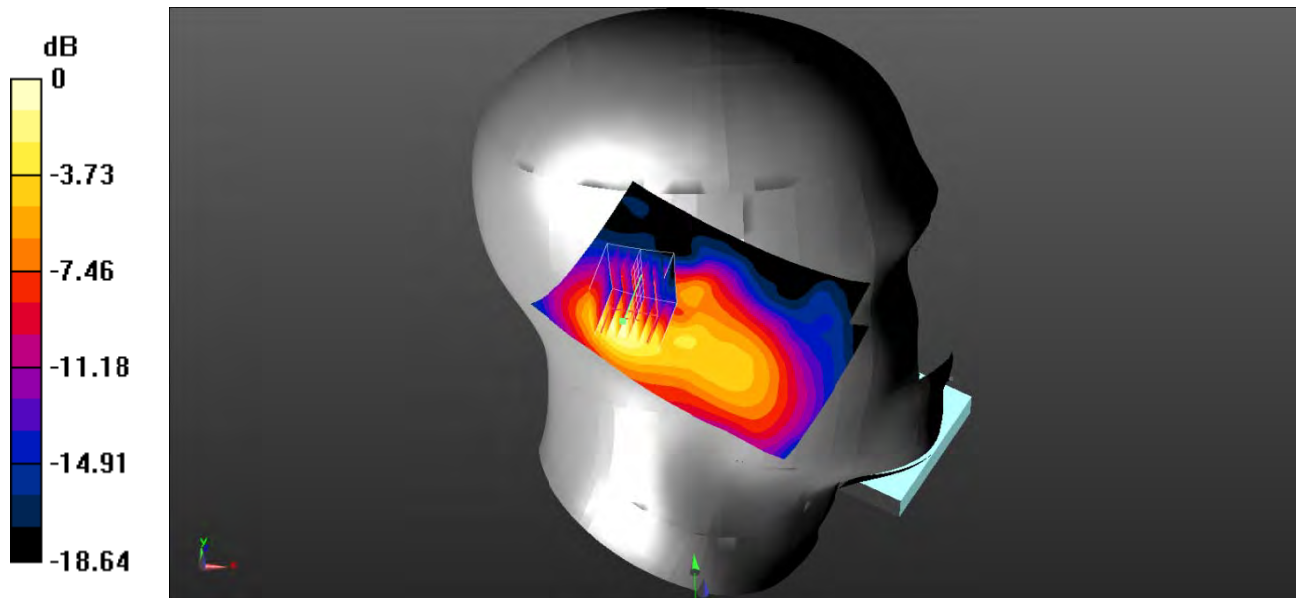

0 dB =  $0.463 \text{ W/kg}$  =  $-3.34 \text{ dBW/kg}$

**Test Plot 107#: LTE Band 41\_Head Left Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.367 \text{ W/kg}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.657 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.599 \text{ W/kg}$

**SAR(1 g) =  $0.330 \text{ W/kg}$ ; SAR(10 g) =  $0.167 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.371 \text{ W/kg}$

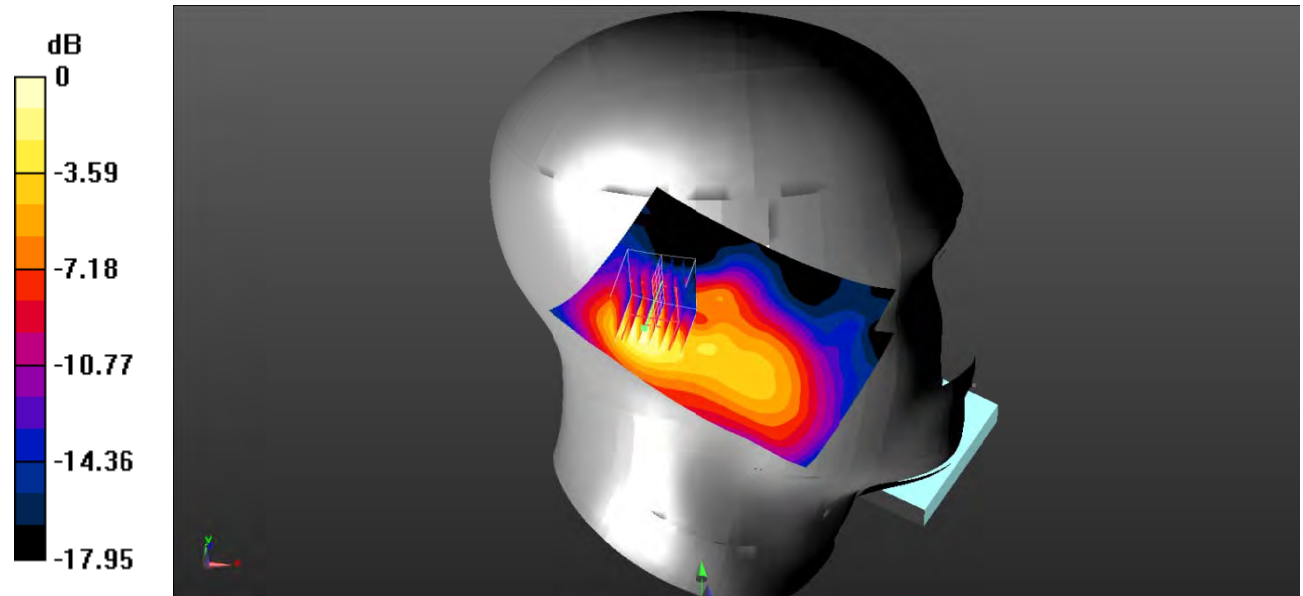

0 dB =  $0.371 \text{ W/kg}$  =  $-4.31 \text{ dBW/kg}$

**Test Plot 108#: LTE Band 41\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.656 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.205 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.12 \text{ W/kg}$   
**SAR(1 g) =  $0.589 \text{ W/kg}$ ; SAR(10 g) =  $0.282 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.672 \text{ W/kg}$

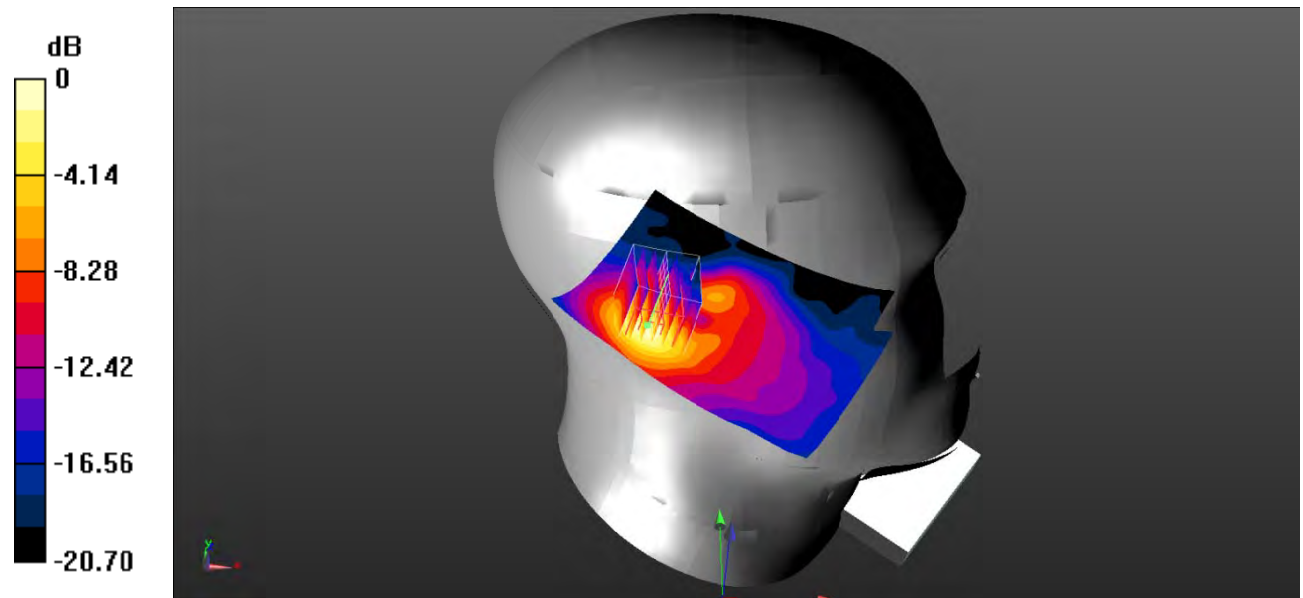

0 dB =  $0.672 \text{ W/kg}$  =  $-1.73 \text{ dBW/kg}$

**Test Plot 109#: LTE Band 41\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.549 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.891 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.54 \text{ W/kg}$   
**SAR(1 g) =  $0.555 \text{ W/kg}$ ; SAR(10 g) =  $0.223 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.547 \text{ W/kg}$

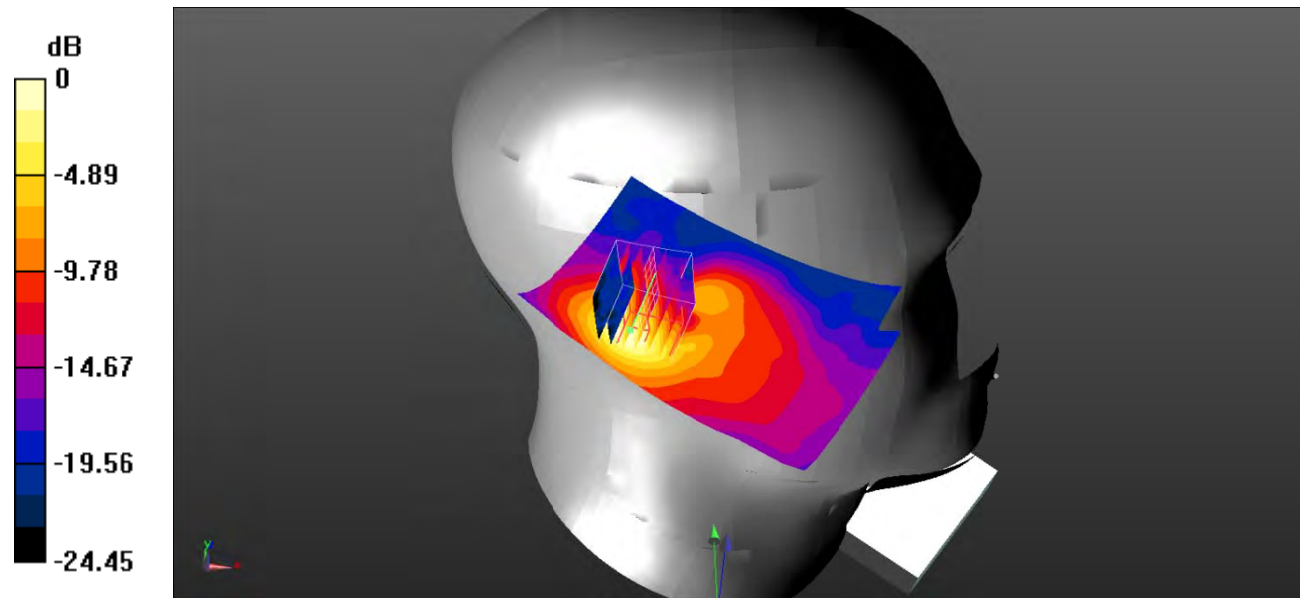

0 dB =  $0.547 \text{ W/kg}$  =  $-2.62 \text{ dBW/kg}$

**Test Plot 110#: LTE Band 41\_Head Right Check\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.865 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.351 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.52 \text{ W/kg}$   
**SAR(1 g) =  $0.747 \text{ W/kg}$ ; SAR(10 g) =  $0.388 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.834 \text{ W/kg}$

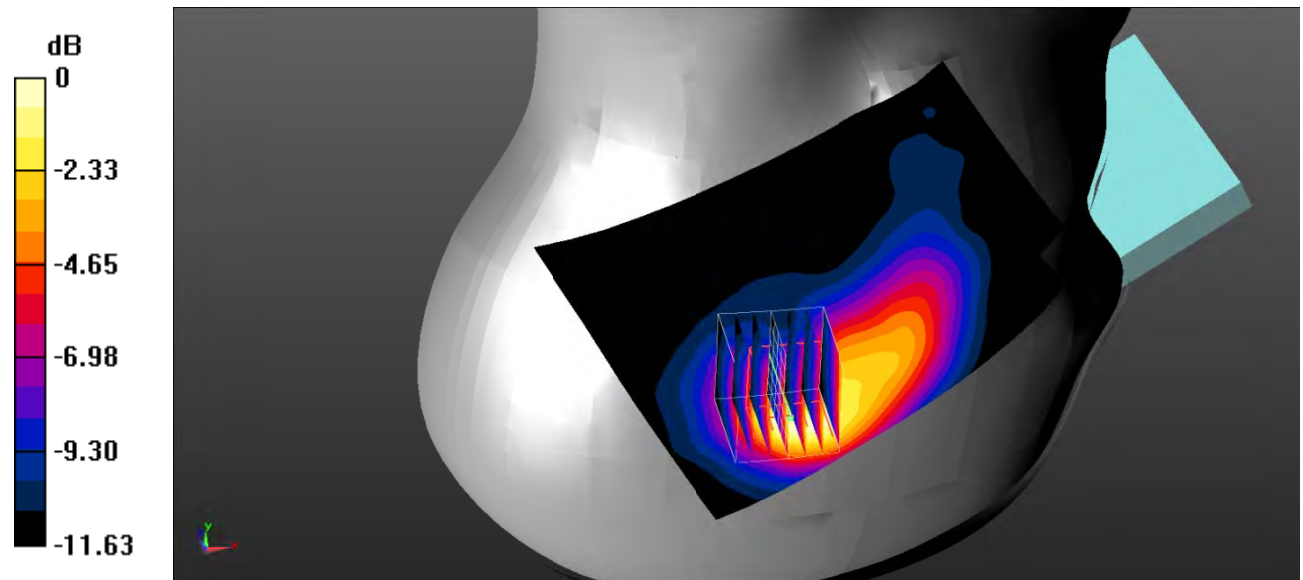

0 dB =  $0.834 \text{ W/kg}$  =  $-0.79 \text{ dBW/kg}$

**Test Plot 111#: LTE Band 41\_Head Right Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.650 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.639 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.07 \text{ W/kg}$   
**SAR(1 g) =  $0.528 \text{ W/kg}$ ; SAR(10 g) =  $0.262 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.586 \text{ W/kg}$

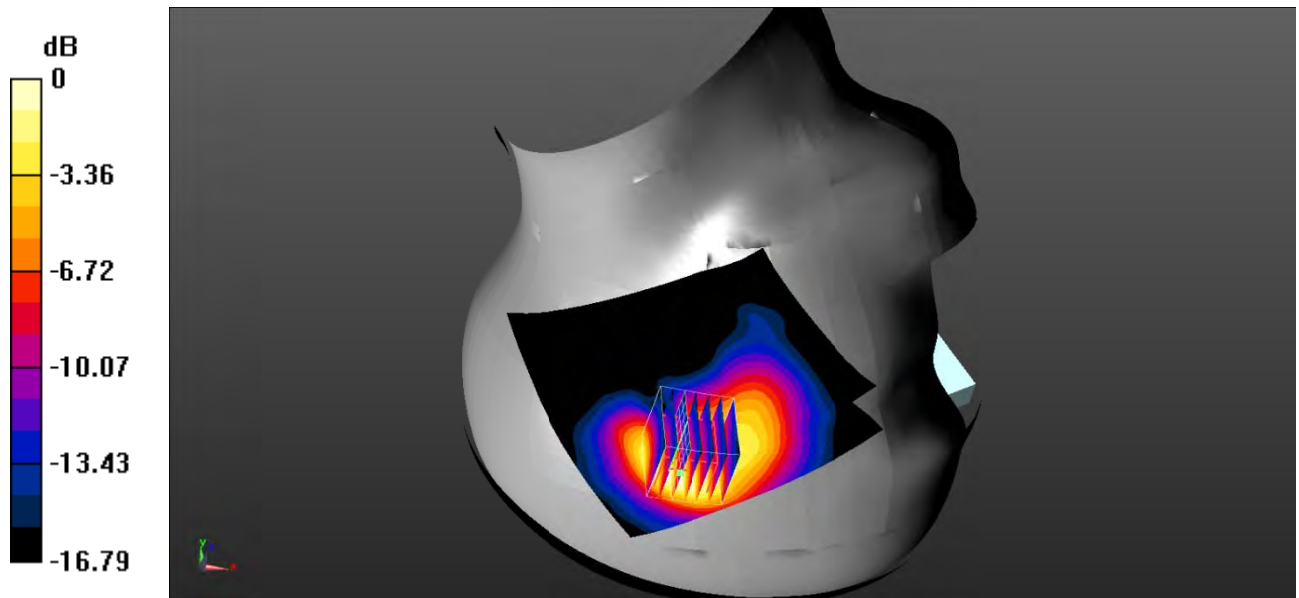

0 dB =  $0.586 \text{ W/kg}$  =  $-2.32 \text{ dBW/kg}$

**Test Plot 112#: LTE Band 41\_Head Right Tilt\_1RB\_Low****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic TDD-LTE; Frequency: 2545 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 2545$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 38.483$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.227 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.02 W/kg

**SAR(1 g) = 0.912 W/kg; SAR(10 g) = 0.405 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

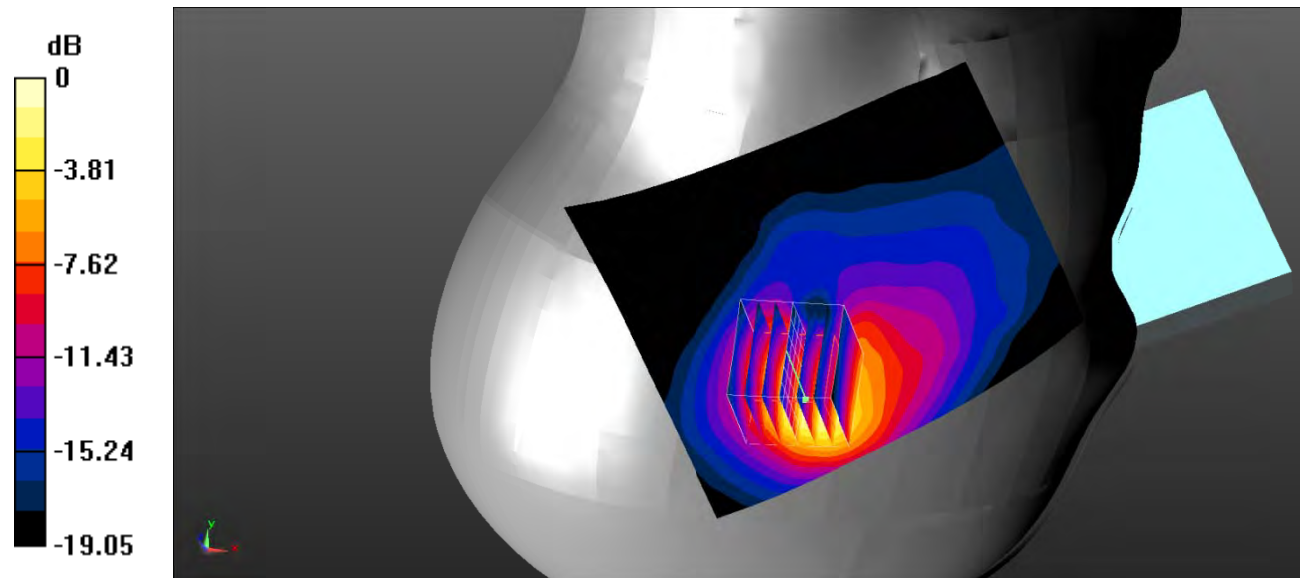

0 dB = 1.04 W/kg = 0.17 dBW/kg



**Test Plot 113#: LTE Band 41\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.996 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.606 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.92 \text{ W/kg}$   
**SAR(1 g) =  $0.848 \text{ W/kg}$ ; SAR(10 g) =  $0.377 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.965 \text{ W/kg}$

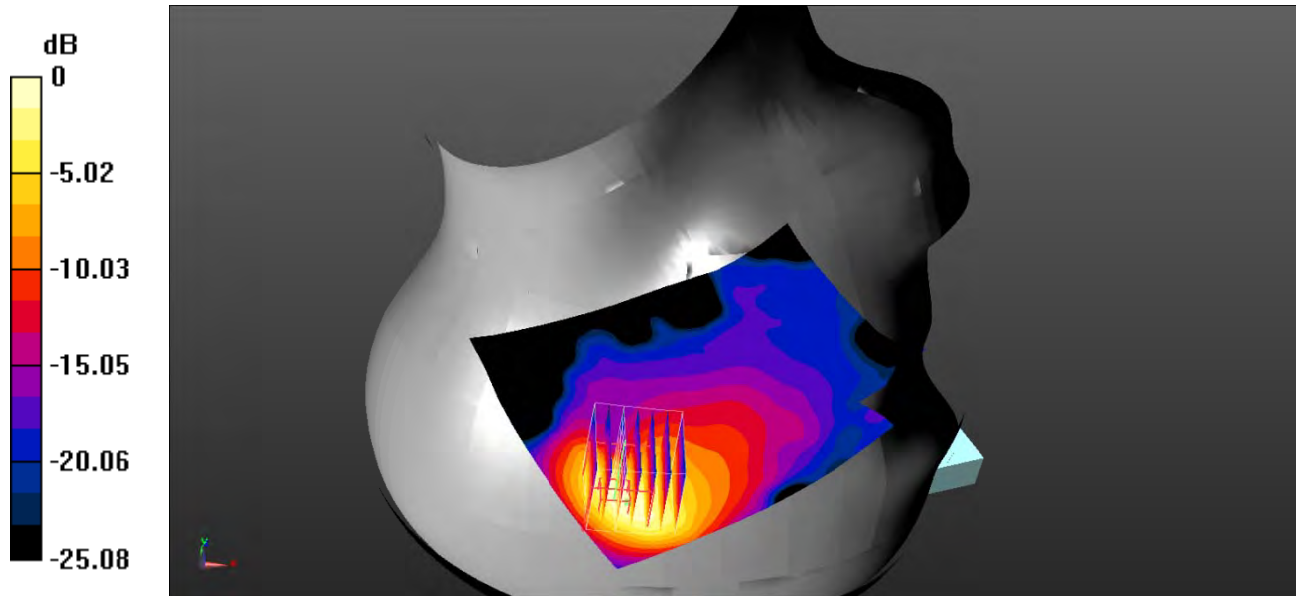

0 dB =  $0.965 \text{ W/kg}$  =  $-0.15 \text{ dBW/kg}$

**Test Plot 114#: LTE Band 41\_Head Right Tilt\_1RB\_High****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic TDD-LTE; Frequency: 2645 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 2645$  MHz;  $\sigma = 1.979$  S/m;  $\epsilon_r = 38.251$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.756 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.672 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.291 W/kg**

Maximum value of SAR (measured) = 0.702 W/kg

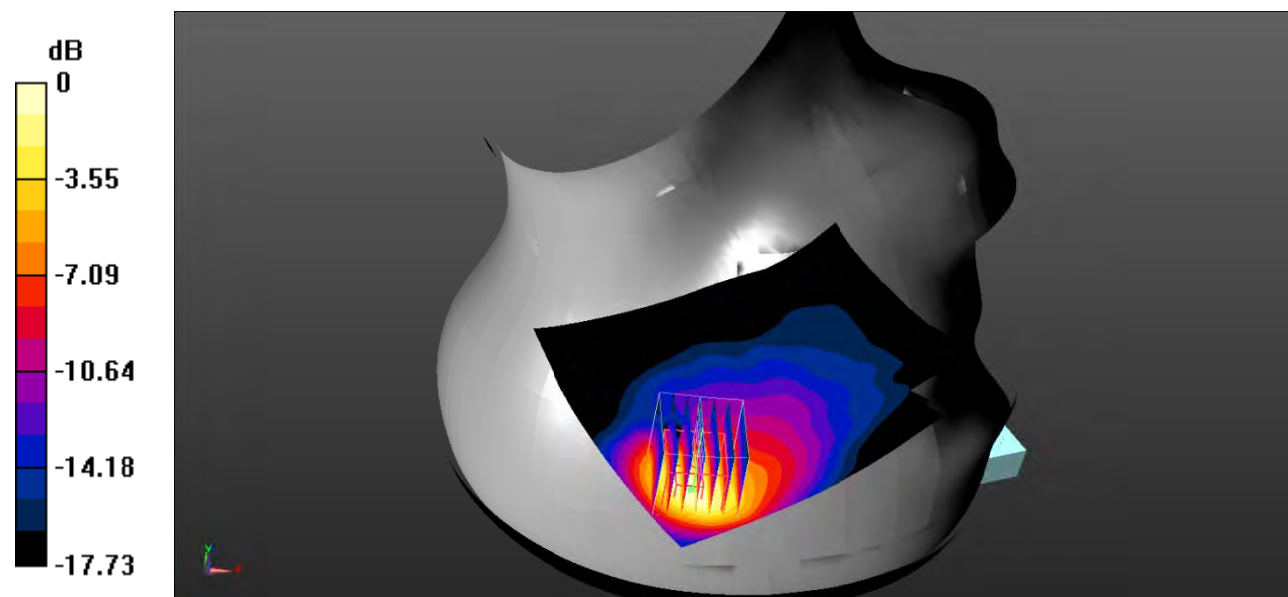

0 dB = 0.702 W/kg = -1.54 dBW/kg

**Test Plot 115#: LTE Band 41\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.658 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.129 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.34 \text{ W/kg}$   
**SAR(1 g) =  $0.601 \text{ W/kg}$ ; SAR(10 g) =  $0.270 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.673 \text{ W/kg}$

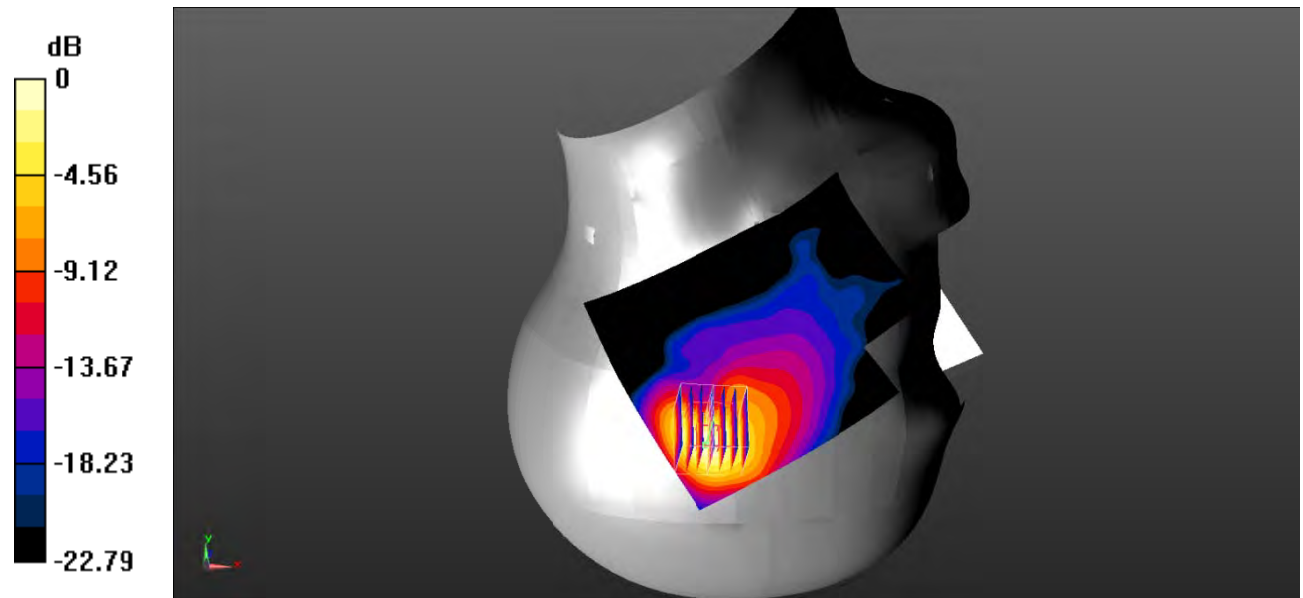

0 dB =  $0.673 \text{ W/kg}$  =  $-1.72 \text{ dBW/kg}$

**Test Plot 116#: LTE Band 41\_Head Right Tilt\_100%RB\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.967$  S/m;  $\epsilon_r = 38.356$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.764 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.246 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.288 W/kg**

Maximum value of SAR (measured) = 0.713 W/kg

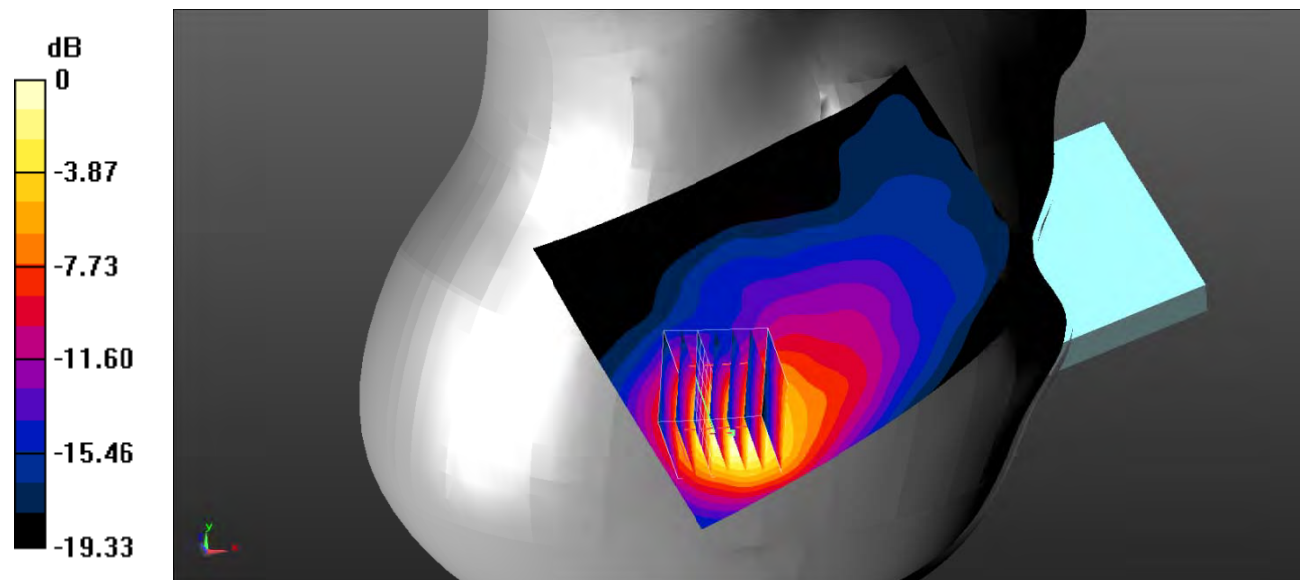

0 dB = 0.713 W/kg = -1.47 dBW/kg

**Test Plot 117#: LTE Band 41\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.704 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.102 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.21 \text{ W/kg}$   
**SAR(1 g) =  $0.600 \text{ W/kg}$ ; SAR(10 g) =  $0.267 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.686 \text{ W/kg}$

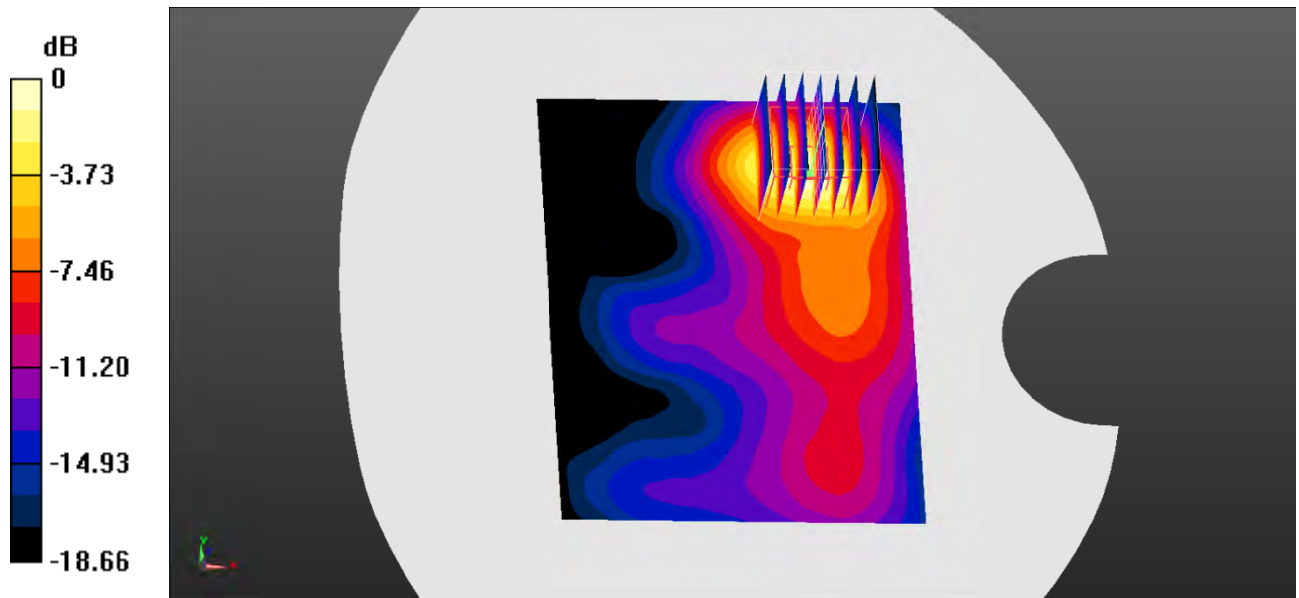

0 dB =  $0.686 \text{ W/kg}$  =  $-1.64 \text{ dBW/kg}$

**Test Plot 118#: LTE Band 41\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.562 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.597 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.982 \text{ W/kg}$   
**SAR(1 g) =  $0.486 \text{ W/kg}$ ; SAR(10 g) =  $0.217 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.559 \text{ W/kg}$

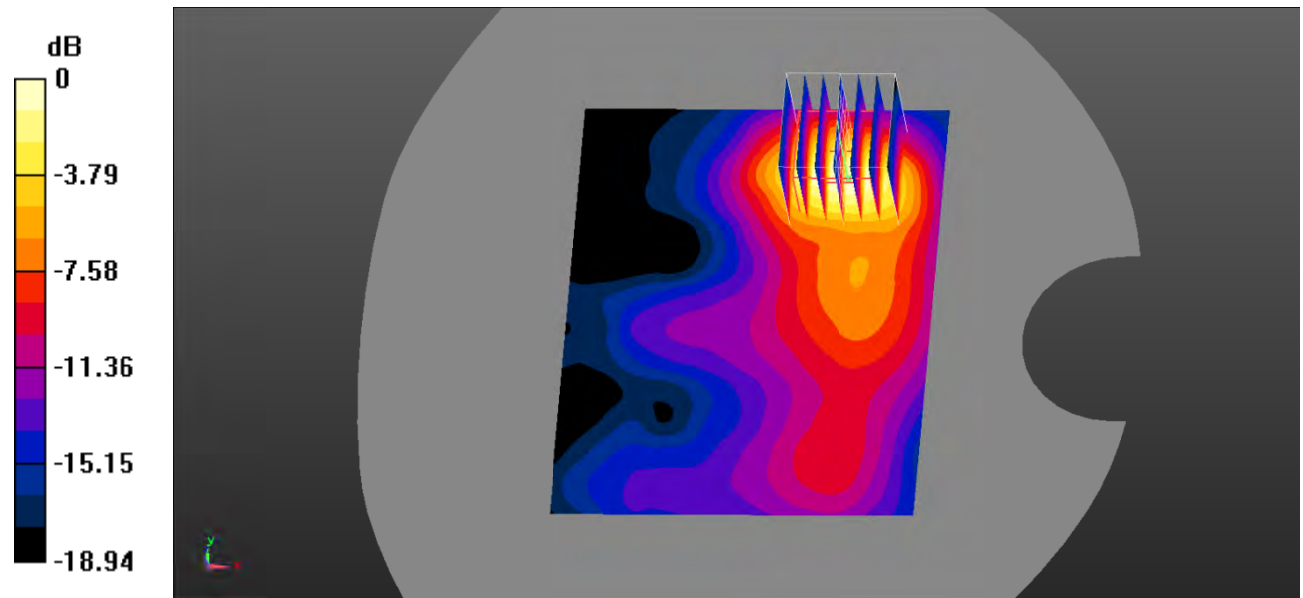

0 dB =  $0.559 \text{ W/kg} = -2.53 \text{ dBW/kg}$

**Test Plot 119#: LTE Band 41\_Body Left\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.178 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.676 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.301 \text{ W/kg}$   
**SAR(1 g) =  $0.163 \text{ W/kg}$ ; SAR(10 g) =  $0.089 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.178 \text{ W/kg}$

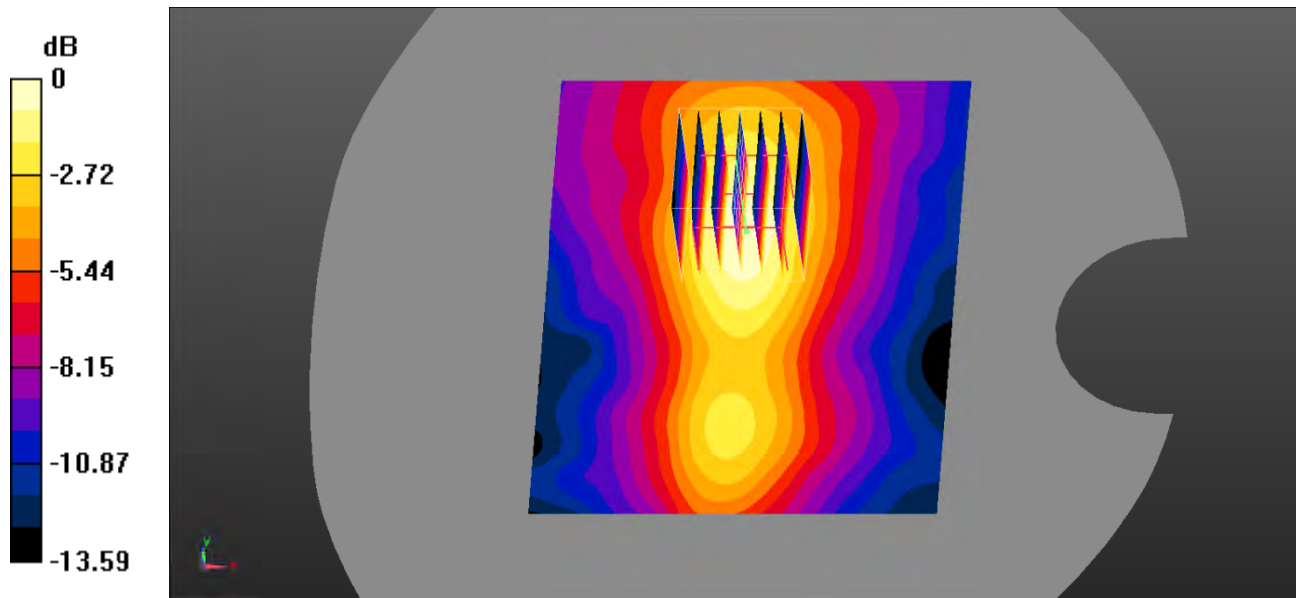

0 dB =  $0.178 \text{ W/kg}$  =  $-7.50 \text{ dBW/kg}$

**Test Plot 120#: LTE Band 41\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.148 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.083 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.251 \text{ W/kg}$   
**SAR(1 g) =  $0.134 \text{ W/kg}$ ; SAR(10 g) =  $0.075 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.145 \text{ W/kg}$

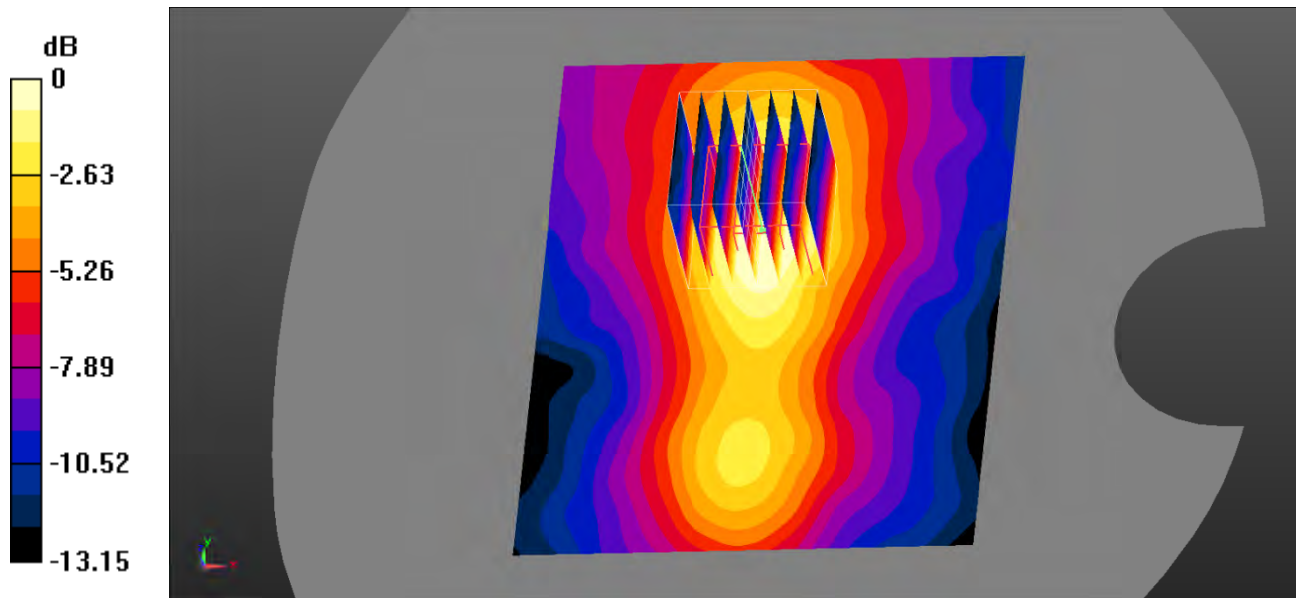

0 dB =  $0.145 \text{ W/kg}$  =  $-8.39 \text{ dBW/kg}$



**Test Plot 121#: LTE Band 41\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.657 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.71 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.02 \text{ W/kg}$   
**SAR(1 g) =  $0.554 \text{ W/kg}$ ; SAR(10 g) =  $0.253 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.633 \text{ W/kg}$

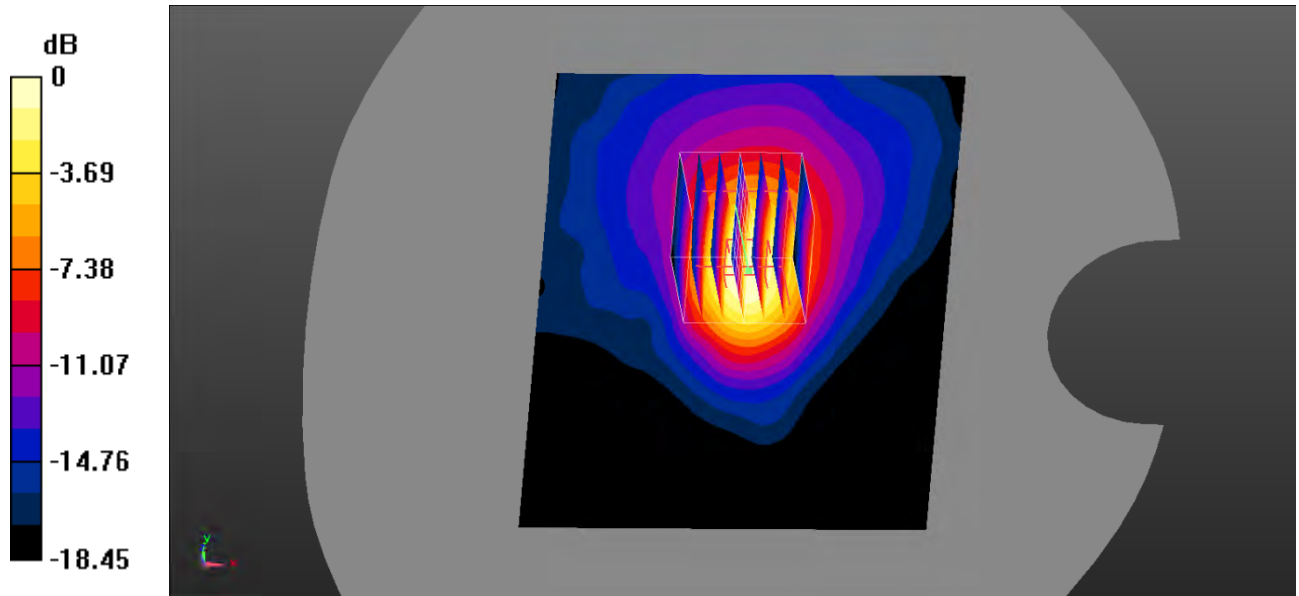

0 dB =  $0.633 \text{ W/kg}$  =  $-1.99 \text{ dBW/kg}$

**Test Plot 122#: LTE Band 41\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:2  
 Medium parameters used:  $f = 2595 \text{ MHz}$ ;  $\sigma = 1.967 \text{ S/m}$ ;  $\epsilon_r = 38.356$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.33, 7.33, 7.33)
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2) ;

**Area Scan (101x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.516 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.10 \text{ V/m}$ ; Power Drift =  $0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.923 \text{ W/kg}$   
**SAR(1 g) =  $0.446 \text{ W/kg}$ ; SAR(10 g) =  $0.203 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.503 \text{ W/kg}$

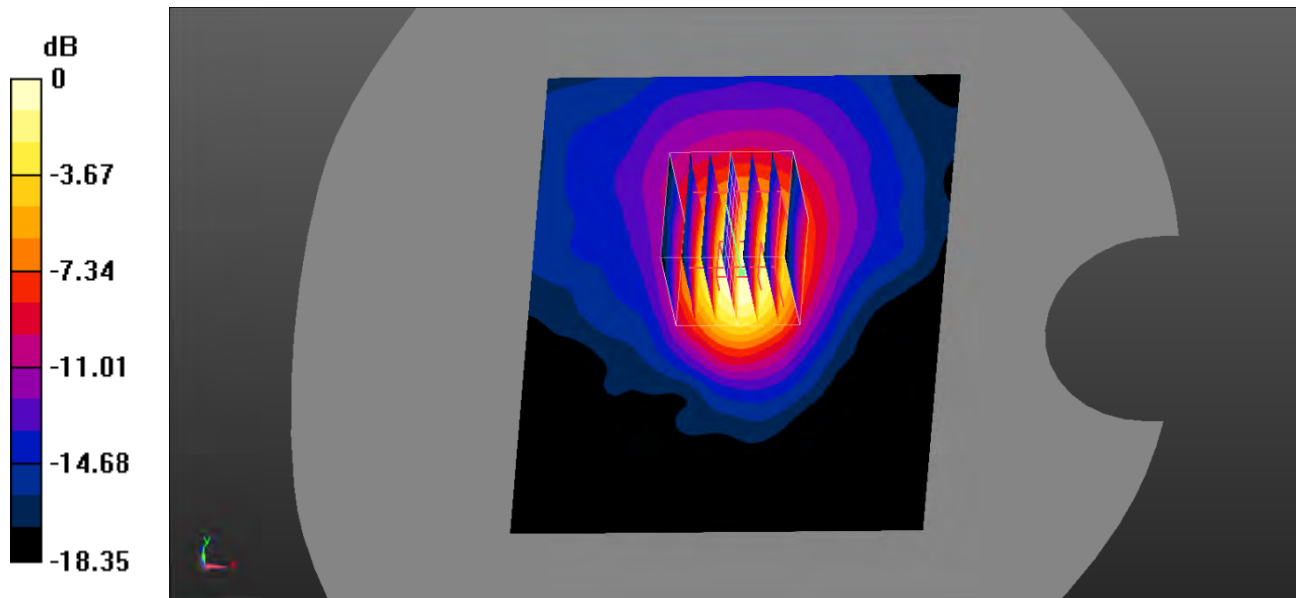

0 dB =  $0.503 \text{ W/kg}$  =  $-2.98 \text{ dBW/kg}$

**Test Plot 123#: LTE Band 66\_Head Left Cheek\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.203 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.743 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.285 \text{ W/kg}$   
**SAR(1 g) =  $0.182 \text{ W/kg}$ ; SAR(10 g) =  $0.105 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.199 \text{ W/kg}$

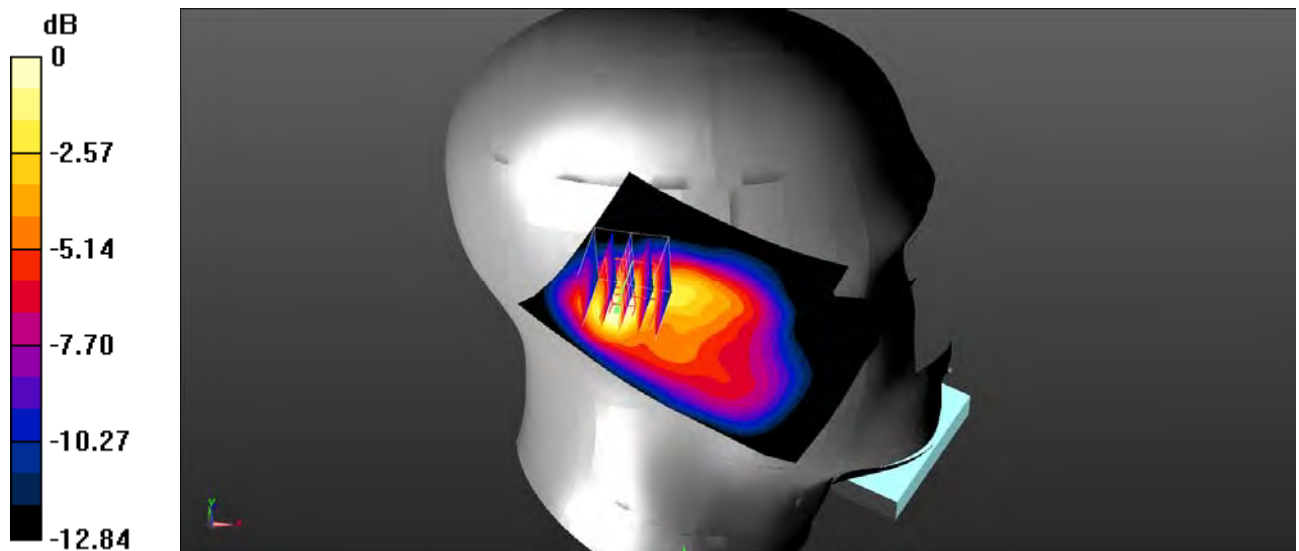

0 dB =  $0.199 \text{ W/kg} = -7.01 \text{ dBW/kg}$

**Test Plot 124#: LTE Band 66\_Head Left Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.166 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 8.697 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.215 W/kg  
**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.083 W/kg**  
 Maximum value of SAR (measured) = 0.151 W/kg

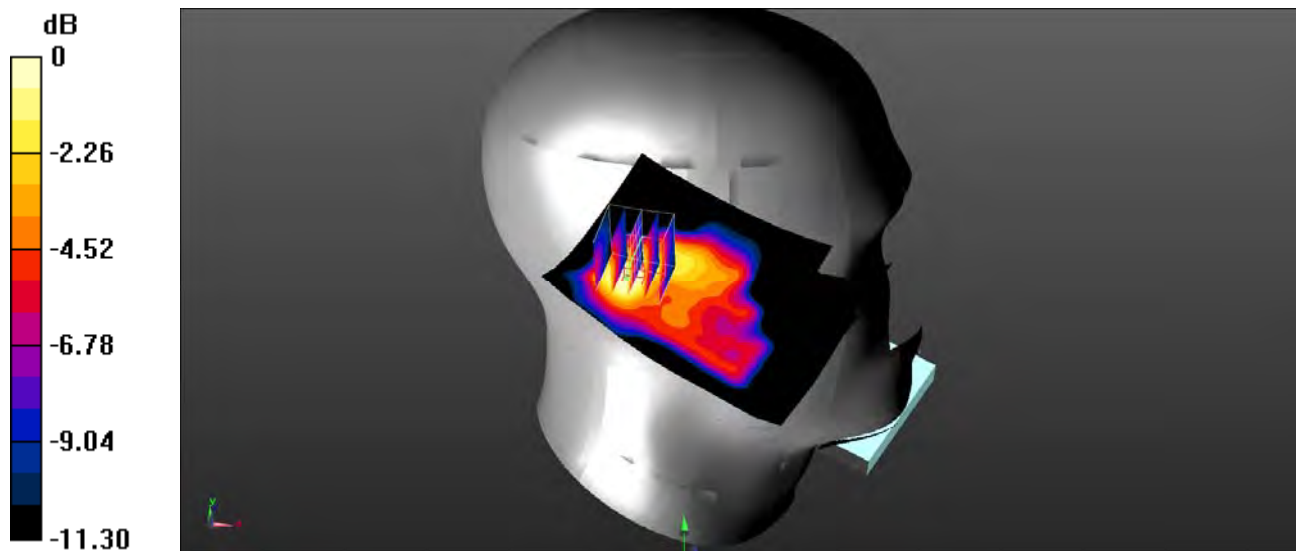

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 125#: LTE Band 66\_Head Left Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.352 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $14.65 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.585 \text{ W/kg}$   
**SAR(1 g) =  $0.349 \text{ W/kg}$ ; SAR(10 g) =  $0.186 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.370 \text{ W/kg}$

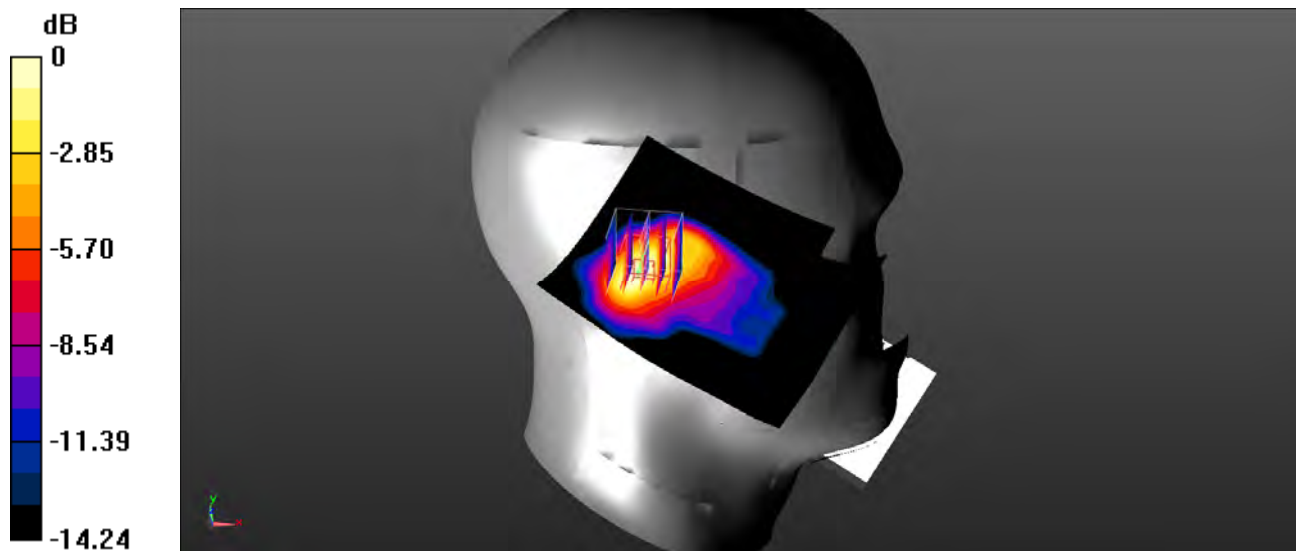

0 dB =  $0.370 \text{ W/kg}$  =  $-4.32 \text{ dBW/kg}$

**Test Plot 126#: LTE Band 66\_Head Left Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.273 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.06 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.468 \text{ W/kg}$   
**SAR(1 g) =  $0.273 \text{ W/kg}$ ; SAR(10 g) =  $0.146 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.287 \text{ W/kg}$

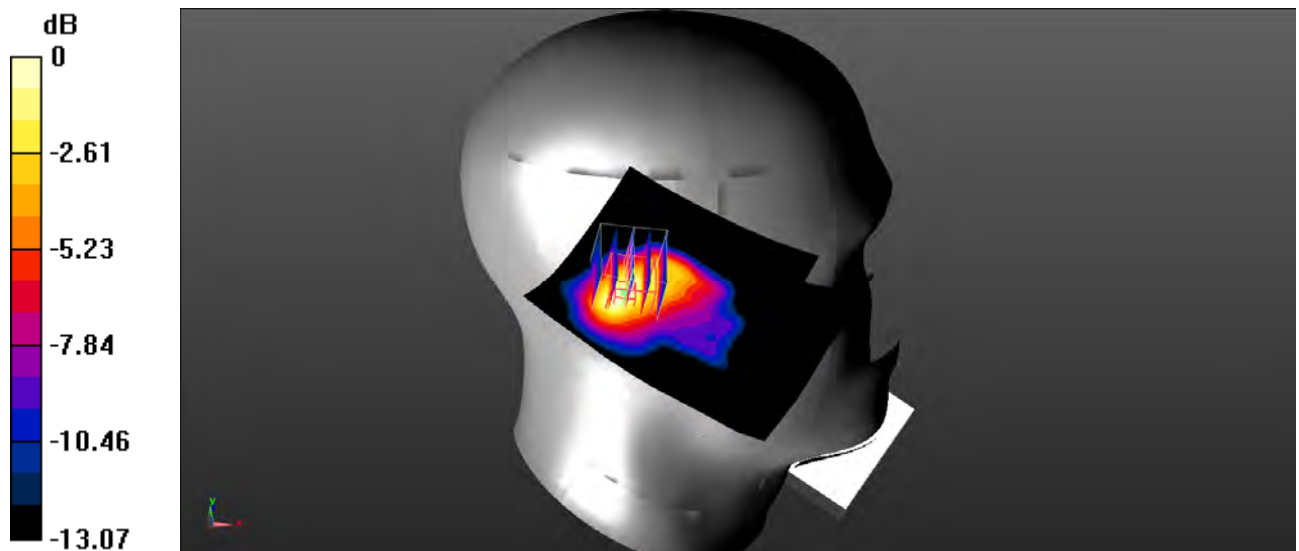

0 dB =  $0.287 \text{ W/kg}$  =  $-5.42 \text{ dBW/kg}$

**Test Plot 127#: LTE Band 66\_Head Right Cheek\_1RB\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 40.645$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.434 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.133 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 0.680 W/kg  
**SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.175 W/kg**  
Maximum value of SAR (measured) = 0.434 W/kg

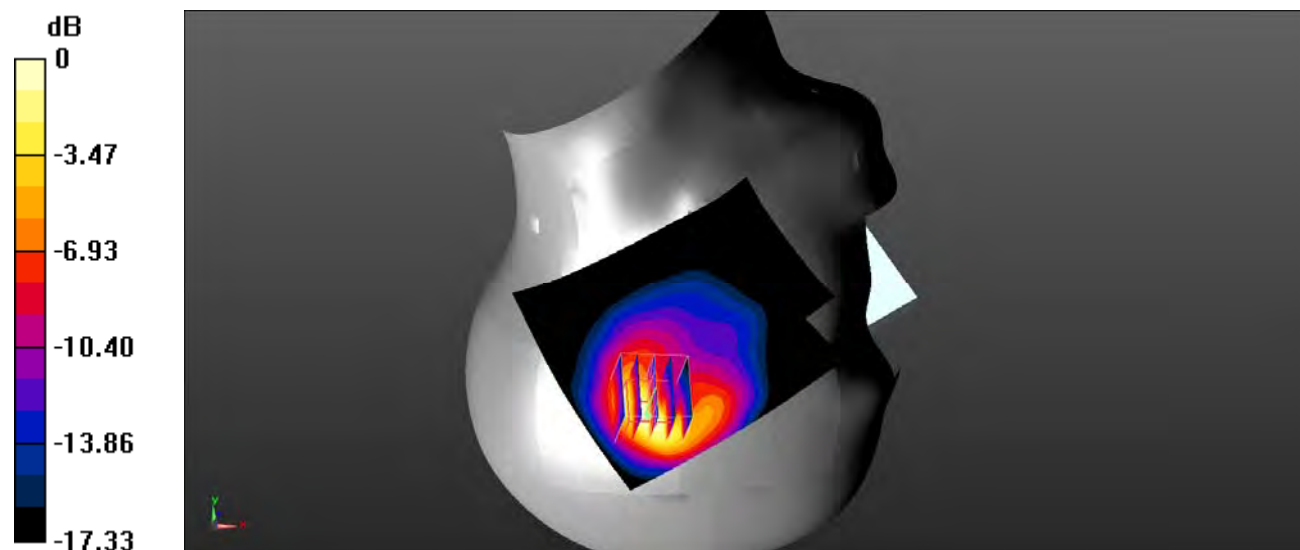

0 dB = 0.434 W/kg = -3.63 dBW/kg

**Test Plot 128#: LTE Band 66\_Head Right Cheek\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.347 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.186 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.522 \text{ W/kg}$   
**SAR(1 g) =  $0.287 \text{ W/kg}$ ; SAR(10 g) =  $0.139 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.337 \text{ W/kg}$

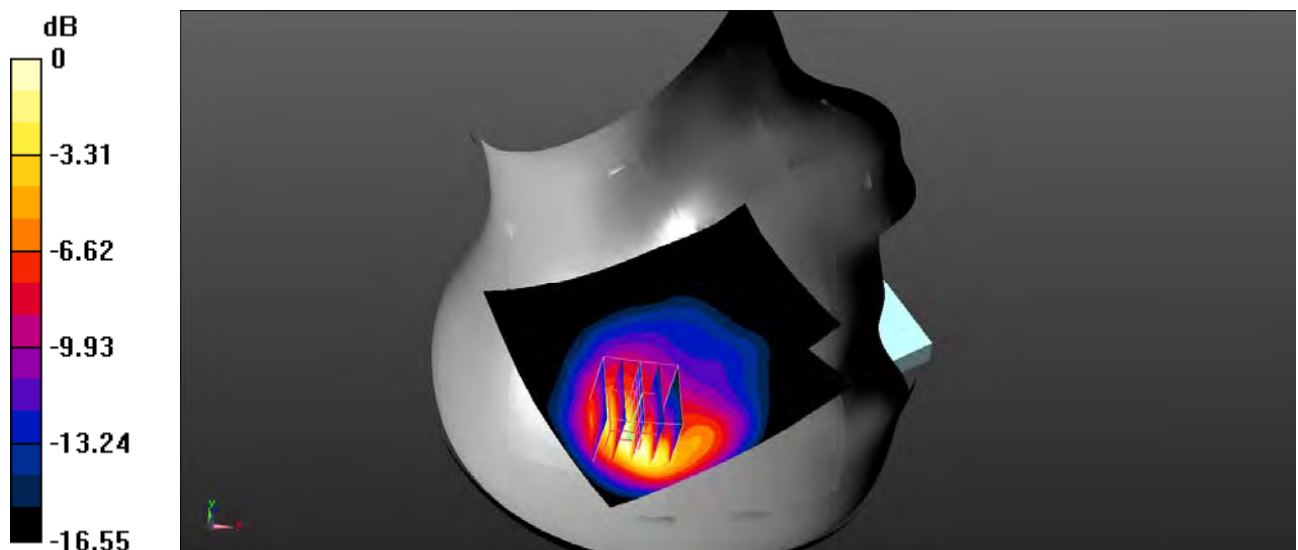

0 dB =  $0.337 \text{ W/kg}$  =  $-4.72 \text{ dBW/kg}$



**Test Plot 129#: LTE Band 66\_Head Right Tilt\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 1/19/2021
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.551 \text{ W/kg}$

**Zoom Scan (5x5x8)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=4\text{mm}$   
 Reference Value =  $13.35 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.01 \text{ W/kg}$   
**SAR(1 g) =  $0.512 \text{ W/kg}$ ; SAR(10 g) =  $0.238 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.568 \text{ W/kg}$

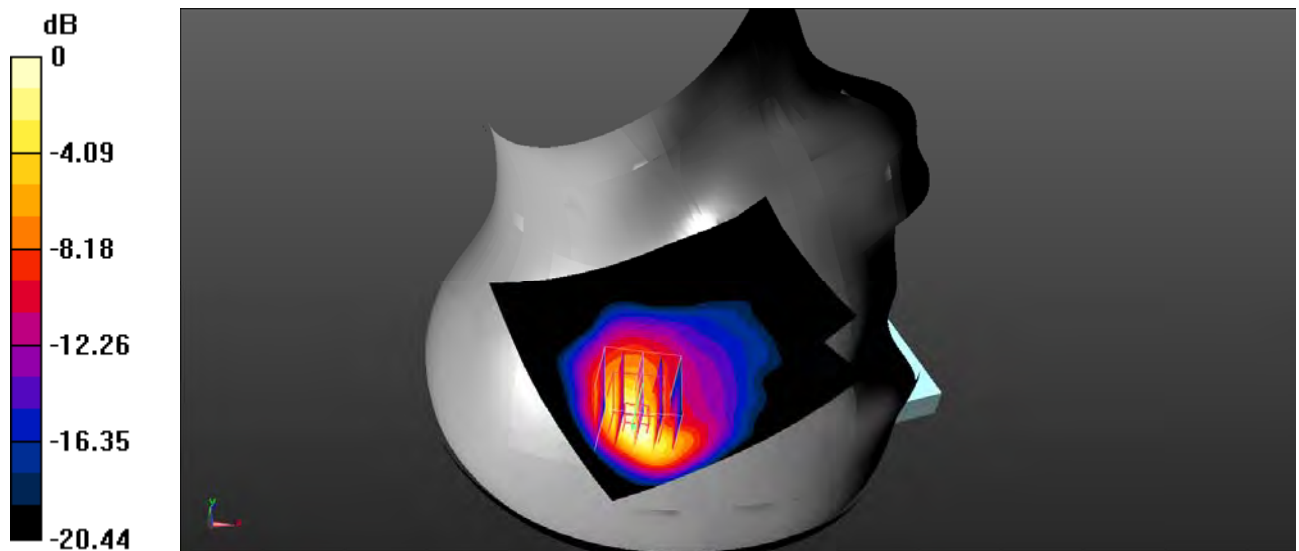

0 dB =  $0.568 \text{ W/kg}$  =  $-2.46 \text{ dBW/kg}$

**Test Plot 130#: LTE Band 66\_Head Right Tilt\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 1/19/2021
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.421 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.11 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.737 \text{ W/kg}$   
**SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.180 W/kg**  
 Maximum value of SAR (measured) =  $0.438 \text{ W/kg}$

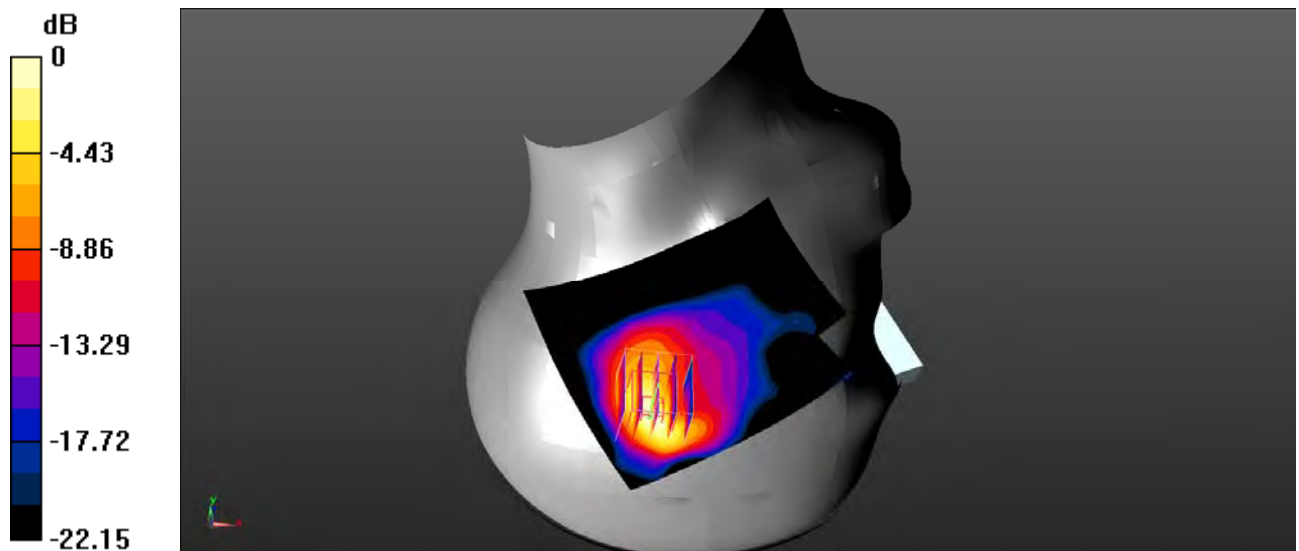

0 dB =  $0.438 \text{ W/kg} = -3.59 \text{ dBW/kg}$

**Test Plot 131#: LTE Band 66\_Body Back\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.346$  S/m;  $\epsilon_r = 40.645$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0870 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.299 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0867 W/kg

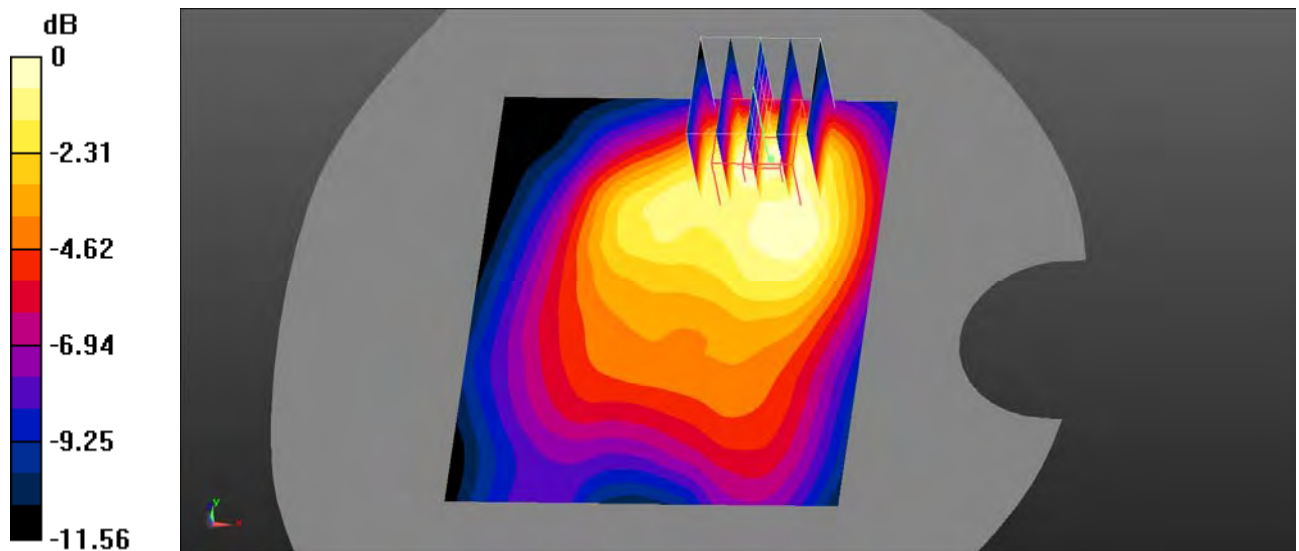

0 dB = 0.0867 W/kg = -10.62 dBW/kg

**Test Plot 132#: LTE Band 66\_Body Back\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0713 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.650 \text{ V/m}$ ; Power Drift =  $0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.104 \text{ W/kg}$   
**SAR(1 g) =  $0.067 \text{ W/kg}$ ; SAR(10 g) =  $0.041 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0700 \text{ W/kg}$

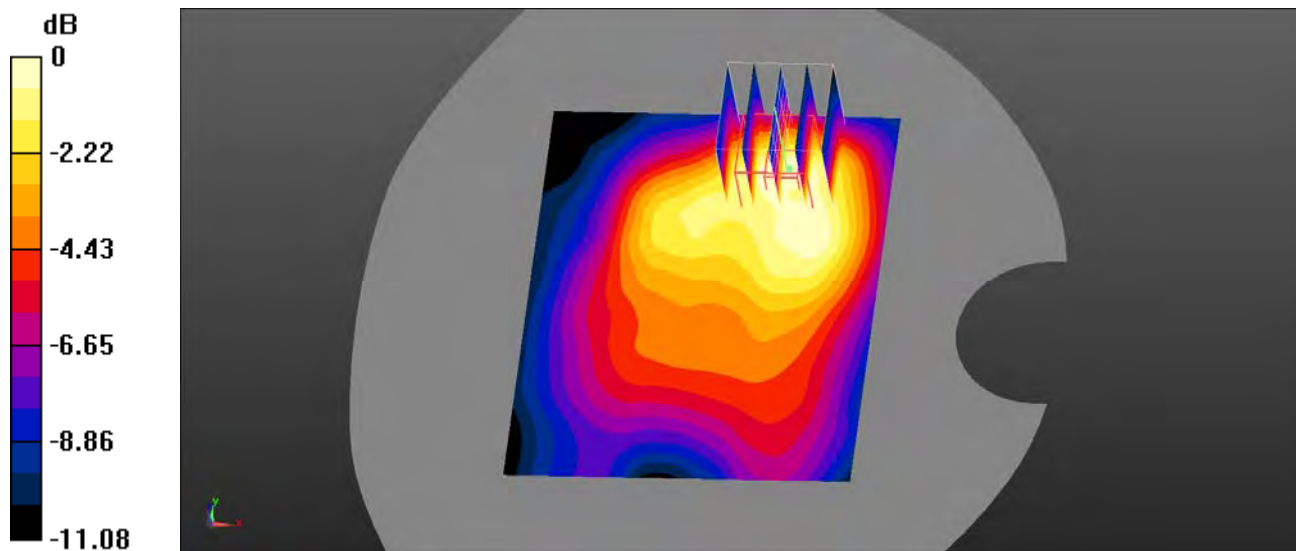

0 dB =  $0.0700 \text{ W/kg} = -11.55 \text{ dBW/kg}$

**Test Plot 133#: LTE Band 66\_Body Left\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0257 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.020 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0253 W/kg

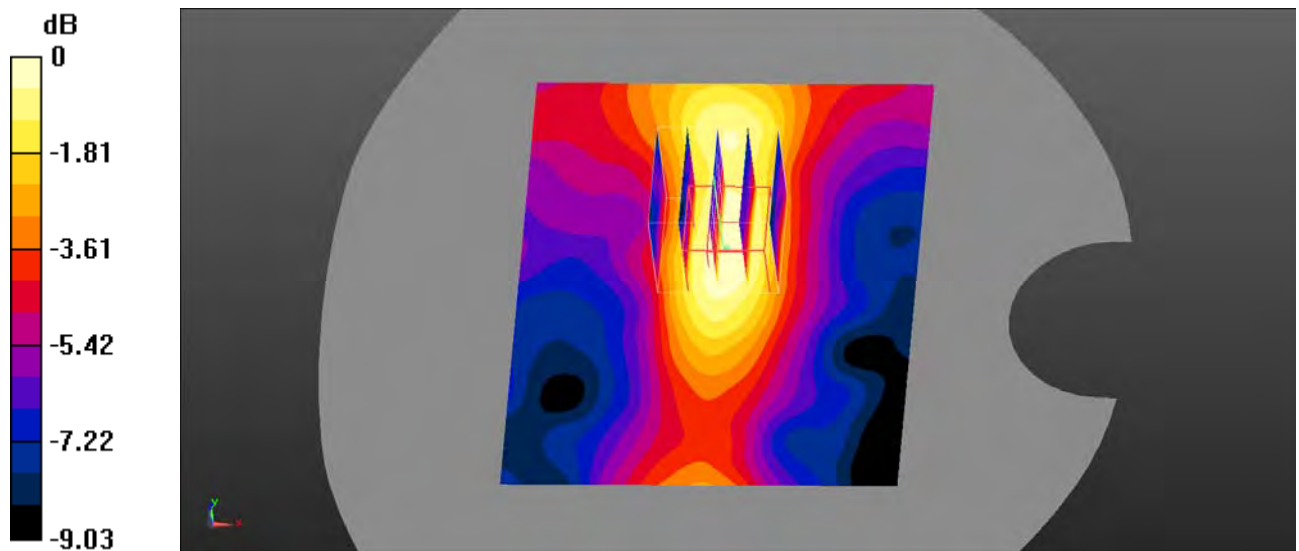

0 dB = 0.0253 W/kg = -15.97 dBW/kg

**Test Plot 134#: LTE Band 66\_Body Left\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0215 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.714 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0320 W/kg

**SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0202 W/kg

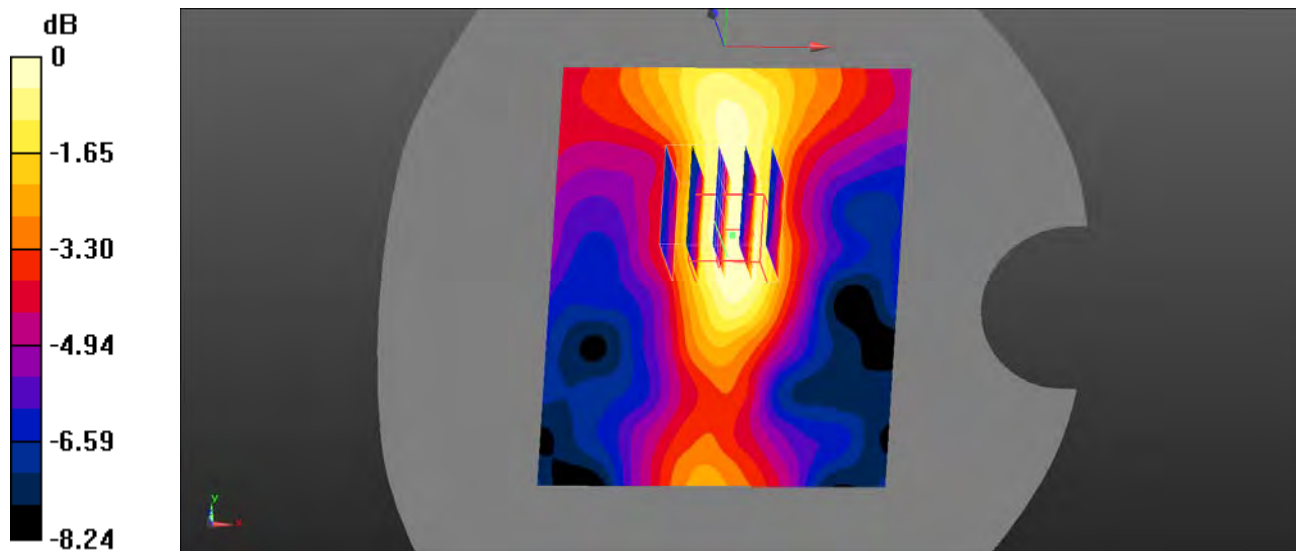

0 dB = 0.0202 W/kg = -16.95 dBW/kg

**Test Plot 135#: LTE Band 66\_Body Top\_1RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.200 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.27 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.308 \text{ W/kg}$   
**SAR(1 g) =  $0.173 \text{ W/kg}$ ; SAR(10 g) =  $0.087 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.193 \text{ W/kg}$

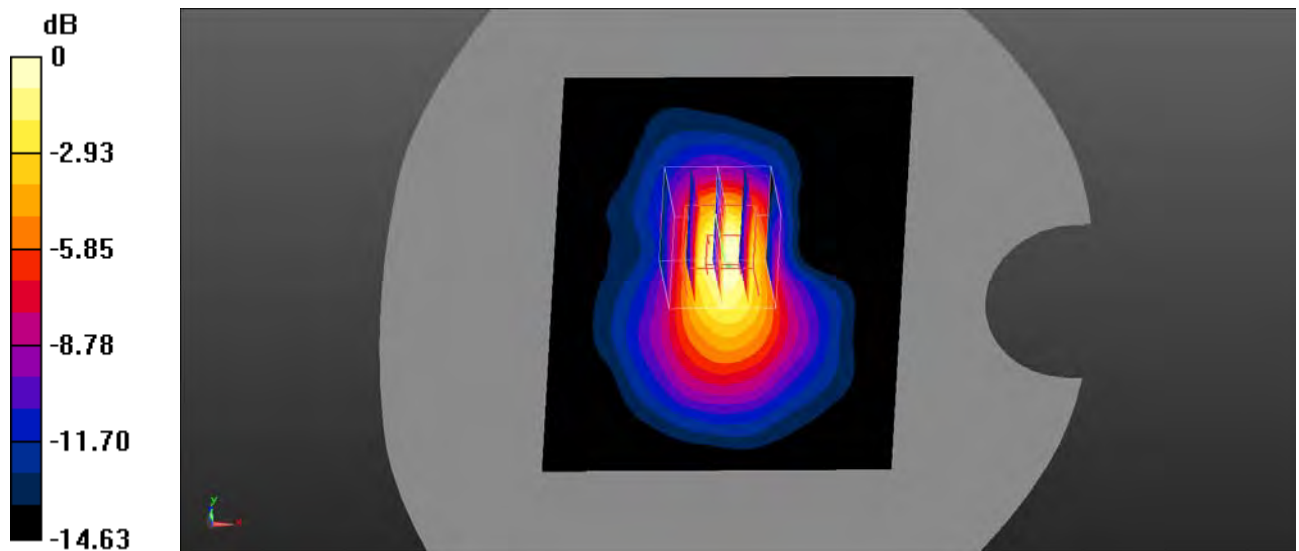

0 dB =  $0.193 \text{ W/kg} = -7.14 \text{ dBW/kg}$

**Test Plot 136#: LTE Band 66\_Body Top\_50%RB\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**


Communication System: UID 0, Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.346 \text{ S/m}$ ;  $\epsilon_r = 40.645$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(8.39, 8.39, 8.39) @ 1745 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.161 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 9.195 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.239 W/kg  
**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.070 W/kg**  
 Maximum value of SAR (measured) = 0.153 W/kg

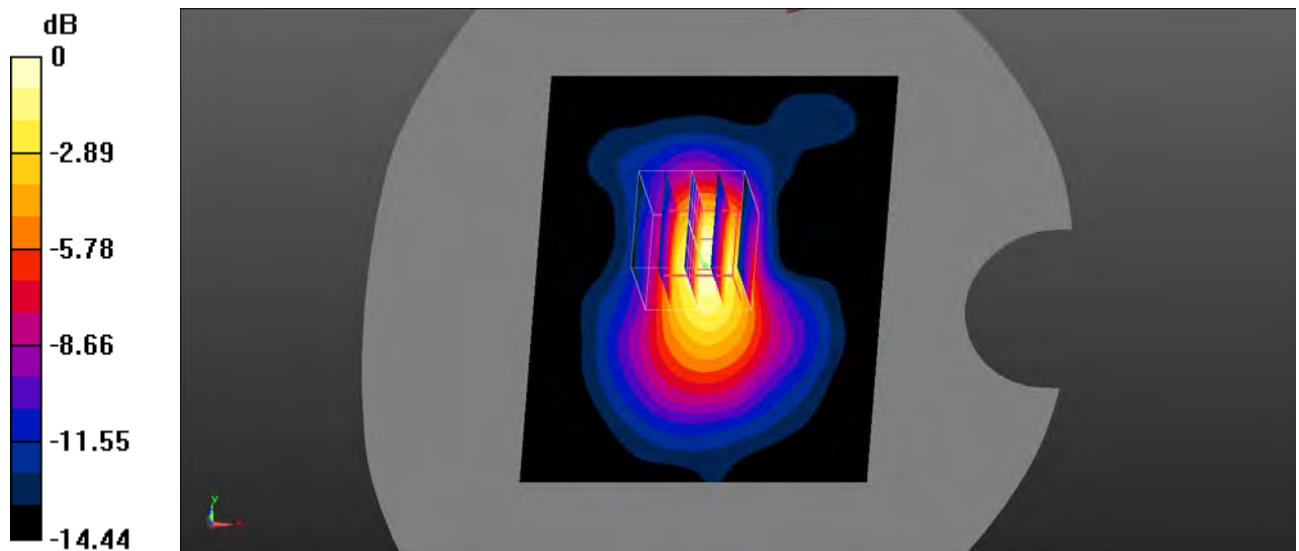

0 dB = 0.153 W/kg = -8.15 dBW/kg



**Test Plot 137#: 2.4GWifi\_Head Left Cheek\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 38.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

1Maximum value of SAR (interpolated) = 0.730 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.066 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.293 W/kg**

Maximum value of SAR (measured) = 0.679 W/kg

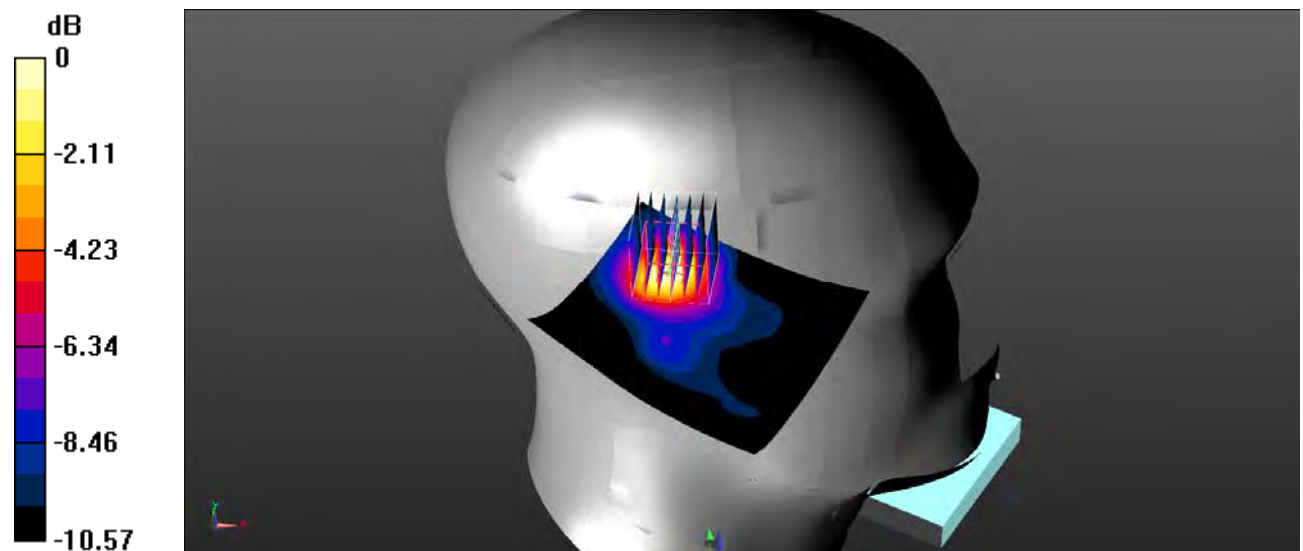

0 dB = 0.679 W/kg = -1.68 dBW/kg

**Test Plot 138#: 2.4GWifi\_Head Left Tilt\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 38.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.286 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.292 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.502 W/kg

**SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.268 W/kg

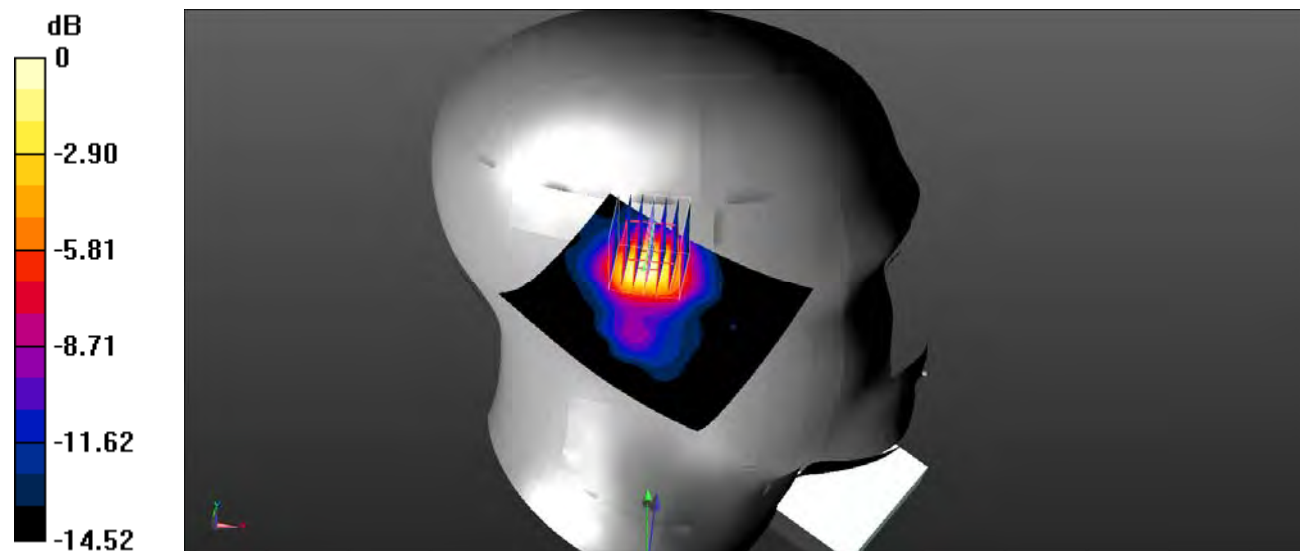

0 dB = 0.268 W/kg = -5.72 dBW/kg

**Test Plot 139#: 2.4GWifi\_Head Right Cheek\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.845 \text{ S/m}$ ;  $\epsilon_r = 38.338$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0875 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.151 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0841 W/kg

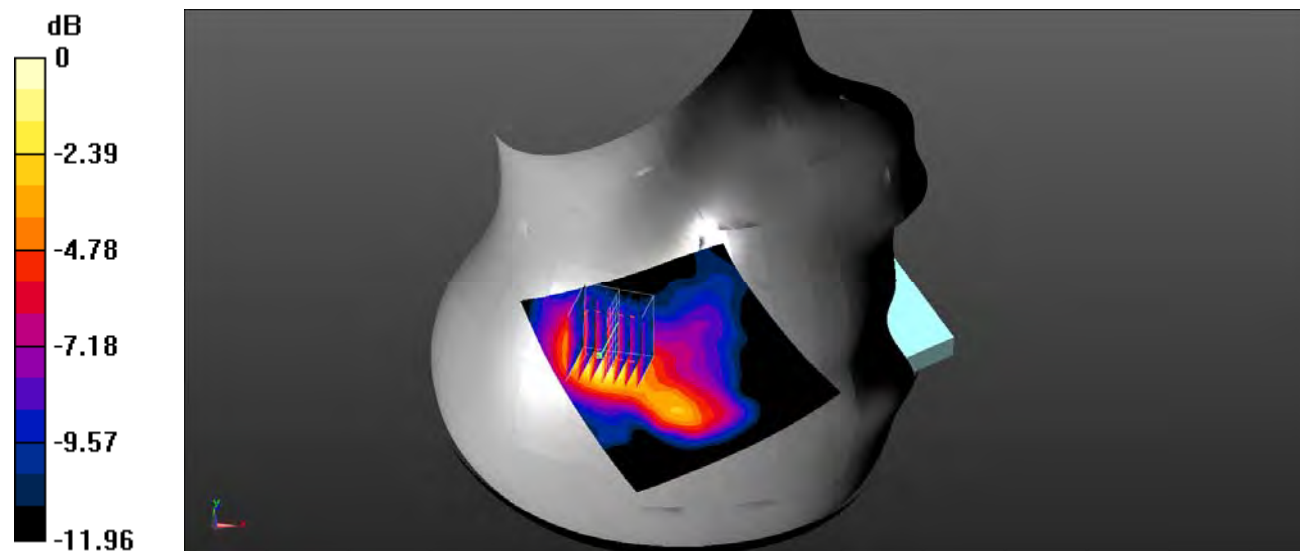

0 dB = 0.0841 W/kg = -10.75 dBW/kg

**Test Plot 140#: 2.4GWifi\_Head Right Tilt\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.845 \text{ S/m}$ ;  $\epsilon_r = 38.338$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.105 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.375 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.171 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

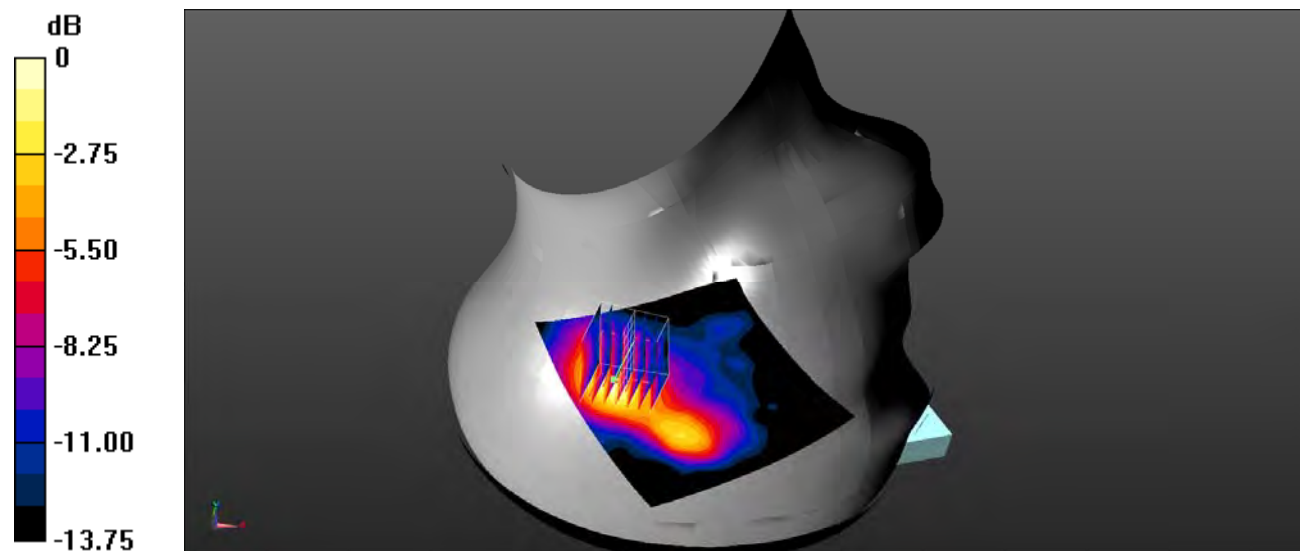

0 dB = 0.102 W/kg = -9.91 dBW/kg

**Test Plot 141#: 2.4GWifi\_Body Back\_Middle**

**DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.845 \text{ S/m}$ ;  $\epsilon_r = 38.338$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.182 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.782 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

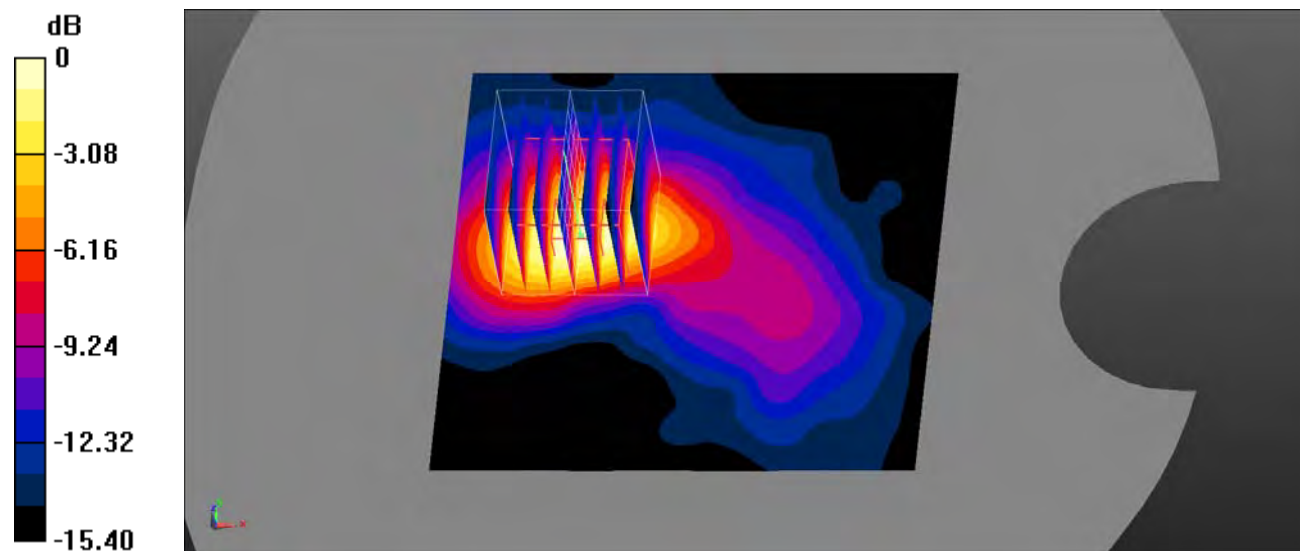

0 dB = 0.174 W/kg = -7.59 dBW/kg

**Test Plot 142#: 2.4GWifi\_Body Right\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 38.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**WLAN 802.11b Mid/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0249 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.682 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0390 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0244 W/kg

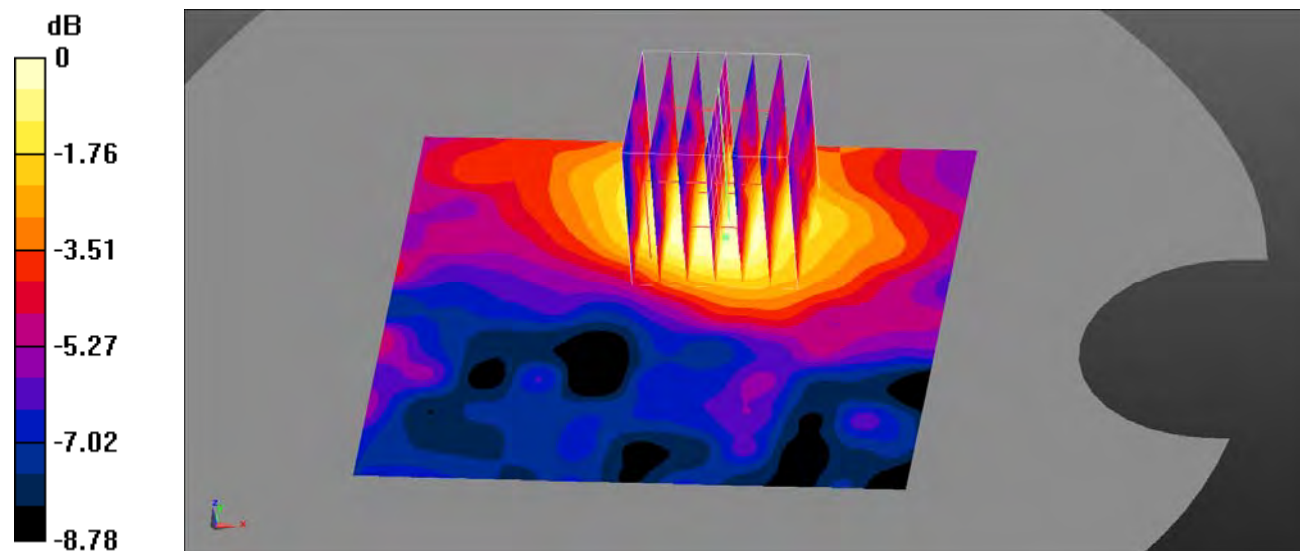

0 dB = 0.0244 W/kg = -16.13 dBW/kg

**Test Plot 143#: 2.4GWifi\_Body Top\_Middle****DUT: 4G smart phone; Type: PR651; Serial: SZ1210422-13136E-SA-S\_3EZ;**

CCommunication System: UID 0, 2.4G DTS (0); Frequency: 2442 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2442$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 38.338$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.63, 7.63, 7.63) @ 2442 MHz;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562;Calibrated: 2021/1/19
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.178 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.948 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

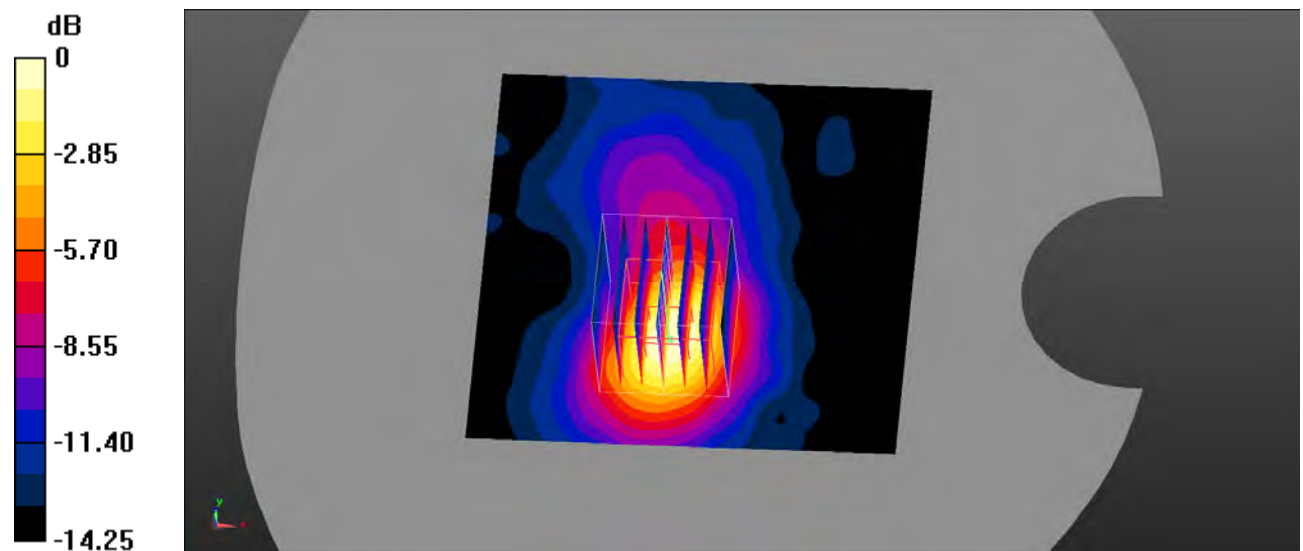

0 dB = 0.174 W/kg = -7.59 dBW/kg