


Certification L

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	1.31	-4.6	34.67
2410	1.32	-4.45	35.92
2420	1.61	-4.28	37.32
2430	1.96	-4.11	38.8
2440	2.33	-3.95	40.23
2450	2.66	-3.83	41.45
2460	2.96	-3.73	42.41
2470	3.17	-3.68	42.83
2480	3.26	-3.7	42.65
2490	3.27	-3.75	42.13
2500	3.24	-3.85	41.26

Certification R

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	1.74	-5.33	29.31
2410	1.92	-5.16	30.45
2420	2.16	-5	31.59
2430	2.47	-4.84	32.85
2440	2.8	-4.66	34.23
2450	3.11	-4.51	35.42
2460	3.4	-4.39	36.39
2470	3.36	-4.32	36.96
2480	3.59	-4.32	37.01
2490	3.53	-4.35	36.69
2500	3.53	-4.43	36.08


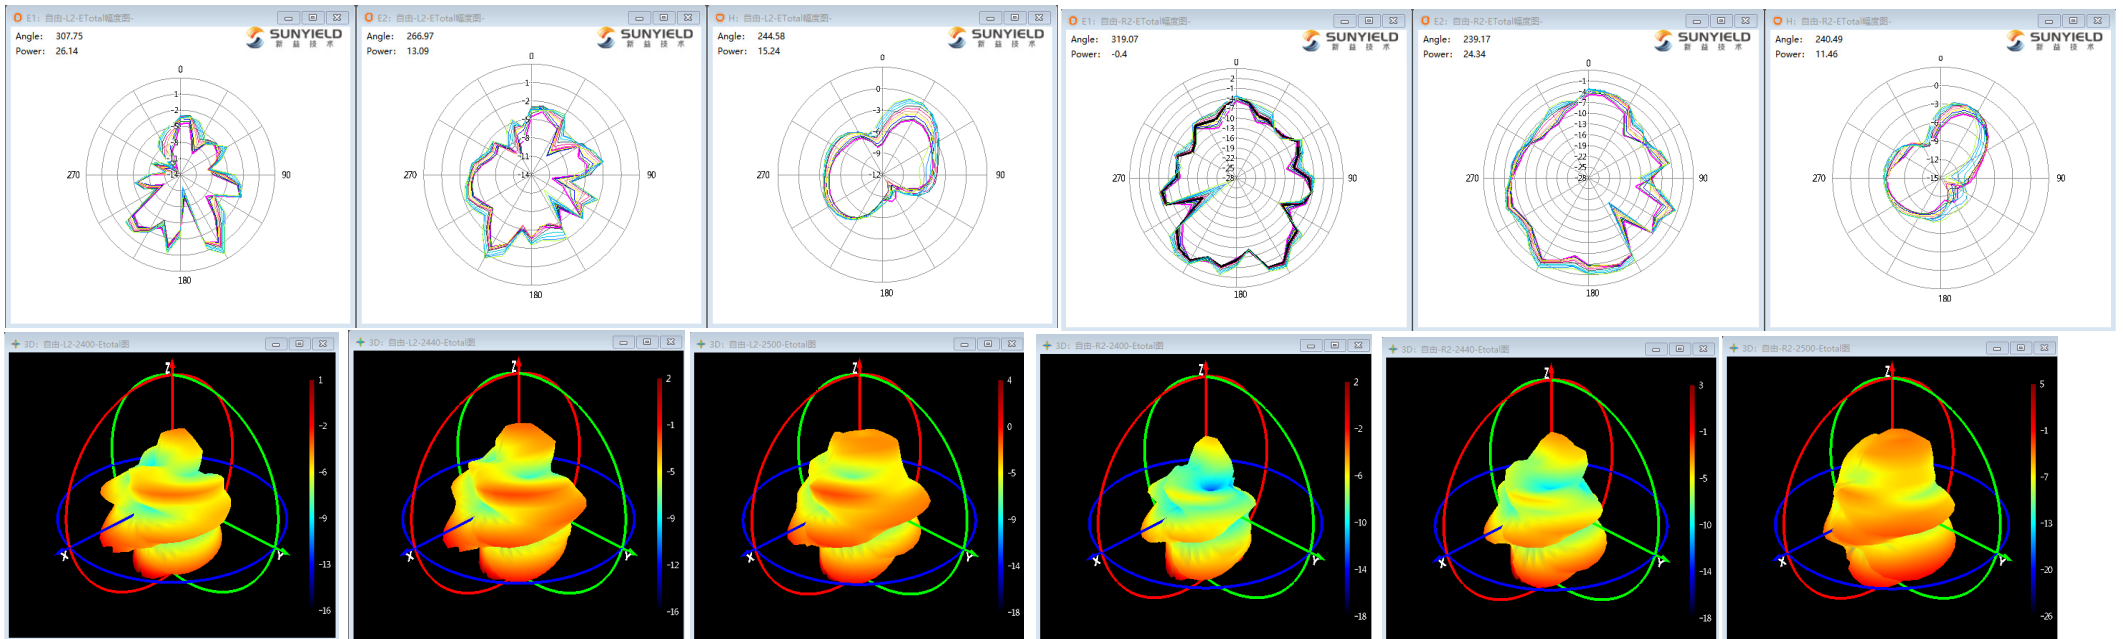


head mode-L

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-4.55	-12.16	6.09
2410	-4.45	-12.07	6.21
2420	-4.4	-11.96	6.37
2430	-4.33	-11.86	6.51
2440	-4.16	-11.78	6.64
2450	-3.99	-11.69	6.77
2460	-3.85	-11.64	6.86
2470	-3.72	-11.64	6.86
2480	-3.62	-11.71	6.75
2490	-3.61	-11.82	6.58
2500	-3.67	-11.96	6.37

head mode-R

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
2400	-5.26	-12.37	5.8
2410	-5.23	-12.2	6.02
2420	-5.25	-12.04	6.25
2430	-5.2	-11.89	6.47
2440	-5.09	-11.75	6.68
2450	-4.94	-11.62	6.88
2460	-4.77	-11.53	7.03
2470	-4.61	-11.48	7.11
2480	-4.5	-11.49	7.09
2490	-4.46	-11.55	7
2500	-4.5	-11.62	6.88

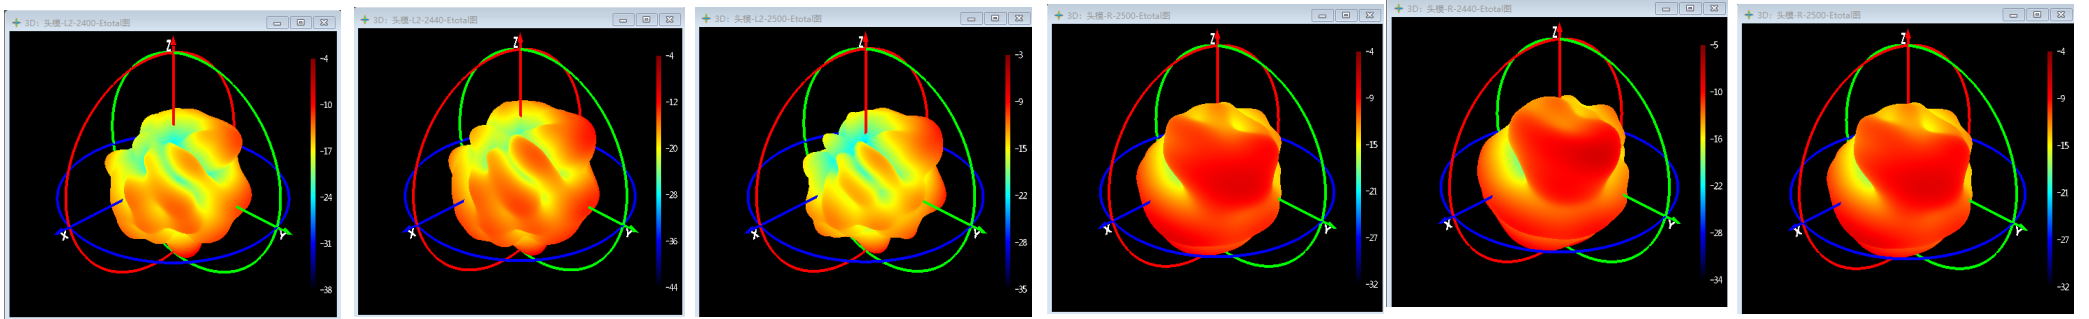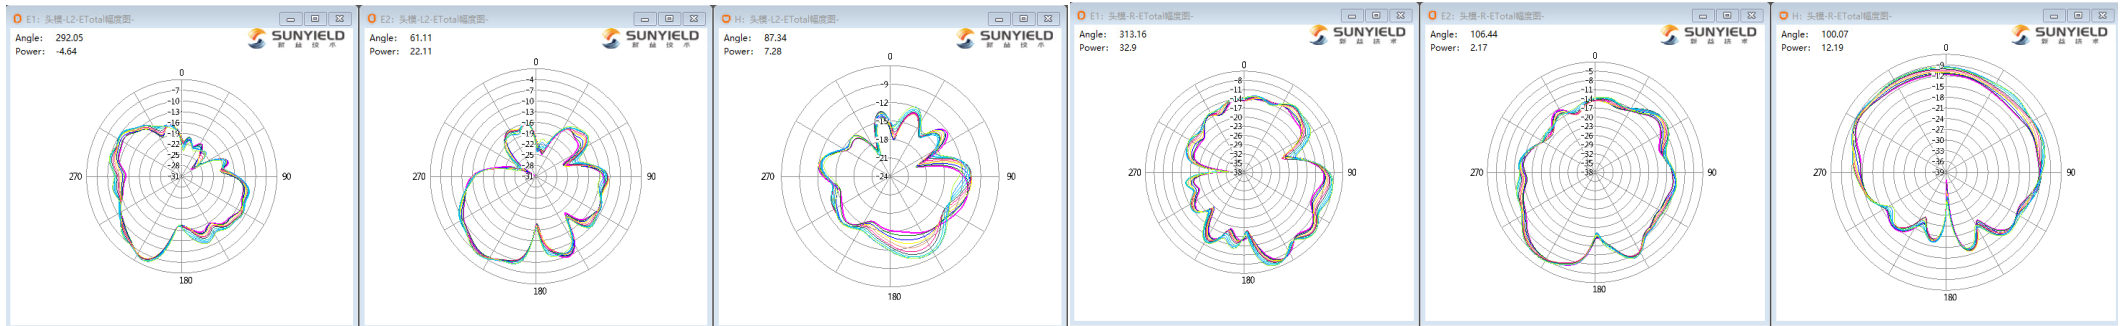


Antenna manufacturer: Shenzhen Sande Dacom Electronics Co., Ltd.  
Address: Building I, NO.10 East Area of ShangXue Science & Technology Industrial Park,  
BanTian street, LongGang District, Shenzhen, China

Model: SC01P

Antenna Photo

L

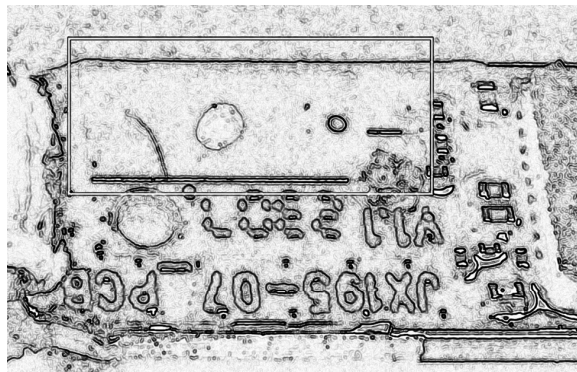

R

