



Shenzhen Yaguan Antenna Connector Co., Ltd

Room 102, No. 355, Huarong Road, Tongsheng Community, Dalang Street, Longhua District,  
Shenzhen, China

Frequency	AvgValue	CrossPolar	MaxValue	MaxPosition
5150	-0.37	0.34	1.49	-125
5450	-0.51	1.91	2.29	-129
5850	-0.71	1.86	2.31	-129

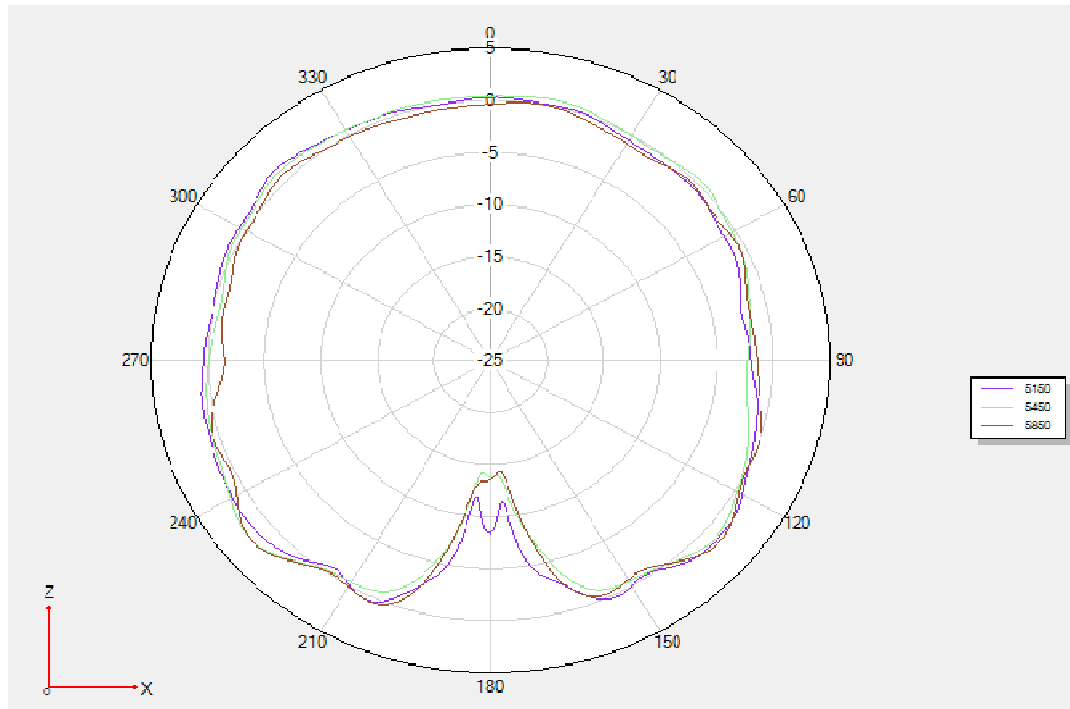










Frequency	AvgValue	CrossPolar	MaxValue	MaxPosition	MinValue
5150	-2.8	0.05	0.44	182	-15.78
5450	-2.8	5.24	0.37	44	-13.71
5850	-3.25	5.49	0.62	25	-15.23

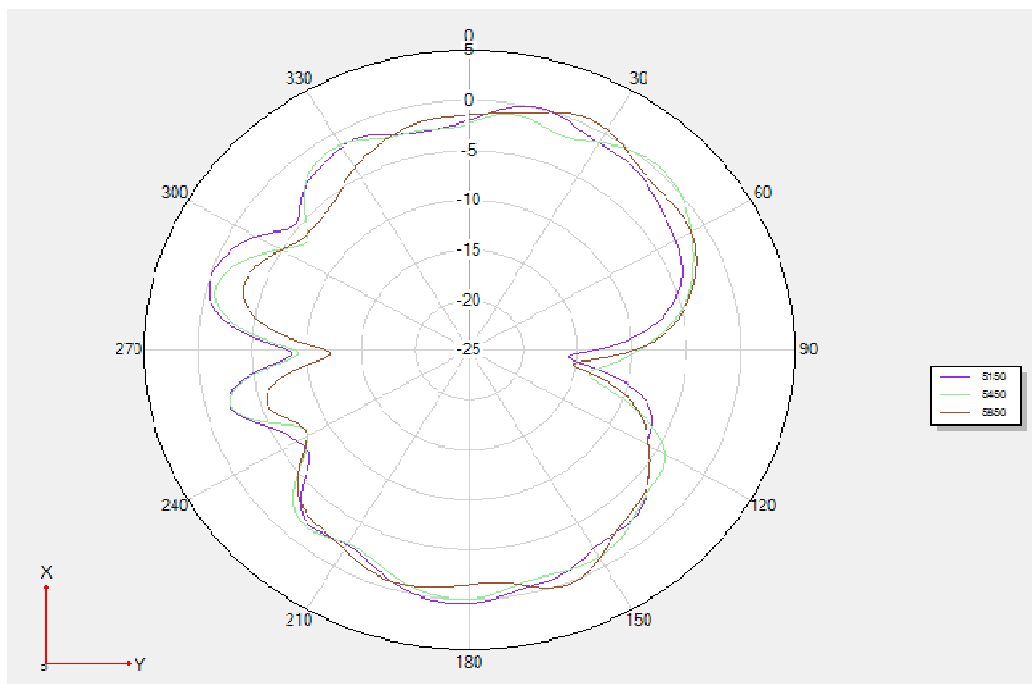


### Antenna Gain

Frequency/Mhz	Efficiency / %	MaxGain/dBi
5200	81.66	3.02
5250	81.1	3.31
5300	81.85	2.97
5350	80.54	3.17
5400	75.68	2.88
5450	76.91	2.78
5500	71.94	2.58
5550	70.96	2.49
5600	73.62	2.76
5650	78.89	2.96
5700	76.38	3.12
5750	71.12	2.8
5800	76.74	3.14
5850	76.03	2.62

# 3D Pattern

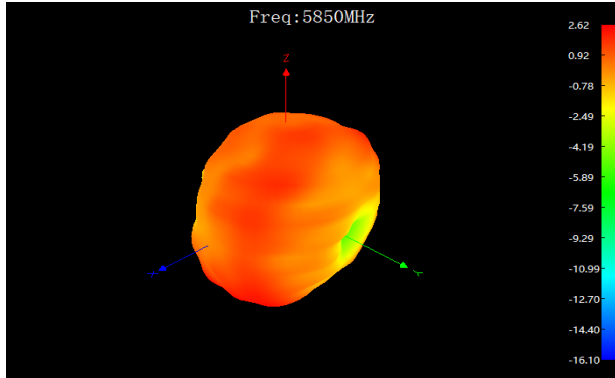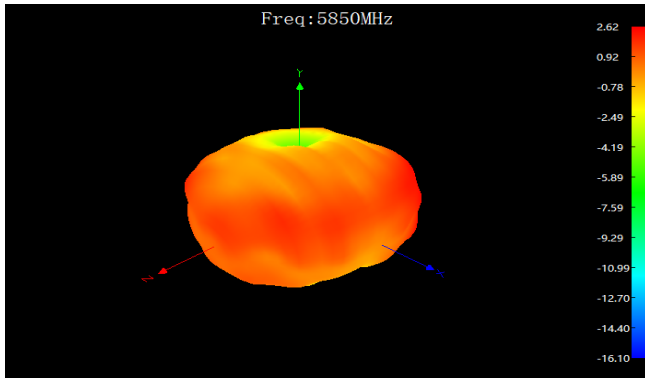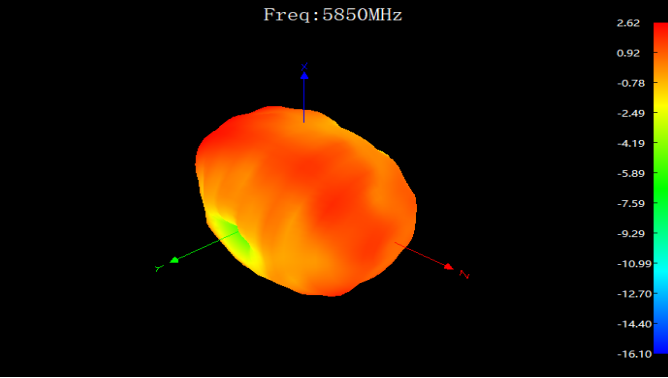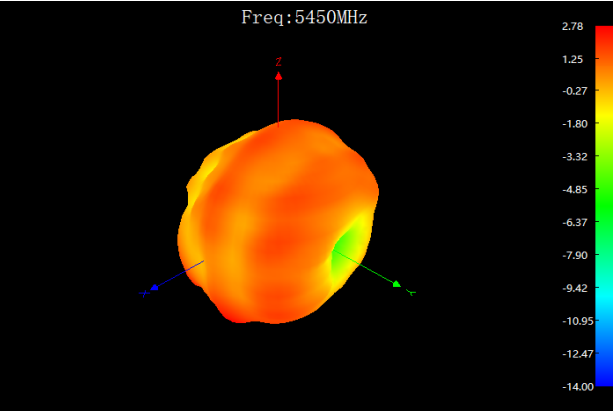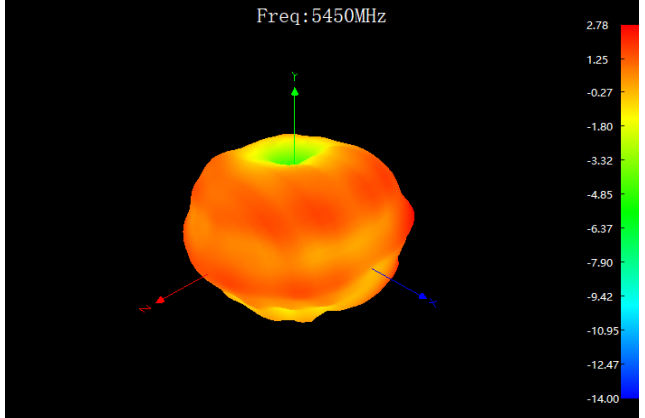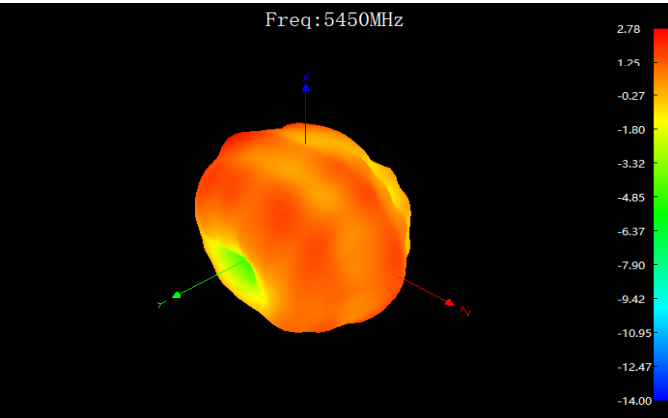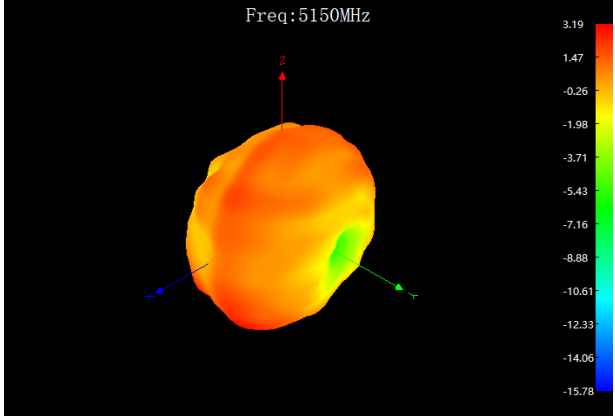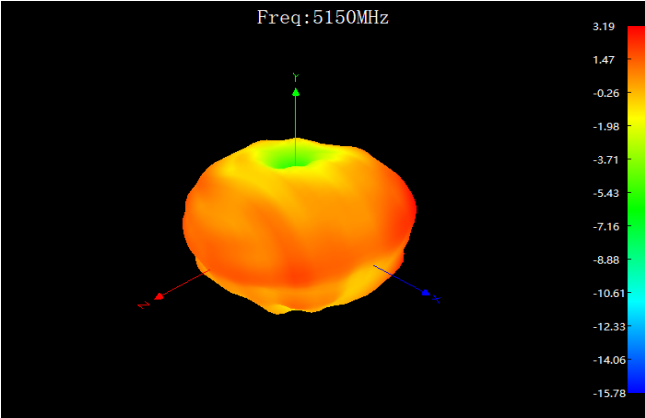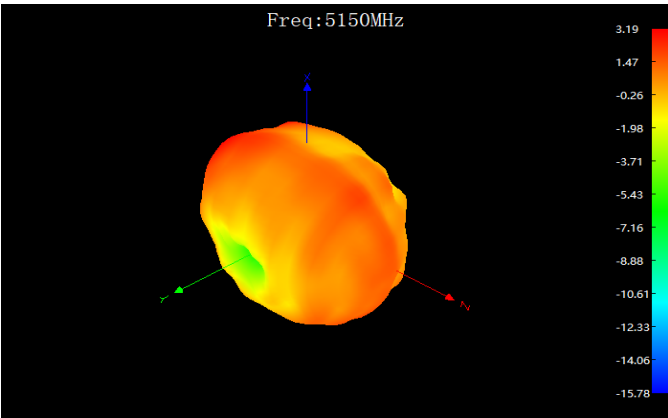

## TEST SETUP

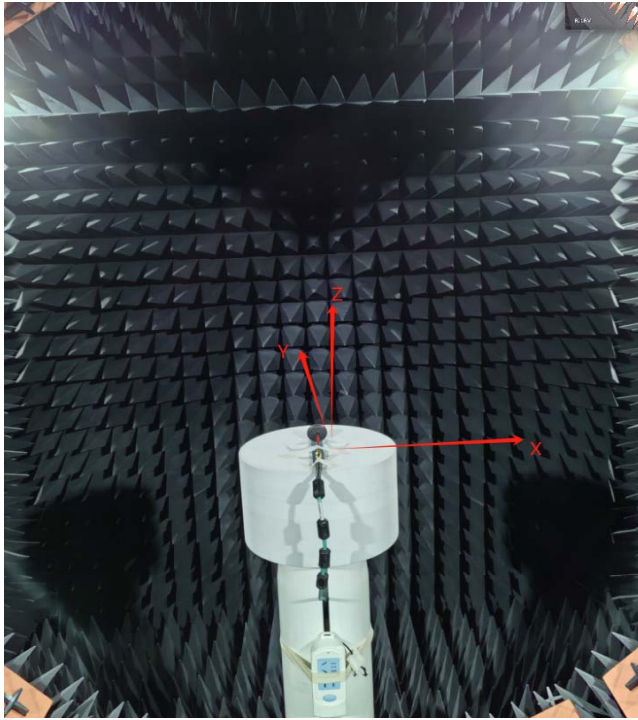

## EUT Photos

