



## Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V05

Report Template Revision Date: 2021-11-03

# TEST REPORT

**Report No.:** CQASZ20230901740E-02  
**Applicant:** Shenzhen Hollyland Technology Co., Ltd  
**Address of Applicant:** 8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China

**Equipment Under Test (EUT):**  
**Product:** VenusLiv Air Live Stream Camera  
**Model No.:** VenusLiv Air, VenusLiv Lite, VenusLiv , VenusLiv Mini, VenusLiv X Air, VenusLiv X Lite, VenusLive Air, VenusLive Lite, VenusLive, VenusLive Mini, VenusLiv X Air, Venus X Air, Venus X Lite, Venus Air, Venus Lite  
**Test Model No.:** VenusLiv Air  
**Brand Name:** HOLLYLAND  
**FCC ID:** 2ADZC-C4702  
**Standards:** 47 CFR Part 15, Subpart C  
**Date of Receipt:** 2023-09-25  
**Date of Test:** 2023-09-25 to 2023-10-11  
**Date of Issue:** 2023-10-18  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:** Lewis Zhou  
( Lewis Zhou )

**Reviewed By:** Timo Lei  
( Timo Lei )

**Approved By:** Jack Ai  
( Jack Ai )



---

## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230901740E-02	Rev.01	Initial report	2023-10-18

Here the product #1 means the product version in original FCC grant,

The difference between product #1 and product #2 is that the USB HUB IC chip is added is different.

These changes do not affect RF performance.

This report only contains the test data for product #2. For the test result for product #1, please refer to original test report NO.CQASZ20230500829E

For the fundamental testing items that are not applicable here since the application type is permissive change, please refer to the FCC test report in original grant for the result.

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	N/A
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	N/A
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	N/A
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	N/A
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	N/A
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	N/A
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

### 3 Contents

	Page
<b>1 VERSION</b> .....	2
<b>2 TEST SUMMARY</b> .....	3
<b>3 CONTENTS</b> .....	4
<b>4 GENERAL INFORMATION</b> .....	5
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	5
4.4 TEST ENVIRONMENT AND MODE .....	8
4.5 DESCRIPTION OF SUPPORT UNITS .....	9
4.6 TEST LOCATION .....	9
4.7 TEST FACILITY .....	9
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	10
4.9 DEVIATION FROM STANDARDS .....	10
4.10 ABNORMALITIES FROM STANDARD CONDITIONS .....	10
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	10
4.12 EQUIPMENT LIST .....	11
<b>5 TEST RESULTS AND MEASUREMENT DATA</b> .....	12
5.1 ANTENNA REQUIREMENT .....	12
5.2 RADIATED SPURIOUS EMISSIONS .....	13
5.2.1 Radiated emission below 1GHz .....	16
5.2.2 Transmitter emission above 1GHz .....	18
5.3 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY .....	26
<b>6 PHOTOGRAPHS - EUT TEST SETUP</b> .....	32
6.1 RADIATED SPURIOUS EMISSION .....	32
6.2 CONDUCTED EMISSIONS TEST SETUP .....	33
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	34

## 4 General Information

### 4.1 Client Information

Applicant:	Shenzhen Hollyland Technology Co., Ltd
Address of Applicant:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyuan Street, Baoan District, Shenzhen, 518055 China
Manufacturer:	Shenzhen Hollyland Technology Co., Ltd
Address of Manufacturer:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyuan Street, Baoan District, Shenzhen, 518055 China
Factory:	Shenzhen Hollyland Technology Co., Ltd
Address of Factory:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyuan Street, Baoan District, Shenzhen, 518055 China

### 4.2 General Description of EUT

Product Name:	VenusLiv Air Live Stream Camera
Model No.:	VenusLiv Air, VenusLiv Lite, VenusLiv , VenusLiv Mini, VenusLiv X Air, VenusLiv X Lite, VenusLive Air, VenusLive Lite, VenusLive, VenusLive Mini, VenusLiv X Air, Venus X Air, Venus X Lite, Venus Air, Venus Lite
Test Model No.:	VenusLiv Air
Trade Mark:	HOLLYLAND
Software Version:	V1.0.2.0
Hardware Version:	V28
Power Supply:	Power supply DC12V for adaptor Model:R241-12020001 Input:100-240V~50/60Hz 1.5A Output:12V 2A 24W
EUT Supports Radios application:	2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz; 802.11n(HT40): 2422MHz~2452MHz
Simultaneous Transmission	<input type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input checked="" type="checkbox"/> Simultaneous TX is not supported.

### 4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) :

	6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps IEEE for 802.11n(HT40) : 13.5Mbps/27Mbps/40.5Mbps/54Mbps/81Mbps/108Mbps/121.5Mbps/135Mbps
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable
Test Software of EUT:	QDART
Antenna Type:	FPC antenna
Antenna Gain:	1.74dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):


Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz

Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

### 4.4 Test Environment and Mode

<b>Operating Environment:</b>	
<b>Radiated Emissions:</b>	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
<b>Conducted Emissions:</b>	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
<b>Radio conducted item test (RF Conducted test room):</b>	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
<b>Test mode:</b>	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.
<b>Run Software:</b>	

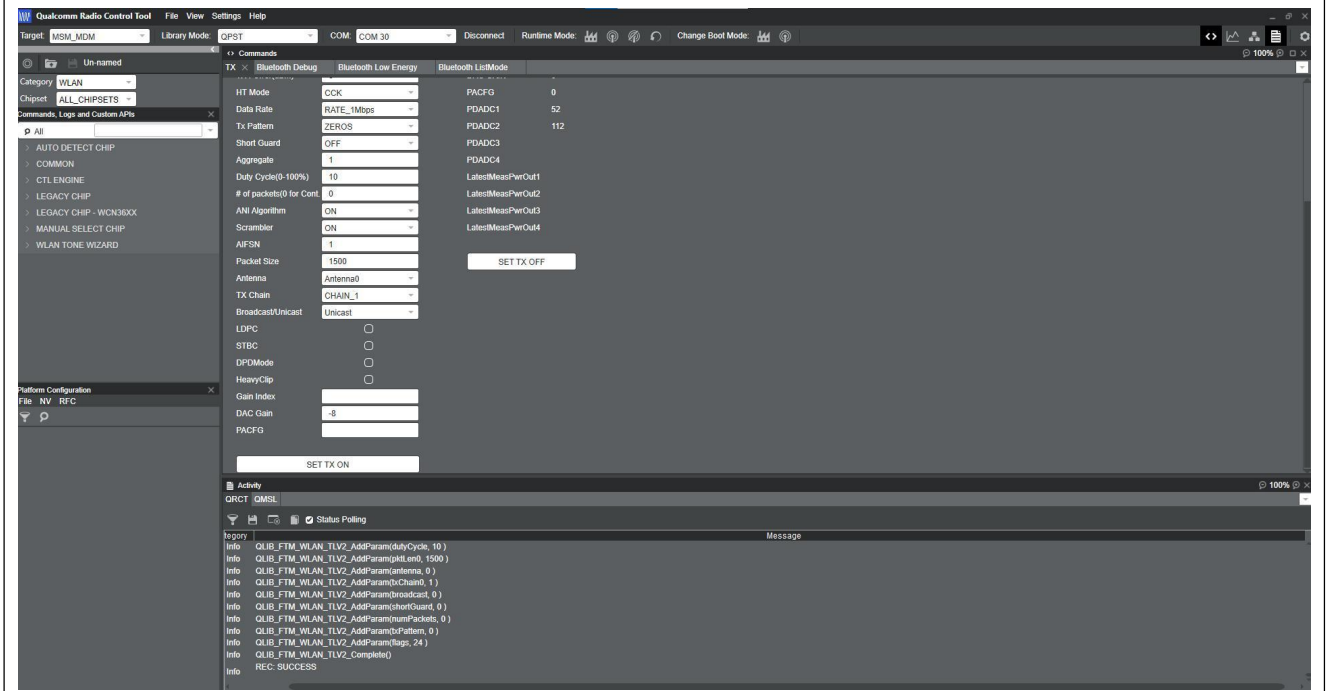



## 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

### 1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

### 2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

## 4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

#### 4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.9 Deviation from Standards

None.

#### 4.10 Abnormalities from Standard Conditions

None.

#### 4.11 Other Information Requested by the Customer

None.

## 4.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09	2023/09/08
Spectrum analyzer	R&S	FSU26	CQA-038	2022/09/09	2023/09/08
Spectrum analyzer	R&S	FSU40	CQA-075	2022/09/09	2023/09/08
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/09/09	2023/09/08
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/09/09	2023/09/08
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/09/09	2023/09/08
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/09/09	2023/09/08
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/09/09	2023/09/08
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/09/09	2023/09/08
Antenna Connector	CQA	RFC-01	CQA-080	2022/09/09	2023/09/08
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/09/09	2023/09/08
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/09/09	2023/09/08
Power meter	R&S	NRVD	CQA-029	2022/09/09	2023/09/08
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/09/09	2023/09/08
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09	2023/09/08
LISN	R&S	ENV216	CQA-003	2022/09/09	2023/09/08
Coaxial cable	CQA	N/A	CQA-C009	2022/09/09	2023/09/08
DC power	KEYSIGHT	E3631A	CQA-028	2022/09/09	2023/09/08

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
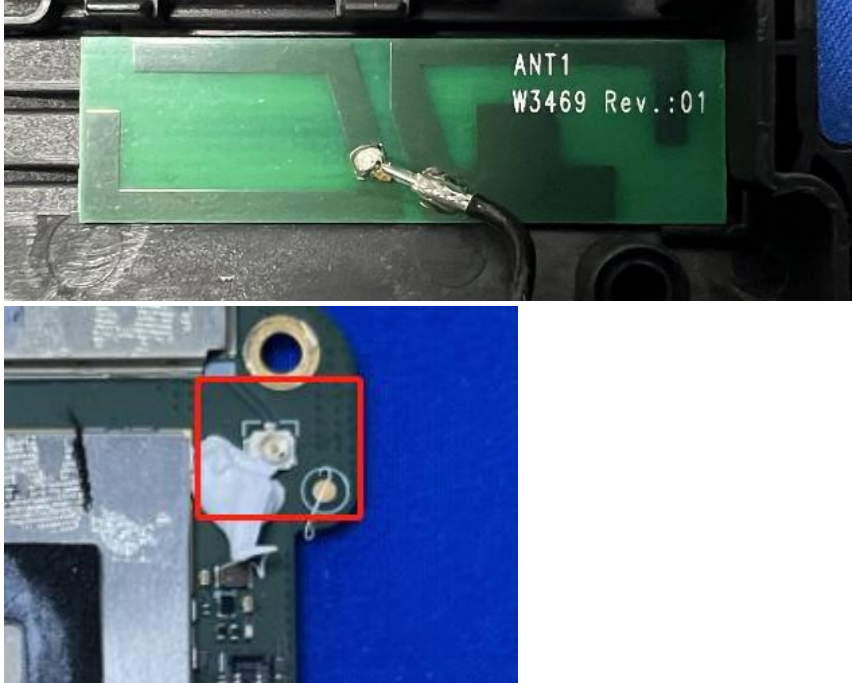
<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement:          An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:          The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
<b>EUT Antenna:</b>	
<p>The antenna is FPC antenna.          The connection/connection type between the antenna to the EUT's antenna port is: unique coupling.          This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	

## 5.2 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

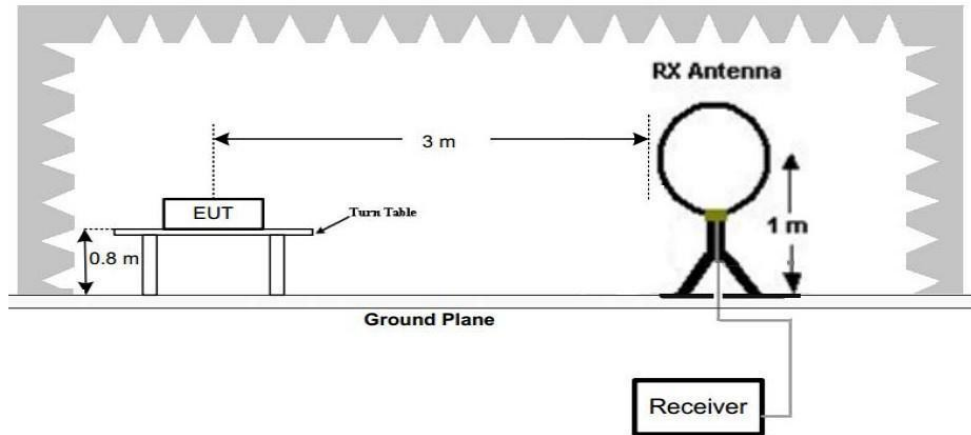


Figure 1. Below 30MHz

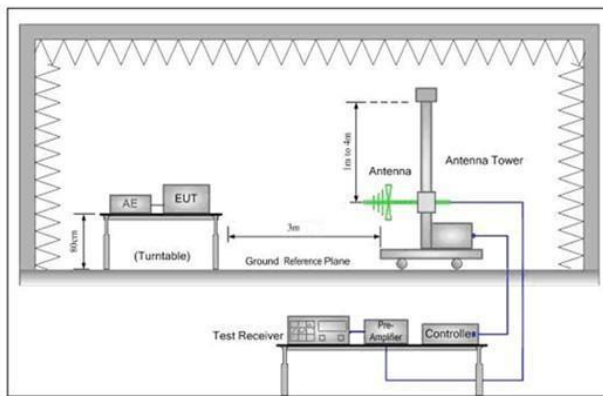


Figure 2. 30MHz to 1GHz

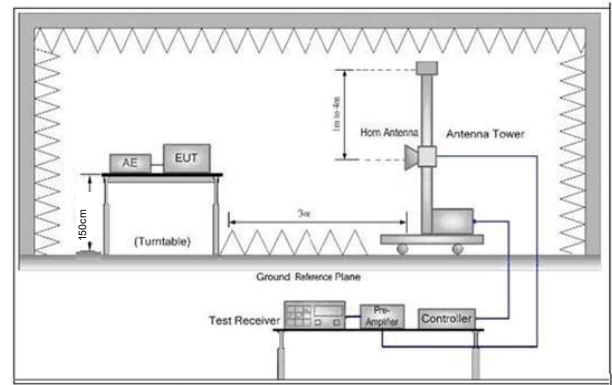


Figure 3. Above 1 GHz

Test Procedure:


- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

	<ul style="list-style-type: none"> <li>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</li> <li>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode,And found the X axis positioning which it is worse case .</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass



### 5.2.1 Radiated emission below 1GHz

<b>30MHz~1GHz</b>
Vertical

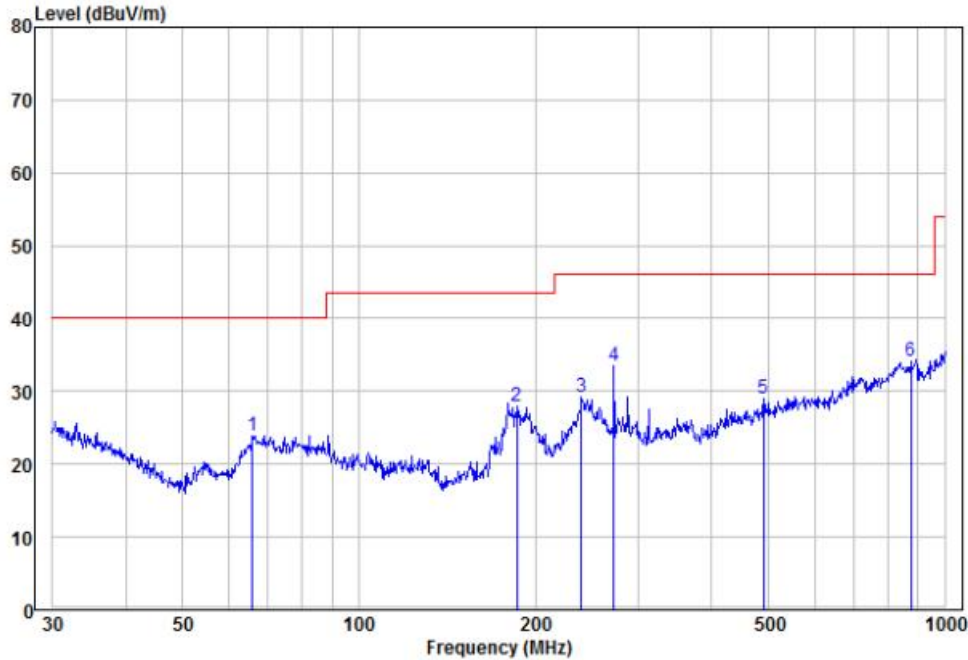

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	65.80	17.07	6.84	23.91	40.00	-16.09 Peak	HORIZONTAL
2	185.79	19.79	8.13	27.92	43.50	-15.58 Peak	HORIZONTAL
3	239.99	17.65	11.56	29.21	46.00	-16.79 Peak	HORIZONTAL
4	272.28	20.75	12.81	33.56	46.00	-12.44 Peak	HORIZONTAL
5	490.74	11.05	17.99	29.04	46.00	-16.96 Peak	HORIZONTAL
6 pp	875.25	10.16	23.95	34.11	46.00	-11.89 Peak	HORIZONTAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.



Horizontal

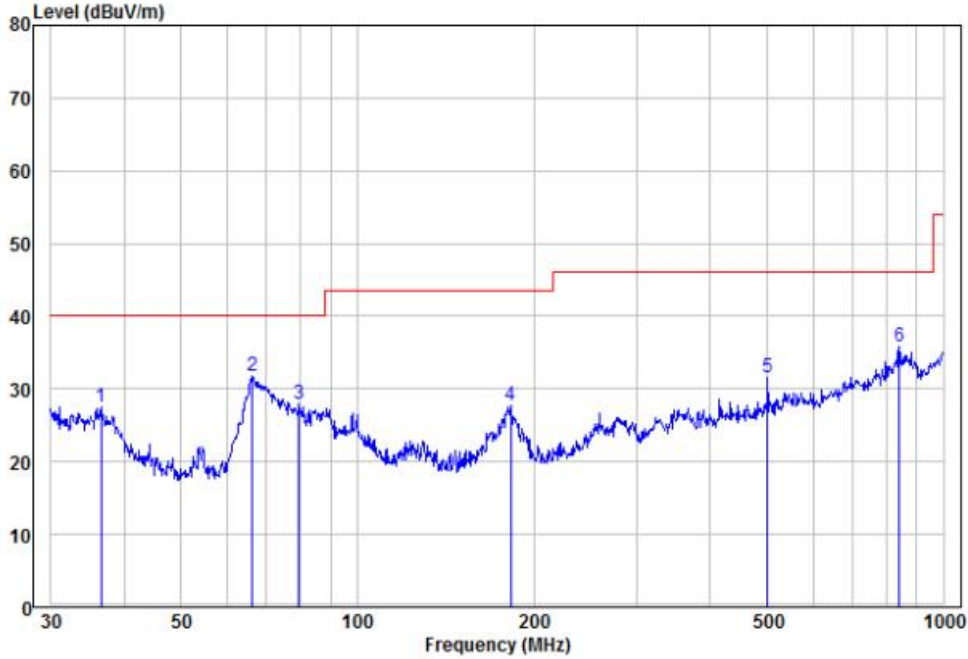

	Read	Limit	Over					
	Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	36.51	13.37	14.06	27.43	40.00	-12.57	Peak	VERTICAL
2	pp 66.27	24.74	6.98	31.72	40.00	-8.28	Peak	VERTICAL
3	79.52	18.32	9.70	28.02	40.00	-11.98	Peak	VERTICAL
4	182.56	19.38	8.25	27.63	43.50	-15.87	Peak	VERTICAL
5	501.18	13.37	18.29	31.66	46.00	-14.34	Peak	VERTICAL
6	842.13	11.64	24.10	35.74	46.00	-10.26	Peak	VERTICAL

Remark:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Factor= Antenna Factor + Cable Factor – Preamplifier Factor,

Level = Read Level + Factor,

Over Limit=Level-Limit Line.

### 5.2.2 Transmitter emission above 1GHz

Test mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4824.000	53.82	-4.26	49.56	74	-24.44	peak	H
4824.000	36.17	-4.26	31.91	54	-22.09	AVG	H
7236.000	50.25	1.18	51.43	74	-22.57	peak	H
7236.000	37.83	1.18	39.01	54	-14.99	AVG	H
4824.000	55.65	-4.26	51.39	74	-22.61	peak	V
4824.000	38.32	-4.26	34.06	54	-19.94	AVG	V
7236.000	51.08	1.18	52.26	74	-21.74	peak	V
7236.000	36.28	1.18	37.46	54	-16.54	AVG	V

Test mode:		802.11b(1Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4874.000	51.39	-4.12	47.27	74	-26.73	peak	H
4874.000	36.31	-4.12	32.19	54	-21.81	AVG	H
7311.000	50.19	1.46	51.65	74	-22.35	peak	H
7311.000	36.39	1.46	37.85	54	-16.15	AVG	H
4874.000	52.73	-4.12	48.61	74	-25.39	peak	V
4874.000	36.09	-4.12	31.97	54	-22.03	AVG	V
7311.000	49.50	1.46	50.96	74	-23.04	peak	V
7311.000	36.80	1.46	38.26	54	-15.74	AVG	V

Test mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	51.87	-4.03	47.84	74	-26.16	peak	H
4924.000	37.34	-4.03	33.31	54	-20.69	AVG	H
7386.000	49.50	1.66	51.16	74	-22.84	peak	H
7386.000	37.53	1.66	39.19	54	-14.81	AVG	H
4924.000	53.51	-4.03	49.48	74	-24.52	peak	V
4924.000	38.44	-4.03	34.41	54	-19.59	AVG	V
7386.000	49.61	1.66	51.27	74	-22.73	peak	V
7386.000	37.91	1.66	39.57	54	-14.43	AVG	V

Remark:

- 1) The 1Mbps of rate of 802.11b is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4824.000	52.33	-4.26	48.07	74	-25.93	peak	H
4824.000	37.32	-4.26	33.06	54	-20.94	AVG	H
7236.000	50.47	1.18	51.65	74	-22.35	peak	H
7236.000	38.62	1.18	39.80	54	-14.20	AVG	H
4824.000	55.64	-4.26	51.38	74	-22.62	peak	V
4824.000	39.13	-4.26	34.87	54	-19.13	AVG	V
7236.000	51.93	1.18	53.11	74	-20.89	peak	V
7236.000	36.42	1.18	37.60	54	-16.40	AVG	V

Test mode:		802.11g(6Mbps)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4874.000	51.28	-4.12	47.16	74	-26.84	peak	H
4874.000	36.07	-4.12	31.95	54	-22.05	AVG	H
7311.000	49.93	1.46	51.39	74	-22.61	peak	H
7311.000	36.20	1.46	37.66	54	-16.34	AVG	H
4874.000	53.88	-4.12	49.76	74	-24.24	peak	V
4874.000	37.11	-4.12	32.99	54	-21.01	AVG	V
7311.000	49.18	1.46	50.64	74	-23.36	peak	V
7311.000	36.50	1.46	37.96	54	-16.04	AVG	V

Test mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	52.39	-4.03	48.36	74	-25.64	peak	H
4924.000	37.74	-4.03	33.71	54	-20.29	AVG	H
7386.000	49.47	1.66	51.13	74	-22.87	peak	H
7386.000	36.83	1.66	38.49	54	-15.51	AVG	H
4924.000	54.45	-4.03	50.42	74	-23.58	peak	V
4924.000	38.39	-4.03	34.36	54	-19.64	AVG	V
7386.000	50.31	1.66	51.97	74	-22.03	peak	V
7386.000	36.89	1.66	38.55	54	-15.45	AVG	V

Remark:

- 1) The 6Mbps of rate of 802.11g is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n20(mcs0)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4824.000	53.42	-4.26	49.16	74	-24.84	peak	H
4824.000	37.62	-4.26	33.36	54	-20.64	AVG	H
7236.000	50.57	1.18	51.75	74	-22.25	peak	H
7236.000	37.96	1.18	39.14	54	-14.86	AVG	H
4824.000	55.60	-4.26	51.34	74	-22.66	peak	V
4824.000	38.96	-4.26	34.70	54	-19.30	AVG	V
7236.000	51.21	1.18	52.39	74	-21.61	peak	V
7236.000	35.75	1.18	36.93	54	-17.07	AVG	V

Test mode:		802.11n20(mcs0)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4874.000	52.45	-4.12	48.33	74	-25.67	peak	H
4874.000	37.16	-4.12	33.04	54	-20.96	AVG	H
7311.000	48.95	1.46	50.41	74	-23.59	peak	H
7311.000	36.54	1.46	38.00	54	-16.00	AVG	H
4874.000	53.74	-4.12	49.62	74	-24.38	peak	V
4874.000	36.29	-4.12	32.17	54	-21.83	AVG	V
7311.000	48.54	1.46	50.00	74	-24.00	peak	V
7311.000	36.56	1.46	38.02	54	-15.98	AVG	V

Test mode:		802.11n20(mcs0)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4924.000	51.81	-4.03	47.78	74	-26.22	peak	H
4924.000	38.02	-4.03	33.99	54	-20.01	AVG	H
7386.000	51.08	1.66	52.74	74	-21.26	peak	H
7386.000	36.66	1.66	38.32	54	-15.68	AVG	H
4924.000	54.89	-4.03	50.86	74	-23.14	peak	V
4924.000	37.15	-4.03	33.12	54	-20.88	AVG	V
7386.000	50.27	1.66	51.93	74	-22.07	peak	V
7386.000	37.48	1.66	39.14	54	-14.86	AVG	V

Remark:

- 1) The MCS0 of rate of 802.11n20 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test mode:		802.11n40(mcs0)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4844.000	53.00	-4.26	48.74	74	-25.26	peak	H
4844.000	37.27	-4.26	33.01	54	-20.99	AVG	H
7266.000	50.46	1.18	51.64	74	-22.36	peak	H
7266.000	37.03	1.18	38.21	54	-15.79	AVG	H
4844.000	54.45	-4.26	50.19	74	-23.81	peak	V
4844.000	38.32	-4.26	34.06	54	-19.94	AVG	V
7266.000	50.53	1.18	51.71	74	-22.29	peak	V
7266.000	36.20	1.18	37.38	54	-16.62	AVG	V

Test mode:		802.11n40(mcs0)		Test channel:		Middle	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
4874.000	52.37	-4.12	48.25	74	-25.75	peak	H
4874.000	37.32	-4.12	33.20	54	-20.80	AVG	H
7311.000	49.82	1.46	51.28	74	-22.72	peak	H
7311.000	36.91	1.46	38.37	54	-15.63	AVG	H
4874.000	52.60	-4.12	48.48	74	-25.52	peak	V
4874.000	36.42	-4.12	32.30	54	-21.70	AVG	V
7311.000	48.76	1.46	50.22	74	-23.78	peak	V
7311.000	35.78	1.46	37.24	54	-16.76	AVG	V



Test mode:		802.11n40(mcs0)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
4904.000	52.87	-4.03	48.84	74	-25.16	peak	H
4904.000	37.54	-4.03	33.51	54	-20.49	AVG	H
7356.000	49.57	1.66	51.23	74	-22.77	peak	H
7356.000	36.27	1.66	37.93	54	-16.07	AVG	H
4904.000	54.14	-4.03	50.11	74	-23.89	peak	V
4904.000	38.91	-4.03	34.88	54	-19.12	AVG	V
7356.000	50.00	1.66	51.66	74	-22.34	peak	V
7356.000	36.83	1.66	38.49	54	-15.51	AVG	V

Remark:

- 1) The MCS0 of rate of 802.11n40 is the worst case.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

### 5.3 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10 2013		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

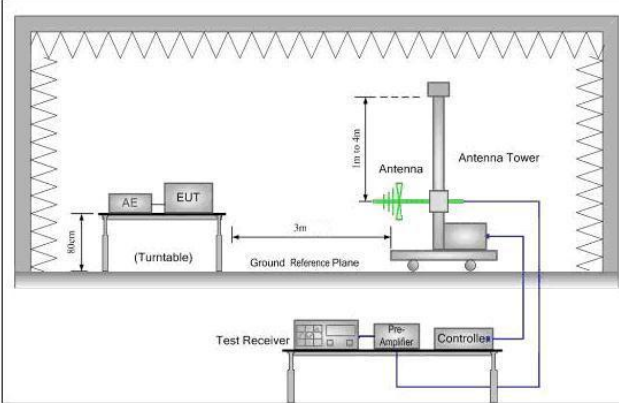


Figure 1. 30MHz to 1GHz

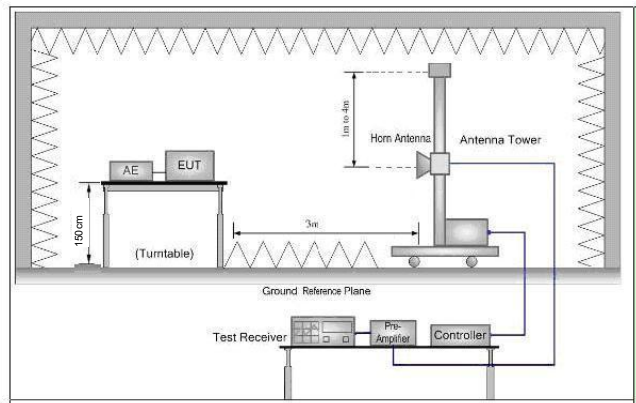


Figure 2. Above 1 GHz

Test Procedure:

- a. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
 Note: For the radiated emission test above 1GHz:  
 Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and

	<p>then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>g. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case .</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with all kind of modulations, data rates. Transmitting mode.</p>
Final Test Mode:	<p>Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case. Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40). Only the worst case is recorded in the report.</p>
Test Results:	<p>Pass</p>

**Test data:**

Worse case mode:		802.11b(1Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	58.51	-9.2	49.31	74	-24.69	peak	H
2390.000	44.06	-9.2	34.86	54	-19.14	AVG	H
2400.000	59.84	-9.39	50.45	74	-23.55	peak	H
2400.000	46.46	-9.39	37.07	54	-16.93	AVG	H
2390.000	58.94	-9.2	49.74	74	-24.26	peak	V
2390.000	44.90	-9.2	35.70	54	-18.30	AVG	V
2400.000	59.58	-9.39	50.19	74	-23.81	peak	V
2400.000	46.73	-9.39	37.34	54	-16.66	AVG	V

Worse case mode:		802.11b(1Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	57.74	-9.29	48.45	74	-25.55	peak	H
2483.500	43.58	-9.29	34.29	54	-19.71	AVG	H
2483.500	58.37	-9.29	49.08	74	-24.92	peak	V
2483.500	45.67	-9.29	36.38	54	-17.62	AVG	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	59.04	-9.2	49.84	74	-24.16	peak	H
2390.000	44.26	-9.2	35.06	54	-18.94	AVG	H
2400.000	59.73	-9.39	50.34	74	-23.66	peak	H
2400.000	46.33	-9.39	36.94	54	-17.06	AVG	H
2390.000	59.16	-9.2	49.96	74	-24.04	peak	V
2390.000	44.96	-9.2	35.76	54	-18.24	AVG	V
2400.000	59.53	-9.39	50.14	74	-23.86	peak	V
2400.000	46.74	-9.39	37.35	54	-16.65	AVG	V

Worse case mode:		802.11g(6Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	57.82	-9.29	48.53	74	-25.47	peak	H
2483.500	43.86	-9.29	34.57	54	-19.43	AVG	H
2483.500	57.96	-9.29	48.67	74	-25.33	peak	V
2483.500	46.41	-9.29	37.12	54	-16.88	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2390.000	58.81	-9.2	49.61	74	-24.39	peak	H
2390.000	44.30	-9.2	35.10	54	-18.90	AVG	H
2400.000	60.23	-9.39	50.84	74	-23.16	peak	H
2400.000	46.08	-9.39	36.69	54	-17.31	AVG	H
2390.000	58.88	-9.2	49.68	74	-24.32	peak	V
2390.000	44.63	-9.2	35.43	54	-18.57	AVG	V
2400.000	59.76	-9.39	50.37	74	-23.63	peak	V
2400.000	46.04	-9.39	36.65	54	-17.35	AVG	V

Worse case mode:		802.11n(HT20)(6.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)		H/V
2483.500	58.42	-9.29	49.13	74	-24.87	peak	H
2483.500	44.25	-9.29	34.96	54	-19.04	AVG	H
2483.500	58.19	-9.29	48.90	74	-25.10	peak	V
2483.500	46.03	-9.29	36.74	54	-17.26	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Lowest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2390.000	59.24	-9.2	50.04	74	-23.96	peak	H
2390.000	43.98	-9.2	34.78	54	-19.22	AVG	H
2400.000	60.19	-9.39	50.80	74	-23.20	peak	H
2400.000	46.77	-9.39	37.38	54	-16.62	AVG	H
2390.000	58.54	-9.2	49.34	74	-24.66	peak	V
2390.000	44.31	-9.2	35.11	54	-18.89	AVG	V
2400.000	60.00	-9.39	50.61	74	-23.39	peak	V
2400.000	46.65	-9.39	37.26	54	-16.74	AVG	V

Worse case mode:		802.11n(HT40)(13.5Mbps)		Test channel:		Highest	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
2483.500	58.09	-9.29	48.80	74	-25.20	peak	H
2483.500	44.32	-9.29	35.03	54	-18.97	AVG	H
2483.500	58.05	-9.29	48.76	74	-25.24	peak	V
2483.500	46.14	-9.29	36.85	54	-17.15	AVG	V

**Note:**

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

*Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor*




## 6 Photographs - EUT Test Setup

### 6.1 Radiated Spurious Emission

9kHz~30MHz:



30MHz~1GHz:

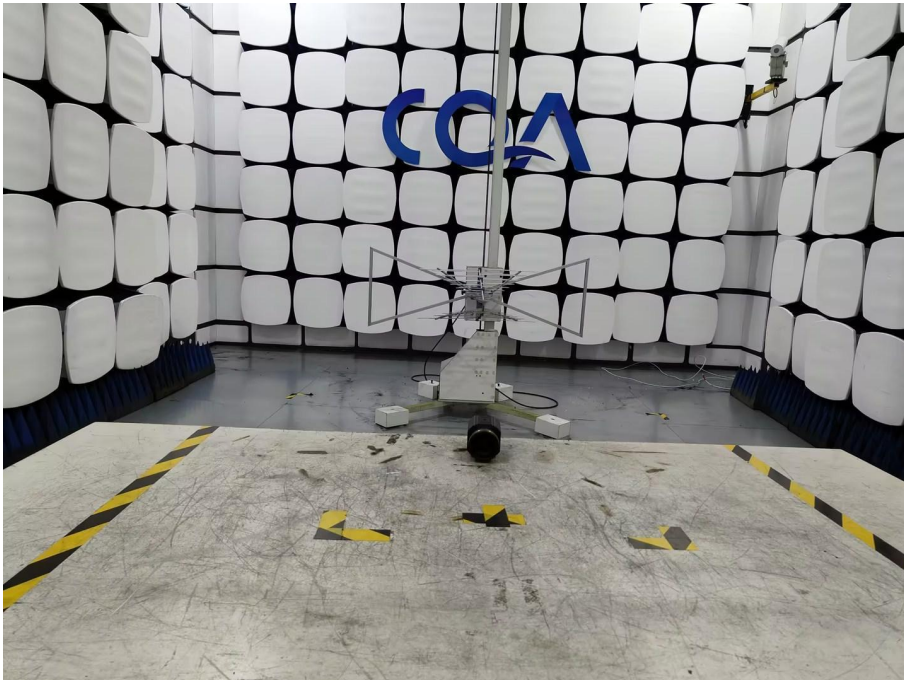



Above 1GHz:



## 6.2 Conducted Emissions Test Setup



## 7 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20230901740E-01.

\*\*\* END OF REPORT \*\*\*