



## 1 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20230901740E-03	Rev.01	Initial report	2023-10-18

Here the product #1 means the product version in original FCC grant,

The difference between product #1 and product #2 is that the USB HUB IC chip is added is different. These changes do not affect RF performance.

This report only contains the test data for product #2. For the test result for product #1, please refer to original test report NO.CQASZ20230500829E

For the fundamental testing items that are not applicable here since the application type is permissive change, please refer to the FCC test report in original grant for the result.

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203	ANSI C63.10-2013; KDB789033	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.207	ANSI C63.10-2013; KDB789033	N/A
Maximum Conducted Output Power	47 CFR Part 15 Subpart C Section 15.407 (a)	ANSI C63.10-2013; KDB789033	N/A
Emission Bandwidth	47 CFR Part 15 Subpart C Section 15.407 (a)(e)	ANSI C63.10-2013; KDB789033	N/A
Maximum Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	ANSI C63.10-2013; KDB789033	N/A
Band Edge Measurements	47 CFR Part 15 Subpart C Section 15.209 & 15.407(b)	ANSI C63.10-2013; KDB789033	N/A
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	ANSI C63.10-2013; KDB789033	N/A
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	N/A
Radiated Spurious Emissions	47 CFR Part 15 Subpart E Section 15.407 (b)	ANSI C63.10-2013; KDB789033	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application


## 3 Content

	Page
<b>1 VERSION</b> .....	<b>2</b>
<b>2 TEST SUMMARY</b> .....	<b>3</b>
<b>3 CONTENT</b> .....	<b>4</b>
<b>4 TEST REQUIREMENT</b> .....	<b>5</b>
4.1 TEST SETUP .....	5
4.1.1 For Conducted test setup .....	5
4.1.2 For Radiated Emissions test setup .....	5
4.1.3 For Conducted Emissions test setup .....	6
4.2 TEST ENVIRONMENT .....	6
4.3 TEST CONDITION .....	7
<b>5 GENERAL INFORMATION</b> .....	<b>9</b>
5.1 CLIENT INFORMATION .....	9
5.2 GENERAL DESCRIPTION OF EUT .....	9
5.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	10
5.4 DESCRIPTION OF SUPPORT UNITS .....	11
5.5 TEST LOCATION .....	12
5.6 TEST FACILITY .....	12
5.7 DEVIATION FROM STANDARDS .....	12
5.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	12
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	12
5.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	12
<b>6 EQUIPMENT LIST</b> .....	<b>13</b>
<b>7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>14</b>
<i>Appendix J): Radiated Spurious Emissions</i> .....	<i>15</i>
<b>8 PHOTOGRAPHS - EUT TEST SETUP</b> .....	<b>19</b>
8.1 RADIATED SPURIOUS EMISSION .....	19
8.2 CONDUCTED EMISSIONS TEST SETUP .....	20
<b>9 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b> .....	<b>21</b>

## 4 Test Requirement

### 4.1 Test setup

#### 4.1.1 For Conducted test setup

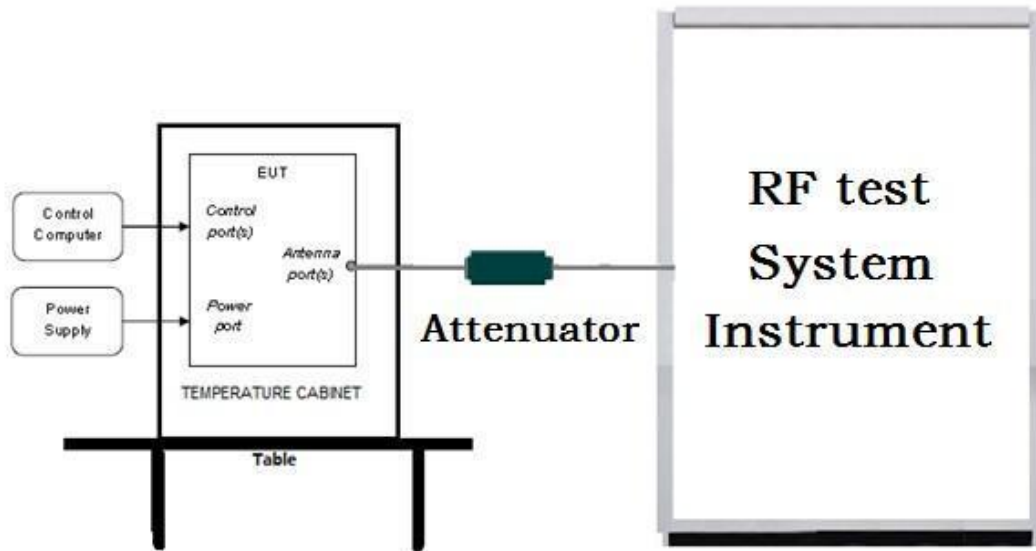

#### 4.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

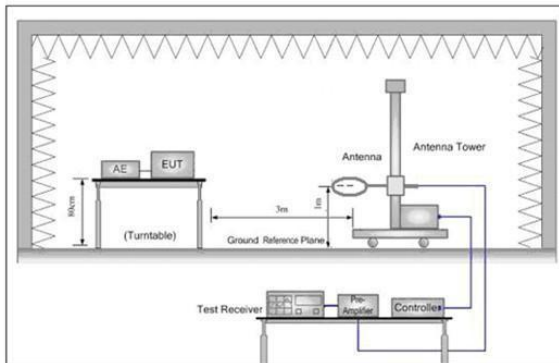


Figure 1. Below 30MHz

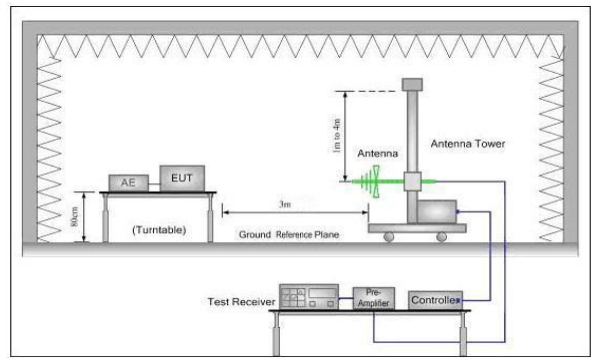


Figure 2. 30MHz to 1GHz


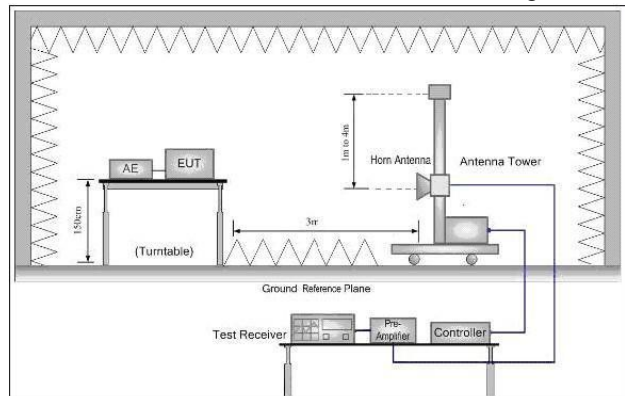


Figure 3. Above 1GHz

### 4.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

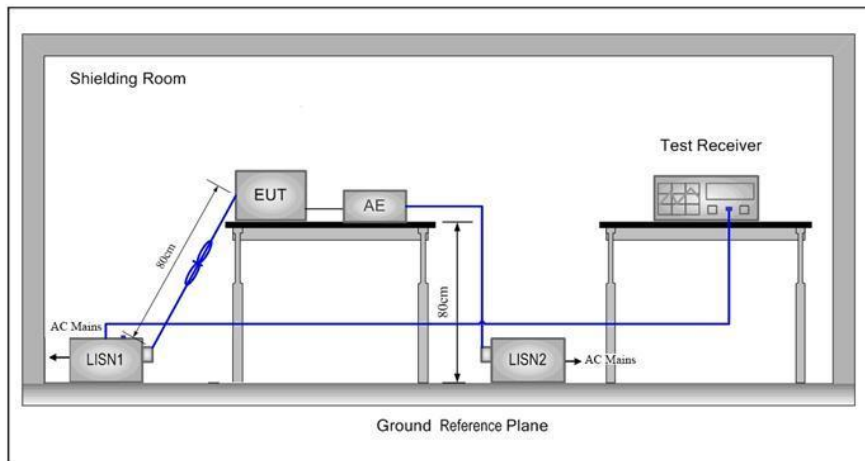


## 4.2 Test Environment

<b>Operating Environment:</b>		
<b>Conducted Emissions:</b>		
Temperature:	25.6 °C	
Humidity:	60 % RH	
Atmospheric Pressure:	1009 mbar	
<b>Radiated Emissions:</b>		
Temperature:	25.5 °C	
Humidity:	54 % RH	
Atmospheric Pressure:	1009mbar	
<b>Radio conducted item test (RF Conducted test room):</b>		
Temperature:	25.3 °C	
Humidity:	50 % RH	
Atmospheric Pressure:	1009 mbar	
Test Condition	Temperature (°C)	Voltage (V)
TN/VN	+15 to +35	12
TL/VL	0	10.8
TH/VL	50	10.8
TL/VH	0	13.2
TH/VH	50	13.2
Remark:		
1)The EUT just work in such extreme temperature of 0 °C to 50 °C and the extreme voltage of 10.8V to 13.2V, so here the EUT is tested in the temperature of 0 °C to 50 °C and the voltage of 10.8V to 13.2V.		
2)VN: Normal Voltage; TN: Normal Temperature;		
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;		
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.		

### 4.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A

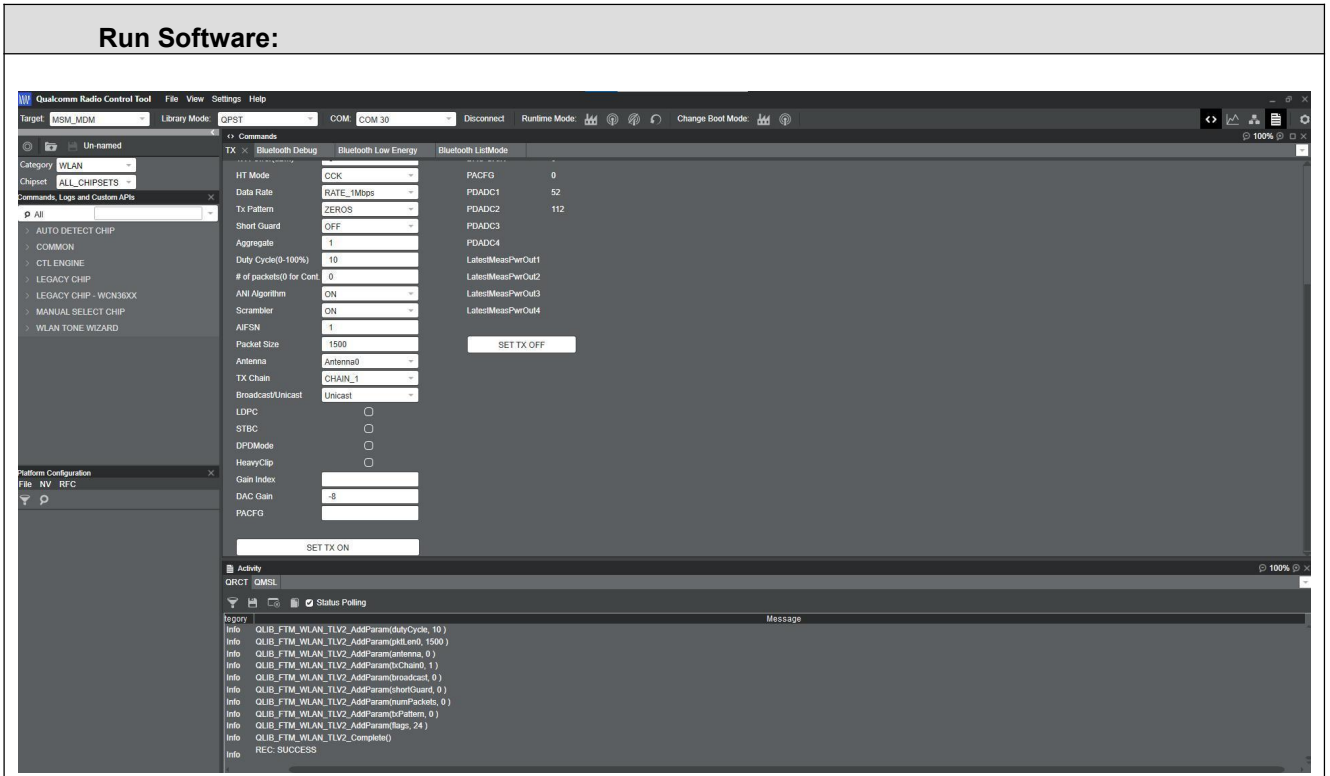

**Test mode:**

**Pre-scan under all rate at lowest channel for Ant1**

Through Pre-scan, 6Mbps is the worst case of 802.11a (20M); MCS0 is the worst case of 802.11n (20M); MCS0 is the worst case of 802.11ac (20M); MCS0 is the worst case of 802.11n(40M); MCS0 is the worst case of 802.11ac (40M); MCS0 is the worst case of 802.11ac(80M).



## 5 General Information

### 5.1 Client Information

Applicant:	Shenzhen Hollyland Technology Co., Ltd
Address of Applicant:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China
Manufacturer:	Shenzhen Hollyland Technology Co., Ltd
Address of Manufacturer:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China
Factory:	Shenzhen Hollyland Technology Co., Ltd
Address of Factory:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China

### 5.2 General Description of EUT

Product Name:	VenusLiv Air Live Stream Camera
Model No.:	VenusLiv Air, VenusLiv Lite, VenusLiv , VenusLiv Mini, VenusLiv X Air, VenusLiv X Lite, VenusLive Air, VenusLive Lite, VenusLive, VenusLive Mini, VenusLiv X Air, Venus X Air, Venus X Lite, Venus Air, Venus Lite
Test Model No.:	VenusLiv Air
Trade Mark:	HOLLYLAND
Software Version:	V1.0.2.0
Hardware Version:	V28
EUT Power Supply:	Power supply DC12V for adaptor  Model:R241-1202000I Input:100-240V~50/60Hz 1.5A Output:12V 2A 24W
EUT Supports Radios application:	5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz
EUT Type:	Client devices

### 5.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250 MHz IEEE802.11n/ac(40M): 5150MHz ~5250 MHz IEEE802.11ac(80M): 5150MHz ~5250 MHz
Channel Numbers:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel
Type of Modulation:	OFDM
Sample Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable
Test Software of EUT:	QDART
Antenna Type:	FPC antenna
Antenna gain:	3.96dBi
Cable loss:	1.0 dB

Note:

The above parameters will directly affect the test results. The information is provided by the applicant.

Operation Frequency each of channel

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	NA	NA
42	5210MHz	NA	NA

## 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

## 5.5 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 5.6 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 5.7 Deviation from Standards

None.

## 5.8 Abnormalities from Standard Conditions

None.

## 5.9 Other Information Requested by the Customer

None.

## 5.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$3 \times 10^{-8}$
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%
7	DC power voltages	0.5%

## 6 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09	2023/09/08
Spectrum analyzer	R&S	FSU26	CQA-038	2022/09/09	2023/09/08
Spectrum analyzer	R&S	FSU40	CQA-075	2022/09/09	2023/09/08
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2022/09/09	2023/09/08
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2022/09/09	2023/09/08
Preamplifier	EMCI	EMC184055SE	CQA-089	2022/09/09	2023/09/08
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2022/09/09	2023/09/08
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2022/09/09	2023/09/08
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2022/09/09	2023/09/08
Antenna Connector	CQA	RFC-01	CQA-080	2022/09/09	2023/09/08
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2022/09/09	2023/09/08
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2022/09/09	2023/09/08
Power meter	R&S	NRVD	CQA-029	2022/09/09	2023/09/08
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2022/09/09	2023/09/08
EMI Test Receiver	R&S	ESR7	CQA-005	2022/09/09	2023/09/08
LISN	R&S	ENV216	CQA-003	2022/09/09	2023/09/08
Coaxial cable	CQA	N/A	CQA-C009	2022/09/09	2023/09/08
DC power	KEYSIGHT	E3631A	CQA-028	2022/09/09	2023/09/08

Test software:

	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

---

## 7 Radio Technical Requirements Specification

### Reference documents for testing:


No.	Identity	Document Title
1	FCC Part15E	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3	KDB 789033 D02 General U-NII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
4	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

## Appendix J): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre)</li> <li>Test the EUT in the lowest channel ,the middle channel ,the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBµV/cm)	Remark	Measurement distance (cm)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>				
Test result:	PASS				

**Test Data:**  
**Radiated Emission below 1GHz**


<b>30MHz~1GHz</b>		
Test mode:	Transmitting (802.11a 36CH)	Vertical

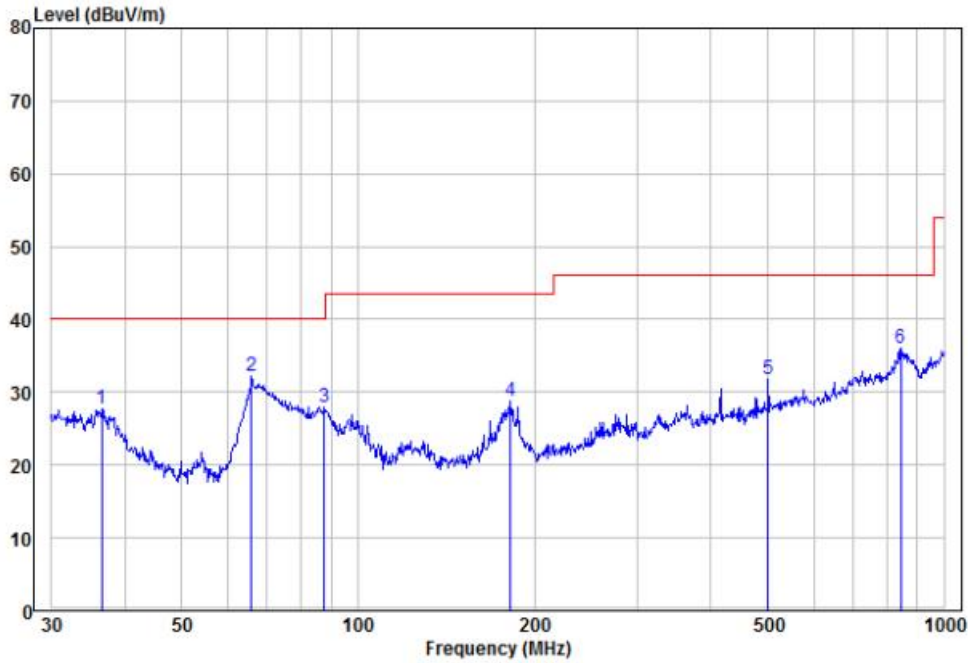

	Read Freq	Read Level	Factor	Limit Level	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	36.51	13.66	14.06	27.72	40.00	-12.28 Peak	VERTICAL
2	65.80	25.40	6.84	32.24	40.00	-7.76 Peak	VERTICAL
3	87.72	17.96	9.96	27.92	40.00	-12.08 Peak	VERTICAL
4	181.92	20.45	8.27	28.72	43.50	-14.78 Peak	VERTICAL
5	501.18	13.40	18.29	31.69	46.00	-14.31 Peak	VERTICAL
6	845.09	11.92	24.08	36.00	46.00	-10.00 Peak	VERTICAL



Test mode:	Transmitting (802.11a 36CH)	Horizontal
------------	-----------------------------	------------

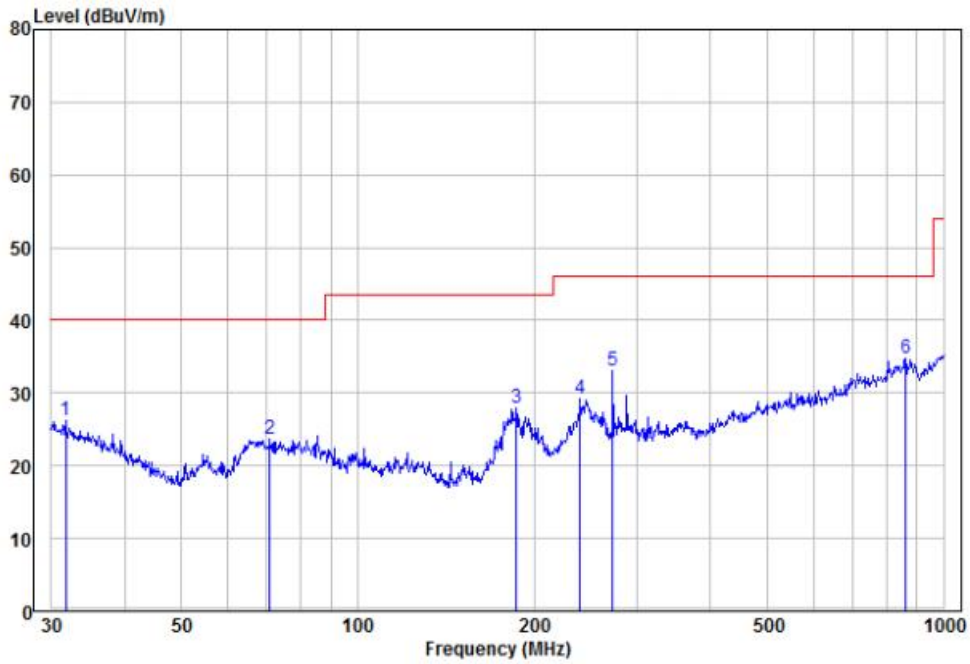

	Read Freq	Read Level	Factor	Limit Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	31.73	10.76	15.46	26.22	40.00	-13.78	Peak	HORIZONTAL
2	70.83	15.30	8.29	23.59	40.00	-16.41	Peak	HORIZONTAL
3	186.44	19.82	8.10	27.92	43.50	-15.58	Peak	HORIZONTAL
4	239.99	17.76	11.56	29.32	46.00	-16.68	Peak	HORIZONTAL
5	272.28	20.27	12.81	33.08	46.00	-12.92	Peak	HORIZONTAL
6 pp	863.06	10.86	23.99	34.85	46.00	-11.15	Peak	HORIZONTAL

### Transmitter Emission above 1GHz

Test mode:		802.11a(6Mbps)		Test channel:		36 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10360	59.05	2.26	61.31	74	-12.69	peak	H
10360	44.10	2.26	46.36	54	-7.64	AVG	H
15540	59.31	3.75	63.06	74	-10.94	peak	H
15540	46.39	3.75	50.14	54	-3.86	AVG	H
10360	58.45	2.26	60.71	74	-13.29	peak	V
10360	44.92	2.26	47.18	54	-6.82	AVG	V
15540	59.26	3.75	63.01	74	-10.99	peak	V
15540	46.77	3.75	50.52	54	-3.48	AVG	V

Test mode:		802.11a(6Mbps)		Test channel:		48 CH	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
10480	58.71	2.31	61.02	74	-12.98	peak	H
10480	44.43	2.31	46.74	54	-7.26	AVG	H
15720	59.27	3.79	63.06	74	-10.94	peak	H
15720	46.06	3.79	49.85	54	-4.15	AVG	H
10480	59.00	2.31	61.31	74	-12.69	peak	V
10480	44.41	2.31	46.72	54	-7.28	AVG	V
15720	60.08	3.79	63.87	74	-10.13	peak	V
15720	46.87	3.79	50.66	54	-3.34	AVG	V

Remark:

- 1) The 802.11a 6Mbps of rate is the worst case, only the worst data recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 40GHz,The disturbance above 18GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


## 8 Photographs - EUT Test Setup

### 8.1 Radiated Spurious Emission


9kHz~30MHz:



30MHz~1GHz:

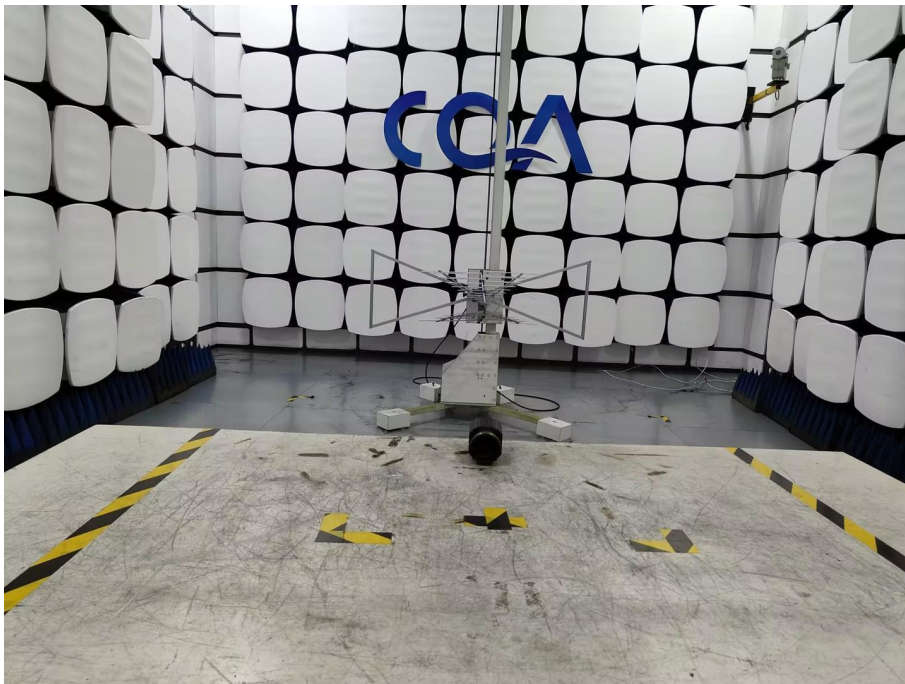

Above 1GHz:

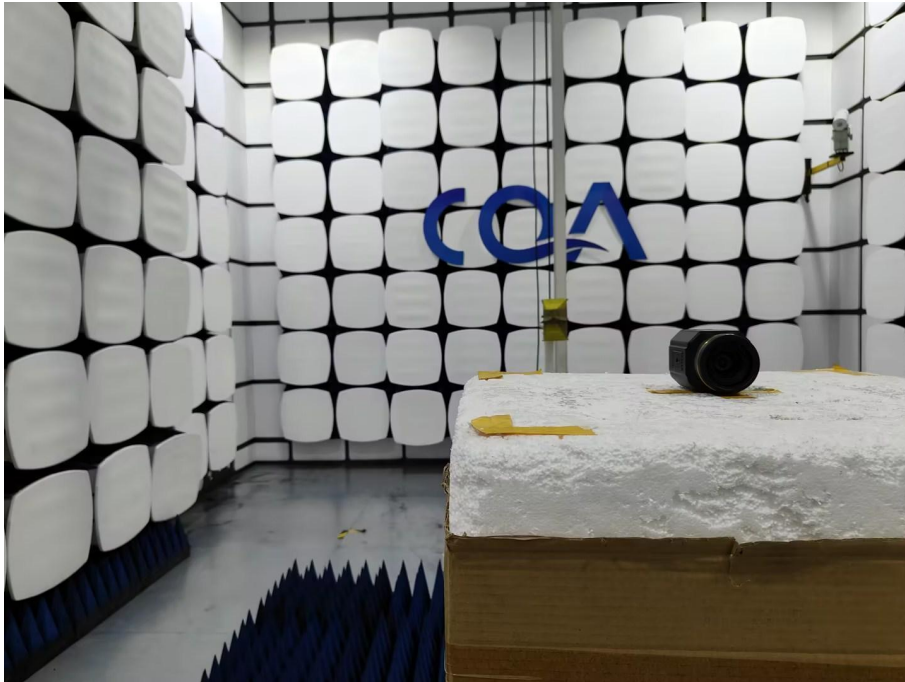

## 8.2 Conducted Emissions Test Setup



## 9 Photographs - EUT Constructional Details

Refer to PHOTOGRAPHS OF EUT for CQASZ20230901740E-01.

\*\*\* END OF REPORT \*\*\*