

NORTHWEST EMC

i1 Biometrics, Inc.

Vector Mouthguard

FCC 15.207:2014

FCC 15.247:2014

Report # I1BM0001.1



NVLAP[®]

NVLAP Lab Code: 200629-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report may only be duplicated in its entirety

CERTIFICATE OF TEST



Last Date of Test: December 22, 2014
i1 Biometrics, Inc.
Model: Vector Mouthguard

Radio Equipment Testing

Standards

| Specification | Method |
|-----------------|------------------|
| FCC 15.207:2014 | ANSI C63.10:2009 |
| FCC 15.247:2014 | DA 00-705:2000 |

Results

| Method Clause | Test Description | Applied | Results | Comments |
|---------------|-------------------------------------|---------|---------|----------|
| 6.2 | AC Powerline Conducted Emissions | Yes | Pass | |
| 6.5, 6.6 | Spurious Radiated Emissions | Yes | Pass | |
| 6.7 | Spurious Conducted Emissions | Yes | Pass | |
| 6.9.1 | Occupied Bandwidth | Yes | Pass | |
| 6.10.1 | Output Power | Yes | Pass | |
| 7.5 | Duty Cycle | Yes | Pass | |
| 7.7.2 | Channel Spacing | Yes | Pass | |
| 7.7.3 | Number of Hopping Channels | Yes | Pass | |
| 7.7.4 | Dwell Time | Yes | Pass | |
| 7.7.9 | Band Edge Compliance | Yes | Pass | |
| 7.7.9 | Band Edge Compliance - Hopping Mode | Yes | Pass | |

Deviations From Test Standards

None

Approved By:

Rod Munro, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.

REVISION HISTORY

| Revision Number | Description | Date | Page Number |
|-----------------|-------------|------|-------------|
| 00 | None | | |

ACCREDITATIONS AND AUTHORIZATIONS

United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

IC - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

European Union

European Commission – Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFTA – Recognized by OFTA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) for each test is on each data sheet. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

| Test | + MU | - MU |
|---------------------------------------|-------------|-------------|
| Frequency Accuracy (Hz) | 0.0007% | -0.0007% |
| Amplitude Accuracy (dB) | 1.2 dB | -1.2 dB |
| Conducted Power (dB) | 0.3 dB | -0.3 dB |
| Radiated Power via Substitution (dB) | 0.7 dB | -0.7 dB |
| Temperature (degrees C) | 0.7°C | -0.7°C |
| Humidity (% RH) | 2.5% RH | -2.5% RH |
| Voltage (AC) | 1.0% | -1.0% |
| Voltage (DC) | 0.7% | -0.7% |
| Field Strength (dB) | 4.5 dB | -4.5 dB |
| AC Powerline Conducted Emissions (dB) | 2.9 dB | -2.9 dB |

FACILITIES



| | | | | | |
|---|---|--|---|--|--|
| California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918 | Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136 | New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796 | Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066 | Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255 | Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 9801 (425)984-6600 |
| NVLAP | | | | | |
| NVLAP Lab Code: 200676-0 | NVLAP Lab Code: 200881-0 | NVLAP Lab Code: 200761-0 | NVLAP Lab Code: 200630-0 | NVLAP Lab Code:201049-0 | NVLAP Lab Code: 200629-0 |
| Industry Canada | | | | | |
| 2834B-1, 2834B-3 | 2834E-1 | N/A | 2834D-1, 2834D-2 | 2834G-1 | 2834F-1 |
| BSMI | | | | | |
| SL2-IN-E-1154R | SL2-IN-E-1152R | N/A | SL2-IN-E-1017 | In Process | SL2-IN-E-1153R |
| VCCI | | | | | |
| A-0029 | A-0109 | N/A | A-0108 | A-0201 | A-0110 |

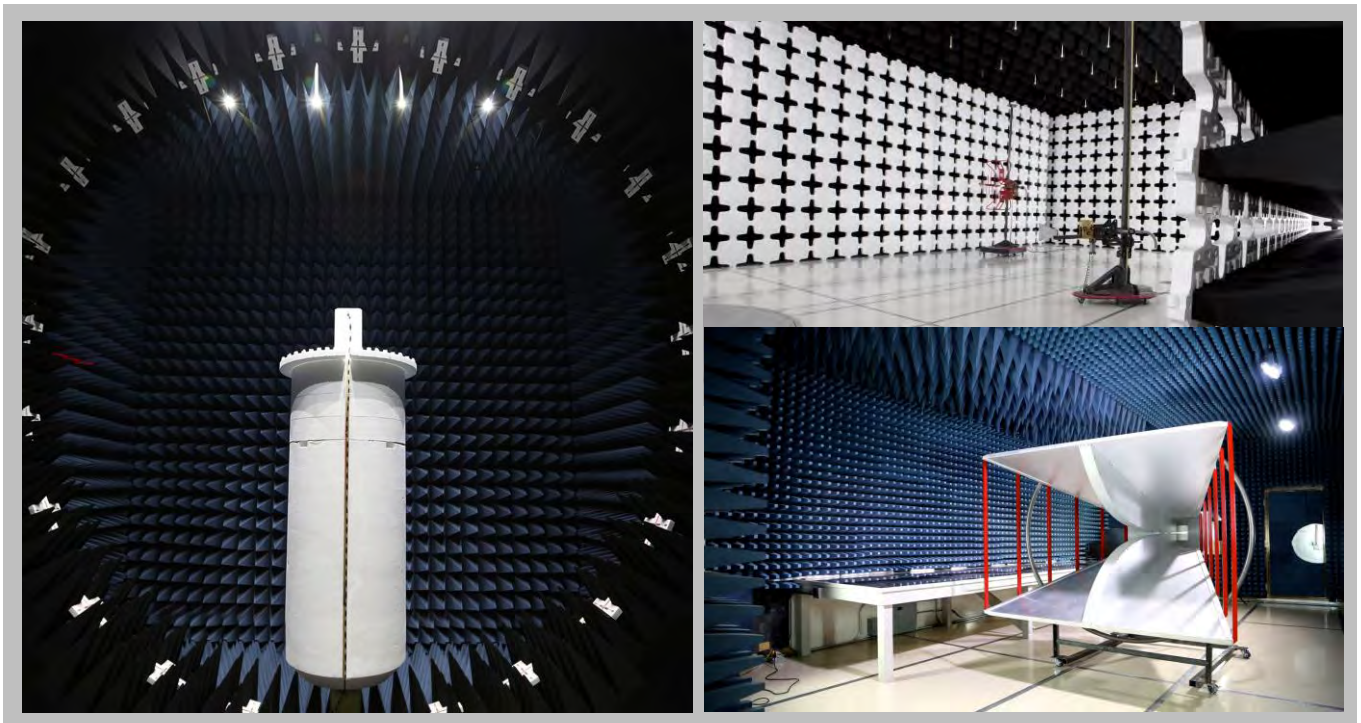

PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

| | |
|---------------------------------|---------------------------------|
| Company Name: | i1 Biometrics, Inc. |
| Address: | 12020 113th Avenue NE Suite 210 |
| City, State, Zip: | Kirkland, WA 98034 |
| Test Requested By: | David Brown |
| Model: | Vector Mouthguard |
| First Date of Test: | December 17, 2014 |
| Last Date of Test: | December 22, 2014 |
| Receipt Date of Samples: | December 17, 2014 |
| Equipment Design Stage: | Production |
| Equipment Condition: | No Damage |

Information Provided by the Party Requesting the Test

| |
|---|
| Functional Description of the EUT: |
| Wireless Mouthguard. |
| Testing Objective: |
| To demonstrate compliance of the 902-928 FHSS radio to FCC 15.247 requirements. |

CONFIGURATIONS

Configuration I1BM0001- 1

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| FCC Firmware v4 | BDF299D6 |

| EUT | | | |
|---------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Mouthguard | i1 Biometrics, Inc. | D0001 | 3350 |

| Peripherals in test setup boundary | | | |
|------------------------------------|--------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Laptop PC | Lenovo | Yoga 2 Pro | None |

| Cables | | | | | |
|------------|--------|------------|---------|---------------------|--------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB | No | 0.5m | No | Wireless Mouthguard | Laptop PC |

Configuration I1BM0001- 2

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| FCC Firmware v4 | BDF299D6 |

| EUT | | | |
|---------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Mouthguard | i1 Biometrics, Inc. | D0001 | 3348 |

| Peripherals in test setup boundary | | | |
|------------------------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| AC Adapter | Lenovo | ADLX65SLC2A | None |
| Charging Case | i1 Biometrics, Inc. | A0001 | B |
| Laptop PC | Lenovo | Yoga 2 Pro | None |

| Cables | | | | | |
|------------|--------|------------|---------|---------------|--------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| AC Power | No | 1.0m | No | AC Mains | AC Adapter |
| DC Power | No | 1.8m | Yes | AC Adapter | Laptop PC |
| USB | No | 0.5m | No | Charging Case | Laptop PC |

CONFIGURATIONS

Configuration I1BM0001- 3

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| FCC Firmware v4 | BDF299D6 |

| EUT | | | |
|---------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Mouthguard | i1 Biometrics, Inc. | D0001 | 3348 |

| Peripherals in test setup boundary | | | |
|------------------------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| AC-USB Power Adapter | BLU Products | US-BM-1000 | None |
| Charging Case | i1 Biometrics, Inc. | A0001 | B |

| Cables | | | | | |
|------------|--------|------------|---------|----------------------|---------------|
| Cable Type | Shield | Length (m) | Ferrite | Connection 1 | Connection 2 |
| USB | No | 0.5m | No | AC-USB Power Adapter | Charging Case |

Configuration I1BM0001- 4

| Software/Firmware Running during test | |
|---------------------------------------|----------|
| Description | Version |
| FCC Firmware v4 | BDF299D6 |

| EUT | | | |
|---------------------|---------------------|-------------------|---------------|
| Description | Manufacturer | Model/Part Number | Serial Number |
| Wireless Mouthguard | i1 Biometrics, Inc. | D0001 | 3348 |

MODIFICATIONS

Equipment Modifications

| Item | Date | Test | Modification | Note | Disposition of EUT |
|------|------------|-------------------------------------|--------------------------------------|---|--|
| 1 | 12/17/2014 | Band Edge Compliance | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 2 | 12/17/2014 | Band Edge Compliance – Hopping Mode | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 3 | 12/17/2014 | Channel Spacing | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 4 | 12/17/2014 | Duty Cycle | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 5 | 12/17/2014 | Dwell Time | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 6 | 12/17/2014 | Number of Hopping Frequencies | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 7 | 12/17/2014 | Occupied Bandwidth | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 8 | 12/17/2014 | Output Power | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 9 | 12/17/2014 | Spurious Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 10 | 12/19/2014 | AC Powerline Conducted Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | EUT was taken home by the client before the next scheduled test. |
| 11 | 12/22/2014 | Spurious Radiated Emissions | Tested as delivered to Test Station. | No EMI suppression devices were added or modified during this test. | Scheduled testing was completed. |

AC POWERLINE CONDUCTED EMISSIONS

TEST DESCRIPTION

Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50 Ω measuring port is terminated by a 50 Ω EMI meter or a 50 Ω resistive load. All 50 Ω measuring ports of the LISN are terminated by 50 Ω .

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|------------------|--------------------|----------------------------|-----|------------|----------|
| Receiver | Rohde & Schwarz | ESCI | ARE | 06/06/2014 | 12 mo |
| NC05 Cables | N/A | Conducted / NF Probe Cable | NC4 | 10/14/2014 | 12 mo |
| High Pass Filter | TTE | H97-100K-50-720B | HHF | 12/08/2014 | 12 mo |
| Attenuator | Fairview Microwave | SA03B-20 | RKD | 10/14/2014 | 12 mo |
| LISN | Solar | 9252-50-R-24-BNC | LIM | 12/09/2014 | 12 mo |

MEASUREMENT UNCERTAINTY

| Description | | |
|--------------|--------|---------|
| Expanded k=2 | 2.4 dB | -2.4 dB |

CONFIGURATIONS INVESTIGATED

I1BM0001-2
I1BM0001-3

MODES INVESTIGATED

Transmitting Low Channel 2
Transmitting Mid Channel 63
Transmitting High Channel 126

AC POWERLINE CONDUCTED EMISSIONS



WTD:2014.10.14
PSA-ESCI 2014.09.10, EmiR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|-----------|------------------------|----|
| Run #: | 1 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|---|-------|-----------|------------------------|----|

COMMENTS

None


EUT OPERATING MODES

Transmitting Low Channel 2 at Maximum Duty Cycle, 902.399871 MHz, Power Level at 10dBm.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

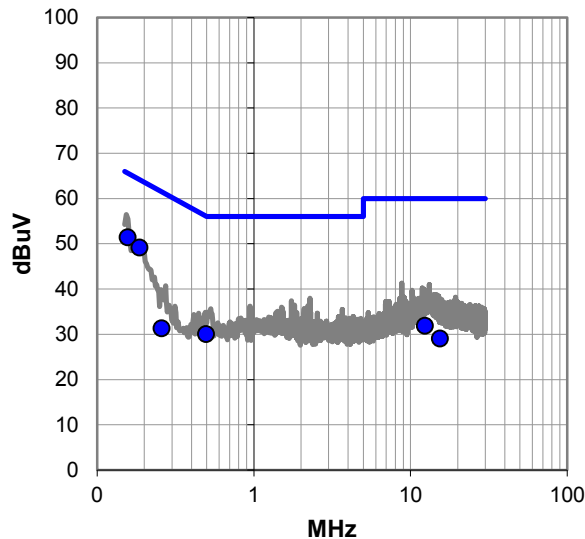

Average Data - vs - Average Limit

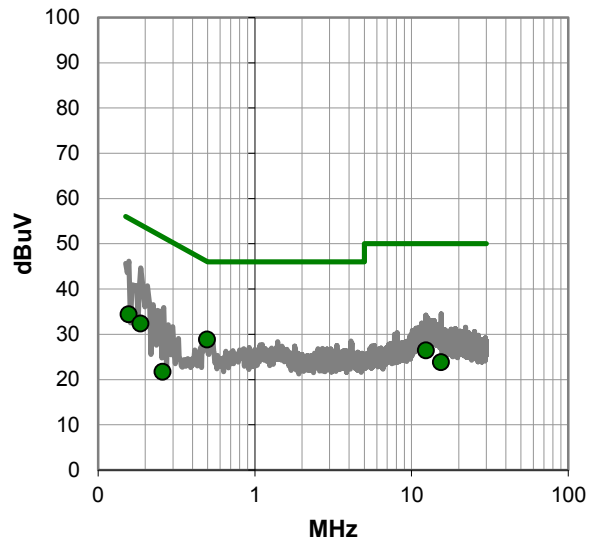

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #1

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.157 | 30.9 | 20.5 | 51.4 | 65.6 | -14.2 |
| 0.187 | 28.7 | 20.5 | 49.2 | 64.2 | -15.0 |
| 0.495 | 9.8 | 20.2 | 30.0 | 56.1 | -26.1 |
| 12.363 | 10.3 | 21.5 | 31.8 | 60.0 | -28.2 |
| 0.258 | 11.0 | 20.3 | 31.3 | 61.5 | -30.2 |
| 15.464 | 7.1 | 21.9 | 29.0 | 60.0 | -31.0 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.495 | 8.6 | 20.2 | 28.8 | 46.1 | -17.3 |
| 0.157 | 13.9 | 20.5 | 34.4 | 55.6 | -21.2 |
| 0.187 | 11.9 | 20.5 | 32.4 | 54.2 | -21.8 |
| 12.363 | 4.9 | 21.5 | 26.4 | 50.0 | -23.6 |
| 15.464 | 1.9 | 21.9 | 23.8 | 50.0 | -26.2 |
| 0.258 | 1.4 | 20.3 | 21.7 | 51.5 | -29.8 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|---------|------------------------|----|
| Run #: | 2 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|---|-------|---------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting Low Channel 2 at Maximum Duty Cycle, 902.399871 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

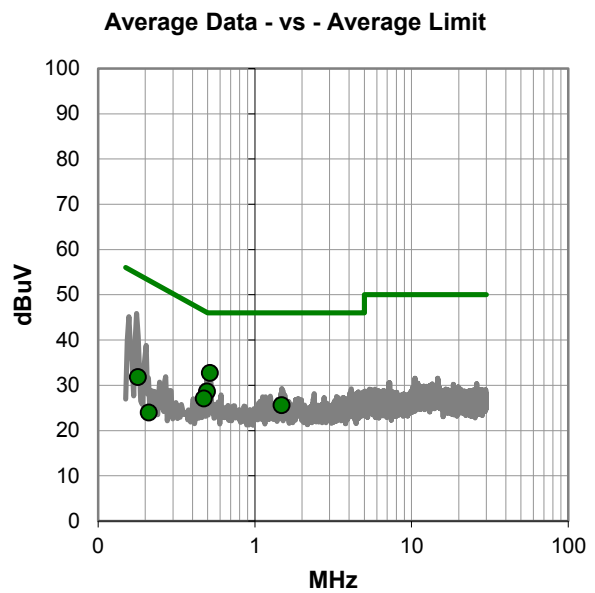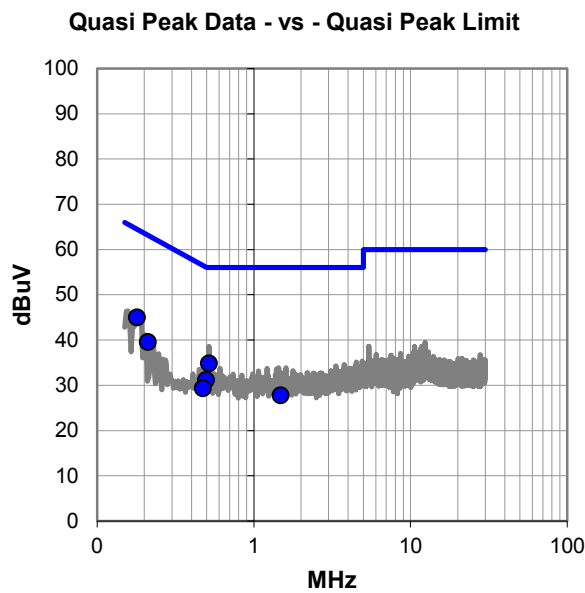

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #2

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.179 | 24.5 | 20.5 | 45.0 | 64.5 | -19.5 |
| 0.519 | 14.6 | 20.2 | 34.8 | 56.0 | -21.2 |
| 0.211 | 19.2 | 20.4 | 39.6 | 63.2 | -23.6 |
| 0.496 | 10.9 | 20.2 | 31.1 | 56.1 | -24.9 |
| 0.473 | 9.1 | 20.2 | 29.3 | 56.5 | -27.1 |
| 1.487 | 7.3 | 20.5 | 27.8 | 56.0 | -28.2 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.519 | 12.5 | 20.2 | 32.7 | 46.0 | -13.3 |
| 0.496 | 8.4 | 20.2 | 28.6 | 46.1 | -17.4 |
| 0.473 | 6.8 | 20.2 | 27.0 | 46.5 | -19.4 |
| 1.487 | 5.1 | 20.5 | 25.6 | 46.0 | -20.4 |
| 0.179 | 11.3 | 20.5 | 31.8 | 54.5 | -22.7 |
| 0.211 | 3.6 | 20.4 | 24.0 | 53.2 | -29.2 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD:2014.10.14
PSA-ESCI 2014.09.10, EmiR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|-----------|------------------------|----|
| Run #: | 3 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|---|-------|-----------|------------------------|----|

COMMENTS

None


EUT OPERATING MODES

Transmitting Mid Channel 63 at Maximum Duty Cycle, 914.596882 MHz, Power Level at 10dBm.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

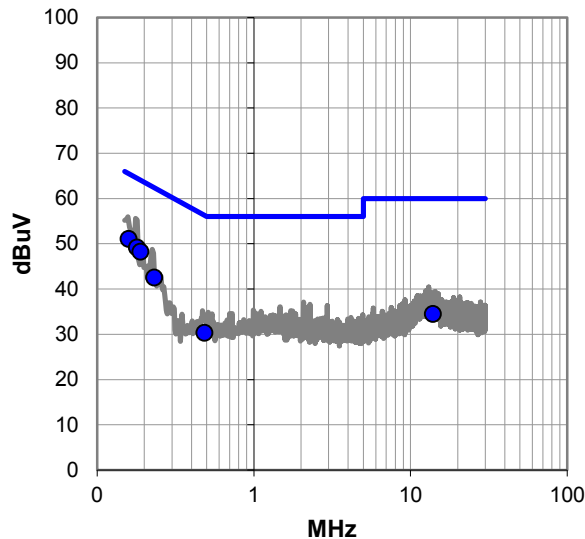

Average Data - vs - Average Limit

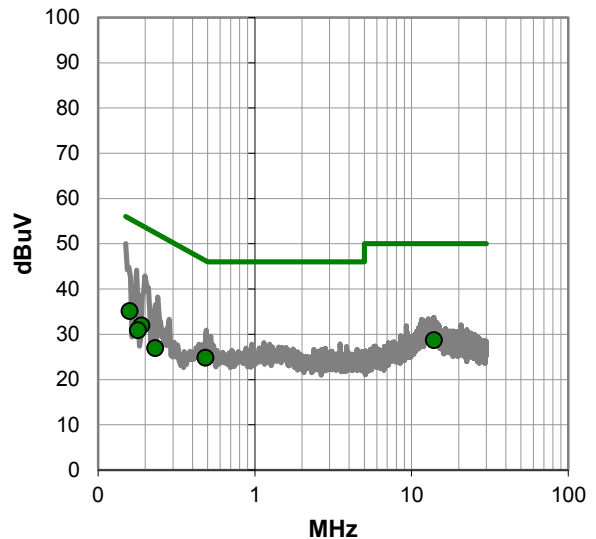

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #3

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.159 | 30.5 | 20.5 | 51.0 | 65.5 | -14.5 |
| 0.180 | 28.7 | 20.5 | 49.2 | 64.5 | -15.3 |
| 0.189 | 27.8 | 20.5 | 48.3 | 64.1 | -15.8 |
| 0.231 | 22.2 | 20.3 | 42.5 | 62.4 | -19.9 |
| 13.899 | 12.8 | 21.7 | 34.5 | 60.0 | -25.5 |
| 0.484 | 10.1 | 20.2 | 30.3 | 56.3 | -25.9 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.159 | 14.6 | 20.5 | 35.1 | 55.5 | -20.4 |
| 13.899 | 7.0 | 21.7 | 28.7 | 50.0 | -21.3 |
| 0.484 | 4.6 | 20.2 | 24.8 | 46.3 | -21.4 |
| 0.189 | 11.5 | 20.5 | 32.0 | 54.1 | -22.1 |
| 0.180 | 10.4 | 20.5 | 30.9 | 54.5 | -23.6 |
| 0.231 | 6.6 | 20.3 | 26.9 | 52.4 | -25.5 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD:2014.10.14
PSA-ESCI 2014.09.10, EmiR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|---------|------------------------|----|
| Run #: | 4 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|---|-------|---------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting Mid Channel 63 at Maximum Duty Cycle, 914.596882 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

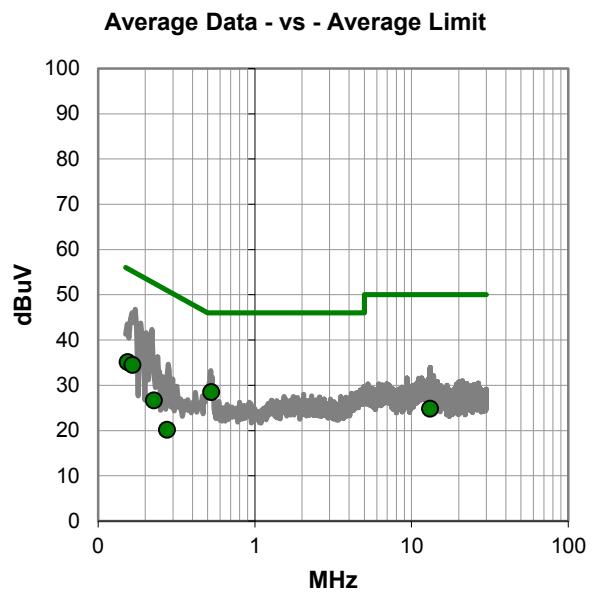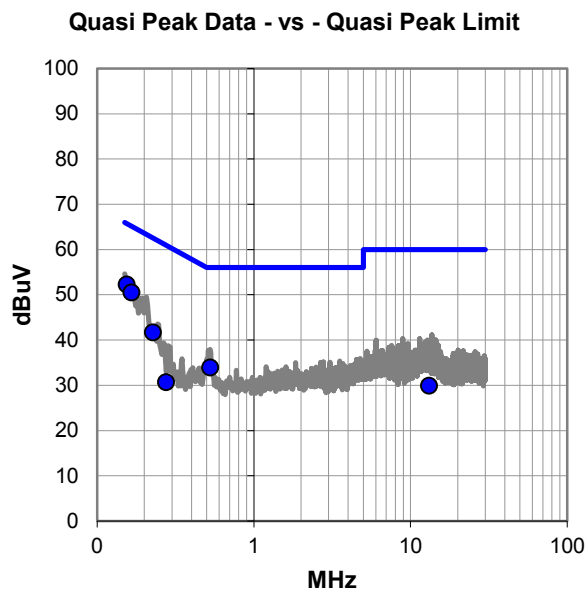

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #4

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.155 | 31.7 | 20.5 | 52.2 | 65.7 | -13.5 |
| 0.166 | 30.0 | 20.5 | 50.5 | 65.1 | -14.7 |
| 0.227 | 21.3 | 20.3 | 41.6 | 62.6 | -20.9 |
| 0.526 | 13.6 | 20.3 | 33.9 | 56.0 | -22.1 |
| 13.178 | 8.3 | 21.6 | 29.9 | 60.0 | -30.1 |
| 0.276 | 10.3 | 20.4 | 30.7 | 60.9 | -30.3 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.526 | 8.2 | 20.3 | 28.5 | 46.0 | -17.5 |
| 0.155 | 14.6 | 20.5 | 35.1 | 55.7 | -20.6 |
| 0.166 | 14.0 | 20.5 | 34.5 | 55.1 | -20.7 |
| 13.178 | 3.2 | 21.6 | 24.8 | 50.0 | -25.2 |
| 0.227 | 6.3 | 20.3 | 26.6 | 52.6 | -25.9 |
| 0.276 | -0.2 | 20.4 | 20.2 | 50.9 | -30.8 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|-----------|------------------------|----|
| Run #: | 5 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|---|-------|-----------|------------------------|----|

COMMENTS

None


EUT OPERATING MODES

Transmitting High Channel 126 at Maximum Duty Cycle, 927.193795 MHz, Power Level at 10dBm.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

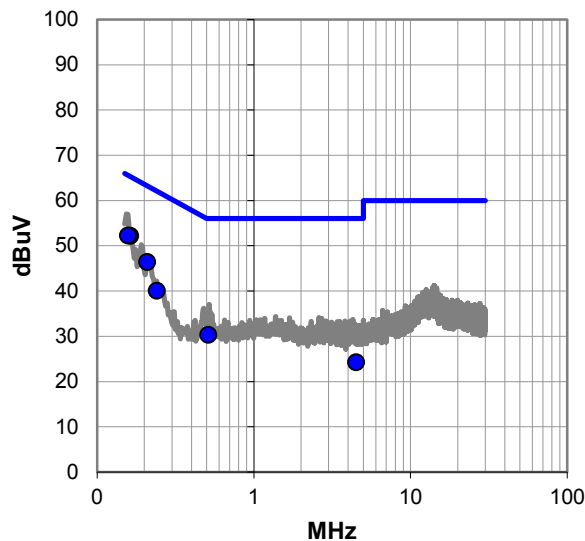

Average Data - vs - Average Limit

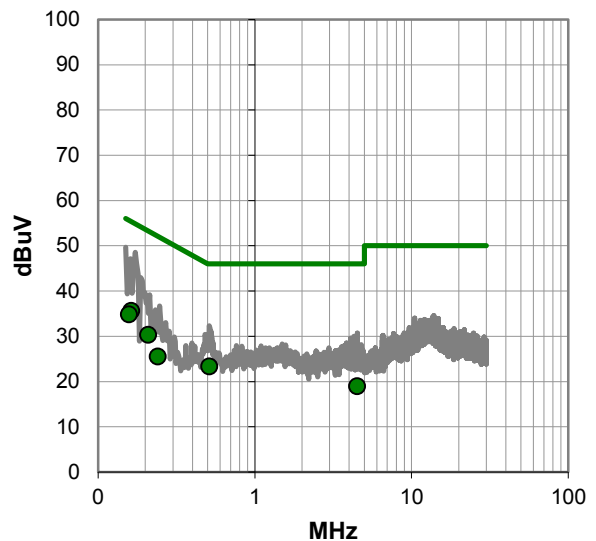

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #5

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.163 | 31.7 | 20.5 | 52.2 | 65.3 | -13.1 |
| 0.158 | 31.7 | 20.5 | 52.2 | 65.6 | -13.4 |
| 0.209 | 26.0 | 20.4 | 46.4 | 63.3 | -16.9 |
| 0.240 | 19.7 | 20.3 | 40.0 | 62.1 | -22.1 |
| 0.513 | 10.1 | 20.2 | 30.3 | 56.0 | -25.7 |
| 4.499 | 3.5 | 20.7 | 24.2 | 56.0 | -31.8 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.163 | 15.1 | 20.5 | 35.6 | 55.3 | -19.7 |
| 0.158 | 14.3 | 20.5 | 34.8 | 55.6 | -20.8 |
| 0.513 | 3.1 | 20.2 | 23.3 | 46.0 | -22.7 |
| 0.209 | 9.9 | 20.4 | 30.3 | 53.3 | -23.0 |
| 0.240 | 5.2 | 20.3 | 25.5 | 52.1 | -26.6 |
| 4.499 | -1.8 | 20.7 | 18.9 | 46.0 | -27.1 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD: 2014.10.14
PSA-ESCI 2014.09.10, EmIR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-2 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|---------|------------------------|----|
| Run #: | 6 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|---|-------|---------|------------------------|----|

COMMENTS

None


EUT OPERATING MODES

Transmitting High Channel 126 at Maximum Duty Cycle, 927.193795 MHz, Power Level at 10dBm.


DEVIATIONS FROM TEST STANDARD

None

Quasi Peak Data - vs - Quasi Peak Limit

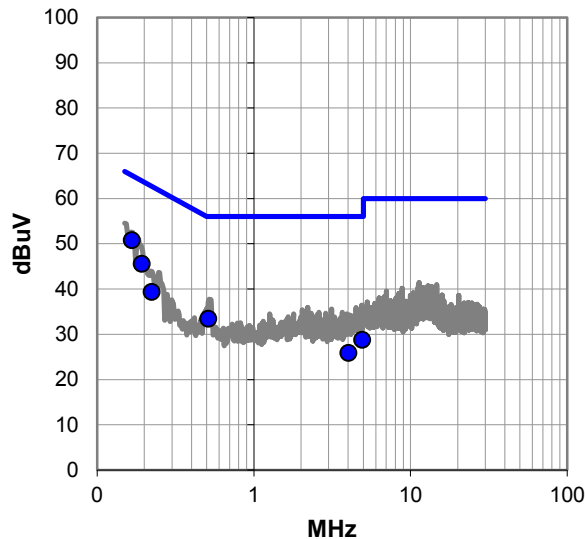

Average Data - vs - Average Limit

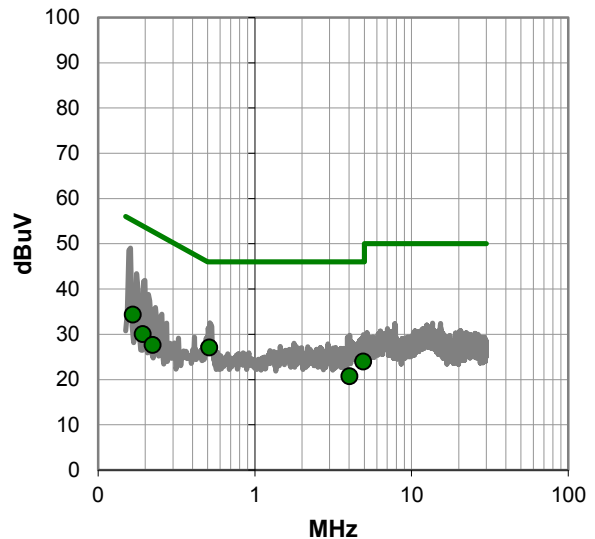

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #6

Quasi Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.166 | 30.3 | 20.5 | 50.8 | 65.1 | -14.3 |
| 0.193 | 25.1 | 20.4 | 45.5 | 63.9 | -18.4 |
| 0.512 | 13.2 | 20.2 | 33.4 | 56.0 | -22.6 |
| 0.223 | 19.0 | 20.3 | 39.3 | 62.7 | -23.3 |
| 4.933 | 8.0 | 20.7 | 28.7 | 56.0 | -27.3 |
| 4.027 | 5.2 | 20.7 | 25.9 | 56.0 | -30.1 |

Average Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.512 | 6.8 | 20.2 | 27.0 | 46.0 | -19.0 |
| 0.166 | 13.8 | 20.5 | 34.3 | 55.1 | -20.8 |
| 4.933 | 3.2 | 20.7 | 23.9 | 46.0 | -22.1 |
| 0.193 | 9.6 | 20.4 | 30.0 | 53.9 | -23.9 |
| 0.223 | 7.3 | 20.3 | 27.6 | 52.7 | -25.0 |
| 4.027 | 0.0 | 20.7 | 20.7 | 46.0 | -25.3 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD: 2014.10.14
PSA-ESCI 2014.09.10, EmiR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|-----------|------------------------|----|
| Run #: | 7 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|---|-------|-----------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting Low Channel 2 at Maximum Duty Cycle, 902.399871 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

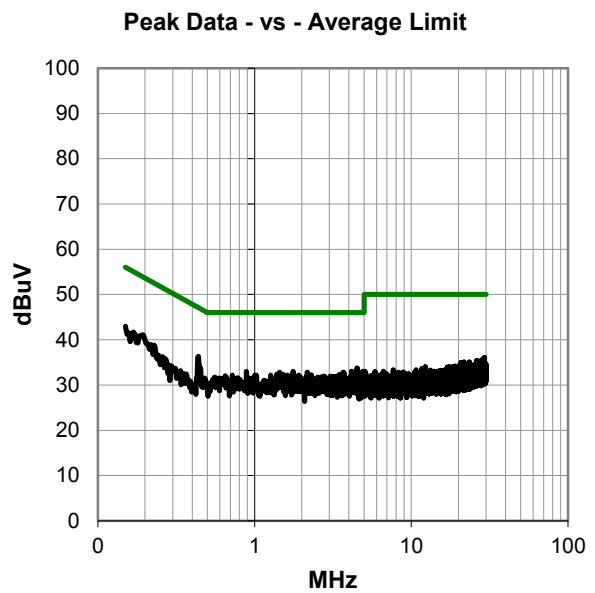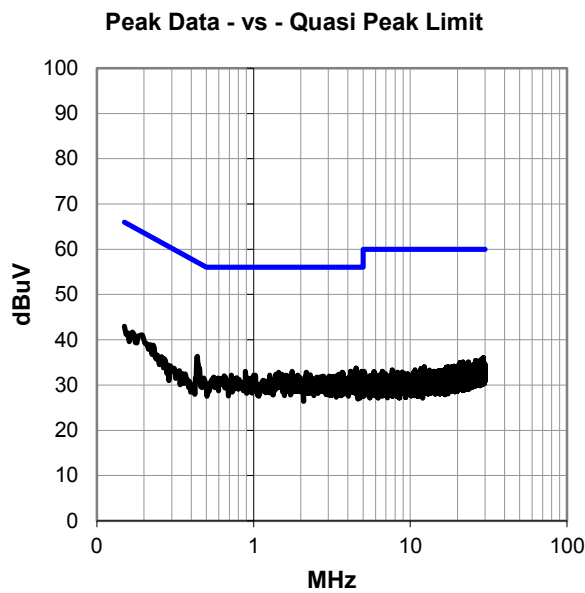

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #7

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 16.1 | 20.2 | 36.3 | 57.1 | -20.8 |
| 4.519 | 13.0 | 20.7 | 33.7 | 56.0 | -22.3 |
| 0.889 | 12.6 | 20.4 | 33.0 | 56.0 | -23.0 |
| 4.907 | 12.3 | 20.7 | 33.0 | 56.0 | -23.0 |
| 1.765 | 12.5 | 20.5 | 33.0 | 56.0 | -23.0 |
| 4.172 | 12.3 | 20.7 | 33.0 | 56.0 | -23.0 |
| 0.150 | 22.4 | 20.6 | 43.0 | 66.0 | -23.1 |
| 2.172 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 3.691 | 12.1 | 20.7 | 32.8 | 56.0 | -23.2 |
| 1.445 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 4.858 | 12.0 | 20.7 | 32.7 | 56.0 | -23.3 |
| 4.198 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 3.746 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 3.638 | 11.7 | 20.7 | 32.4 | 56.0 | -23.6 |
| 3.560 | 11.7 | 20.7 | 32.4 | 56.0 | -23.6 |
| 3.508 | 11.7 | 20.7 | 32.4 | 56.0 | -23.6 |
| 2.303 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 2.213 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 4.679 | 11.5 | 20.7 | 32.2 | 56.0 | -23.8 |
| 1.911 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 1.612 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 1.266 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 0.721 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 1.027 | 11.7 | 20.4 | 32.1 | 56.0 | -23.9 |
| 1.004 | 11.7 | 20.4 | 32.1 | 56.0 | -23.9 |
| 4.134 | 11.4 | 20.7 | 32.1 | 56.0 | -23.9 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 16.1 | 20.2 | 36.3 | 47.1 | -10.8 |
| 4.519 | 13.0 | 20.7 | 33.7 | 46.0 | -12.3 |
| 0.889 | 12.6 | 20.4 | 33.0 | 46.0 | -13.0 |
| 4.907 | 12.3 | 20.7 | 33.0 | 46.0 | -13.0 |
| 1.765 | 12.5 | 20.5 | 33.0 | 46.0 | -13.0 |
| 4.172 | 12.3 | 20.7 | 33.0 | 46.0 | -13.0 |
| 0.150 | 22.4 | 20.6 | 43.0 | 56.0 | -13.1 |
| 2.172 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 3.691 | 12.1 | 20.7 | 32.8 | 46.0 | -13.2 |
| 1.445 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 4.858 | 12.0 | 20.7 | 32.7 | 46.0 | -13.3 |
| 4.198 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 3.746 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 3.638 | 11.7 | 20.7 | 32.4 | 46.0 | -13.6 |
| 3.560 | 11.7 | 20.7 | 32.4 | 46.0 | -13.6 |
| 3.508 | 11.7 | 20.7 | 32.4 | 46.0 | -13.6 |
| 2.303 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 2.213 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 4.679 | 11.5 | 20.7 | 32.2 | 46.0 | -13.8 |
| 1.911 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 1.612 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 1.266 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 0.721 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 1.027 | 11.7 | 20.4 | 32.1 | 46.0 | -13.9 |
| 1.004 | 11.7 | 20.4 | 32.1 | 46.0 | -13.9 |
| 4.134 | 11.4 | 20.7 | 32.1 | 46.0 | -13.9 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|---------|------------------------|----|
| Run #: | 8 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|---|-------|---------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting Low Channel 2 at Maximum Duty Cycle, 902.399871 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

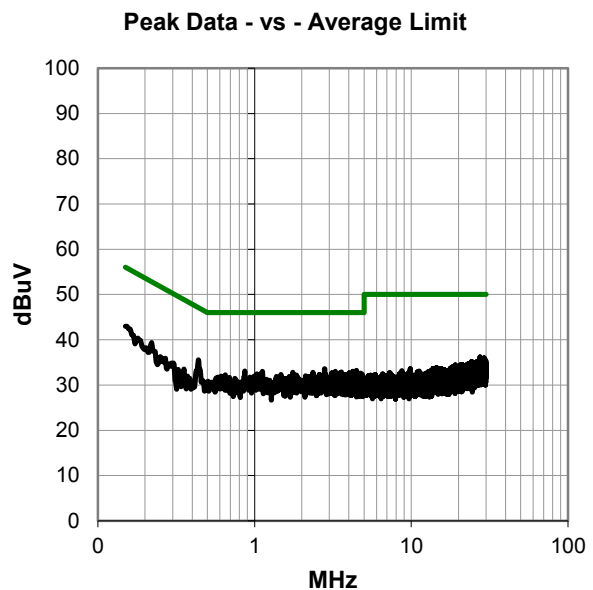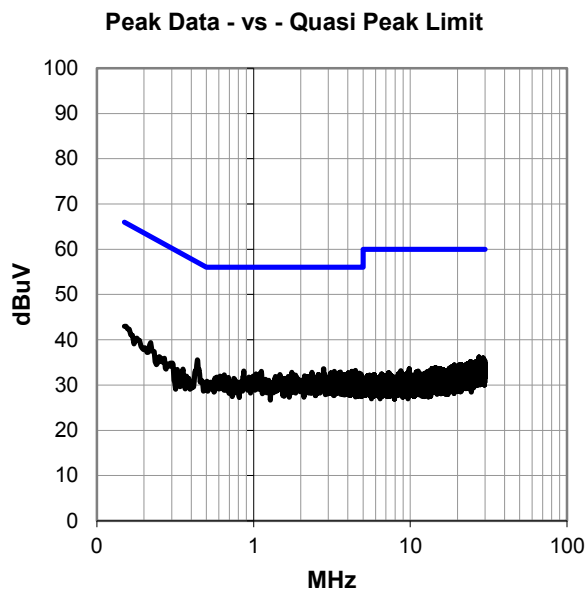

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #8

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 15.3 | 20.2 | 35.5 | 57.1 | -21.6 |
| 2.803 | 13.0 | 20.6 | 33.6 | 56.0 | -22.4 |
| 4.463 | 12.5 | 20.7 | 33.2 | 56.0 | -22.8 |
| 0.866 | 12.7 | 20.4 | 33.1 | 56.0 | -22.9 |
| 1.124 | 12.6 | 20.5 | 33.1 | 56.0 | -23.0 |
| 4.243 | 12.3 | 20.7 | 33.0 | 56.0 | -23.0 |
| 3.284 | 12.4 | 20.6 | 33.0 | 56.0 | -23.0 |
| 0.150 | 22.4 | 20.6 | 43.0 | 66.0 | -23.1 |
| 3.590 | 12.2 | 20.7 | 32.9 | 56.0 | -23.1 |
| 2.362 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 1.751 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 3.538 | 12.1 | 20.7 | 32.8 | 56.0 | -23.2 |
| 4.019 | 12.0 | 20.7 | 32.7 | 56.0 | -23.3 |
| 3.112 | 12.1 | 20.6 | 32.7 | 56.0 | -23.3 |
| 4.724 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 1.098 | 12.1 | 20.5 | 32.6 | 56.0 | -23.5 |
| 3.478 | 11.9 | 20.6 | 32.5 | 56.0 | -23.5 |
| 2.832 | 11.9 | 20.6 | 32.5 | 56.0 | -23.5 |
| 1.038 | 12.0 | 20.4 | 32.4 | 56.0 | -23.6 |
| 4.855 | 11.7 | 20.7 | 32.4 | 56.0 | -23.6 |
| 4.493 | 11.7 | 20.7 | 32.4 | 56.0 | -23.6 |
| 2.594 | 11.8 | 20.5 | 32.3 | 56.0 | -23.7 |
| 3.847 | 11.6 | 20.7 | 32.3 | 56.0 | -23.7 |
| 3.750 | 11.6 | 20.7 | 32.3 | 56.0 | -23.7 |
| 1.474 | 11.8 | 20.5 | 32.3 | 56.0 | -23.7 |
| 3.075 | 11.7 | 20.6 | 32.3 | 56.0 | -23.7 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 15.3 | 20.2 | 35.5 | 47.1 | -11.6 |
| 2.803 | 13.0 | 20.6 | 33.6 | 46.0 | -12.4 |
| 4.463 | 12.5 | 20.7 | 33.2 | 46.0 | -12.8 |
| 0.866 | 12.7 | 20.4 | 33.1 | 46.0 | -12.9 |
| 1.124 | 12.6 | 20.5 | 33.1 | 46.0 | -13.0 |
| 4.243 | 12.3 | 20.7 | 33.0 | 46.0 | -13.0 |
| 3.284 | 12.4 | 20.6 | 33.0 | 46.0 | -13.0 |
| 0.150 | 22.4 | 20.6 | 43.0 | 56.0 | -13.1 |
| 3.590 | 12.2 | 20.7 | 32.9 | 46.0 | -13.1 |
| 2.362 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 1.751 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 3.538 | 12.1 | 20.7 | 32.8 | 46.0 | -13.2 |
| 4.019 | 12.0 | 20.7 | 32.7 | 46.0 | -13.3 |
| 3.112 | 12.1 | 20.6 | 32.7 | 46.0 | -13.3 |
| 4.724 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 1.098 | 12.1 | 20.5 | 32.6 | 46.0 | -13.5 |
| 3.478 | 11.9 | 20.6 | 32.5 | 46.0 | -13.5 |
| 2.832 | 11.9 | 20.6 | 32.5 | 46.0 | -13.5 |
| 1.038 | 12.0 | 20.4 | 32.4 | 46.0 | -13.6 |
| 4.855 | 11.7 | 20.7 | 32.4 | 46.0 | -13.6 |
| 4.493 | 11.7 | 20.7 | 32.4 | 46.0 | -13.6 |
| 2.594 | 11.8 | 20.5 | 32.3 | 46.0 | -13.7 |
| 3.847 | 11.6 | 20.7 | 32.3 | 46.0 | -13.7 |
| 3.750 | 11.6 | 20.7 | 32.3 | 46.0 | -13.7 |
| 1.474 | 11.8 | 20.5 | 32.3 | 46.0 | -13.7 |
| 3.075 | 11.7 | 20.6 | 32.3 | 46.0 | -13.7 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|---|-------|-----------|------------------------|----|
| Run #: | 9 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|---|-------|-----------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting Mid Channel 63 at Maximum Duty Cycle, 914.596882 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

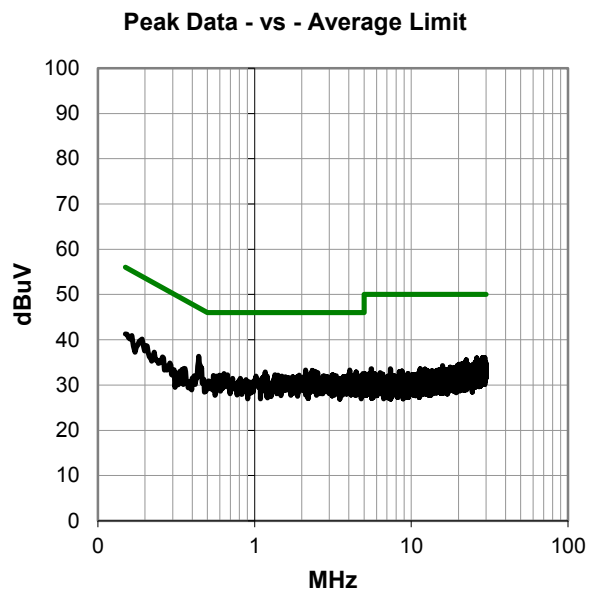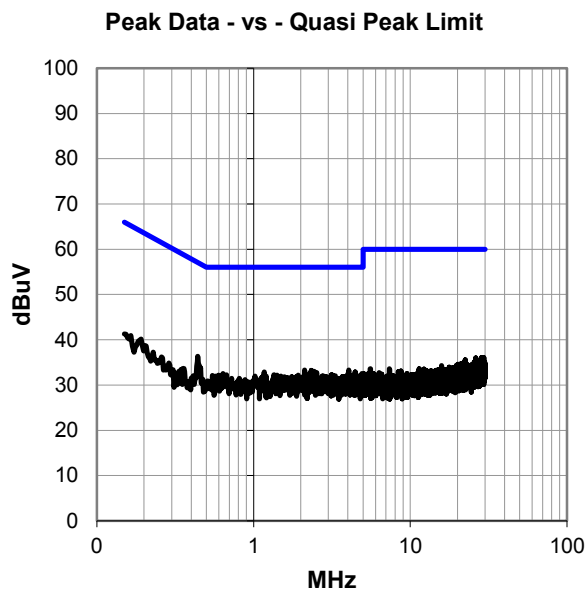

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #9

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.441 | 16.1 | 20.2 | 36.3 | 57.0 | -20.7 |
| 2.120 | 12.8 | 20.5 | 33.3 | 56.0 | -22.7 |
| 4.045 | 12.6 | 20.7 | 33.3 | 56.0 | -22.7 |
| 2.336 | 12.7 | 20.5 | 33.2 | 56.0 | -22.8 |
| 2.433 | 12.5 | 20.5 | 33.0 | 56.0 | -23.0 |
| 4.452 | 12.2 | 20.7 | 32.9 | 56.0 | -23.1 |
| 1.169 | 12.4 | 20.5 | 32.9 | 56.0 | -23.1 |
| 2.527 | 12.2 | 20.5 | 32.7 | 56.0 | -23.3 |
| 2.284 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 4.023 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 0.639 | 12.1 | 20.5 | 32.6 | 56.0 | -23.5 |
| 4.903 | 11.8 | 20.7 | 32.5 | 56.0 | -23.5 |
| 1.351 | 11.8 | 20.5 | 32.3 | 56.0 | -23.7 |
| 3.142 | 11.7 | 20.6 | 32.3 | 56.0 | -23.7 |
| 4.526 | 11.5 | 20.7 | 32.2 | 56.0 | -23.8 |
| 1.930 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 1.411 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 3.209 | 11.6 | 20.6 | 32.2 | 56.0 | -23.8 |
| 0.598 | 11.7 | 20.5 | 32.2 | 56.0 | -23.9 |
| 0.545 | 11.7 | 20.4 | 32.1 | 56.0 | -23.9 |
| 4.217 | 11.4 | 20.7 | 32.1 | 56.0 | -23.9 |
| 2.784 | 11.5 | 20.6 | 32.1 | 56.0 | -23.9 |
| 29.478 | 12.0 | 24.0 | 36.0 | 60.0 | -24.0 |
| 28.582 | 12.2 | 23.8 | 36.0 | 60.0 | -24.0 |
| 4.858 | 11.3 | 20.7 | 32.0 | 56.0 | -24.0 |
| 3.317 | 11.4 | 20.6 | 32.0 | 56.0 | -24.0 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.441 | 16.1 | 20.2 | 36.3 | 47.0 | -10.7 |
| 2.120 | 12.8 | 20.5 | 33.3 | 46.0 | -12.7 |
| 4.045 | 12.6 | 20.7 | 33.3 | 46.0 | -12.7 |
| 2.336 | 12.7 | 20.5 | 33.2 | 46.0 | -12.8 |
| 2.433 | 12.5 | 20.5 | 33.0 | 46.0 | -13.0 |
| 4.452 | 12.2 | 20.7 | 32.9 | 46.0 | -13.1 |
| 1.169 | 12.4 | 20.5 | 32.9 | 46.0 | -13.1 |
| 2.527 | 12.2 | 20.5 | 32.7 | 46.0 | -13.3 |
| 2.284 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 4.023 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 0.639 | 12.1 | 20.5 | 32.6 | 46.0 | -13.5 |
| 4.903 | 11.8 | 20.7 | 32.5 | 46.0 | -13.5 |
| 1.351 | 11.8 | 20.5 | 32.3 | 46.0 | -13.7 |
| 3.142 | 11.7 | 20.6 | 32.3 | 46.0 | -13.7 |
| 4.526 | 11.5 | 20.7 | 32.2 | 46.0 | -13.8 |
| 1.930 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 1.411 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 3.209 | 11.6 | 20.6 | 32.2 | 46.0 | -13.8 |
| 0.598 | 11.7 | 20.5 | 32.2 | 46.0 | -13.9 |
| 0.545 | 11.7 | 20.4 | 32.1 | 46.0 | -13.9 |
| 4.217 | 11.4 | 20.7 | 32.1 | 46.0 | -13.9 |
| 2.784 | 11.5 | 20.6 | 32.1 | 46.0 | -13.9 |
| 29.478 | 12.0 | 24.0 | 36.0 | 50.0 | -14.0 |
| 28.582 | 12.2 | 23.8 | 36.0 | 50.0 | -14.0 |
| 4.858 | 11.3 | 20.7 | 32.0 | 46.0 | -14.0 |
| 3.317 | 11.4 | 20.6 | 32.0 | 46.0 | -14.0 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD: 2014.10.14
PSA-ESCI 2014.09.10, EmIR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|----|-------|---------|------------------------|----|
| Run #: | 10 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|----|-------|---------|------------------------|----|

COMMENTS

None


EUT OPERATING MODES

Transmitting Mid Channel 63 at Maximum Duty Cycle, 914.596882 MHz, Power Level at 10dBm.


DEVIATIONS FROM TEST STANDARD

None

Peak Data - vs - Quasi Peak Limit

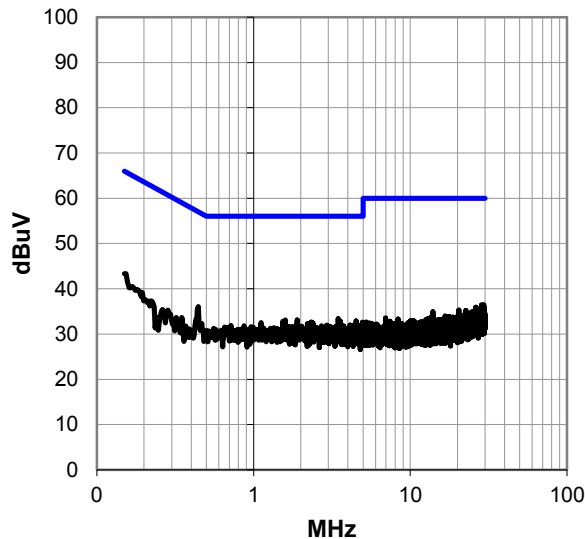

Peak Data - vs - Average Limit

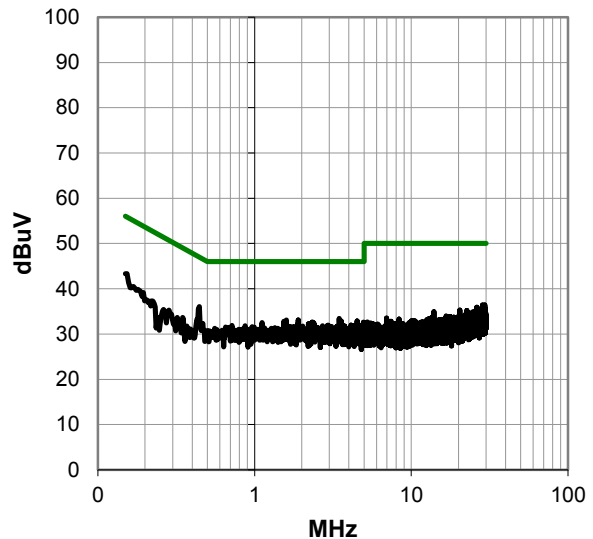

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #10

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.445 | 15.8 | 20.2 | 36.0 | 57.0 | -20.9 |
| 3.474 | 12.8 | 20.6 | 33.4 | 56.0 | -22.6 |
| 0.150 | 22.8 | 20.6 | 43.4 | 66.0 | -22.7 |
| 1.900 | 12.6 | 20.5 | 33.1 | 56.0 | -22.9 |
| 1.594 | 12.6 | 20.5 | 33.1 | 56.0 | -22.9 |
| 4.515 | 12.2 | 20.7 | 32.9 | 56.0 | -23.1 |
| 3.567 | 12.2 | 20.7 | 32.9 | 56.0 | -23.1 |
| 1.538 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 2.340 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 4.966 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 1.116 | 12.1 | 20.5 | 32.6 | 56.0 | -23.5 |
| 2.396 | 11.9 | 20.5 | 32.4 | 56.0 | -23.6 |
| 29.463 | 12.4 | 24.0 | 36.4 | 60.0 | -23.6 |
| 28.500 | 12.6 | 23.8 | 36.4 | 60.0 | -23.6 |
| 2.209 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 4.881 | 11.4 | 20.7 | 32.1 | 56.0 | -23.9 |
| 28.381 | 12.3 | 23.8 | 36.1 | 60.0 | -23.9 |
| 4.127 | 11.3 | 20.7 | 32.0 | 56.0 | -24.0 |
| 2.937 | 11.4 | 20.6 | 32.0 | 56.0 | -24.0 |
| 4.847 | 11.2 | 20.7 | 31.9 | 56.0 | -24.1 |
| 4.601 | 11.2 | 20.7 | 31.9 | 56.0 | -24.1 |
| 4.317 | 11.2 | 20.7 | 31.9 | 56.0 | -24.1 |
| 26.195 | 12.5 | 23.4 | 35.9 | 60.0 | -24.1 |
| 3.661 | 11.2 | 20.7 | 31.9 | 56.0 | -24.1 |
| 0.717 | 11.4 | 20.5 | 31.9 | 56.0 | -24.1 |
| 2.713 | 11.3 | 20.6 | 31.9 | 56.0 | -24.2 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.445 | 15.8 | 20.2 | 36.0 | 47.0 | -10.9 |
| 3.474 | 12.8 | 20.6 | 33.4 | 46.0 | -12.6 |
| 0.150 | 22.8 | 20.6 | 43.4 | 56.0 | -12.7 |
| 1.900 | 12.6 | 20.5 | 33.1 | 46.0 | -12.9 |
| 1.594 | 12.6 | 20.5 | 33.1 | 46.0 | -12.9 |
| 4.515 | 12.2 | 20.7 | 32.9 | 46.0 | -13.1 |
| 3.567 | 12.2 | 20.7 | 32.9 | 46.0 | -13.1 |
| 1.538 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 2.340 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 4.966 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 1.116 | 12.1 | 20.5 | 32.6 | 46.0 | -13.5 |
| 2.396 | 11.9 | 20.5 | 32.4 | 46.0 | -13.6 |
| 29.463 | 12.4 | 24.0 | 36.4 | 50.0 | -13.6 |
| 28.500 | 12.6 | 23.8 | 36.4 | 50.0 | -13.6 |
| 2.209 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 4.881 | 11.4 | 20.7 | 32.1 | 46.0 | -13.9 |
| 28.381 | 12.3 | 23.8 | 36.1 | 50.0 | -13.9 |
| 4.127 | 11.3 | 20.7 | 32.0 | 46.0 | -14.0 |
| 2.937 | 11.4 | 20.6 | 32.0 | 46.0 | -14.0 |
| 4.847 | 11.2 | 20.7 | 31.9 | 46.0 | -14.1 |
| 4.601 | 11.2 | 20.7 | 31.9 | 46.0 | -14.1 |
| 4.317 | 11.2 | 20.7 | 31.9 | 46.0 | -14.1 |
| 26.195 | 12.5 | 23.4 | 35.9 | 50.0 | -14.1 |
| 3.661 | 11.2 | 20.7 | 31.9 | 46.0 | -14.1 |
| 0.717 | 11.4 | 20.5 | 31.9 | 46.0 | -14.1 |
| 2.713 | 11.3 | 20.6 | 31.9 | 46.0 | -14.2 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS



WTD:2014.10.14
PSA-ESCI 2014.09.10, EmiR5 2014.11.10

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|----|-------|-----------|------------------------|----|
| Run #: | 11 | Line: | High Line | Ext. Attenuation (dB): | 20 |
|--------|----|-------|-----------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting High Channel 126 at Maximum Duty Cycle, 927.193795 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

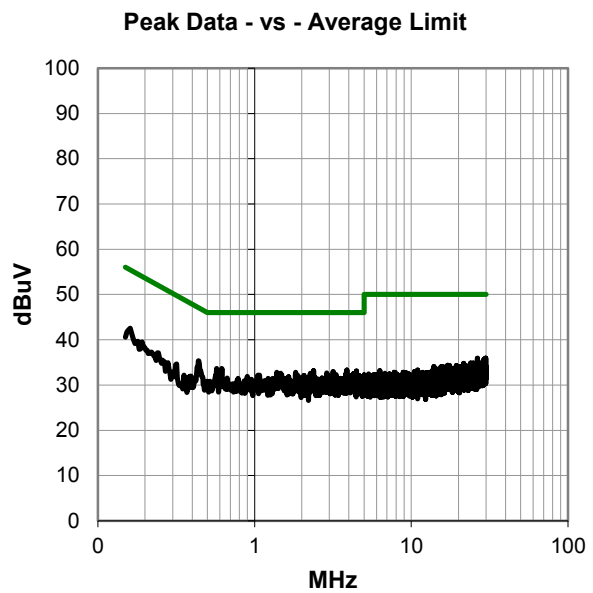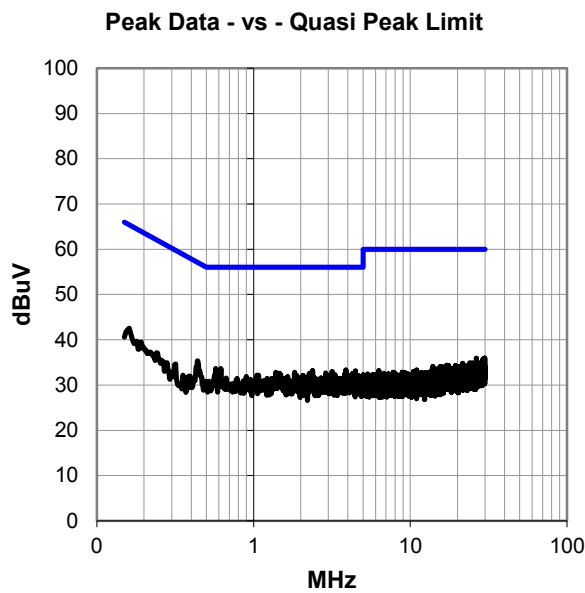

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #11

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 15.1 | 20.2 | 35.3 | 57.1 | -21.8 |
| 0.572 | 13.2 | 20.5 | 33.7 | 56.0 | -22.3 |
| 0.616 | 13.2 | 20.5 | 33.7 | 56.0 | -22.4 |
| 3.885 | 12.6 | 20.7 | 33.3 | 56.0 | -22.7 |
| 2.381 | 12.6 | 20.5 | 33.1 | 56.0 | -22.9 |
| 0.161 | 22.0 | 20.5 | 42.5 | 65.4 | -22.9 |
| 4.478 | 12.4 | 20.7 | 33.1 | 56.0 | -22.9 |
| 3.172 | 12.4 | 20.6 | 33.0 | 56.0 | -23.0 |
| 1.829 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 1.389 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 2.892 | 12.1 | 20.6 | 32.7 | 56.0 | -23.3 |
| 2.269 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 3.836 | 11.9 | 20.7 | 32.6 | 56.0 | -23.4 |
| 1.467 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 4.284 | 11.8 | 20.7 | 32.5 | 56.0 | -23.5 |
| 4.373 | 11.6 | 20.7 | 32.3 | 56.0 | -23.7 |
| 3.314 | 11.7 | 20.6 | 32.3 | 56.0 | -23.7 |
| 1.885 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 3.911 | 11.5 | 20.7 | 32.2 | 56.0 | -23.8 |
| 1.049 | 11.7 | 20.5 | 32.2 | 56.0 | -23.9 |
| 1.075 | 11.7 | 20.5 | 32.2 | 56.0 | -23.9 |
| 2.068 | 11.6 | 20.5 | 32.1 | 56.0 | -23.9 |
| 4.646 | 11.4 | 20.7 | 32.1 | 56.0 | -23.9 |
| 4.041 | 11.4 | 20.7 | 32.1 | 56.0 | -23.9 |
| 2.959 | 11.5 | 20.6 | 32.1 | 56.0 | -23.9 |
| 4.161 | 11.3 | 20.7 | 32.0 | 56.0 | -24.0 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.437 | 15.1 | 20.2 | 35.3 | 47.1 | -11.8 |
| 0.572 | 13.2 | 20.5 | 33.7 | 46.0 | -12.3 |
| 0.616 | 13.2 | 20.5 | 33.7 | 46.0 | -12.4 |
| 3.885 | 12.6 | 20.7 | 33.3 | 46.0 | -12.7 |
| 2.381 | 12.6 | 20.5 | 33.1 | 46.0 | -12.9 |
| 0.161 | 22.0 | 20.5 | 42.5 | 55.4 | -12.9 |
| 4.478 | 12.4 | 20.7 | 33.1 | 46.0 | -12.9 |
| 3.172 | 12.4 | 20.6 | 33.0 | 46.0 | -13.0 |
| 1.829 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 1.389 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 2.892 | 12.1 | 20.6 | 32.7 | 46.0 | -13.3 |
| 2.269 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 3.836 | 11.9 | 20.7 | 32.6 | 46.0 | -13.4 |
| 1.467 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 4.284 | 11.8 | 20.7 | 32.5 | 46.0 | -13.5 |
| 4.373 | 11.6 | 20.7 | 32.3 | 46.0 | -13.7 |
| 3.314 | 11.7 | 20.6 | 32.3 | 46.0 | -13.7 |
| 1.885 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 3.911 | 11.5 | 20.7 | 32.2 | 46.0 | -13.8 |
| 1.049 | 11.7 | 20.5 | 32.2 | 46.0 | -13.9 |
| 1.075 | 11.7 | 20.5 | 32.2 | 46.0 | -13.9 |
| 2.068 | 11.6 | 20.5 | 32.1 | 46.0 | -13.9 |
| 4.646 | 11.4 | 20.7 | 32.1 | 46.0 | -13.9 |
| 4.041 | 11.4 | 20.7 | 32.1 | 46.0 | -13.9 |
| 2.959 | 11.5 | 20.6 | 32.1 | 46.0 | -13.9 |
| 4.161 | 11.3 | 20.7 | 32.0 | 46.0 | -14.0 |

CONCLUSION

Pass



Tested By

AC POWERLINE CONDUCTED EMISSIONS

| | | | |
|-------------------|-------------------------|--------------------|------------|
| EUT: | Vector Mouthguard | Work Order: | I1BM0001 |
| Serial Number: | 3348 | Date: | 12/19/2014 |
| Customer: | i1 Biometrics, Inc. | Temperature: | 24°C |
| Attendees: | David Brown, Rob Phibbs | Relative Humidity: | 36% |
| Customer Project: | None | Bar. Pressure: | 1011 mb |
| Tested By: | Richard Mellroth | Job Site: | NC05 |
| Power: | 110VAC/60Hz | Configuration: | I1BM0001-3 |

TEST SPECIFICATIONS

| | |
|-----------------|------------------|
| Specification: | Method: |
| FCC 15.207:2014 | ANSI C63.10:2009 |

TEST PARAMETERS

| | | | | | |
|--------|----|-------|---------|------------------------|----|
| Run #: | 12 | Line: | Neutral | Ext. Attenuation (dB): | 20 |
|--------|----|-------|---------|------------------------|----|

COMMENTS



None

EUT OPERATING MODES

Transmitting High Channel 126 at Maximum Duty Cycle, 927.193795 MHz, Power Level at 10dBm.

DEVIATIONS FROM TEST STANDARD

None

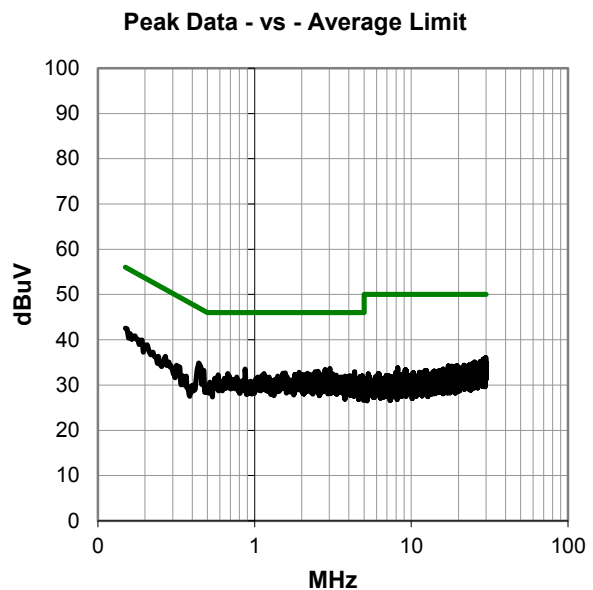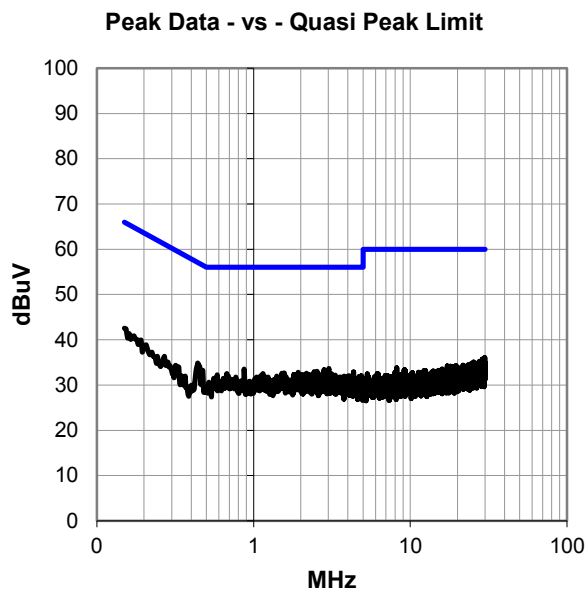

AC POWERLINE CONDUCTED EMISSIONS

RESULTS - Run #12

Peak Data - vs - Quasi Peak Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.441 | 14.6 | 20.2 | 34.8 | 57.0 | -22.2 |
| 3.023 | 13.1 | 20.6 | 33.7 | 56.0 | -22.3 |
| 0.870 | 13.1 | 20.4 | 33.5 | 56.0 | -22.5 |
| 2.818 | 12.8 | 20.6 | 33.4 | 56.0 | -22.6 |
| 2.538 | 12.5 | 20.5 | 33.0 | 56.0 | -23.0 |
| 2.441 | 12.4 | 20.5 | 32.9 | 56.0 | -23.1 |
| 4.347 | 12.2 | 20.7 | 32.9 | 56.0 | -23.1 |
| 1.930 | 12.3 | 20.5 | 32.8 | 56.0 | -23.2 |
| 0.471 | 13.0 | 20.2 | 33.2 | 56.5 | -23.3 |
| 1.568 | 12.2 | 20.5 | 32.7 | 56.0 | -23.3 |
| 2.176 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 1.515 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 0.676 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 1.146 | 12.1 | 20.5 | 32.6 | 56.0 | -23.4 |
| 0.150 | 22.0 | 20.6 | 42.6 | 66.0 | -23.5 |
| 3.153 | 11.9 | 20.6 | 32.5 | 56.0 | -23.5 |
| 2.735 | 11.9 | 20.6 | 32.5 | 56.0 | -23.6 |
| 2.056 | 11.8 | 20.5 | 32.3 | 56.0 | -23.7 |
| 1.806 | 11.8 | 20.5 | 32.3 | 56.0 | -23.7 |
| 0.587 | 11.8 | 20.5 | 32.3 | 56.0 | -23.8 |
| 2.299 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 2.250 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 1.993 | 11.7 | 20.5 | 32.2 | 56.0 | -23.8 |
| 3.332 | 11.6 | 20.6 | 32.2 | 56.0 | -23.8 |
| 2.933 | 11.6 | 20.6 | 32.2 | 56.0 | -23.8 |
| 3.220 | 11.5 | 20.6 | 32.1 | 56.0 | -23.9 |

Peak Data - vs - Average Limit

| Freq (MHz) | Amp. (dBuV) | Factor (dB) | Adjusted (dBuV) | Spec. Limit (dBuV) | Margin (dB) |
|------------|-------------|-------------|-----------------|--------------------|-------------|
| 0.441 | 14.6 | 20.2 | 34.8 | 47.0 | -12.2 |
| 3.023 | 13.1 | 20.6 | 33.7 | 46.0 | -12.3 |
| 0.870 | 13.1 | 20.4 | 33.5 | 46.0 | -12.5 |
| 2.818 | 12.8 | 20.6 | 33.4 | 46.0 | -12.6 |
| 2.538 | 12.5 | 20.5 | 33.0 | 46.0 | -13.0 |
| 2.441 | 12.4 | 20.5 | 32.9 | 46.0 | -13.1 |
| 4.347 | 12.2 | 20.7 | 32.9 | 46.0 | -13.1 |
| 1.930 | 12.3 | 20.5 | 32.8 | 46.0 | -13.2 |
| 0.471 | 13.0 | 20.2 | 33.2 | 46.5 | -13.3 |
| 1.568 | 12.2 | 20.5 | 32.7 | 46.0 | -13.3 |
| 2.176 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 1.515 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 0.676 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 1.146 | 12.1 | 20.5 | 32.6 | 46.0 | -13.4 |
| 0.150 | 22.0 | 20.6 | 42.6 | 56.0 | -13.5 |
| 3.153 | 11.9 | 20.6 | 32.5 | 46.0 | -13.5 |
| 2.735 | 11.9 | 20.6 | 32.5 | 46.0 | -13.6 |
| 2.056 | 11.8 | 20.5 | 32.3 | 46.0 | -13.7 |
| 1.806 | 11.8 | 20.5 | 32.3 | 46.0 | -13.7 |
| 0.587 | 11.8 | 20.5 | 32.3 | 46.0 | -13.8 |
| 2.299 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 2.250 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 1.993 | 11.7 | 20.5 | 32.2 | 46.0 | -13.8 |
| 3.332 | 11.6 | 20.6 | 32.2 | 46.0 | -13.8 |
| 2.933 | 11.6 | 20.6 | 32.2 | 46.0 | -13.8 |
| 3.220 | 11.5 | 20.6 | 32.1 | 46.0 | -13.9 |



CONCLUSION

Pass





Tested By

AC POWERLINE CONDUCTED EMISSIONS

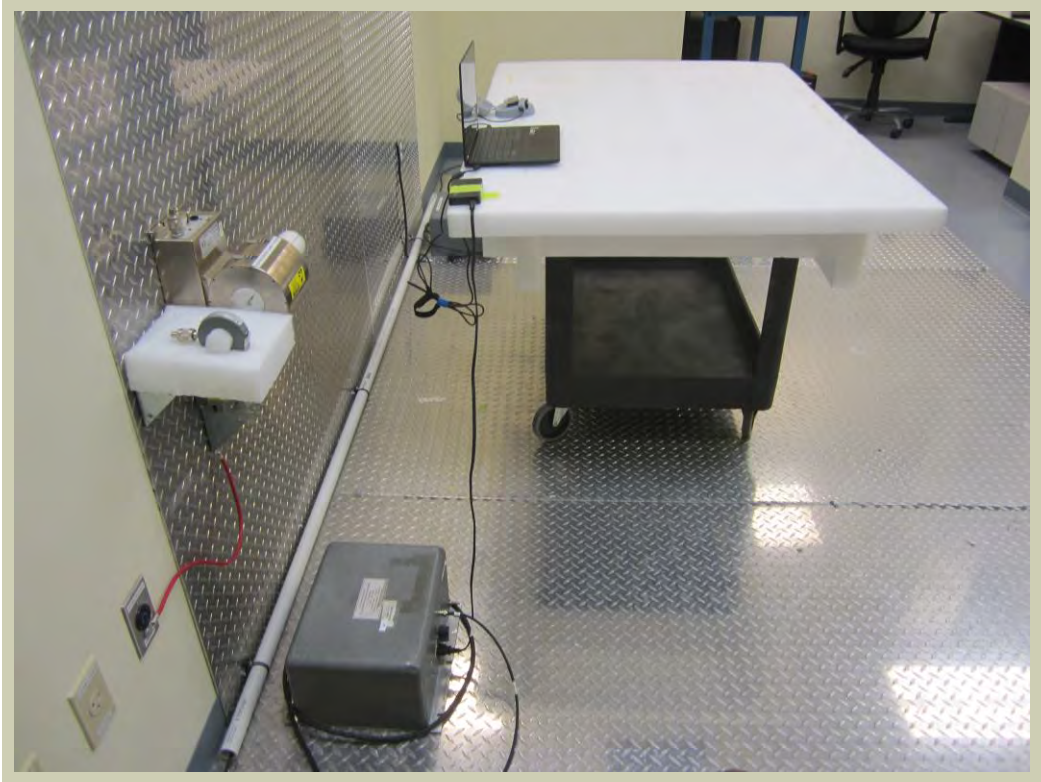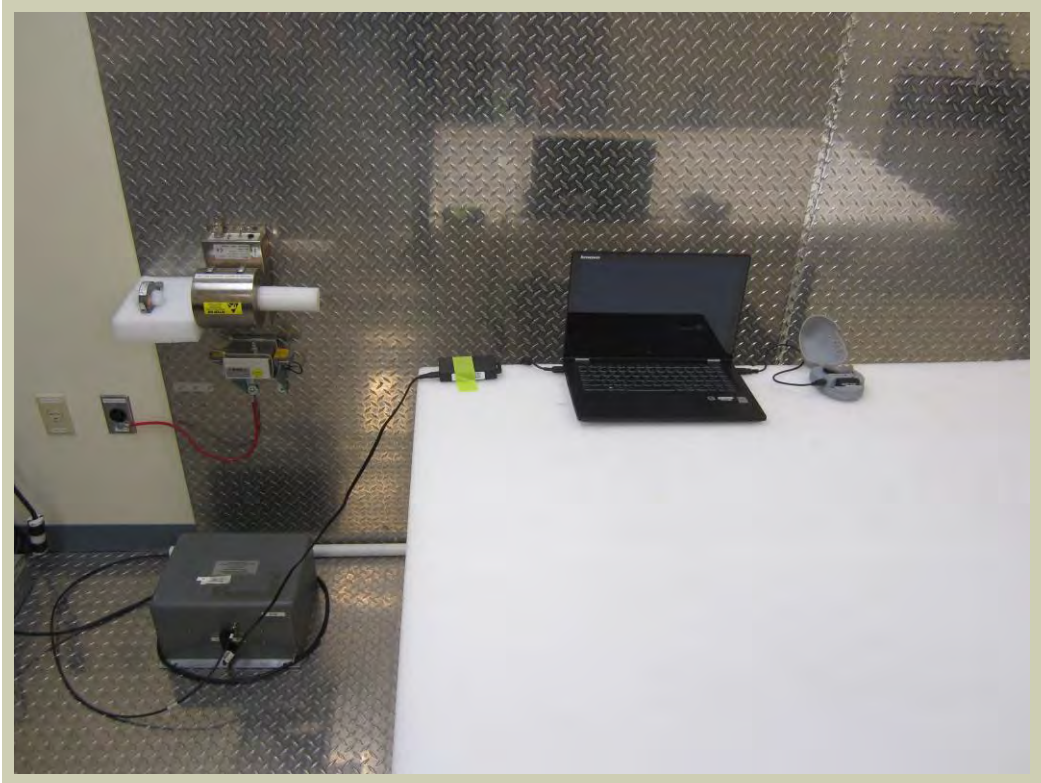

AC POWERLINE CONDUCTED EMISSIONS

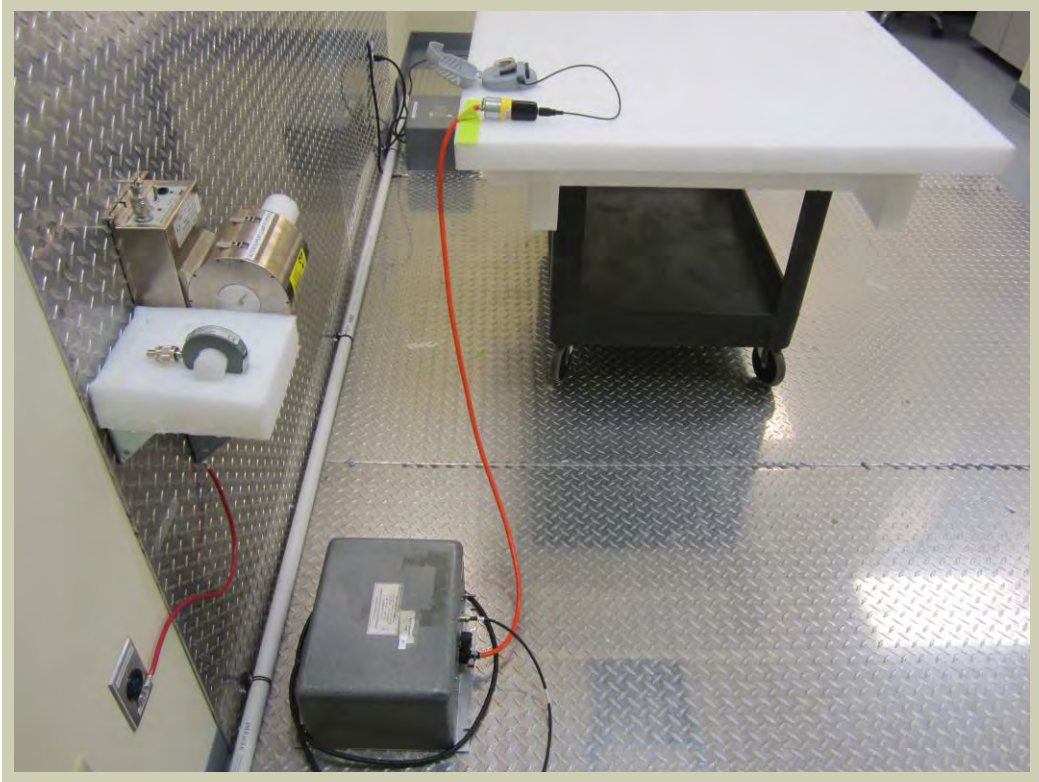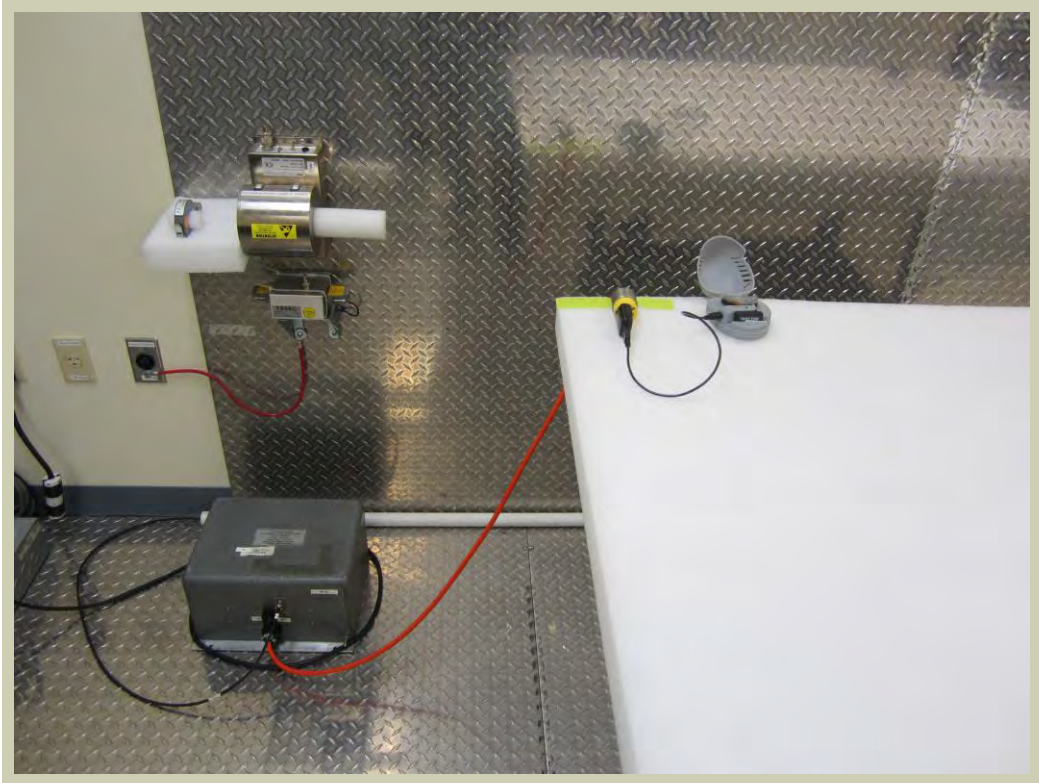

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

GFSK, 61.44 kb/s

CHANNELS TESTED

Low Channel 2, 902.399871 MHz

Mid Channel 63, 914.596882 MHz

High Channel 126, 927.193795 MHz

POWER SETTINGS INVESTIGATED

110VAC/60Hz

Battery

CONFIGURATIONS INVESTIGATED

I1BM0001 - 3

I1BM0001 - 4

FREQUENCY RANGE INVESTIGATED

Start Frequency | 30 MHz

Stop Frequency | 12400 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval |
|--------------------|--------------------|--------------------------|-----|------------|----------|
| HP Filter | Micro-Tronics | HPM50114 | HFN | 1/18/2013 | 36 mo |
| Notch Filter | K&L Microwave | 3TNF-500/1000-N/N | HHO | 7/8/2014 | 12 mo |
| Attenuator | Fairview Microwave | SA18E-20 | AQV | 10/13/2014 | 12 mo |
| Low Pass Filter | Micro-Tronics | LPM50004 | LFF | 11/14/2013 | 24 mo |
| Low Pass Filter | Micro-Tronics | LPM50003 | LFE | 12/9/2014 | 12 mo |
| Pre-Amplifier | Miteq | AMF-6F-08001200-30-10P | AOK | 10/13/2014 | 12 mo |
| Pre-Amplifier | Miteq | AMF-3D-00100800-32-13P | AVZ | 9/8/2014 | 12 mo |
| Pre-Amplifier | Miteq | AM-1616-1000 | PAB | 9/8/2014 | 12 mo |
| Antenna, Horn | EMCO | 3160-07 | AHP | NCR | 0 mo |
| Antenna, Horn | EMCO | 3115 | AHM | 6/3/2014 | 24 mo |
| Antenna, Biconilog | EMCO | 3142B | AXJ | 5/16/2012 | 36 mo |
| NC01 Cables | N/A | Standard Gain Horn Cable | NC3 | 10/13/2014 | 12 mo |
| NC01 Cables | N/A | 3115 Horn Cable | NC2 | 10/13/2014 | 12 mo |
| NC01 Cables | N/A | Bilog Cables | NC1 | 9/8/2014 | 12 mo |
| Spectrum Analyzer | Agilent | E4440A | AFE | 10/28/2014 | 12 mo |

TEST DESCRIPTION


The highest gain of each type of antenna to be used with the EUT was tested. The EUT was configured for low, mid, and high band transmit frequencies. For each configuration, the spectrum was scanned throughout the specified range. In addition, measurements were made in the restricted bands to verify compliance. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and the EUT antenna in three orthogonal axis, and adjusting measurement antenna height and polarization. A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity. For devices employing FHSS, a duty cycle correction factor (DCCF) may be applied to the peak pulse amplitude to calculate average measurements. If applied, the DCCF shall be noted on the corresponding data sheet.

SPURIOUS RADIATED EMISSIONS

| | | | | |
|-----------------|---|-------------------|-----------|-------------|
| Work Order: | I1BM0001 | Date: | 12/22/14 | <i>rust</i> |
| Project: | None | Temperature: | 24 °C | |
| Job Site: | NC01 | Humidity: | 36% RH | |
| Serial Number: | 3348 | Barometric Pres.: | 1026 mbar | |
| EUT: | Vector Mouthguard | | | |
| Configuration: | 3 | | | |
| Customer: | i1 Biometrics, Inc. | | | |
| Attendees: | David Bernhardt, Rob Phibbs | | | |
| EUT Power: | 110VAC/60Hz | | | |
| Operating Mode: | Transmitting at Maximum Duty Cycle, 61.44 kb/s, Power Level at 10dBm. See comments next to data points for EUT channel information and EUT orientation. | | | |
| Deviations: | None | | | |
| Comments: | None | | | |

| | |
|---------------------|------------------|
| Test Specifications | Test Method |
| FCC 15.247:2014 | ANSI C63.10:2009 |

| | | | | | | | |
|-------|-------|-------------------|---|-------------------|-----------|---------|------|
| Run # | 22-23 | Test Distance (m) | 3 | Antenna Height(s) | 1 to 4(m) | Results | Pass |
|-------|-------|-------------------|---|-------------------|-----------|---------|------|

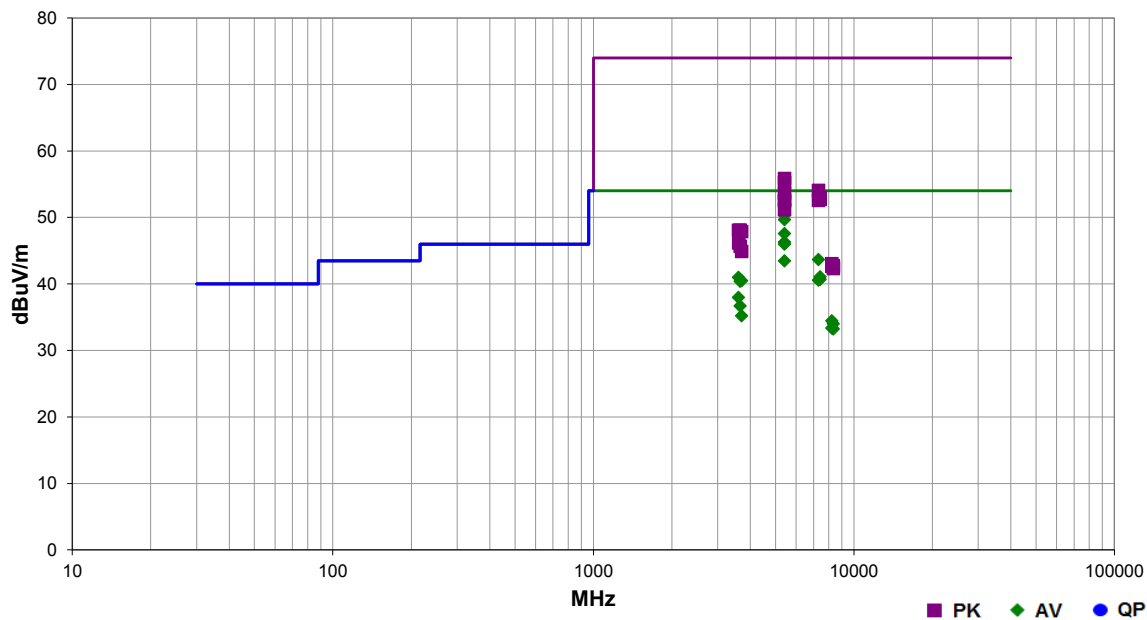


| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------------|
| 5414.410 | 41.1 | 9.3 | 1.5 | 310.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 50.4 | 54.0 | -3.6 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.420 | 40.4 | 9.3 | 1.1 | 15.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 49.7 | 54.0 | -4.3 | Low Ch 2, 902 MHz, EUT Flat |
| 5414.380 | 38.3 | 9.3 | 1.5 | 322.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 47.6 | 54.0 | -6.4 | Low Ch 2, 902 MHz, EUT Horz |
| 5414.400 | 37.0 | 9.3 | 1.5 | 327.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 46.3 | 54.0 | -7.7 | Low Ch 2, 902 MHz, EUT Horz |
| 5414.420 | 36.7 | 9.3 | 1.5 | 32.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 46.0 | 54.0 | -8.0 | Low Ch 2, 902 MHz, EUT Flat |
| 7316.755 | 30.4 | 13.3 | 2.1 | 271.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 43.7 | 54.0 | -10.3 | Mid Ch 63, 914 MHz, EUT Vert |
| 5414.430 | 34.2 | 9.3 | 1.5 | 201.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 43.5 | 54.0 | -10.5 | Low Ch 2, 902 MHz, EUT Vert |
| 7417.515 | 26.9 | 14.2 | 1.7 | 277.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 41.1 | 54.0 | -12.9 | High Ch 126, 927 MHz, EUT Horz |
| 3609.615 | 38.3 | 2.7 | 1.8 | 88.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 41.0 | 54.0 | -13.0 | Low Ch 2, 902 MHz, EUT Vert |
| 7417.485 | 26.5 | 14.2 | 1.5 | 199.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 40.7 | 54.0 | -13.3 | High Ch 126, 927 MHz, EUT Vert |
| 7316.775 | 27.3 | 13.3 | 1.5 | 54.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 40.6 | 54.0 | -13.4 | Mid Ch 63, 914 MHz, EUT Horz |
| 3708.830 | 36.8 | 3.7 | 2.1 | 274.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 40.5 | 54.0 | -13.5 | High Ch 126, 927 MHz, EUT Vert |
| 3658.440 | 37.1 | 3.3 | 2.1 | 261.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 40.4 | 54.0 | -13.6 | Mid Ch 63, 914 MHz, EUT Vert |
| 3609.635 | 35.3 | 2.7 | 1.5 | 7.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 38.0 | 54.0 | -16.0 | Low Ch 2, 902 MHz, EUT Horz |
| 3658.410 | 33.4 | 3.3 | 1.5 | 9.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 36.7 | 54.0 | -17.3 | Mid Ch 63, 914 MHz, EUT Horz |
| 5414.180 | 46.6 | 9.3 | 1.5 | 310.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 55.9 | 74.0 | -18.1 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.375 | 46.0 | 9.3 | 1.1 | 15.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 55.3 | 74.0 | -18.7 | Low Ch 2, 902 MHz, EUT Flat |
| 3708.795 | 31.5 | 3.7 | 1.3 | 19.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 35.2 | 54.0 | -18.8 | High Ch 126, 927 MHz, EUT Horz |
| 8231.425 | 39.7 | -5.3 | 1.8 | 287.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 34.4 | 54.0 | -19.6 | Mid Ch 63, 914 MHz, EUT Vert |
| 7316.730 | 40.8 | 13.3 | 2.1 | 271.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 54.1 | 74.0 | -19.9 | Mid Ch 63, 914 MHz, EUT Vert |
| 8344.730 | 39.4 | -5.4 | 1.4 | 10.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 34.0 | 54.0 | -20.0 | High Ch 126, 927 MHz, EUT Horz |
| 5414.340 | 44.4 | 9.3 | 1.5 | 322.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 53.7 | 74.0 | -20.3 | Low Ch 2, 902 MHz, EUT Horz |
| 8231.375 | 38.6 | -5.3 | 1.4 | 11.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 33.3 | 54.0 | -20.7 | Mid Ch 63, 914 MHz, EUT Horz |
| 8344.735 | 38.6 | -5.4 | 1.7 | 271.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 33.2 | 54.0 | -20.8 | High Ch 126, 927 MHz, EUT Vert |
| 7417.870 | 38.8 | 14.2 | 1.7 | 277.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 53.0 | 74.0 | -21.0 | High Ch 126, 927 MHz, EUT Horz |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/ Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|---------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------------|
| 7417.275 | 38.6 | 14.2 | 1.5 | 199.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 52.8 | 74.0 | -21.2 | High Ch 126, 927 MHz, EUT Vert |
| 5413.935 | 43.4 | 9.3 | 1.5 | 32.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 52.7 | 74.0 | -21.3 | Low Ch 2, 902 MHz, EUT Flat |
| 7317.220 | 39.3 | 13.3 | 1.5 | 54.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 52.6 | 74.0 | -21.4 | Mid Ch 63, 914 MHz, EUT Horz |
| 5414.275 | 43.2 | 9.3 | 1.5 | 327.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 52.5 | 74.0 | -21.5 | Low Ch 2, 902 MHz, EUT Horz |
| 5414.150 | 41.9 | 9.3 | 1.5 | 201.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 51.2 | 74.0 | -22.8 | Low Ch 2, 902 MHz, EUT Vert |
| 3658.580 | 44.8 | 3.3 | 2.1 | 261.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.1 | 74.0 | -25.9 | Mid Ch 63, 914 MHz, EUT Vert |
| 3609.455 | 45.4 | 2.7 | 1.8 | 88.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.1 | 74.0 | -25.9 | Low Ch 2, 902 MHz, EUT Vert |
| 3708.440 | 44.2 | 3.7 | 2.1 | 274.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 47.9 | 74.0 | -26.1 | High Ch 126, 927 MHz, EUT Vert |
| 3609.860 | 43.5 | 2.7 | 1.5 | 7.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 46.2 | 74.0 | -27.8 | Low Ch 2, 902 MHz, EUT Horz |
| 3658.160 | 42.4 | 3.3 | 1.5 | 9.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.7 | 74.0 | -28.3 | Mid Ch 63, 914 MHz, EUT Horz |
| 3708.625 | 41.2 | 3.7 | 1.3 | 19.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 44.9 | 74.0 | -29.1 | High Ch 126, 927 MHz, EUT Horz |
| 8231.800 | 48.3 | -5.3 | 1.8 | 287.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 43.0 | 74.0 | -31.0 | Mid Ch 63, 914 MHz, EUT Vert |
| 8344.950 | 48.1 | -5.4 | 1.4 | 10.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 42.7 | 74.0 | -31.3 | High Ch 126, 927 MHz, EUT Horz |
| 8231.270 | 47.9 | -5.3 | 1.4 | 11.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 42.6 | 74.0 | -31.4 | Mid Ch 63, 914 MHz, EUT Horz |
| 8345.055 | 47.7 | -5.4 | 1.7 | 271.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 42.3 | 74.0 | -31.7 | High Ch 126, 927 MHz, EUT Vert |

| | | | | |
|-----------------|---|-------------------|-----------|--------------|
| Work Order: | I1BM0001 | Date: | 12/22/14 | <i>Rustl</i> |
| Project: | None | Temperature: | 24 °C | |
| Job Site: | NC01 | Humidity: | 34% RH | |
| Serial Number: | 3348 | Barometric Pres.: | 1026 mbar | |
| EUT: | Vector Mouthguard | | | |
| Configuration: | 4 | | | |
| Customer: | i1 Biometrics, Inc. | | | |
| Attendees: | David Bernhardt, Rob Phibbs | | | |
| EUT Power: | Battery | | | |
| Operating Mode: | Transmitting at Maximum Duty Cycle, 61.44 kb/s, Power Level at 10dBm. See comments next to data points for EUT channel information and EUT orientation. | | | |
| Deviations: | None | | | |
| Comments: | None | | | |

| Test Specifications | Test Method |
|---------------------|------------------|
| FCC 15.247:2014 | ANSI C63.10:2009 |

| Run # | 41-42 | Test Distance (m) | 3 | Antenna Height(s) | 1 to 4(m) | Results | Pass |
|-------|-------|-------------------|---|-------------------|-----------|---------|------|
|-------|-------|-------------------|---|-------------------|-----------|---------|------|

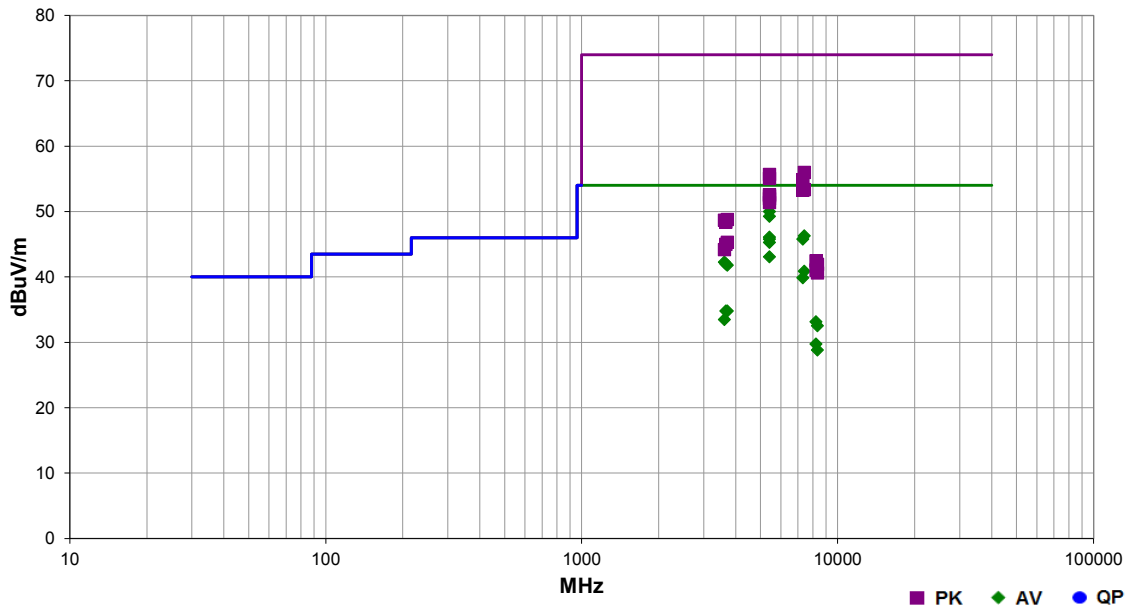

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|--------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------------|
| 5414.400 | 40.7 | 9.3 | 1.5 | 312.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 50.0 | 54.0 | -4.0 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.395 | 40.0 | 9.3 | 1.2 | 214.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 49.3 | 54.0 | -4.7 | Low Ch 2, 902 MHz, EUT Flat |
| 7417.620 | 32.1 | 14.2 | 1.7 | 14.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 46.3 | 54.0 | -7.7 | High Ch 126, 927 MHz, EUT Vert |
| 5414.455 | 36.8 | 9.3 | 1.5 | 250.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 46.1 | 54.0 | -7.9 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.420 | 36.5 | 9.3 | 2.7 | 43.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 45.8 | 54.0 | -8.2 | Low Ch 2, 902 MHz, EUT Horz |
| 7316.755 | 32.5 | 13.3 | 1.0 | 360.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 45.8 | 54.0 | -8.2 | Mid Ch 63, 914 MHz, EUT Vert |
| 5414.410 | 36.0 | 9.3 | 1.3 | 360.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 45.3 | 54.0 | -8.7 | Low Ch 2, 902 MHz, EUT Flat |
| 5414.410 | 33.8 | 9.3 | 1.5 | 342.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 43.1 | 54.0 | -10.9 | Low Ch 2, 902 MHz, EUT Horz |
| 3609.670 | 39.6 | 2.7 | 1.9 | 286.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 42.3 | 54.0 | -11.7 | Low Ch 2, 902 MHz, EUT Vert |
| 3658.405 | 38.7 | 3.3 | 1.9 | 286.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 42.0 | 54.0 | -12.0 | Mid Ch 63, 914 MHz, EUT Vert |
| 3708.805 | 38.1 | 3.7 | 1.8 | 290.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 41.8 | 54.0 | -12.2 | High Ch 126, 927 MHz, EUT Vert |
| 7417.595 | 26.7 | 14.2 | 1.5 | 277.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 40.9 | 54.0 | -13.1 | High Ch 126, 927 MHz, EUT Vert |
| 7316.815 | 26.6 | 13.3 | 1.5 | 277.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 39.9 | 54.0 | -14.1 | Mid Ch 63, 914 MHz, EUT Vert |
| 7417.520 | 41.8 | 14.2 | 1.7 | 14.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 56.0 | 74.0 | -18.0 | High Ch 126, 927 MHz, EUT Vert |
| 5414.455 | 46.4 | 9.3 | 1.5 | 312.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 55.7 | 74.0 | -18.3 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.440 | 45.8 | 9.3 | 1.2 | 214.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 55.1 | 74.0 | -18.9 | Low Ch 2, 902 MHz, EUT Flat |
| 7316.250 | 41.6 | 13.3 | 1.0 | 360.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 54.9 | 74.0 | -19.1 | Mid Ch 63, 914 MHz, EUT Vert |
| 3708.785 | 31.1 | 3.7 | 1.5 | 95.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 34.8 | 54.0 | -19.2 | High Ch 126, 927 MHz, EUT Vert |
| 3658.375 | 31.5 | 3.3 | 1.5 | 63.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 34.8 | 54.0 | -19.2 | Mid Ch 63, 914 MHz, EUT Vert |
| 3609.635 | 30.8 | 2.7 | 1.5 | 53.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 33.5 | 54.0 | -20.5 | Low Ch 2, 902 MHz, EUT Vert |
| 7417.525 | 39.2 | 14.2 | 1.5 | 277.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 53.4 | 74.0 | -20.6 | High Ch 126, 927 MHz, EUT Vert |
| 7317.070 | 40.0 | 13.3 | 1.5 | 277.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 53.3 | 74.0 | -20.7 | Mid Ch 63, 914 MHz, EUT Vert |
| 8231.415 | 38.4 | -5.3 | 1.5 | 24.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 33.1 | 54.0 | -20.9 | Mid Ch 63, 914 MHz, EUT Vert |
| 5414.510 | 43.3 | 9.3 | 2.7 | 43.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 52.6 | 74.0 | -21.4 | Low Ch 2, 902 MHz, EUT Horz |
| 8344.745 | 37.9 | -5.4 | 1.5 | 25.0 | 3.0 | 0.0 | Vert | AV | 0.0 | 32.5 | 54.0 | -21.5 | High Ch 126, 927 MHz, EUT Vert |
| 5414.290 | 43.1 | 9.3 | 1.5 | 250.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 52.4 | 74.0 | -21.6 | Low Ch 2, 902 MHz, EUT Vert |
| 5414.355 | 42.7 | 9.3 | 1.3 | 360.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 52.0 | 74.0 | -22.0 | Low Ch 2, 902 MHz, EUT Flat |

| Freq (MHz) | Amplitude (dBuV) | Factor (dB) | Antenna Height (meters) | Azimuth (degrees) | Test Distance (meters) | External Attenuation (dB) | Polarity/ Transducer Type | Detector | Distance Adjustment (dB) | Adjusted (dBuV/m) | Spec. Limit (dBuV/m) | Compared to Spec. (dB) | Comments |
|------------|------------------|-------------|-------------------------|-------------------|------------------------|---------------------------|---------------------------|----------|--------------------------|-------------------|----------------------|------------------------|--------------------------------|
| 5414.745 | 42.1 | 9.3 | 1.5 | 342.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 51.4 | 74.0 | -22.6 | Low Ch 2, 902 MHz, EUT Horz |
| 8231.405 | 35.0 | -5.3 | 1.0 | 165.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 29.7 | 54.0 | -24.3 | Mid Ch 63, 914 MHz, EUT Vert |
| 8344.770 | 34.2 | -5.4 | 1.5 | 133.0 | 3.0 | 0.0 | Horz | AV | 0.0 | 28.8 | 54.0 | -25.2 | High Ch 126, 927 MHz, EUT Vert |
| 3709.100 | 45.1 | 3.7 | 1.8 | 290.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.8 | 74.0 | -25.2 | High Ch 126, 927 MHz, EUT Vert |
| 3609.420 | 46.0 | 2.7 | 1.9 | 286.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.7 | 74.0 | -25.3 | Low Ch 2, 902 MHz, EUT Vert |
| 3658.210 | 45.1 | 3.3 | 1.9 | 286.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 48.4 | 74.0 | -25.6 | Mid Ch 63, 914 MHz, EUT Vert |
| 3708.800 | 41.6 | 3.7 | 1.5 | 95.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.3 | 74.0 | -28.7 | High Ch 126, 927 MHz, EUT Vert |
| 3658.105 | 41.7 | 3.3 | 1.5 | 63.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 45.0 | 74.0 | -29.0 | Mid Ch 63, 914 MHz, EUT Vert |
| 3609.980 | 41.5 | 2.7 | 1.5 | 53.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 44.2 | 74.0 | -29.8 | Low Ch 2, 902 MHz, EUT Vert |
| 8230.765 | 47.7 | -5.3 | 1.5 | 24.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 42.4 | 74.0 | -31.6 | Mid Ch 63, 914 MHz, EUT Vert |
| 8344.365 | 47.3 | -5.4 | 1.5 | 25.0 | 3.0 | 0.0 | Vert | PK | 0.0 | 41.9 | 74.0 | -32.1 | High Ch 126, 927 MHz, EUT Vert |
| 8231.385 | 46.3 | -5.3 | 1.0 | 165.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 41.0 | 74.0 | -33.0 | Mid Ch 63, 914 MHz, EUT Vert |
| 8345.355 | 46.0 | -5.4 | 1.5 | 133.0 | 3.0 | 0.0 | Horz | PK | 0.0 | 40.6 | 74.0 | -33.4 | High Ch 126, 927 MHz, EUT Vert |

**SPURIOUS CONDUCTED
EMISSIONS**

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |


TEST DESCRIPTION

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.




SPURIOUS CONDUCTED EMISSIONS


XMI 2014.02.07
NweTx 2014.11.06

| | | | |
|---|----------------------------------|---|---------------|
| EUT: Vector Mouthguard | | Work Order: I1BM0001 | |
| Serial Number: 3350 | | Date: 12/17/14 | |
| Customer: I1 Biometrics, Inc. | | Temperature: 24°C | |
| Attendees: David Brown, Rob Phibbs | | Humidity: 32% | |
| Project: None | | Barometric Pres.: 1011 | |
| Tested by: Richard Mellroth | | Power: Power Over USB | |
| | | Job Site: NC02 | |
| TEST SPECIFICATIONS | | Test Method | |
| FCC 15.247:2014 | | ANSI C63.10:2009 | |
| COMMENTS | | | |
| Power Level set at 10dBm. Transmitting at maximum duty cycle. | | | |
| DEVIATIONS FROM TEST STANDARD | | | |
| Configuration # | 1 | Signature  | |
| | | Frequency Range | Value (dBc) |
| | | | Limit ≤ (dBc) |
| | | | Result |
| Single Channel Mode | | | |
| | 61.44 Kb/s, GFSK | | |
| | Low Channel 2, 902.399871 MHz | 30 MHz - 12.5 GHz | -45.09 |
| | Low Channel 2, 902.399871 MHz | 12.5 GHz - 25 GHz | -60.44 |
| | Mid Channel 63, 914.596882 MHz | 30 MHz - 12.5 GHz | -52.04 |
| | Mid Channel 63, 914.596882 MHz | 12.5 GHz - 25 GHz | -60.37 |
| | High Channel 126, 927.193795 MHz | 30 MHz - 12.5 GHz | -51.8 |
| | High Channel 126, 927.193795 MHz | 12.5 GHz - 25 GHz | -58.03 |
| | | | -20 |
| | | | -20 |
| | | | -20 |
| | | | -20 |
| | | | -20 |
| | | | -20 |
| | | | Pass |
| | | | Pass |
| | | | Pass |
| | | | Pass |
| | | | Pass |
| | | | Pass |


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|--|-------------|---------------|--------|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result |
| 30 MHz - 12.5 GHz | -45.09 | -20 | Pass |

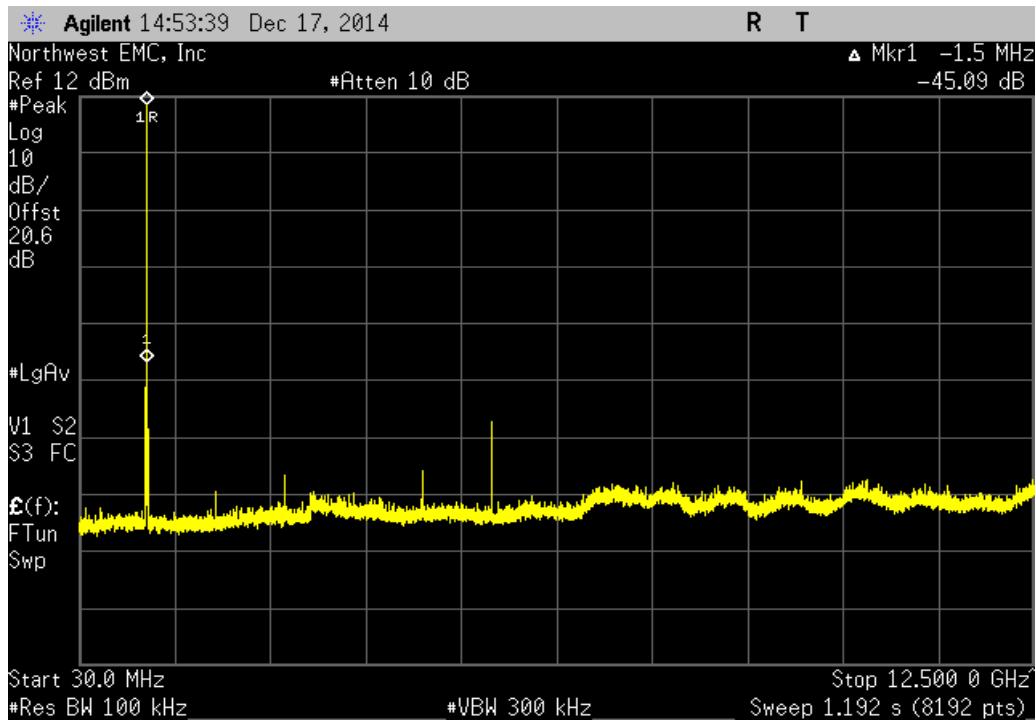


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|--|-------------|---------------|--------|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | -60.44 | -20 | Pass |

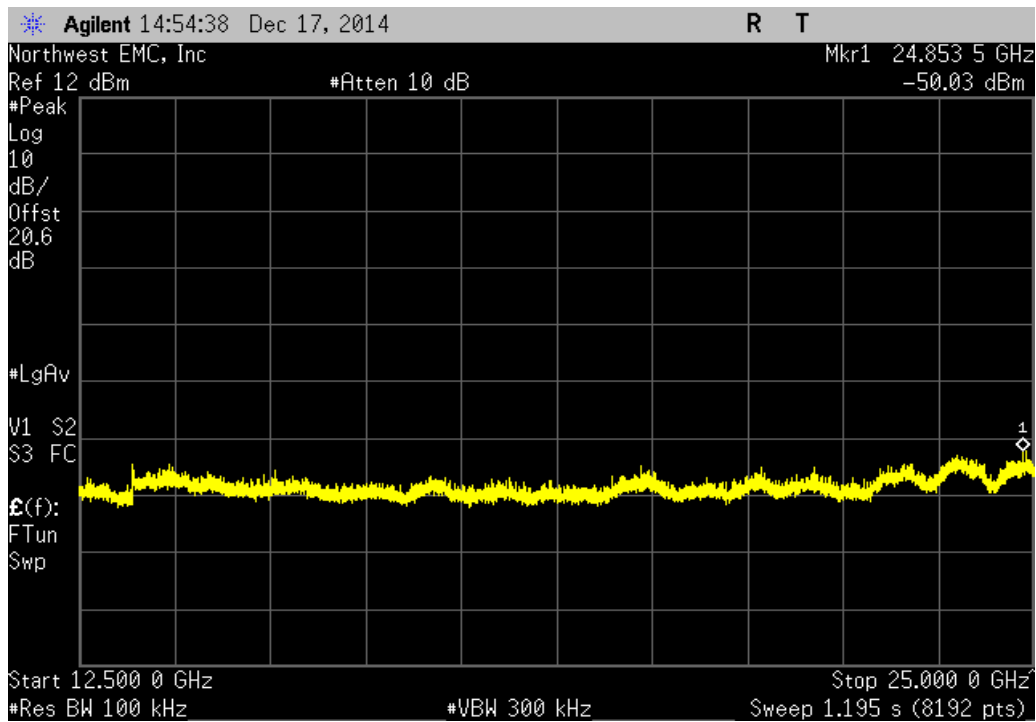


| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | |
|---|-------------|---------------|--------|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result |
| 30 MHz - 12.5 GHz | -52.04 | -20 | Pass |

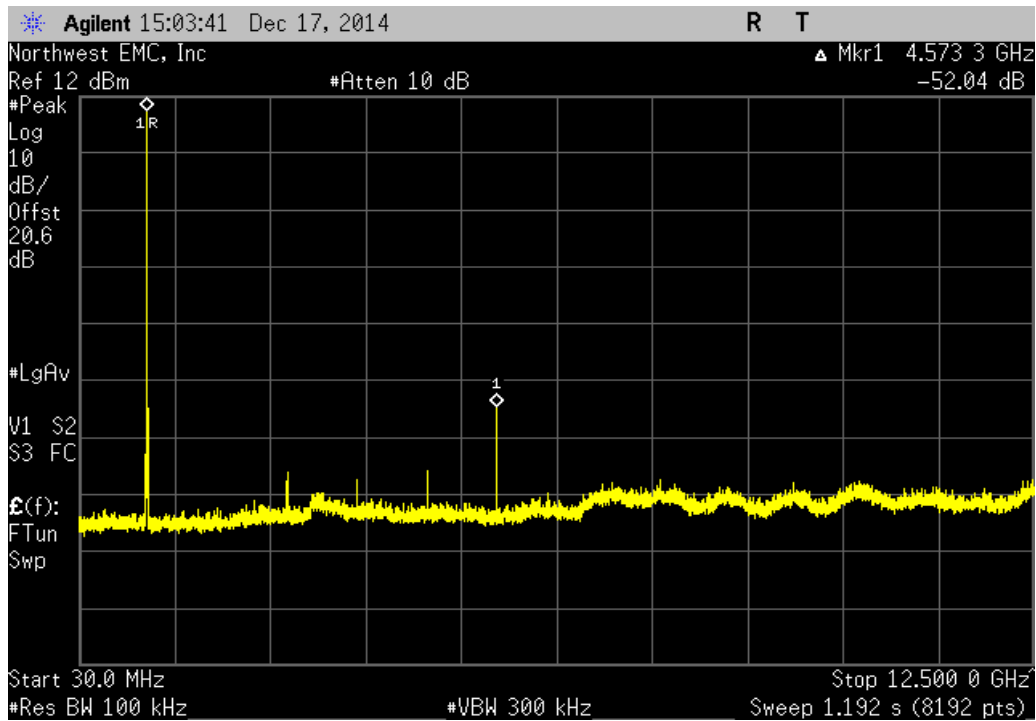


| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | |
|---|-------------|---------------|--------|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result |
| 12.5 GHz - 25 GHz | -60.37 | -20 | Pass |

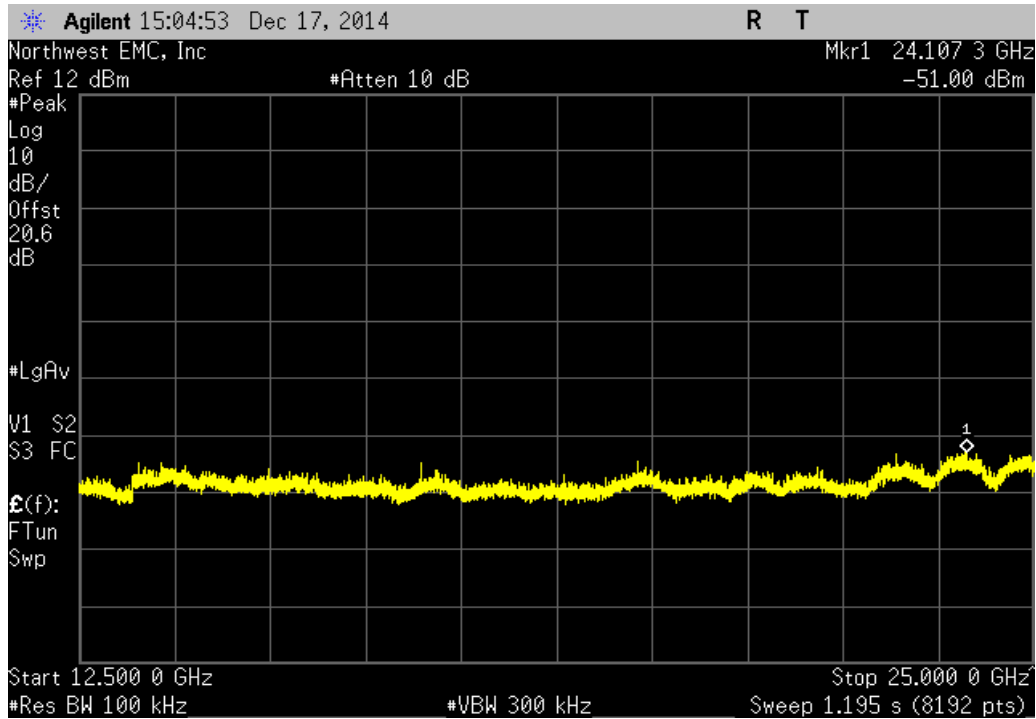

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | | |
|---|-------------|---------------|--------|--|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result | |
| 30 MHz - 12.5 GHz | -51.8 | -20 | Pass | |

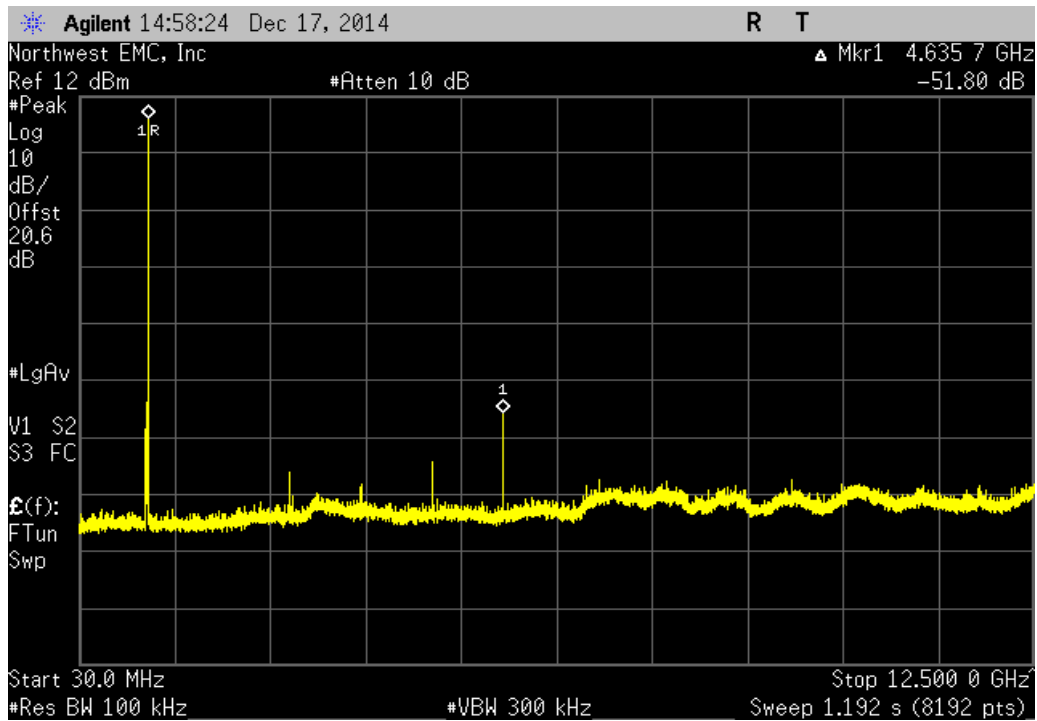

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | | |
|---|-------------|---------------|--------|--|
| Frequency Range | Value (dBc) | Limit ≤ (dBc) | Result | |
| 12.5 GHz - 25 GHz | -58.03 | -20 | Pass | |

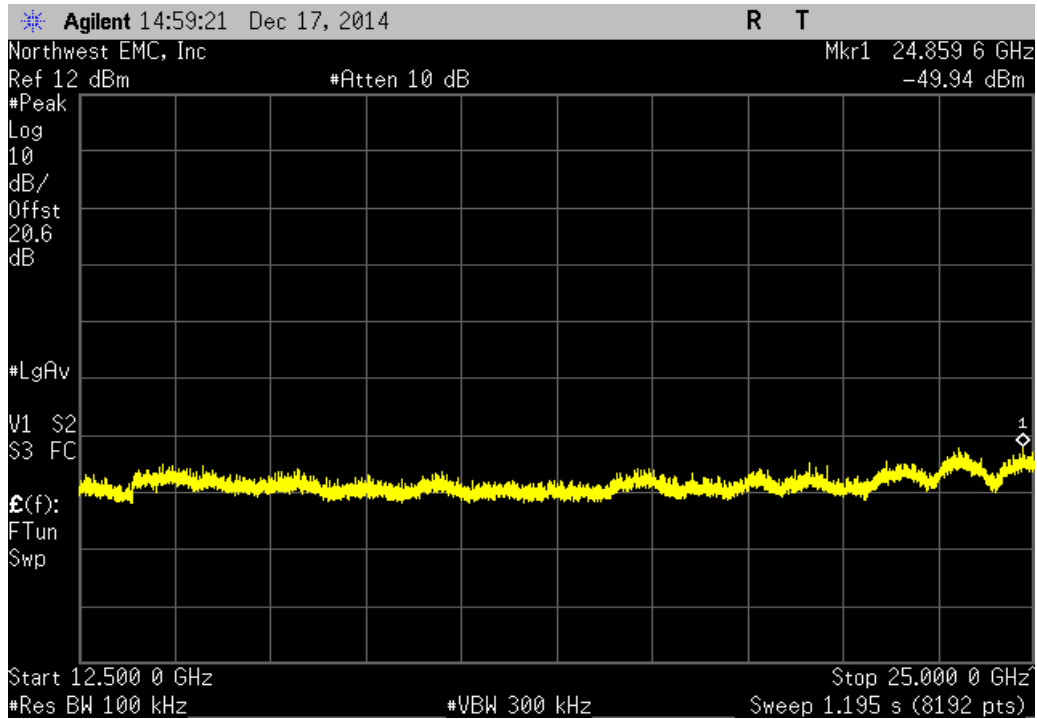

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |


TEST DESCRIPTION

The occupied bandwidth was measured with the EUT set to low, medium and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet in a no-hop mode.


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|--|------------|-----------|--------|
| | Value | Limit (<) | Result |
| | 91.209 kHz | 250 kHz | Pass |



| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | |
|---|------------|-----------|--------|
| | Value | Limit (<) | Result |
| | 86.876 kHz | 250 kHz | Pass |

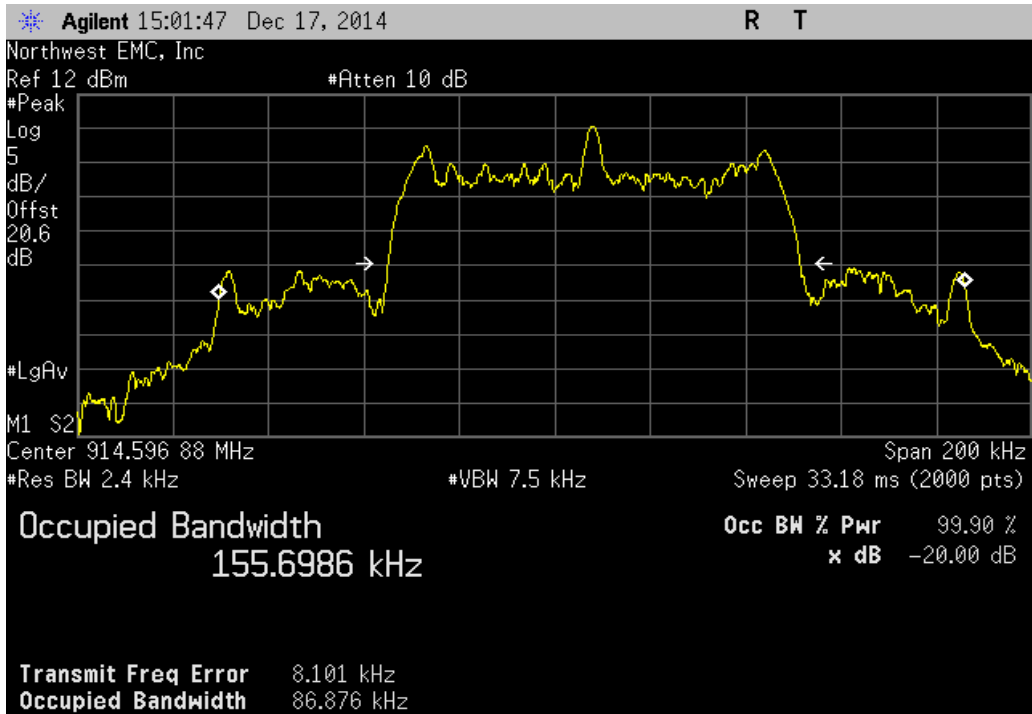

| | | | | | | |
|---|--|--|--|--------------|---------------------|---------------|
| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | | | | |
| | | | | Value | Limit (<) | Result |
| | | | | 88.856 kHz | 250 kHz | Pass |

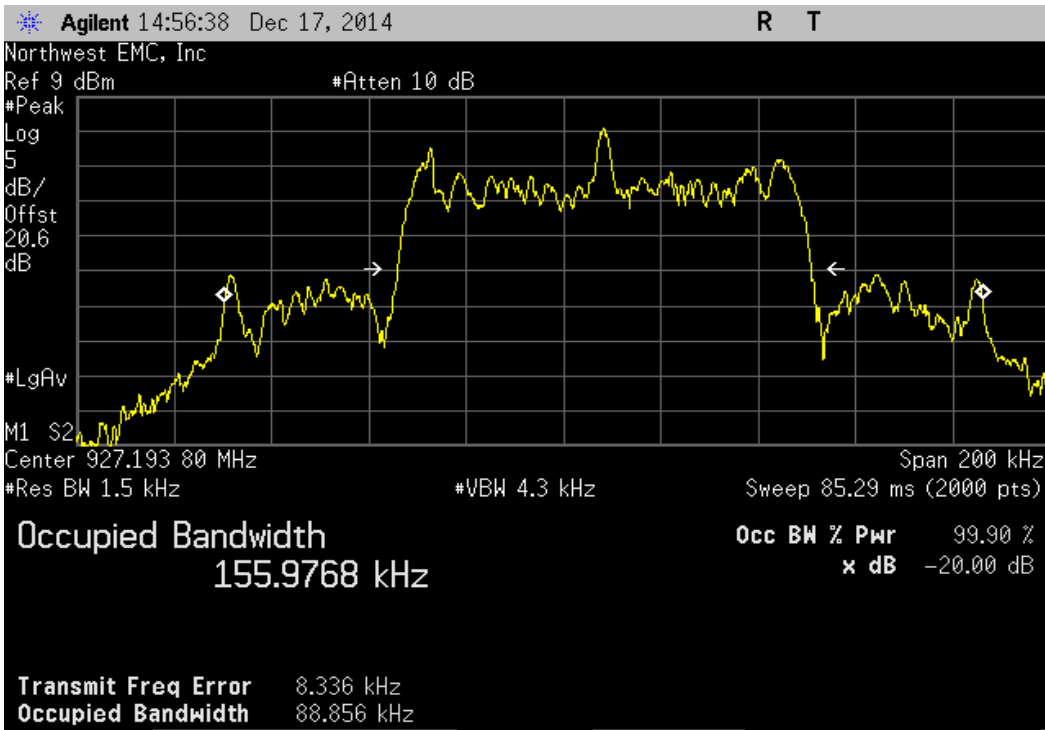

OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION


The peak output power was measured with the EUT set to low, medium and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was transmitting in a no hop mode at the data rate(s) listed in the datasheet.

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36 dBm.


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|--|-----------|-----------|--------|
| | Value | Limit (<) | Result |
| | 10.191 mW | 1 W | Pass |

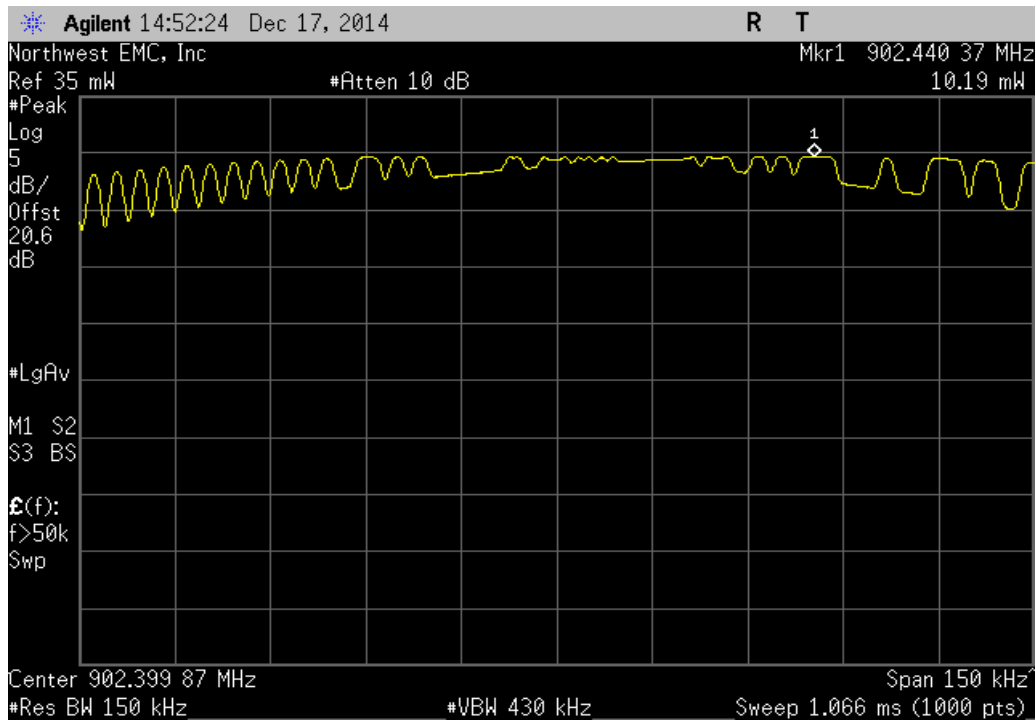

| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | |
|---|----------|-----------|--------|
| | Value | Limit (<) | Result |
| | 8.037 mW | 1 W | Pass |

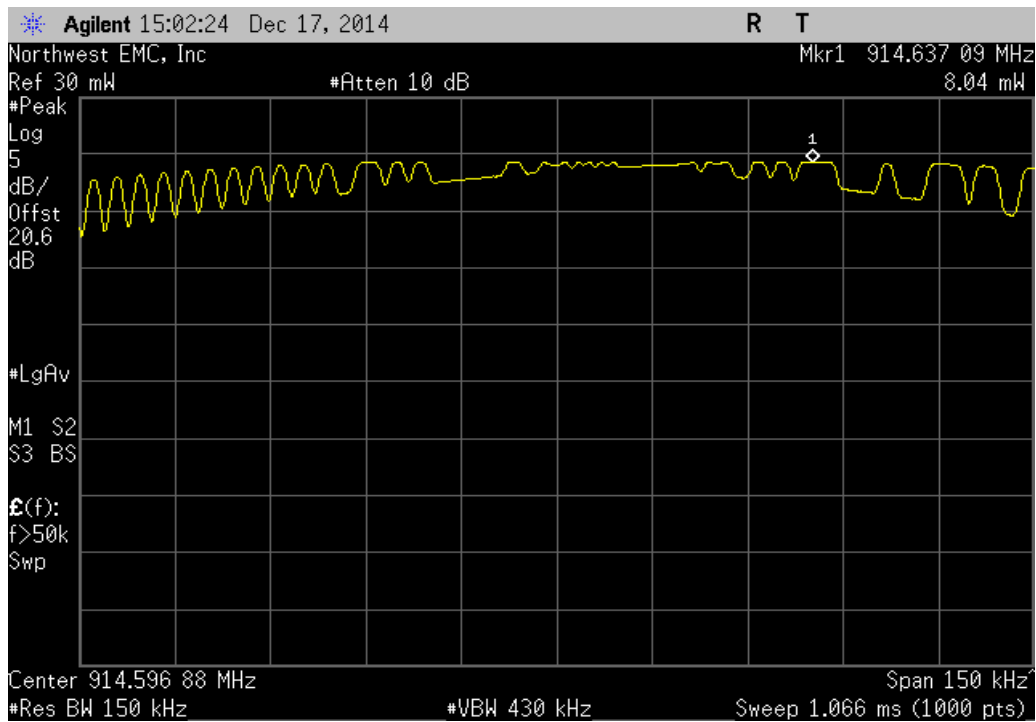

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | |
|---|----------|-----------|--------|
| | Value | Limit (<) | Result |
| | 6.028 mW | 1 W | Pass |

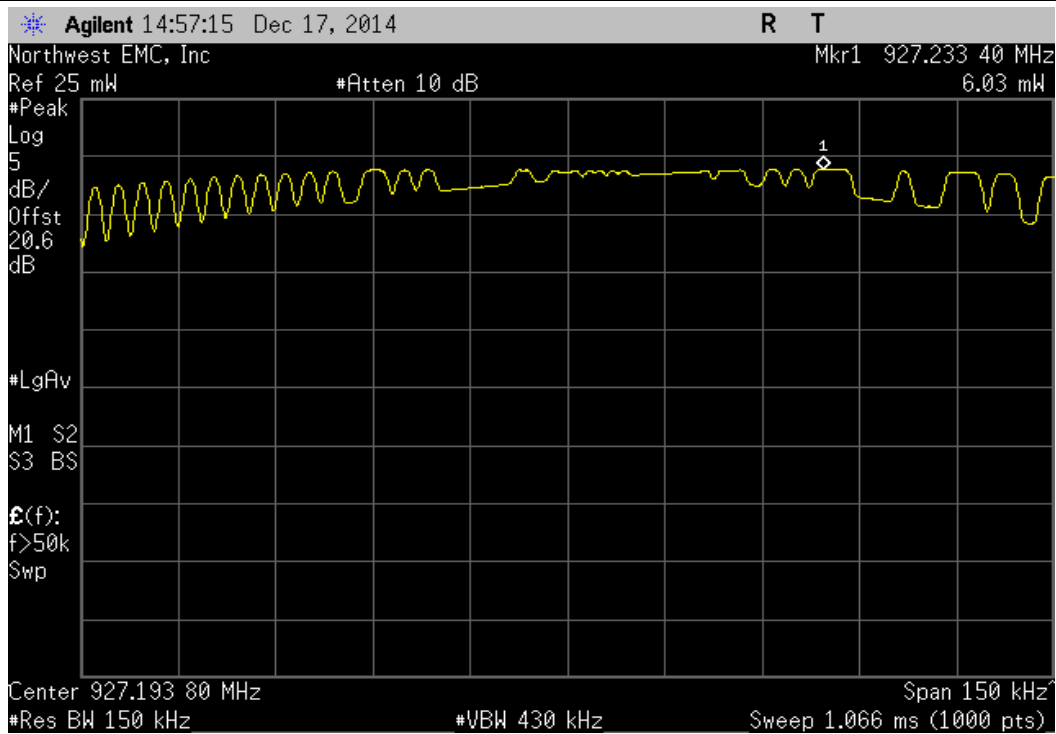

DUTY CYCLE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.


The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.


If the transmit duty cycle < 98 percent, burst gating was used during some of the other tests in this report to only measure during the burst duration.




DUTY CYCLE

| | | | | | | | |
|---|----------------------------------|---|----------|------------------|-----------|-----------|---------|
| EUT: Vector Mouthguard | | Work Order: I1BM0001 | | | | | |
| Serial Number: 3350 | | Date: 12/17/14 | | | | | |
| Customer: I1 Biometrics, Inc. | | Temperature: 24°C | | | | | |
| Attendees: David Brown, Rob Phibbs | | Humidity: 32% | | | | | |
| Project: None | | Barometric Pres.: 1011 | | | | | |
| Tested by: Richard Mellroth | | Power: Power Over USB | | | | | |
| | | Job Site: NC02 | | | | | |
| TEST SPECIFICATIONS | | Test Method | | | | | |
| FCC 15.247:2014 | | ANSI C63.10:2009 | | | | | |
| COMMENTS | | | | | | | |
| Power Level set at 10dBm. Transmitting at maximum duty cycle. | | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | | |
| None | | | | | | | |
| Configuration # | 1 | Signature  | | | | | |
| | | Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results |
| Single Channel Mode | | | | | | | |
| | 61.44 Kb/s, GFSK | | | | | | |
| | Low Channel 2, 902.399871 MHz | 6.681 ms | 7.791 ms | 1 | 85.8 | N/A | N/A |
| | Low Channel 2, 902.399871 MHz | N/A | N/A | 5 | N/A | N/A | N/A |
| | Mid Channel 63, 914.596882 MHz | 6.681 ms | 7.825 ms | 1 | 85.4 | N/A | N/A |
| | Mid Channel 63, 914.596882 MHz | N/A | N/A | 5 | N/A | N/A | N/A |
| | High Channel 126, 927.193795 MHz | 6.682 ms | 7.836 ms | 1 | 85.3 | N/A | N/A |
| | High Channel 126, 927.193795 MHz | N/A | N/A | 5 | N/A | N/A | N/A |


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | | | | |
|--|----------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| 6.681 ms | 7.791 ms | 1 | 85.8 | N/A | N/A | |

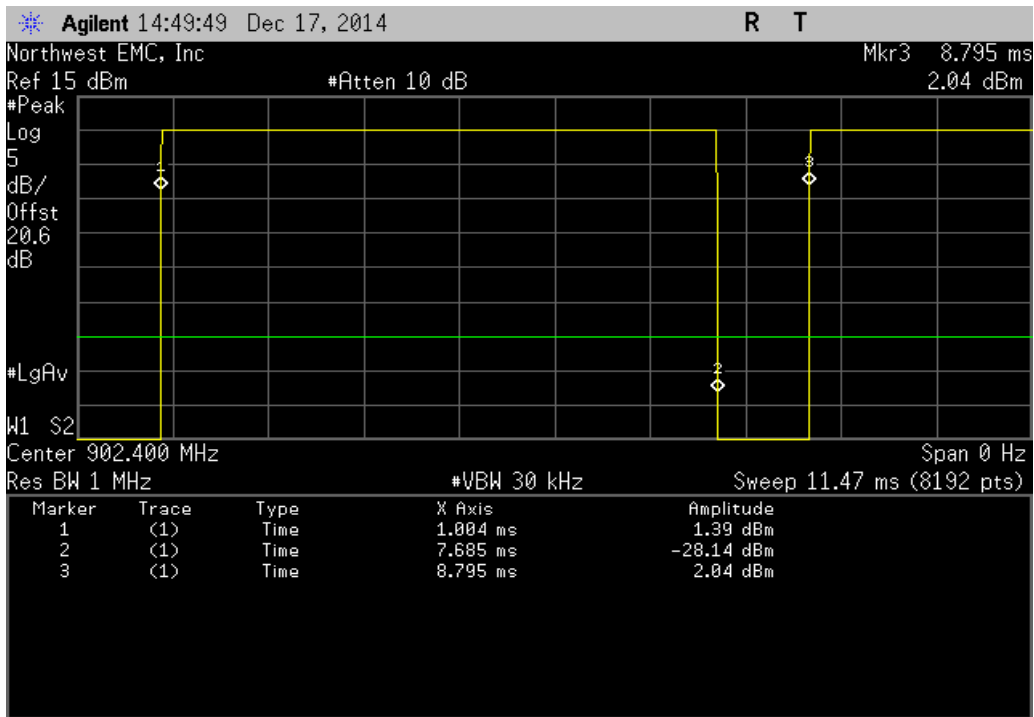


| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | | | | |
|--|--------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| N/A | N/A | 5 | N/A | N/A | N/A | |

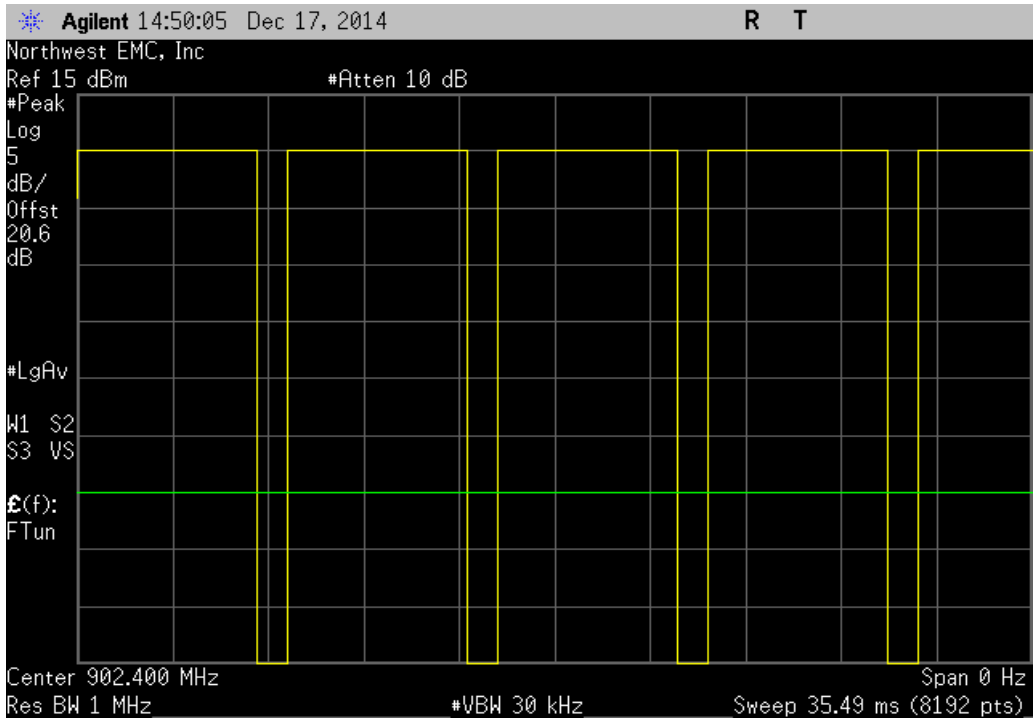


| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|---|----------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| 6.681 ms | 7.825 ms | 1 | 85.4 | N/A | N/A | |

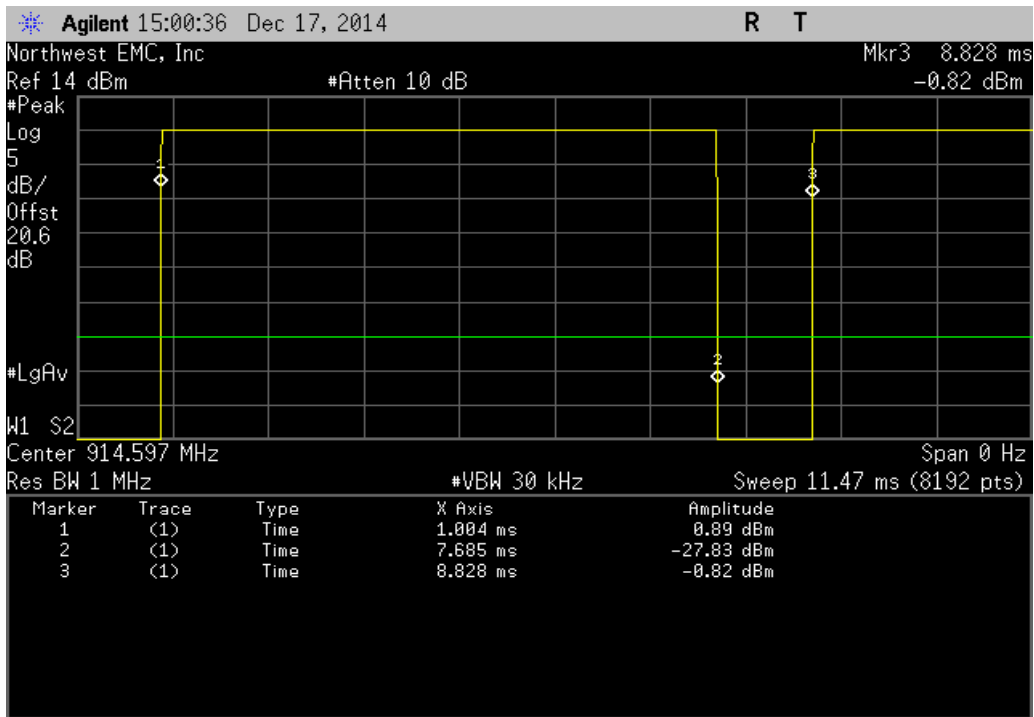


| Single Channel Mode, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|---|--------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| N/A | N/A | 5 | N/A | N/A | N/A | |

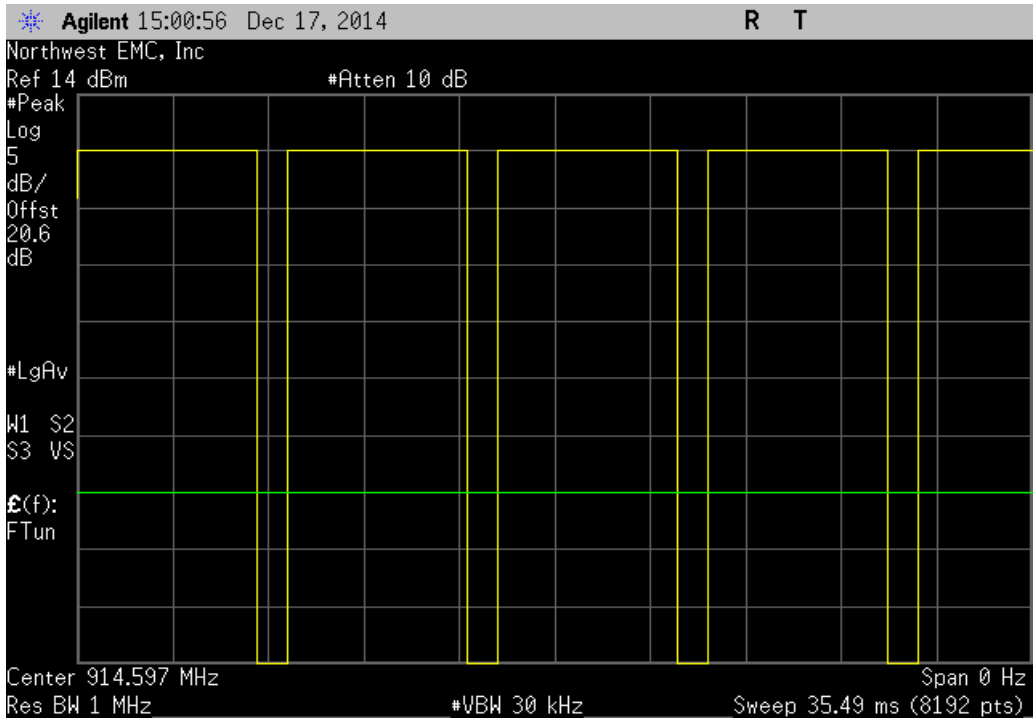

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | | | | |
|---|----------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| 6.682 ms | 7.836 ms | 1 | 85.3 | N/A | N/A | |

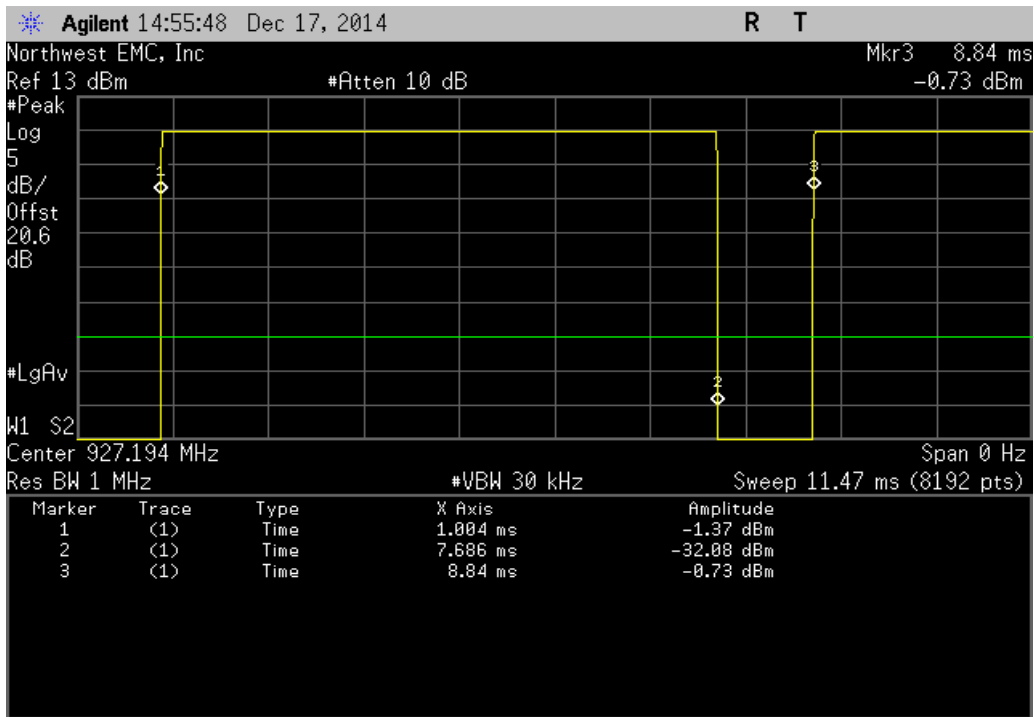

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | | | | |
|---|--------|------------------|-----------|-----------|---------|--|
| Pulse Width | Period | Number of Pulses | Value (%) | Limit (%) | Results | |
| N/A | N/A | 5 | N/A | N/A | N/A | |

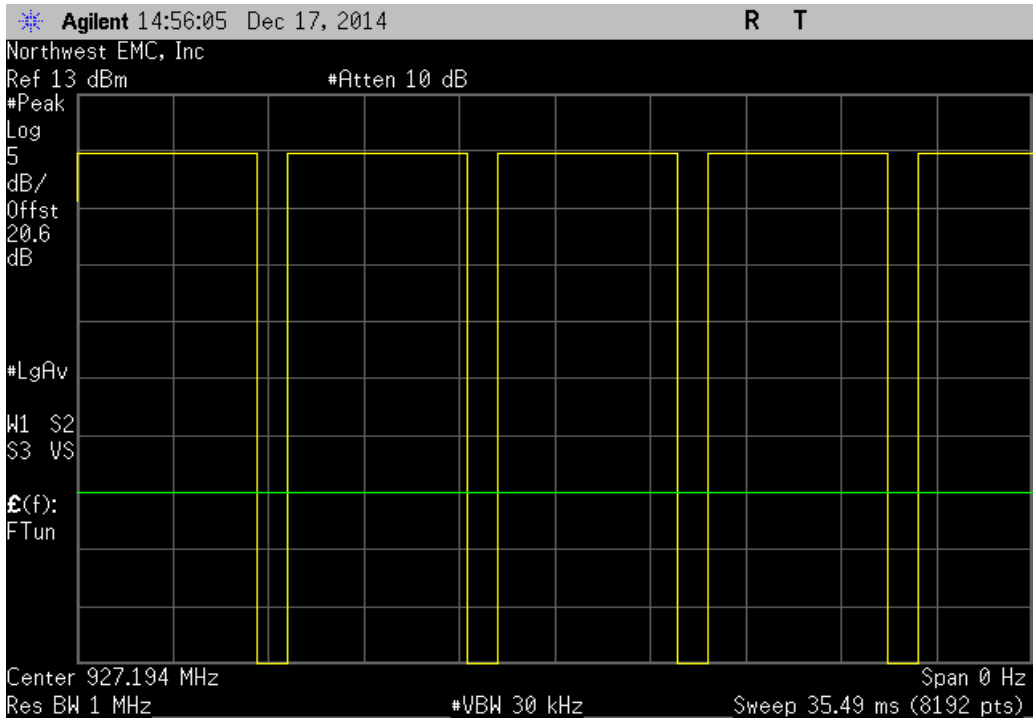

CHANNEL SPACING

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION

The channel carrier frequencies in the 902-928 MHz band must be separated by 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. The EUT was operated in pseudorandom hopping mode. The spectrum was scanned across two adjacent peaks. The separation between the peaks of these channels was measured.

Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz

| | Value | Limit (≥) | Results |
|--|-----------|-----------|---------|
| | 206.1 kHz | 100 kHz | Pass |

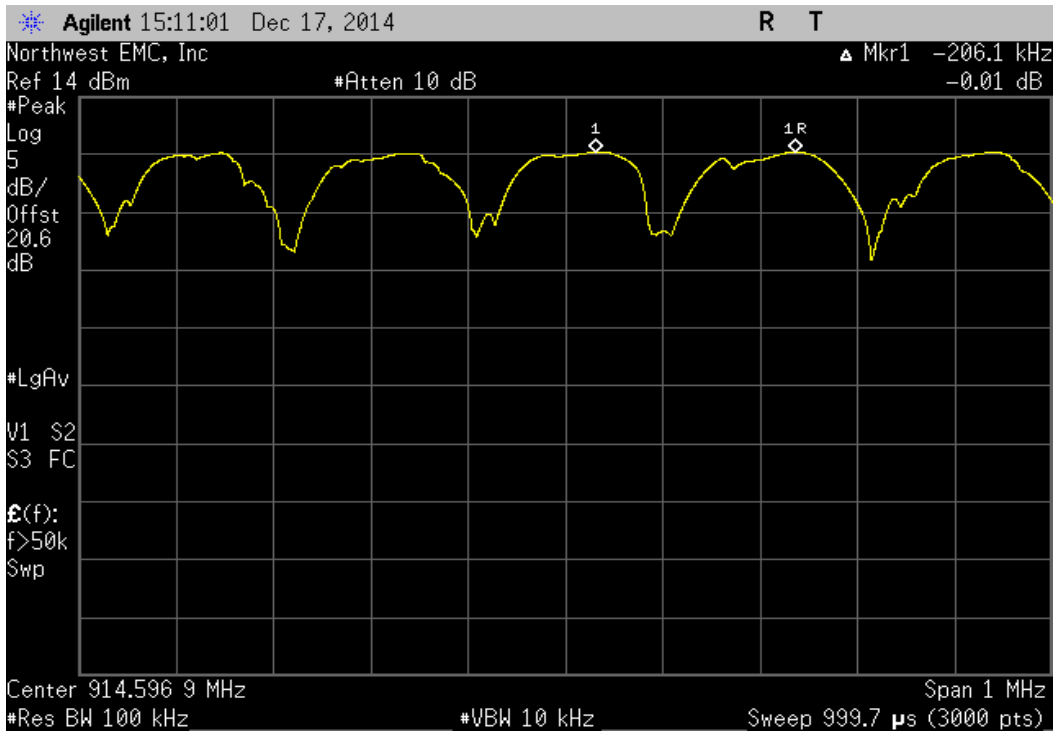

NUMBER OF HOPPING FREQUENCIES

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION

The number of hopping frequencies was measured across the authorized band. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The hopping function of the EUT was enabled.

Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz

| Number of Channels | Limit | Results |
|--------------------|-------|---------|
| 125 | > 50 | Pass |

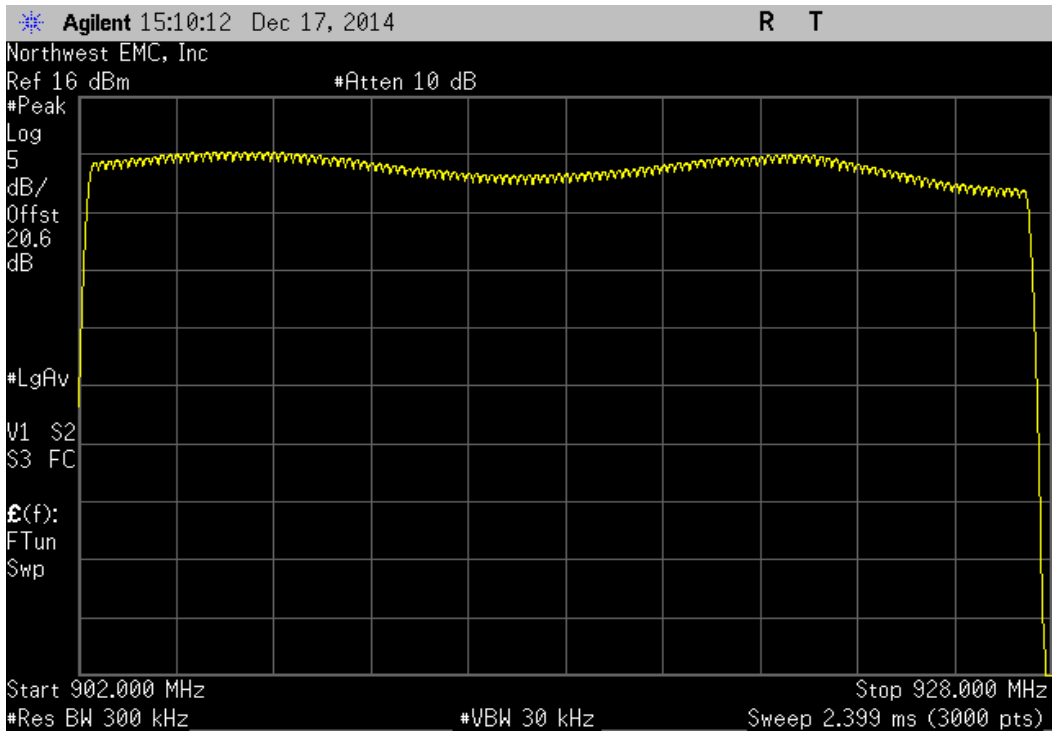

DWELL TIME

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |


TEST DESCRIPTION

The average dwell time per hopping channel was measured at one hopping channel in the middle of the authorized band. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The hopping function of the EUT was enabled. The dwell time limit for a transmitter operating in the 902-928MHz band employing at least 50 channels is specified at a maximum of 0.4s in a 20s period. The measurement was repeated 4 times.




DWELL TIME


XMI 2014.02.07
NweTx 2014.11.06

| | | | | | | |
|--------------------------------------|--------------------------------|---|------------------|--------------------------|------------|---------|
| EUT: Vector Mouthguard | | Work Order: I1BM0001 | | | | |
| Serial Number: 3350 | | Date: 12/17/14 | | | | |
| Customer: I1 Biometrics, Inc. | | Temperature: 24°C | | | | |
| Attendees: David Brown, Rob Phibbs | | Humidity: 32% | | | | |
| Project: None | | Barometric Pres.: 1011 | | | | |
| Tested by: Richard Mellroth | | Power: Power Over USB | | | | |
| | | Job Site: NC02 | | | | |
| TEST SPECIFICATIONS | | Test Method | | | | |
| FCC 15.247:2014 | | ANSI C63.10:2009 | | | | |
| COMMENTS | | | | | | |
| Power Level set at 10dBm. | | | | | | |
| DEVIATIONS FROM TEST STANDARD | | | | | | |
| None | | | | | | |
| Configuration # | 1 | Signature  | | | | |
| | | Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results |
| Hopping Mode, Application Duty Cycle | | | | | | |
| 61.44 Kb/s, GFSK | | | | | | |
| | Mid Channel 63, 914.596882 MHz | 6.678 | N/A | N/A | N/A | N/A |
| | Mid Channel 63, 914.596882 MHz | 6.678 | 8 | 53.424 | 400 | Pass |
| | Mid Channel 63, 914.596882 MHz | 6.678 | 8 | 53.424 | 400 | Pass |
| | Mid Channel 63, 914.596882 MHz | 6.678 | 8 | 53.424 | 400 | Pass |
| | Mid Channel 63, 914.596882 MHz | 6.678 | 8 | 53.424 | 400 | Pass |


| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|--|------------------|------------------|--------------------------|------------|---------|--|
| | Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results | |
| | 6.678 | 8 | 53.424 | 400 | Pass | |

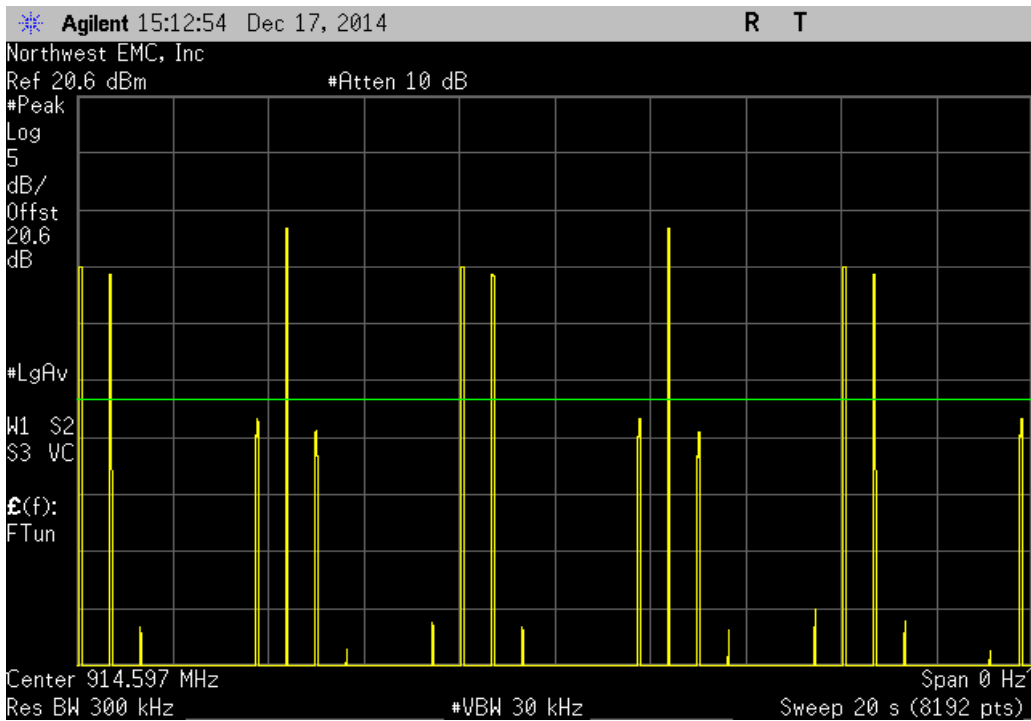


| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|--|------------------|------------------|--------------------------|------------|---------|--|
| | Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results | |
| | 6.678 | 8 | 53.424 | 400 | Pass | |

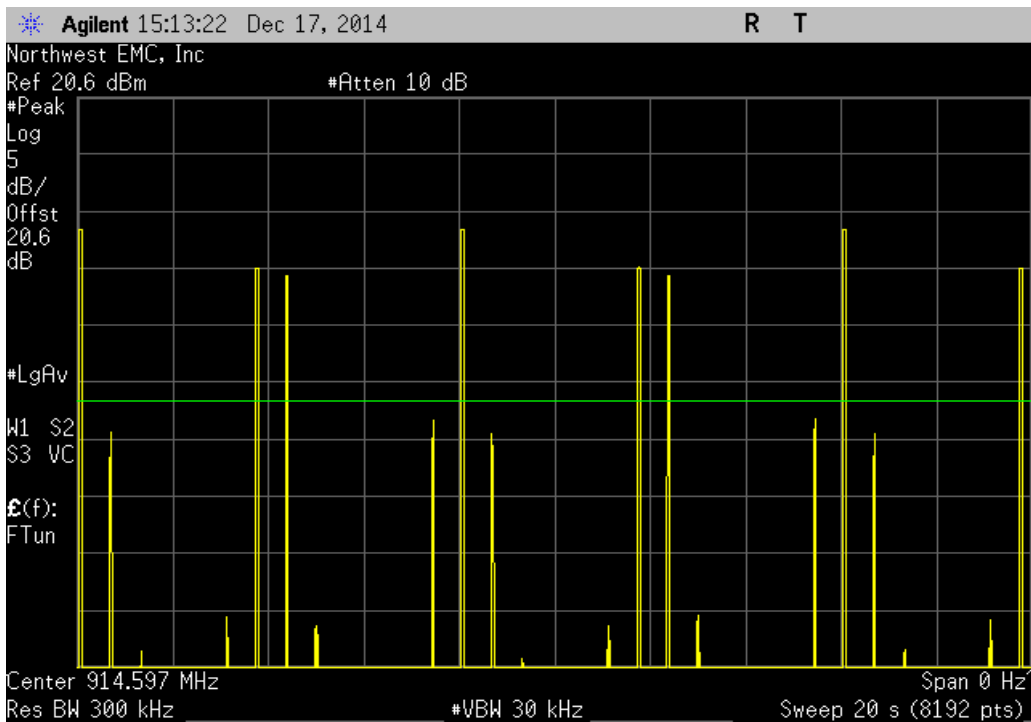

| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|--|------------------|------------------|--------------------------|------------|---------|--|
| | Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results | |
| | 6.678 | N/A | N/A | N/A | N/A | |

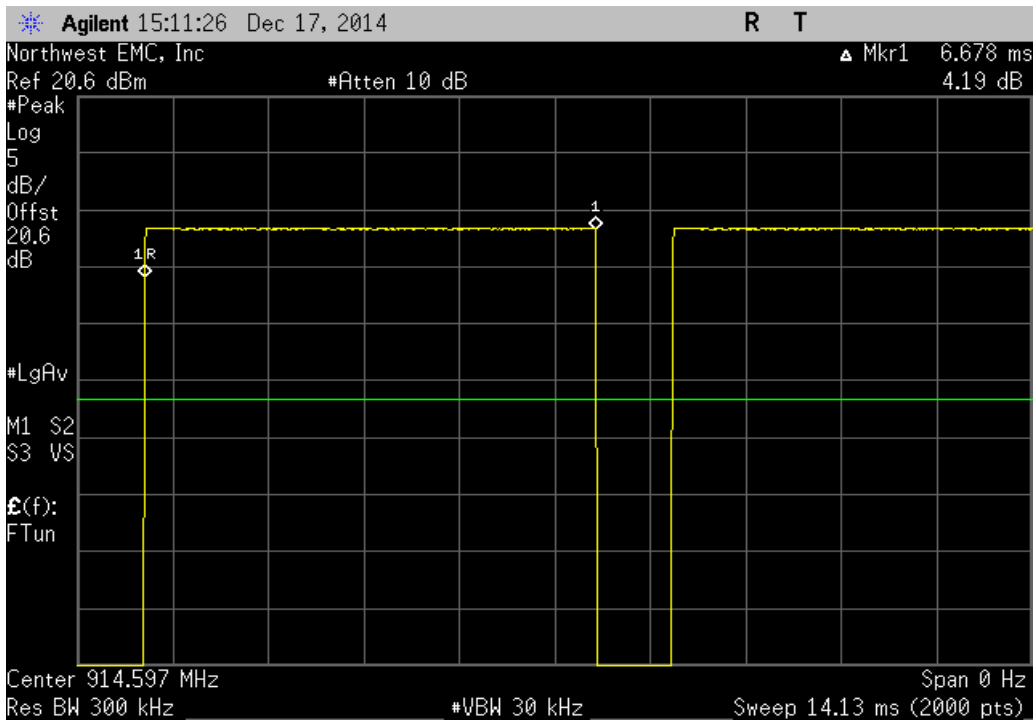


| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz | | | | | | |
|--|------------------|------------------|--------------------------|------------|---------|--|
| | Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results | |
| | 6.678 | 8 | 53.424 | 400 | Pass | |

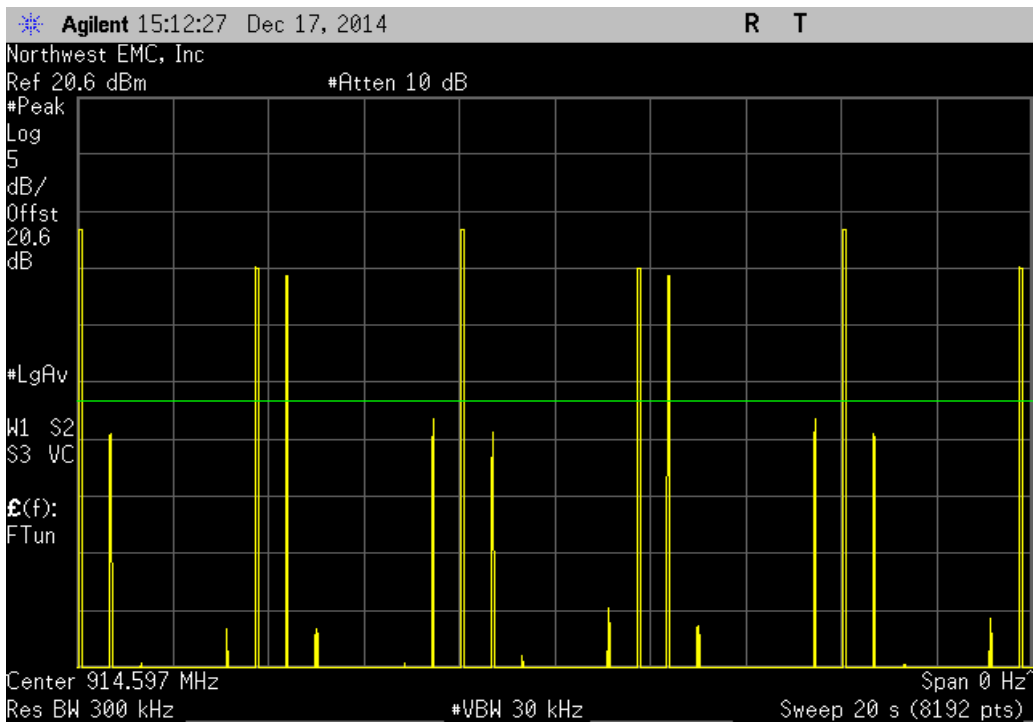

Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Mid Channel 63, 914.596882 MHz

| Pulse Width (ms) | Number of Pulses | On Time (ms) During 20 s | Limit (ms) | Results |
|------------------|------------------|--------------------------|------------|---------|
| 6.678 | 8 | 53.424 | 400 | Pass |

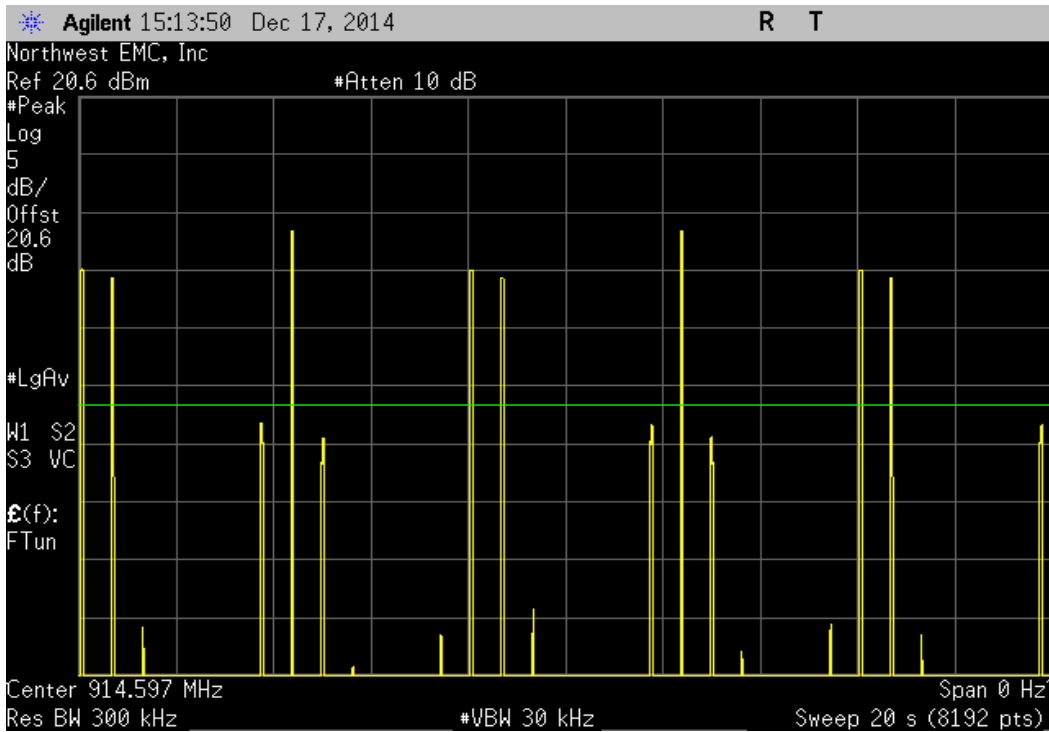

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION


The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to low and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet in a no hop mode. The channels closest to the band edges were selected.

The spectrum was scanned below the lower band edge and above the higher band edge.




BAND EDGE COMPLIANCE

XMI 2014.02.07
NweTx 2014.11.06


| | | |
|---|-----------------------|--|
| EUT: Vector Mouthguard | | Work Order: I1BM0001 |
| Serial Number: 3350 | | Date: 12/17/14 |
| Customer: I1 Biometrics, Inc. | | Temperature: 24°C |
| Attendees: David Brown, Rob Phibbs | | Humidity: 32% |
| Project: None | | Barometric Pres.: 1011 |
| Tested by: Richard Mellroth | Power: Power Over USB | Job Site: NC02 |
| TEST SPECIFICATIONS | | Test Method |
| FCC 15.247:2014 | | ANSI C63.10:2009 |
| COMMENTS | | |
| Power Level set at 10dBm. Transmitting at maximum duty cycle. | | |
| DEVIATIONS FROM TEST STANDARD | | |
| None | | |
| Configuration # | 1 | <i>Signature</i>  |

| | Value (dBc) | Limit ≤ (dBc) | Result |
|----------------------------------|-------------|---------------|--------|
| Single Channel Mode | | | |
| 61.44 Kb/s, GFSK | | | |
| Low Channel 2, 902.399871 MHz | -21.73 | -20 | Pass |
| High Channel 126, 927.193795 MHz | -25.69 | -20 | Pass |

| Single Channel Mode, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|--|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -21.73 | -20 | Pass |

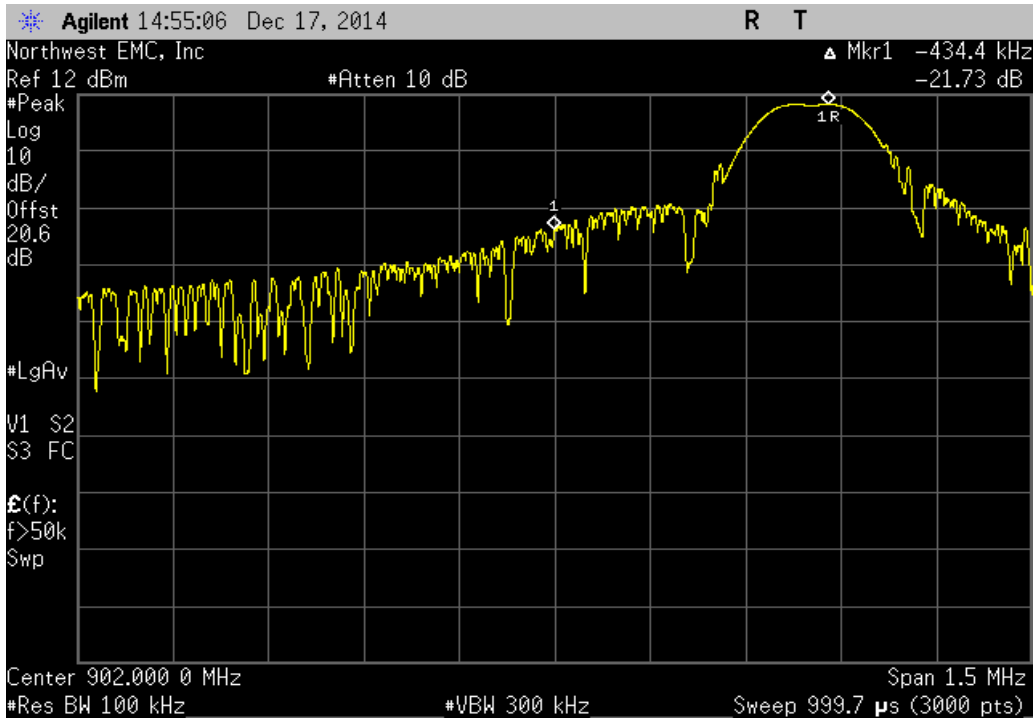

| Single Channel Mode, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | |
|---|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -25.69 | -20 | Pass |

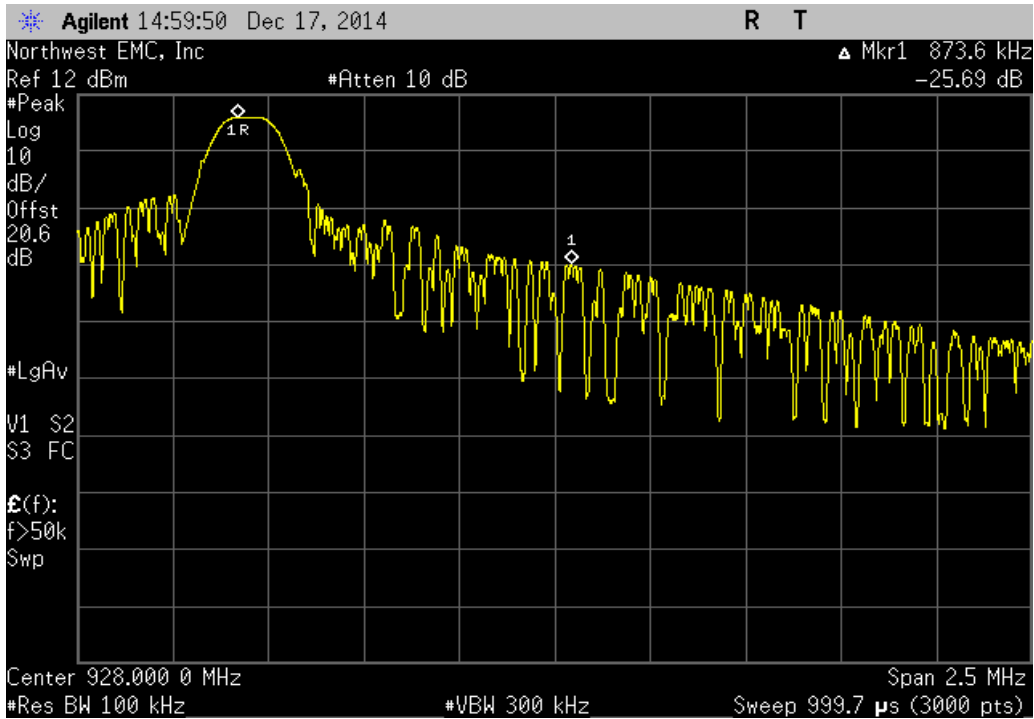

**BAND EDGE COMPLIANCE -
HOPPING MODE**

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

| Description | Manufacturer | Model | ID | Last Cal. | Interval (mo) |
|-------------------|--------------------|------------------|-----|-----------|---------------|
| Spectrum Analyzer | Agilent | E4446A | AAT | 6/27/2014 | 12 |
| Signal Generator | Agilent | N5183A | TIA | 4/7/2014 | 36 |
| Attenuator | Fairview Microwave | SA4014-20 | TKE | 2/13/2014 | 12 |
| 40GHz DC Block | Fairview Microwave | SD3379 | AMJ | 6/9/2014 | 12 |
| NC02 Cable | ESM Cable Corp. | TTBJ-141 KMKM-72 | NC5 | 6/9/2014 | 12 |

TEST DESCRIPTION


The spurious RF conducted emissions at the edges of the authorized band were measured with the EUT set to its normal pseudo-random hopping sequence. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.




BAND EDGE COMPLIANCE -HOPPING MODE

XMI 2014.02.07
NweTx 2014.11.06

| | | |
|--------------------------------------|-----------------------|---|
| EUT: Vector Mouthguard | | Work Order: I1BM0001 |
| Serial Number: 3350 | | Date: 12/17/14 |
| Customer: I1 Biometrics, Inc. | | Temperature: 24°C |
| Attendees: David Brown, Rob Pibbs | | Humidity: 32% |
| Project: None | | Barometric Pres.: 1011 |
| Tested by: Richard Mellroth | Power: Power Over USB | Job Site: NC02 |
| TEST SPECIFICATIONS | | Test Method |
| FCC 15.247:2014 | | ANSI C63.10:2009 |
| COMMENTS | | |
| Power Level set at 10dBm. | | |
| DEVIATIONS FROM TEST STANDARD | | |
| None | | |
| Configuration # | 1 | Signature  |
| | | Value (dBc) Limit ≤ (dBc) Result |
| Hopping Mode, Application Duty Cycle | | |
| 61.44 Kb/s, GFSK | | |
| Low Channel 2, 902.399871 MHz | | -25.42 -20 Pass |
| High Channel 126, 927.193795 MHz | | -33.36 -20 Pass |

| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, Low Channel 2, 902.399871 MHz | | | |
|---|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -25.42 | -20 | Pass |

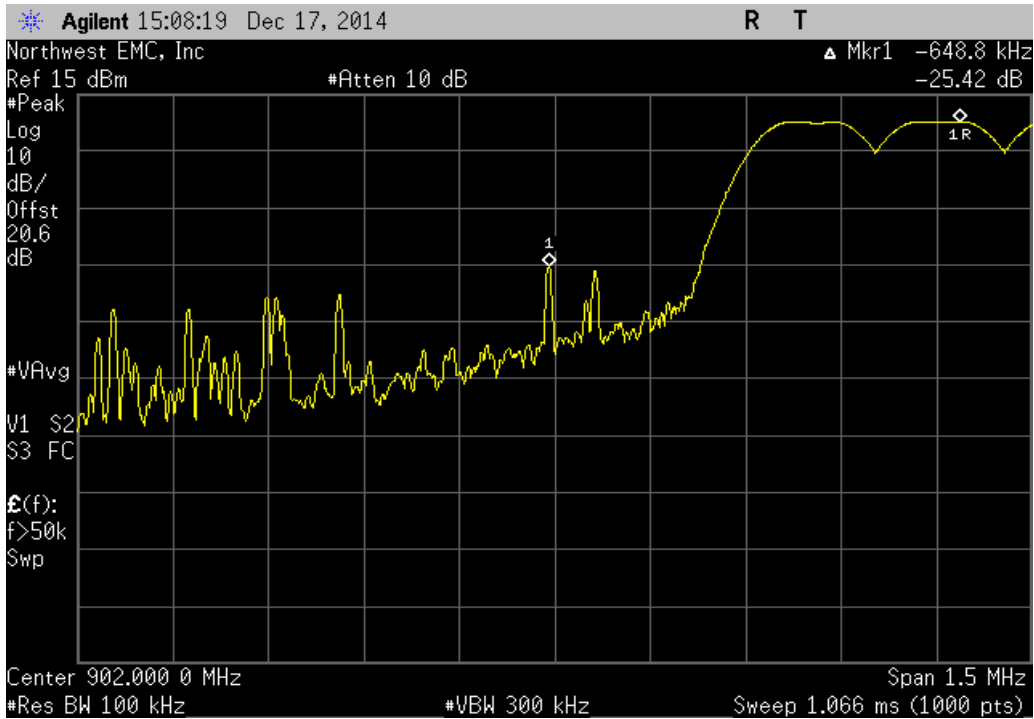

| Hopping Mode, Application Duty Cycle, 61.44 Kb/s, GFSK, High Channel 126, 927.193795 MHz | | | |
|--|-------------|---------------|--------|
| | Value (dBc) | Limit ≤ (dBc) | Result |
| | -33.36 | -20 | Pass |

