



**SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch**

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological

Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555

Fax: +86 (0) 20 82075059

Email: ee.guangzhou@sgs.com

Report No.: GZEM181000124401

Page: 1 of 83

FCC ID: 2ADZHHA-FX35BT

TEST REPORT

Application No.: GZEM1810001244CR
Applicant: Dongguan Siyoto Electronics Co., Ltd.
Address of Applicant: No.15,16,17, Seven street of north Qiaodong, Dongjiang Village, Qiaotou
Tow, DongGuan, Guangdong, China
Manufacturer: The same as applicant
Address of Manufacturer: The same as applicant
Factory: The same as applicant
Address of Factory: The same as applicant
Equipment Under Test (EUT):
FCC ID: 2ADZHHA-FX35BT
EUT Name: WIRELESS HEADPHONES
Model No.: HA-FX35BT, HA-FX45BT. ✕
✕ Please refer to section 2 of this report which indicates which model was
actually tested and which were electrically identical.
Trade Mark: JVC
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2018-10-15
Date of Test: 2018-11-08 to 2018-11-13
Date of Issue: 2018-11-15

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Kobe Jian
Lab Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
Page: 2 of 83

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-11-15		Original

Authorized for issue by:			
Tested By			2018-11-08 to 2018-11-13
	Kevin_Zhang /Project Engineer		Date
Checked By			2018-11-15
	Ricky_Liu /Reviewer		Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass

■ Declaration of EUT Family Grouping:

Model No.: HA-FX35BT, HA-FX45BT

According to the declaration from the applicant, the electrical circuit design, layout, components used and internal wiring were identical for all models, with only difference on the outer decoration.

Therefore only one model HA-FX35BT was tested in this report.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.....	6
4.2 Description of Support Units.....	6
4.3 Measurement Uncertainty.....	7
4.4 Test Location.....	7
4.5 Test Facility.....	8
4.6 Deviation from Standards.....	9
4.7 Abnormalities from Standard Conditions.....	9
5 Equipment List	10
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement.....	14
6.1.1 Test Requirement:.....	14
6.1.2 Conclusion.....	14
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence.....	15
6.2.1 Test Requirement:.....	15
6.2.2 Conclusion.....	15
7 Radio Spectrum Matter Test Results	16
7.1 Conducted Peak Output Power.....	16
7.1.1 E.U.T. Operation.....	17
7.1.2 Test Setup Diagram.....	17
7.1.3 Measurement Procedure and Data.....	17
7.2 20dB Bandwidth.....	18
7.2.1 E.U.T. Operation.....	18
7.2.2 Test Setup Diagram.....	18
7.2.3 Measurement Procedure and Data.....	18
7.3 Carrier Frequencies Separation.....	19
7.3.1 E.U.T. Operation.....	19
7.3.2 Test Setup Diagram.....	19
7.3.3 Measurement Procedure and Data.....	19
7.4 Hopping Channel Number.....	20
7.4.1 E.U.T. Operation.....	20
7.4.2 Test Setup Diagram.....	20
7.4.3 Measurement Procedure and Data.....	20
7.5 Dwell Time.....	21
7.5.1 E.U.T. Operation.....	21
7.5.2 Test Setup Diagram.....	21
7.5.3 Measurement Procedure and Data.....	21
7.6 Conducted Band Edges Measurement.....	22
7.6.1 E.U.T. Operation.....	23
7.6.2 Test Setup Diagram.....	23



7.6.3	Measurement Procedure and Data	23
7.7	Conducted Spurious Emissions	24
7.7.1	E.U.T. Operation	24
7.7.2	Test Setup Diagram	24
7.7.3	Measurement Procedure and Data	24
7.8	Radiated Emissions which fall in the restricted bands	25
7.8.1	E.U.T. Operation	26
7.8.2	Test Setup Diagram	26
7.8.3	Measurement Procedure and Data	27
7.9	Radiated Spurious Emissions	30
7.9.1	E.U.T. Operation	31
7.9.2	Test Setup Diagram	31
7.9.3	Measurement Procedure and Data	32
8	Appendix	37
8.1	Appendix 15.247	37



4 General Information

4.1 Details of E.U.T.

Power Supply:	DC 5.0V supplied by USB port for battery charging. DC 3.7V 130mAh built-in battery for normal working.
Test Voltage:	DC 3.7V
Port:	Micro USB port
Cable:	N/A
Antenna Gain	2 dBi
Antenna Type	Integrated Antenna
Versions:	Bluetooth 4.1+ EDR classic only
Channel Spacing	1MHz
Modulation Type	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channels	79
Operation Frequency	2402MHz to 2480MHz
Spectrum Spread Technology	Frequency Hopping Spread Spectrum(FHSS)

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	Lenovo	T430u	REF. No.SEA1800



4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 5.5 \times 10^{-8}$
2	Duty cycle	$\pm 0.57\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF Conducted power	$\pm 0.68\text{dB}$
5	RF Power Density	$\pm 1.50\text{dB}$
6	Conducted Spurious Emissions	$\pm 1.04\text{dB}$
7	RF Radiated Power	$\pm 4.5\text{dB}$ (below 1GHz)
		$\pm 4.8\text{dB}$ (above 1GHz)
8	Radiated Spurious Emission Test	$\pm 4.5\text{dB}$ (30MHz-1GHz)
		$\pm 4.8\text{dB}$ (1GHz-18GHz)
9	Temperature	$\pm 0.4^\circ\text{C}$
10	Humidity	$\pm 1.3\%$
11	Supply Voltages	$\pm 1.5\%$
12	Time	$\pm 3\%$

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

● **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

● **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

● **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to

ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

● **FCC Recognized 2.948 Listed Test Firm(Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

● **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

● **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

● **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

● **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

20dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Carrier Frequencies Separation					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Hopping Channel Number					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Dwell Time					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
Page: 11 of 83

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer	AgilentTechnologies	N9020A	SEM004-10	2018-03-10	2019-03-09
ESG Vector Signal Generator	Keysight	E4438C	SEM006-03	2018-04-10	2019-04-10
EXG Analog Signal Generator	AgilentTechnologies	N5171B	SEM006-04	2017-07-26	2020-07-25
Power Meter	AgilentTechnologies	U2021XA_Ch2	SEM009-02	2018-09-20	2019-09-19
Power Meter	AgilentTechnologies	U2021XA_Ch3	SEM009-03	2018-09-20	2019-09-19
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EXA Signal Analyzer	AgilentTechnologies	N9010A	EMC2138	2017-11-15	2018-11-14
6dB Attenuator	HP	8491A	EMC2062	2018-04-04	2020-04-03
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
 Page: 12 of 83

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9168	SEM003-18	2016-06-29	2019-06-28
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
Page: 13 of 83

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver	Rohde & Schwarz	ESIB26	EMC0522	2018-01-19	2019-01-18
EMI Test Receiver	Rohde & Schwarz	ESCI	EMC0056	2018-01-19	2019-01-18
Chamber cable	HangTianXing	N/A	EMC0542	2017-06-30	2019-06-30
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9160	EMC2025	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6112B	EMC0524	2016-09-08	2019-09-07
Bi-log Type Antenna	Schaffner -Chase	CBL6143	EMC0519	2017-05-04	2020-05-03
Horn Antenna 1GHz-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2016-09-09	2019-09-08
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2018-01-08	2019-01-07
Amplifier	HP	8447F	EMC2065	2018-06-01	2019-05-31
Pre-Amplifier MH648A	ANRITSU CORP	MH648A	EMC2086	2017-11-20	2018-11-19
Active Loop Antenna	EMCO	6502	EMC0523	2018-02-24	2019-02-23
High Pass Filter(915MHz)	FSY MICROWAVE	HM1465-9SS	EMC2079	2018-01-19	2019-01-18
2.4GHz Filter	Micro-Tronics	BRM 50702	EMC2069	2018-01-08	2019-01-07
10m Semi-Anechoic Chamber	ETS	N/A	EMC0530	2017-06-18	2019-06-18
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2017-11-29	2018-11-28
MXE EMI Receiver	Keysight	N9038A	EMC2139	2017-11-15	2018-11-14
EXA Signal Analyzer	Keysight	N9010A	EMC2138	2017-11-15	2018-11-14
Trilog Broadband Antenna 30MHz-1GHz	SCHWARZBECKME SS-ELEKTRONIK	VULB 9168	SEM003-18	2016-06-29	2019-06-28
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2018-07-20	2019-07-19
DMM	Fluke	73	EMC0007	2018-07-19	2019-07-18

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(c)


6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

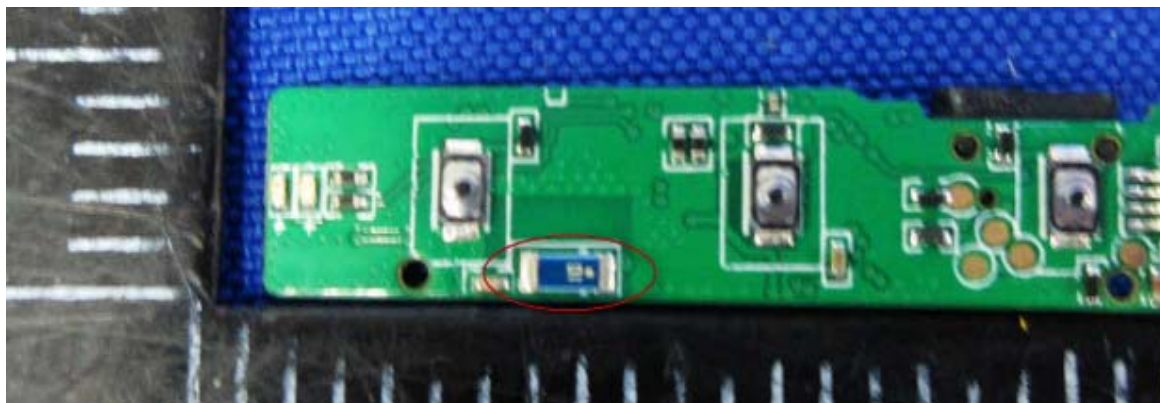

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.



6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence

6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

6.2.2 Conclusion

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence: $2^9 - 1 = 511$ bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum bands



7 Radio Spectrum Matter Test Results

7.1 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)
Test Method: ANSI C63.10 (2013) Section 7.8.5
Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 55.3 % RH Atmospheric Pressure: 1020 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

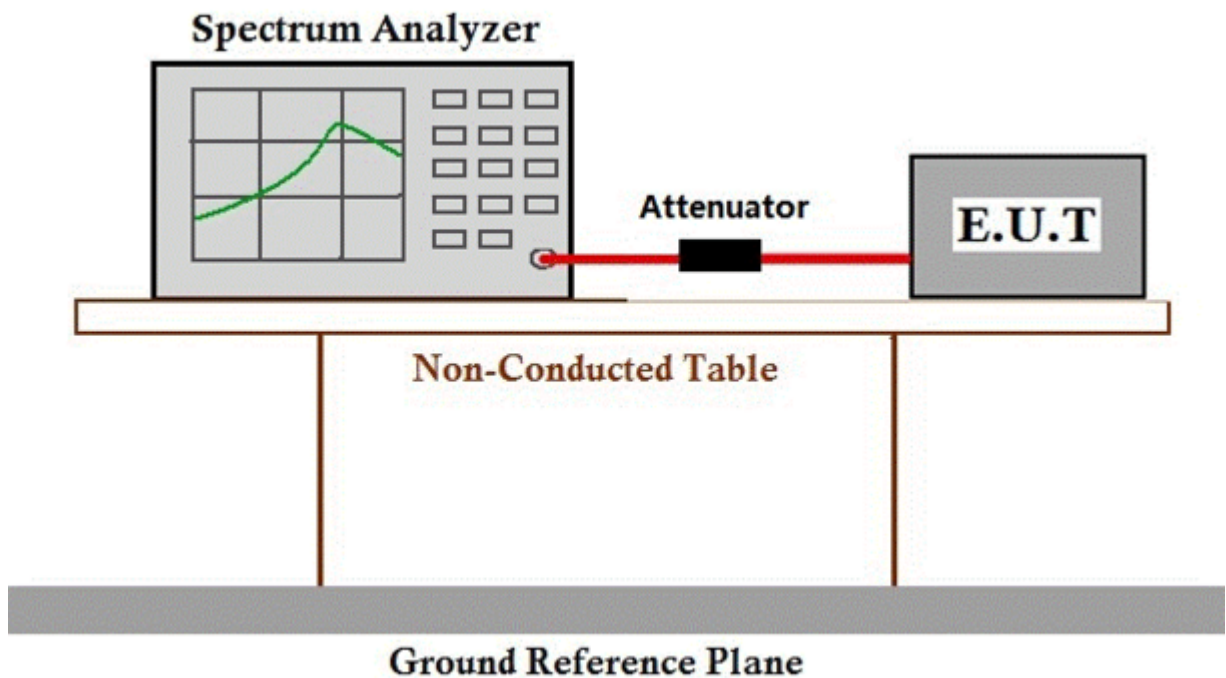

7.1.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.2 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)
 Test Method: ANSI C63.10 (2013) Section 7.8.7


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 55.4 % RH Atmospheric Pressure: 1020 mbar

Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

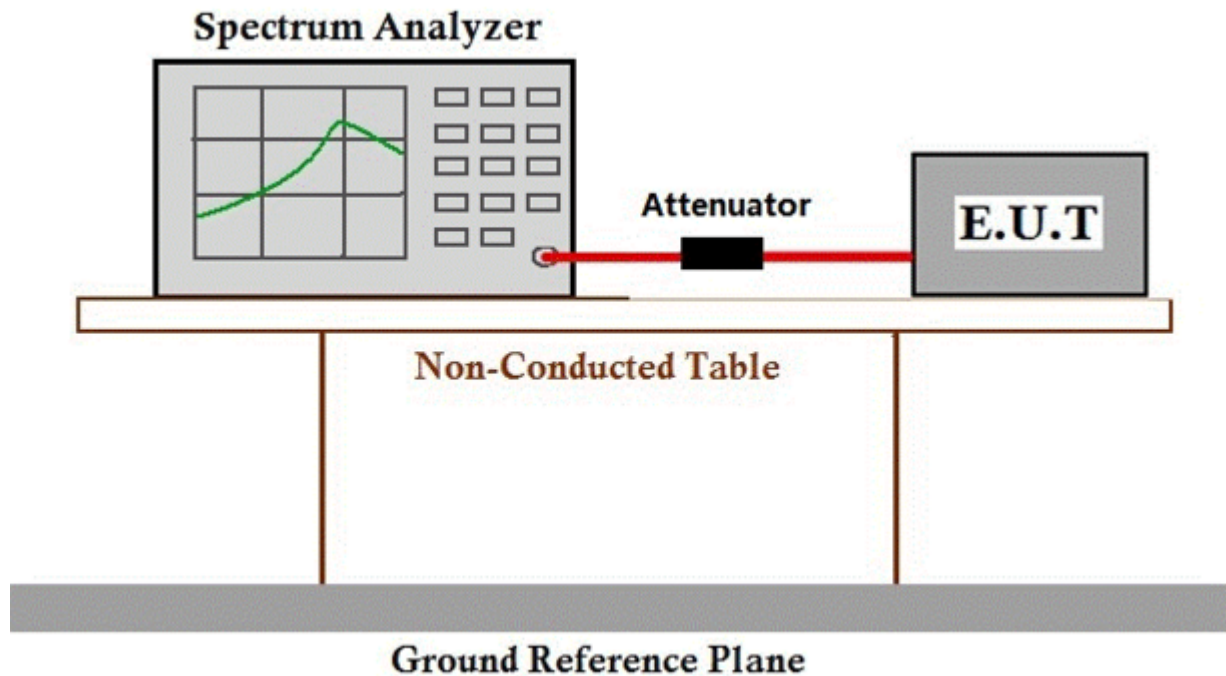

7.2.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.3 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)
Test Method: ANSI C63.10 (2013) Section 7.8.2
Limit: 2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 24.6 °C Humidity: 55.3 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

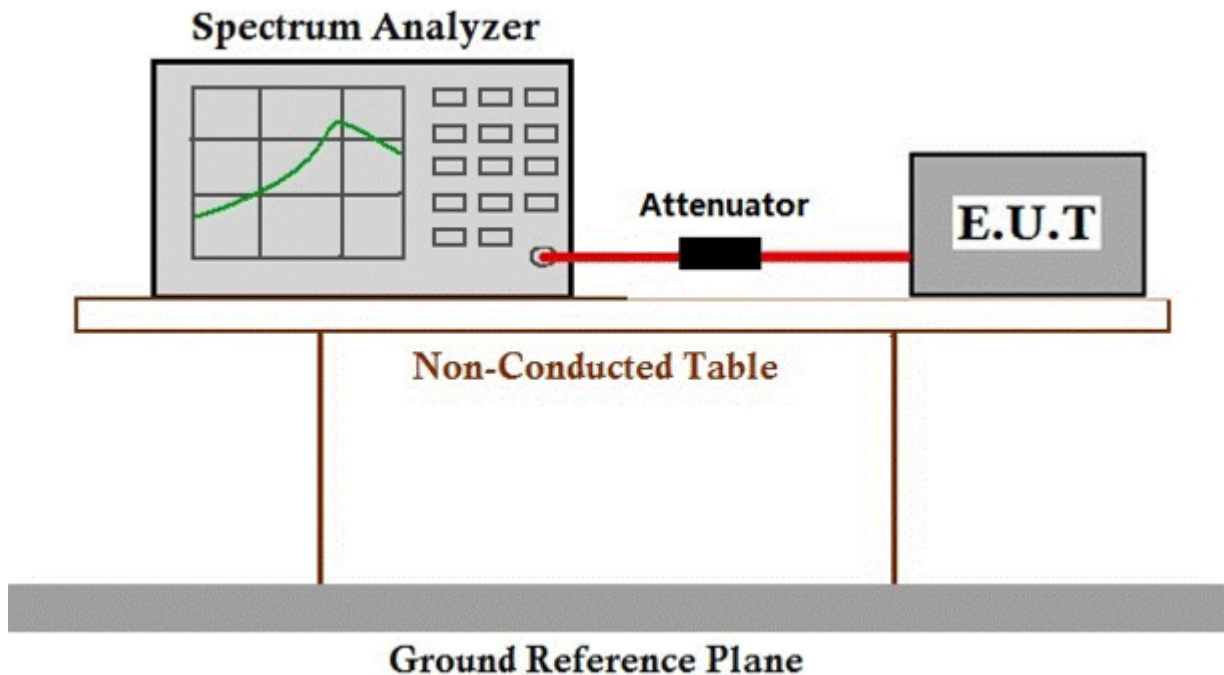

7.3.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.4 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.3
Limit:


Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.6 °C Humidity: 55.2 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

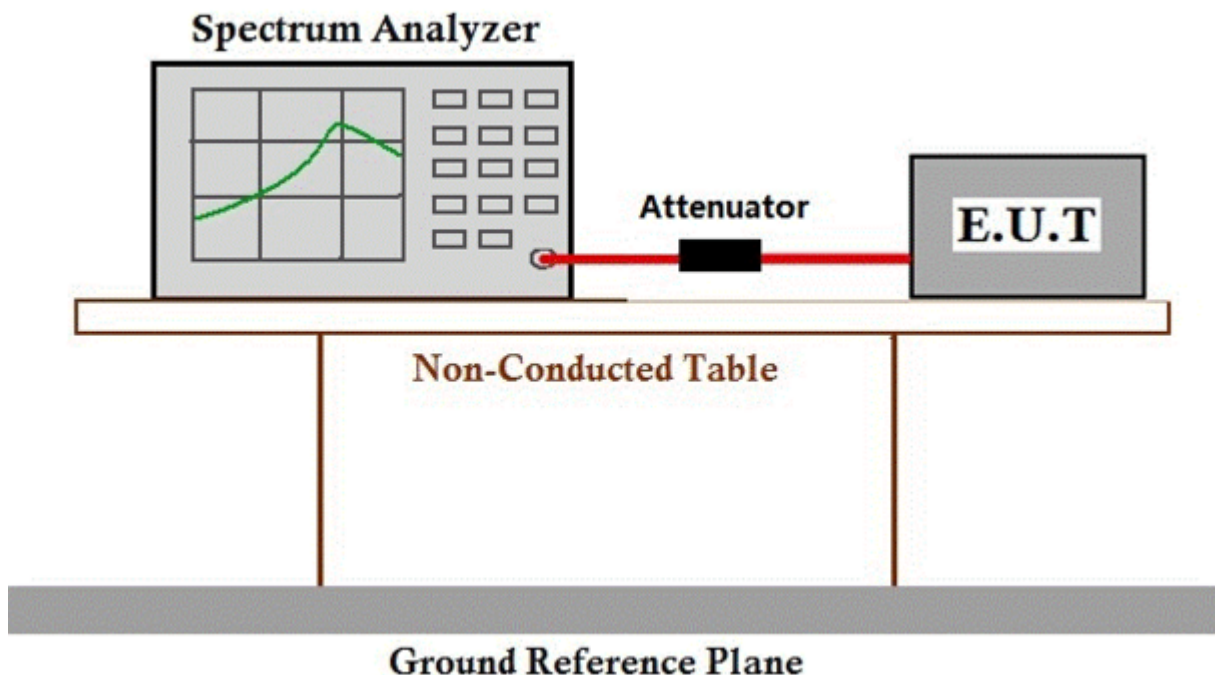

7.4.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247

7.5 Dwell Time


Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)
Test Method: ANSI C63.10 (2013) Section 7.8.4
Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

7.5.1 E.U.T. Operation

Operating Environment:
Temperature: 24.6 °C Humidity: 55.2 % RH Atmospheric Pressure: 1020 mbar
Test mode a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, π/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

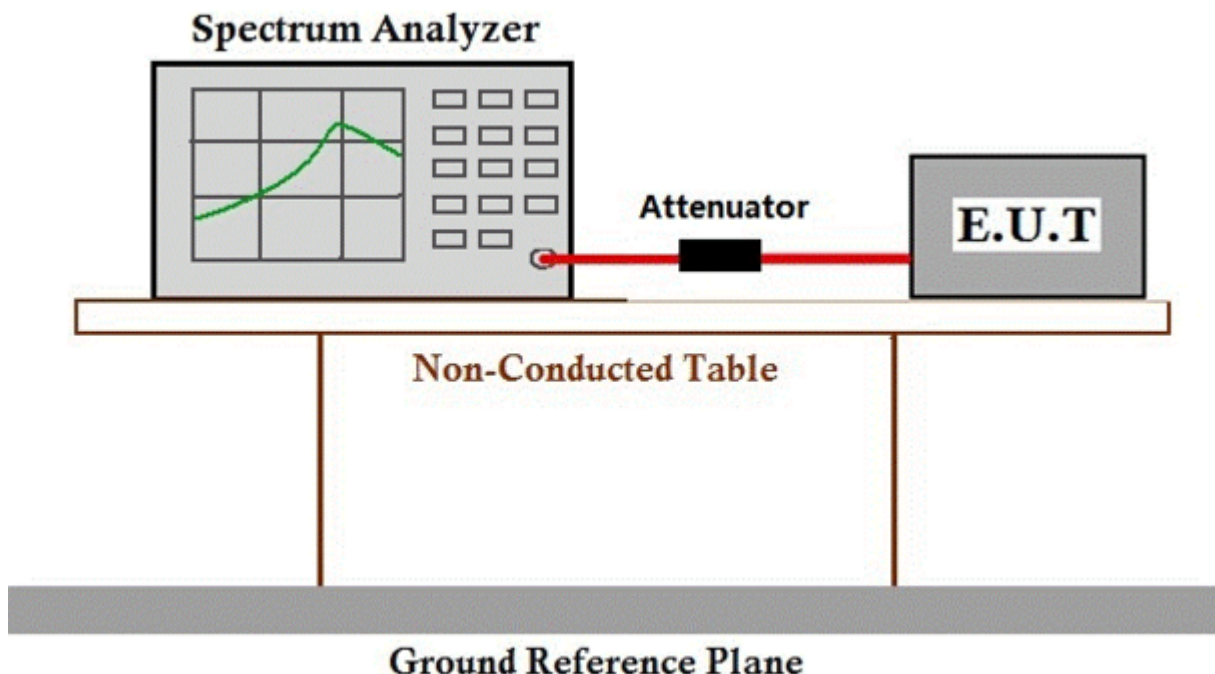

7.5.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



7.6 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 7.8.6
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.6.1 E.U.T. Operation


Operating Environment:

Temperature: 24.6 °C Humidity: 55.1 % RH Atmospheric Pressure: 1020 mbar

Pretest these modes to find the worst case: a:TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

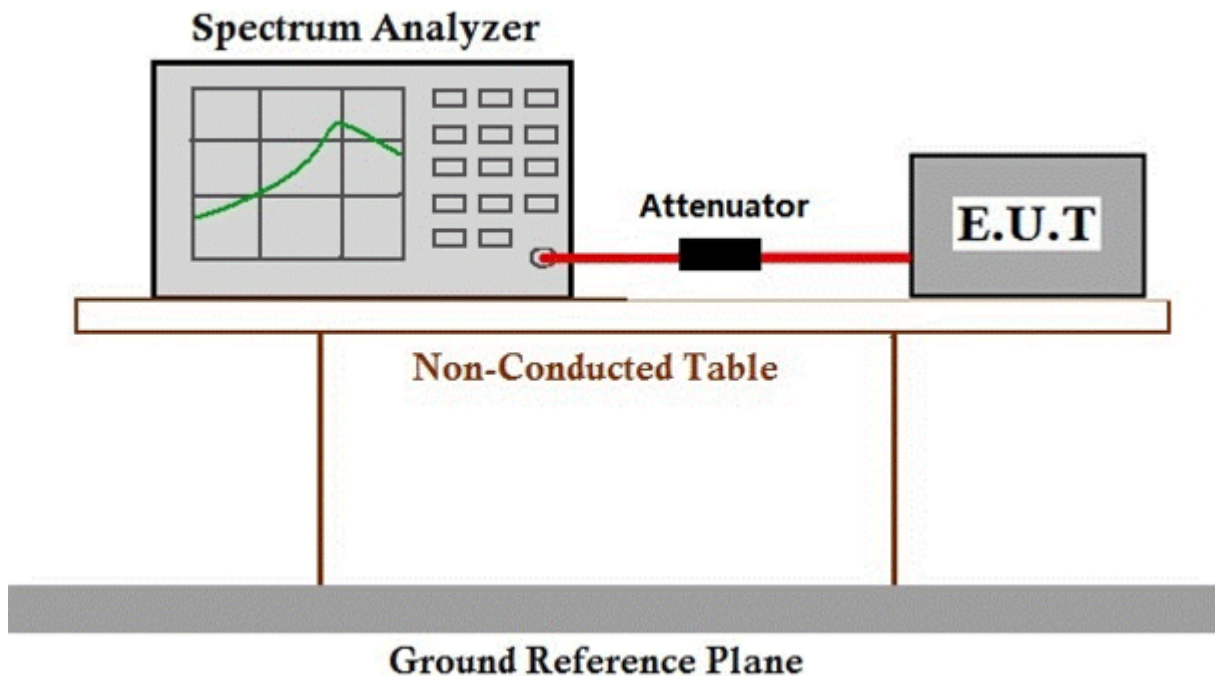

7.6.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247


7.7 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
Test Method: ANSI C63.10 (2013) Section 7.8.8
Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.7.1 E.U.T. Operation

Operating Environment:
 Temperature: 24.6 °C Humidity: 55.1 % RH Atmospheric Pressure: 1020 mbar
Test mode b:TX_non-Hop mode Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram

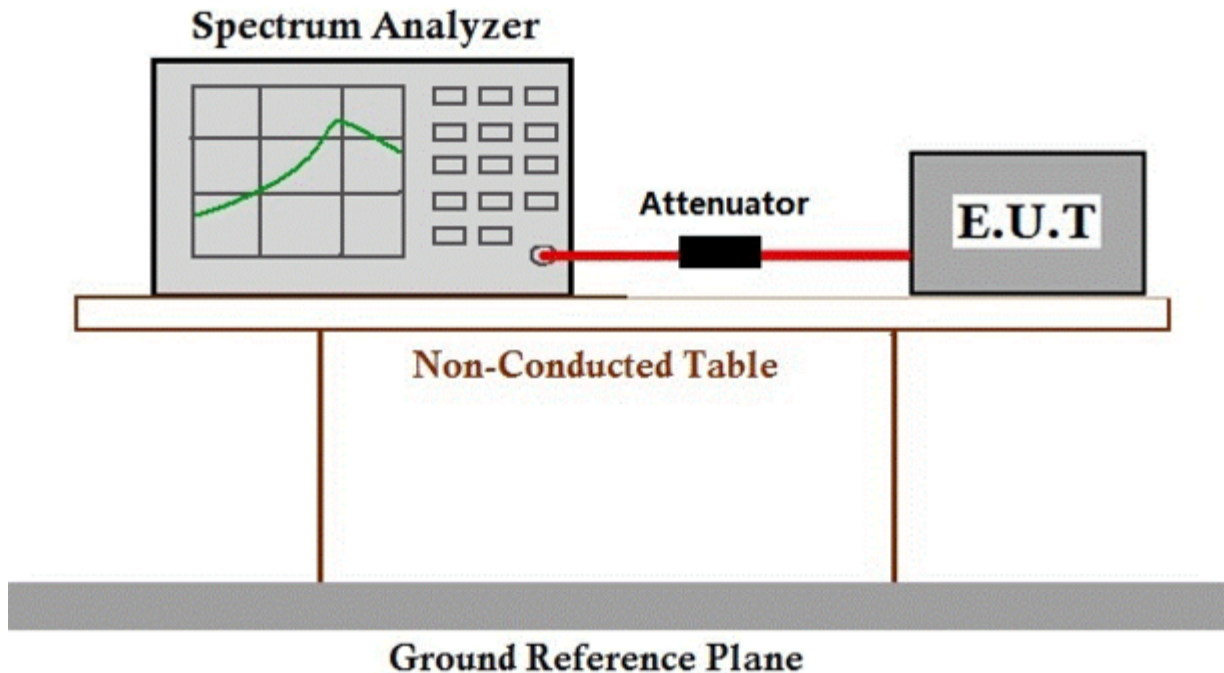

7.7.3 Measurement Procedure and Data

The detailed test data see: Appendix 15.247



7.8 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C Humidity: 68.9 % RH Atmospheric Pressure: 1020 mbar


Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram


9kHz to 30MHz

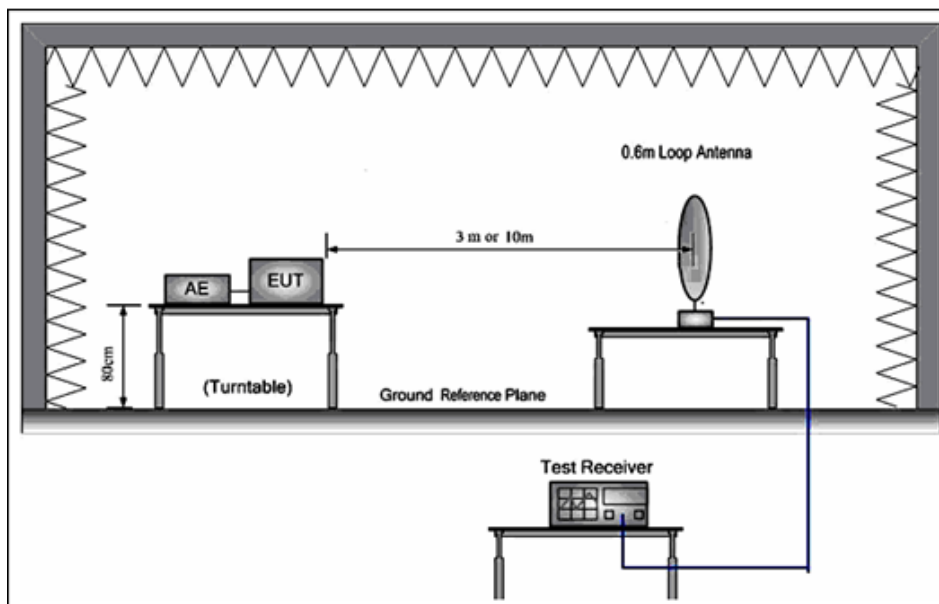

30MHz to 1GHz

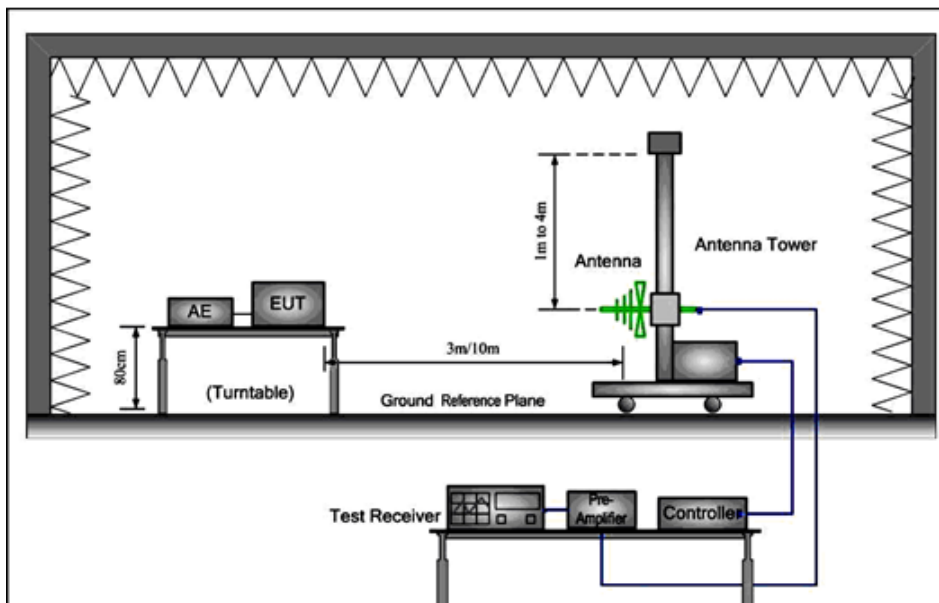

Above 1GHz

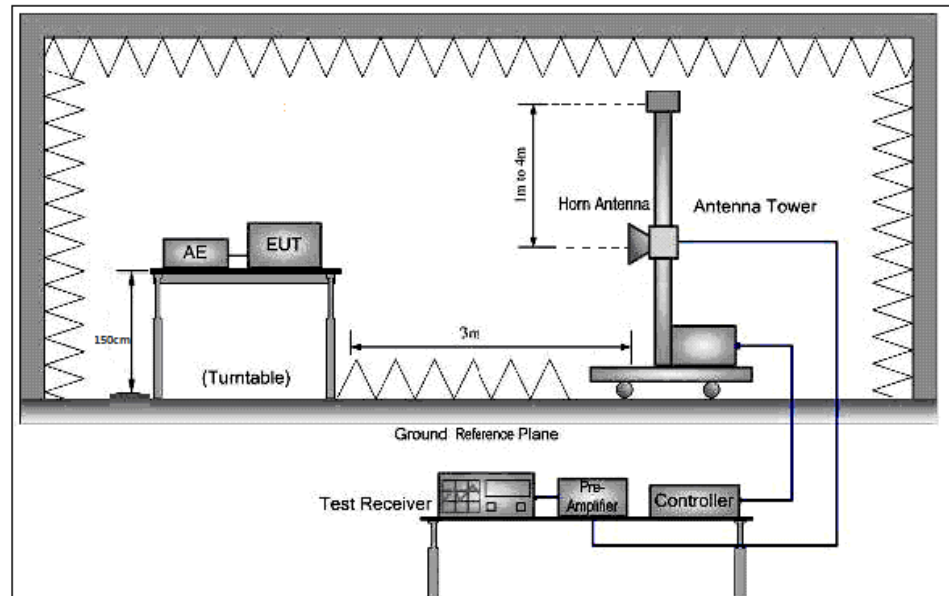

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

$\text{Level} = \text{Read Level} + \text{Antenna Factor} + \text{Cable Loss} - \text{Preamp Factor}$



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
 Page: 28 of 83

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	31.79	26.25	5.03	37.44	25.63	54.00	-28.37	HORIZONTAL	Average
2	2310.000	46.53	26.25	5.03	37.44	40.37	74.00	-33.63	HORIZONTAL	Peak
3	2390.000	32.73	26.43	4.88	37.42	26.62	54.00	-27.38	HORIZONTAL	Average
4	2390.000	46.74	26.43	4.88	37.42	40.63	74.00	-33.37	HORIZONTAL	Peak
5	2483.500	32.74	26.58	5.23	37.40	27.15	54.00	-26.85	HORIZONTAL	Average
6	2483.500	45.46	26.58	5.23	37.40	39.87	74.00	-34.13	HORIZONTAL	Peak
7	2500.000	31.41	26.60	4.95	37.39	25.57	54.00	-28.43	HORIZONTAL	Average
8	2500.000	46.12	26.60	4.95	37.39	40.28	74.00	-33.72	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	32.70	26.25	5.03	37.44	26.54	54.00	-27.46	VERTICAL	Average
2	2310.000	46.12	26.25	5.03	37.44	39.96	74.00	-34.04	VERTICAL	Peak
3	2390.000	31.90	26.43	4.88	37.42	25.79	54.00	-28.21	VERTICAL	Average
4	2390.000	46.26	26.43	4.88	37.42	40.15	74.00	-33.85	VERTICAL	Peak
5	2483.500	31.78	26.58	5.23	37.40	26.19	54.00	-27.81	VERTICAL	Average
6	2483.500	45.51	26.58	5.23	37.40	39.92	74.00	-34.08	VERTICAL	Peak
7	2500.000	32.92	26.60	4.95	37.39	27.08	54.00	-26.92	VERTICAL	Average
8	2500.000	47.18	26.60	4.95	37.39	41.34	74.00	-32.66	VERTICAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
Page: 29 of 83

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	31.00	26.25	5.03	37.44	24.84	54.00	-29.16	HORIZONTAL	Average
2	2310.000	45.75	26.25	5.03	37.44	39.59	74.00	-34.41	HORIZONTAL	Peak
3	2390.000	30.47	26.43	4.88	37.42	24.36	54.00	-29.64	HORIZONTAL	Average
4	2390.000	45.15	26.43	4.88	37.42	39.04	74.00	-34.96	HORIZONTAL	Peak
5	2483.500	33.27	26.58	5.23	37.40	27.68	54.00	-26.32	HORIZONTAL	Average
6	2483.500	45.51	26.58	5.23	37.40	39.92	74.00	-34.08	HORIZONTAL	Peak
7	2500.000	31.38	26.60	4.95	37.39	25.54	54.00	-28.46	HORIZONTAL	Average
8	2500.000	45.62	26.60	4.95	37.39	39.78	74.00	-34.22	HORIZONTAL	Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level	Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	2310.000	30.08	26.25	5.03	37.44	23.92	54.00	-30.08	VERTICAL	Average
2	2310.000	45.46	26.25	5.03	37.44	39.30	74.00	-34.70	VERTICAL	Peak
3	2390.000	31.33	26.43	4.88	37.42	25.22	54.00	-28.78	VERTICAL	Average
4	2390.000	45.69	26.43	4.88	37.42	39.58	74.00	-34.42	VERTICAL	Peak
5	2483.500	29.38	26.58	5.23	37.40	23.79	54.00	-30.21	VERTICAL	Average
6	2483.500	46.03	26.58	5.23	37.40	40.44	74.00	-33.56	VERTICAL	Peak
7	2500.000	30.05	26.60	4.95	37.39	24.21	54.00	-29.79	VERTICAL	Average
8	2500.000	45.77	26.60	4.95	37.39	39.93	74.00	-34.07	VERTICAL	Peak



7.9 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.9.1 E.U.T. Operation


Operating Environment:

Temperature: 24.9 °C Humidity: 68.9 % RH Atmospheric Pressure: 1020 mbar


Test mode b:TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, $\pi/4$ DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

7.9.2 Test Setup Diagram

30MHz to 1GHz

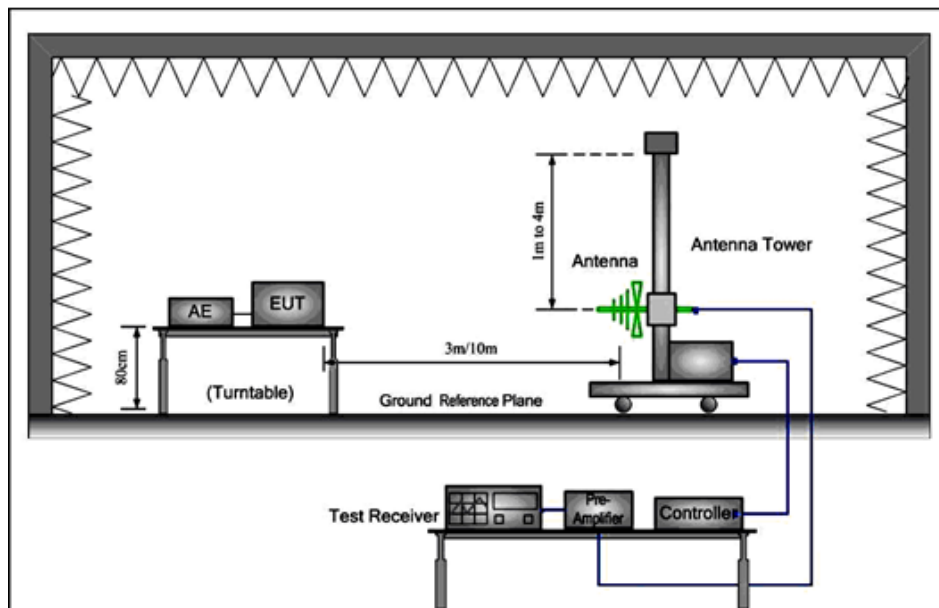

Above 1GHz

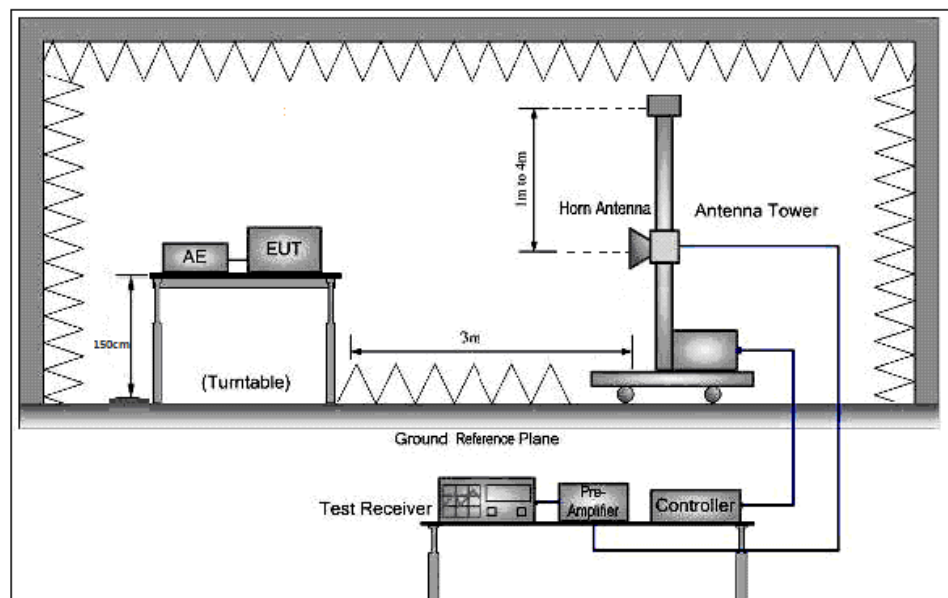



7.9.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
 Page: 33 of 83

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	40.702	22.28	12.62	0.62	23.76	11.76	40.00	-28.24	HORIZONTAL	QP
2	65.803	25.12	11.30	0.67	25.42	11.67	40.00	-28.33	HORIZONTAL	QP
3	132.685	27.04	12.66	0.98	28.17	12.51	43.50	-30.99	HORIZONTAL	QP
4	167.824	27.39	13.14	1.30	28.09	13.74	43.50	-29.76	HORIZONTAL	QP
5	750.108	28.90	22.11	3.01	29.10	24.92	46.00	-21.08	HORIZONTAL	QP
6	919.287	28.03	24.16	3.74	28.43	27.50	46.00	-18.50	HORIZONTAL	QP

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	3779.422	26.94	28.92	7.78	36.92	26.72	54.00	-27.28	HORIZONTAL	Average
2	3779.422	44.78	28.92	7.78	36.92	44.56	74.00	-29.44	HORIZONTAL	Peak
3	4804.110	32.01	30.79	5.87	36.94	31.73	54.00	-22.27	HORIZONTAL	Average
4	4804.110	47.88	30.79	5.87	36.94	47.60	74.00	-26.40	HORIZONTAL	Peak
5	7206.474	30.67	35.45	7.34	36.93	36.53	54.00	-17.47	HORIZONTAL	Average
6	7206.474	43.89	35.45	7.34	36.93	49.75	74.00	-24.25	HORIZONTAL	Peak
7	9047.272	28.70	36.57	8.29	37.02	36.54	54.00	-17.46	HORIZONTAL	Average
8	9047.272	42.92	36.57	8.29	37.02	50.76	74.00	-23.24	HORIZONTAL	Peak
9	9608.600	27.73	37.51	8.15	37.08	36.31	54.00	-17.69	HORIZONTAL	Average
10	9608.600	42.60	37.51	8.15	37.08	51.18	74.00	-22.82	HORIZONTAL	Peak
11	12010.850	25.30	39.50	10.67	37.20	38.27	54.00	-15.73	HORIZONTAL	Average
12	12010.850	39.98	39.50	10.67	37.20	52.95	74.00	-21.05	HORIZONTAL	Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
 Page: 34 of 83

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	38.752	22.81	12.58	0.54	23.51	12.42	40.00	-27.58	VERTICAL QP
2	49.359	22.53	12.99	0.61	24.83	11.30	40.00	-28.70	VERTICAL QP
3	64.887	24.58	11.50	0.65	25.38	11.35	40.00	-28.65	VERTICAL QP
4	120.277	27.54	11.52	0.92	28.19	11.79	43.50	-31.71	VERTICAL QP
5	153.200	28.02	13.32	1.22	28.11	14.45	43.50	-29.05	VERTICAL QP
6	925.756	28.13	24.23	3.70	28.37	27.69	46.00	-18.31	VERTICAL QP

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:Low

	Freq	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	4804.041	31.40	30.79	5.87	36.94	31.12	54.00	-22.88	VERTICAL Average
2	4804.041	46.84	30.79	5.87	36.94	46.56	74.00	-27.44	VERTICAL Peak
3	6377.195	27.97	33.91	6.99	36.99	31.88	54.00	-22.12	VERTICAL Average
4	6377.195	43.15	33.91	6.99	36.99	47.06	74.00	-26.94	VERTICAL Peak
5	7206.474	29.61	35.45	7.34	36.93	35.47	54.00	-18.53	VERTICAL Average
6	7206.474	44.20	35.45	7.34	36.93	50.06	74.00	-23.94	VERTICAL Peak
7	8917.462	27.98	36.45	8.14	37.00	35.57	54.00	-18.43	VERTICAL Average
8	8917.462	42.90	36.45	8.14	37.00	50.49	74.00	-23.51	VERTICAL Peak
9	9608.789	25.89	37.51	8.15	37.08	34.47	54.00	-19.53	VERTICAL Average
10	9608.789	41.96	37.51	8.15	37.08	50.54	74.00	-23.46	VERTICAL Peak
11	12010.390	24.14	39.50	10.67	37.20	37.11	54.00	-16.89	VERTICAL Average
12	12010.390	40.22	39.50	10.67	37.20	53.19	74.00	-20.81	VERTICAL Peak



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM181000124401
 Page: 35 of 83

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3823.371	27.47	29.08	7.83	36.91	27.47	54.00	-26.53	HORIZONTAL Average
2	3823.371	44.67	29.08	7.83	36.91	44.67	74.00	-29.33	HORIZONTAL Peak
3	4882.043	31.37	30.95	6.86	36.95	32.23	54.00	-21.77	HORIZONTAL Average
4	4882.043	45.15	30.95	6.86	36.95	46.01	74.00	-27.99	HORIZONTAL Peak
5	7323.778	28.91	35.74	7.39	36.92	35.12	54.00	-18.88	HORIZONTAL Average
6	7323.778	42.69	35.74	7.39	36.92	48.90	74.00	-25.10	HORIZONTAL Peak
7	8368.069	27.38	36.18	8.11	36.93	34.74	54.00	-19.26	HORIZONTAL Average
8	8368.069	42.85	36.18	8.11	36.93	50.21	74.00	-23.79	HORIZONTAL Peak
9	9764.880	28.27	37.70	8.33	37.09	37.21	54.00	-16.79	HORIZONTAL Average
10	9764.880	41.82	37.70	8.33	37.09	50.76	74.00	-23.24	HORIZONTAL Peak
11	12205.930	26.33	39.21	10.98	37.06	39.46	54.00	-14.54	HORIZONTAL Average
12	12205.930	39.22	39.21	10.98	37.06	52.35	74.00	-21.65	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:middle

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3901.516	33.39	29.30	7.56	36.91	33.34	54.00	-20.66	VERTICAL Average
2	3901.516	45.16	29.30	7.56	36.91	45.11	74.00	-28.89	VERTICAL Peak
3	4882.662	32.04	30.95	6.86	36.95	32.90	54.00	-21.10	VERTICAL Average
4	4882.662	46.82	30.95	6.86	36.95	47.68	74.00	-26.32	VERTICAL Peak
5	7323.542	28.92	35.74	7.39	36.92	35.13	54.00	-18.87	VERTICAL Average
6	7323.542	42.84	35.74	7.39	36.92	49.05	74.00	-24.95	VERTICAL Peak
7	8539.102	27.41	36.13	8.00	36.94	34.60	54.00	-19.40	VERTICAL Average
8	8539.102	42.83	36.13	8.00	36.94	50.02	74.00	-23.98	VERTICAL Peak
9	9764.991	28.62	37.70	8.33	37.09	37.56	54.00	-16.44	VERTICAL Average
10	9764.991	41.79	37.70	8.33	37.09	50.73	74.00	-23.27	VERTICAL Peak
11	12205.270	26.30	39.21	10.98	37.06	39.43	54.00	-14.57	VERTICAL Average
12	12205.270	39.62	39.21	10.98	37.06	52.75	74.00	-21.25	VERTICAL Peak



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

Report No.: GZEM181000124401
Page: 36 of 83

Mode:b; Polarization:Horizontal; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3969.767	32.18	29.44	7.32	36.90	32.04	54.00	-21.96	HORIZONTAL Average
2	3969.767	44.47	29.44	7.32	36.90	44.33	74.00	-29.67	HORIZONTAL Peak
3	4960.721	29.02	31.05	7.84	36.96	30.95	54.00	-23.05	HORIZONTAL Average
4	4960.721	43.18	31.05	7.84	36.96	45.11	74.00	-28.89	HORIZONTAL Peak
5	7440.527	30.91	35.92	7.43	36.92	37.34	54.00	-16.66	HORIZONTAL Average
6	7440.527	43.67	35.92	7.43	36.92	50.10	74.00	-23.90	HORIZONTAL Peak
7	8764.146	29.53	36.33	8.00	36.97	36.89	54.00	-17.11	HORIZONTAL Average
8	8764.146	42.24	36.33	8.00	36.97	49.60	74.00	-24.40	HORIZONTAL Peak
9	9920.221	28.75	37.92	8.63	37.10	38.20	54.00	-15.80	HORIZONTAL Average
10	9920.221	42.45	37.92	8.63	37.10	51.90	74.00	-22.10	HORIZONTAL Peak
11	12400.100	26.09	38.93	11.17	36.90	39.29	54.00	-14.71	HORIZONTAL Average
12	12400.100	40.27	38.93	11.17	36.90	53.47	74.00	-20.53	HORIZONTAL Peak

Mode:b; Polarization:Vertical; Modulation:GFSK; ; Channel:High

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit	Over	Pol/Phase	Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	3867.831	31.11	29.22	7.69	36.91	31.11	54.00	-22.89	VERTICAL Average
2	3867.831	44.23	29.22	7.69	36.91	44.23	74.00	-29.77	VERTICAL Peak
3	4960.662	30.33	31.05	7.84	36.96	32.26	54.00	-21.74	VERTICAL Average
4	4960.662	45.29	31.05	7.84	36.96	47.22	74.00	-26.78	VERTICAL Peak
5	7440.150	28.96	35.92	7.43	36.92	35.39	54.00	-18.61	VERTICAL Average
6	7440.150	43.41	35.92	7.43	36.92	49.84	74.00	-24.16	VERTICAL Peak
7	8563.818	27.41	36.15	7.99	36.94	34.61	54.00	-19.39	VERTICAL Average
8	8563.818	42.46	36.15	7.99	36.94	49.66	74.00	-24.34	VERTICAL Peak
9	9920.717	27.89	37.92	8.63	37.10	37.34	54.00	-16.66	VERTICAL Average
10	9920.717	42.56	37.92	8.63	37.10	52.01	74.00	-21.99	VERTICAL Peak
11	12400.700	26.99	38.93	11.17	36.90	40.19	54.00	-13.81	VERTICAL Average
12	12400.700	40.36	38.93	11.17	36.90	53.56	74.00	-20.44	VERTICAL Peak





8 Appendix


8.1 Appendix 15.247

1.20 dB Bandwidth


Test Mode	Test Channel	OBW[MHz]	EBW[MHz]	2/3 EBW[MHz]	Limit[MHz]	Verdict
DH5	2402	0.8762	0.9988	0.6659	---	PASS
DH5	2441	0.8776	0.9862	0.6575	---	PASS
DH5	2480	0.8811	0.9850	0.6567	---	PASS
2DH5	2402	1.2287	1.328	0.8853	---	PASS
2DH5	2441	1.2115	1.324	0.8827	---	PASS
2DH5	2480	1.1815	1.301	0.8673	---	PASS
3DH5	2402	1.2201	1.321	0.8807	---	PASS
3DH5	2441	1.2034	1.317	0.8780	---	PASS
3DH5	2480	1.1765	1.306	0.8707	---	PASS

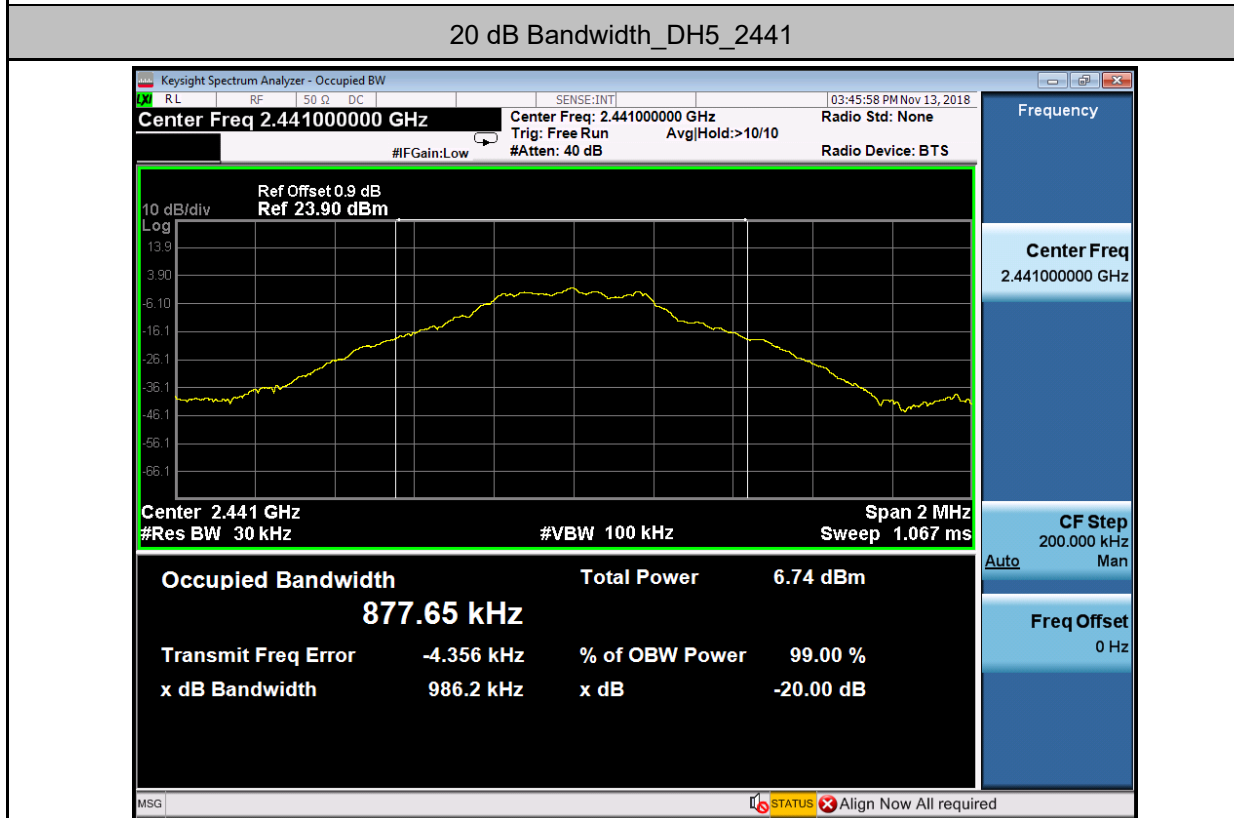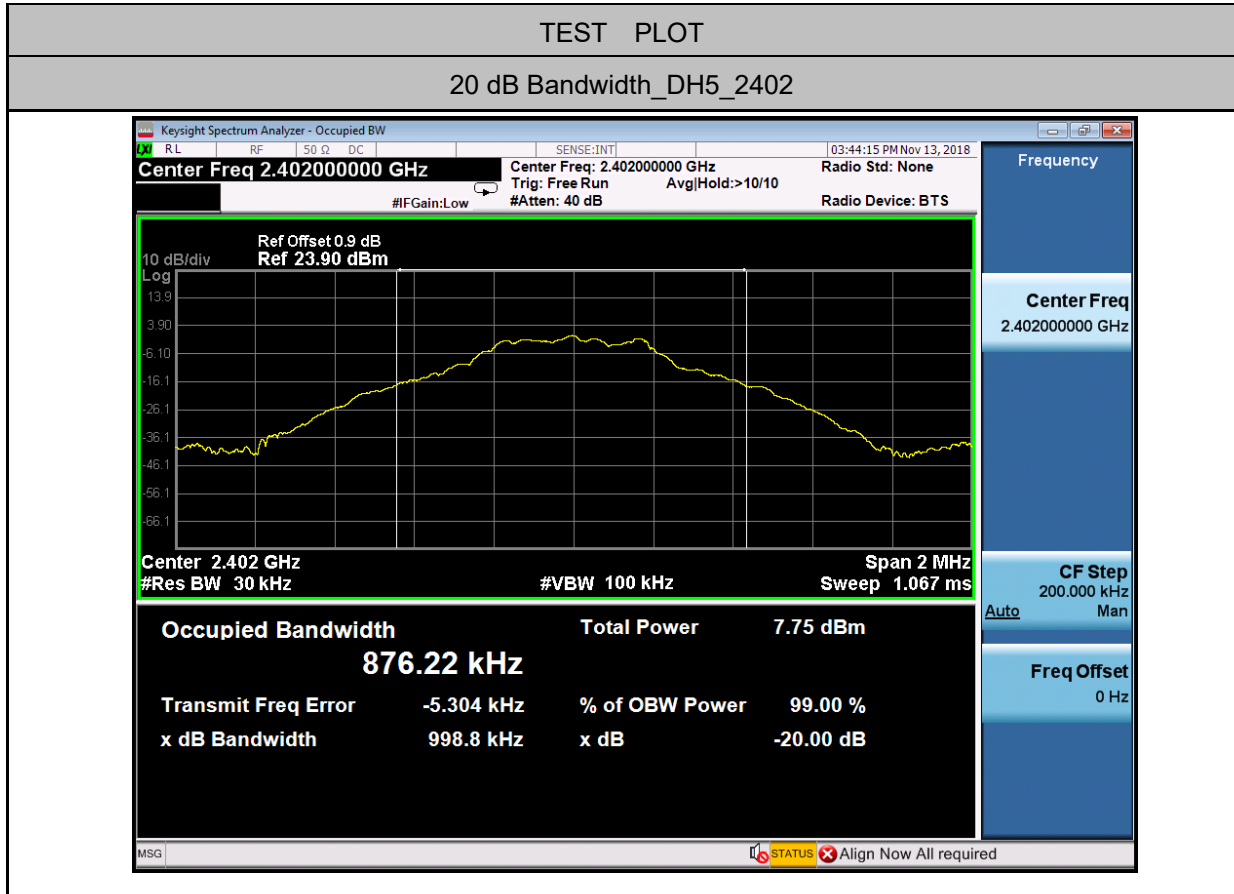


20 dB Bandwidth_DH5_2480

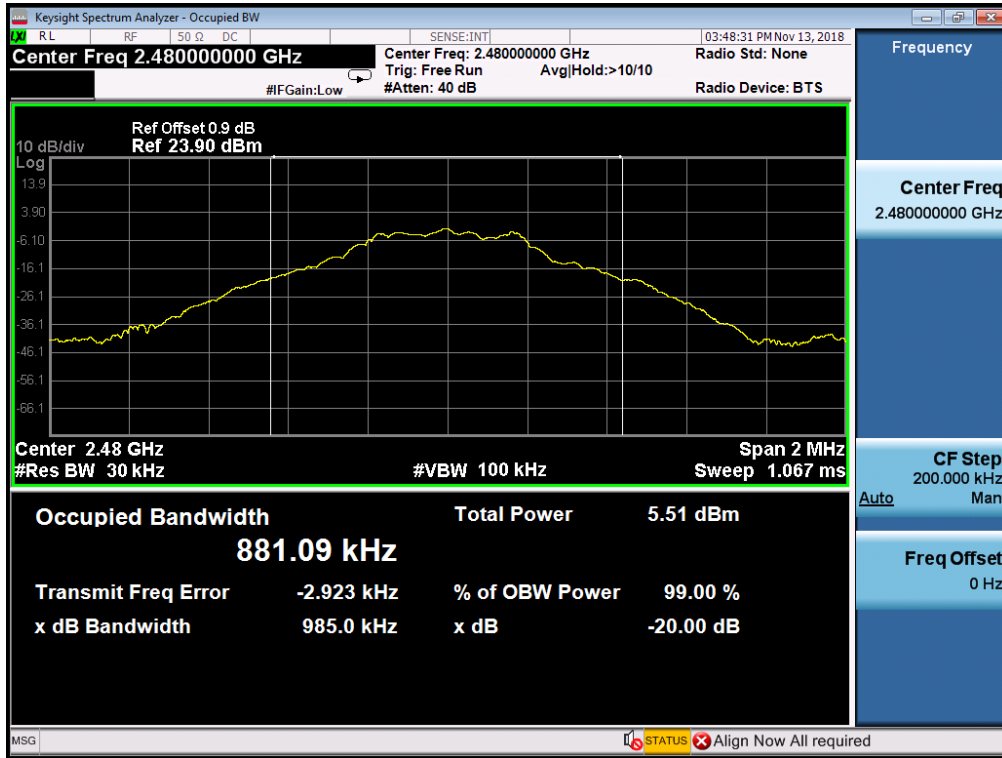


20 dB Bandwidth_2DH5_2402

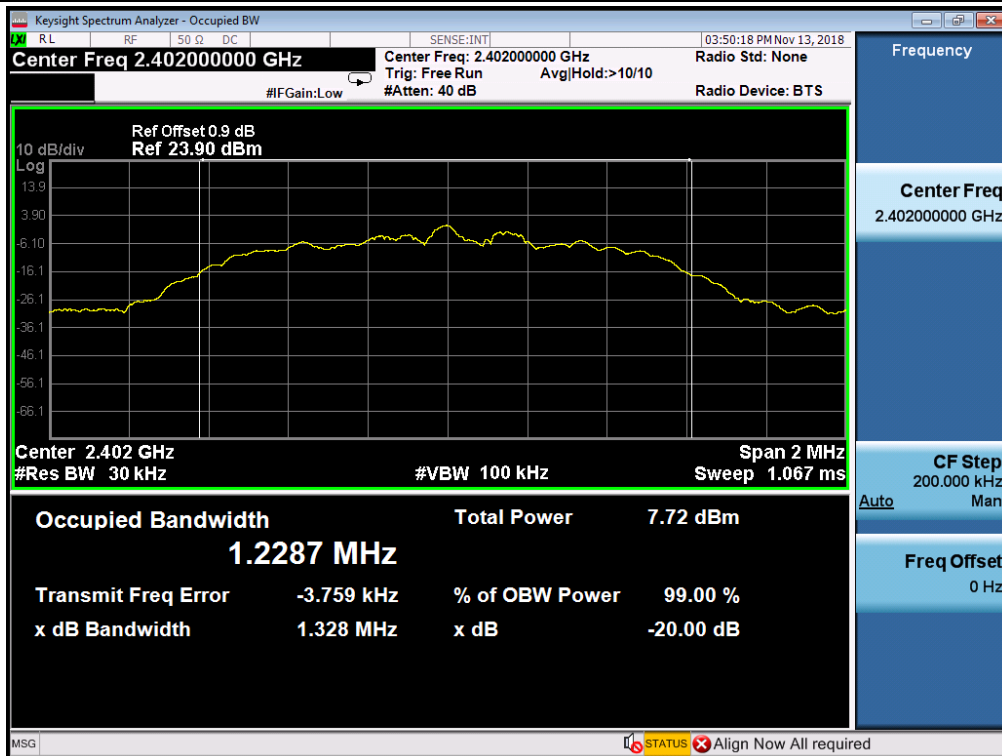


20 dB Bandwidth_2DH5_2441

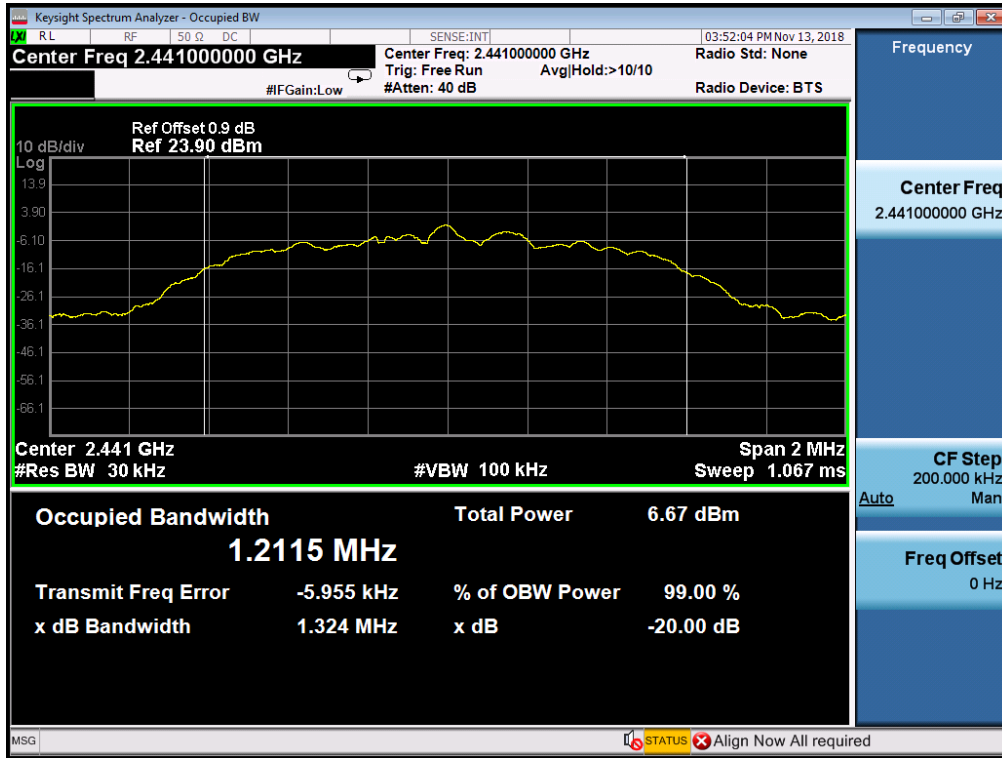


20 dB Bandwidth_2DH5_2480

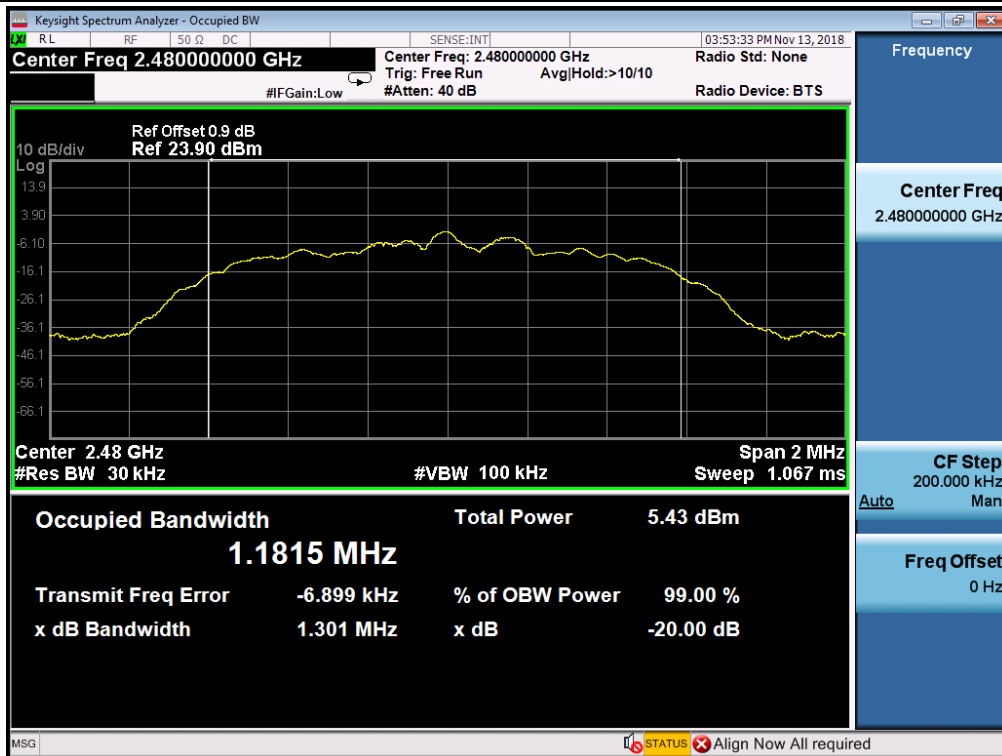


20 dB Bandwidth_3DH5_2402

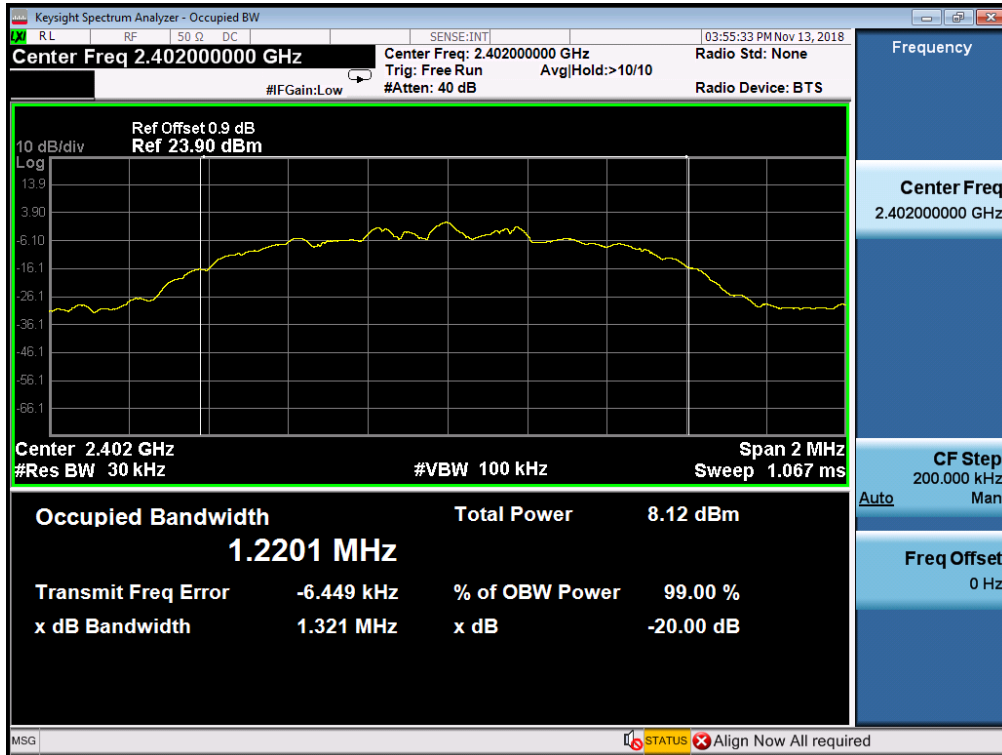

20 dB Bandwidth_3DH5_2441

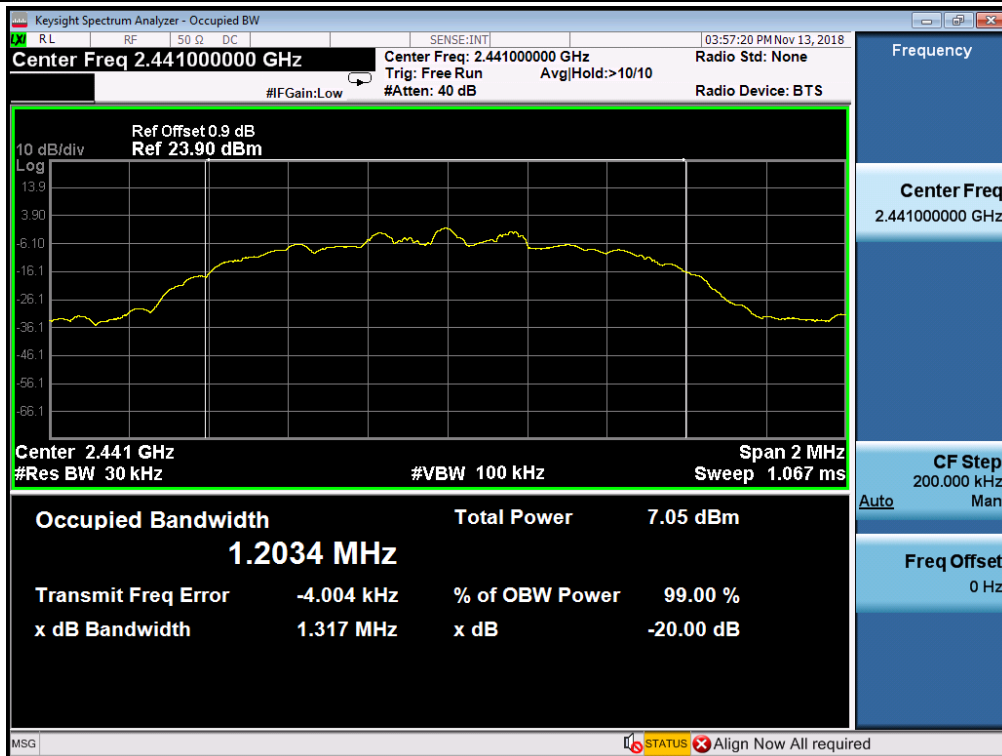

20 dB Bandwidth_3DH5_2480

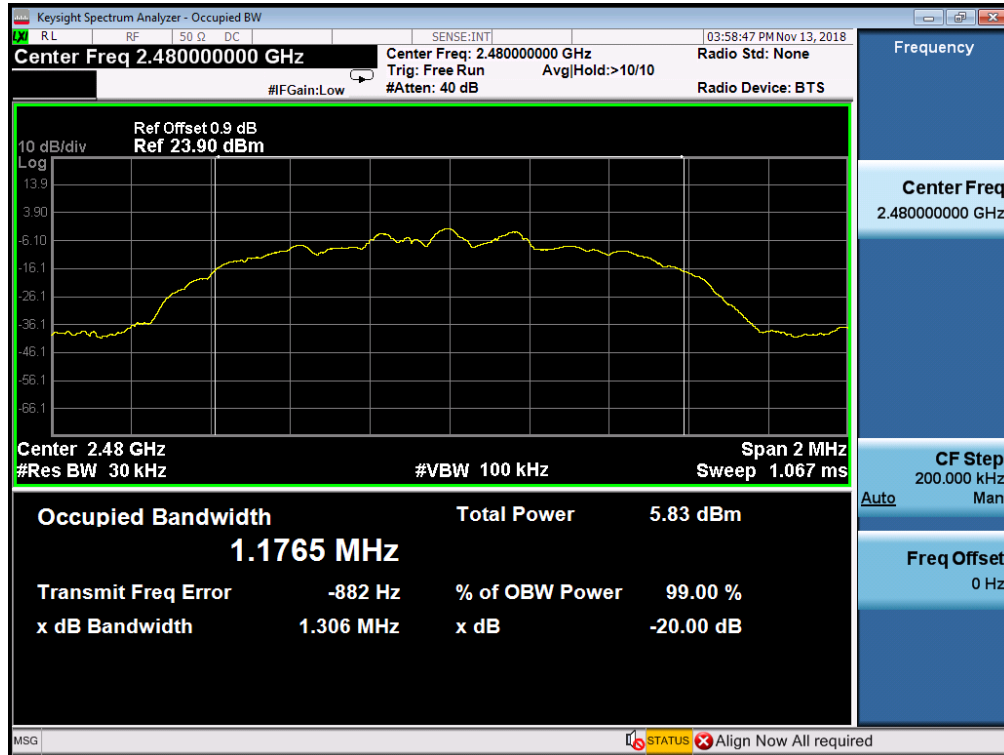




2. Conducted Peak Output Power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
DH5	2402	0.561	21	PASS
DH5	2441	-0.417	21	PASS
DH5	2480	-1.548	21	PASS
2DH5	2402	0.597	21	PASS
2DH5	2441	-0.391	21	PASS
2DH5	2480	-1.474	21	PASS
3DH5	2402	0.658	21	PASS
3DH5	2441	-0.306	21	PASS
3DH5	2480	-1.419	21	PASS

TEST PLOT

Conducted Peak Output Power_DH5_2402

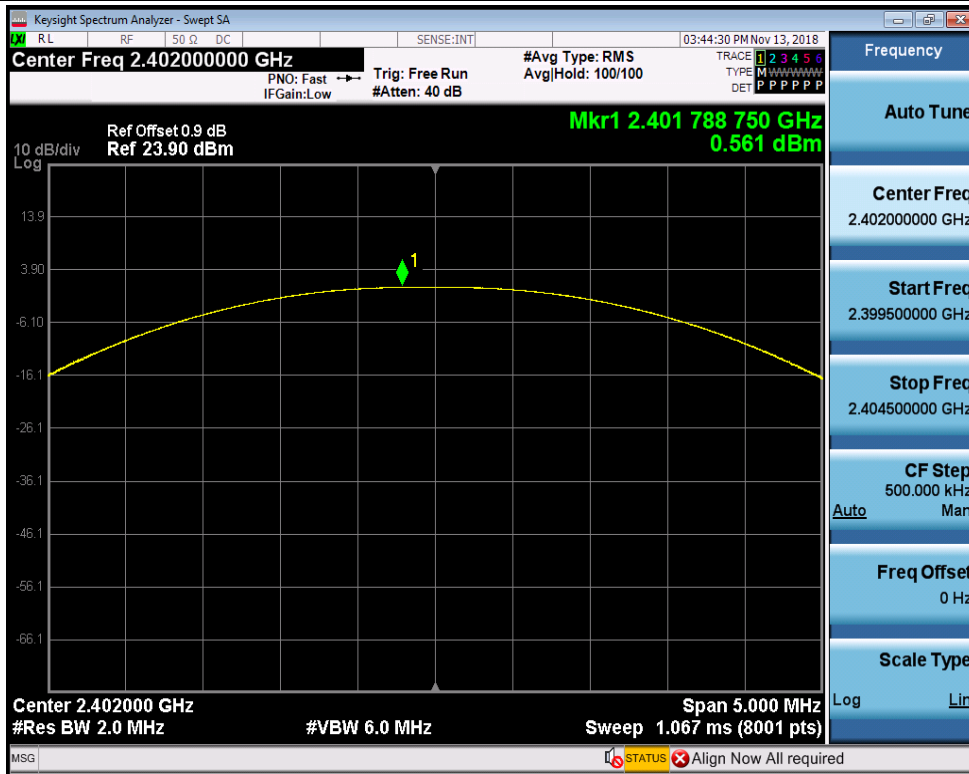

Conducted Peak Output Power_DH5_2441




Conducted Peak Output Power_DH5_2480




Conducted Peak Output Power_2DH5_2402




Conducted Peak Output Power_2DH5_2441

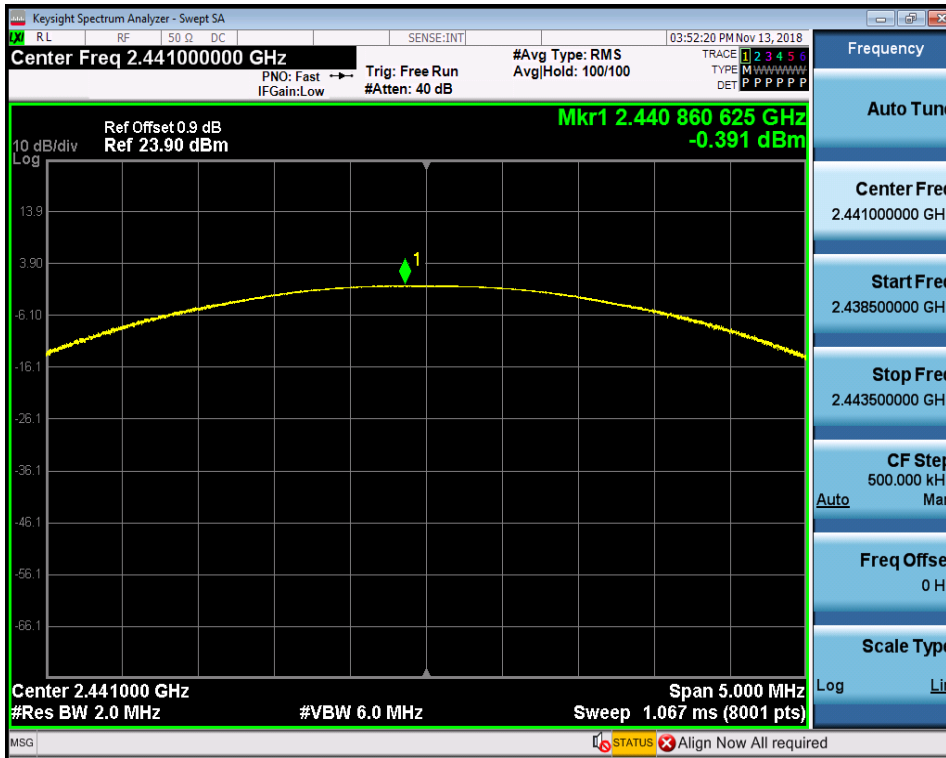


Conducted Peak Output Power_2DH5_2480

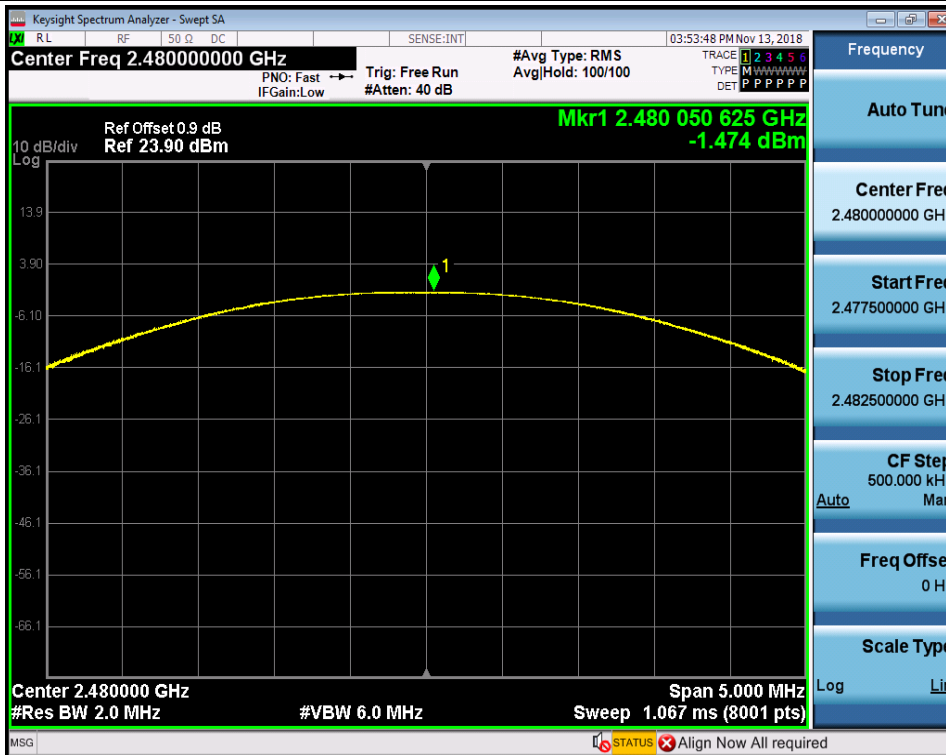


Conducted Peak Output Power_3DH5_2402

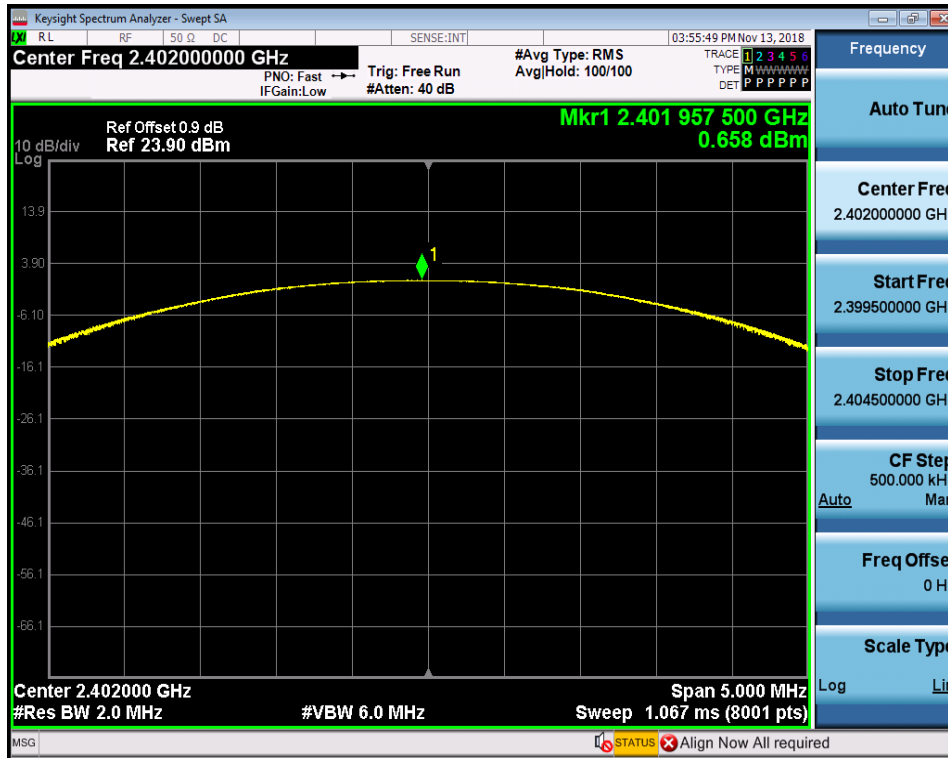

Conducted Peak Output Power_3DH5_2441

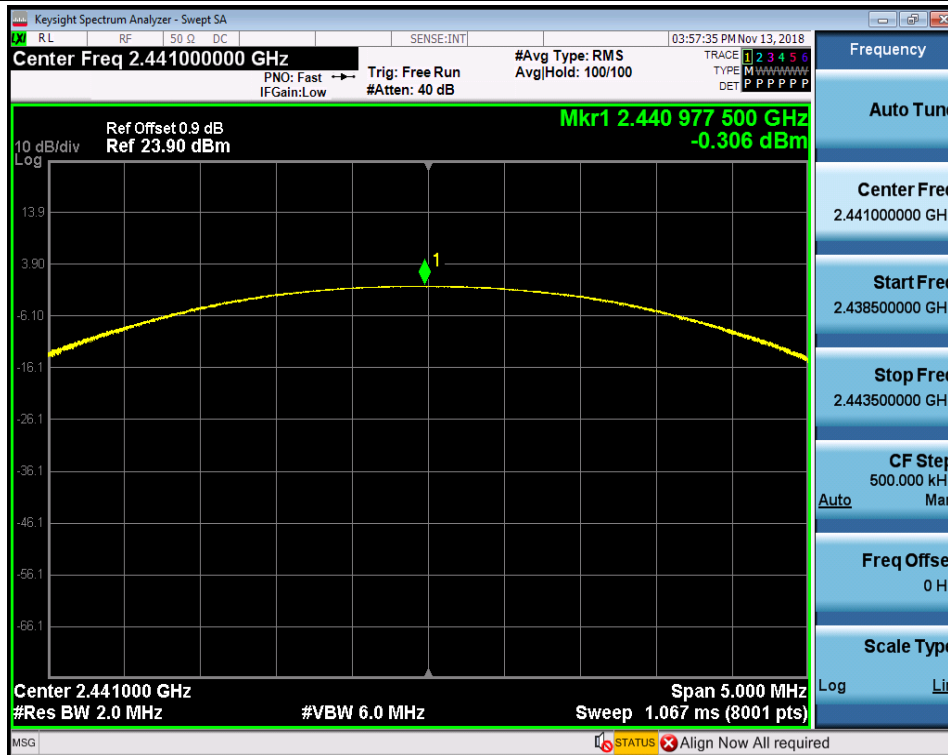

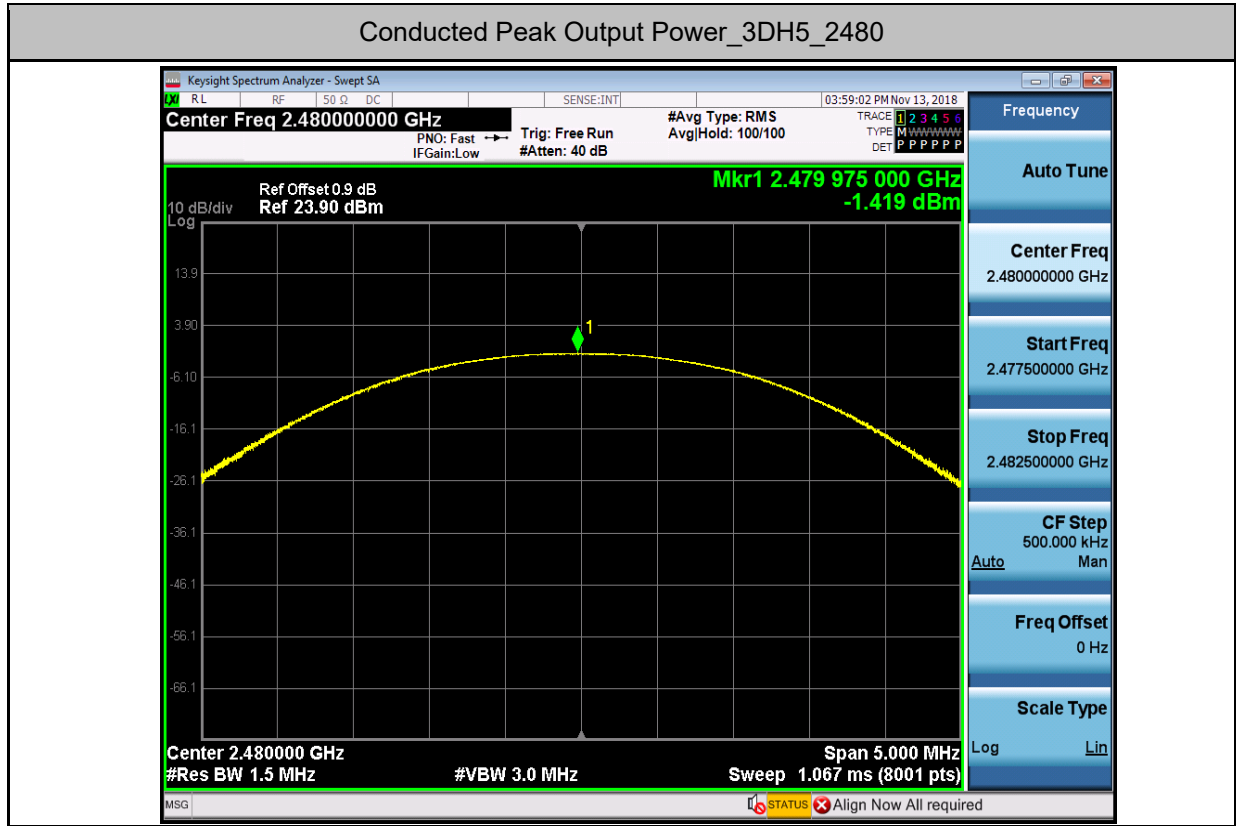


3.Carrier Frequency Separation


Test Mode	Test Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	2402	1.006	0.6659	PASS
DH5	2441	0.969	0.6575	PASS
DH5	2480	0.999	0.6567	PASS

TEST PLOT

Carrier Frequency Separation_DH5_2402

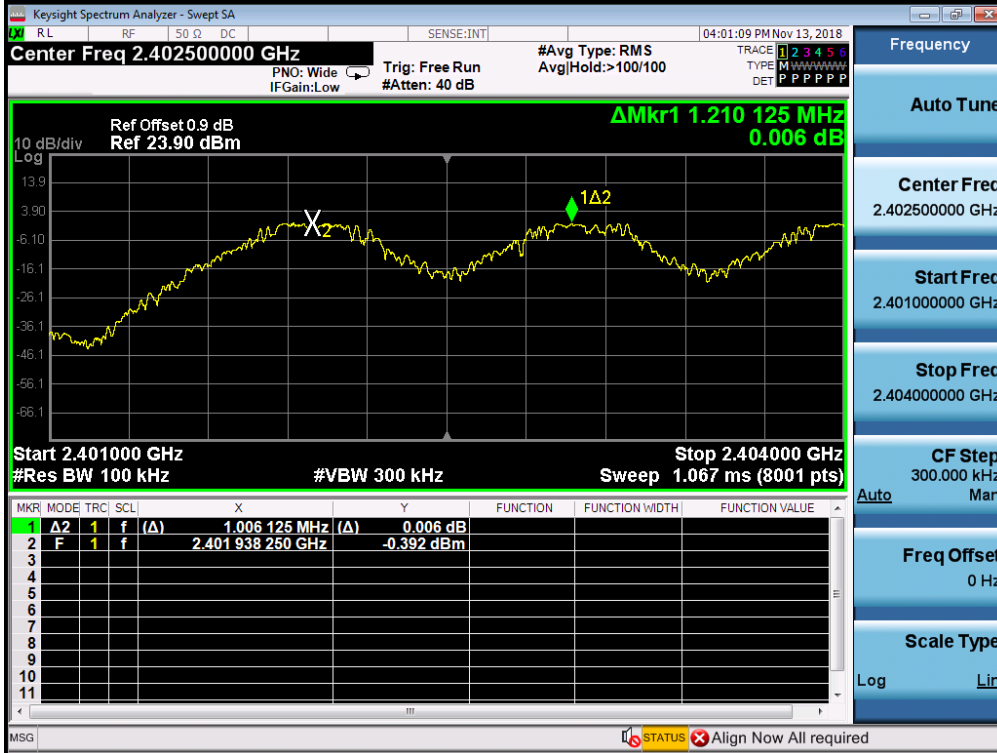

Carrier Frequency Separation_DH5_2441

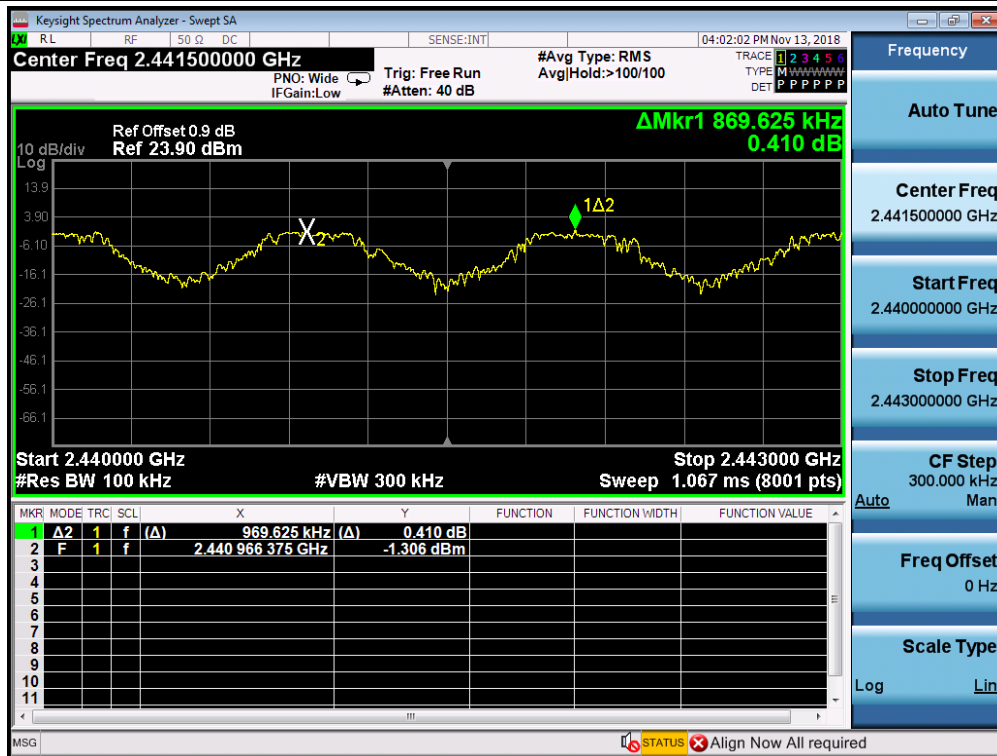

Carrier Frequency Separation_DH5_2480





4.Dwell Time



Test Mode	Test Channel	Burst Width[ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Limit[s]	Verdict
DH5	2402	2.91	60	0.17	0.4	PASS
DH5	2441	2.91	70	0.20	0.4	PASS
DH5	2480	2.91	60	0.17	0.4	PASS
2DH5	2402	2.91	80	0.23	0.4	PASS
2DH5	2441	2.91	80	0.23	0.4	PASS
2DH5	2480	2.92	80	0.23	0.4	PASS
3DH5	2402	2.92	70	0.20	0.4	PASS
3DH5	2441	2.92	70	0.20	0.4	PASS
3DH5	2480	2.92	70	0.20	0.4	PASS

TEST PLOT



Dwell Time_DH5_2402

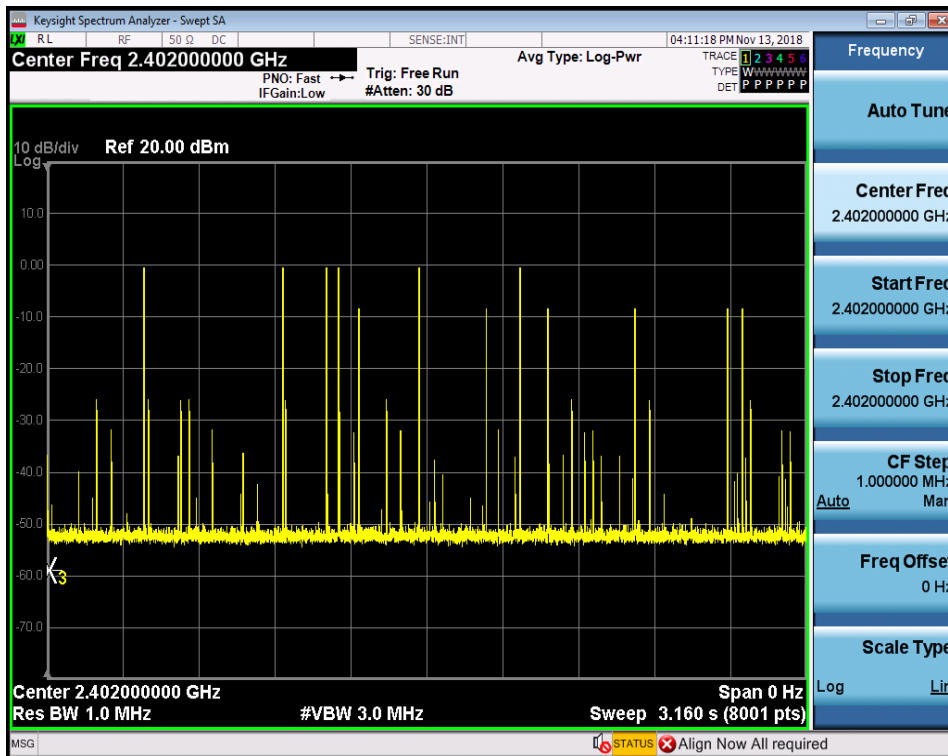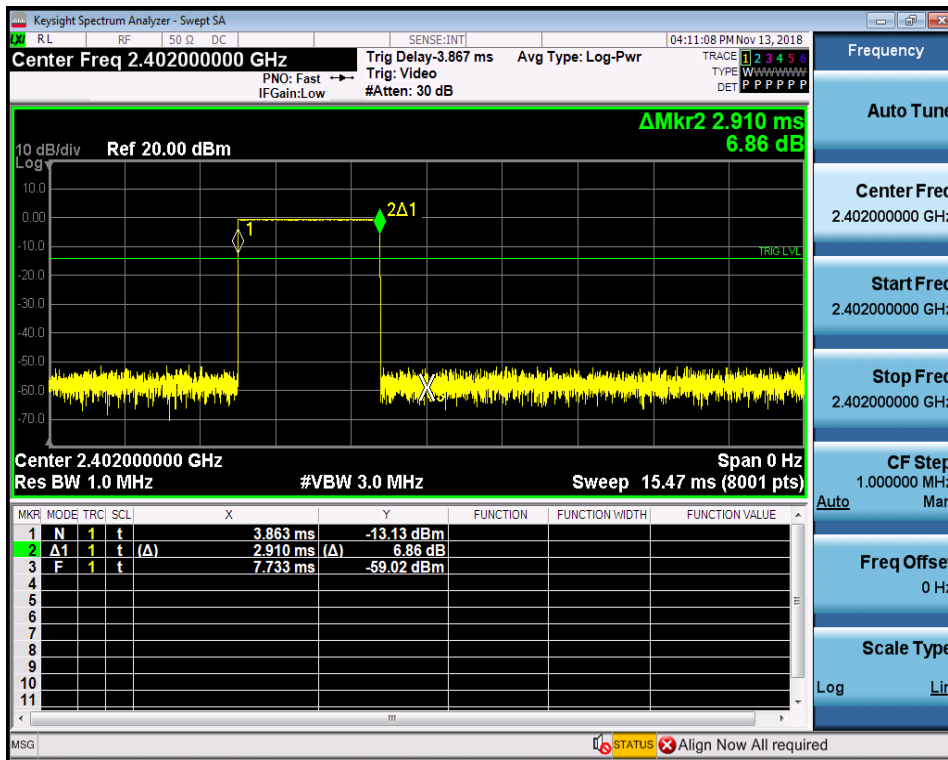



Dwell Time_DH5_2441

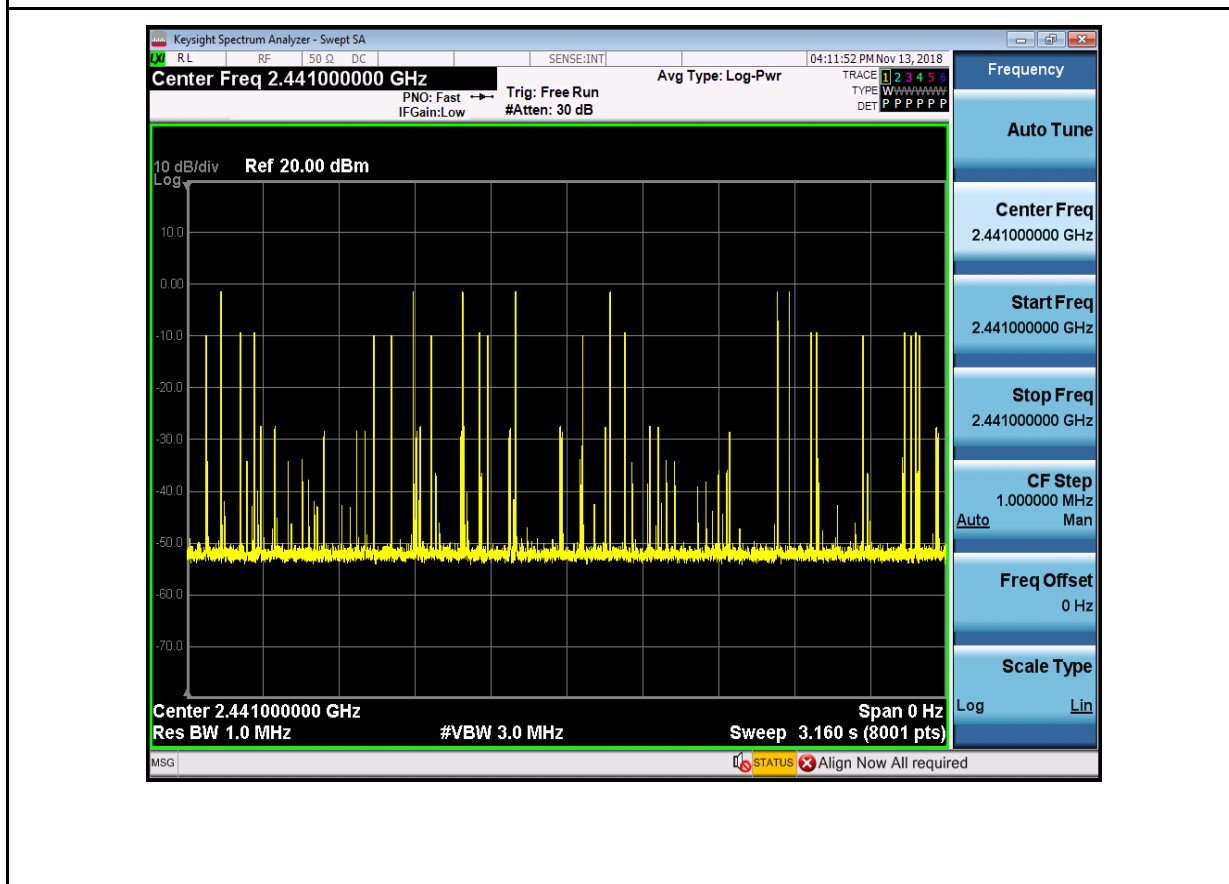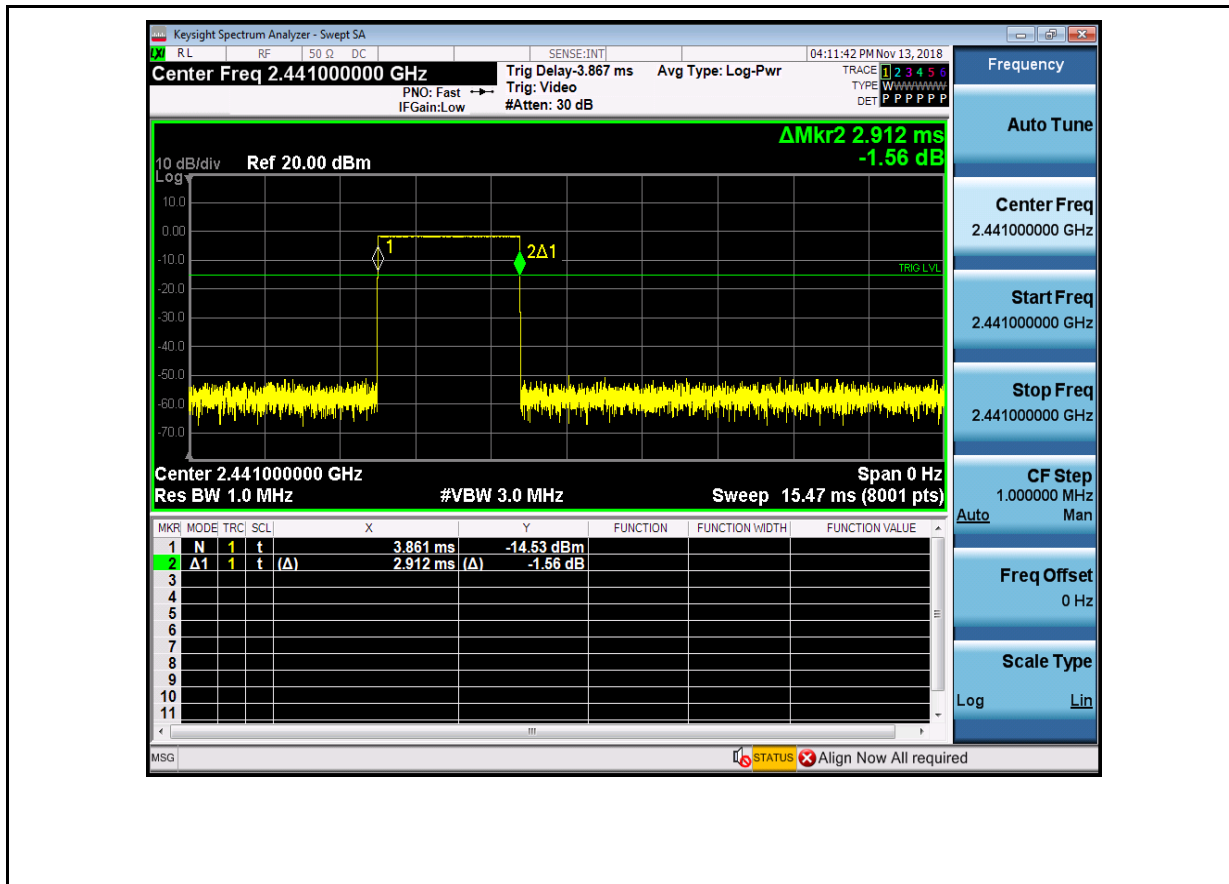



Dwell Time_DH5_2480

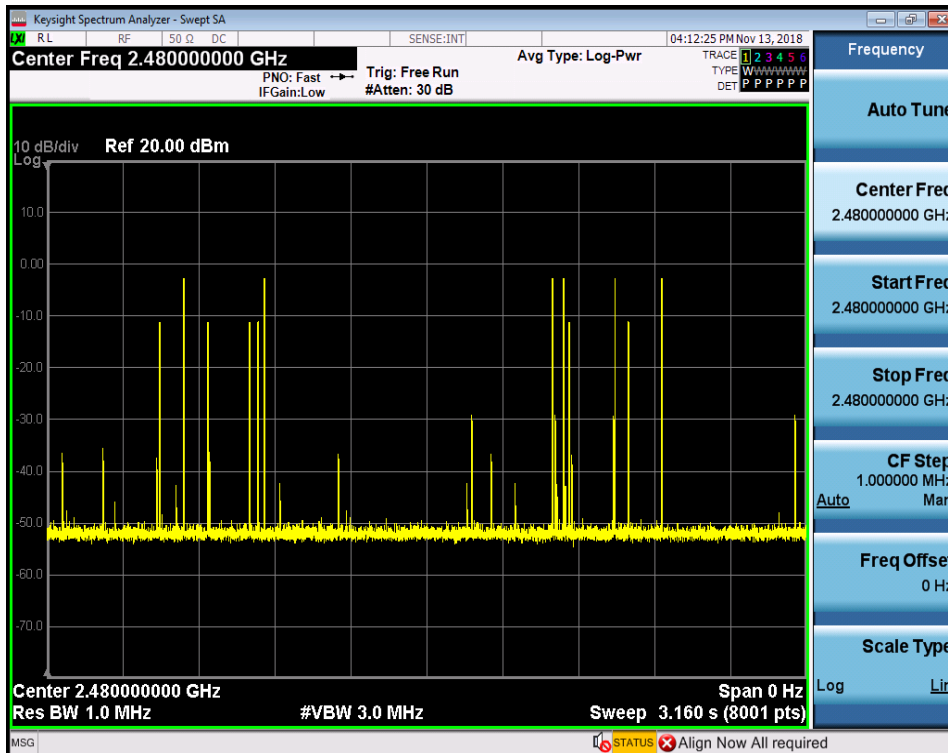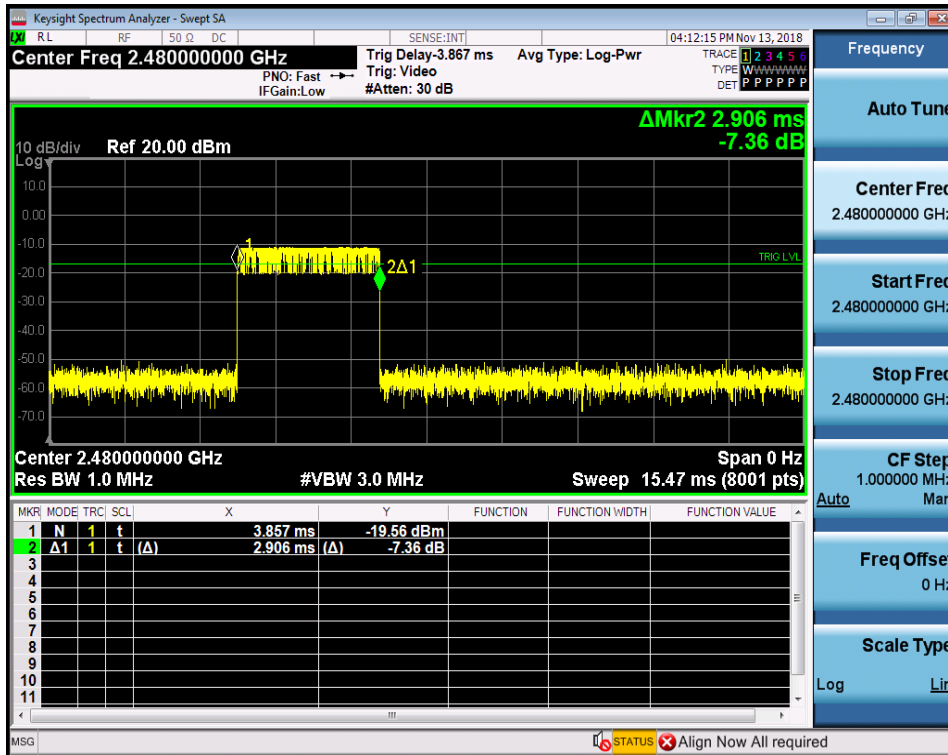



Dwell Time_2DH5_2402

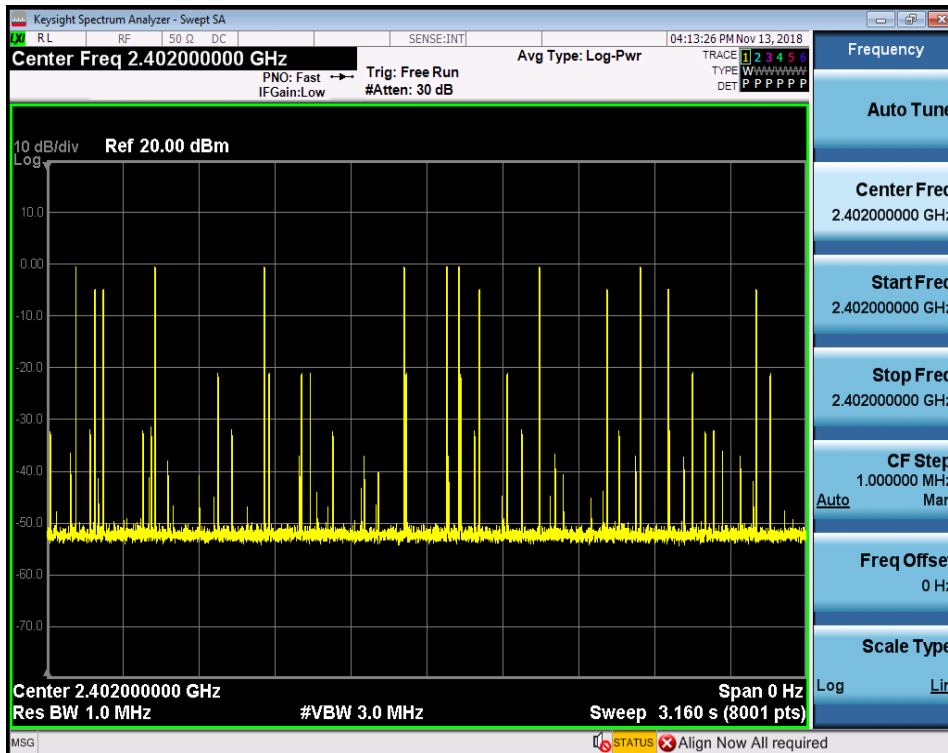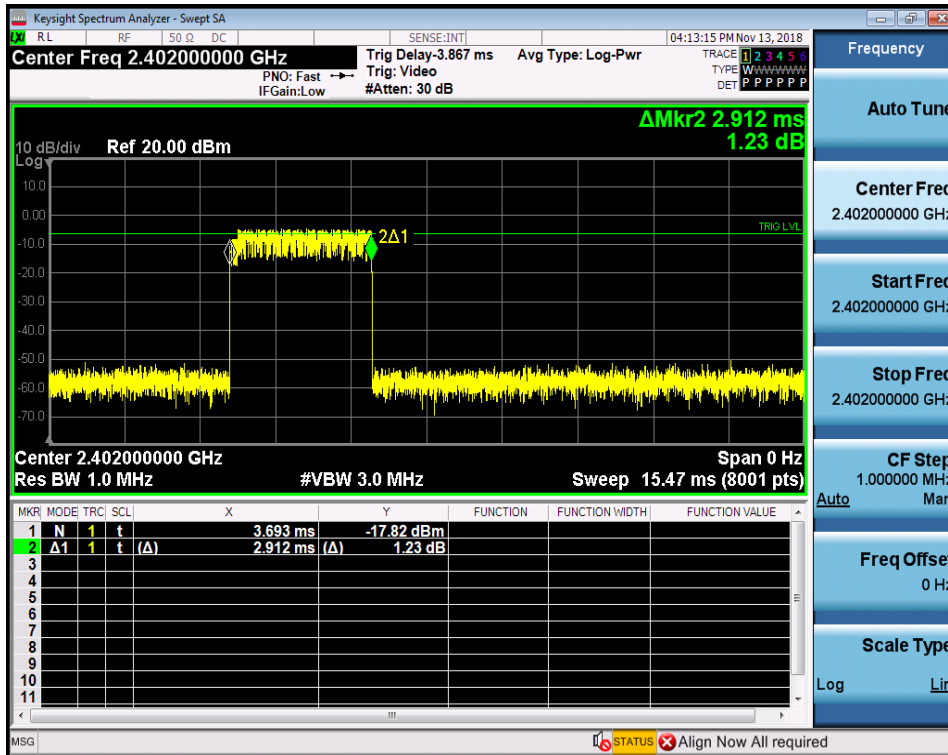



Dwell Time_2DH5_2441

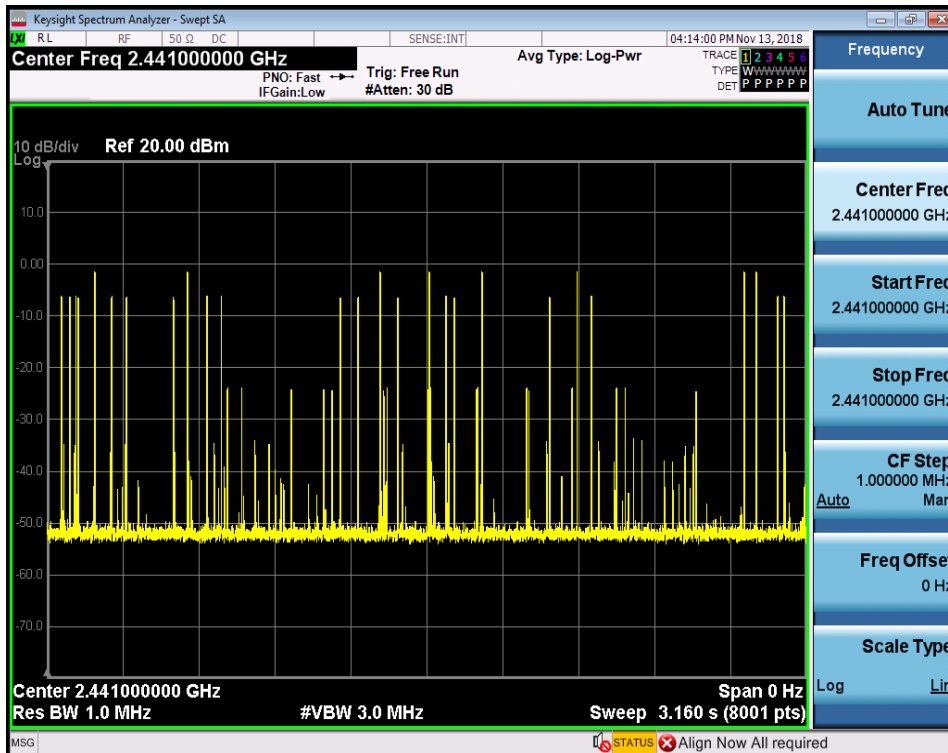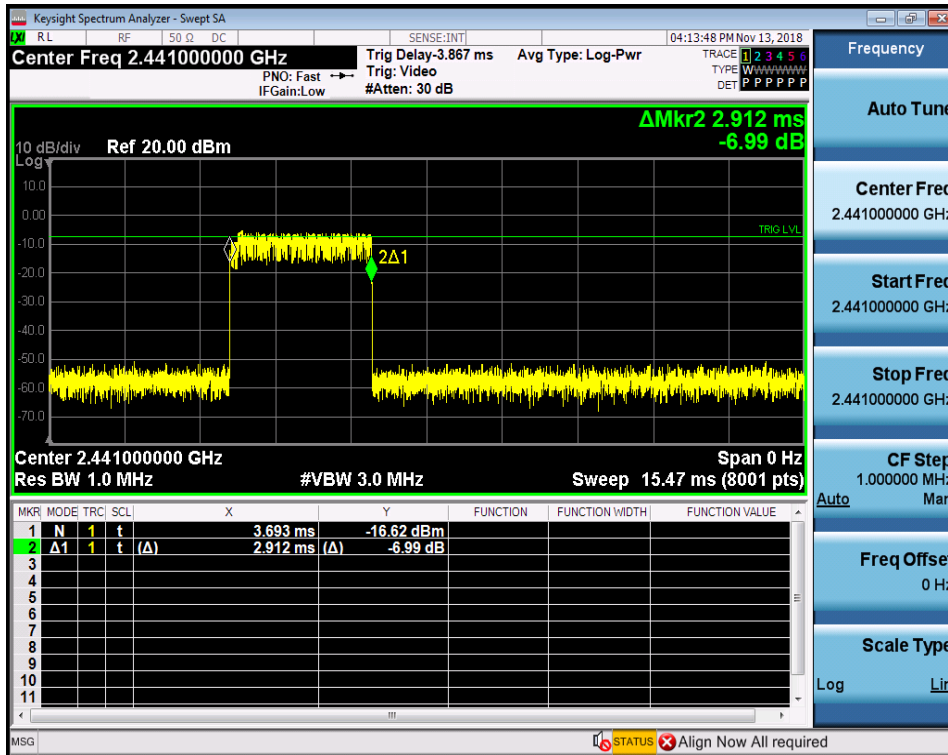



Dwell Time_2DH5_2480

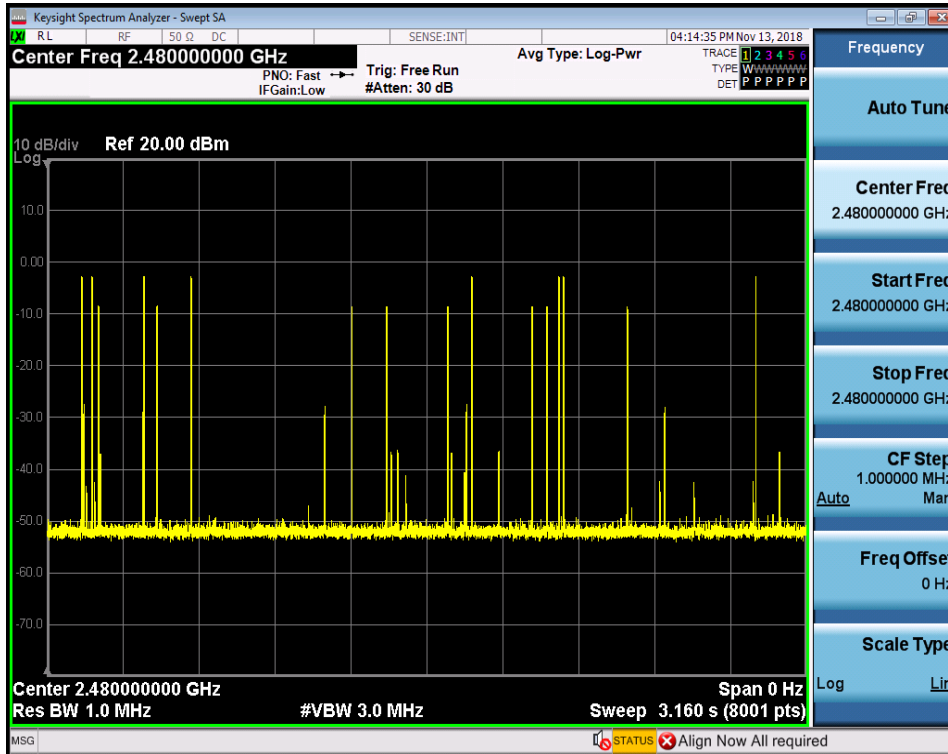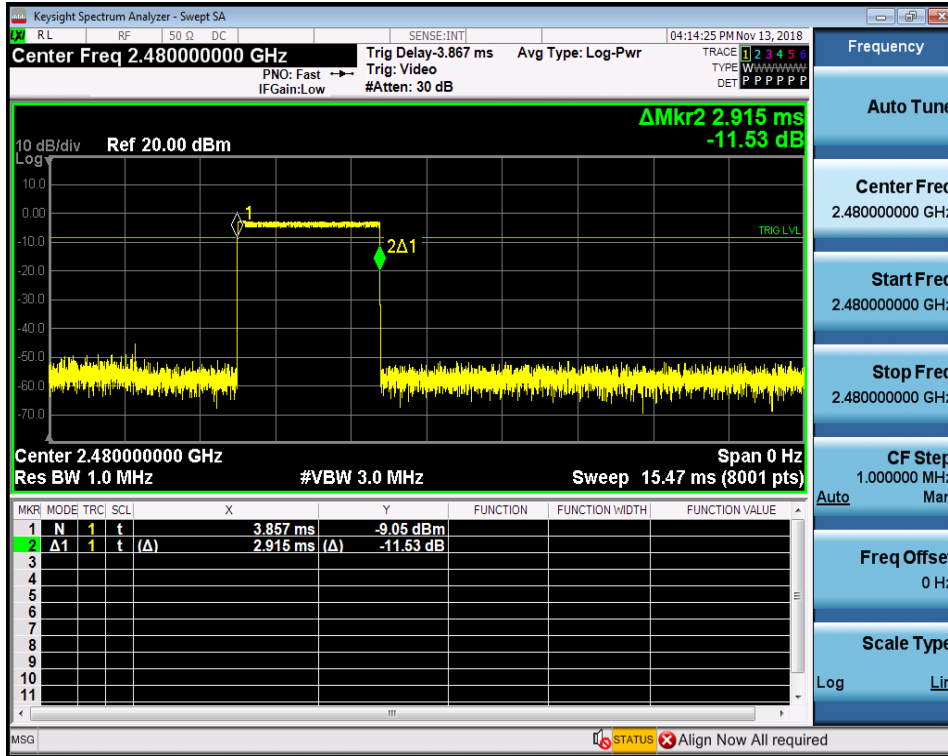



Dwell Time_3DH5_2402

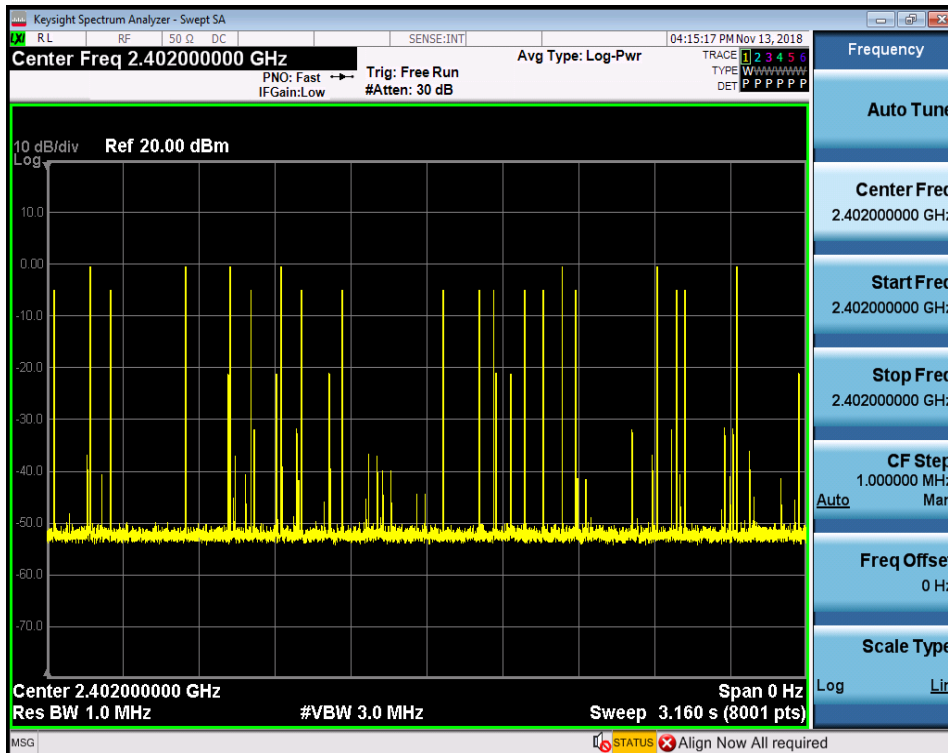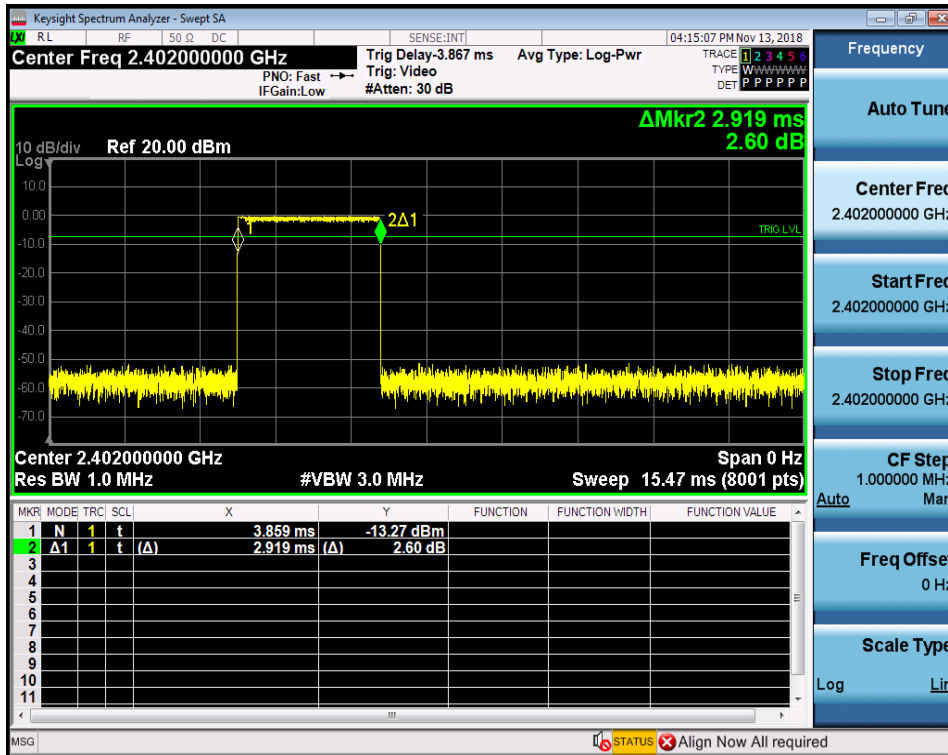

Dwell Time_3DH5_2441

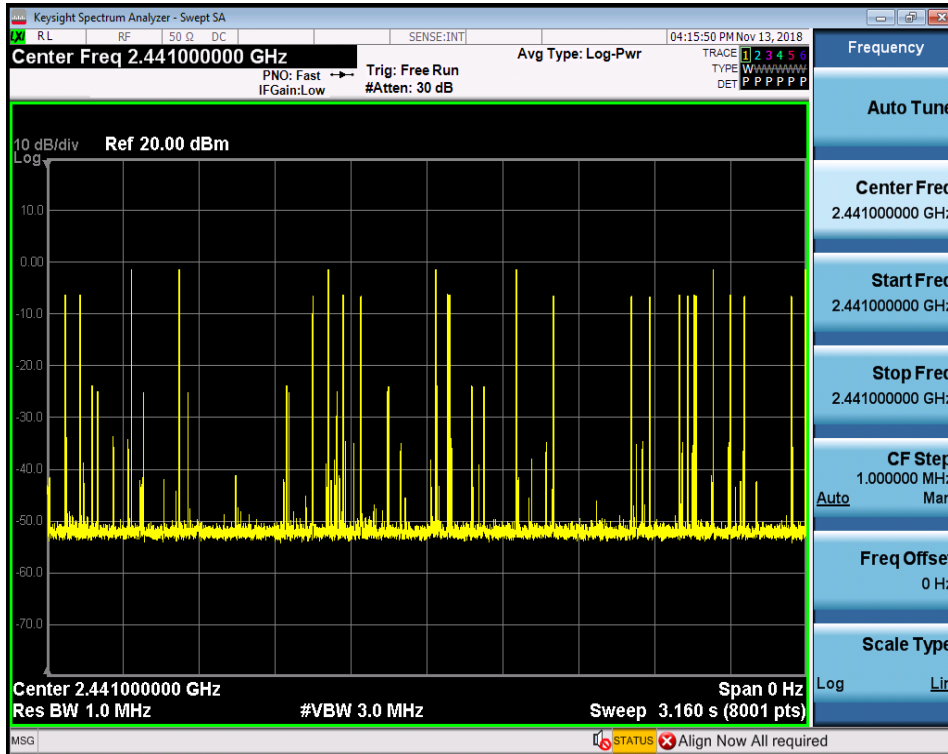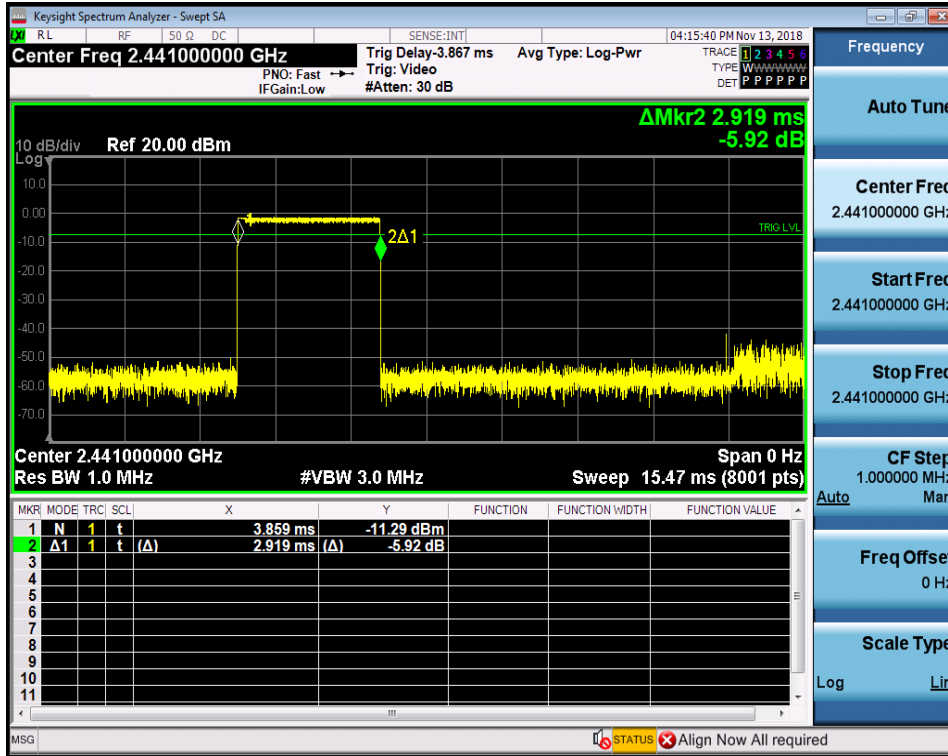


Dwell Time_3DH5_2480

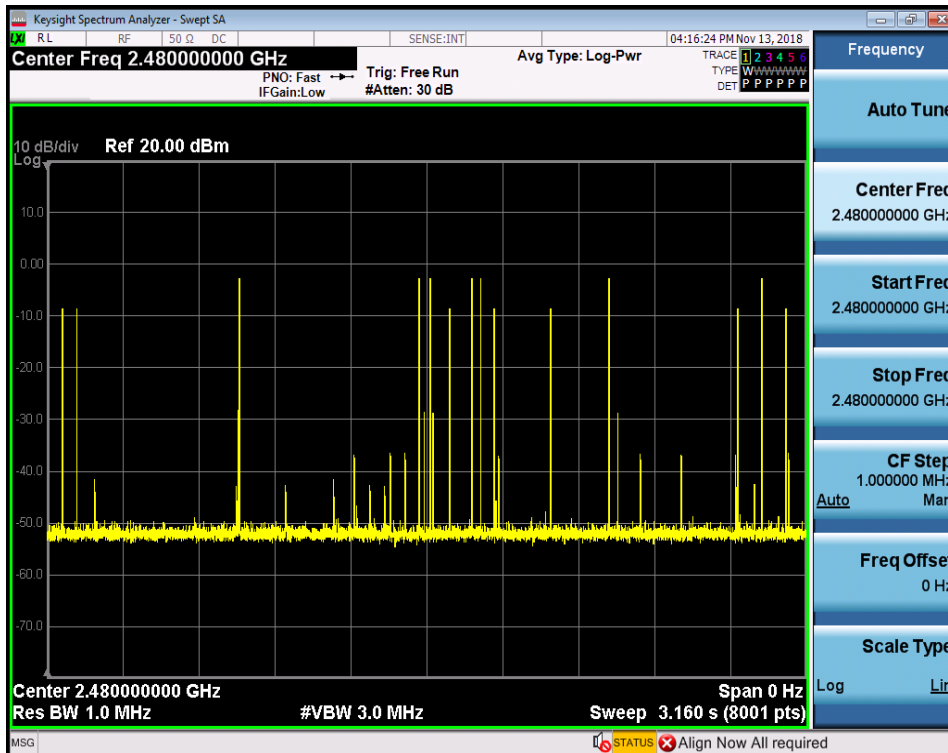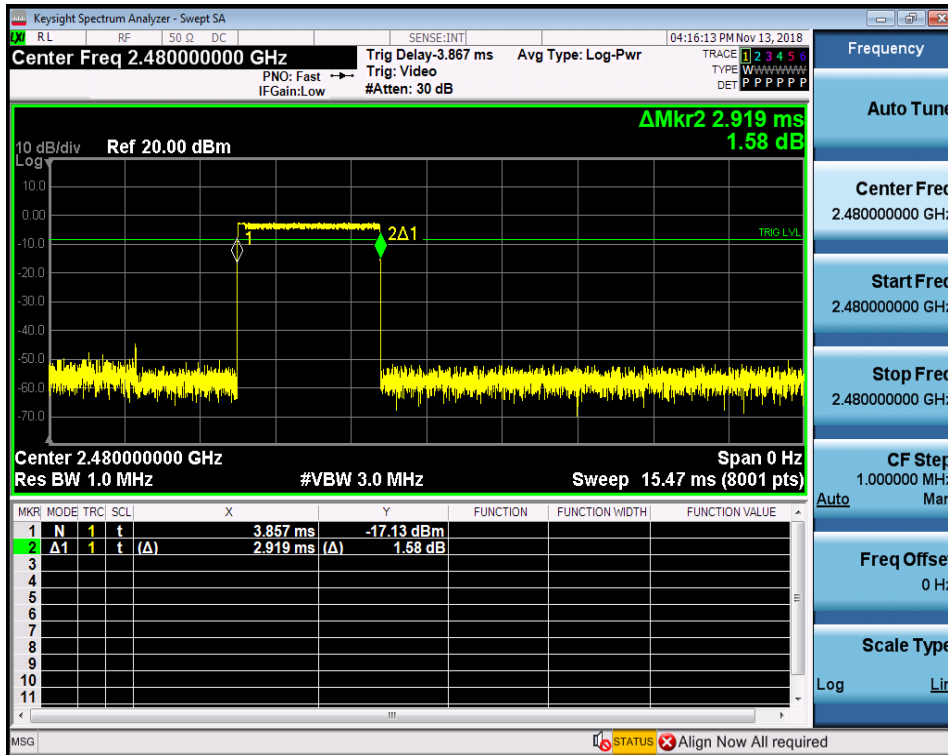





5.Hopping Channel Number

Test Mode	Number of Hopping Channel[N]	Limit[N]	Verdict
DH5	79	>=15	PASS
2DH5	79	>=15	PASS
3DH5	79	>=15	PASS

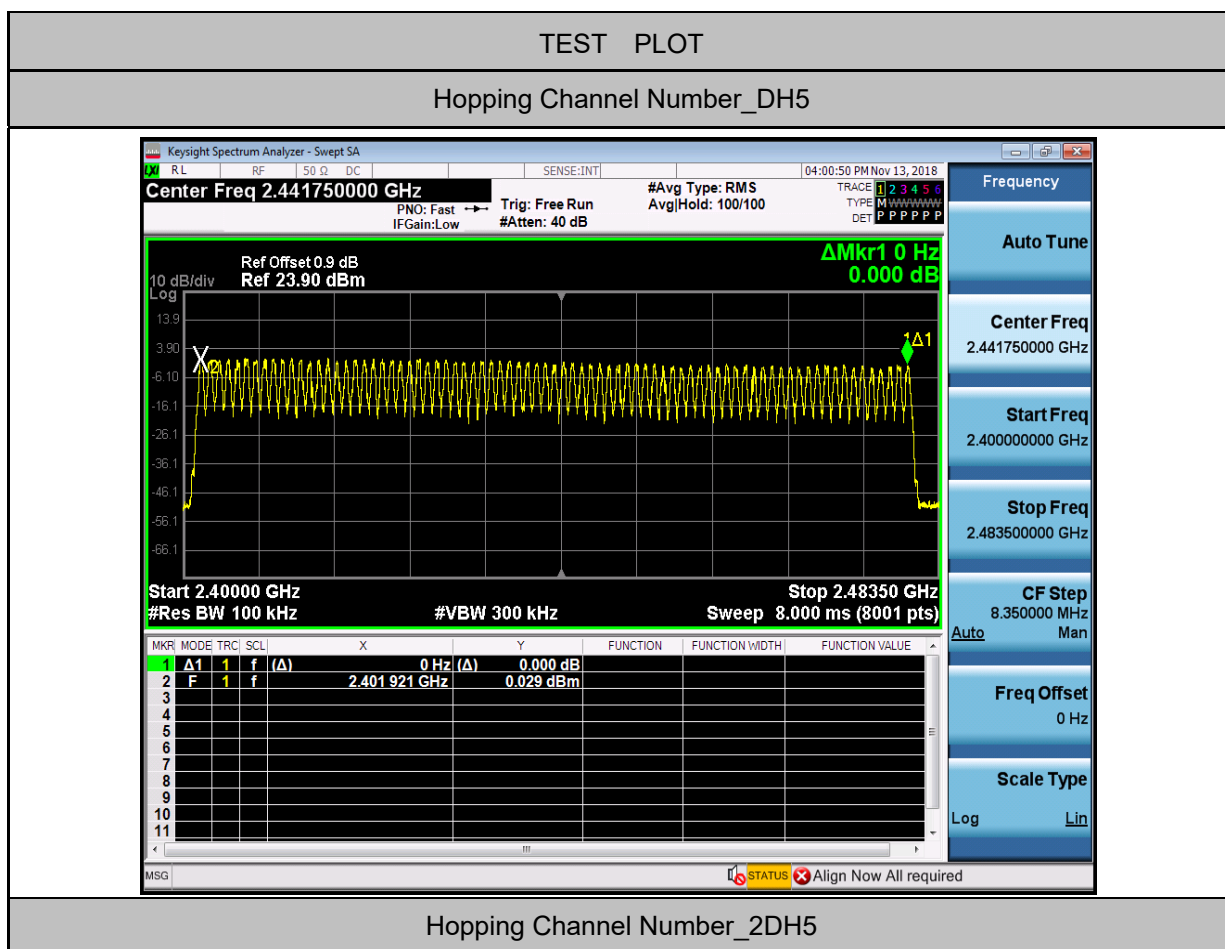

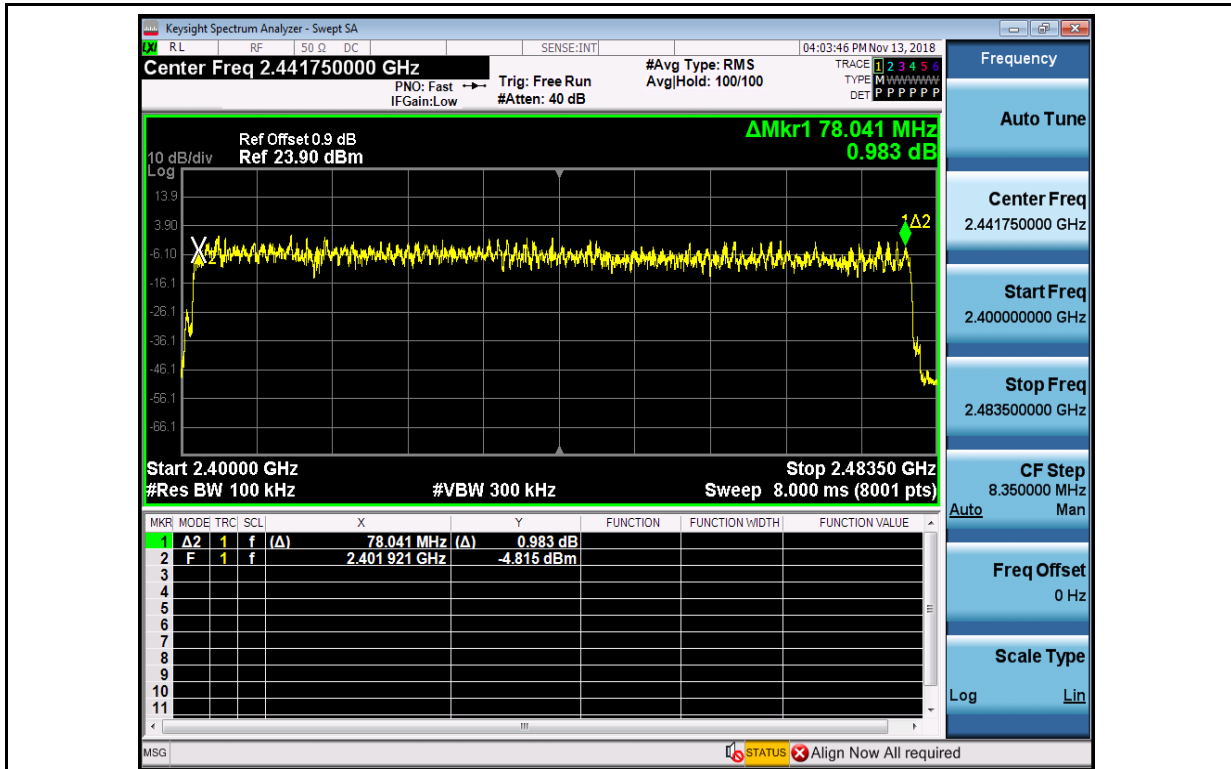

Hopping Channel Number_3DH5

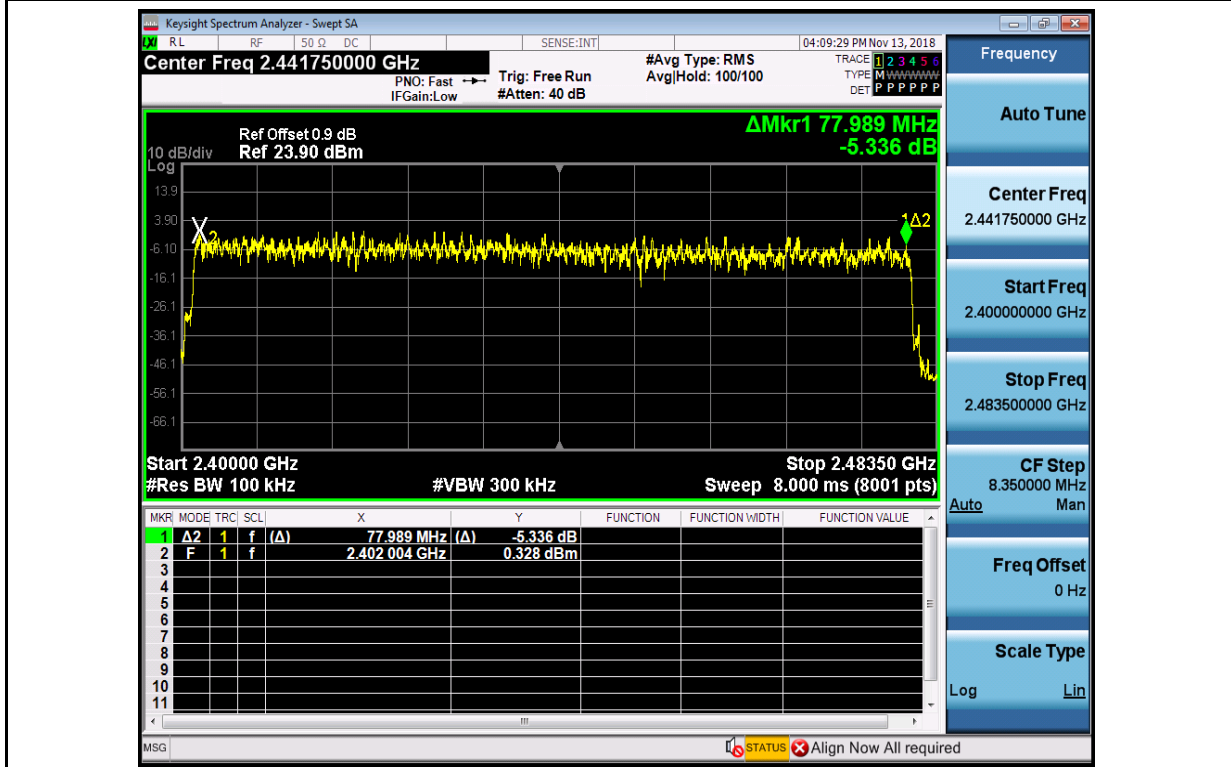


6. Band-edge for RF Conducted Emissions


Test Mode	Test Channel	Hopping	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit[dBm]	Verdict
DH5	2402	On	0.360	-47.521	-19.64	PASS
DH5	2402	Off	0.370	-48.947	-19.63	PASS
DH5	2480	On	-1.422	-48.346	-21.42	PASS
DH5	2480	Off	-1.791	-48.289	-21.79	PASS
2DH5	2402	On	0.399	-47.562	-19.6	PASS
2DH5	2402	Off	0.352	-48.134	-19.65	PASS
2DH5	2480	On	-1.394	-48.166	-21.39	PASS
2DH5	2480	Off	-1.822	-48.522	-21.82	PASS
3DH5	2402	On	0.278	-47.811	-19.72	PASS
3DH5	2402	Off	0.394	-49.004	-19.61	PASS
3DH5	2480	On	-1.393	-47.637	-21.39	PASS
3DH5	2480	Off	-1.787	-48.155	-21.79	PASS

TEST PLOT


Band-edge for RF Conducted Emissions_DH5_2402_Hopping On

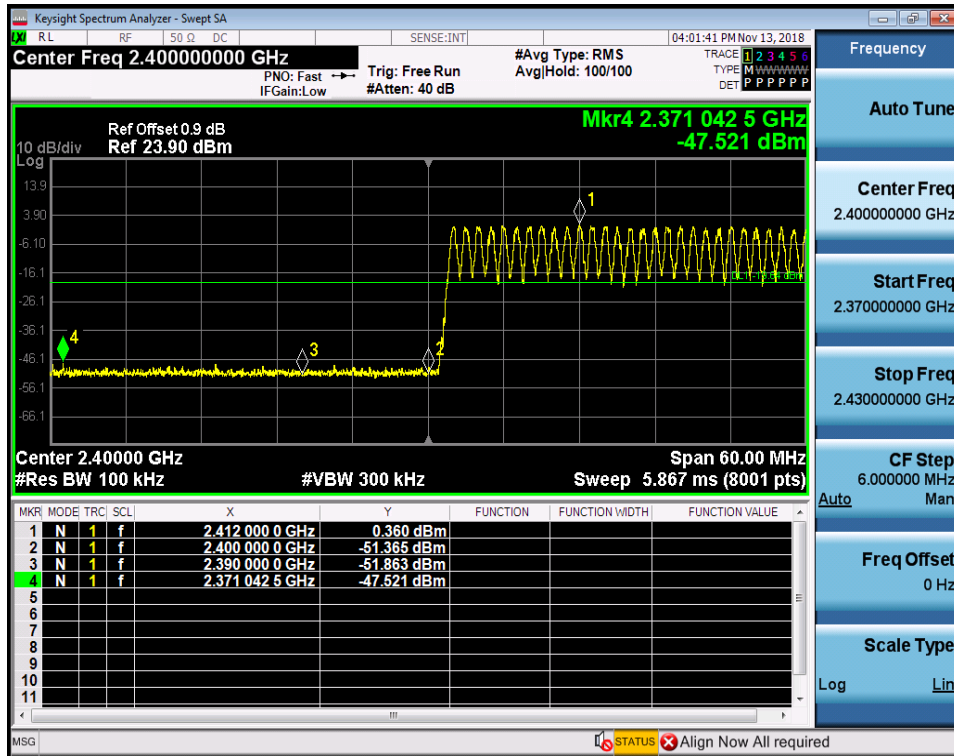


Band-edge for RF Conducted Emissions_DH5_2402_Hopping Off

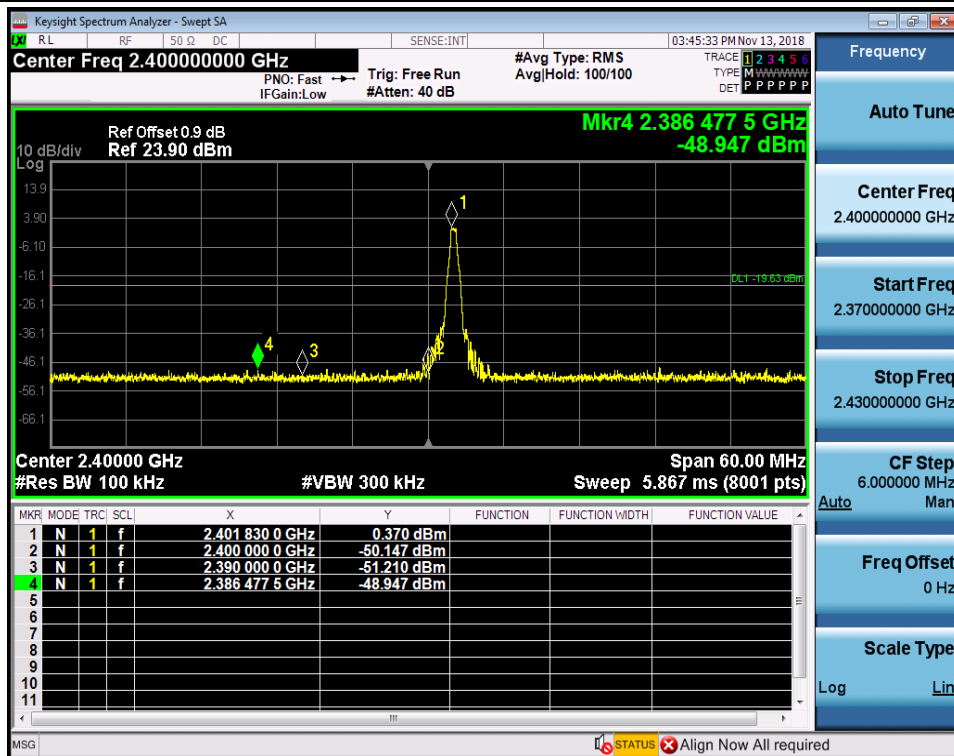


Band-edge for RF Conducted Emissions_DH5_2480_Hopping On

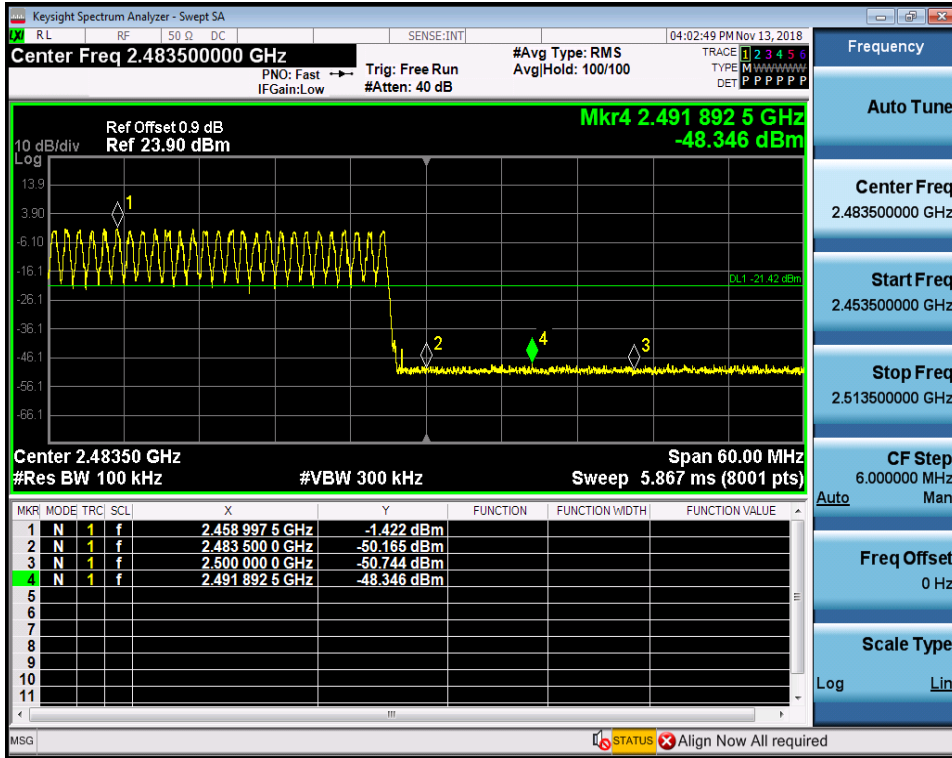


Band-edge for RF Conducted Emissions_DH5_2480_Hopping Off

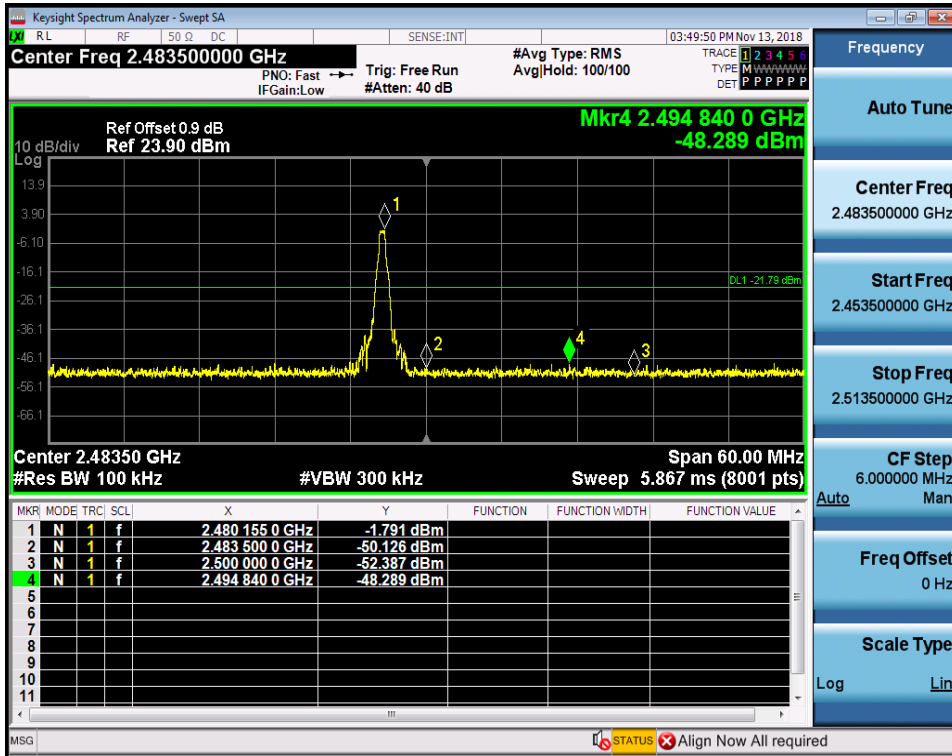


Band-edge for RF Conducted Emissions_2DH5_2402_Hopping On

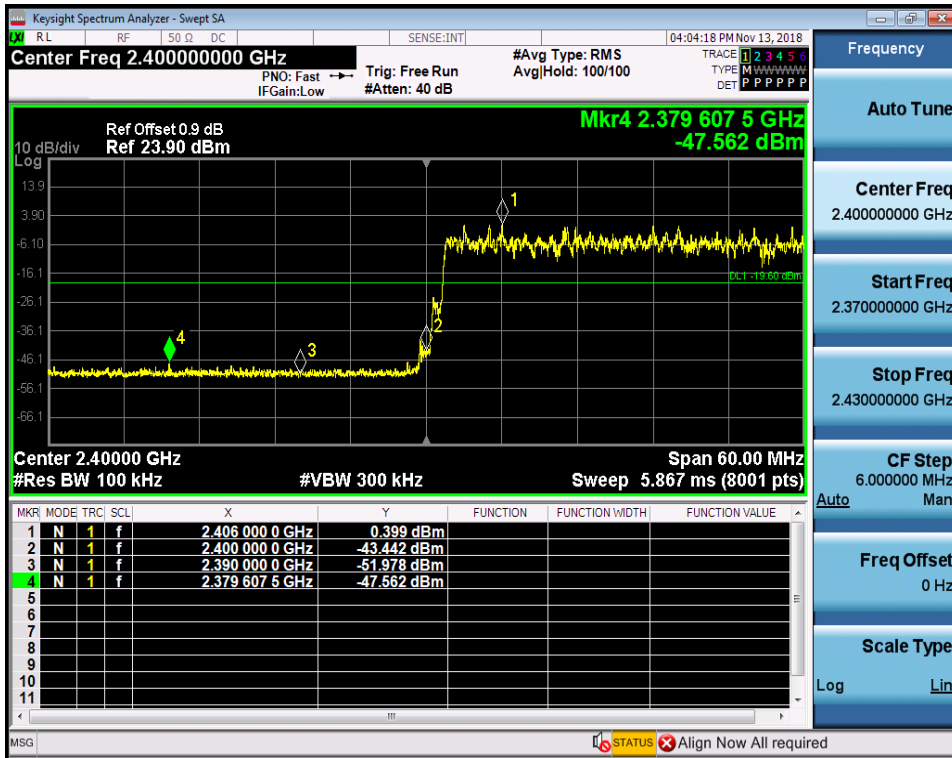


Band-edge for RF Conducted Emissions_2DH5_2402_Hopping Off

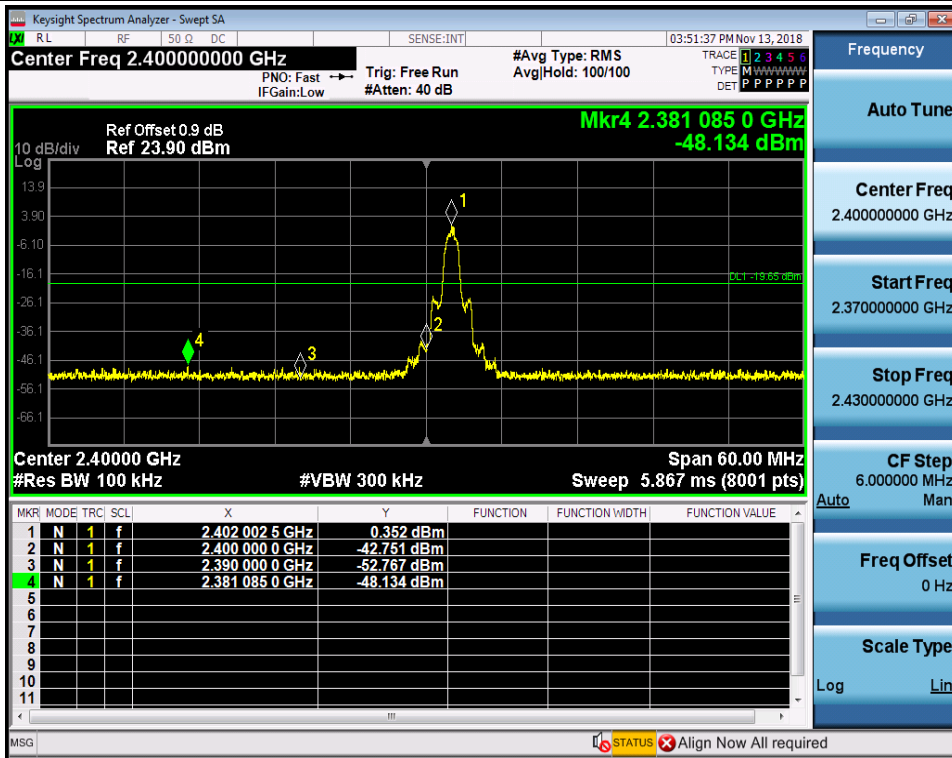


Band-edge for RF Conducted Emissions_2DH5_2480_Hopping On

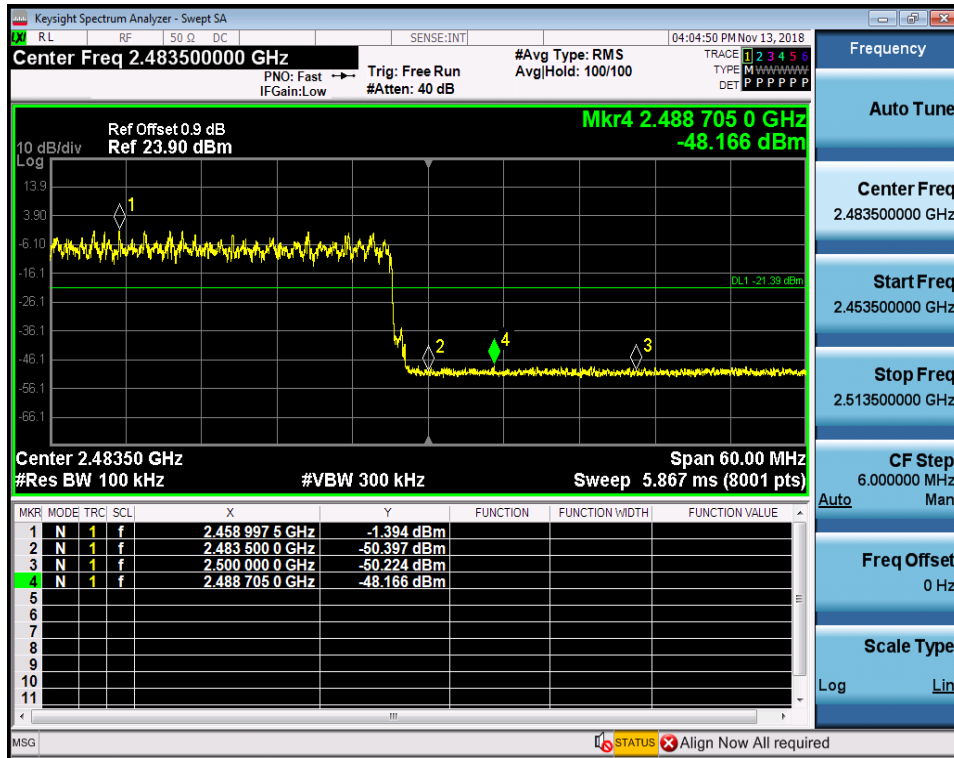


Band-edge for RF Conducted Emissions_2DH5_2480_Hopping Off

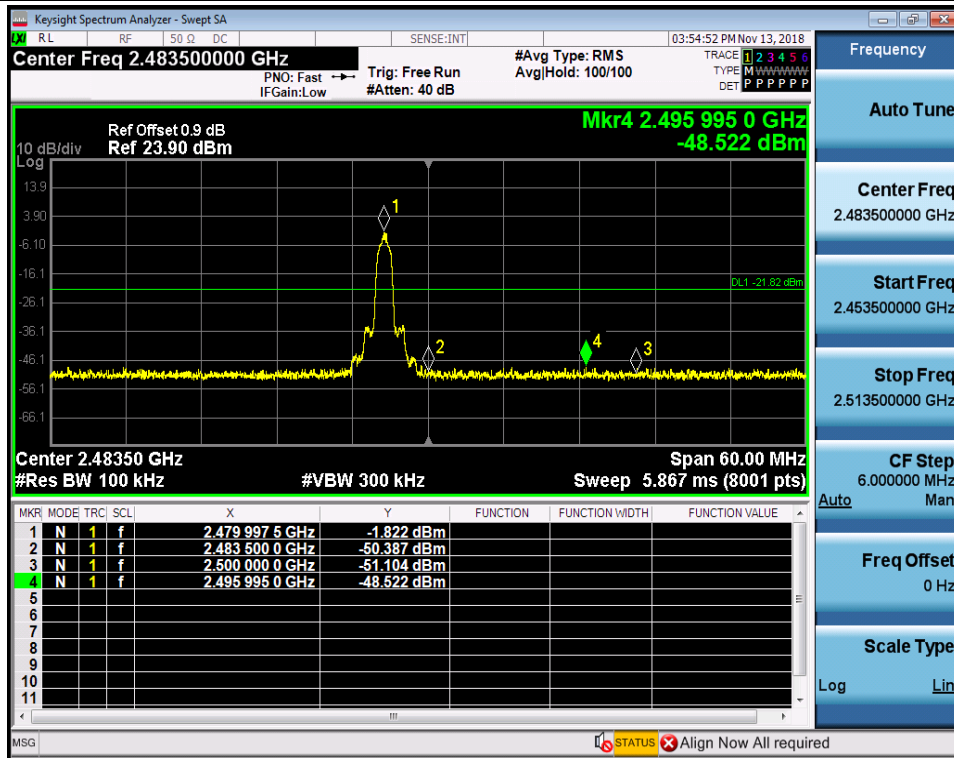


Band-edge for RF Conducted Emissions_3DH5_2402_Hopping On

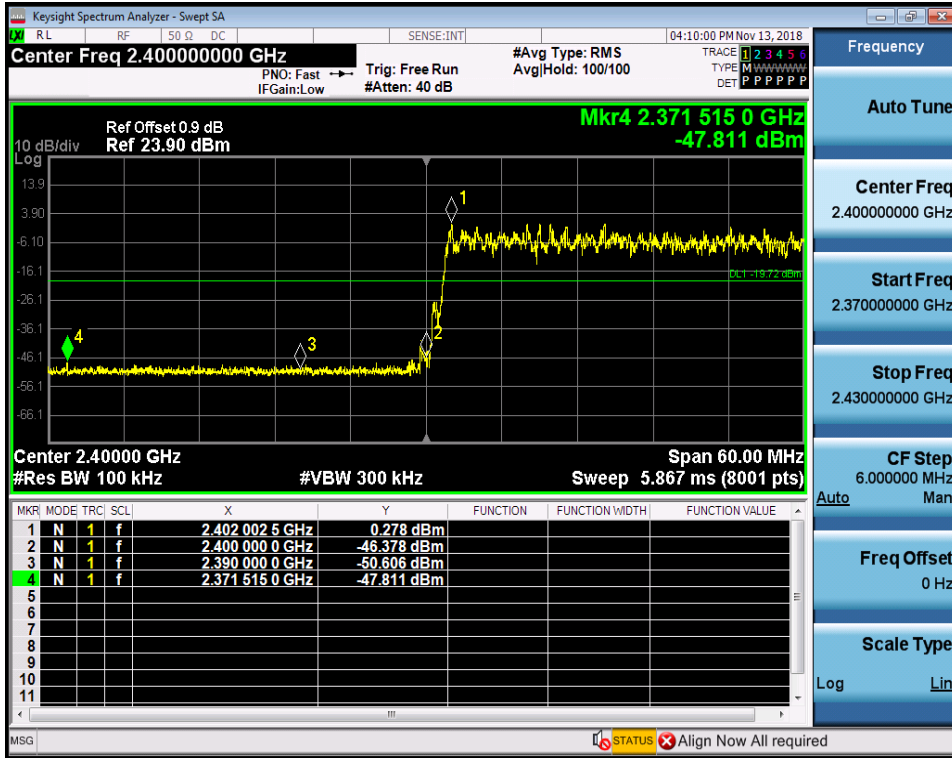


Band-edge for RF Conducted Emissions_3DH5_2402_Hopping Off

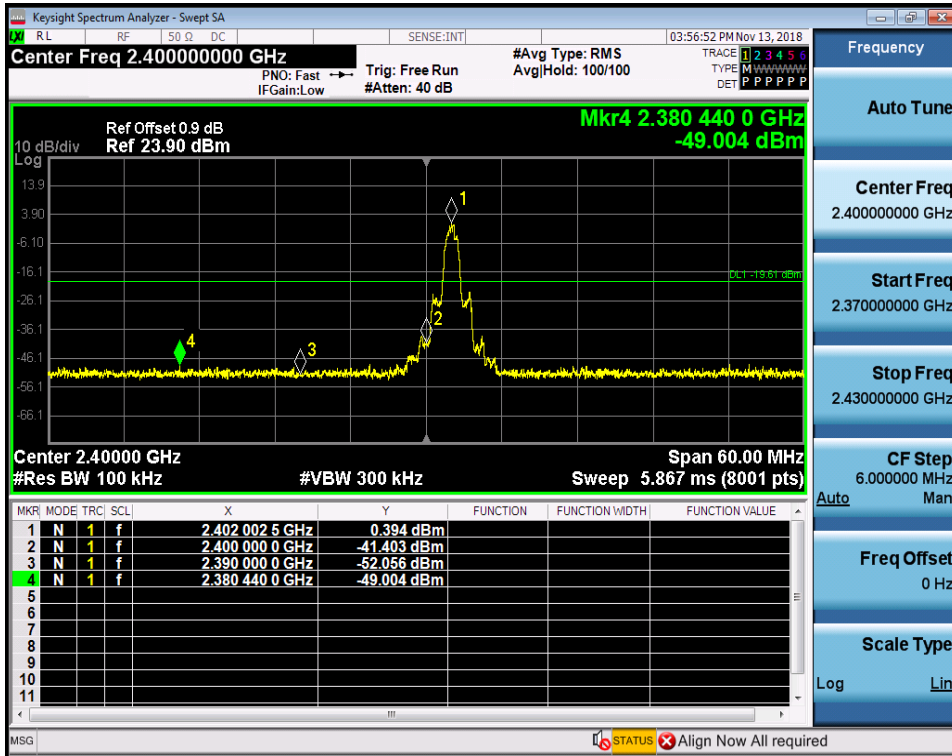

Band-edge for RF Conducted Emissions_3DH5_2480_Hopping On

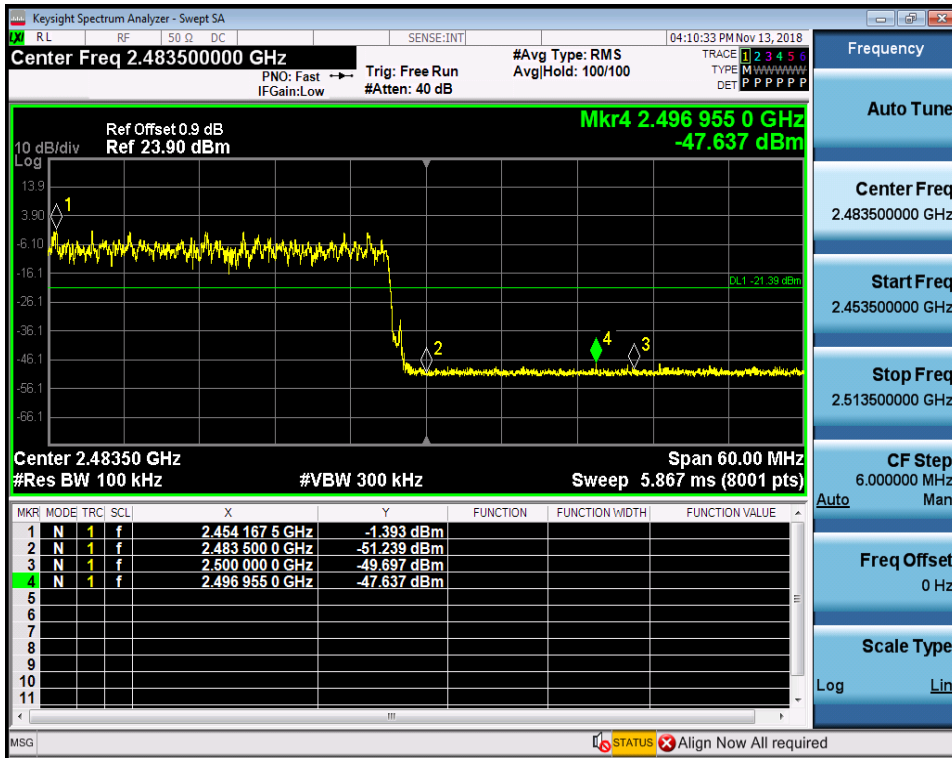


Band-edge for RF Conducted Emissions_3DH5_2480_Hopping Off

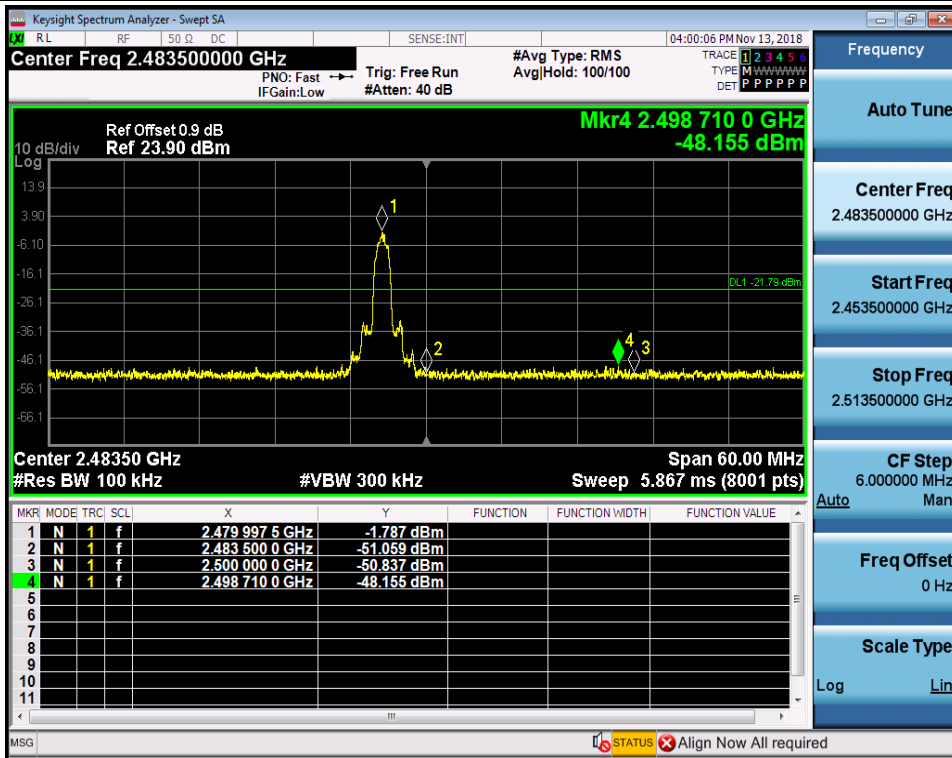


7.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref[dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
DH5	2402	30	10000	100	300	0.405	-54.127	<-19.595	PASS
DH5	2402	10000	26000	100	300	0.405	-51.967	<-19.595	PASS
DH5	2441	30	10000	100	300	-0.604	-54.694	<-20.604	PASS
DH5	2441	10000	26000	100	300	-0.604	-51.830	<-20.604	PASS
DH5	2480	30	10000	100	300	-1.826	-54.149	<-21.826	PASS
DH5	2480	10000	26000	100	300	-1.826	-51.574	<-21.826	PASS
2DH5	2402	30	10000	100	300	0.391	-54.642	<-19.609	PASS
2DH5	2402	10000	26000	100	300	0.391	-51.507	<-19.609	PASS
2DH5	2441	30	10000	100	300	-0.616	-49.299	<-20.616	PASS
2DH5	2441	10000	26000	100	300	-0.616	-51.737	<-20.616	PASS
2DH5	2480	30	10000	100	300	-1.784	-54.424	<-21.784	PASS
2DH5	2480	10000	26000	100	300	-1.784	-51.645	<-21.784	PASS
3DH5	2402	30	10000	100	300	0.422	-53.440	<-19.578	PASS
3DH5	2402	10000	26000	100	300	0.422	-51.070	<-19.578	PASS
3DH5	2441	30	10000	100	300	-0.581	-54.755	<-20.581	PASS
3DH5	2441	10000	26000	100	300	-0.581	-51.589	<-20.581	PASS
3DH5	2480	30	10000	100	300	-1.758	-54.199	<-21.758	PASS
3DH5	2480	10000	26000	100	300	-1.758	-51.045	<-21.758	PASS

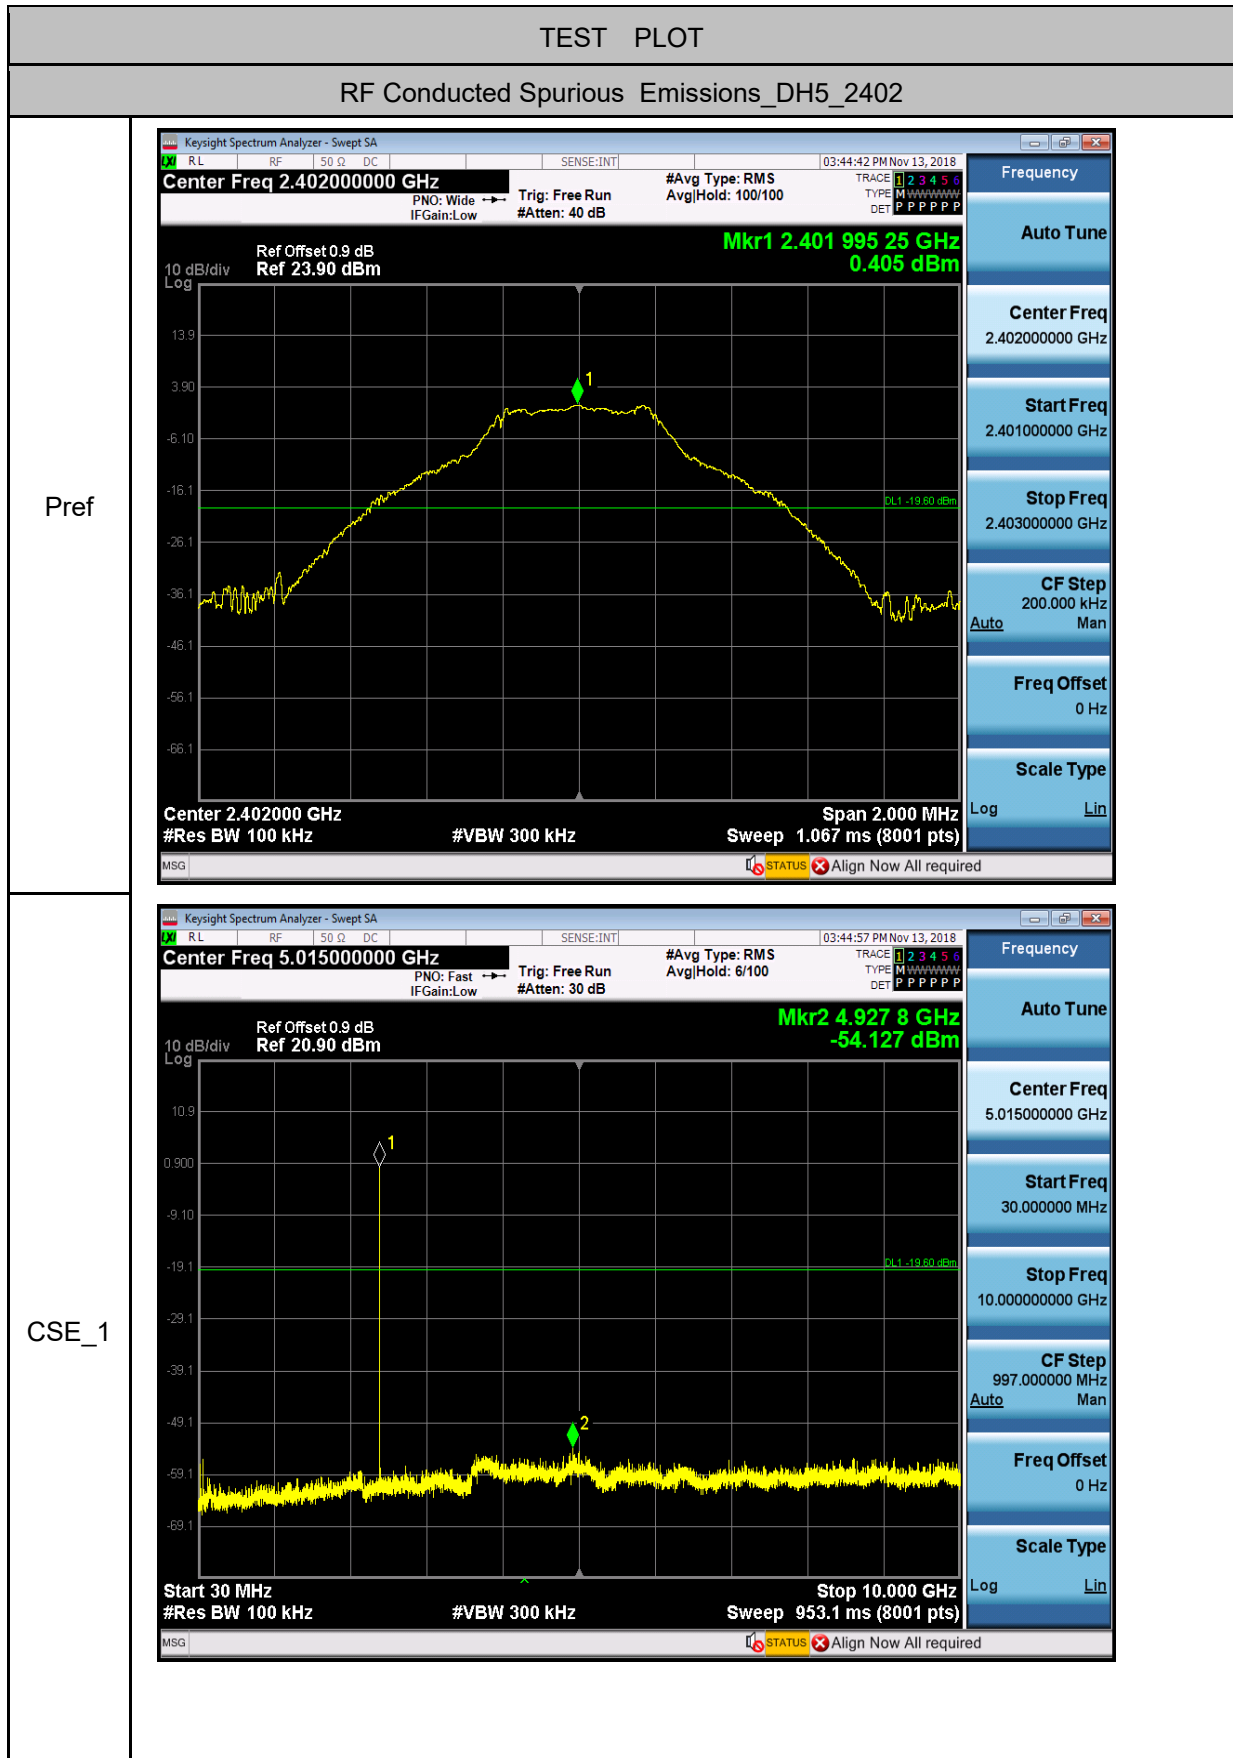


CSE_2

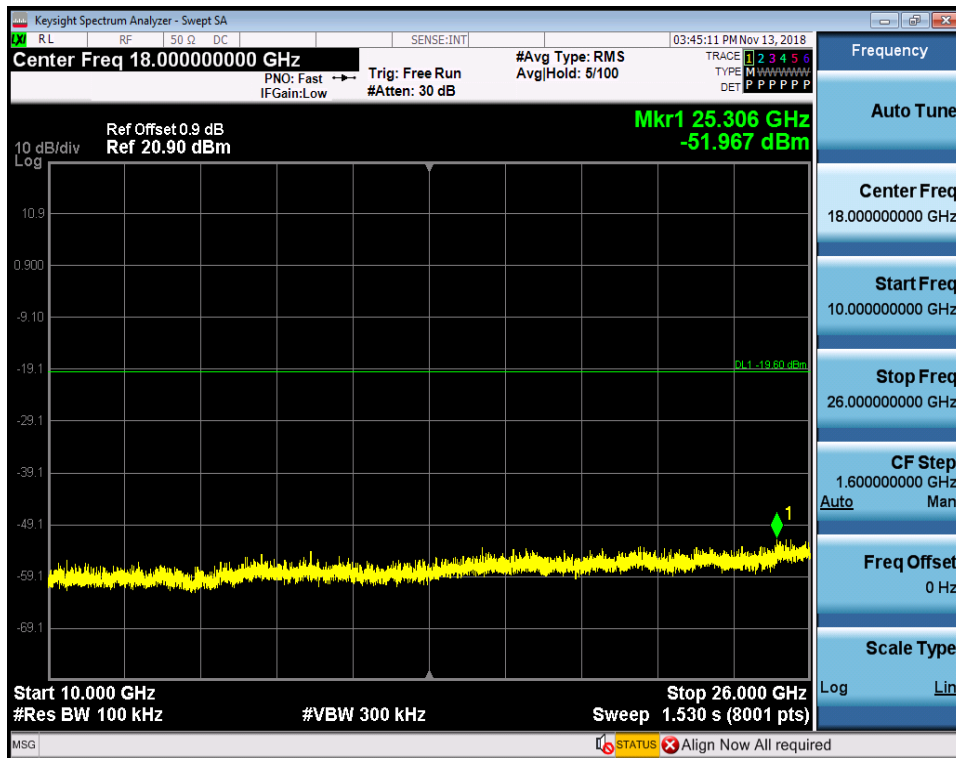


RF Conducted Spurious Emissions_DH5_2441


Pref

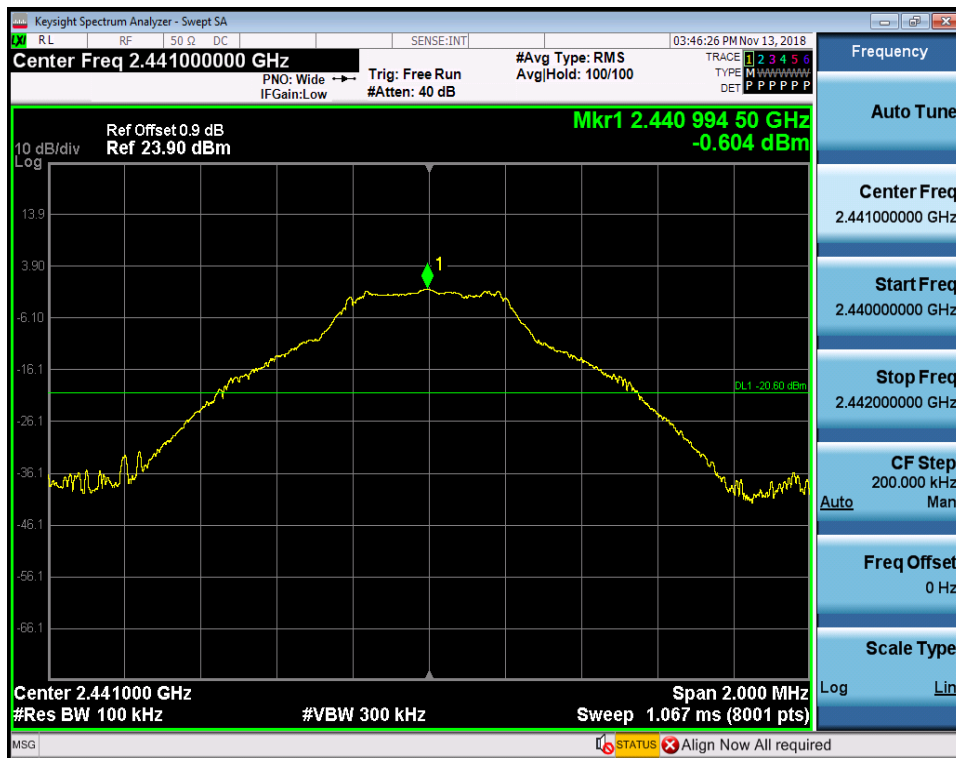


CSE_1

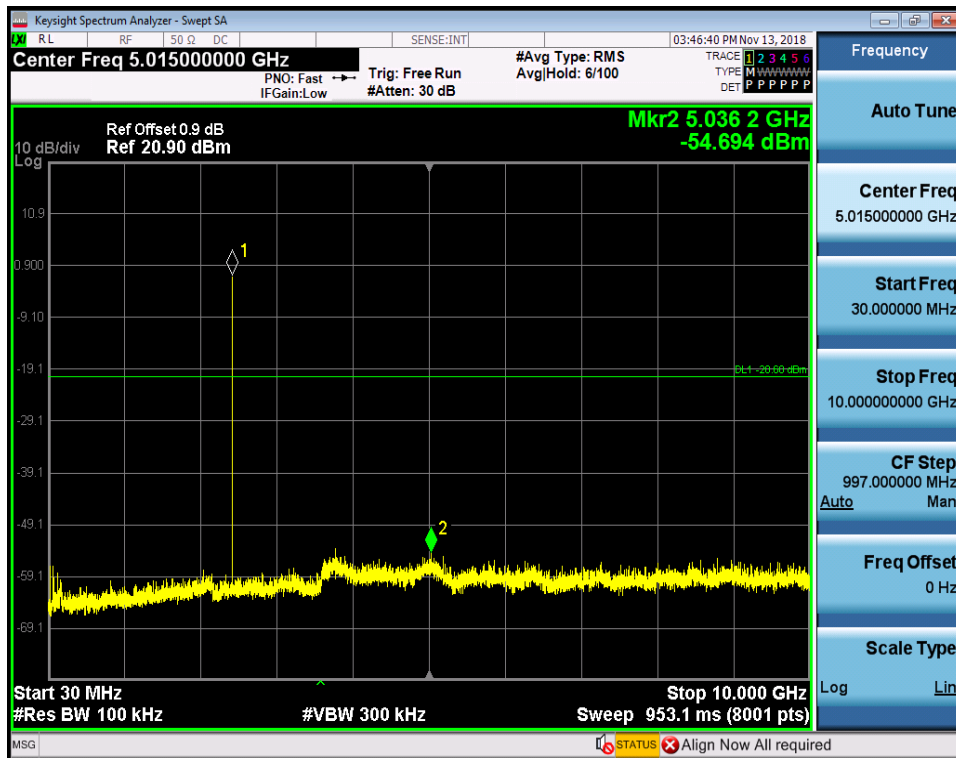

CSE_2

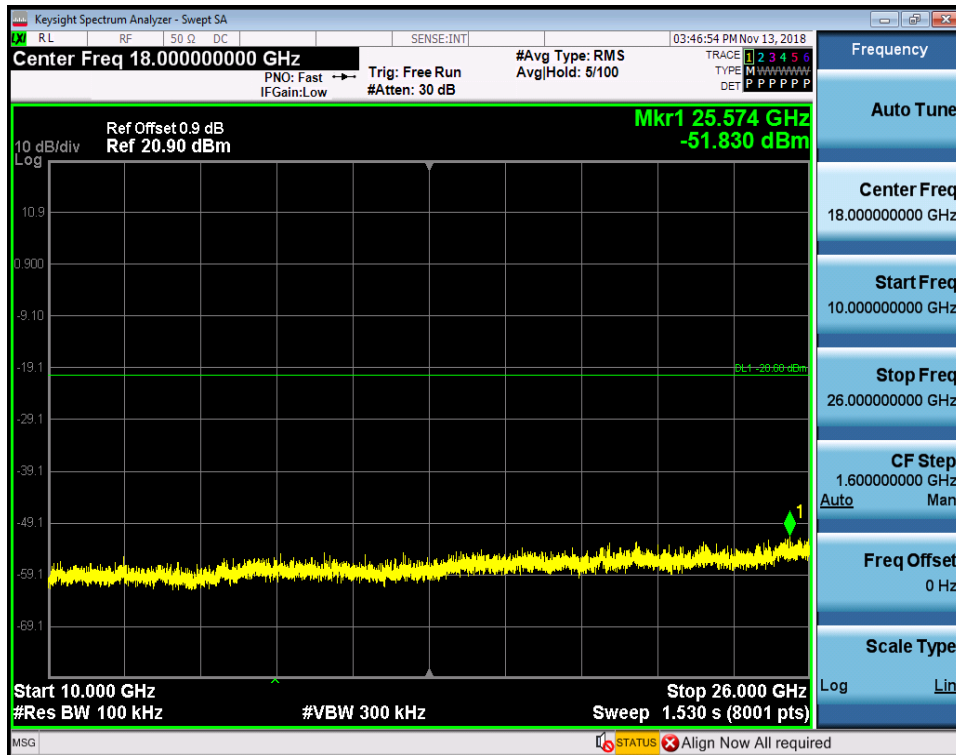

CSE_2

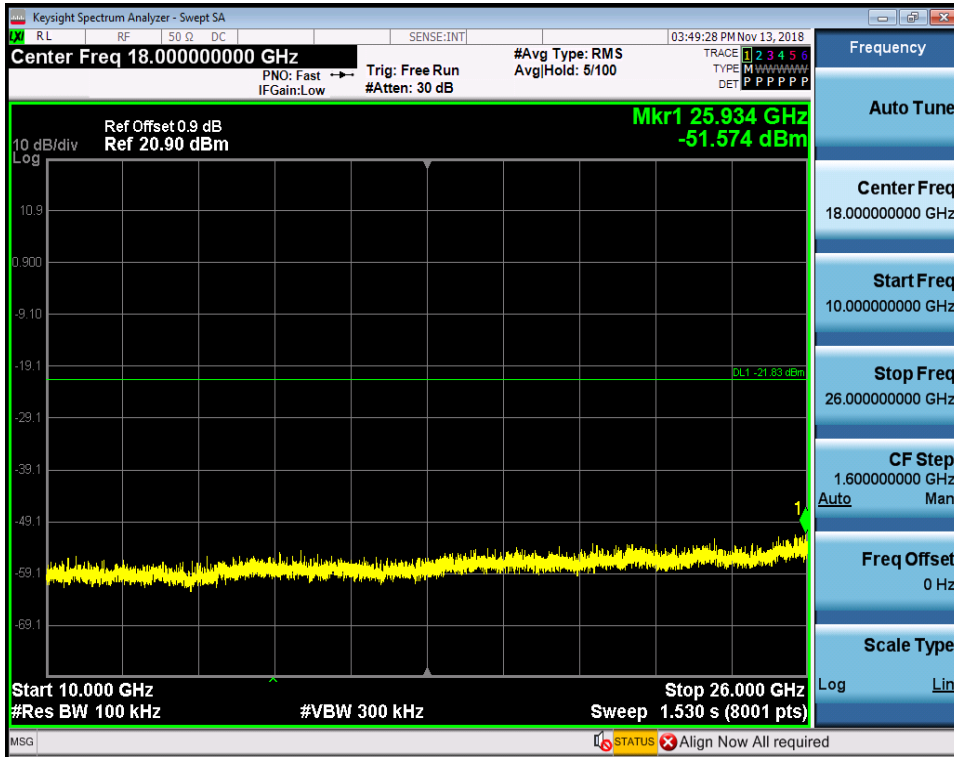


RF Conducted Spurious Emissions_2DH5_2402


Pref




CSE_1

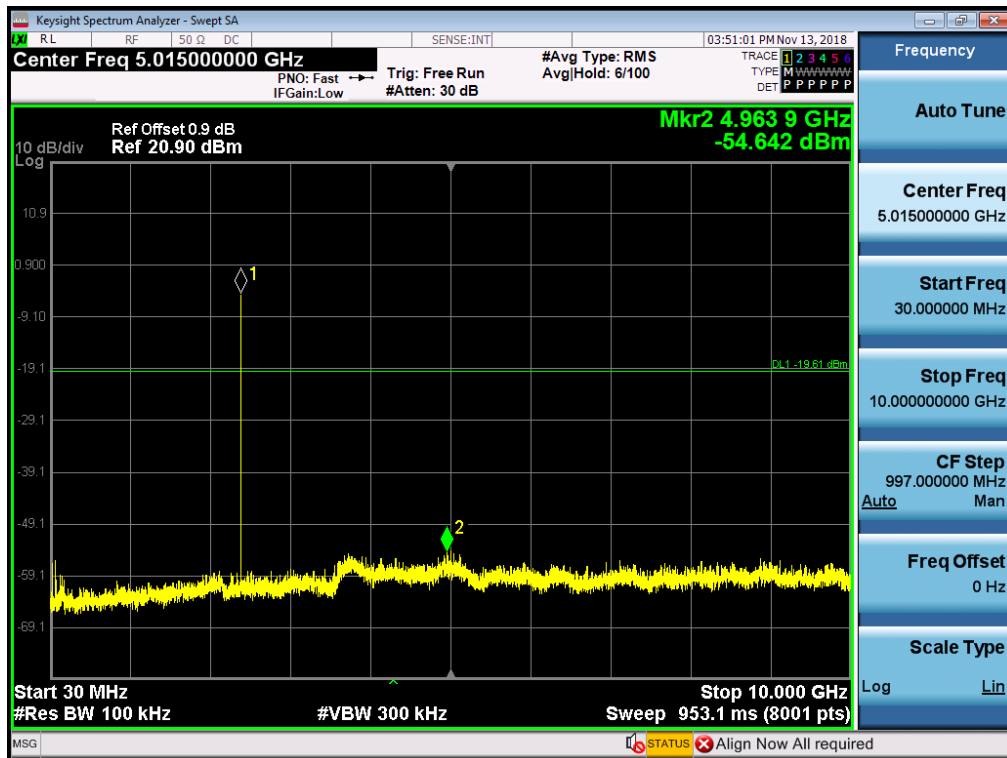

CSE_2

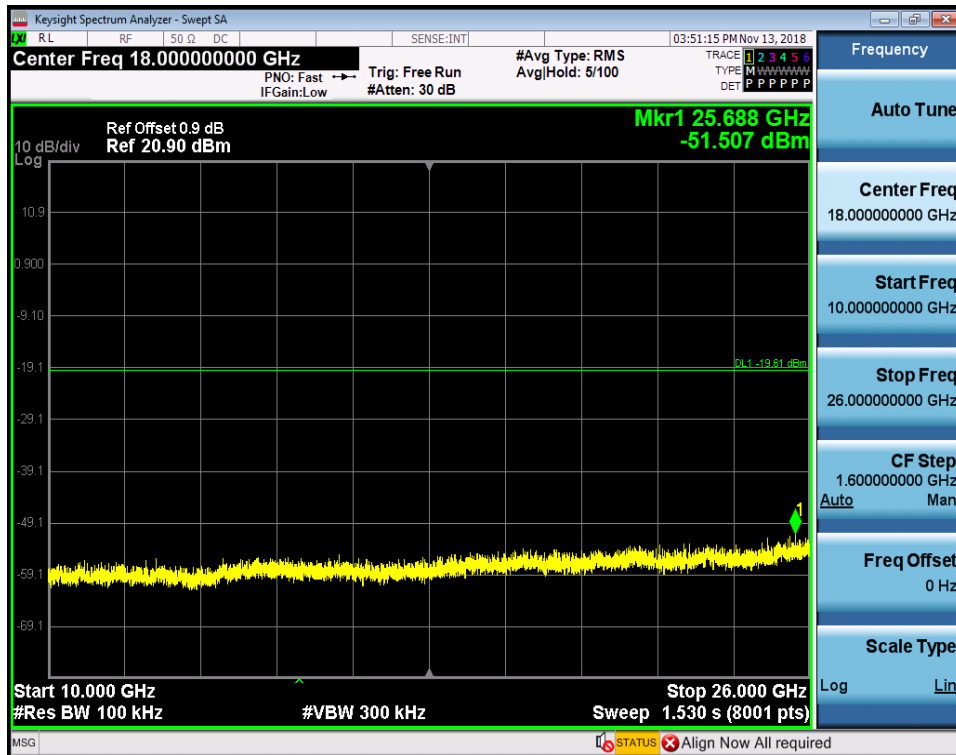

CSE_2

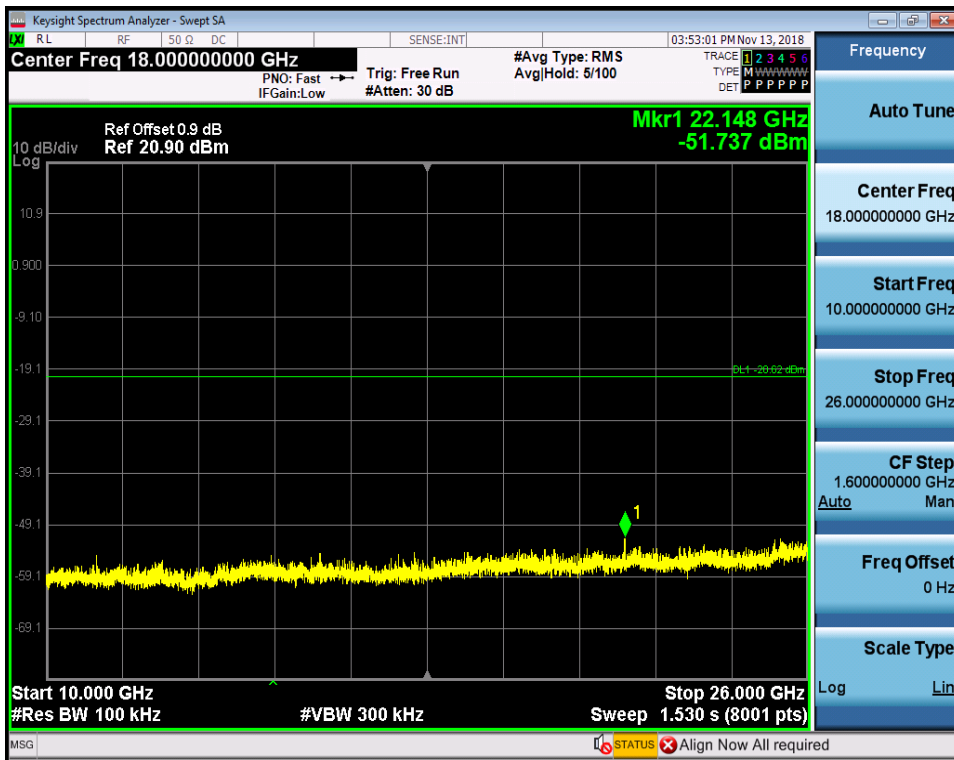


RF Conducted Spurious Emissions_2DH5_2480


Pref




CSE_1

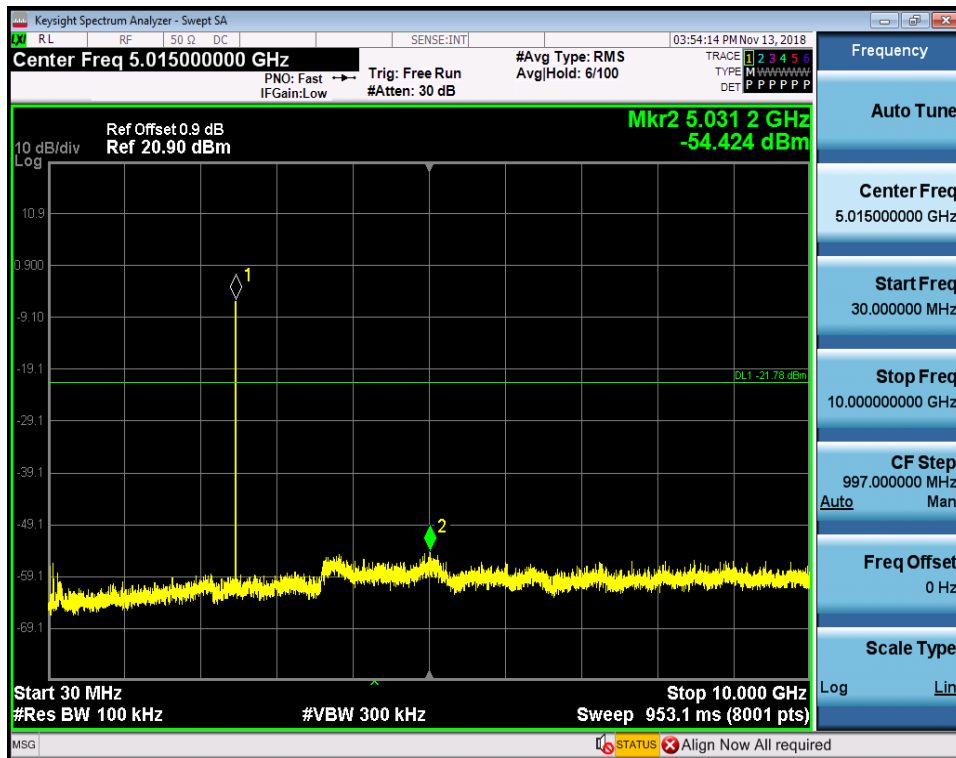

CSE_2

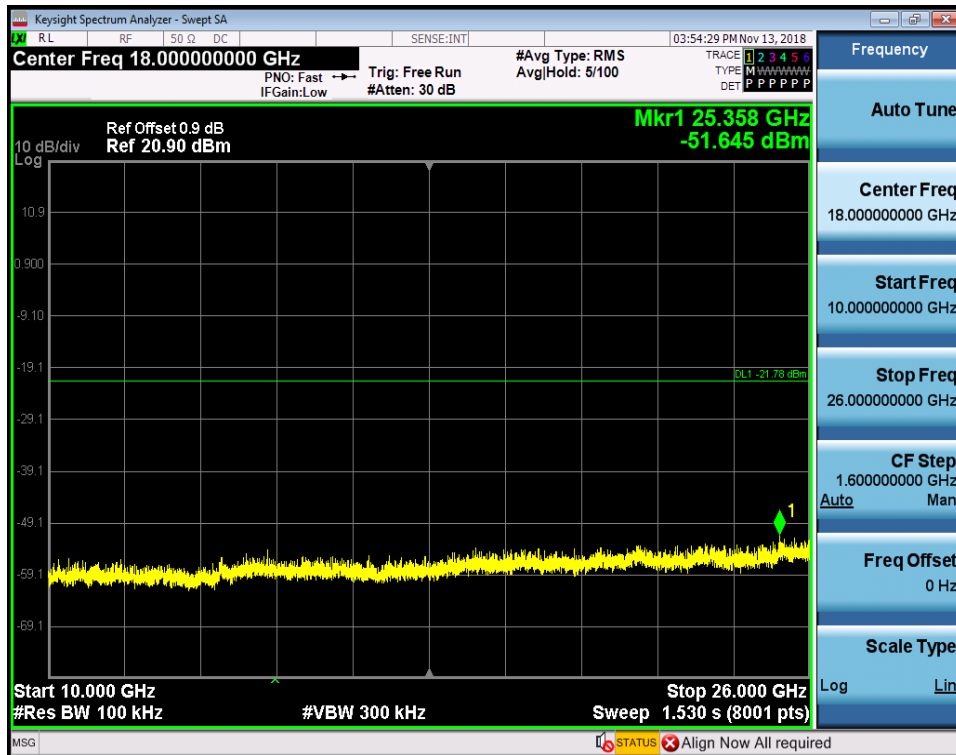

CSE_2

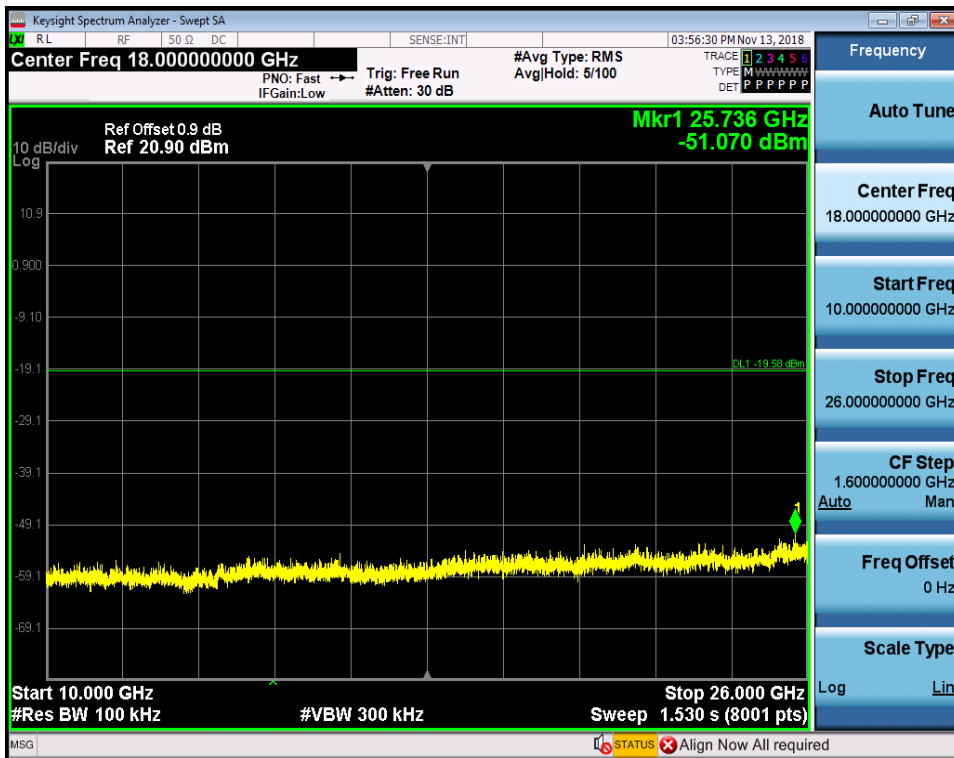


RF Conducted Spurious Emissions_3DH5_2441


Pref



CSE_1

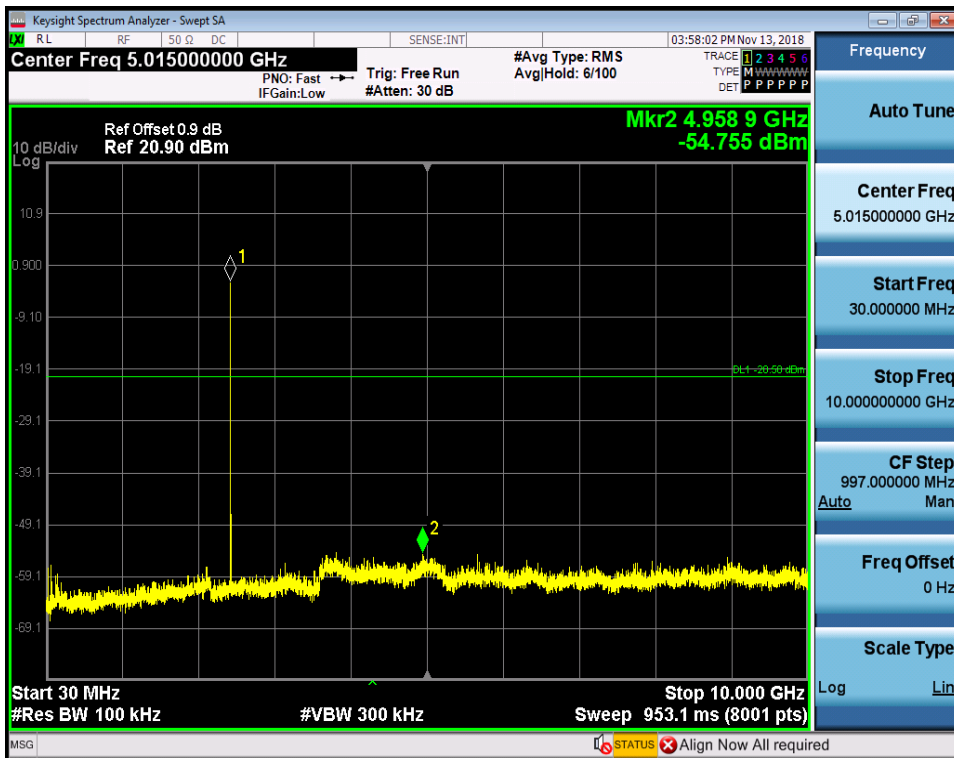

CSE_2

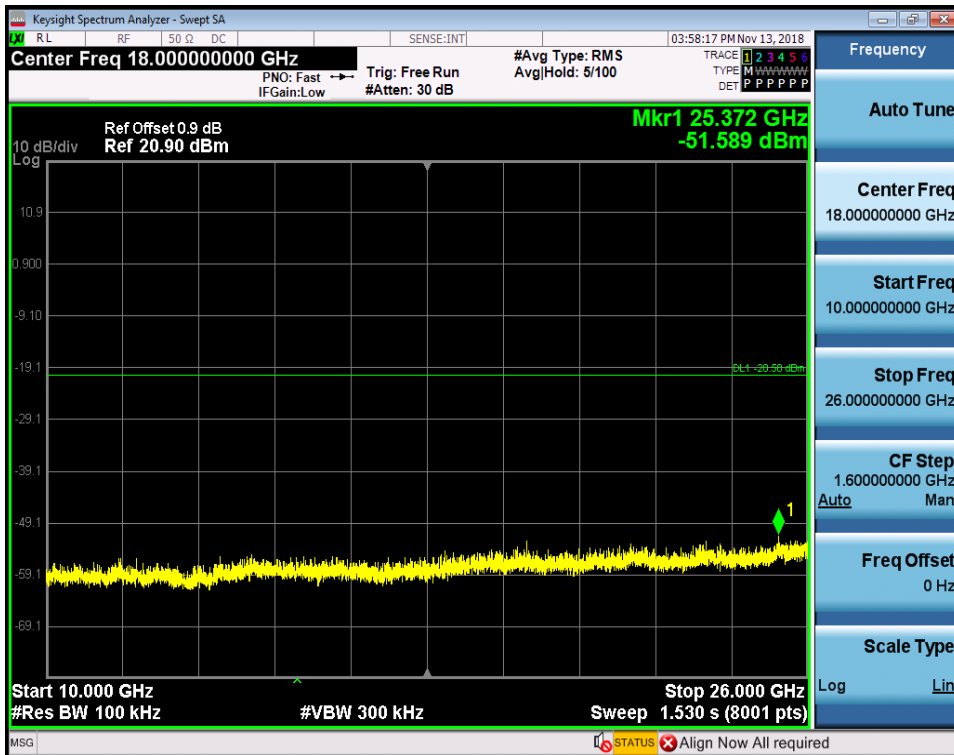


RF Conducted Spurious Emissions_3DH5_2480


Pref



CSE_1

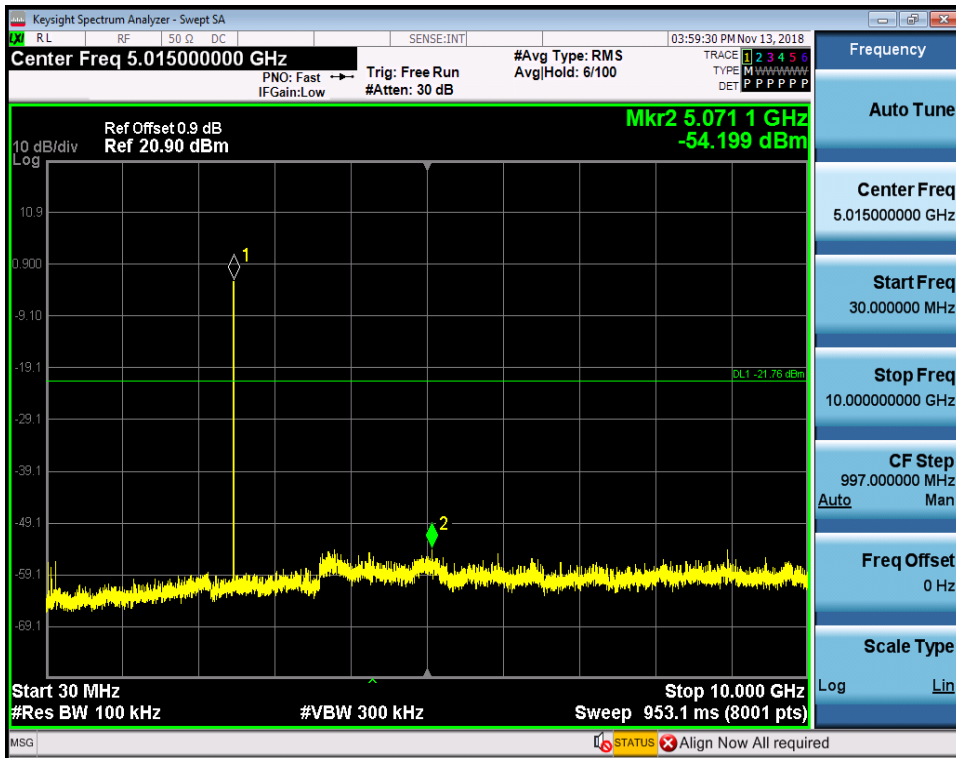

CSE_2

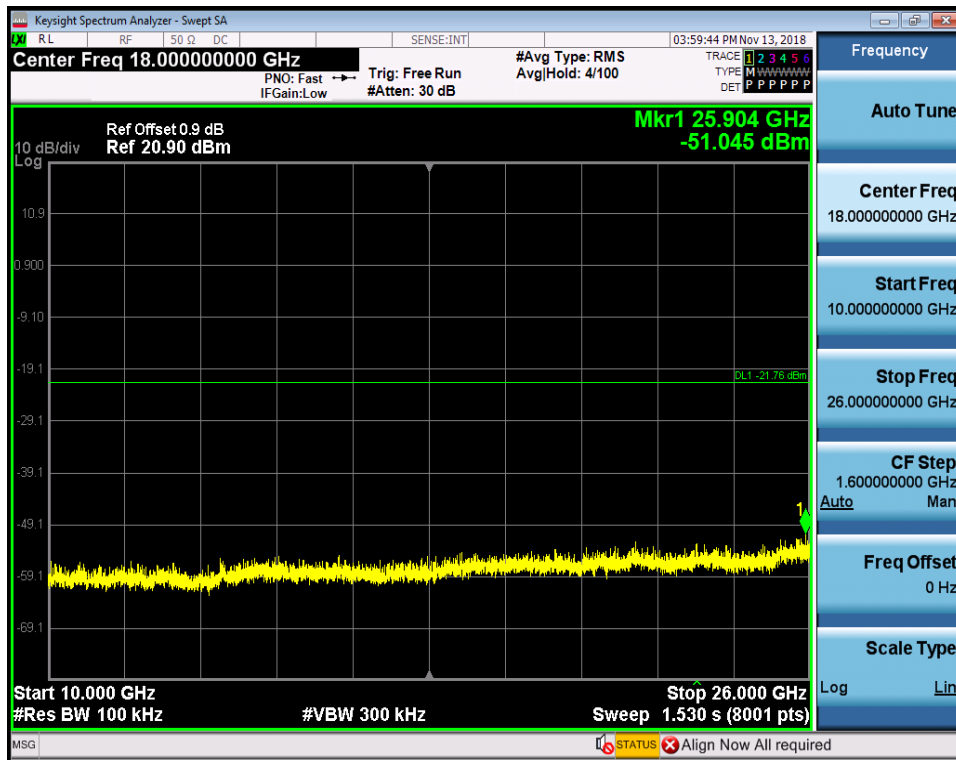

--End of Report--