

MEASUREMENT REPORT

FCC 15.407 WLAN 802.11a/n/ac

FCC ID: 2ADZR4G0812WA

APPLICANT: Nokia Shanghai Bell Co., Ltd

Application Type: Certification

Product: FastMile 4G Gateway

Model No.: 4G08-12W-A

Brand Name: NOKIA

FCC Classification: Unlicensed National Information Infrastructure (UNII)


FCC Rule Part(s): Part15 Subpart E (Section 15.407)

Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01

Test Date: November 02, 2019 ~ January 22, 2020

Reviewed By: 

(Sunny Sun)

Approved By: 

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1911RSU040-U2	Rev. 01	Initial Report	04-27-2020	Valid

CONTENTS

Description	Page
General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Equipment Description.....	8
2.2. Product Specification Subjective to this Report	8
2.3. Working Frequencies for this Report	9
2.4. Description of Available Antennas.....	10
2.5. Description of Antenna RF Port	11
2.6. Test Mode	11
2.7. Description of Test Software.....	11
2.8. Device Capabilities.....	12
2.9. EMI Suppression Device(s)/Modifications.....	13
2.10. Labeling Requirements	13
3. DESCRIPTION OF TEST	14
3.1. Evaluation Procedure.....	14
3.2. AC Line Conducted Emissions.....	14
3.3. Radiated Emissions	15
4. ANTENNA REQUIREMENTS	16
5. TEST EQUIPMENT CALIBRATION DATE	17
6. MEASUREMENT UNCERTAINTY	19
7. TEST RESULT	20
7.1. Summary	20
7.2. 26dB Bandwidth Measurement	21
7.2.1. Test Limit	21
7.2.2. Test Procedure used	21
7.2.3. Test Setting	21
7.2.4. Test Setup	21
7.2.5. Test Result	22
7.3. 6dB Bandwidth Measurement	36
7.3.1. Test Limit	36
7.3.2. Test Procedure used	36

7.3.3.	Test Setting	36
7.3.4.	Test Setup	36
7.3.5.	Test Result	37
7.4.	Output Power Measurement	42
7.4.1.	Test Limit	42
7.4.2.	Test Procedure Used	42
7.4.3.	Test Setting	42
7.4.4.	Test Setup	43
7.4.5.	Test Result	44
7.5.	Transmit Power Control	48
7.5.1.	Test Limit	48
7.5.2.	Test Procedure Used	48
7.5.3.	Test Setting	48
7.5.4.	Test Setup	48
7.5.5.	Test Result	48
7.6.	Power Spectral Density Measurement	49
7.6.1.	Test Limit	49
7.6.2.	Test Procedure Used	49
7.6.3.	Test Setting	49
7.6.4.	Test Setup	50
7.6.5.	Test Result	51
7.7.	Frequency Stability Measurement	76
7.7.1.	Test Limit	76
7.7.2.	Test Procedure Used	76
7.7.3.	Test Setup	76
7.7.4.	Test Result	77
7.8.	Radiated Spurious Emission Measurement	78
7.8.1.	Test Limit	78
7.8.2.	Test Procedure Used	78
7.8.3.	Test Setting	78
7.8.4.	Test Setup	80
7.8.5.	Test Result	81
7.9.	Radiated Restricted Band Edge Measurement	148
7.9.1.	Test Limit	148
7.9.2.	Test Result	150
7.10.	AC Conducted Emissions Measurement	268
7.10.1.	TestLimit	268
7.10.2.	Test Procedure	268
7.10.3.	Test Setup	269

7.10.4. Test Result	270
8. CONCLUSION	272
Appendix A - Test Setup Photograph	273
Appendix B - EUT Photograph	274

General Information

Applicant:	Nokia Shanghai Bell Co., Ltd
Applicant Address:	388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China
Manufacturer:	Nokia Shanghai Bell Co., Ltd
Manufacturer Address:	388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name:	FastMile 4G Gateway
Model No.:	4G08-12W-A
Brand Name:	NOKIA
Wi-Fi Specification:	802.11a/b/g/n/ac
LTE Specification:	Band 2, 4, 5, 7, 25, 38, 48, 66
Operating Temperature:	0 ~ 45 °C
Power Type:	AC adapter input

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5260~5320MHz, 5500~5720MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5270~5310MHz, 5510~5710MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz, 5690MHz, 5775MHz
Type of Modulation:	802.11a/n/ac: OFDM
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.6Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this Report

802.11a/n-HT20/ac-VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	--	--	--	--

802.11n-HT40/ac-VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	54	5270 MHz
62	5310 MHz	102	5510 MHz	110	5550 MHz
118	5590 MHz	126	5630 MHz	134	5670 MHz
142	5710 MHz	151	5755 MHz	159	5795 MHz

802.11ac-VHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	138	5690 MHz	155	5775 MHz

2.4. Description of Available Antennas

Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)		Directional Gain (dBi)			
					CDD Mode		Beam-Forming Mode	
			Ant 8	Ant 9	For Power	For PSD	For Power	For PSD
2.4GHz Wi-Fi	2400 ~ 2483.5	PCB	3.81	3.95	3.95	6.96	6.96	6.96
5GHz Wi-Fi	5150 ~ 5350	Dipole	4.13	3.99	4.13	7.14	7.14	7.14
	5470 ~ 5725		4.42	4.65	4.65	7.66	7.66	7.66
	5725 ~ 5850		4.56	4.67	4.67	7.68	7.68	7.68
Technology	Frequency Range (MHz)	Antenna Type	Max Peak Gain (dBi)					
LTE Band 2	1850 ~ 1910	PCB	4.27					
LTE Band 4	1710 ~ 1755		4.49					
LTE Band 5	824 ~ 849		0.10					
LTE Band 7	2500 ~ 2570		4.70					
LTE Band 25	1850 ~ 1915		4.27					
LTE Band 38	2570 ~ 2620		4.70					
LTE Band 48	3550 ~ 3700		4.80					
LTE Band 66	1710 ~ 1780		4.49					

Note 1: The EUT supports Cyclic Delay Diversity (CDD) with 802.11a/g/n/ac, CDD signals are correlated.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.


- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log (N_{ANT} / N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

Note 2: The EUT supports Beam Forming mode with 802.11n/ac.

The directional gain = $10 \cdot \log [(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.

2.5. Description of Antenna RF Port

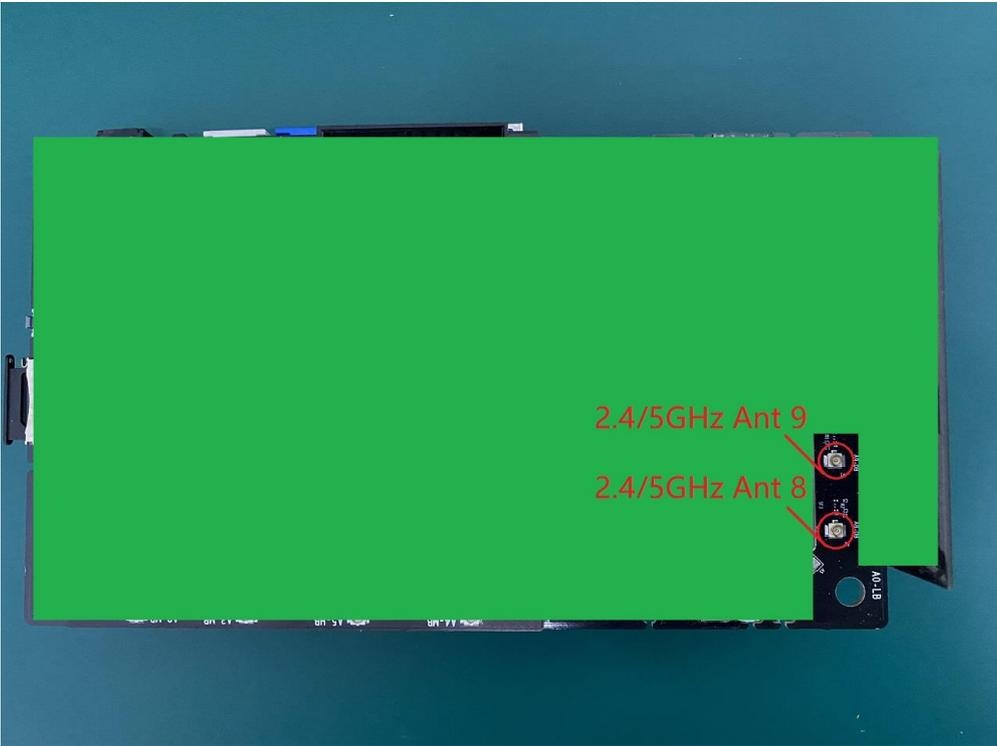Antenna RF Port				
--	2.4GHz RF Port		5GHz RF Port	
Software Control Port	Ant 8	Ant 9	Ant 8	Ant 9
				

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MCS0)
	Mode 3: Transmit by 802.11n-HT40 (MCS0)
	Mode 4: Transmit by 802.11ac-VHT20 (MCS0)
	Mode 5: Transmit by 802.11ac-VHT40 (MCS0)
	Mode 6: Transmit by 802.11ac-VHT80 (MCS0)

2.7. Description of Test Software

The test utility software used during testing was “Access Manual Tool”, and the version was “3.1.0.1”.


2.8. Device Capabilities

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:


Test Mode	Duty Cycle
802.11a	95.14%
802.11n-HT20	95.05%
802.11n-HT40	90.53%
802.11ac-VHT20	98.22%
802.11ac-VHT40	97.15%
802.11ac-VHT80	94.01%

Duty Cycle (T = Transmission Duration)


802.11a (T = 2.055ms)

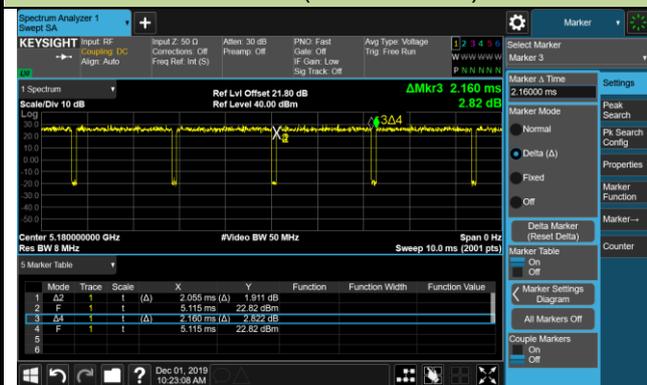


802.11n-HT20 (T = 1.920ms)

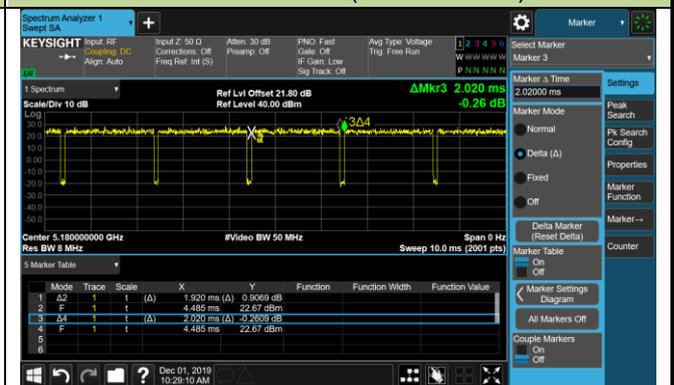


802.11n-HT40 (T = 0.942ms)

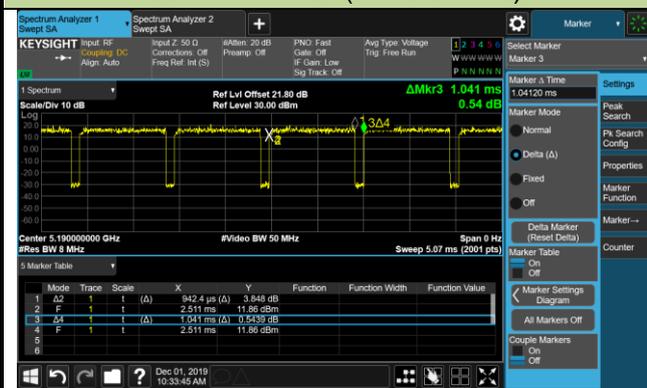

802.11ac-VHT20 (T = 1.930ms)

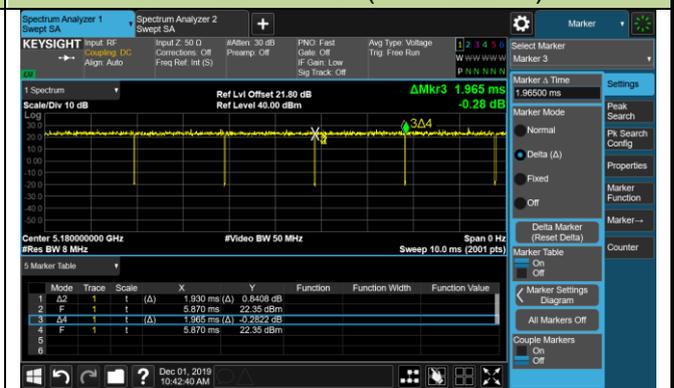

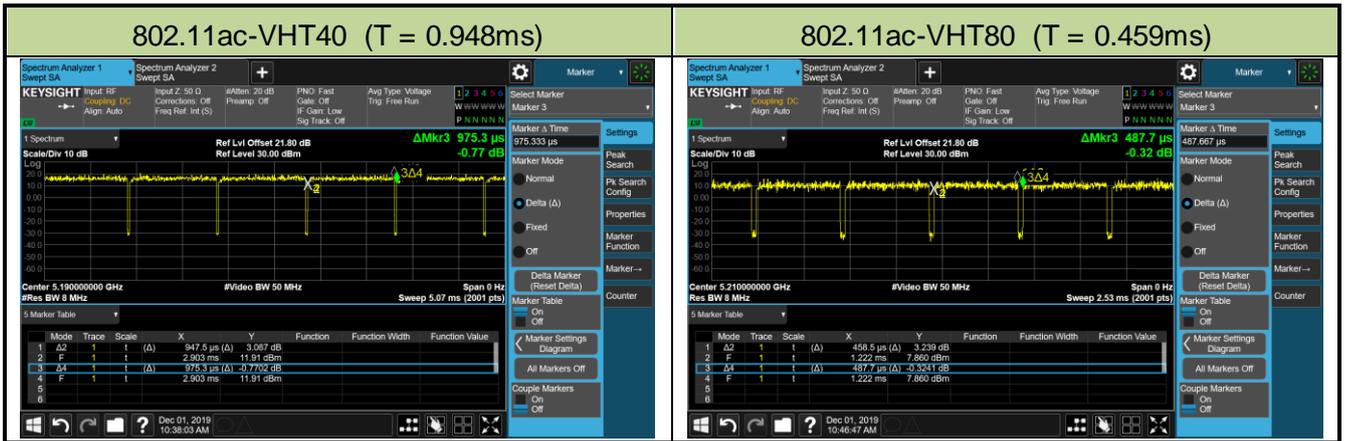

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlets supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 789033 D02v02r01 were used in the measurement.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2020/02/24
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2020/02/24
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/15
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement - SR2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>9kHz~150kHz: 3.84dB</p> <p>150kHz~30MHz: 3.46dB</p>
Radiated Emission Measurement - AC1
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 4.07dB</p> <p> 300MHz~1GHz: 3.63dB</p> <p> 1GHz~18GHz: 4.16dB</p> <p>Vertical: 30MHz~300MHz: 4.18dB</p> <p> 300MHz~1GHz: 3.60dB</p> <p> 1GHz~18GHz: 4.76dB</p>
Radiated Emission Measurement - AC2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 3.75dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.28dB</p> <p>Vertical: 30MHz~300MHz: 3.86dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.33dB</p>

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	≥ 500kHz		Pass	Section 7.3
15.407(a)(1)(ii), (2), (3)	Maximum Conducted Output Power	Refer to Section 7.4		Pass	Section 7.4
15.407(h)(1)	Transmit Power Control	≤ 24 dBm		Pass	Section 7.5
15.407(a)(1)(ii), (2), (3), (5)	Peak Power Spectral Density	Refer to Section 7.6		Pass	Section 7.6
15.407(g)	Frequency Stability	Refer to Section 7.7		Pass	Section 7.7
15.407(b)(1), (2), (3), (4)(i)	Undesirable Emissions	Refer to Section 7.8	Radiated	Pass	Section 7.8 & 7.9
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.10

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Test Items “26dB Bandwidth”, “99% Bandwidth”, “6dB Bandwidth” have been assessed single and MIMO transmission, and showed the worst test data in this report.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

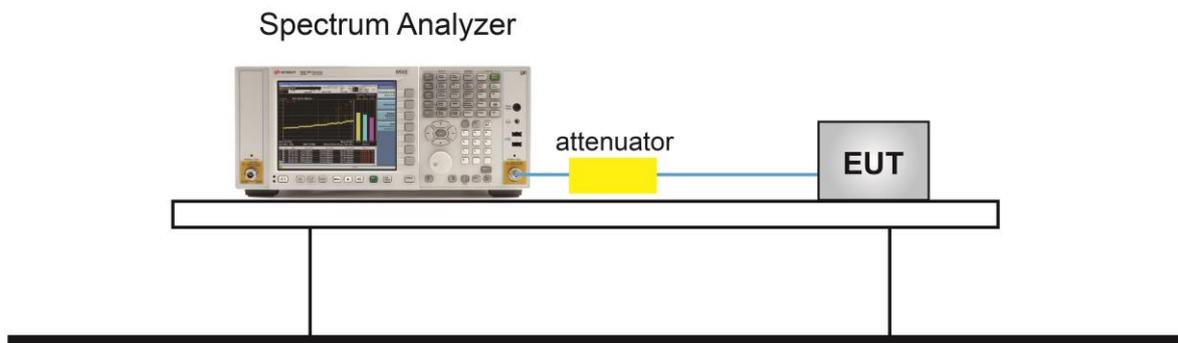

7.2.5. Test Result

Product	FastMile 4G Gateway	Temperature	22 ~ 25°C
Test Engineer	Cloud Guo	Relative Humidity	46 ~ 58%
Test Site	TR3	Test Date	2019/11/26 ~ 2019/12/04

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 8					
802.11a	6Mbps	36	5180	32.93	17.53
802.11a	6Mbps	44	5220	32.98	17.99
802.11a	6Mbps	48	5240	32.80	17.84
802.11a	6Mbps	52	5260	20.20	16.68
802.11a	6Mbps	60	5300	20.06	16.72
802.11a	6Mbps	64	5320	20.07	16.73
802.11a	6Mbps	100	5500	20.33	16.67
802.11a	6Mbps	120	5600	20.20	16.68
802.11a	6Mbps	140	5700	20.14	16.73
802.11a	6Mbps	144	5720	20.17	16.70
802.11a	6Mbps	149	5745	21.62	16.81
802.11a	6Mbps	157	5785	35.63	18.48
802.11a	6Mbps	165	5825	20.05	16.67
Ant 8 / Ant 8 + 9					
802.11n-HT20	MCS0	36	5180	20.60	17.89
802.11n-HT20	MCS0	44	5220	35.88	18.46
802.11n-HT20	MCS0	48	5240	37.95	18.66
802.11n-HT20	MCS0	52	5260	20.51	17.84
802.11n-HT20	MCS0	60	5300	20.58	17.79
802.11n-HT20	MCS0	64	5320	20.36	17.80
802.11n-HT20	MCS0	100	5500	20.63	17.84
802.11n-HT20	MCS0	120	5600	20.35	17.79
802.11n-HT20	MCS0	140	5700	20.57	17.79
802.11n-HT20	MCS0	144	5720	20.21	17.85
802.11n-HT20	MCS0	149	5745	29.12	18.03
802.11n-HT20	MCS0	157	5785	37.64	18.76
802.11n-HT20	MCS0	165	5825	20.29	17.80



Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 8 / Ant 8 + 9					
802.11n-HT40	MCS0	38	5190	39.87	36.34
802.11n-HT40	MCS0	46	5230	74.86	36.99
802.11n-HT40	MCS0	54	5270	39.58	36.34
802.11n-HT40	MCS0	62	5310	39.50	36.29
802.11n-HT40	MCS0	102	5510	39.59	36.28
802.11n-HT40	MCS0	118	5590	39.17	36.24
802.11n-HT40	MCS0	134	5670	39.36	36.36
802.11n-HT40	MCS0	142	5710	39.78	36.27
802.11n-HT40	MCS0	151	5755	74.14	37.21
802.11n-HT40	MCS0	159	5795	74.09	37.30
802.11ac-VHT20	MCS0	36	5180	20.19	17.79
802.11ac-VHT20	MCS0	44	5220	36.36	18.51
802.11ac-VHT20	MCS0	48	5240	37.35	18.50
802.11ac-VHT20	MCS0	52	5260	20.31	17.72
802.11ac-VHT20	MCS0	60	5300	20.48	17.75
802.11ac-VHT20	MCS0	64	5320	20.32	17.76
802.11ac-VHT20	MCS0	100	5500	20.44	17.77
802.11ac-VHT20	MCS0	120	5600	20.48	17.76
802.11ac-VHT20	MCS0	140	5700	20.34	17.74
802.11ac-VHT20	MCS0	144	5720	20.29	17.74
802.11ac-VHT20	MCS0	149	5745	31.51	18.17
802.11ac-VHT20	MCS0	157	5785	36.89	18.78
802.11ac-VHT20	MCS0	165	5825	20.40	17.81

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
Ant 8 / Ant 8 + 9					
802.11ac-VHT40	MCS0	38	5190	39.47	36.29
802.11ac-VHT40	MCS0	46	5230	74.14	36.88
802.11ac-VHT40	MCS0	54	5270	39.30	36.30
802.11ac-VHT40	MCS0	62	5310	39.46	36.30
802.11ac-VHT40	MCS0	102	5510	39.66	36.28
802.11ac-VHT40	MCS0	118	5590	39.11	36.30
802.11ac-VHT40	MCS0	134	5670	39.55	36.30
802.11ac-VHT40	MCS0	142	5710	39.43	36.36
802.11ac-VHT40	MCS0	151	5755	74.57	37.10
802.11ac-VHT40	MCS0	159	5795	78.09	37.56
802.11ac-VHT80	MCS0	42	5210	81.35	75.58
802.11ac-VHT80	MCS0	58	5290	81.25	75.63
802.11ac-VHT80	MCS0	106	5530	81.95	75.69
802.11ac-VHT80	MCS0	122	5610	81.47	75.71
802.11ac-VHT80	MCS0	138	5690	81.37	75.79
802.11ac-VHT80	MCS0	155	5775	125.50	76.18

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 8


Channel 36 (5180MHz)




Channel 44 (5220MHz)



Channel 48 (5240MHz)

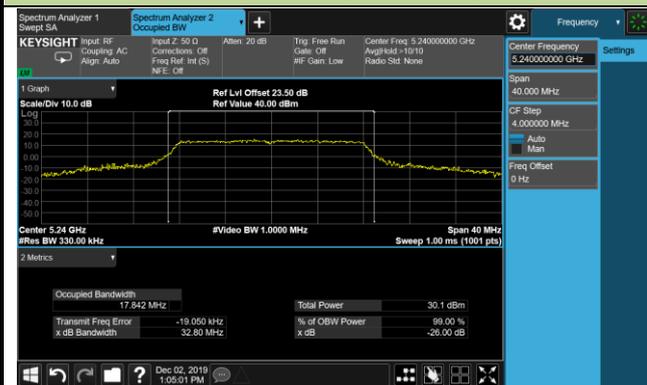


Channel 52 (5260MHz)

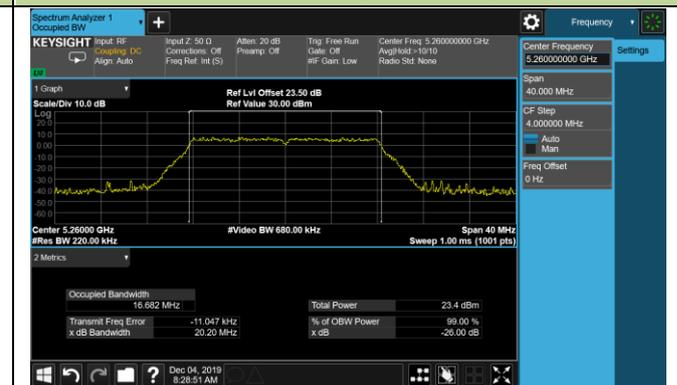


Channel 60 (5300MHz)




Channel 64 (5320MHz)

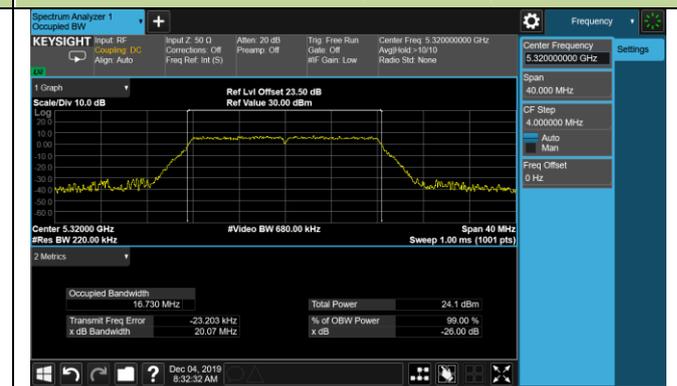

Channel 100 (5500MHz)

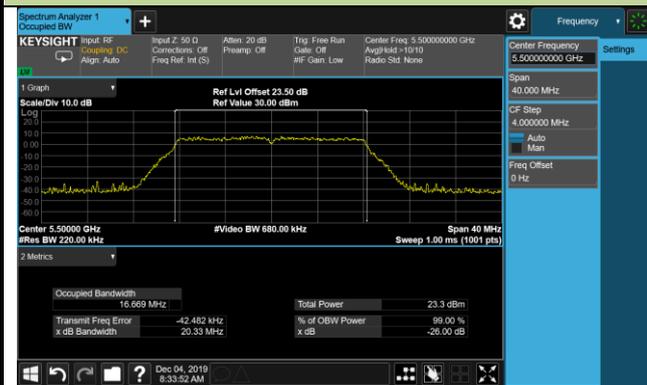

Channel 100 (5600MHz)

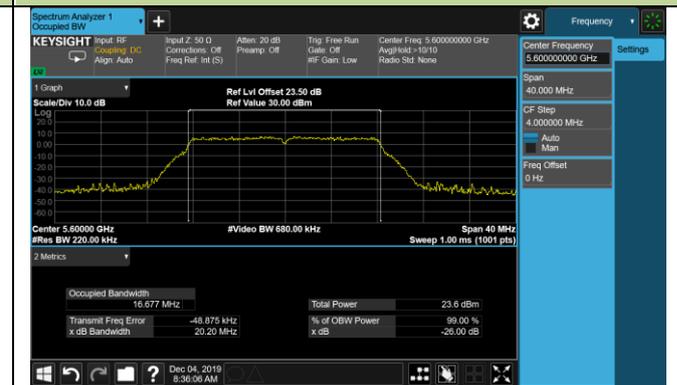

802.11a 26dB Bandwidth & 99% Bandwidth - Ant 8

Channel 140 (5700MHz)




Channel 144 (5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)

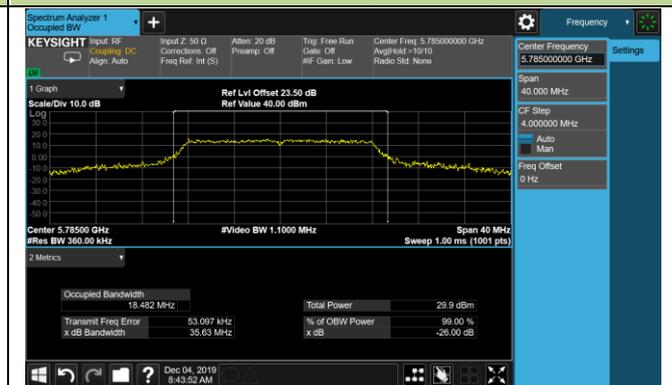


Channel 165 (5825MHz)




802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9

Channel 36 (5180MHz)

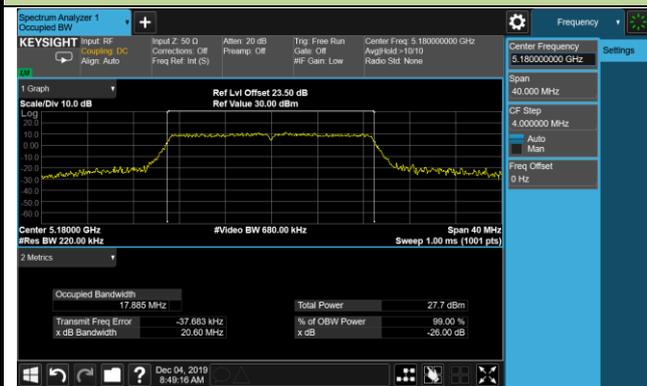

Channel 44 (5220MHz)

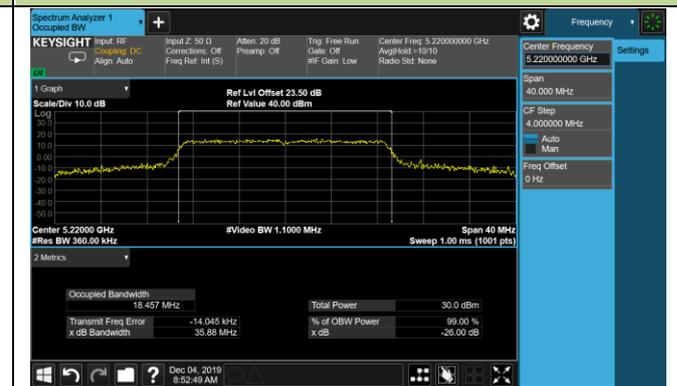


Channel 48 (5240MHz)




Channel 52 (5260MHz)



Channel 60 (5300MHz)

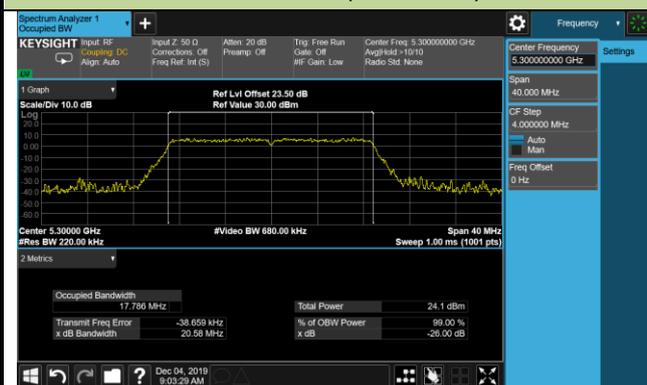

Channel 64 (5320MHz)

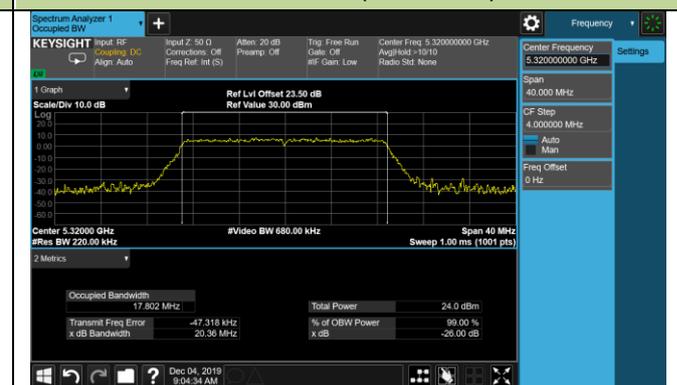

Channel 100 (5500MHz)




Channel 100 (5600MHz)



802.11n-HT20 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9

Channel 140 (5700MHz)

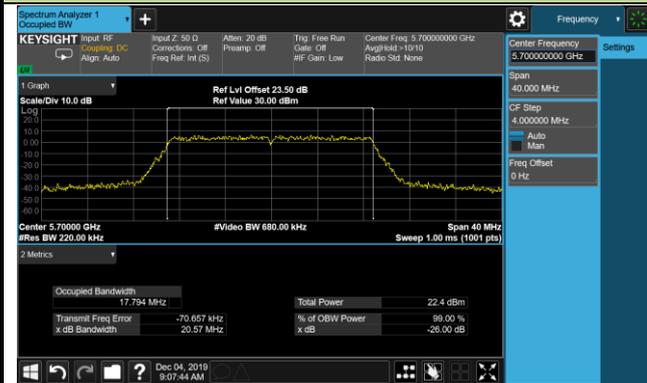


Channel 144 (5720MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)

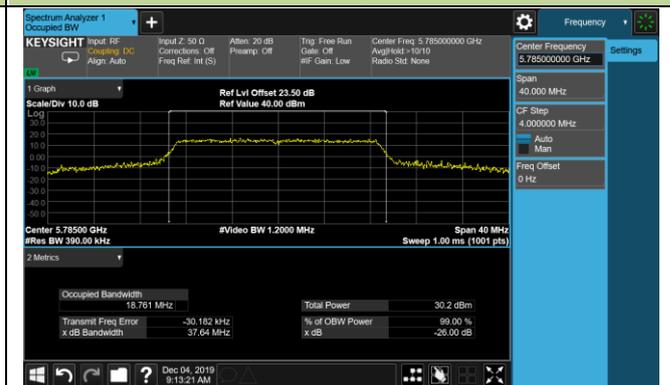


Channel 165 (5825MHz)



802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 38 (5190MHz)

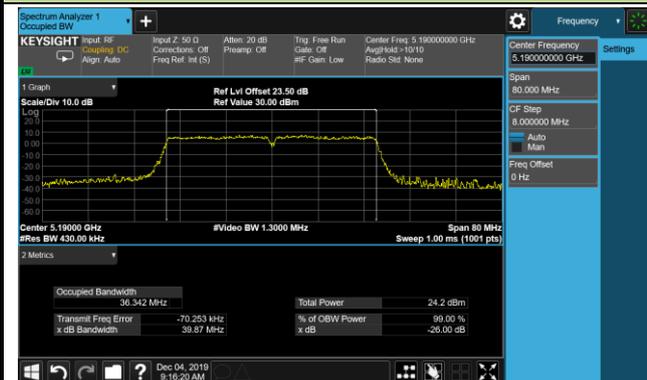


Channel 46 (5230MHz)




Channel 54 (5270MHz)

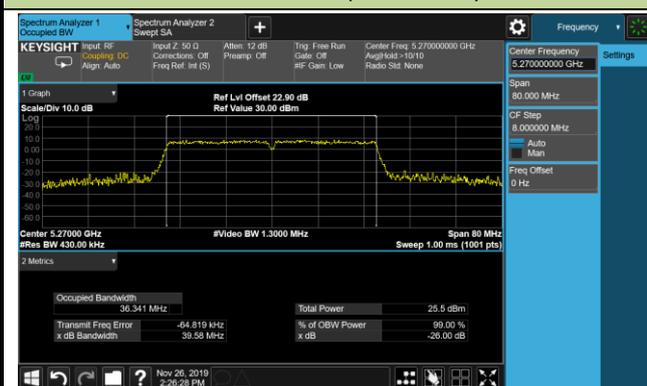


Channel 62 (5310MHz)

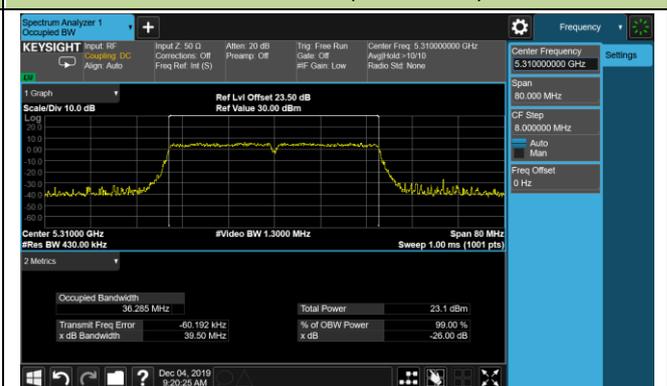

Channel 102 (5510MHz)

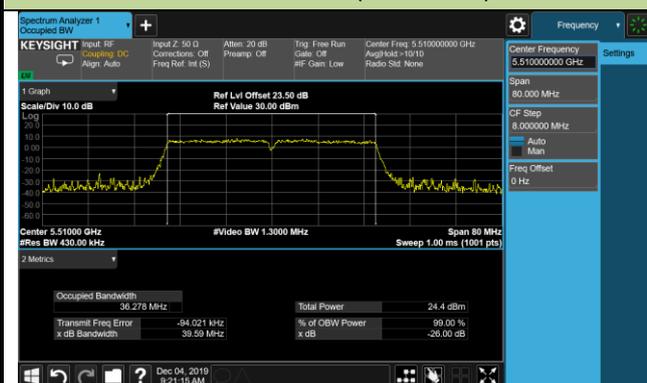


Channel 118 (5590MHz)

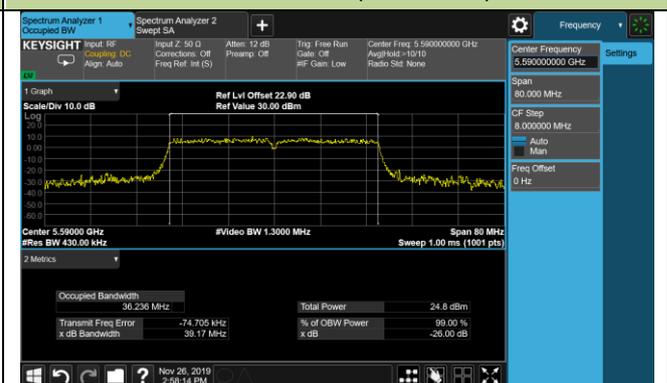

Channel 134 (5670MHz)



Channel 142 (5710MHz)

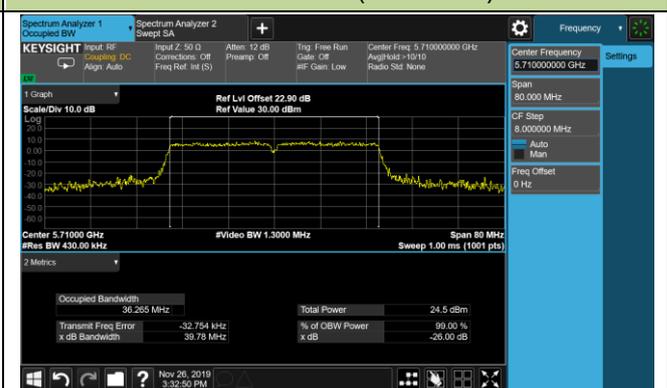

802.11n-HT40 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 151 (5755MHz)

Channel 159 (5795MHz)



802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 36 (5180MHz)

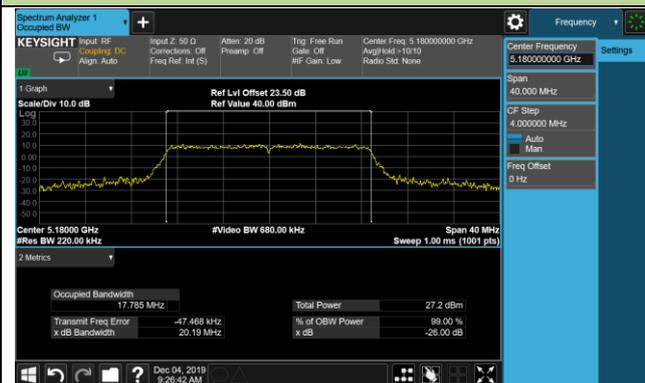


Channel 44 (5220MHz)




Channel 48 (5240MHz)

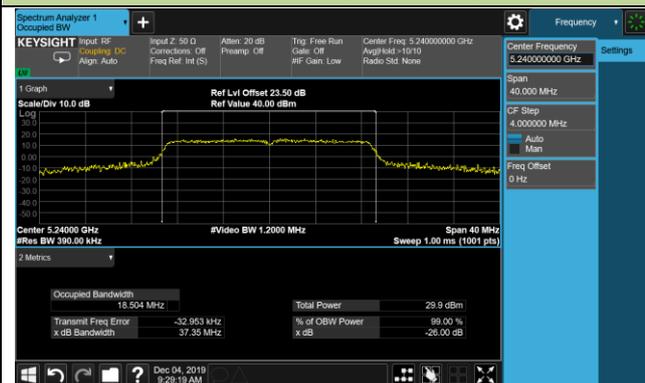


Channel 52 (5260MHz)

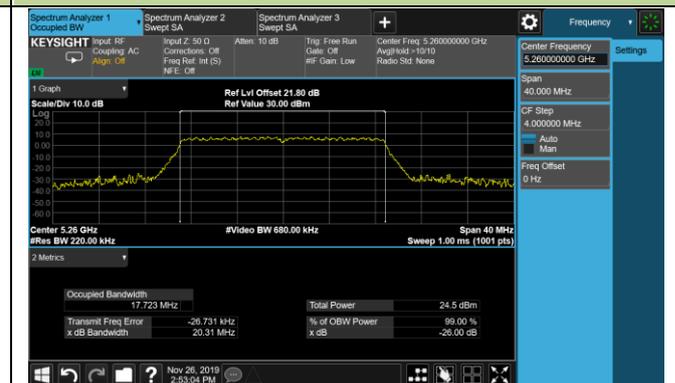


Channel 60 (5300MHz)

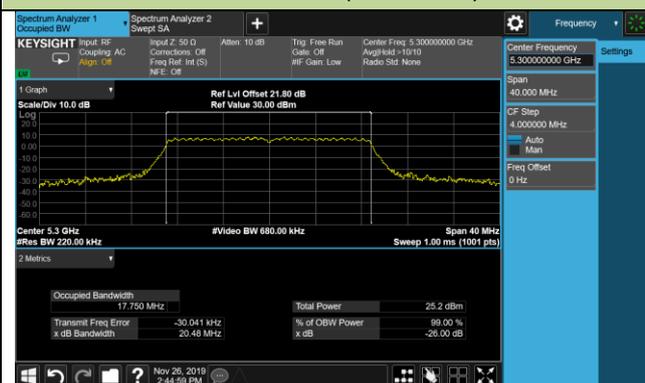


Channel 64 (5320MHz)

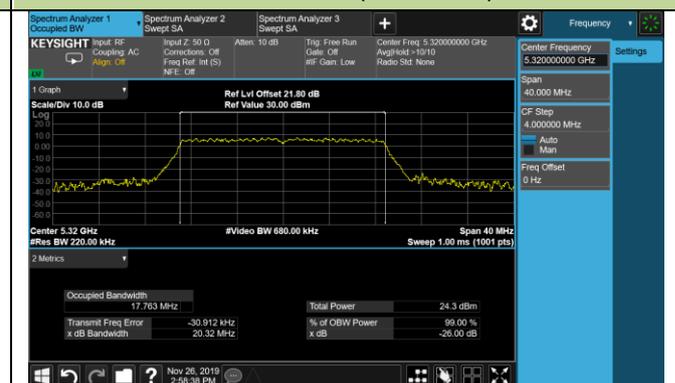

Channel 100 (5500MHz)

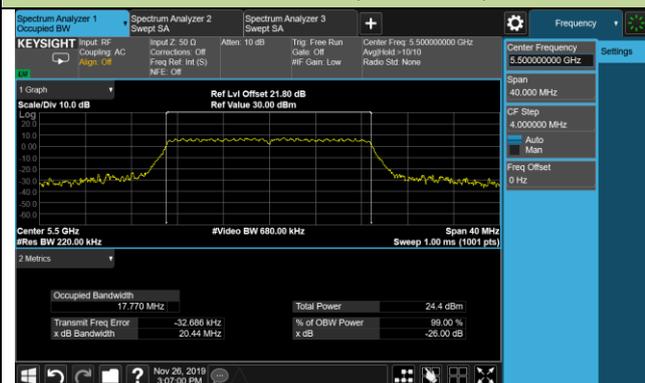


Channel 100 (5600MHz)

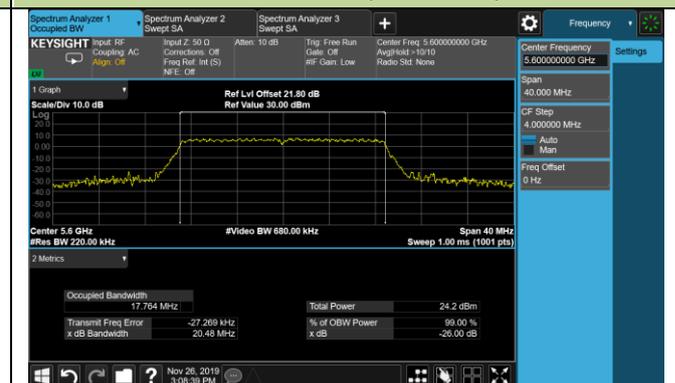


802.11ac-VHT20 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 140 (5700MHz)

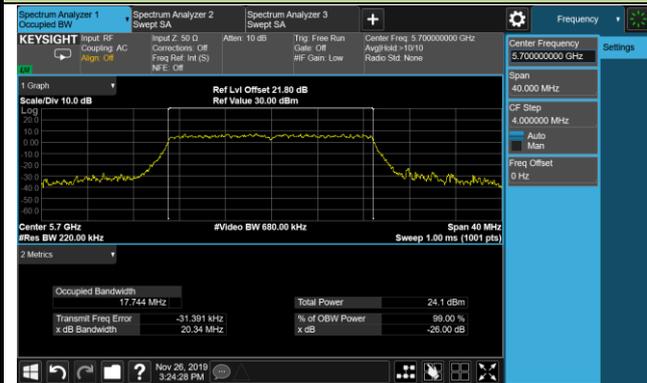

Channel 144 (5720MHz)

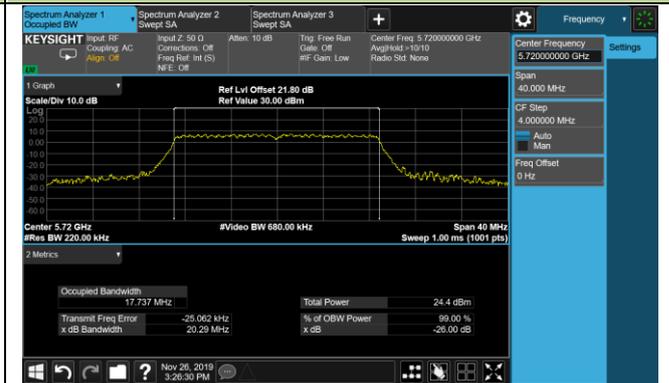


Channel 149 (5745MHz)

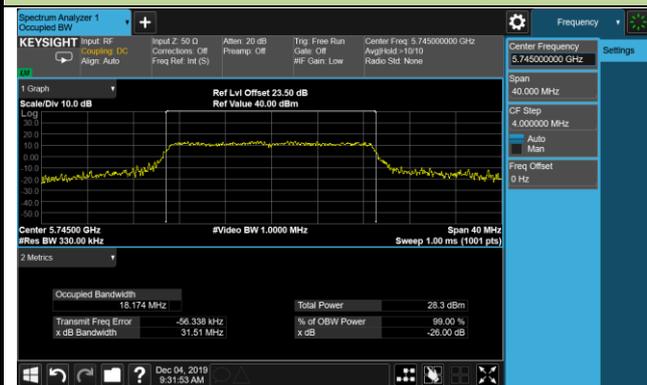

Channel 157 (5785MHz)




Channel 165 (5825MHz)

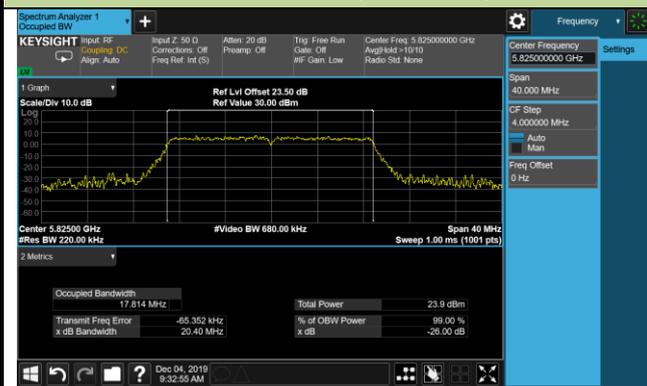

802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 38 (5190MHz)

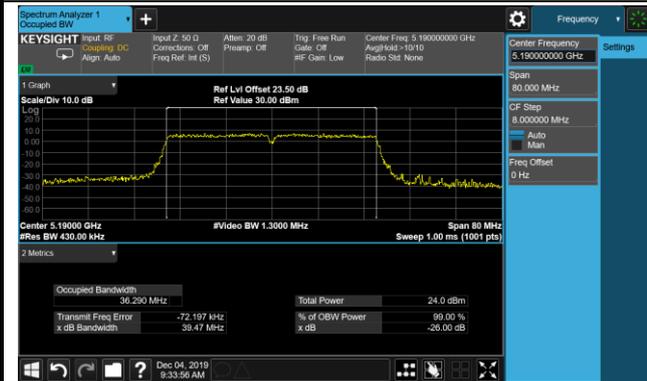


Channel 46 (5230MHz)



Channel 54 (5270MHz)

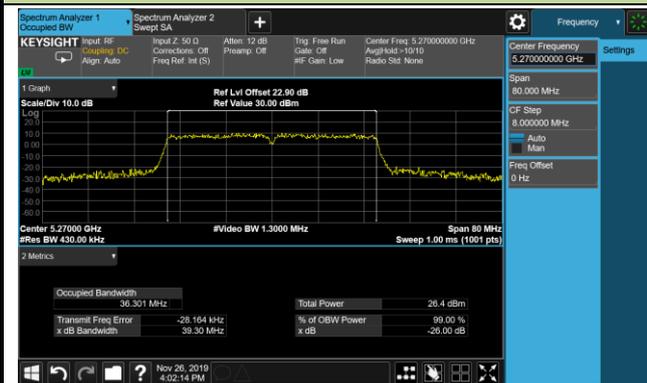


Channel 62 (5310MHz)

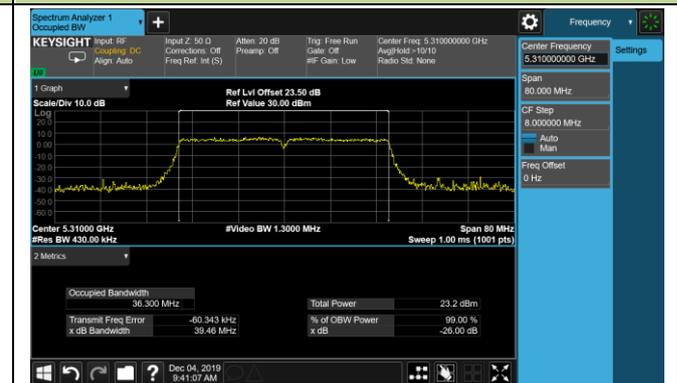


Channel 102 (5510MHz)




Channel 118 (5590MHz)

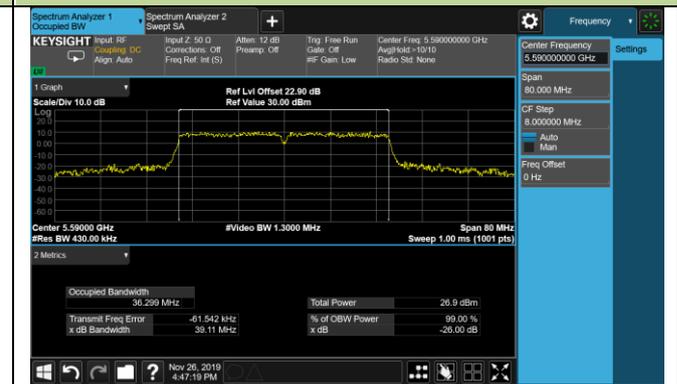

Channel 134 (5670MHz)

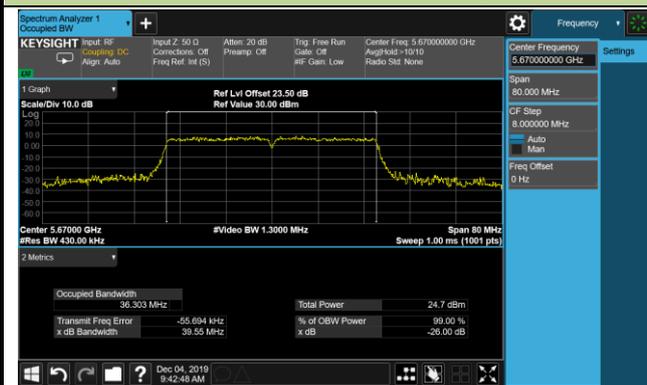

Channel 142 (5710MHz)

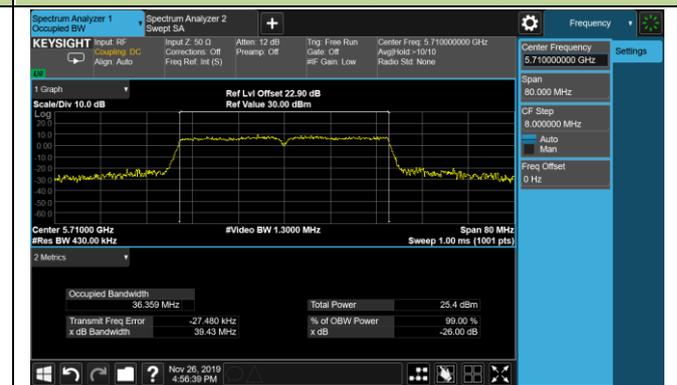

802.11ac-VHT40 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 151 (5755MHz)

Channel 159 (5795MHz)



802.11ac-VHT80 26dB Bandwidth & 99% Bandwidth - Ant 8 / Ant 8 + 9


Channel 42 (5210MHz)

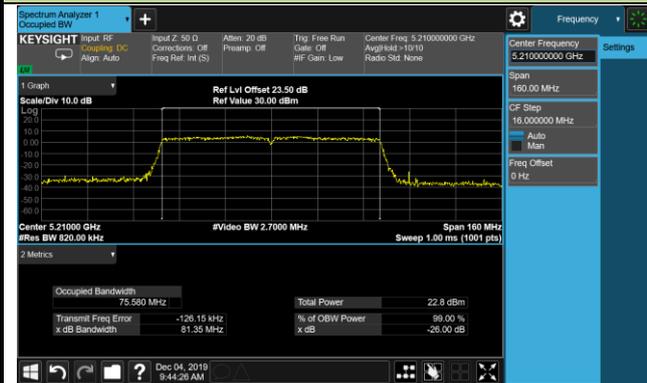


Channel 58 (5290MHz)




Channel 106 (5530MHz)

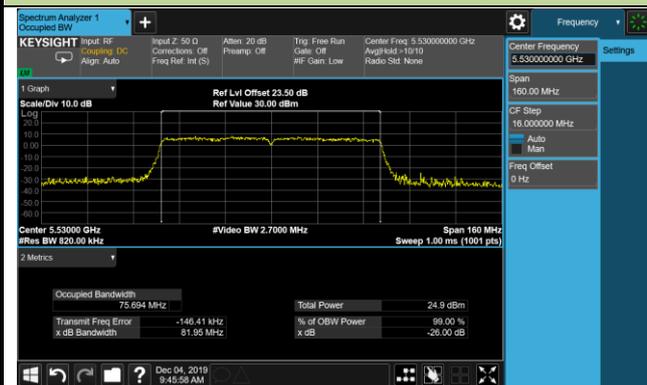

Channel 122 (5610MHz)

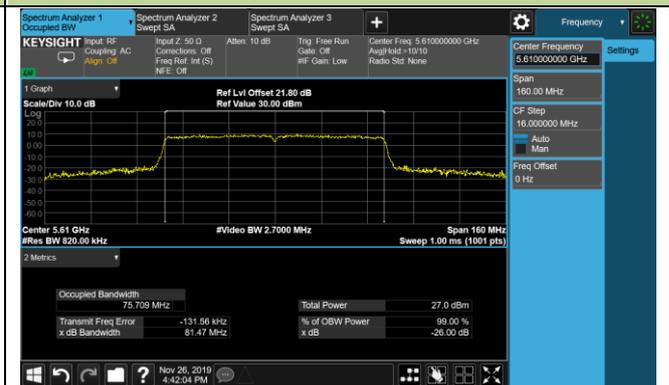

Channel 138 (5690MHz)

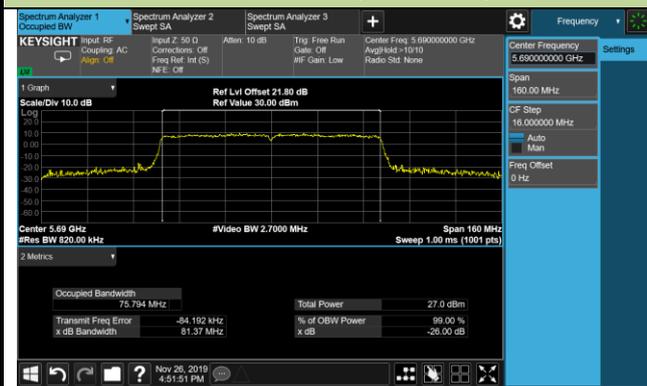

Channel 155 (5775MHz)



7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

ANSI C63.10-2013 - Section 6.9.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. $VBW \geq 3 \times RBW$.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

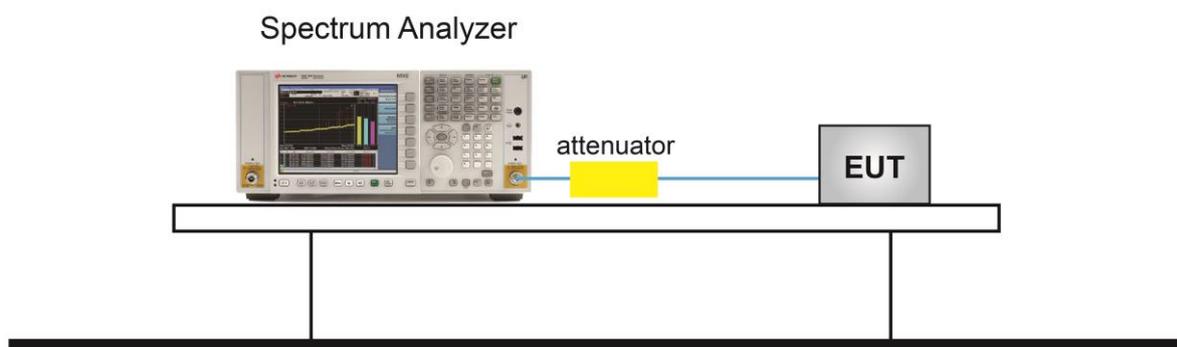


7.3.5. Test Result

Product	FastMile 4G Gateway	Temperature	25°C
Test Engineer	Cloud Guo	Relative Humidity	56%
Test Site	TR3	Test Date	2019/12/04

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 8						
802.11a	6Mbps	149	5745	16.44	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.37	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.41	≥ 0.5	Pass
Ant 8 / Ant 8 + 9						
802.11n-HT20	MCS0	149	5745	17.62	≥ 0.5	Pass
802.11n-HT20	MCS0	157	5785	17.63	≥ 0.5	Pass
802.11n-HT20	MCS0	165	5825	17.61	≥ 0.5	Pass
802.11n-HT40	MCS0	151	5755	36.37	≥ 0.5	Pass
802.11n-HT40	MCS0	159	5795	36.41	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.62	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.62	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.63	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	36.37	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.37	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	75.71	≥ 0.5	Pass

802.11a 6dB Bandwidth - Ant 8

Channel 149 (5745MHz)

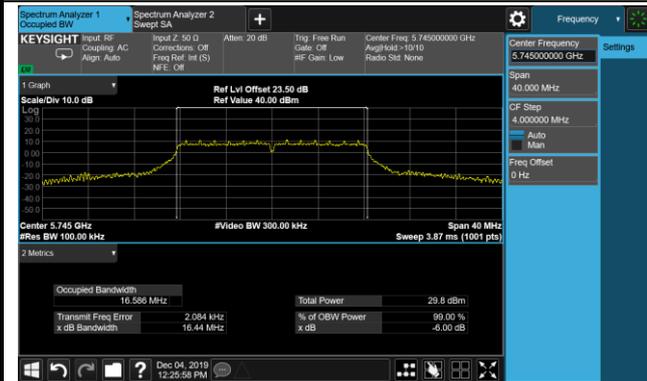

Channel 157 (5785MHz)



Channel 165 (5825MHz)

