



FCC RF Test Report

APPLICANT : Nokia Shanghai Bell Co., Ltd.
EQUIPMENT : Nokia FastMile 5G Gateway 12
BRAND NAME : Nokia
MODEL NAME : 5G31-03W-B
FCC ID : 2ADZR5G3103WB
STANDARD : 47 CFR Part 2, 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Apr. 12, 2024 ~ May 08, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report..... 4

Summary of Test Result..... 5

1 General Description 6

 1.1 Applicant..... 6

 1.2 Manufacturer 6

 1.3 Feature of Equipment Under Test..... 6

 1.4 Maximum EIRP Power and Emission Designator 7

 1.5 Testing Site..... 8

 1.6 Test Software 8

 1.7 Applied Standards 9

2 Test Configuration of Equipment Under Test 10

 2.1 Test Mode..... 10

 2.2 Connection Diagram of Test System 12

 2.3 Support Unit used in test configuration 12

 2.4 Measurement Results Explanation Example 12

 2.5 Frequency List of Low/Middle/High Channels..... 13

3 Conducted Test Items..... 15

 3.1 Measuring Instruments..... 15

 3.2 Test Setup 15

 3.3 Conducted Output Power 16

 3.4 Peak-to-Average Ratio 18

 3.5 EIRP 19

 3.6 Occupied Bandwidth 20

 3.7 Conducted Band Edge 21

 3.8 Conducted Spurious Emission 22

 3.9 Frequency Stability..... 23

4 Radiated Test Items 24

 4.1 Measuring Instruments..... 24

 4.2 Test Setup 24

 4.3 Test Result of Radiated Test..... 25

 4.4 Radiated Spurious Emission 26

5 List of Measuring Equipment..... 27

6 Measurement Uncertainty 28

Appendix A. Test Results of Conducted Test A1

 A1. Conducted Output Power(Average power) and EIRP A1

 A2. LTE Band 48 A3

 A2.1 26dB Bandwidth..... A3

 A2.2 Occupied Bandwidth A6

 A2.3 ACLR..... A9

 A2.4 Conducted Band Edge..... A45

 A2.5 Conducted Spurious Emission..... A81

 A2.6 Frequency Stability A85

 A3. LTE Band 48C..... A86



A3.1 26dB Bandwidth A86
A3.2 Occupied Bandwidth A91
A3.3 ACLR..... A96
A3.4 Conducted Band Edge A159
A3.5 Conducted Spurious Emission..... A201
Appendix B. Test Results of Radiated Test B1
Appendix C. Setup Photographs C1



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.3	§2.1046	Conducted Output Power	Reporting only	-
3.4	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.5	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.6	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.7	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.8	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.9	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 19.73 dB at 14469.00 MHz

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Nokia Shanghai Bell Co., Ltd.

388#, Ningqiao Road, China (Shanghai) Pilot Free Trade Zone, Shanghai 201206, China

1.2 Manufacturer

Nokia Solutions and Networks Oy

Karakaari 7, 02610 Espoo, Finland

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Nokia FastMile 5G Gateway 12
Brand Name	Nokia
Model Name	5G31-03W-B
FCC ID	2ADZR5G3103WB
Tx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz
Rx Frequency	LTE Band 48: 3550 MHz ~ 3700 MHz
Bandwidth	5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power to Antenna	<Ant.1> LTE Band 48: 18.86 dBm LTE CA_48C : 18.83 dBm
Antenna Gain	<Ant.1> LTE Band 48: 3.4 dBi
Type of Modulation	QPSK / 16QAM / 64QAM / 256QAM
SN / IMEI Code	Conducted: KLT241102369(SN) Radiation: 355630740001636(IMEI)
HW Version	3TG03021Exxx (x may be from A to Z)
SW Version	5GGW-QCOM7X_D240200B31T0601E0496
EUT Stage	Identical Prototype

Remark: There are three samples under test, only different for the antenna manufacturers as below. According to the difference, we choose sample 1 to full test and the sample 2/3 are verified the RSE worse cases of LTE/NR in another report.

Ant Description	P/N	Vendor_1	Vendor_2	Vendor_3
Ant0&WiFi3_2.4G	3TG03393AAAA	GW12-A0W3	N42NKASA-PK1-D1X95BUD150U4LI	NKH049-15-000-R
Ant1&WiFi2_6G	3TG03394AAAA	GW12-A1W2	N40NKASB-PK1-E1X190BUE110U4LI	NKH050-15-000-R
Ant 2,Ant3,Ant5,Ant7	3TG03395AAAA	GW12-A2357	N40NKASC-PK1-R150U4LID115U4LI E165U4LIA105U4LI	NKH051-15-000-R
Ant4,Ant6&Ant9	3TG03396AAAA	GW12-A469	N40NKASD-PK1-A135U4LID170U4LI E200U4LI	NKH052-15-000-R
WiFi1_6G	3TG03397AAAA	GW12-W1	N06NKASF-PK1-A1X95BU	NKH053-15-000-R
WiFi4_2.4G	3TG03398AAAA	GW12-W4	N01NKASG-PK1-R1X160BU	NKH054-15-000-R
WiFi5_5G	3TG03399AAAA	GW12-W5	N02NKASH-PK1-D1X90BU	NKH055-15-000-R
Ant8&WiFi6_5G	3TG03400AAAA	GW12-A8W6	N43NKASE-PK1-E1X95BUA165U4LI	NKH056-15-000-R
WiFi7_5G	3TG03401AAAA	GW12-W7	N02NKASJ-PK1-A1X95BU	NKH057-15-000-R
WiFi8_5G	3TG03402AAAA	GW12-W8	N02NKASK-PK1-R1X115BU	NKH058-15-000-R



1.4 Maximum EIRP Power and Emission Designator

LTE Band 48		QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	3552.5~3697.5	0.1656	4M51G7D	0.1002	4M51W7D
10	3555~3695	0.1644	9M05G7D	0.1012	9M05W7D
15	3557.5~3692.5	0.1648	13M5G7D	0.1014	13M4W7D
20	3560~3690	0.1683	17M9G7D	0.1030	17M9W7D

LTE Band 48 CA		QPSK		16QAM/64QAM/256QAM	
BW (MHz) Frequency (MHz)		Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5MHz+20MHz (3553.5 ~ 3690 MHz)		0.1469	23M2G7D	0.1306	23M1W7D
10MHz+20MHz (3555.5 ~ 3690 MHz)		0.1466	27M9G7D	0.1288	27M8W7D
15MHz+20MHz (3557.8 ~ 3690 MHz)		0.1524	32M7G7D	0.1361	32M5W7D
20MHz+5MHz (3560 ~ 3696.7 MHz)		0.1486	23M3G7D	0.1288	23M2W7D
20MHz+10MHz (3560 ~ 3694.5 MHz)		0.1449	28M1G7D	0.1312	28M1W7D
20MHz+15MHz (3560 ~ 3692.2 MHz)		0.1449	32M8G7D	0.1321	33M0W7D
20MHz+20MHz (3560 ~ 3690 MHz)		0.1671	37M7G7D	0.1462	37M8W7D

Note: All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test cases in section 3 of this report.

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH04-KS	AUDIX	E3	210616



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 2, 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation				RB #			Test Channel			
		1.4	3	5	10	15	20	QPSK	16 QAM	64 QAM	256 QAM	1	Half	Full	L	M	H	
Max. Output Power	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v	v	
Adjacent Channel Leakage Ratio	48	-	-	v	v	v	v	v	v	v			v	v	v	v		
26dB and 99% Bandwidth	48	-	-	v	v	v	v	v	v				v		v			
Conducted Band Edge	48	-	-	v	v	v	v	v	v	v			v	v	v	v		
Conducted Spurious Emission	48	-	-	v	v	v	v	v					v		v	v		
E.I.R.P	48	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v		
Frequency Stability	48	-	-		v			v				v				v		
Radiated Spurious Emission	48	Worst Case															v	
Remark	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "- " means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power. 																	



Test Items	Band	Bandwidth (MHz)								Modulation				RB #			Test Channel		
		20+20	20+15	15+20	20+10	10+20	10+10	20+5	5+20	QPSK	16QAM	64 QAM	256 QAM	1	Half	Full	L	M	H
Max. Output Power	48C	v	v	v	v	v	-	v	v	v	v	v	v	v			v	v	v
26dB and 99% Bandwidth	48C	v	v	v	v	v	-	v	v	v	v					v		v	
Conducted Band Edge	48C	v	v	v	v	v	-	v	v	v	v	v		v		v	v	v	v
Conducted Spurious Emission	48C	v	v	v	v	v	-	v	v	v				v			v	v	v
Adjacent Channel Leakage Ratio	48C	v	v	v	v	v	-	v	v	v	v	v		v		v	v	v	v
E.I.R.P.	48C	v	v	v	v	v	-	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	48C																	v	
Note	<ol style="list-style-type: none"> The mark "v " means that this configuration is chosen for testing The mark "-" means that this bandwidth is not supported. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. All test items are based on engineering evaluation. For QAM modulation mode, the whole testing has assessed 16QAM&64QAM mode by referring to the higher conducted power. 																		

2.2 Connection Diagram of Test System

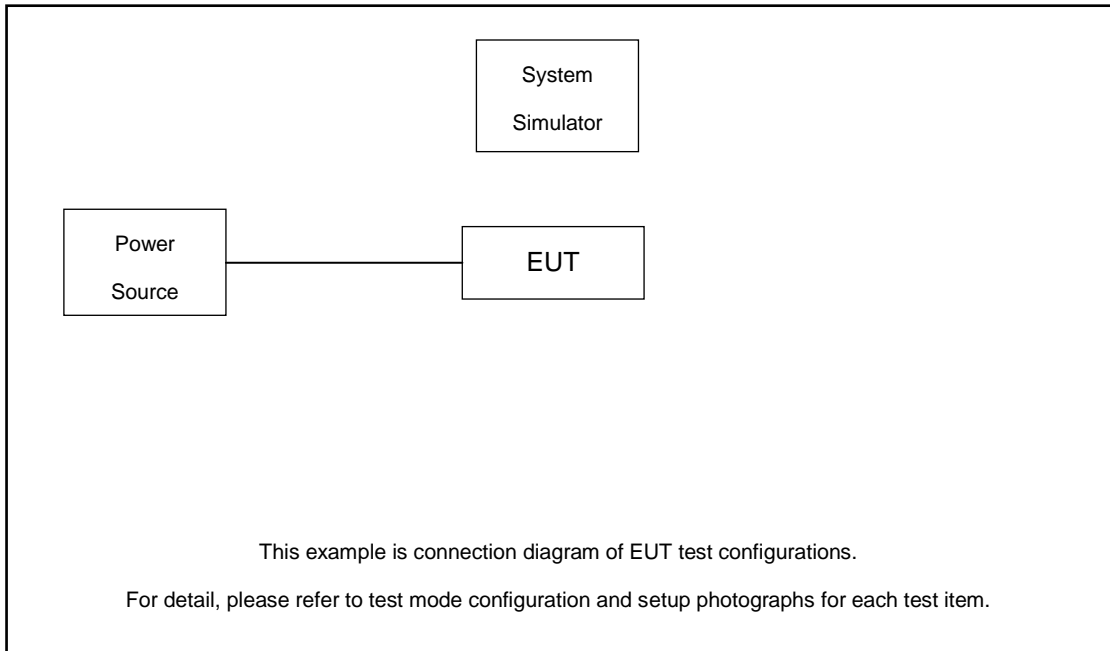

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	Fixture	INTEL	NGFF Card Carrier	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.5 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.5 + 10 = 15.5 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

LTE Band 48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	55340	55990	56640
	Frequency	3560.0	3625.0	3690.0
15	Channel	55315	55990	56665
	Frequency	3557.5	3625.0	3692.5
10	Channel	55290	55990	56690
	Frequency	3555.0	3625.0	3695.0
5	Channel	55265	55990	56715
	Frequency	3552.5	3625.0	3697.5

LTE Band 48C_CA Channel and Frequency List					
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest	
5 + 20	PCC	Channel	55273	55898	56523
		Frequency	3553.3	3615.8	3678.3
	SCC	Channel	55390	56015	56640
		Frequency	3565	3627.5	3690
20 + 5	PCC	Channel	55340	55965	56590
		Frequency	3560	3622.5	3685
	SCC	Channel	55457	56082	56707
		Frequency	3571.7	3634.2	3696.7
10 + 20	PCC	Channel	55295	55896	56496
		Frequency	3555.5	3615.6	3675.6
	SCC	Channel	55439	56040	56640
		Frequency	3569.9	3630	3690
20 + 10	PCC	Channel	55340	55941	56541
		Frequency	3560	3620.1	3680.1
	SCC	Channel	55484	56085	56685
		Frequency	3574.4	3634.5	3694.5
15 + 20	PCC	Channel	55318	55893	56469
		Frequency	3557.8	3615.3	3672.9
	SCC	Channel	55489	56064	56640
		Frequency	3574.9	3632.4	3690
20 + 15	PCC	Channel	55340	55916	56491



	SCC	Frequency	3560	3617.6	3675.1	
		Channel	55511	56087	56662	
20 +20	PCC	Frequency	3577.1	3634.7	3692.2	
		Channel	55340	55891	56442	
	SCC	Frequency	3560	3615.1	3670.2	
		Channel	55538	56089	56640	
		SCC	Frequency	3579.8	3634.9	3690
			Channel			


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power / ACLR

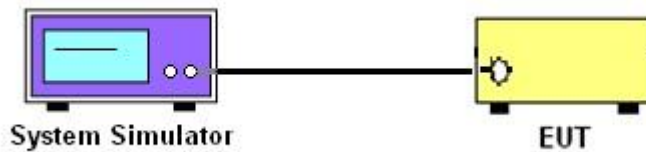

3.2.2 26dB & 99% Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

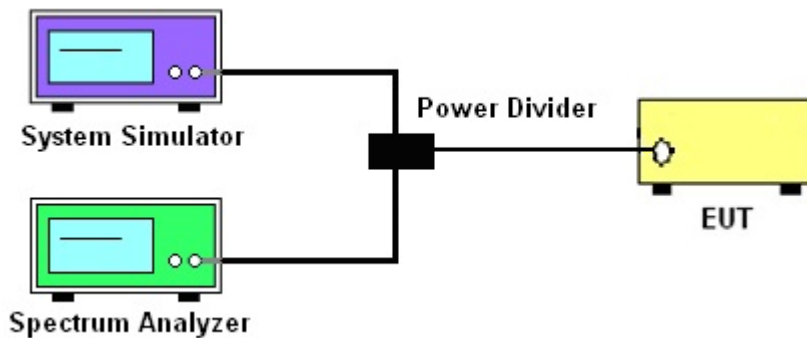

3.2.3 Frequency Stability

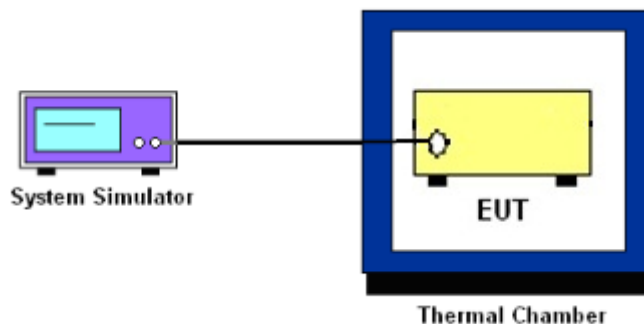

3.2.4 Test Result of Conducted Test

Please refer to Appendix A.



3.3 Conducted Output Power

3.3.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.



3.3.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3.3 Test Procedures for LTE ULCA



1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter PCC & SCC output ports were connected to the system simulator.
3. Set EUT at maximum power, set the PCC/SCC CA band, channel, bandwidth and RB config.

PCC config_(Channel Bandwidth / Channel / Band) SCC config_(Channel Bandwidth / Channel / Band)

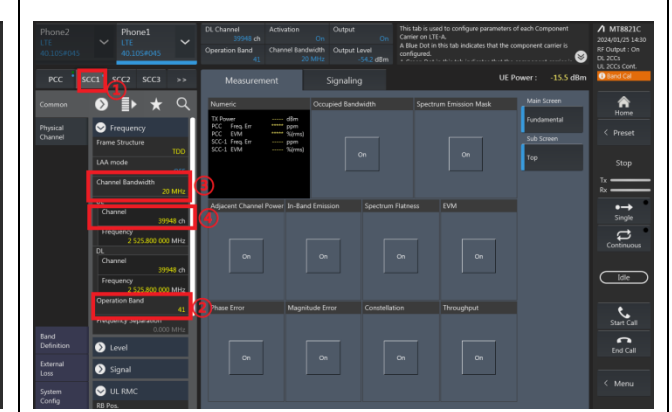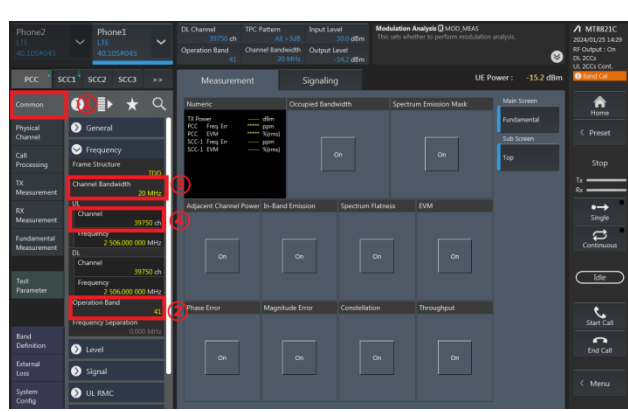

PCC config_(Number of RB / Starting RB)



SCC config_(Number of RB / Starting RB)

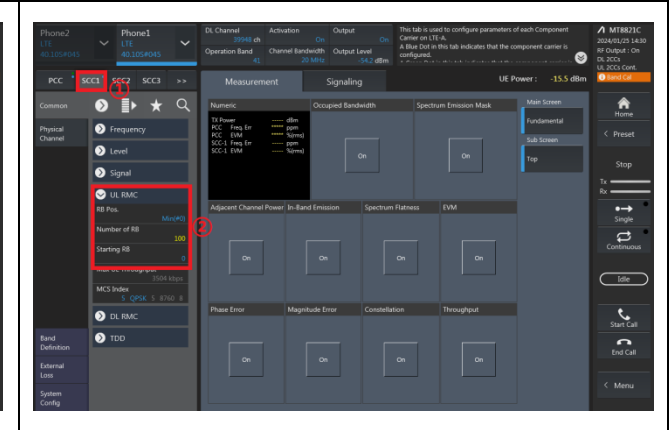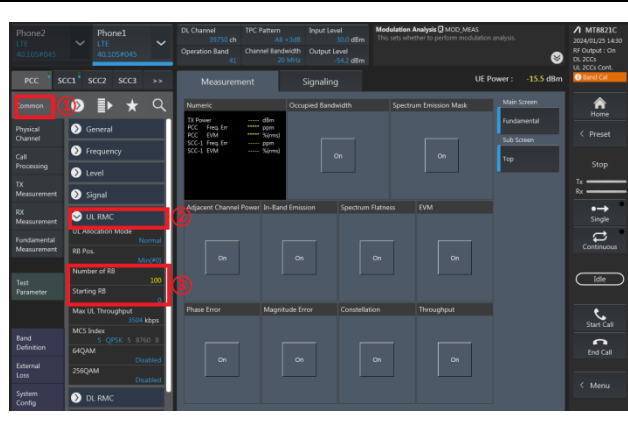

4. Select lowest, middle, and highest channels for each ULCA band and different modulation.
5. Check the ULCA spectrum and record the total power from the system simulator.

Check the ULCA spectrum (eg. 20M+20M)

Read the Total UL CA output power (PCC+SCC)

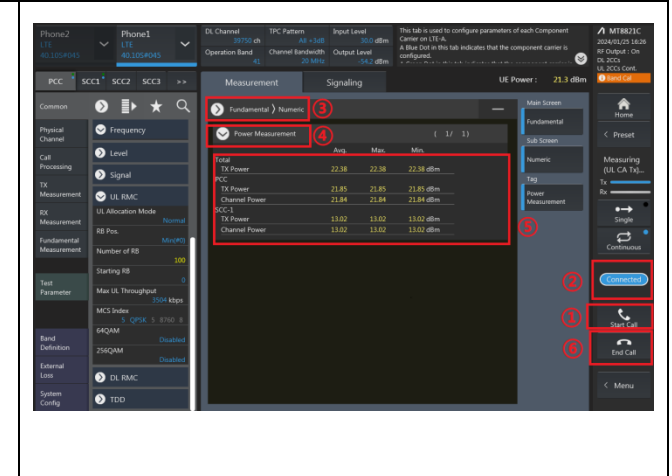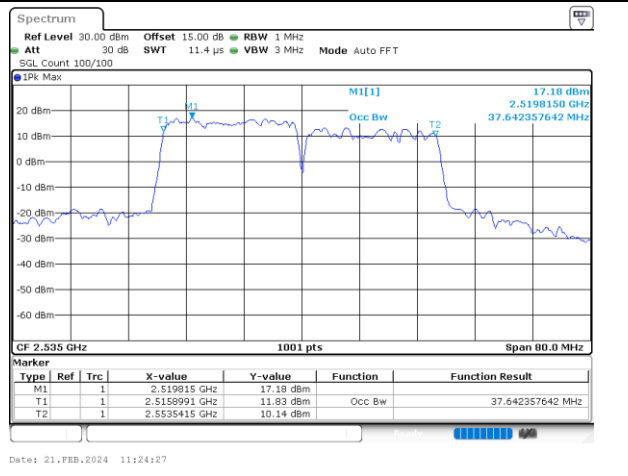



3.4 Peak-to-Average Ratio

3.4.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.5 EIRP

3.5.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
<input type="checkbox"/>	Category A CBSD	30	20
<input type="checkbox"/>	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz)

3.5.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)
 - EIRP = $P_T + G_T - L_C$, ERP = EIRP - 2.15, where
 - P_T = transmitter output power in dBm
 - G_T = gain of the transmitting antenna in dBi
 - L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (i)

For CBSD the emission limits outside the fundamental are as follows:

Within 0 MHz to 10 MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than 10 MHz above and below the assigned channel ≤ -25 dBm/MHz

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

9. The EUT was connected to spectrum analyzer and system simulator via a power divider.
10. The band edges of low and high channels for the highest RF powers were measured.
11. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
12. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
13. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
14. Set spectrum analyzer with RMS detector.
15. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.8.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.



3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

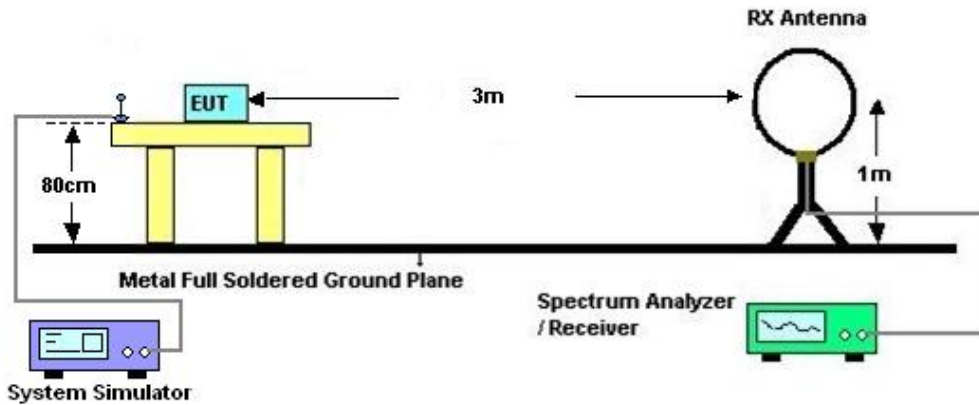

4.2.2 For radiated test from 30MHz to 1GHz

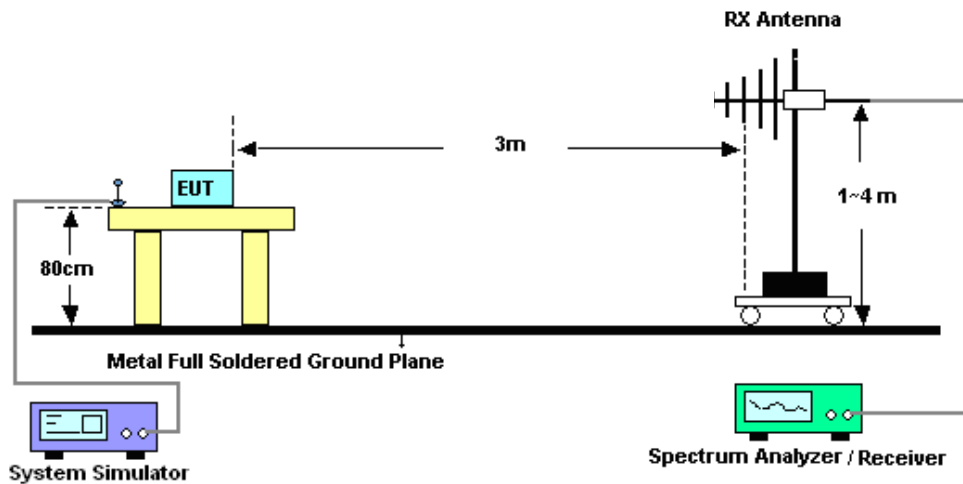

4.2.3 For radiated test above 1GHz

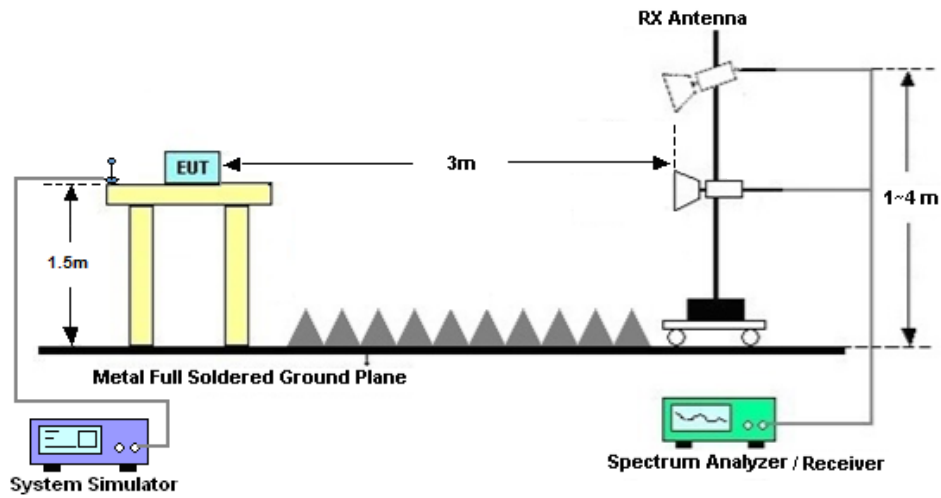

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26-2015. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Apr. 12, 2024~ Apr. 25, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V , 3A	Oct. 16, 2023	Apr. 12, 2024~ Apr. 25, 2024	Oct. 15, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-0426 5	60.06.020. 0077	0.4GHz~26.5G Hz	Dec. 25, 2023	Apr. 12, 2024~ Apr. 25, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangrou p	LP-150U	H2014081 803	-40~+150°C	Jul. 05, 2023	Apr. 12, 2024~ Apr. 25, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY574710 79	10Hz-44G,MAX 30dB	Oct. 10, 2023	May 08, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 11, 2023	May 08, 2024	Sep. 10, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	59913	30MHz-1GHz	Aug. 19, 2023	May 08, 2024	Aug. 18, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	May 08, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	May 08, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	May 08, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2024	May 08, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 10, 2023	May 08, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A023 70	1Ghz-18Ghz	Oct. 10, 2023	May 08, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	May 08, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 08, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 08, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
ACLR	±1.34 dB
Frequency Stability	±1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.83 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.82 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Lorenzo Liu	Temperature :	24~26°C
		Relative Humidity :	50~53%

A1. Conducted Output Power(Average power) and EIRP

LTE Band 48:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP(W)		
Channel				55340	55990	56640	EIRP(W)		
Frequency (MHz)				3560	3625	3690	L	M	H
20	QPSK	1	0	18.86	18.83	18.82	0.1683	0.1671	0.1667
20	QPSK	1	49	18.72	18.76	18.79	0.1629	0.1644	0.1656
20	QPSK	1	99	18.13	18.11	18.16	0.1422	0.1416	0.1432
20	QPSK	50	0	17.60	17.72	17.71	0.1259	0.1294	0.1291
20	QPSK	50	24	17.65	17.68	17.68	0.1274	0.1282	0.1282
20	QPSK	50	50	17.40	17.37	17.42	0.1202	0.1194	0.1208
20	QPSK	100	0	17.62	17.59	17.54	0.1265	0.1256	0.1242
20	16QAM	1	0	16.67	16.73	16.67	0.1016	0.1030	0.1016
20	64QAM	1	0	13.90	13.85	13.85	0.0537	0.0531	0.0531
20	256QAM	1	0	13.69	13.71	13.62	0.0512	0.0514	0.0504
Channel				55315	55990	56665	EIRP(W)		
Frequency (MHz)				3557.5	3625	3692.5	L	M	H
15	QPSK	1	0	18.73	18.77	18.70	0.1633	0.1648	0.1622
15	16QAM	1	0	16.66	16.62	16.59	0.1014	0.1005	0.0998
Channel				55290	55990	56690	EIRP(W)		
Frequency (MHz)				3555	3625	3695	L	M	H
10	QPSK	1	0	18.76	18.73	18.69	0.1644	0.1633	0.1618
10	16QAM	1	0	16.62	16.65	16.63	0.1005	0.1012	0.1007
Channel				55265	55990	56715	EIRP(W)		
Frequency (MHz)				3552.5	3625	3697.5	L	M	H
5	QPSK	1	0	18.74	18.79	18.72	0.1637	0.1656	0.1629
5	16QAM	1	0	16.58	16.61	16.53	0.0995	0.1002	0.0984



LTE Band 48C

Combination 20MHz+20MHz (100RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.83	0.1671
M	QPSK	1	Max	1	0	18.70	0.1622
H	QPSK	1	Max	1	0	18.69	0.1618
L	16QAM	1	Max	1	0	18.25	0.1462
M	16QAM	1	Max	1	0	18.23	0.1455
H	16QAM	1	Max	1	0	18.16	0.1432
L	64QAM	1	Max	1	0	17.62	0.1265
M	64QAM	1	Max	1	0	17.45	0.1216
H	64QAM	1	Max	1	0	17.39	0.1199
L	256QAM	1	Max	1	0	14.69	0.0644
M	256QAM	1	Max	1	0	14.52	0.0619
H	256QAM	1	Max	1	0	14.45	0.0610
Combination 20MHz+15MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.21	0.1449
L	16QAM	1	Max	1	0	17.81	0.1321
Combination 15MHz+20MHz (100RB+75RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.43	0.1524
L	16QAM	1	Max	1	0	17.94	0.1361
Combination 20MHz+10MHz (100RB+50RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.21	0.1449
L	16QAM	1	Max	1	0	17.78	0.1312
Combination 10MHz+20MHz (50RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.26	0.1466
L	16QAM	1	Max	1	0	17.70	0.1288
Combination 20MHz+5MHz (100RB+25RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.32	0.1486
L	16QAM	1	Max	1	0	17.70	0.1288
Combination 5MHz+20MHz (25RB+100RB)							
Channel	Modulation	PCC		SCC		Measured Power	EIRP(W)
		RB Size	RB offset	RB Size	RB offset		
L	QPSK	1	Max	1	0	18.27	0.1469
L	16QAM	1	Max	1	0	17.76	0.1306



A2. LTE Band 48


A2.1 26dB Bandwidth

Mode	LTE Band 48 : 26dB BW(MHz)											
	BW				5MHz		10MHz		15MHz		20MHz	
Mod.					QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH					4.73	4.83	9.79	9.85	14.54	14.18	18.94	19.02




LTE Band 48

Middle Channel / 5MHz / QPSK

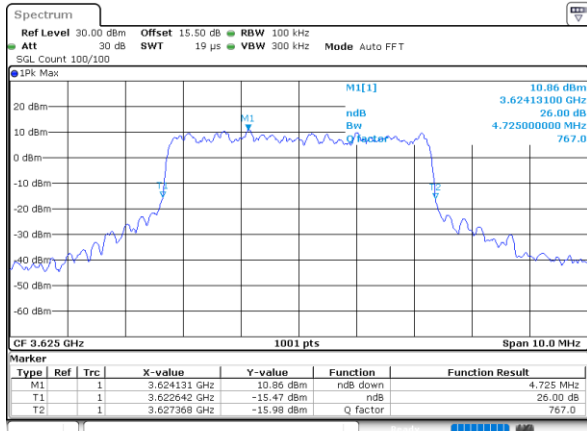


Date: 15.APR.2024 12:39:41

Middle Channel / 5MHz / 16QAM

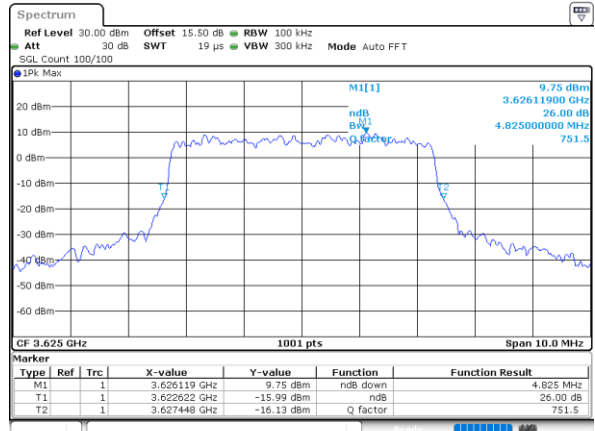


Date: 15.APR.2024 12:40:09

Middle Channel / 10MHz / QPSK

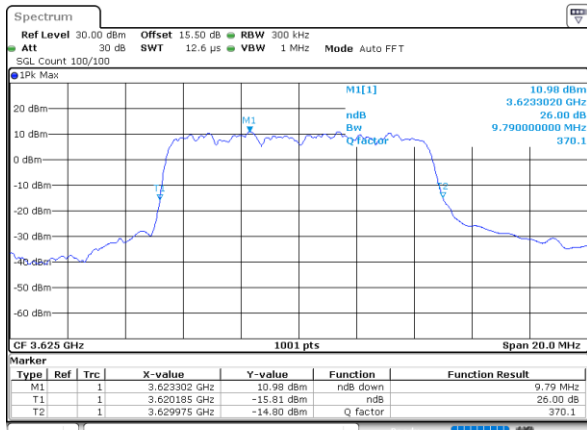


Date: 15.APR.2024 13:50:35

Middle Channel / 10MHz / 16QAM

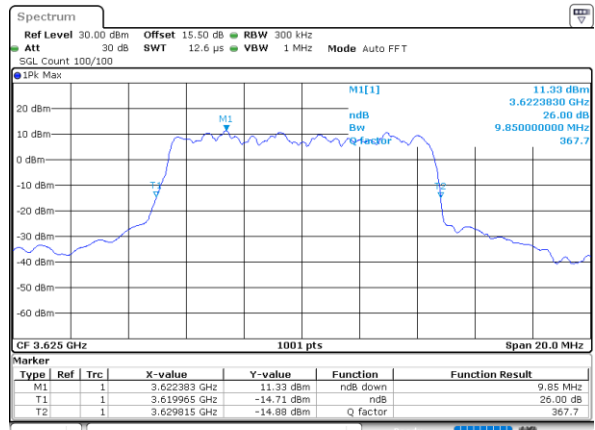


Date: 15.APR.2024 13:51:04

Middle Channel / 15MHz / QPSK

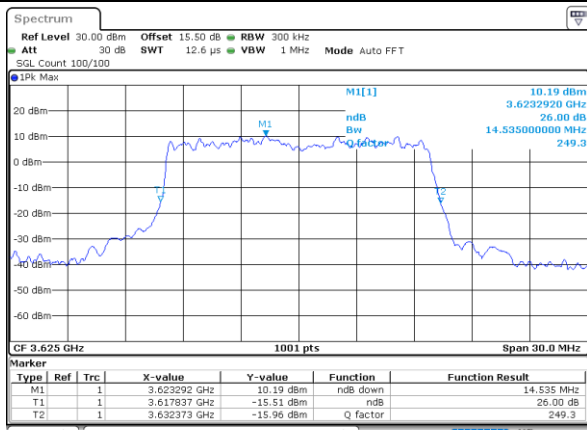

Date: 15.APR.2024 15:01:52

Middle Channel / 15MHz / 16QAM

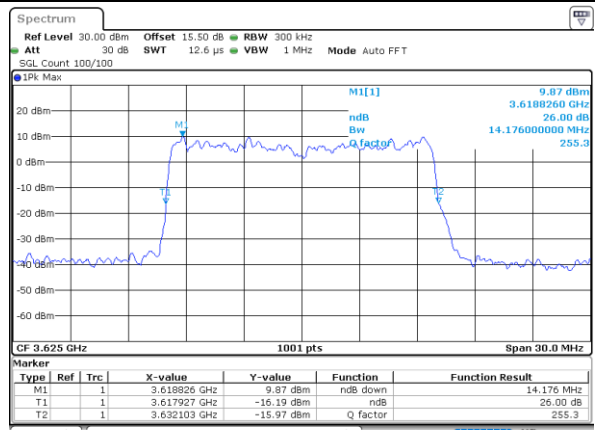


Date: 15.APR.2024 15:02:20




LTE Band 48

Middle Channel / 20MHz / QPSK

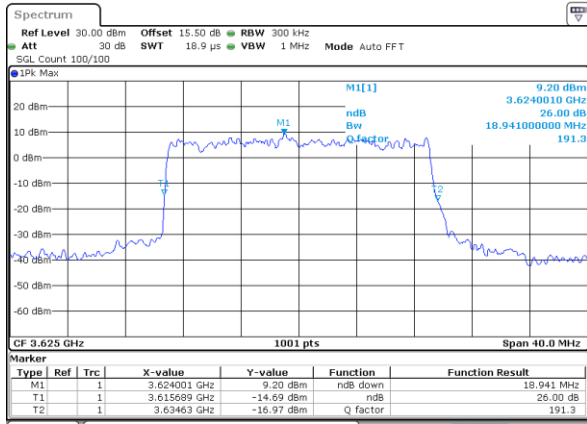

Date: 14.APR.2024 18:40:01

Middle Channel / 20MHz / 16QAM

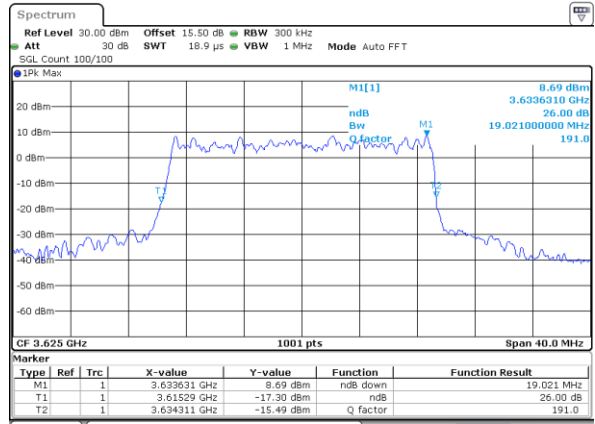

Date: 14.APR.2024 18:39:31




A2.2 Occupied Bandwidth

Mode	LTE Band 48 : 99%OBW(MHz)											
	BW				5MHz		10MHz		15MHz		20MHz	
Mod.				QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	
Middle CH				4.51	4.51	9.05	9.05	13.49	13.43	17.94	17.90	




LTE Band 48

Middle Channel / 5MHz / QPSK

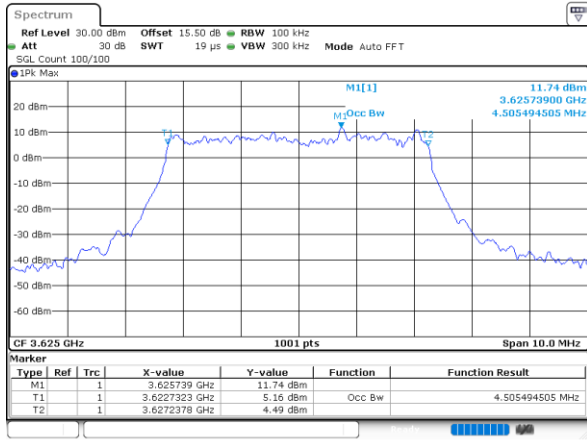


Date: 15_APR_2024 12:39:27

Middle Channel / 5MHz / 16QAM

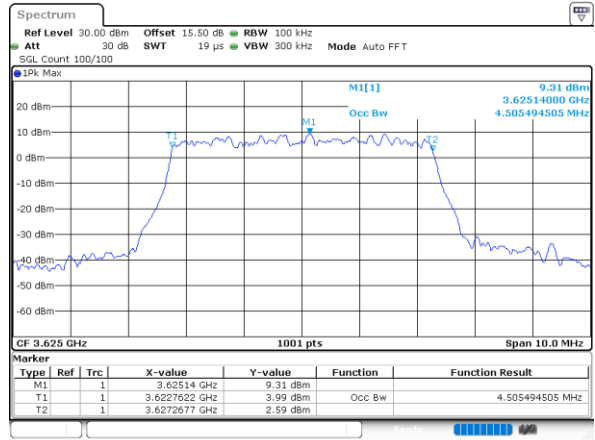


Date: 15_APR_2024 12:40:23

Middle Channel / 10MHz / QPSK

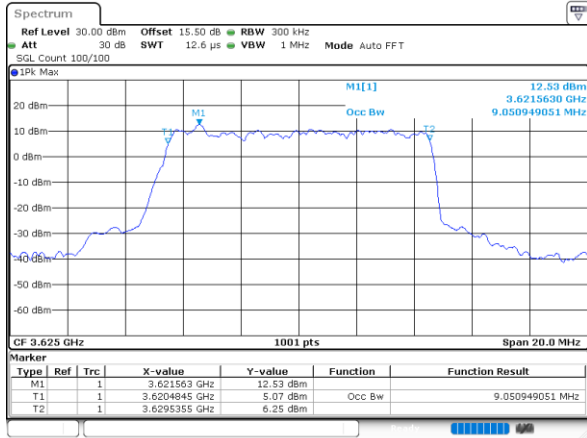


Date: 15_APR_2024 13:50:21

Middle Channel / 10MHz / 16QAM

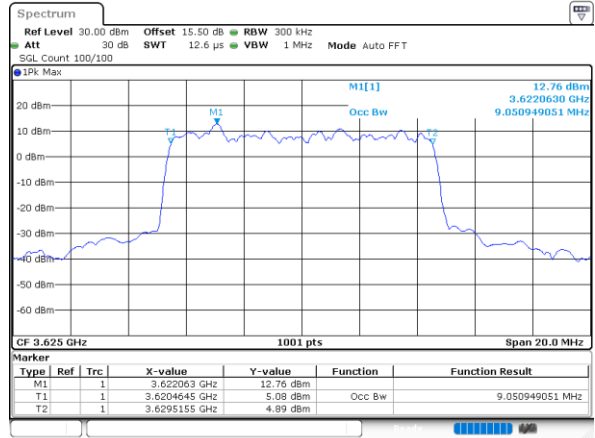


Date: 15_APR_2024 13:51:18

Middle Channel / 15MHz / QPSK

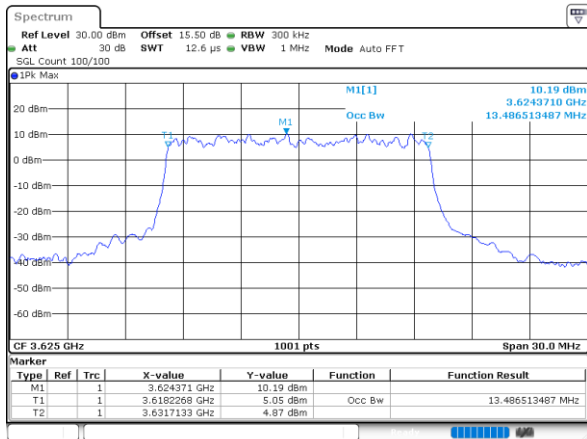

Date: 15_APR_2024 15:01:30

Middle Channel / 15MHz / 16QAM

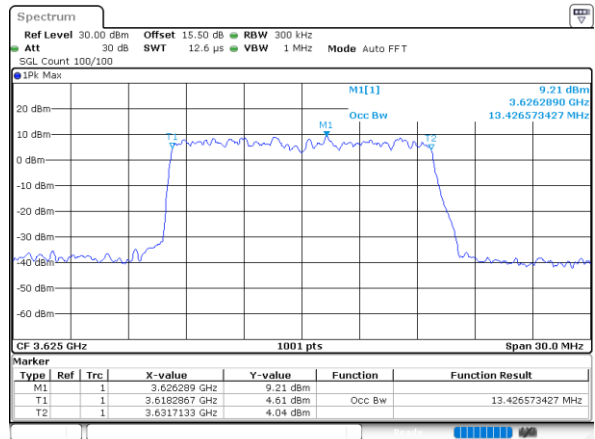


Date: 15_APR_2024 15:02:34




LTE Band 48

Middle Channel / 20MHz / QPSK

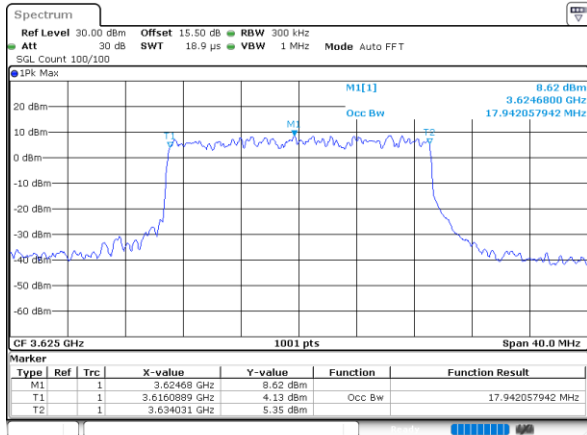

Date: 14.APR.2024 18:40:15


Middle Channel / 20MHz / 16QAM

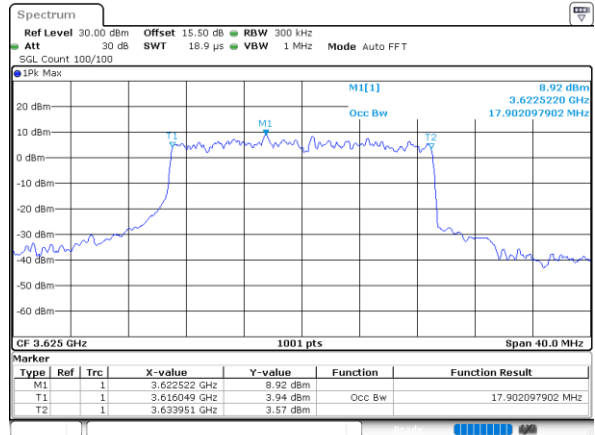

Date: 14.APR.2024 18:39:17



A2.3 ACLR

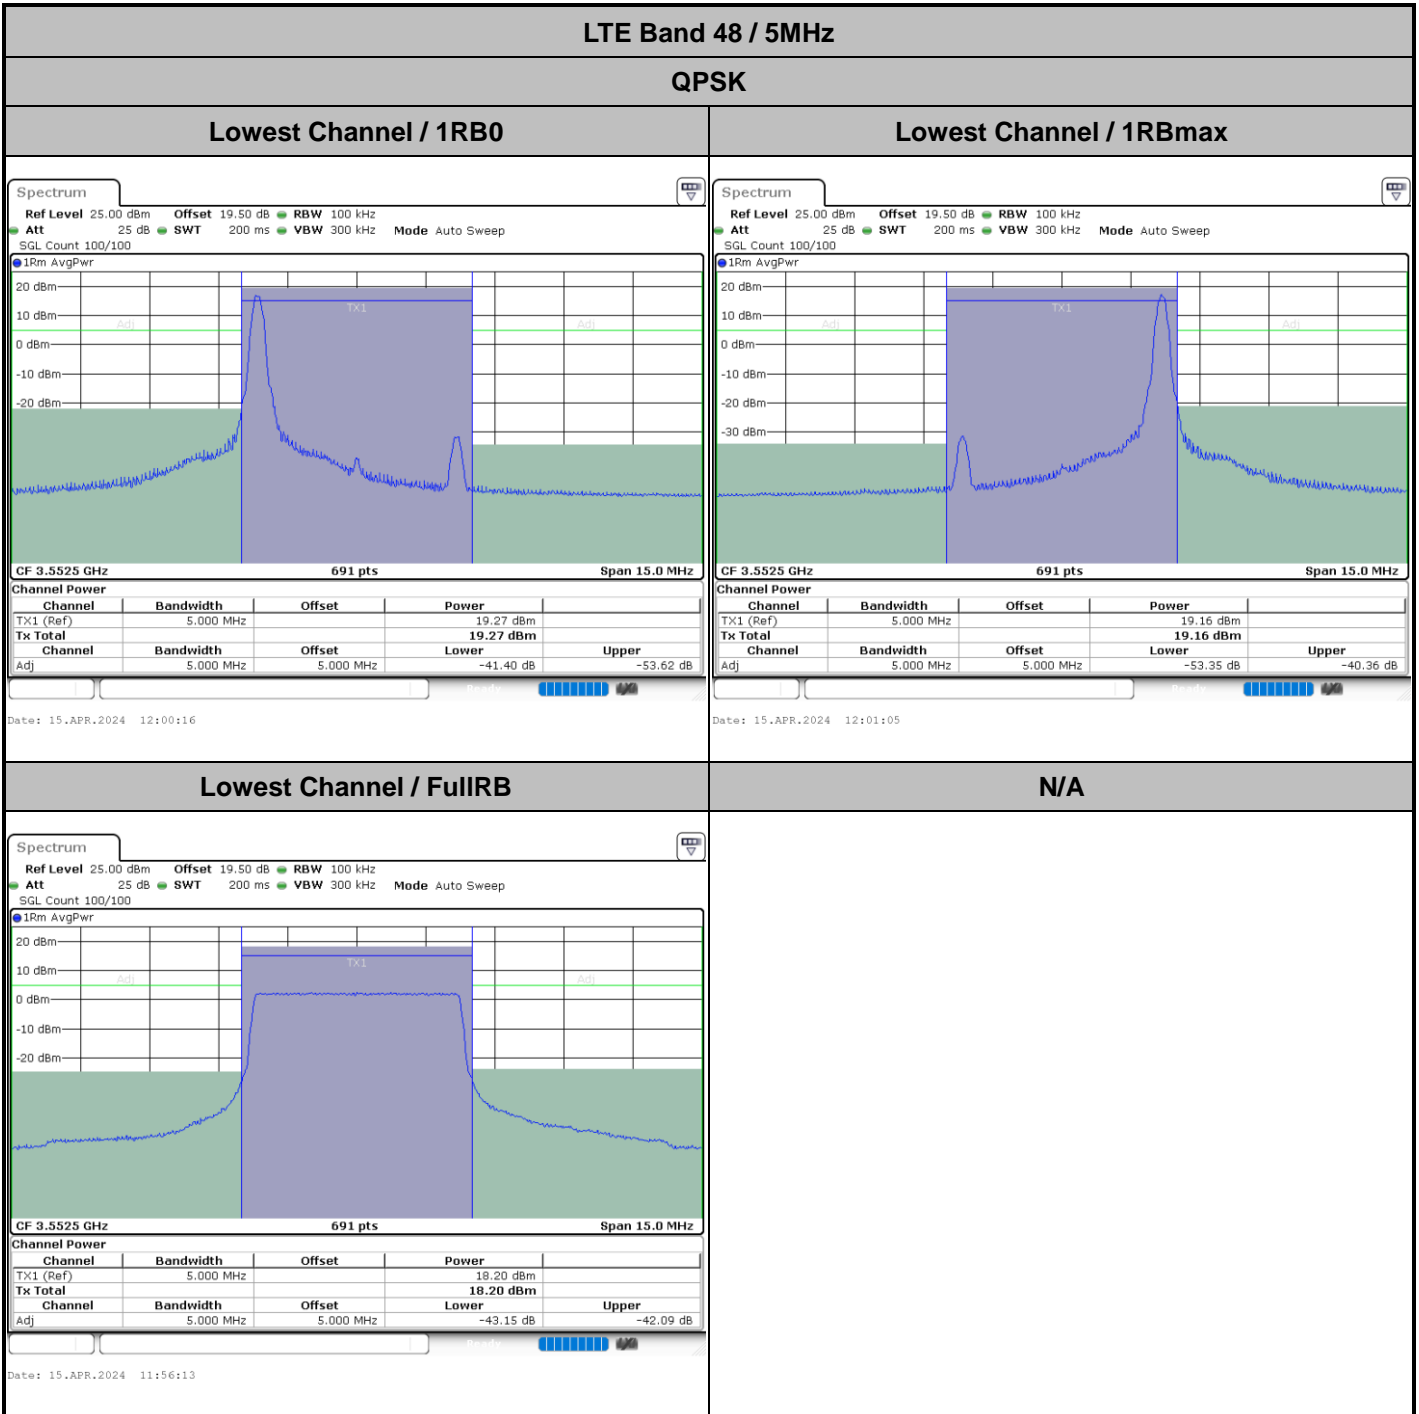




LTE Band 48 / 5MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

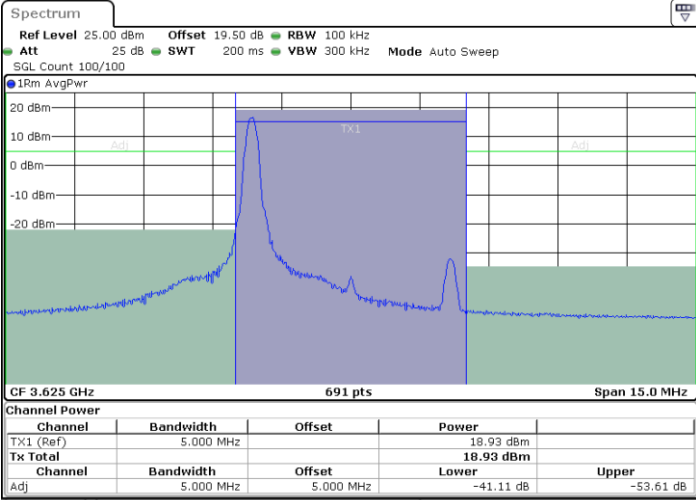


Date: 15.APR.2024 12:21:14

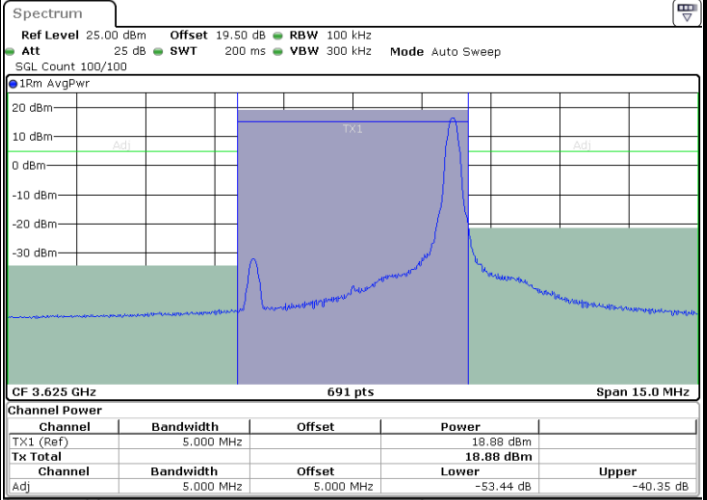

Date: 15.APR.2024 12:20:26

Middle Channel / FullIRB

N/A

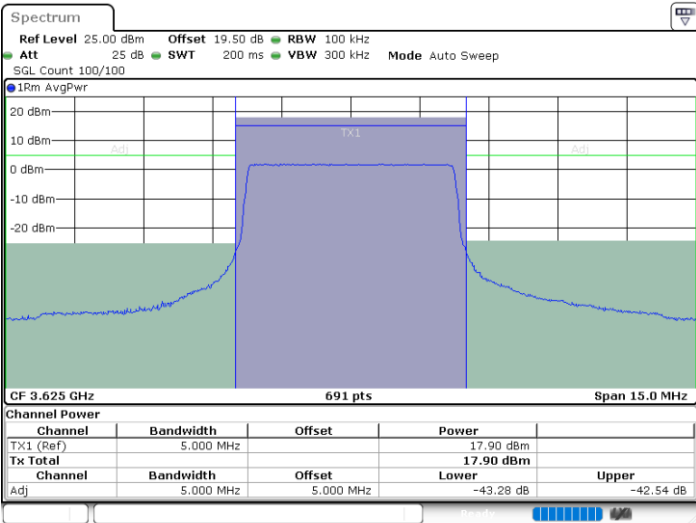

Date: 15.APR.2024 12:25:13




LTE Band 48 / 5MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

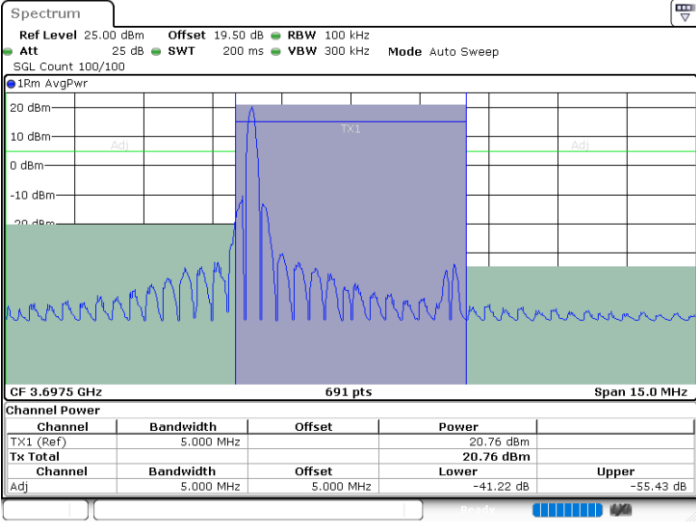


Date: 15.APR.2024 12:47:27

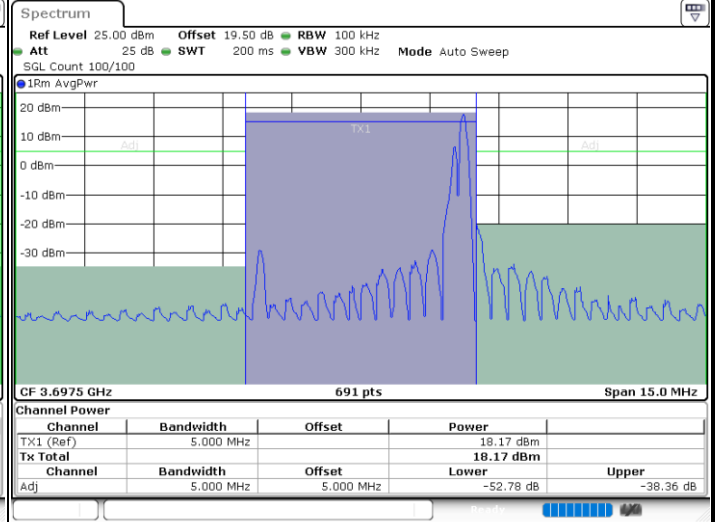

Date: 15.APR.2024 12:46:38

Highest Channel / FullRB

N/A

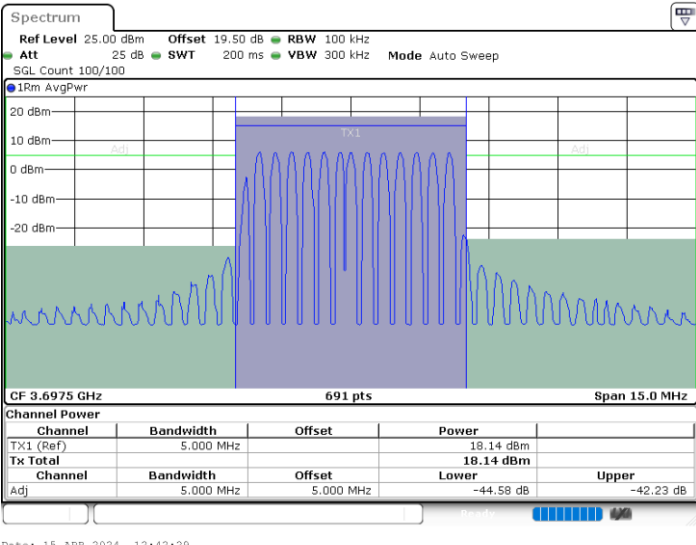

Date: 15.APR.2024 12:42:29




LTE Band 48 / 10MHz


QPSK

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

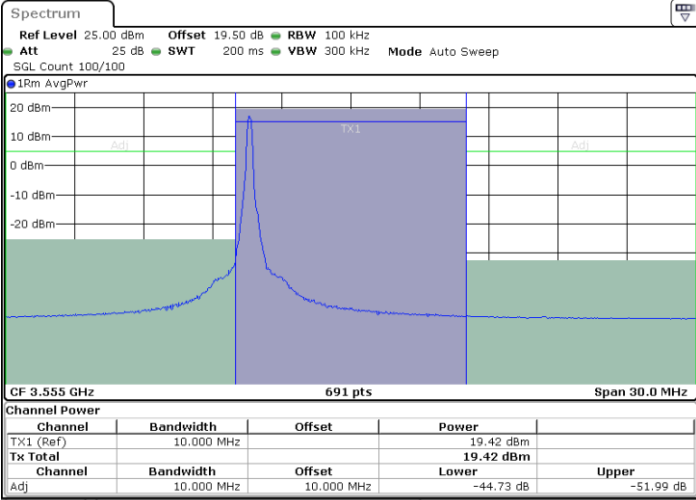


Date: 15.APR.2024 13:12:08

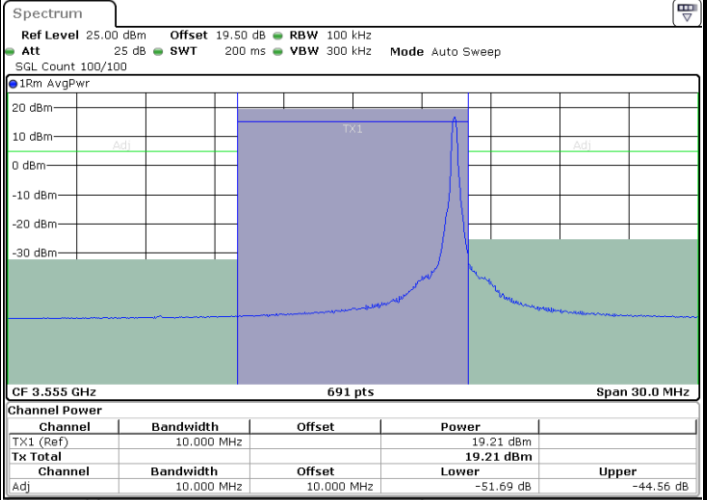

Date: 15.APR.2024 13:11:19

Lowest Channel / FullIRB

N/A

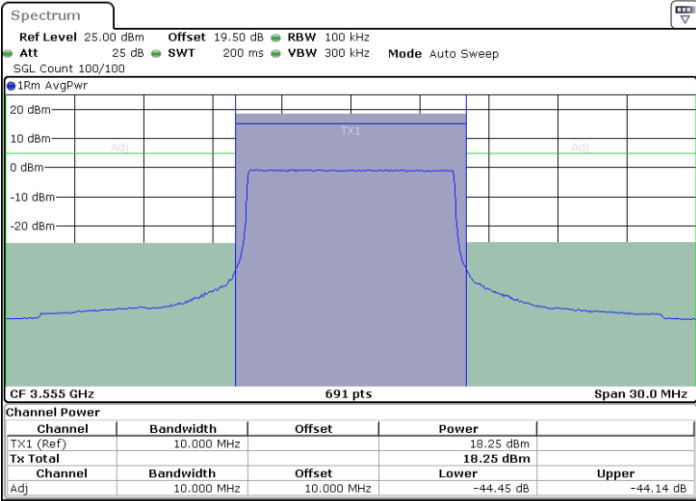

Date: 15.APR.2024 13:07:14




LTE Band 48 / 10MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

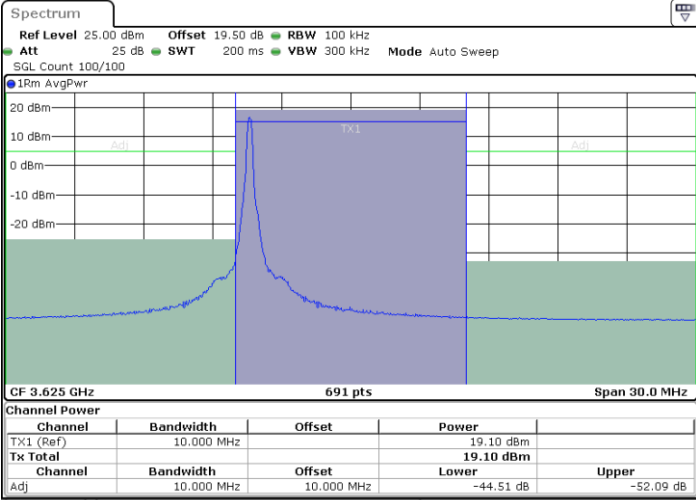


Date: 15.APR.2024 13:31:15

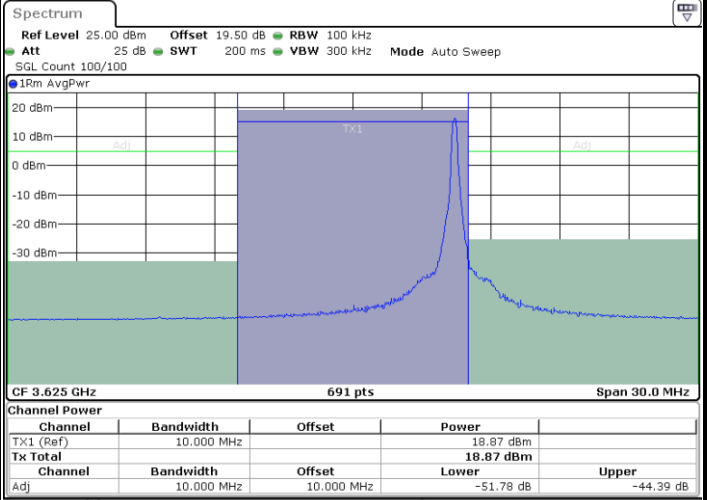

Date: 15.APR.2024 13:32:04

Middle Channel / FullIRB

N/A

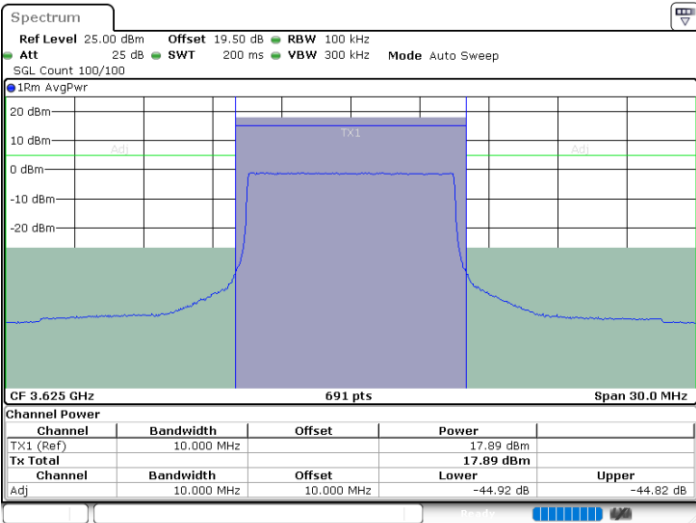

Date: 15.APR.2024 13:36:07




LTE Band 48 / 10MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

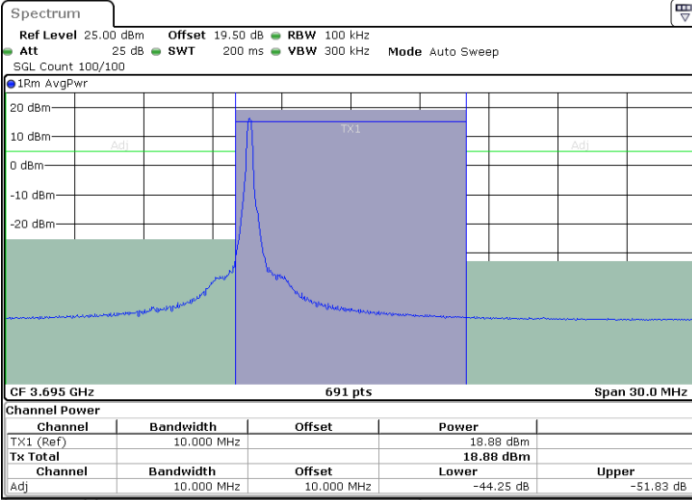


Date: 15.APR.2024 13:58:22

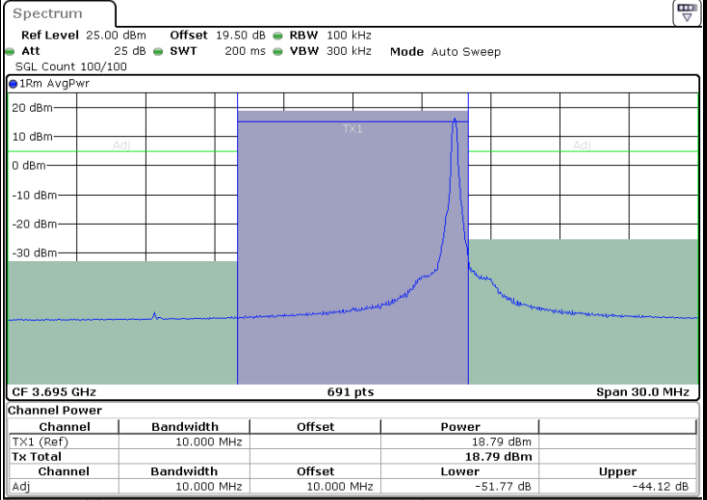

Date: 15.APR.2024 13:57:32

Highest Channel / FullRB

N/A

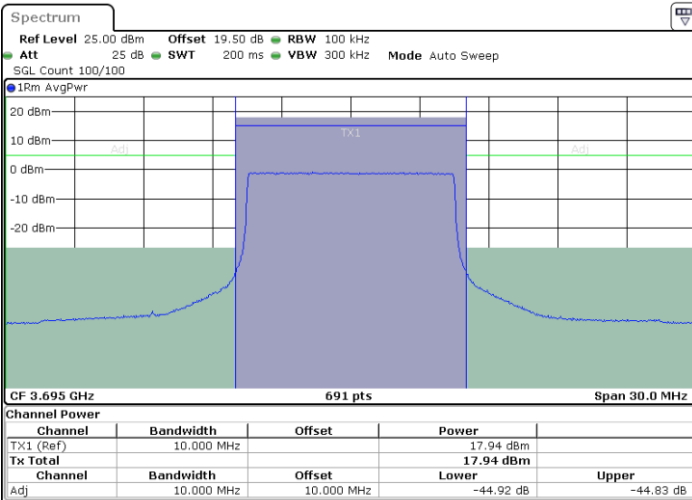

Date: 15.APR.2024 13:53:24




LTE Band 48 / 15MHz


QPSK

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

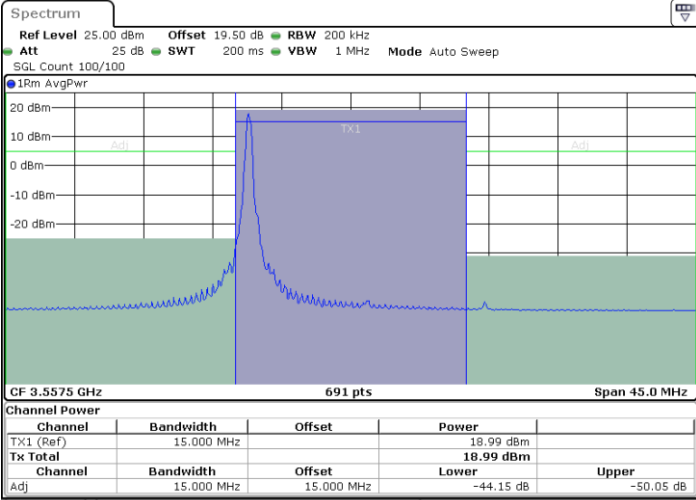


Date: 15.APR.2024 14:22:48

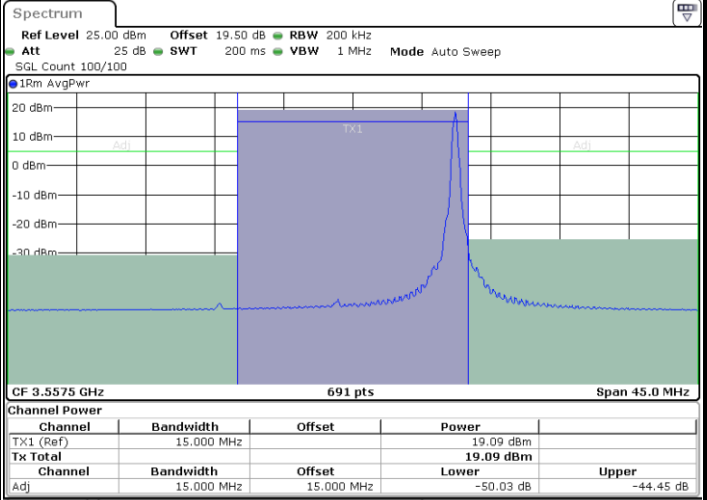

Date: 15.APR.2024 14:21:59

Lowest Channel / FullIRB

N/A

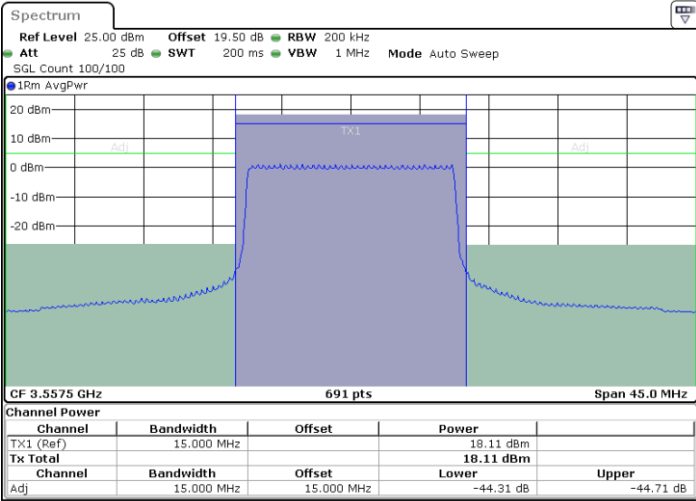

Date: 15.APR.2024 14:17:54




LTE Band 48 / 15MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

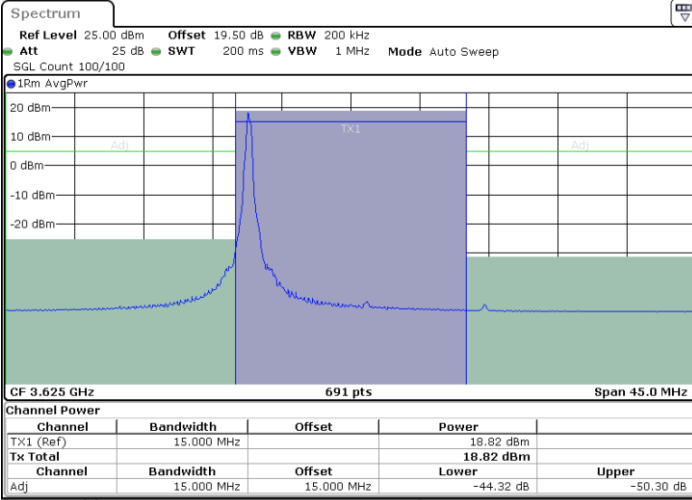


Date: 15.APR.2024 14:41:57

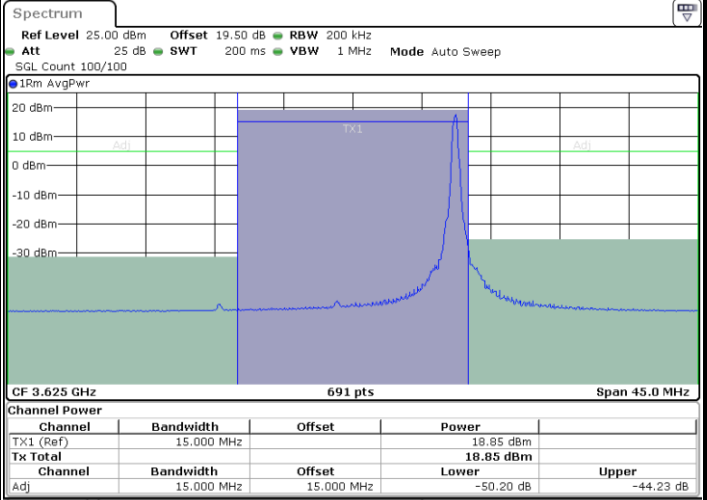

Date: 15.APR.2024 14:42:45

Middle Channel / FullIRB

N/A

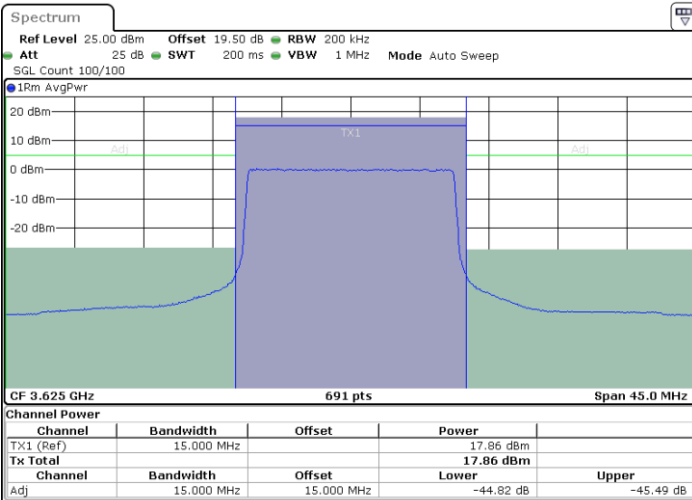

Date: 15.APR.2024 14:46:47




LTE Band 48 / 15MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

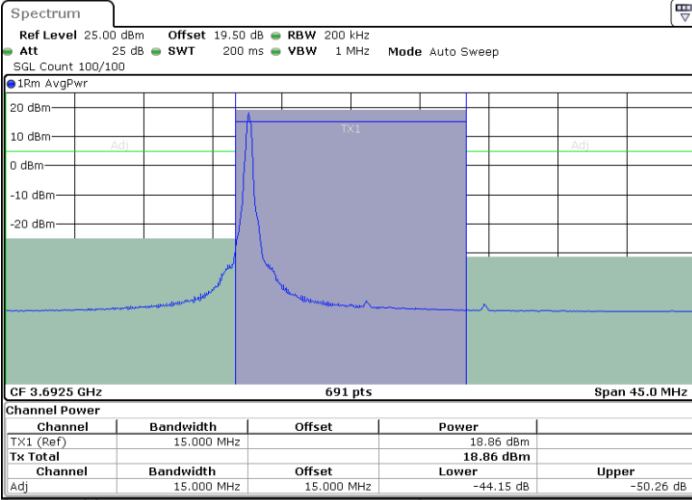


Date: 15.APR.2024 15:09:40

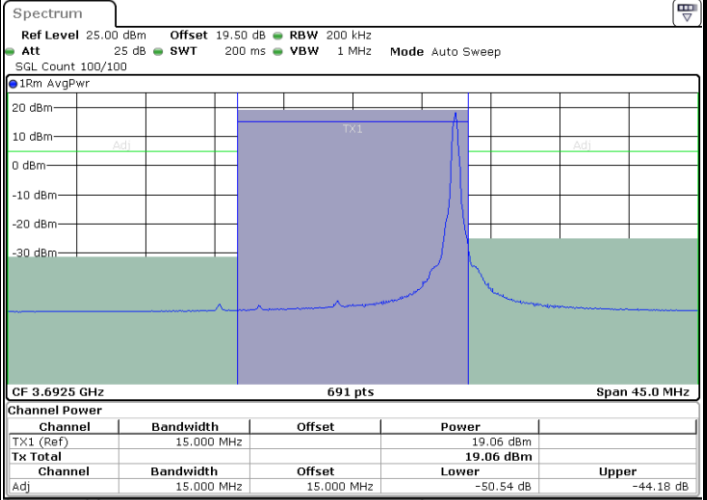

Date: 15.APR.2024 15:08:50

Highest Channel / FullRB

N/A

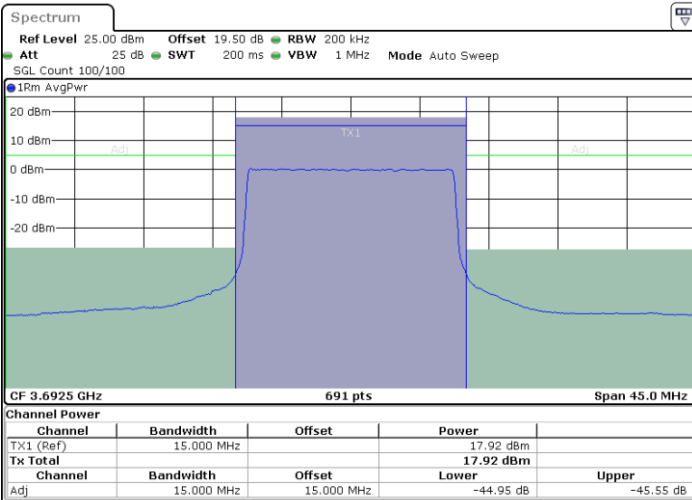

Date: 15.APR.2024 15:04:41




LTE Band 48 / 20MHz


QPSK

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

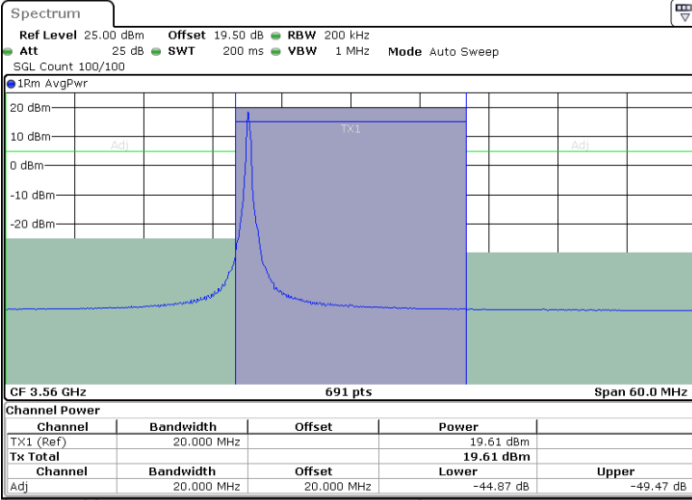


Date: 15.APR.2024 15:33:45

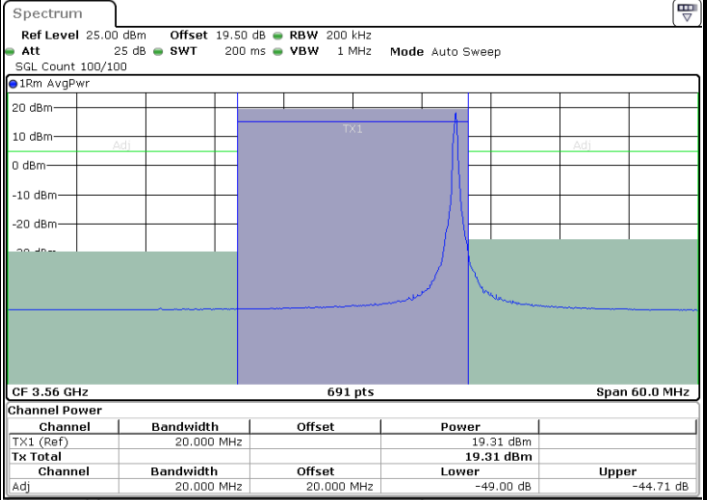

Date: 15.APR.2024 15:29:43

Lowest Channel / FullIRB

N/A

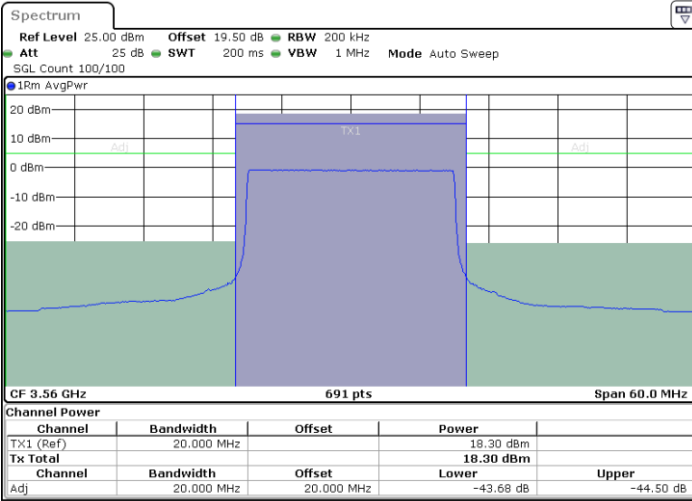

Date: 15.APR.2024 15:27:17




LTE Band 48 / 20MHz


QPSK

Middle Channel / 1RB0

Middle Channel / 1RBmax

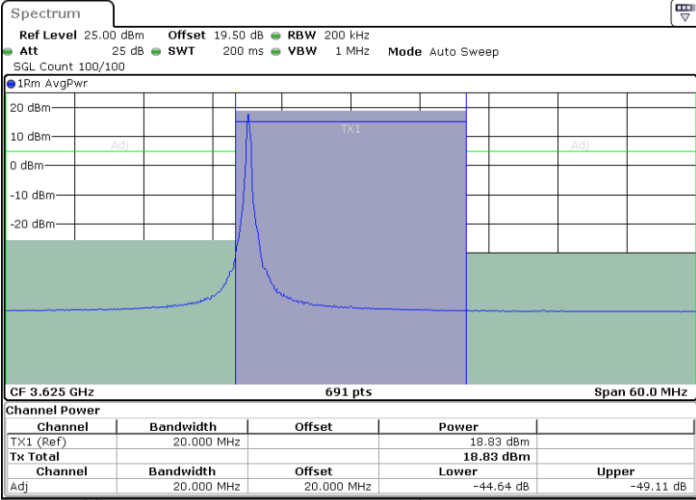


Date: 14.APR.2024 18:18:03

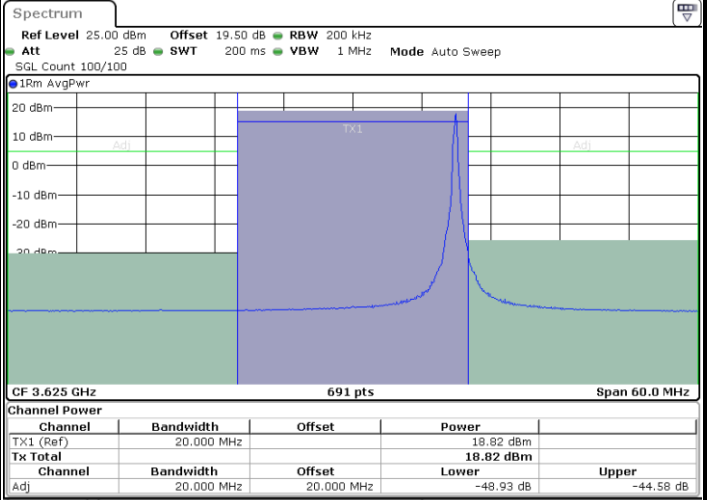

Date: 14.APR.2024 18:22:10

Middle Channel / FullIRB

N/A

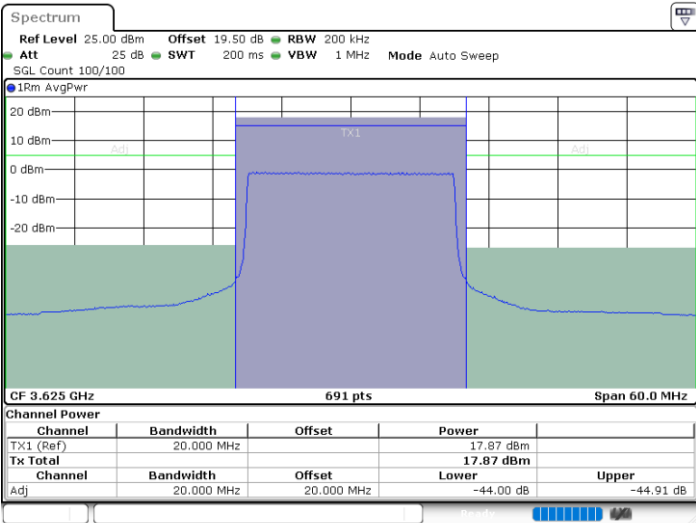

Date: 14.APR.2024 18:23:00




LTE Band 48 / 20MHz


QPSK

Highest Channel / 1RB0

Highest Channel / 1RBmax

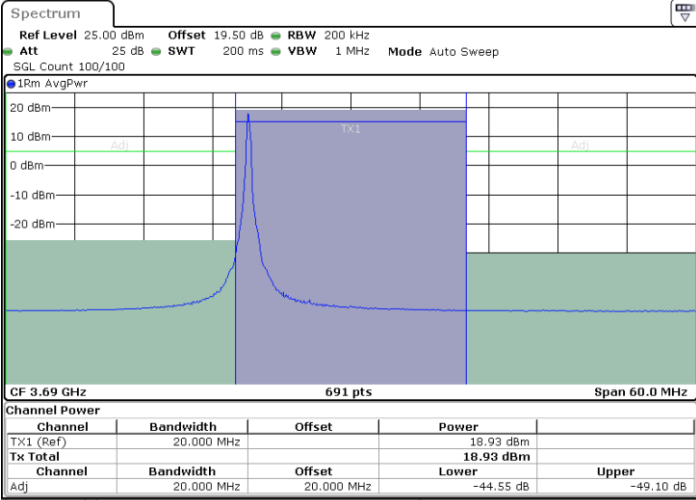


Date: 14.APR.2024 18:51:47

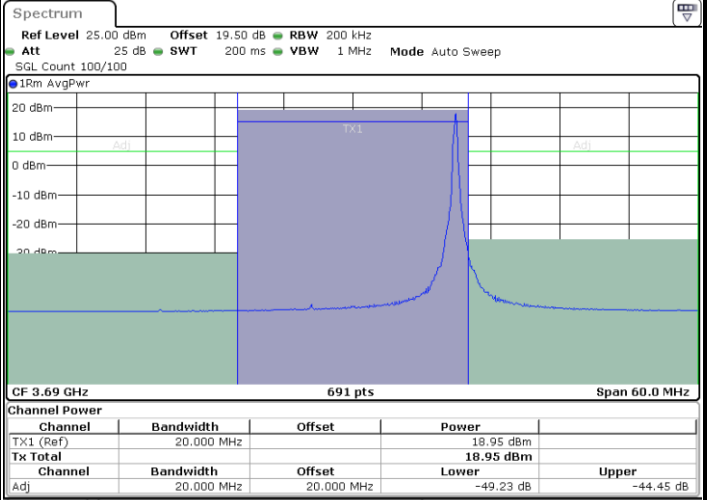

Date: 14.APR.2024 18:47:36

Highest Channel / FullRB

N/A

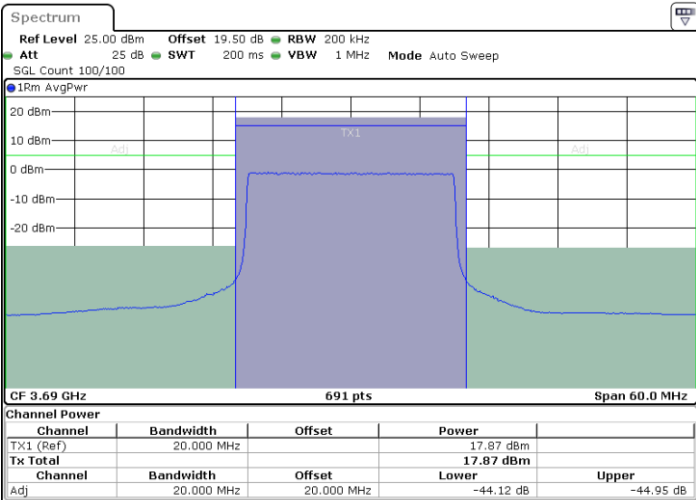

Date: 14.APR.2024 18:46:46




LTE Band 48 / 5MHz


16QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

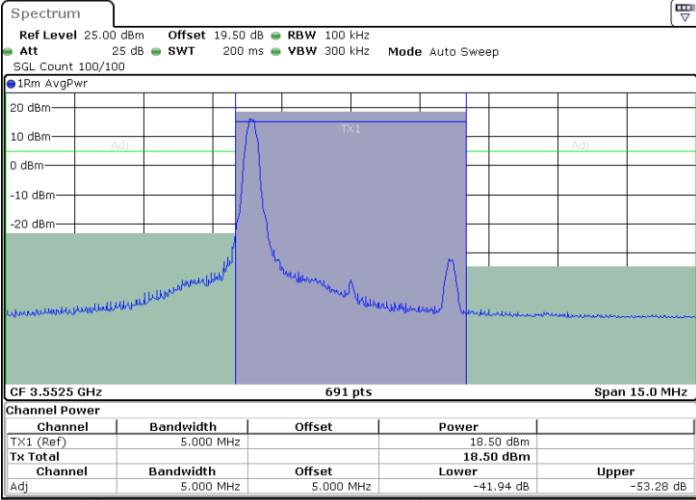


Date: 15.APR.2024 11:59:28

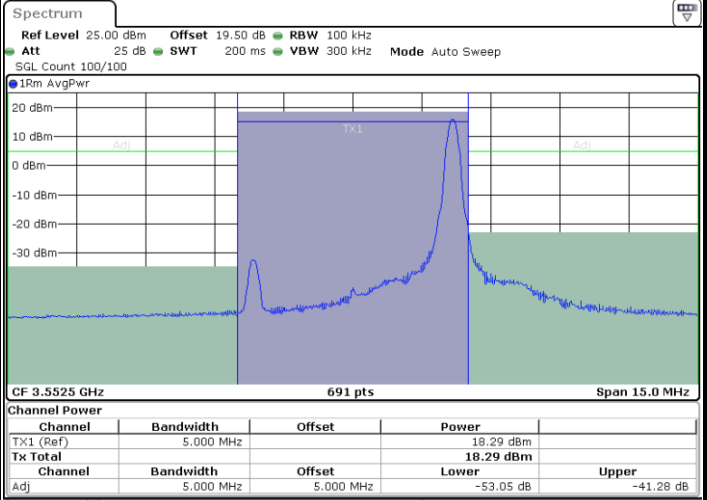

Date: 15.APR.2024 12:01:54

Lowest Channel / FullIRB

N/A

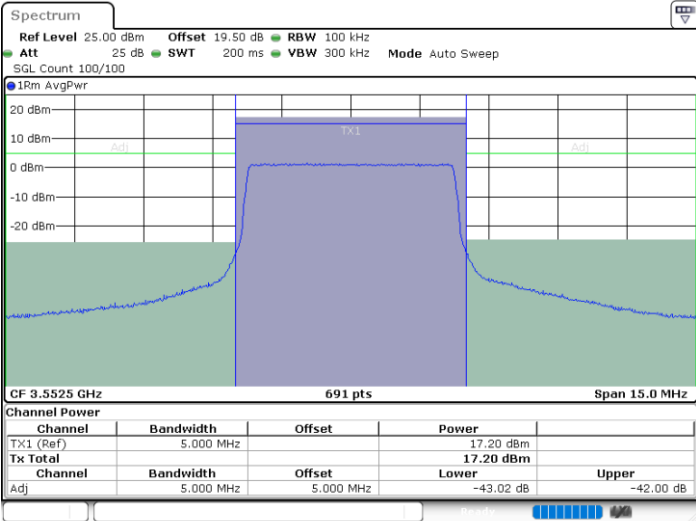

Date: 15.APR.2024 11:57:01




LTE Band 48 / 5MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

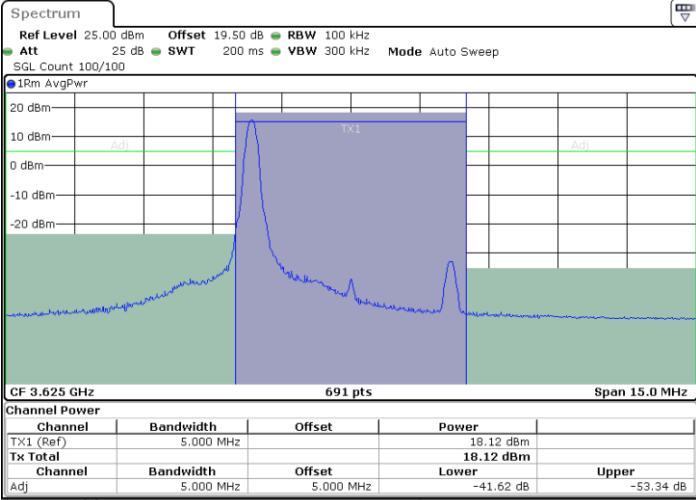


Date: 15.APR.2024 12:22:01

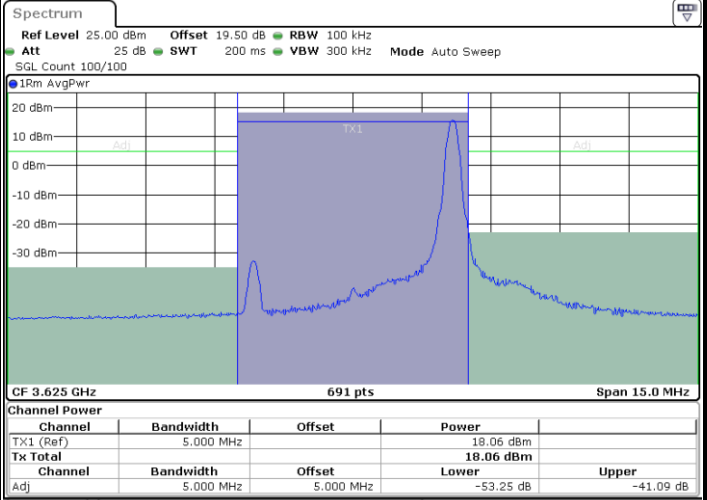

Date: 15.APR.2024 12:19:38

Middle Channel / FullIRB

N/A

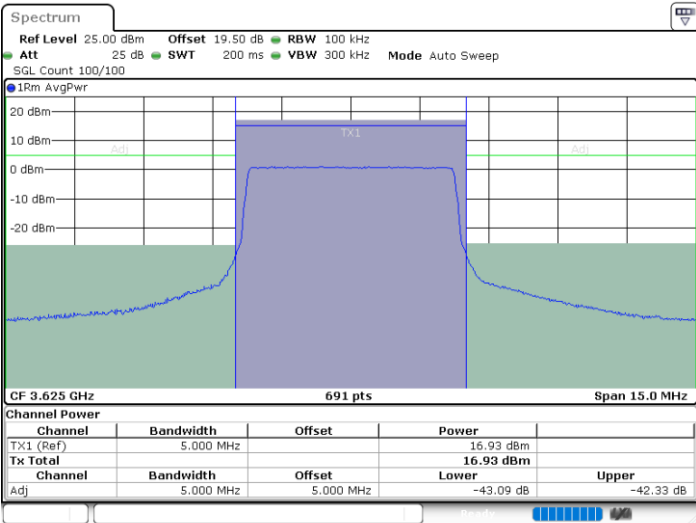

Date: 15.APR.2024 12:24:25




LTE Band 48 / 5MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

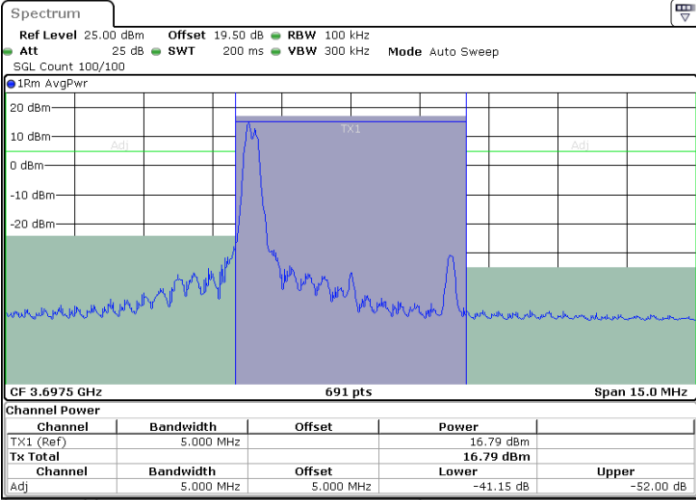


Date: 15.APR.2024 12:48:17

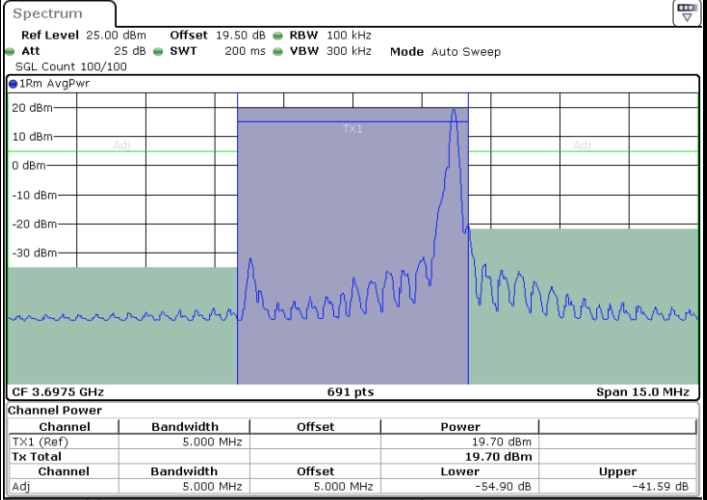

Date: 15.APR.2024 12:45:48

Highest Channel / FullRB

N/A

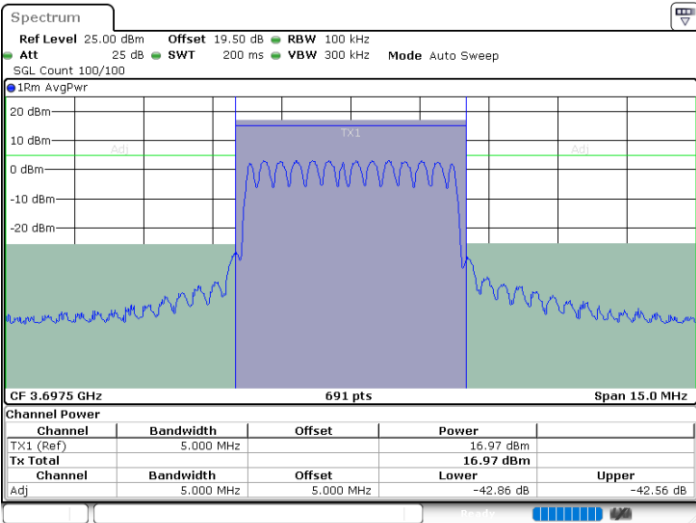


Date: 15.APR.2024 12:43:19



LTE Band 48 / 10MHz


16QAM

Lowest Channel / 1RB0

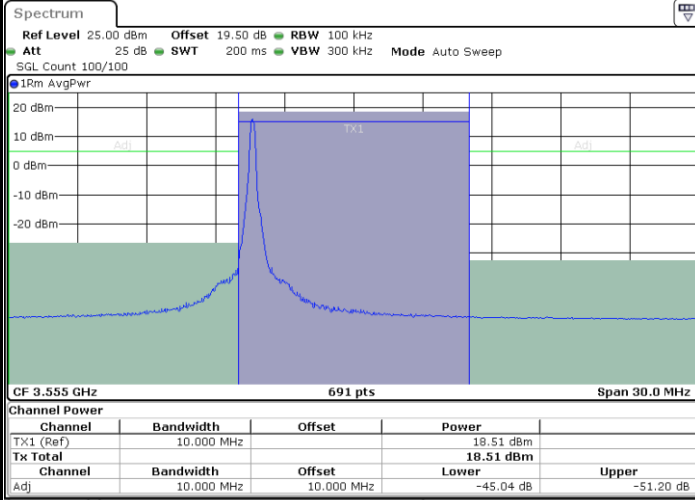


Date: 15.APR.2024 13:12:57

Lowest Channel / 1RBmax

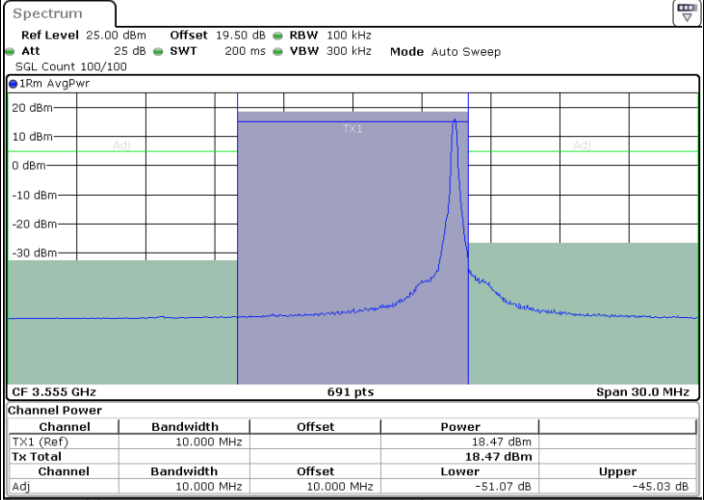

Date: 15.APR.2024 13:10:30

Lowest Channel / FullIRB

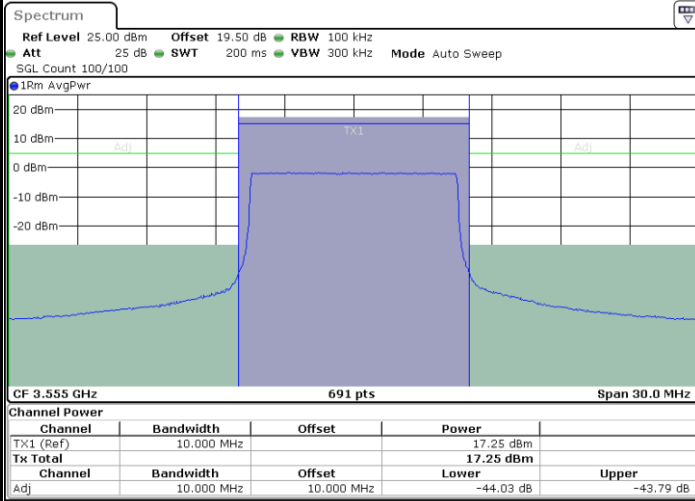

Date: 15.APR.2024 13:08:03


N/A



LTE Band 48 / 10MHz


16QAM

Middle Channel / 1RB0

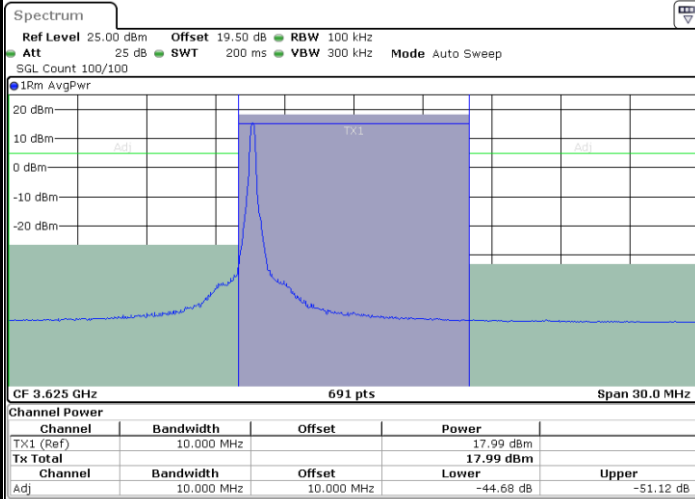


Date: 15.APR.2024 13:30:27

Middle Channel / 1RBmax

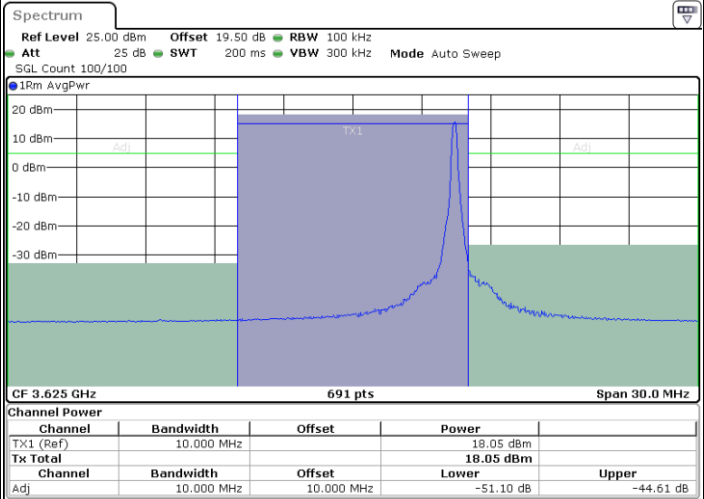

Date: 15.APR.2024 13:32:52

Middle Channel / FullIRB

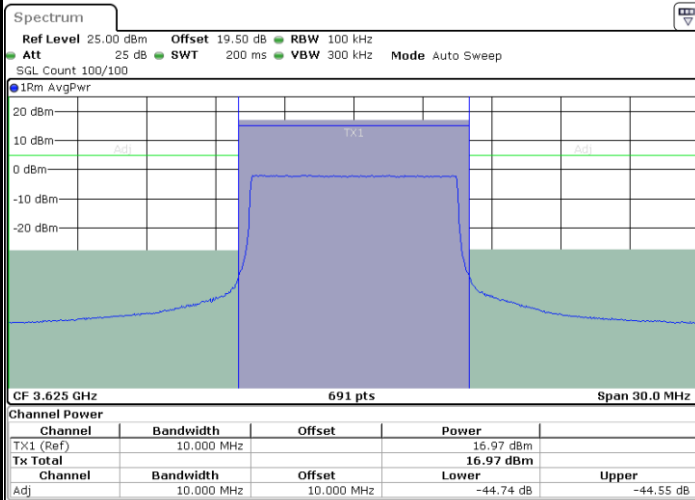

Date: 15.APR.2024 13:35:18

N/A




LTE Band 48 / 10MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

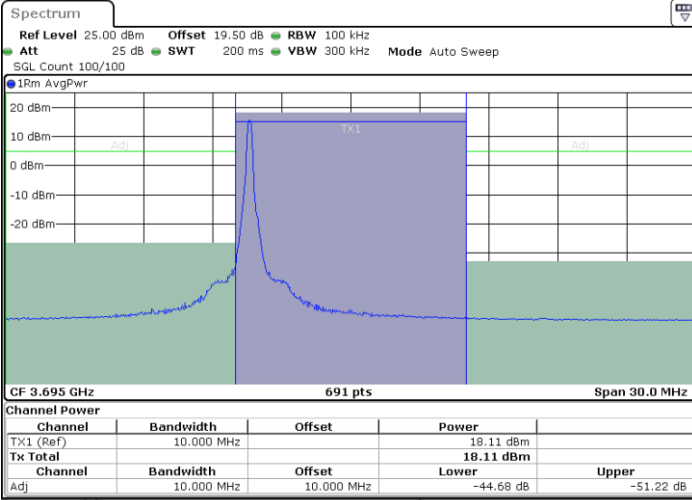


Date: 15.APR.2024 13:59:12

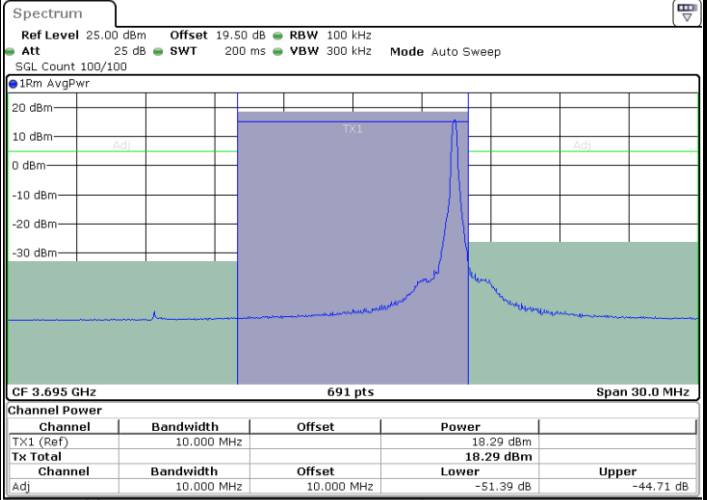

Date: 15.APR.2024 13:56:42

Highest Channel / FullRB

N/A

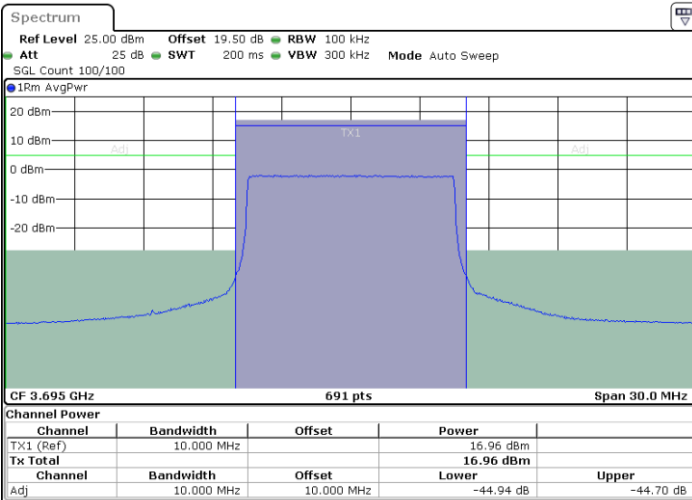

Date: 15.APR.2024 13:54:13





LTE Band 48 / 15MHz

16QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

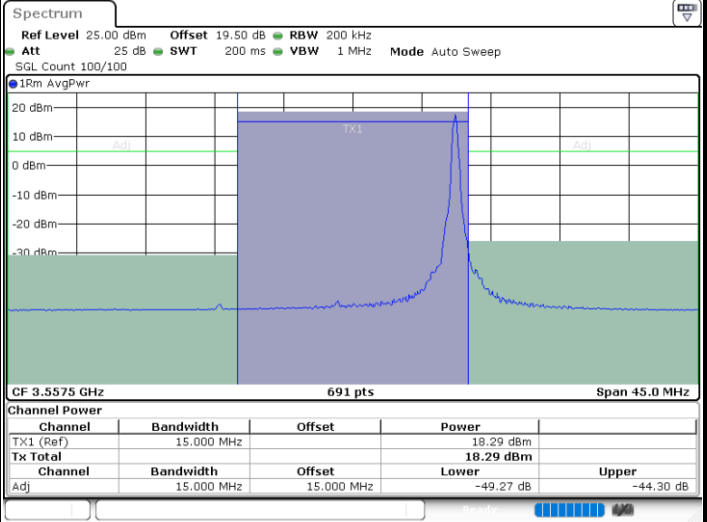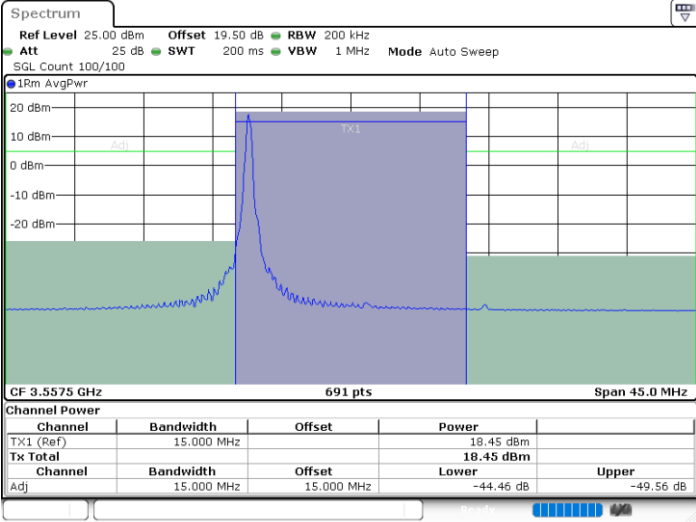


Date: 15.APR.2024 14:23:37

Date: 15.APR.2024 14:21:10

Lowest Channel / FullIRB

N/A

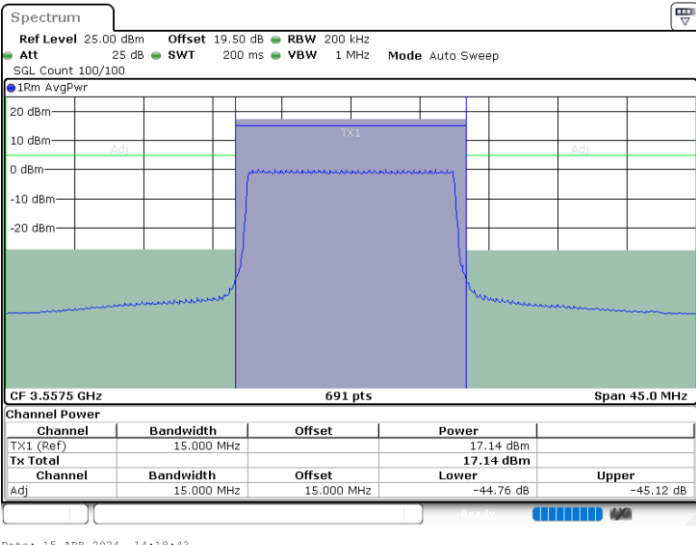

Date: 15.APR.2024 14:18:43




LTE Band 48 / 15MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

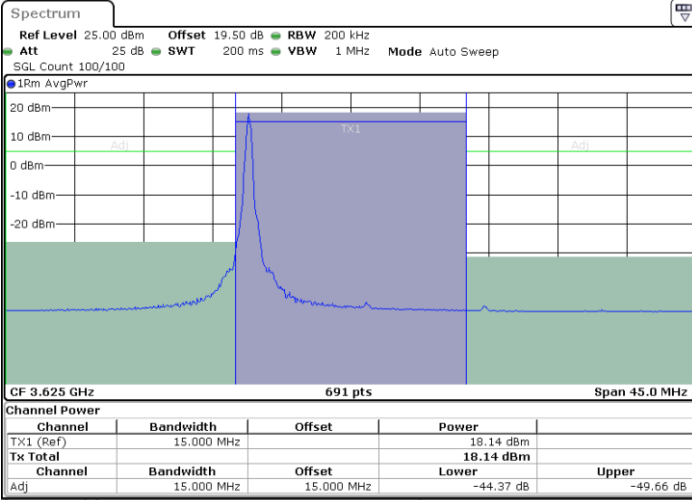


Date: 15.APR.2024 14:41:08

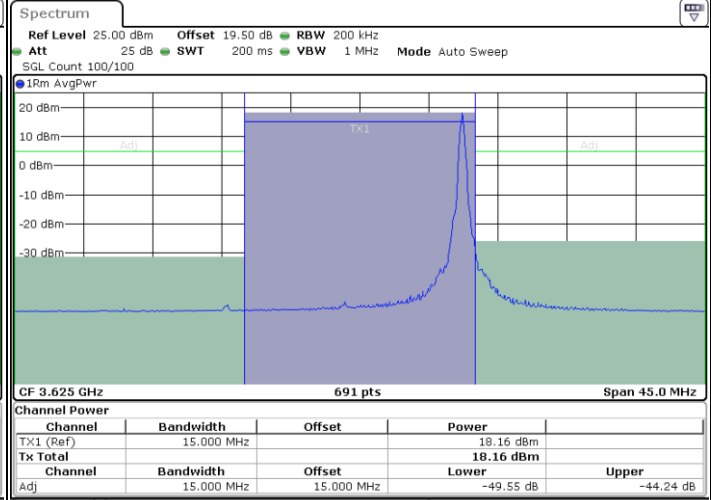

Date: 15.APR.2024 14:43:34

Middle Channel / FullIRB

N/A

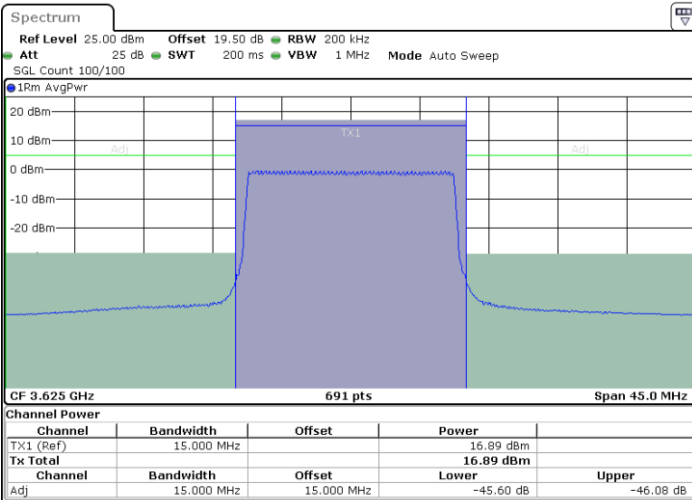

Date: 15.APR.2024 14:45:58




LTE Band 48 / 15MHz


16QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

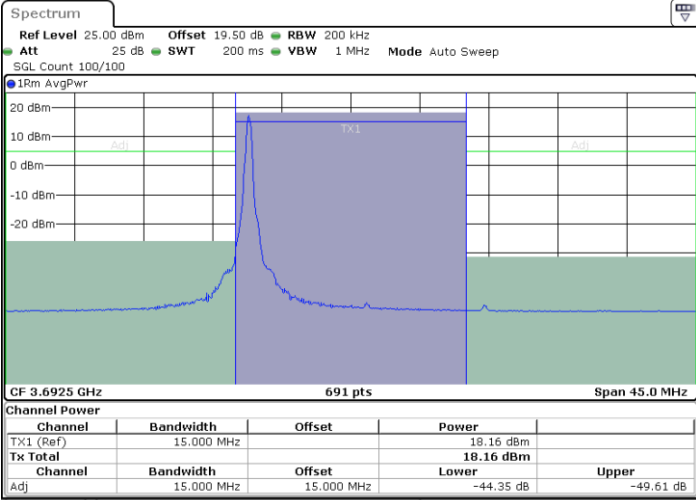


Date: 15.APR.2024 15:10:30

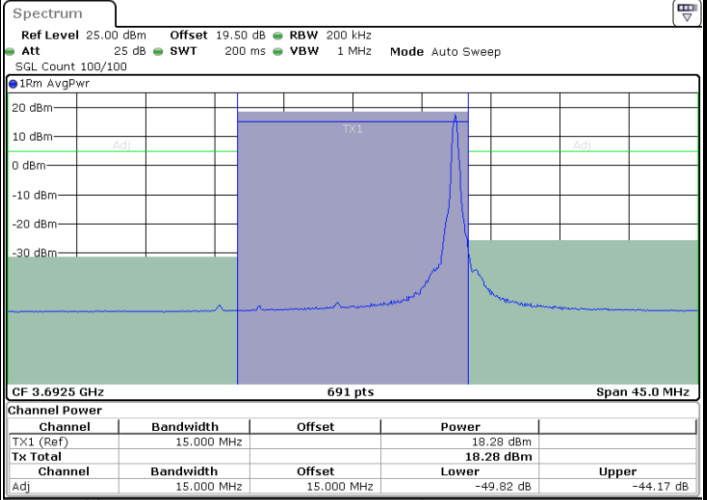

Date: 15.APR.2024 15:08:00

Highest Channel / FullRB

N/A

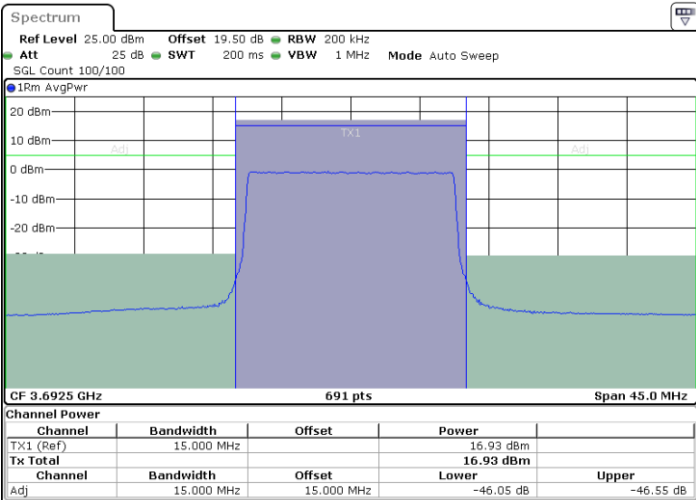

Date: 15.APR.2024 15:05:30





LTE Band 48 / 20MHz

16QAM


Lowest Channel / 1RB0

Lowest Channel / 1RBmax

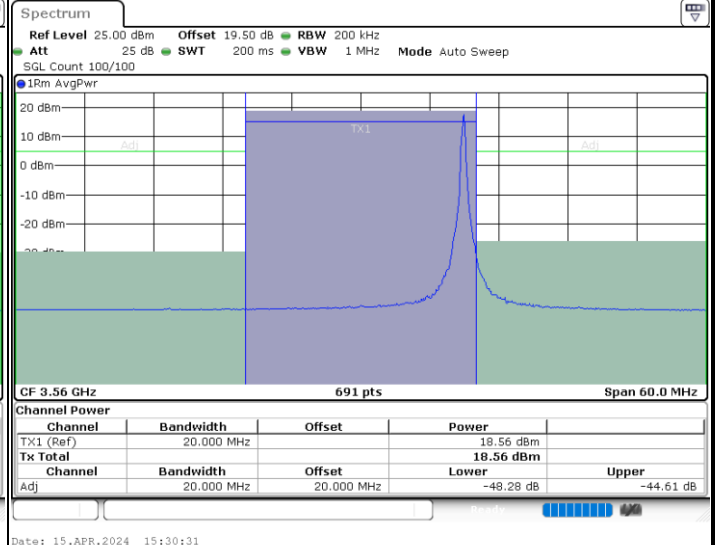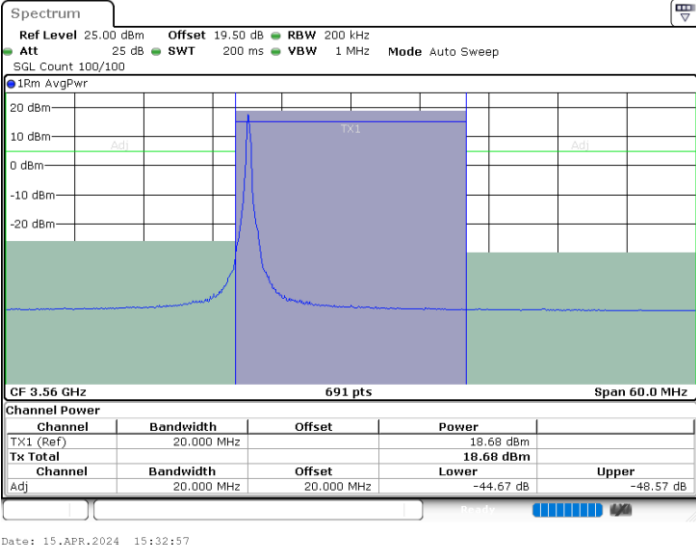

Lowest Channel / FullIRB

N/A

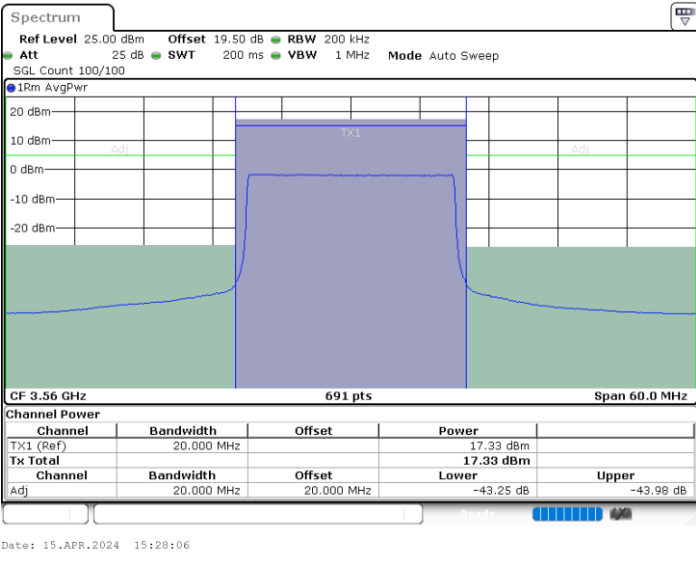




LTE Band 48 / 20MHz


16QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

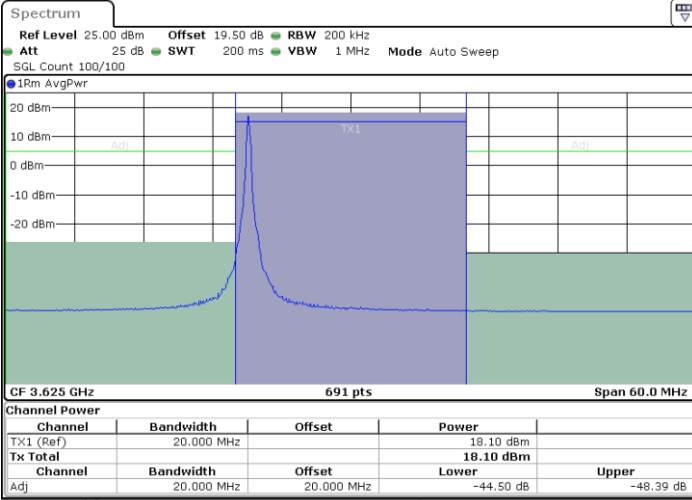


Date: 14.APR.2024 18:18:52

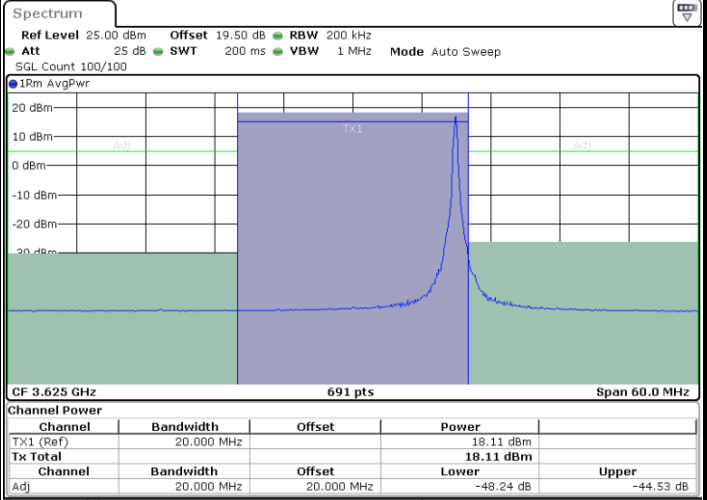

Date: 14.APR.2024 18:21:21

Middle Channel / FullIRB

N/A

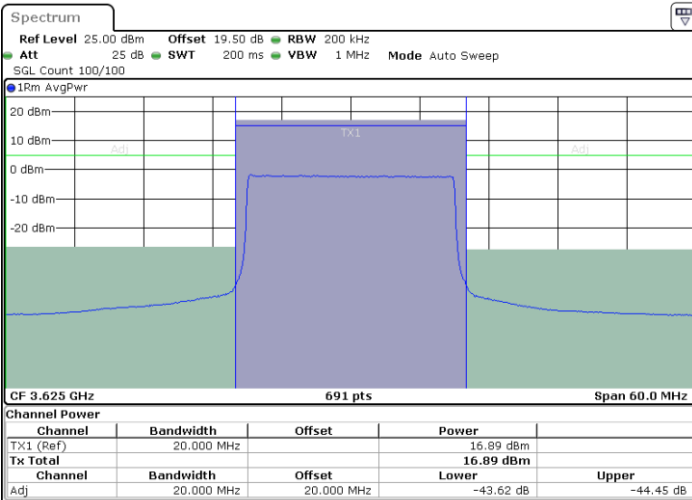

Date: 14.APR.2024 18:23:49





LTE Band 48 / 20MHz

16QAM


Highest Channel / 1RB0

Highest Channel / 1RBmax

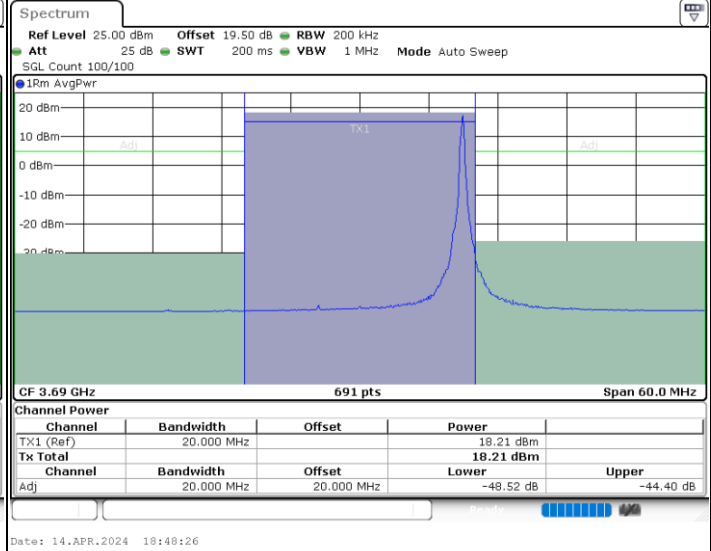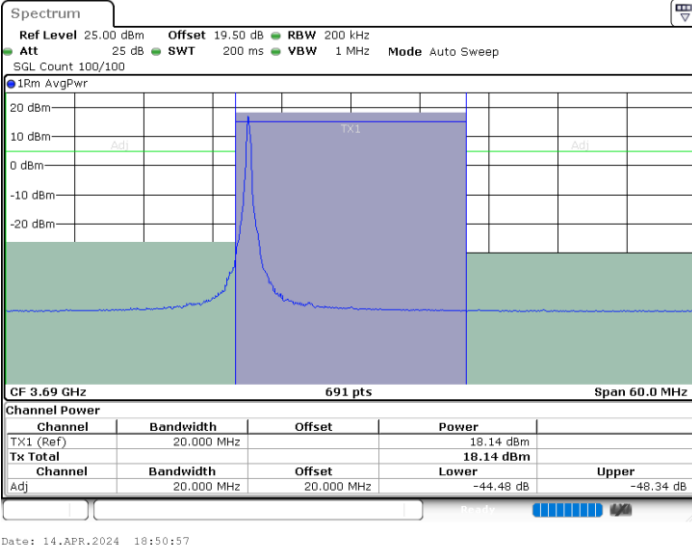

Highest Channel / FullRB

N/A

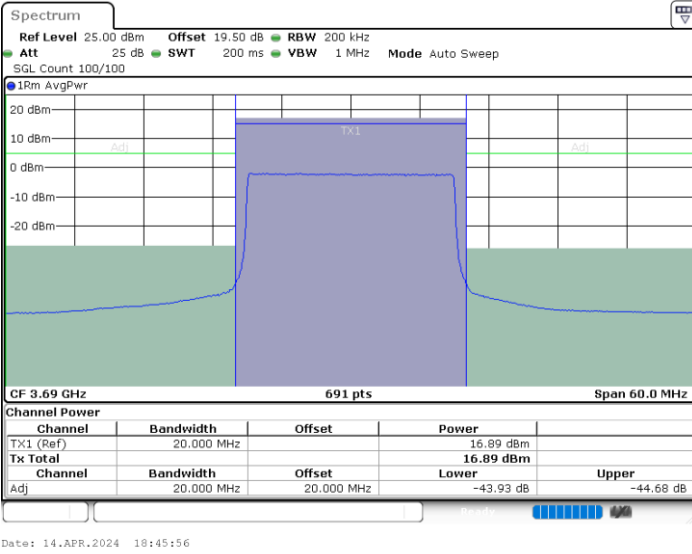




LTE Band 48 / 5MHz


64QAM

Lowest Channel / 1RB0

Lowest Channel / 1RBmax

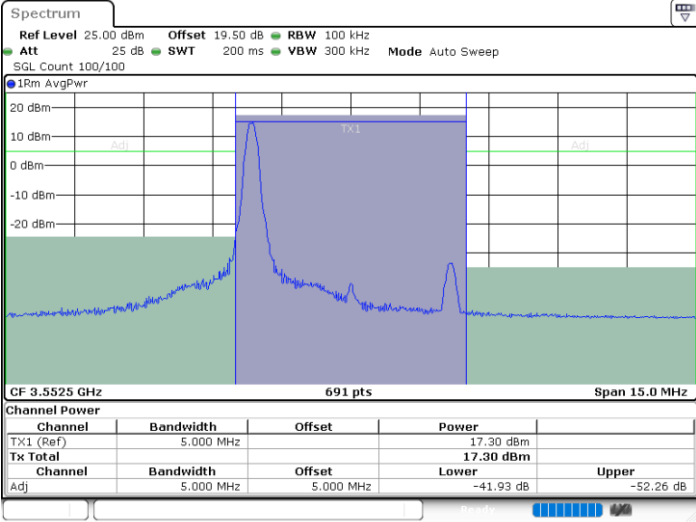


Date: 15.APR.2024 11:58:39

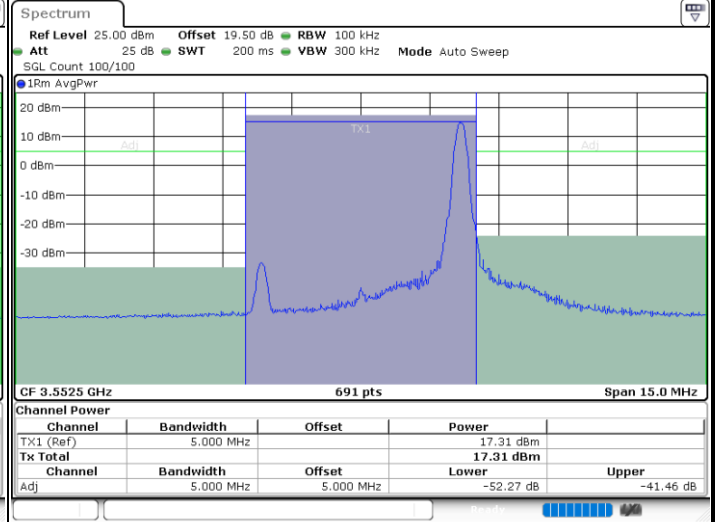

Date: 15.APR.2024 12:02:43

Lowest Channel / FullIRB

N/A

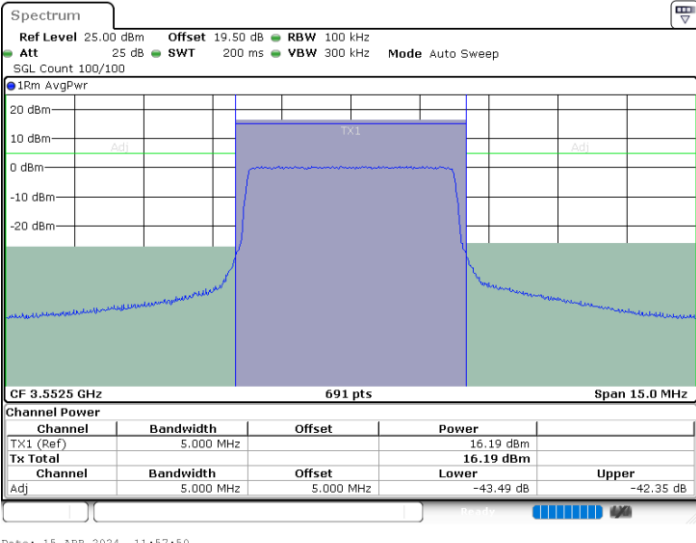

Date: 15.APR.2024 11:57:50




LTE Band 48 / 5MHz


64QAM

Middle Channel / 1RB0

Middle Channel / 1RBmax

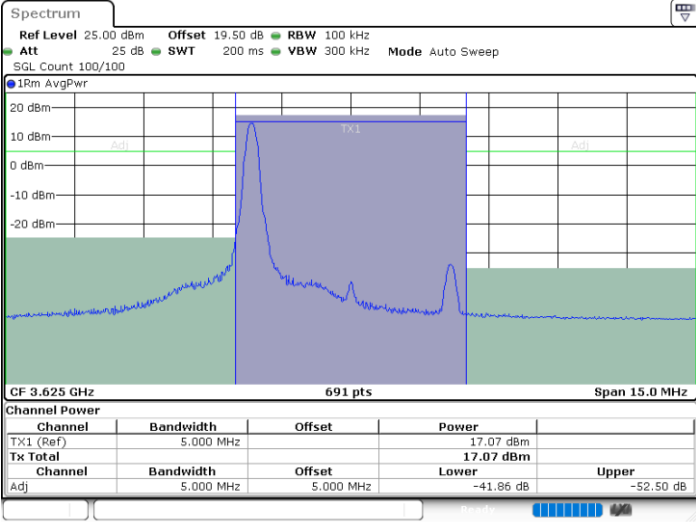


Date: 15.APR.2024 12:22:49

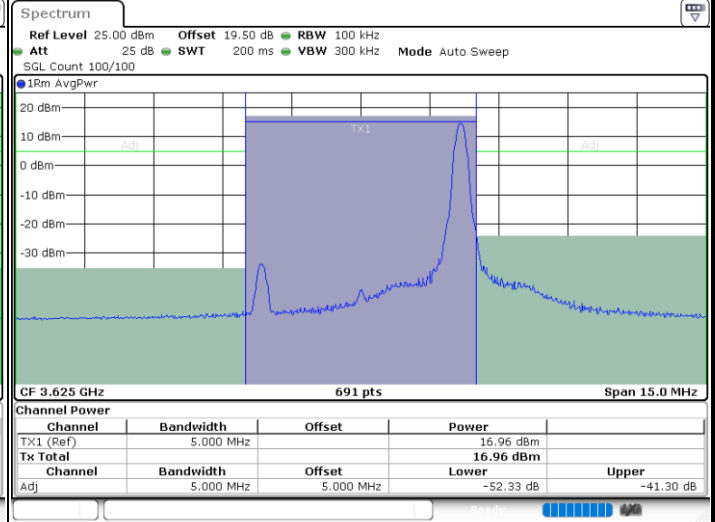

Date: 15.APR.2024 12:18:50

Middle Channel / FullIRB

N/A

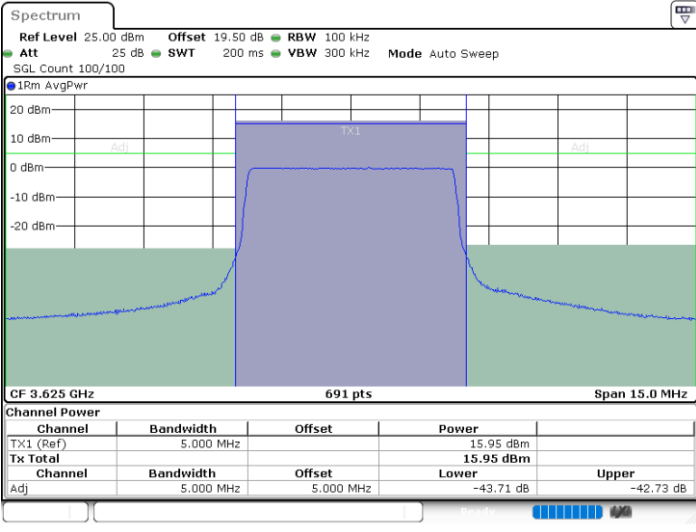

Date: 15.APR.2024 12:23:37




LTE Band 48 / 5MHz


64QAM

Highest Channel / 1RB0

Highest Channel / 1RBmax

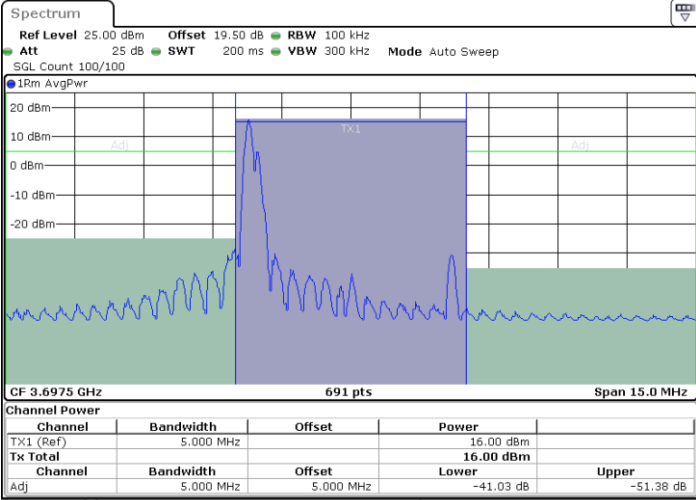


Date: 15.APR.2024 12:49:07

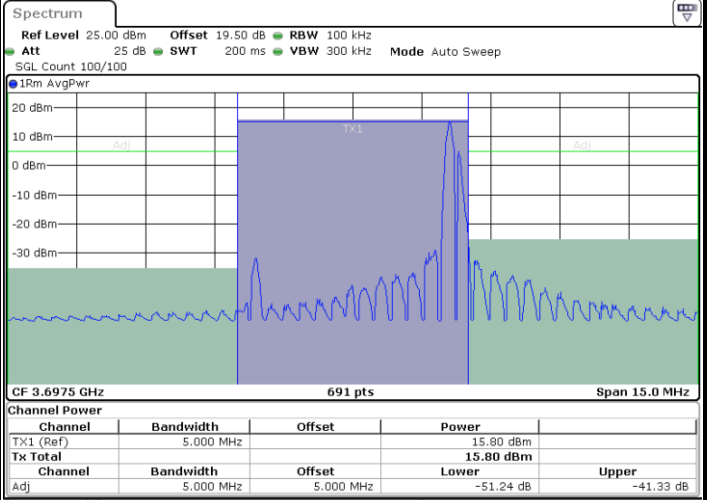

Date: 15.APR.2024 12:44:58

Highest Channel / FullRB

N/A

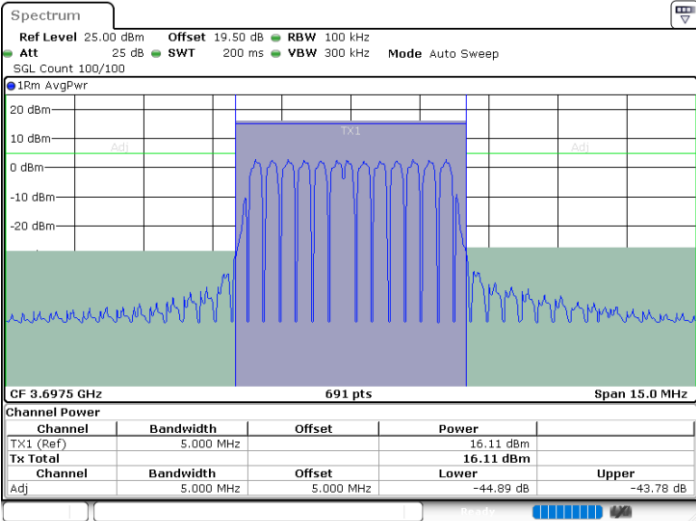

Date: 15.APR.2024 12:44:09